

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy Minerals and Natural Resources  
Department  
Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-144  
July 21, 2008

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.  
For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

3458

Pit, Closed-Loop System, Below-Grade Tank, or  
Proposed Alternative Method Permit or Closure Plan Application

- Type of action:  Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method  
 Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method  
 Modification to an existing permit  
 Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method

**Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request**


Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.  
Operator: BP AMERICA PRODUCTION COMPANY OGRID #: 778  
Address: 200 ENERGY COURT, FARMINGTON, NM 87410  
Facility or well name: GALLEGOS CANYON UNIT 083E  
API Number: 3004526011 OCD Permit Number: \_\_\_\_\_  
U/L or Qtr/Qtr C Section 26 Township 28N Range 12W County: San Juan  
Center of Proposed Design: Latitude 36.63786 Longitude -108.08398 NAD:  1927  1983  
Surface Owner:  Federal  State  Private  Tribal Trust or Indian Allotment

2.  
 **Pit:** Subsection F or G of 19.15.17.11 NMAC  
Temporary:  Drilling  Workover  
 Permanent  Emergency  Cavitation  P&A  
 Lined  Unlined Liner type: Thickness \_\_\_\_\_ mil  LLDPE  HDPE  PVC  Other \_\_\_\_\_  
 String-Reinforced  
Liner Seams:  Welded  Factory  Other \_\_\_\_\_ Volume: \_\_\_\_\_ bbl Dimensions: L \_\_\_\_\_ x W \_\_\_\_\_ x D \_\_\_\_\_

3.  
 **Closed-loop System:** Subsection H of 19.15.17.11 NMAC  
Type of Operation:  P&A  Drilling a new well  Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)  
 Drying Pad  Above Ground Steel Tanks  Haul-off Bins  Other \_\_\_\_\_  
 Lined  Unlined Liner type: Thickness \_\_\_\_\_ mil  LLDPE  HDPE  PVC  Other \_\_\_\_\_  
Liner Seams:  Welded  Factory  Other \_\_\_\_\_

4.  
 **Below-grade tank:** Subsection I of 19.15.17.11 NMAC Double wall/Double bottom 19.15.17.11 (4b)  
Volume: 95 bbl Type of fluid: Produced water  
Tank Construction material: Steel  
 Secondary containment with leak detection  Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off  
 Visible sidewalls and liner  Visible sidewalls only  Other \_\_\_\_\_  
Liner type: Thickness \_\_\_\_\_ mil  HDPE  PVC  Other \_\_\_\_\_



5.  
 **Alternative Method:**  
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6.  
**Fencing:** Subsection D of 19.15.17.11 NMAC (*Applies to permanent pits, temporary pits, and below-grade tanks*)  
 Chain link, six feet in height, two strands of barbed wire at top (*Required if located within 1000 feet of a permanent residence, school, hospital, institution or church*)  
 Four foot height, four strands of barbed wire evenly spaced between one and four feet  
 Alternate. Please specify **Hogwire fencing as per Design Plan**

7.  
**Netting:** Subsection E of 19.15.17.11 NMAC (*Applies to permanent pits and permanent open top tanks*)  
 Screen  Netting  Other \_\_\_\_\_  
 Monthly inspections (If netting or screening is not physically feasible)

8.  
**Signs:** Subsection C of 19.15.17.11 NMAC  
 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  
 Signed in compliance with 19.15.3.103 NMAC

9.  
**Administrative Approvals and Exceptions:**  
 Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  
**Please check a box if one or more of the following is requested, if not leave blank:**  
 Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval. (**Hogwire Fencing in Design Plan**)  
 Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval

10.  
**Siting Criteria (regarding permitting):** 19.15 17.10 NMAC  
*Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.*

Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within a 100-year floodplain - FEMA map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

11.

**Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist:** Subsection B of 19.15.17.9 NMAC

**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
- Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC
- Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

Previously Approved Design (attach copy of design) API Number: \_\_\_\_\_ or Permit Number: \_\_\_\_\_

12.

**Closed-loop Systems Permit Application Attachment Checklist:** Subsection B of 19.15.17.9 NMAC

**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
- Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
- Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

Previously Approved Design (attach copy of design) API Number: \_\_\_\_\_

Previously Approved Operating and Maintenance Plan API Number: \_\_\_\_\_ (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)

13.

**Permanent Pits Permit Application Checklist:** Subsection B of 19.15.17.9 NMAC

**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC
- Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- Climatological Factors Assessment
- Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
- Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
- Quality Control/Quality Assurance Construction and Installation Plan
- Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- Nuisance or Hazardous Odors, including H<sub>2</sub>S, Prevention Plan
- Emergency Response Plan
- Oil Field Waste Stream Characterization
- Monitoring and Inspection Plan
- Erosion Control Plan
- Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

14.

**Proposed Closure:** 19.15.17.13 NMAC **Method – 19.15.17.13E – Protocols and Procedures included in attached Closure Plan**

**Instructions:** Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.

Type:  Drilling  Workover  Emergency  Cavitation  P&A  Permanent Pit  Below-grade Tank  Closed-loop System  Alternative

Proposed Closure Method:  Waste Excavation and Removal  
 Waste Removal (Closed-loop systems only)  
 On-site Closure Method (Only for temporary pits and closed-loop systems)  
 In-place Burial  On-site Trench Burial  
 Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)

15.

**Waste Excavation and Removal Closure Plan Checklist:** (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

- Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
- Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
- Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
- Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
- Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

16.

**Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:** (19.15.17.13.D NMAC)

*Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.*

Disposal Facility Name: \_\_\_\_\_ Disposal Facility Permit Number: \_\_\_\_\_

Disposal Facility Name: \_\_\_\_\_ Disposal Facility Permit Number: \_\_\_\_\_

Will any of the proposed closed-loop system operations and associated activities occur on or in areas that *will not* be used for future service and operations?

Yes (If yes, please provide the information below)  No

*Required for impacted areas which will not be used for future service and operations:*

Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC

Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC

Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

17.

**Siting Criteria (regarding on-site closure methods only):** 19.15.17.10 NMAC

*Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.*

Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within a 100-year floodplain. - FEMA map	<input type="checkbox"/> Yes <input type="checkbox"/> No

18.

**On-Site Closure Plan Checklist:** (19.15.17.13 NMAC) *Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.*

- Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
- Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC
- Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC
- Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
- Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
- Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
- Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)
- Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
- Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

19. **Operator Application Certification:**

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name (Print): LARRY SCHLOTTERBACK Title: ENVIRONMENTAL COORDINATOR  
Signature: [Handwritten Signature] Date: APRIL 20, 2009  
e-mail address: larry.schlotterback@bp.com Telephone: (505) 326-9200

20. **OCD Approval:**  Permit Application (including closure plan)  Closure Plan (only)  OCD Conditions (see attachment)

OCD Representative Signature: [Handwritten Signature] Approval Date: 6/22/2011  
Title: Compliance Officer OCD Permit Number: \_\_\_\_\_

21. **Closure Report (required within 60 days of closure completion):** Subsection K of 19.15.17.13 NMAC

*Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.*

Closure Completion Date: \_\_\_\_\_

22. **Closure Method:**

Waste Excavation and Removal  On-Site Closure Method  Alternative Closure Method  Waste Removal (Closed-loop systems only)  
 If different from approved plan, please explain.

23. **Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:**

*Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.*

Disposal Facility Name: \_\_\_\_\_ Disposal Facility Permit Number: \_\_\_\_\_  
Disposal Facility Name: \_\_\_\_\_ Disposal Facility Permit Number: \_\_\_\_\_

Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations?  
 Yes (If yes, please demonstrate compliance to the items below)  No

Required for impacted areas which will not be used for future service and operations:

- Site Reclamation (Photo Documentation)
- Soil Backfilling and Cover Installation
- Re-vegetation Application Rates and Seeding Technique

24. **Closure Report Attachment Checklist:** *Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.*

- Proof of Closure Notice (surface owner and division)
- Proof of Deed Notice (required for on-site closure)
- Plot Plan (for on-site closures and temporary pits)
- Confirmation Sampling Analytical Results (if applicable)
- Waste Material Sampling Analytical Results (required for on-site closure)
- Disposal Facility Name and Permit Number
- Soil Backfilling and Cover Installation
- Re-vegetation Application Rates and Seeding Technique
- Site Reclamation (Photo Documentation)

On-site Closure Location: Latitude \_\_\_\_\_ Longitude \_\_\_\_\_ NAD:  1927  1983

25. **Operator Closure Certification:**

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print): \_\_\_\_\_ Title: \_\_\_\_\_  
Signature: \_\_\_\_\_ Date: \_\_\_\_\_  
e-mail address: \_\_\_\_\_ Telephone: \_\_\_\_\_

# BP AMERICA PRODUCTION COMPANY

## San Juan Basin in Northwest New Mexico Below-Grade Tank Design and Construction Plan

Pursuant to Rule 19.15.17.11 NMAC, BP America Production Company (BP) shall construct a below-grade tank (BGT) or modify an existing permitted BGT with the following requirements. Any deviations from this plan will be addressed on the New Mexico Oil Conservation Division's (NMCOD) form C-144 at the time of submittal.

- 1) The BGT will be constructed to contain liquids and prevent contamination of fresh water and protect public health and the environment as to address Subsection A of 19.15.17.11 NMAC.
- 2) A well sign in compliance with 19.15.3.103 NMAC will be posted at the well site to address, at a minimum, those requirements stipulated in Subsection C of 19.15.17.11 NMAC.
- 3) BP will fence or enclose its BGTs in a manner that prevents unauthorized access and shall maintain its fence in good repair.
- 4) BP will fence or enclose a BGT located within 1,000 feet of a permanent residence, school, hospital, institution or church according to the specifications stated in Paragraph 2 of Subsection D, 19.15.17.11 NMAC. At a minimum, a chain link security fence at least six (6) feet in height with at least two (2) strands of barbed wire at the top will be erected. BP will ensure that all gates associated with the fence are closed and locked when responsible personnel are not on-site.
- 5) BP is requesting NMOCD's approval for an alternative fence design that provides, at a minimum, equivalent protection to the design specified in Paragraph 3 of Subsection D of 19.15.17.11 NMAC for BGTs beyond the stated distance in paragraph 4 of this document. BP's proposed design for its BGTs will utilize 48" steel mesh field-fence (hogwire) with a metal or steel top rail. Perimeter T-post will be installed roughly every 10 feet.
- 6) Individual BGT perimeter fencing is not required if an adequate surrounding well site/facility perimeter fence that prevents unauthorized access is currently existing.
- 7) BP's BGTs will be netted, screened, or enclosed with a steel top with a screened steel hatch as to prevent a hazardous condition to wildlife, including migratory birds (addressing Subsection E of 19.15.17.11 NMAC).
- 8) The following requirements adhere to Subsection I of 19.15.17.11 NMAC.
  - a. BP's BGTs will be constructed of materials resistant to produced water, accidental condensate/hydrocarbon fluids, and damage from sunlight (manufacturer's specification documentation attached).
  - b. BP's BGTs shall have a properly constructed earthen foundation consisting of a level base free of rocks, debris, sharp edges, or irregularities as to prevent punctures, cracks or indentations of any liner (if utilized and meet the minimum requirements in Subsection I of 19.15.17.11 NMAC) or BGT bottom.
  - c. The BGT will be constructed to prevent overflow and the collection of surface water run-on by using earthen berms and/or diversion dikes.
  - d. BP may install a BGT according to Subparagraph (a) of Paragraph 4 of Subsection I of 19.15.17.11 NMAC (**see simplistic schematic - bottom of page 1**). The sidewall cellars will typically be constructed of either wooden or steel material and bounded by earthen material. Any loss of the cellar's structural integrity will be evaluated by the monthly inspection as described in BP's Operating and Maintenance Plan for BGTs. BP will demonstrate any liner installed will meet, at a minimum, the specifications addressed in Subparagraph (a) of Paragraph 4 of Subsection I of 19.15.17.11 NMAC. BP will also request NMOCD approval prior to any liner installation described in this paragraph.
  - e. BP may install a BGT according to Subparagraph (b) of Paragraph 4 of Subsection I of 19.15.17.11 NMAC by installing double walled/double bottom steel tanks with a 2 inch leak detection port (**see simplistic schematic - bottom of page 2**). The leak detection will be monitored according to BP's NMOCD approved Operating and Maintenance Plan for BGTs.
  - f. BP may install a BGT according to Subparagraph (c) of Paragraph 4 of Subsection I of 19.15.17.11 NMAC (**see simplistic schematic - bottom of page 3**). This alternative design is simply a tank in a tank in which either Paragraph d or e of this document addresses the requirements for the prevention of contaminating fresh water, the protection of public health, and the environment.
- 9) BP's BGTs constructed and installed prior to June 16, 2008 that have the side walls open for visual inspection and are placed upon a geomembrane liner but does not meet all the requirements in Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC are not required to equip or retrofit the BGT to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC so long as the BGT demonstrates integrity. If the existing BGT does not demonstrate integrity, then BP will promptly remove the BGT and retrofit to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 10) BP's BGTs constructed and installed prior to June 16, 2008 that do not comply with Paragraph (1) through (4) of Subsection I of 19.15.17.11 NMAC or do not comply with Paragraph (5) of Subsection I of 19.15.17.11 NMAC will equip or retrofit the BGT to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, or close it according to BP's NMOCD approved closure plan, within five (5) years after June 16, 2008. If existing BGTs do not demonstrate integrity, BP will promptly remove the BGT and retrofit to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.

**BP AMERICA PRODUCTION COMPANY**  
San Juan Basin in Northwest New Mexico  
Below-Grade Tank Operating and Maintenance Plan

Pursuant to Rule 19.15.17.12 NMAC, BP America Production Company (BP) shall maintain and operate a below-grade tank (BGT) with the following requirements. Any deviations from this plan will be addressed with the submittal to the New Mexico Oil Conservation Division's (NMOCD) form C-144 at the time of the BGT permit or modification to an existing permitted BGT application.

- 1) BP's BGTs will be operated and maintained to contain liquids and prevent contamination of fresh water, protect public health and the environment by conducted monthly inspection by a third party entity and daily monitoring of automated high level shut off device. BP has existing automated cathodic protection on a majority of its sites for further warning of any unforeseeable release occurrences.
- 2) BGT fluid contents will be re-used, recycled or disposed in a manner to protect fresh water, public health and the environment. Disposal of BGT contents is addressed in BP's NMOCD approved Closure Plan.
- 3) BP will not knowingly discharge or store any hazardous waste into a BGT.
- 4) If a BGT develops a leak, or a release occurs due to mechanical failure or vandalism, or if any penetration for whatever unforeseeable reason of a BGT occurs below the liquid's surface, BP will attempt to 1) evacuate all liquids from the BGT or, at a minimum, above the damage or leak line within 48 hours, 2) notify the NMOCD's District III office within 48 hours of the discovery or within the allowable timeframe stipulated in 19.15.3.116 NMAC and 3) repair the damage or retrofit the BGT as specified within BP's NMOCD approved Design and Construction Plan for BGTs.
- 5) BP will install its BGTs to prevent the collection of surface water run-on using earthen berms and/or diversion dikes.
- 6) The following requirements adhere to Subsection D of 19.15.17.12 NMAC.
  - a. BP will not allow its BGTs to overflow or allow surface water run-on to enter into its BGTs as already described in Paragraph 1 and 5 of this document.
  - b. BP will remove any visible or measurable layer of oil from the fluid surface of any of its BGTs.
  - c. BP will inspect its BGTs at least monthly by a third party entity. The personnel will conduct a walk-around of the BGT to observe any abnormalities to the daily operation of the BGT. When applicable, monitoring of the BGT's inspection port will be conducted using either a measuring stick or an electronic device capable of detecting fluids (specifications will be noted on inspection reports). Personnel will record any BGT integrity deficiencies and report to BP immediately if an imminent danger to fresh water, public health, or to the environment is observed. BP will maintain a written record (generally referred to as Green day reports) of each inspection for at least five (5) years.
  - d. BP will maintain at a minimum, a one (1) foot freeboard to prevent overtopping of its BGT.

# BP AMERICA PRODUCTION COMPANY

## SAN JUAN BASIN, NORTHWEST NEW MEXICO

### BELOW-GRADE TANK CLOSURE PLAN

As stipulated in Rule 19.15.17.13 NMAC, the following information adheres to the requirements established in closing below-grade tanks (BGTs) on BP America Production Company (BP) well sites. This plan will address the standard protocols and procedures for closure of BGTs. If deviations from this plan are necessary, any specific changes will be included with New Mexico Oil Conservation Division (NMOCD) form C-144.

BP shall close its BGTs within the time periods provided in 19.15.13 NMAC, or by an earlier date that the NMOCD requires due to imminent danger to fresh water, public health or the environment. BP shall close its existing BGTs that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five (5) years after June 16, 2008, if not retrofitted to comply with Paragraph (1) through (4) of Subsection I of 19.15.17.11 NMAC. BP shall close its permitted BGTs within 60 days of cessation of the BGTs operation or as required by the transitional provisions of Subsection B, D, or E of 19.15.17.17 NMAC in accordance with this closure plan after receiving NMOCD's division District III office approval.

The following outline addresses all requirements for closure of BP's BGTs;

1. BP shall notify the surface owner by certified mail, return receipt requested, that it plans to close a BGT. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records is understood to demonstrate compliance with this requirement.
2. In addition, notification will also be given to the division District III office verbally or by other means at least 72 hours, but not more than one (1) week, prior to any closure operation. The notice shall include the well name and number to be closed, legal description utilizing unit letter, section, township, range, and API number.
3. Remove liquids and sludge from the BGTs prior to implementing a closure method and dispose of the liquids and sludge in a NMOCD's division-approved facility. A list of BP approved disposal facilities are included at the end of this document.
4. Remove the BGT and dispose of it in a NMOCD's division-approved facility or recycle, reuse, or reclaim it in a manner that the NMOCD's division District III office approves.
5. Remove any on-site equipment associated with a BGT unless the equipment is required for some other purpose.
6. BP will test the soils beneath the BGTs to determine whether a release has occurred. At a minimum, a five (5) point composite sample and individual grab samples from any area that is wet, discolored or showing other evidence of a release will be analyzed for BTEX, TPH and chlorides. The testing methods and closure standards for those constituents are as follows;

Constituents	Testing Method	Closure Standards (mg/Kg)
Benzene	US EPA Method SW-846 8021B or 8260B	0.2
Total BTEX	US EPA Method SW-846 8021B or 8260B	50
TPH	US EPA Method SW-846 418.1	100
Chlorides	US EPA Method 300.0	250 or background

Notes: mg/Kg = milligram per kilogram, BTEX = benzene, toluene, ethylbenzene, and total xylenes, TPH = total petroleum hydrocarbons. Other EPA method that the division approves may be applied to all constituents listed. Chloride closure standards will be determined by which ever concentration level is greatest.

7. BP will notify the division District III office of its results on form C-141. It is understood that the NMOCD may require additional delineation upon review of the results.
8. If it is determined that a release has occurred, then BP will comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.



9. If the confirmation sampling demonstrates that a release has not occurred or that any release does not exceed the concentrations specified above, then BP will backfill the excavation, with NMOCD's pre-approval, with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site. The NMOCD prescribed soil cover, recontouring and re-vegetation requirements shall comply with Subsections G, H and I of 19.15.17.13 NMAC.
10. Reclamation will follow 19.15.17.13G (1) and (2).
  - a. Once the BGT has been approved for closure by NMOCD, the BGT location and all areas associated with the BGT including associated access roads will be reclaimed to a safe and stable condition that blends with the surrounding undisturbed area. It is understood that BP shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Subsection H of 19.15.17.13 NMAC, recontour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Subsection I of 19.15.17.13 NMAC.
11. Soil cover will follow 19.15.17.13H (1) and (3).
  - a. The soil cover for closures where the BGT has been removed or remediated to the NMOCD's satisfaction shall consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater.
  - b. The soil cover will be constructed to the site's existing grade and all possible efforts will be conducted to prevent ponding of water and erosion of the cover material.
12. Revegetation will follow 19.15.17.13I (1), (2), (3), (4) and (5).
  - a. Revegetation of the pit location and any associated access road(s) will be attempted during the first growing season after closure of the pit with seeding or planting of the disturbed areas. Seeding will be accomplished by tilling/plowing on the contour whenever practical or by other division-approved methods. Vegetative cover will be, at a minimum, 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation), consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintenance of that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.
  - b. Seeding or planting will be repeated until it successfully achieves the required vegetative cover.
  - c. When conditions are not favorable for the establishment of vegetation, such as periods of drought, it is understood that the division may allow sufficient time to delay seeding or planting until soil moisture conditions become favorable. In addition, the division may require BP to use additional cultural techniques such as mulching, fertilizing, irrigating, fencing or other practices.
  - d. Notification will be given to the division District III office when seeding or planting has been successfully achieved.
13. Within 60 days of closure completion, submittal of a closure report on NMOCD's form C-144, with necessary attachments to document all closure activities including sampling results; information required by 19.15.17 NMAC; a plot plan; details on back-filling, capping, and covering, where applicable. BP will certify that all information in the report and attachments is accurate, truthful, and compliant with all applicable closure requirements and conditions specified in the approved closure plan.

Proposed waste disposal sites:

BP Crouch Mesa Landfarm, Permit NM-02-003  
 JFJ Landfarm, Permit NM-01-010(B)  
 Basin Disposal, Permit NM-01-0005  
 BP Operated E.E. Elliott SWD #1, API 30-045-27799  
 BP Operated 13 GCU SWD #1, API 30-045-28601  
 BP Operated GCU 259 SWD, API 30-045-20006  
 BP Operated GCU 306 SWD, API 30-045-24286  
 BP Operated GCU 307 SWD, API 30-045-24248  
 BP Operated GCU 328 SWD, API 30-045-24735  
 BP Operated Pritchard SWD #1, API 30-045-28351

# *BLAGG ENGINEERING, INC.*

P.O. Box 87, Bloomfield, New Mexico 87413  
Phone: (505)632-1199 Fax: (505)632-3903

April 20, 2009

BP America Production Company  
GCU #083E  
(C) Section 26 – T28N – R12W  
API #: 30-045-26011  
San Juan County, New Mexico

## Hydrogeology Report (Pursuant to NMAC 19.15.17.9, Subsection B, Paragraph 4)

1) Topography: The well site is located approximately 7½ miles southwest of Bloomfield, New Mexico. Regionally the site is located within the Navajo Agricultural Product Industry (NAPI) agricultural operation and greater than 200 lateral feet from any existing surface drainage. The site surroundings consist of a varying thickness of coarse grained sand to silty sand

2) Soils: Surface soils at the proposed below-grade tank (BGT) site are comprised of a coarse grained sand with imported crushed gravel (road based). The thickness of this sand at the site is unknown. Silty clay to clay comprise the agricultural operations conducted by NAPI surrounding the site.

3) Geology: Review of the geologic map published by the New Mexico Bureau of Geology and Mineral Resources, 2003 indicates the outcrop at the site is the Nacimiento Formation of Paleocene age. This formation is described as a gray and brown shale and tan, medium grained and conglomeratic sandstone with a thickness as much as 240 meters. Its origin developed from fluvial and lacustrine type environments.


4) Surface Hydrology: Surface run-off at the well pad is towards the north. Visual inspection of the site did not present evidence that historical precipitation had made erosional channels that would harm the integrity of the BGT site should a storm event occur while the BGT is in use. No new manmade ponds, ditches, or any other surface depressions for surface water accumulation purposes were observed in the immediate vicinity. In addition, topographic or visual inspection of the site did not present evidence that any continuously flowing watercourse or any other significant watercourse or lakebed, sinkhole or playa lake were within 200 lateral feet from the proposed BGT location.


5) Groundwater Hydrology: Information researched in the New Mexico State Engineer's well database did not report any water wells within one (1) mile of the site. Based on topographic data, it appears that groundwater is well in excess of 50 feet below surface grade.

6) Ground Stability: Visual inspection of the site did not show any faulting, fracturing, sink holes or erosional features that would indicate an unstable area.


7) Wetlands, FEMA Flood Zones, and Mines: U.S. Fish and Wildlife Wetlands, FEMA FIRM Flood Zone, and New Mexico Office of Mines, Mills and Quarries maps were reviewed to identify any such zones in the area of the proposed BGT. All of the specified areas exceed the required distances cited in 19.15.17.10 NMAC relative to the proposed BGT location. Maps of the data search are attached.

8) Private residences, wells, springs, schools, hospitals, institutions, churches: The site was inspected for evidences of buildings, wells, etc. and no such structures were evident within three hundred (300) feet of the site. The NM Office of State Engineer records were reviewed for well data. No such data was found within one (1) mile of the site.






BP - GCU # 83E  
Unit C, Sec. 26, T28N, R12W  
36.63748/108.08378

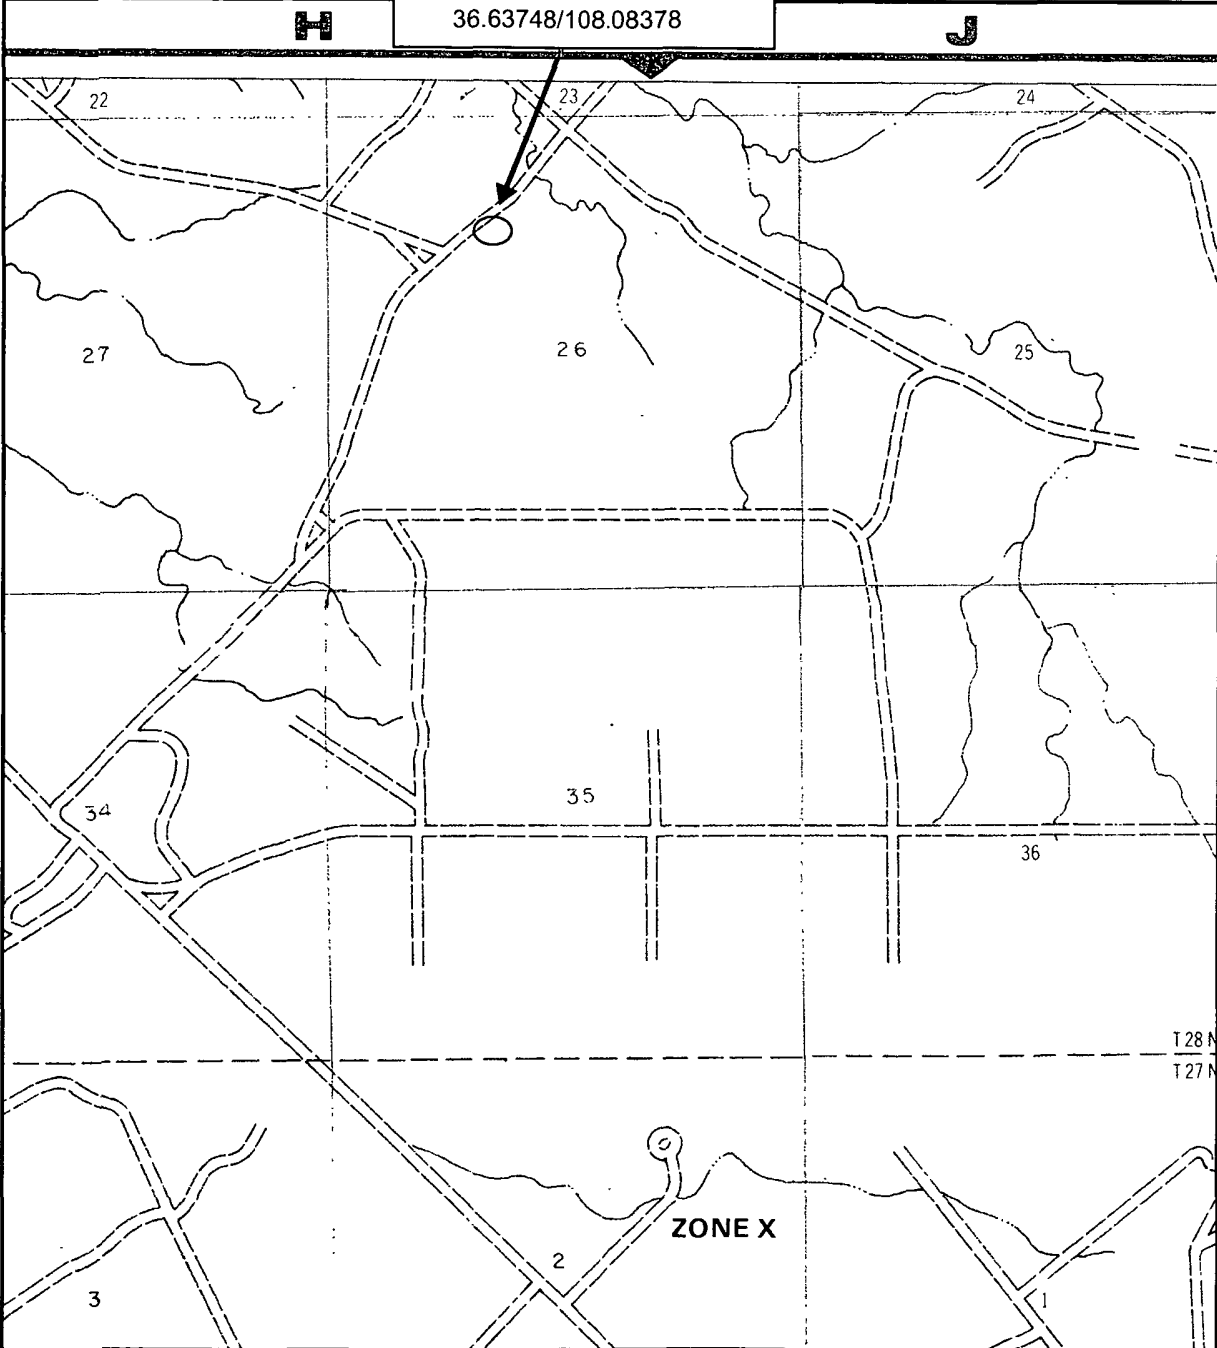

APPROXIMATE SCALE




NATIONAL FLOOD INSURANCE PROGRAM

**FIRM**  
FLOOD INSURANCE RATE MAP

SAN JUAN COUNTY,  
NEW MEXICO  
UNINCORPORATED AREAS

PANEL 700 OF 1450  
(SEE MAP INDEX FOR PANELS NOT PRINTED)



PANEL LOCATION

COMMUNITY-PANEL NUMBER  
350064 0700


EFFECTIVE DATE:  
AUGUST 4, 1988



Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MIT On-Line. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at [www.msc.fema.gov](http://www.msc.fema.gov)

General Vicinity of  
BP - GCU #083E



New Mexico 500k Geologic Map  
New Mexico Bureau of Geology  
and Mineral Resources, 2003

New Mexico Office of the State Engineer  
POD Reports and Downloads

Township:  Range:  Sections:

NAD27 X:  Y:  Zone:  Search Radius:

County:  Basin:  Number:  Suffix:

Owner Name: (First)  (Last)  C Non-Domestic C Domestic @ All

POD / SURFACE DATA REPORT 04/20/2009

(acre ft per annum)  
DB File Nbr Use Diversion Owner

POD Number

(quarters are 1=NW 2=NE 3=SW 4=SE)  
(quarters are biggest to smallest X Y are in Feet  
Source Tws Rng Sec q q q Zone X Y

No Records found, try again


# BP - GCU # 083E MMQ Web Map

## Mines, Mills & Quarries Commodity Groups

- △ Aggregate & Stone Mines
- ◆ Coal Mines
- ★ Industrial Minerals Mines
- ▼ Industrial Minerals Mills
- ☒ Metal Mines and Mill Concentrate
- Potash Mines & Refineries
- ⌘ Smelters & Refinery Ops.
- ⚡ Uranium Mines
- ⊕ Uranium Mills

## Mines, Mills & Quarries Status

- × Active Mining



SCALE 1 : 156,204



General Area of  
BP's GCU #083E  
well site.



# BP - GCU #83E




## Legend

- Ohio\_wet\_scan**
- 0
- 1
- Out of range
- Interstate
- Major Roads
- Other Road
- Interstate
- State highway
- US highway
- Roads
- Cities
- USGS Quad Index 24K
- Lower 48 Wetland Polygons
- Estuarine and Marine Deepwater
- Estuarine and Marine Wetland
- Freshwater Emergent Wetland
- Freshwater Forested/Shrub Wetland
- Freshwater Pond
- Lake
- Other
- Riverine
- Lower 48 Available Wetland Data
- Non-Digital
- Digital
- No Data
- Scan
- NHD Streams
- Counties 100K
- States 100K
- South America
- North America



Scale: 1:4,764

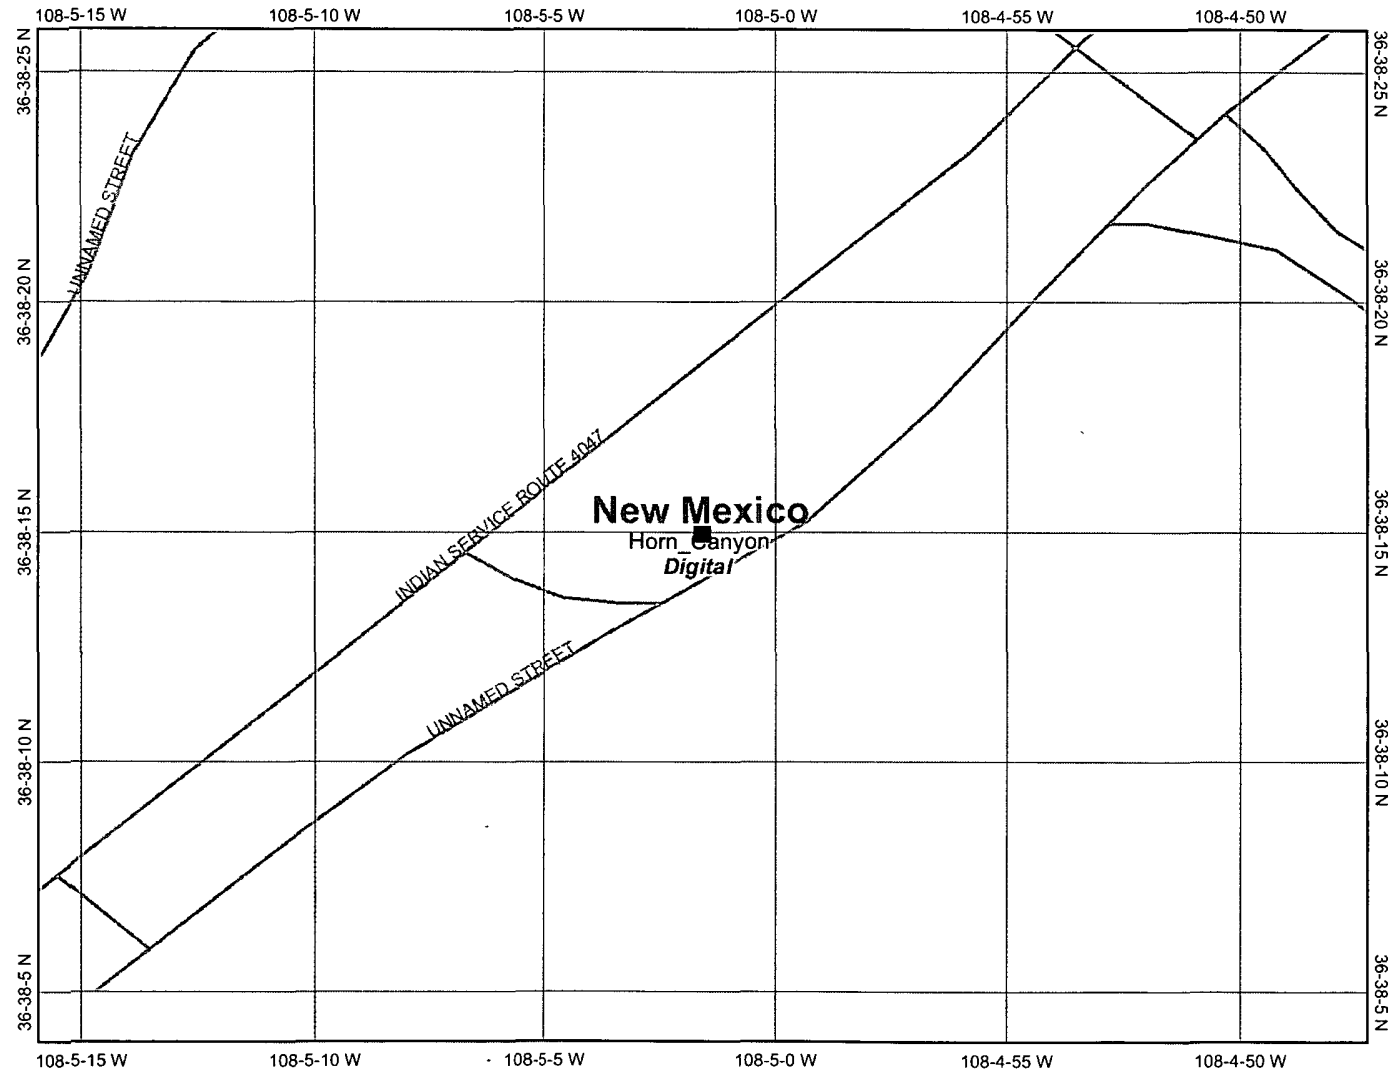

Location at Map center: 36° 38' 14.9" N, 108° 5' 1.6" W

This map is a user generated static output from an Internet mapping site and is for general reference only. Data layers that appear on this map may or may not be accurate, current, or otherwise reliable. THIS MAP IS NOT TO BE USED FOR NAVIGATION.

Notes: Unit C, Sec. 26, T28N, R12W