

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

Tribal Lease No. 55

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

Jicarilla Apache Tribe

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Jicarilla A 55

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

South Ballard

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

35 - 23N - 3W

12. COUNTY OR PARISH

Sandoval

13. STATE

New Mexico

1. ☐ OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR
Benjamin Elenbogen

3. ADDRESS OF OPERATOR
4100 Montview Boulevard, Denver, Colorado

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface
1850'FNL and 790'FWL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

GR 7280' - DF 7282'

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

Supplementary Well History Report

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*


Subject well spudded November 21, 1966. Set 108 feet 8-5/8", 24# surface casing at 121' and cemented with 60 sacks, 50-50 Pozmix, 2% Ca Cl₂. Ran Schlumberger log from 2950' to 2529', ES and Lane Wells Gamma Ray log from 2494' to 2913. Bondlog from 2913' to 1950'. Total depth of 2950' reached November 26, 1966. Plugback depth 2913 feet. Ran 4-1/2" casing, 9.5#, set at 2933' and cemented with 100 sacks cement, 50-50 Pozmix, 2% Ca Cl₂. Ran 2835' of 1 1/4" EUE tubing.

Gun perforated and sand-water fraced. Perforated from 2840-2856 and 2844-2860'. Fraced with 40,000 gallons water and 40,000# 20-40 sand. No gauges run.

Electric log tops as follows:

Fruitland	2614'
Pictured Cliffs	2835'
Total Depth	2950'.

Awaiting pipeline hookup.

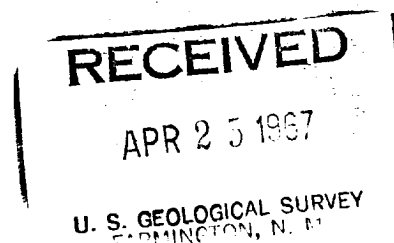

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Operator

DATE 4-19-67

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE