

State of New Mexico
Energy, Minerals and Natural Resources Department

Susana Martinez
Governor

David Martin
Cabinet Secretary

Brett F. Woods, Ph.D.
Deputy Cabinet Secretary

David R. Catanach Division Director
Oil Conservation Division



New Mexico Oil Conservation Division approval and conditions listed below are made in accordance with OCD Rule 19.15.7.11 and are in addition to the actions approved by BLM on the following 3160-3 APD form.

Operator Signature Date: 8-3-15

Well information;

Operator Encana, Well Name and Number Nageezi Unit #101H

API# 30-045-35702, Section 22, Township 24 N/S, Range 9 E/W

Conditions of Approval:

(See the below checked and handwritten conditions)

- ☒ Notify Aztec OCD 24hrs prior to casing & cement.
- ☒ Hold C-104 for directional survey & "As Drilled" Plat
- ☒ Hold C-104 for NSL, NSP, DHC
- ☐ Spacing rule violation. Operator must follow up with change of status notification on other well to be shut in or abandoned
- ☐ Regarding the use of a pit, closed loop system or below grade tank, the operator must comply with the following as applicable:
 - A pit requires a complete C-144 be submitted and approved prior to the construction or use of the pit, pursuant to 19.15.17.8.A
 - A closed loop system requires notification prior to use, pursuant to 19.15.17.9.A
 - A below grade tank requires a registration be filed prior to the construction or use of the below grade tank, pursuant to 19.15.17.8.C
- ☐ Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
- ☒ Regarding Hydraulic Fracturing, review EPA Underground Injection Control Guidance 84
- ☒ Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.
- ☒ Well-bore communication is regulated under 19.15.29 NMAC. This requires well-bore Communication to be reported in accordance with 19.15.29.8.

Chuck Herrin
NMOCD Approved by Signature

11-30-2015
Date KC

NOV 19 2015

CONFIDENTIAL

Form 3160-3
(March 2012)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

RECEIVED

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

JUL 31 2015

Bureau of Land Management
Farmington Field Office
N/A

1a. Type of work: ☒ DRILL ☐ REENTER		7. If Unit or CA Agreement, Name and No. Nageezi Unit NMNM 132981X	
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone		8. Lease Name and Well No. Nageezi Unit 101H	
2. Name of Operator: Encana Oil & Gas (USA) Inc.		9. API Well No. 30-045-35702	
3a. Address: 370 17th Street, Suite 1700 Denver, CO 80202	3b. Phone No. (include area code) 720-876-5919	10. Field and Pool, or Exploratory Nageezi Unit Horizontal Oil Pool	
4. Location of Well (Report location clearly and so as to comply with any State requirements) At surface: 1,805' FSL, 235' FWL, Section 22, T24N, R9W At proposed prod. zone: 2,230' FSL, 330' FWL, Section 21, T24N, R9W		11. Sec., T, R, M. or Bk. and Survey or Area Section 22, T24N, R9W NMNM SHL Section 21, T24N, R9W BHL	
14. Distance in miles and direction from nearest town or post office: +/- 33.3 miles South from the intersection of US HWY 64 & US HWY 550 in Bloomfield, NM		12. County or Parish San Juan	13. State NM
15. Distance from proposed location to nearest property or lease line, ft (Also to nearest drilg. unit line, if any) BHL is 330' FWL Section 21, T24N, R9W	16. No. of acres in lease NMNM 12374- 2,240.0 acres (BHL Lease)	17. Spacing Unit dedicated to this well 9,435.54 acres- SE SEC 21-23, ALL SEC 26-28, 33-35 T24N R9W; ALL SEC 1-4, E2 SEC 5; ALL OF SEC 9-10 & NW SEC 11 T23N R11W	
18. Distance from proposed location to nearest well, drilling, completed, applied for, or this lease, ft SHL is +/- 30' North of Nageezi Unit 102H	19. Proposed Depth 5,311' TVD, 10,360' MD	20. BLM/BIA Bond No. on file COB-000235	
21. Elevations (Show whether DF, KLB, RT, CL, etc.) 6,819' GL; 6,835' KB	22. Approximate date work will start: 03/01/2015	23. Estimated duration 20 days	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office)
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature: <i>Katie Wegner</i>	Name (Printed Typed): Katie Wegner	Date: 08/03/2015
Title: Regulatory Analyst		
Approved by (Signature): <i>[Signature]</i>	Name (Printed Typed):	Date: 11/17/15
Title: AFN	Office: FFO	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

DRILLING OPERATIONS AUTHORIZED
ARE SUBJECT TO COMPLIANCE WITH
ATTACHED "GENERAL REQUIREMENTS"

This action is subject to
technical and procedural review
pursuant to 43 CFR 3165.3 and
appeal pursuant to 43 CFR 3165.4

NMOC
PV

BLM'S APPROVAL OR ACCEPTANCE OF THIS
ACTION DOES NOT RELIEVE THE LESSEE AND
OPERATOR FROM OBTAINING ANY OTHER
AUTHORIZATION REQUIRED FOR OPERATIONS
ON FEDERAL AND INDIAN LANDS

DISTRICT I

1626 N. French Dr., Hobbs, N.M. 88240
Phone: (575) 393-8161 Fax: (575) 393-0720

DISTRICT II

811 S. First St., Artesia, N.M. 88210
Phone: (575) 743-1283 Fax: (575) 743-9720

DISTRICT III

1000 Rio Brancos Rd., Aztec, N.M. 87410
Phone: (505) 334-8178 Fax: (505) 334-8170

DISTRICT IV

1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 478-3480 Fax: (505) 478-3482

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 1, 2011

Submit one copy to appropriate
District Office

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-045-35702	² Pool Code 98080	³ Pool Name NAGEEZI UNIT HORIZONTAL OIL POOL
⁴ Property Code 315244	⁵ Property Name NAGEEZI UNIT	⁶ Well Number 101H
⁷ GRID No. 282327	⁸ Operator Name ENCANA OIL & GAS (USA) INC.	⁹ Elevation 6818.6'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	22	24N	9W		1805'	SOUTH	235'	WEST	SAN JUAN


¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	21	24N	9W		2230'	SOUTH	330'	WEST	SAN JUAN

¹² Dedicated Acres PENETRATED SPACING UNITS: (S/2 SEC 21- 320 ACRES) 9,135.51 ACRES - S/2 SEC 21-23; ALL 26-28, 33-35, T24N, R9W; ALL SEC. 1-4, E/2 SEC. 5; ALL OF SEC. 9-10 & NW SEC. 11, T23N, R11W-UNDIVIDED UNIT	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-13856 (9,135.51 ACRES)
---	-------------------------------	----------------------------------	--

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16

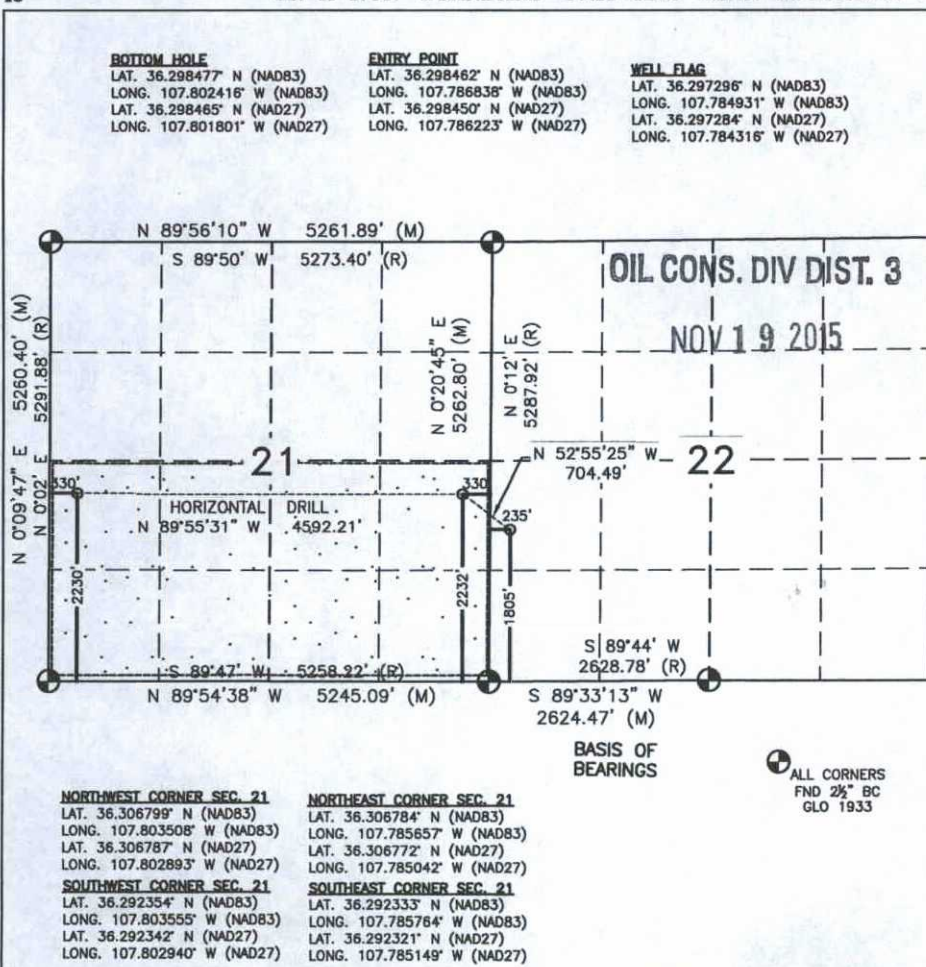

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Jillian McGrath 7/30/15
Signature Date

Jillian McGrath
Printed Name


Jillian.McGrath@encana.com
E-mail Address

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

MAY 19, 2014
Date of Survey

Signature and Seal of Professional Surveyor:



1625 N. French Dr., Hobbs, N.M. 88240
Phone: (575) 393-8181 Fax: (575) 393-0720

811 S. First St., Artesia, N.M. 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

1000 Rio Brazos Rd., Aztec, N.M. 87410
Phone: (505) 334-8178 Fax: (505) 334-8170

1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3480 Fax: (505) 476-3482

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 1, 2011

Submit one copy to appropriate
District Office


OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

☐ AMENDED REPORT

ENCANA OIL & GAS (USA) INC.
NAGEEZI UNIT #101H

PENETRATED SPACING UNITS: (S/2 SEC 21- 320 ACRES)
9,135.51 ACRES - S/2 SEC 21-23; ALL 26-28,
33-35, T24N, R9W; ALL SEC. 1-4, E/2 SEC. 5; ALL OF
SEC. 9-10 & NW SEC. 11, T23N, R11W-UNDIVIDED UNIT

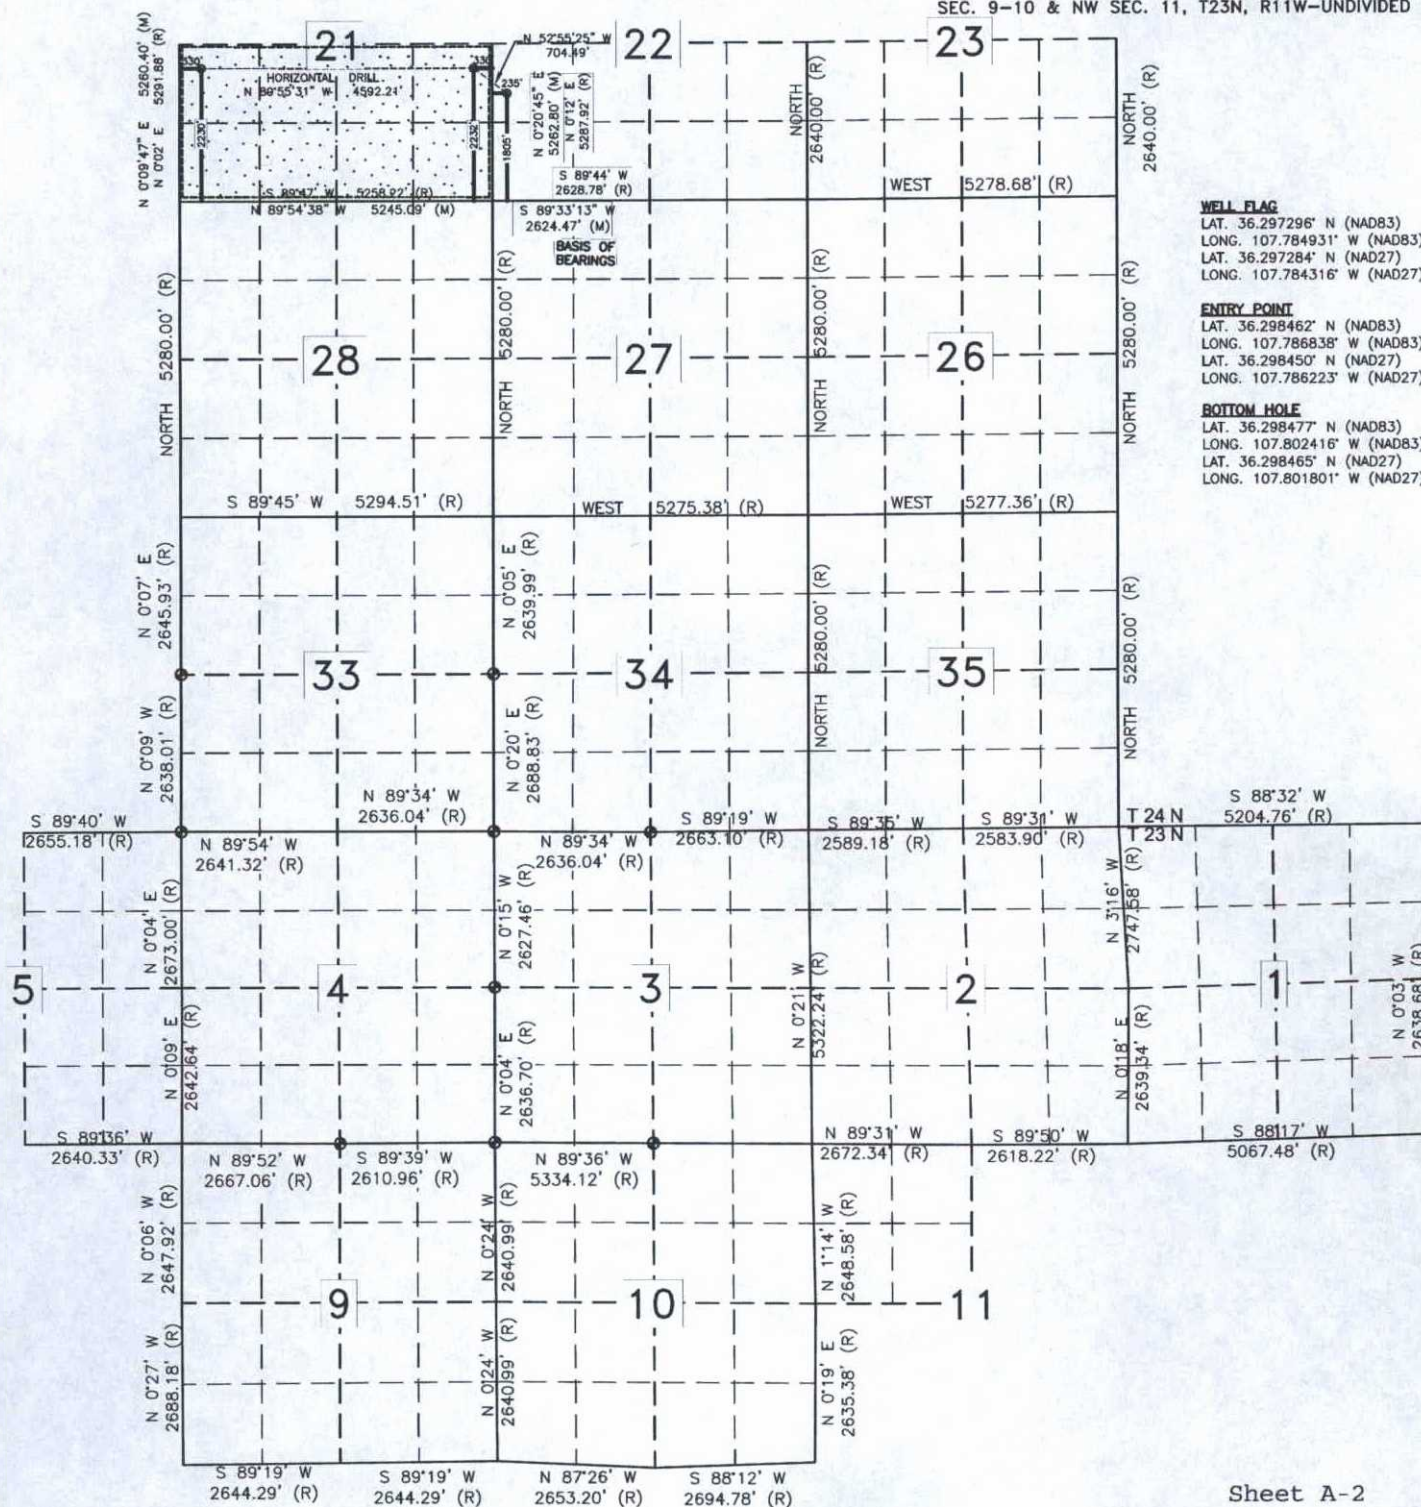

Nageezi Unit 101H**SHL: NW/4 SW/4 Sec 22 T24N R9W, 1805' FSL, 235' FWL****BHL: NW/4 SW/4 Sec 21 T24N R9W, 2230' FSL, 330' FWL****San Juan, New Mexico****Lease Number: NMNM 132981X****Encana Oil & Gas (USA) Inc.
Drilling Plan****1. ESTIMATED TOPS OF GEOLOGICAL MARKERS (TVD)**

The estimated tops of important geologic markers are as follows:

Formation	Depth (TVD) units = feet
San Jose Fn.	n/a
Nacimiento Fn.	surface
Ojo Alamo Ss.	808
Kirtland Shale	1,000
Fruitland Coal	1,144
Pictured Cliffs Ss.	1,551
Lewis Shale	1,724
Cliffhouse Ss.	2,417
Menefee Fn.	3,141
Point Lookout Ss.	4,035
Mancos Shale	4,194
Mancos Silt	4,827
Gallup Fn.	5,080
Base Gallup	5,401

The referenced surface elevation is 6819', KB 6835'

**2. ESTIMATED DEPTH OF POTENTIAL WATER, OIL, GAS,
& OTHER MINERAL BEARING FORMATIONS**

Substance	Formation	Depth (TVD) units = feet
Water/Gas	Fruitland Coal	1,144
Oil/Gas	Pictured Cliffs Ss.	1,551
Oil/Gas	Cliffhouse Ss.	2,417
Gas	Menefee Fn.	3,141
Oil/Gas	Point Lookout Ss.	4,035
Oil/Gas	Mancos Shale	4,194
Oil/Gas	Mancos Silt	4,827
Oil/Gas	Gallup Fn.	5,080

All shows of fresh water and minerals will be reported and protected.

Nageezi Unit 101H**SHL: NW/4 SW/4 Sec 22 T24N R9W, 1805' FSL, 235' FWL****BHL: NW/4 SW/4 Sec 21 T24N R9W, 2230' FSL, 330' FWL****San Juan, New Mexico****Lease Number: NMNM 132981X****3. PRESSURE CONTROL**

- a) Pressure control equipment and configuration will be designed to meet 2M standards.
- b) Working pressure on rams and BOPE will be 3,000 psi.
- c) Function test and visual inspection of the BOP will be conducted daily and noted in the IADC Daily Drilling Report.
- d) The Annular BOP will be pressure tested to a minimum of 50 percent of its rated working pressure.
- e) Blind and Pipe Rams/BOP will be tested against a test plug to 100 percent of rated working pressure.
- f) Pressure tests are required before drilling out from under all casing strings set and cemented in place.
- g) BOP controls must be installed prior to drilling the surface casing plug and will remain in use until the well is completed or abandoned.
- h) BOP testing procedures and testing frequency will conform to Onshore Order No. 2.
- i) BOP remote controls shall be located on the rig floor at a location readily accessible to the driller. Master controls shall be on the ground at the accumulator and shall have the capability to function all preventers.
- j) The kill line shall be 2-inch minimum and contain two kill line valves, one of which shall be a check valve.
- k) The choke line shall be a 2-inch minimum and contain two choke line valves (2-inch minimum).
- l) The choke and manifold shall contain two adjustable chokes.
- m) Hand wheels shall be installed on all ram preventers.
- n) Safety valves and wrenches (with subs for drill string connections) shall be available on the rig floor at all times.
- o) Inside BOP or float sub shall also be available on the rig floor at all times.

Proposed BOP and choke manifold arrangements are attached.

4. CASING & CEMENTING PROGRAM

The proposed casing and cementing program has been designed to protect and/or isolate all usable water zones, potentially productive zones, lost circulation zones, abnormally pressured zones, and any prospectively valuable deposits of minerals. Any isolating medium other than cement shall receive approval prior to use. The casing setting depth shall be calculated to position the casing seat opposite a competent formation which will contain the maximum pressure to which it will be exposed during normal drilling operations. All indications of useable water shall be reported.

- a) The proposed casing design is as follows:

Casing	Depth (MD)	Hole Size	Csg Size	Weight	Grade
Conductor	0'-60'	26"	16"	42.09#	
Surface	0'-500'	12 1/4"	9 5/8"	36#	J55, STC New
Intermediate	0'-5770'	8 3/4"	7"	26#	J55, LTC New
Production Liner	5670'-10360'	6 1/8"	4 1/2"	11.6#	B80*, LTC New

Casing String				Casing Strength Properties			Minimum Design Factors		
Size	Weight (ppf)	Grade	Connection	Collapse (psi)	Burst (psi)	Tensile (1000lbs)	Collapse	Burst	Tension
9 5/8"	36	J55	STC	2020	3520	394	1.125	1.1	1.5
7"	26	J55	LTC	4320	4980	367	1.125	1.1	1.5
4.5"	11.6	B80	LTC	6350	7780	201	1.125	1.1	1.5

*B80 pipe specifications are attached.

Casing design is subject to revision based on geologic conditions encountered.

Nageezi Unit 101H**SHL: NW/4 SW/4 Sec 22 T24N R9W, 1805' FSL, 235' FWL****BHL: NW/4 SW/4 Sec 21 T24N R9W, 2230' FSL, 330' FWL****San Juan, New Mexico****Lease Number: NMNM 132981X**

All casing strings below the conductor shall be pressure tested to 0.22 psi per foot of casing string length or 1,500 psi, whichever is greater, but not to exceed 70 percent of the minimum internal yield. If pressure declines more than 10 percent in 30 minutes, corrective action shall be taken.

b) The proposed cementing program is as follows:

Casing	Depth (MD)	Cement Volume (sacks)	Cement Type & Yield	Designed TOC	Centralizers
Conductor	0'-60'	100 sks	Type I Neat 16 ppg	Surface	None
Surface	0'-500'	228 sks	Type III Cement + 1% bwoc Calcium Chloride + 0.25 lbs/sack Cello Flake + 0.2% bwoc FL-52A + 58.9% Fresh Water	Surface	1 per joint on bottom 3 joints
Intermediate	0'-5770'	100% open hole excess Stage 1 Lead: 539 sks Stage 1 Tail: 408 sks	Lead: PremLite + 3% CaCl + 0.25lb/sk CelloFlake + 5lb/sk LCM, 12.1ppg 2.13cuft/sk Tail: Type III Cmt + 1% CaCl + 0.25lb/sk Cello Flake 14.5ppg 1.38cuft/sk	Surface	1 every 3 joints through water bearing zones
Production Liner	5670'- 10360'	50% OH excess Stage 1 Blend Total: 267sks	Blend: Premium Lite High Strength FM + 0.7% bwoc R-3 + 3% bwoc Potassium Chloride + 0.25lbs/sack Cello Flake + 0.5% bwoc CD-32 + 1.15% bwoc FL- 52A + 60 lbs/sack Calcium Carbonate + 124.4% Fresh Water. Yield 2.63 cuft/sk	Liner Hanger	N/A

Actual volumes will be calculated and determined by conditions onsite. All cement slurries will meet or exceed minimum BLM and New Mexico Oil Conservation Division requirements. Slurries used will be the slurries listed above or equivalent slurries depending on service provider selected. Cement yields may change depending on slurries selected.

All waiting on cement times shall be a minimum of 8 hours or adequate to achieve minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

5. WELL PLAN & DIRECTIONAL DRILLING PROGRAM

The proposed horizontal well will have a kick off point of 500'. Directional plans are attached.

Description	Proposed Depth (TVD/MD)	Formation
Horizontal Lateral TD	5311'/10360'	Gallup

Nageezi Unit 101H**SHL: NW/4 SW/4 Sec 22 T24N R9W, 1805' FSL, 235' FWL****BHL: NW/4 SW/4 Sec 21 T24N R9W, 2230' FSL, 330' FWL****San Juan, New Mexico****Lease Number: NMNM 132981X****6. DRILLING FLUIDS PROGRAM****a) Surface through Intermediate Casing Point:**

Hole Size (in)	Depth (TVD/MD)	Mud Type	Density (ppg)	Viscosity (sec/qt)	Fluid Loss (cc)
30"	0-60'/60'	Fresh Water	8.3-9.2	38-100	4-28
12 1/4"	0'-500'/500'	Fresh Water	8.3-10	60-70	NC
8 3/4"	500'/500'-5335'/5770'	Fresh Water LSND	8.3-10	40-50	8-10

b) Intermediate Casing Point to TD:

Hole Size (in)	Depth (TVD/MD)	Mud Type	Density (ppg)	Viscosity (sec/qt)	Fluid Loss (cc)
6 1/8"	5335'/5770'- 5311'/10360'	Fresh Water LSND	8.3-10	15-25	<15

c) There will be sufficient mud on location to control a blowout should one occur. Mud flow and volume will be monitored both visually and with electronic pit volume totalizers. Mud tests shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH.

- ✓ d) A closed-loop system will be used to recover drilling fluid and dry cuttings in both phases of the well and on all hole intervals. Above-ground tanks will be utilized to hold cuttings and fluids for rig operations. A frac tank will be on location to store fresh water. Waste will be disposed of properly at an EPA-approved hazardous waste facility. Fresh water cuttings will be disposed of at Basin Disposal, Inc. and/or Industrial Ecosystems, Inc. The location will be lined in accordance with the Surface Use Plan of Operations.

7. TESTING, CORING, & LOGGING

- a) Drill Stem Testing - None anticipated.
- b) Coring - None anticipated.
- c) Mudd Logging - Mud loggers will be on location from kick off point to TD.
- d) Logging - See below.

Cased Hole:

CBL/CCL/GR/VDL will be run as needed for perforating control.

8. ABNORMAL PRESSURES & HYDROGEN SULFIDE

The anticipated bottom hole pressure is +/- 2498 psi based on a 9.0 ppg at 5338' TVD of the horizontal lateral target. No abnormal pressure or temperatures are anticipated.

No hydrogen sulfide gas is anticipated, however, if H₂S is encountered, the guidelines in Onshore Order No. 6 will be followed.

9. ANTICIPATED START DATE AND DURATION OF OPERATIONS

Drilling is estimated to commence on March 1, 2015. It is anticipated that completion operations will begin within 30 days after the well has been drilled depending on fracture treatment schedules with various pumping service companies.

It is anticipated that the drilling of this well will take approximately 20 days.

LOC: NW/4 SW/4 Sec 22 T24N R9W, 1805' FS County: San Juan WELL: Nageezi Unit 101H			Encana Oil & Gas (USA) Inc.			ENG: 0 RIG: Unassigned GLE: 6818.6 RKBE: 6834.6			7/30/15
MWD		OPEN HOLE	DEPTH			HOLE	CASING	MW	DEVIATION
LWD		LOGGING	TVD	MD			SPECS	MUD TYPE	INFORMATION
			60	60'		26	16" 42.09# 100sx Type I Neat 16.0ppg cmt	Fresh wtr 8.3-9.2	
Multi-Well pad - take survey every stand and run anti-collision report prior to spud	None	San Jose Fn.	0			12 1/4	9 5/8" 36ppf J55 LTC TOC Surface with 100% OH Excess: 228 sks Type III Cement + 1% bwoc Calcium Chloride + 0.25 lbs/sack Cello Flake + 0.2% bwoc FL-52A + 58.9% Fresh Water.	Fresh wtr 8.3-10	Vertical <1°
Survey Every 60'-120', updating anticollision report after surveys. Stop operations and contact drilling engineer if separation factor approaches 1.5	No OH logs	Nacimiento Fn. 9 5/8" Csg	surface 500	500.00		8 3/4	7" 26ppf J55 LTC TOC @ surface (100% OH excess - 70% Lead 30% Tail) Stage 1 Total: 947sks Stage 1 Lead: 539 sks Premium Lite FM + 3% CaCl2 + 0.25/sk Cello Flake + 5#/sk LCM-1 + 8% Bentonite + 0.4% FL-52A + 0.4% Sodium Metasilicate. Mixed at 12.1 ppg. Yield 2.13 cuft/sk. Stage 1 Tail: 408 sks Type III Cement + 1% CaCl2 + 0.25#/sk Cello Flake + 0.2% FL-52A. Mixed at 14.6 ppg. Yield 1.38 cuft/sk.	Fresh Wtr 8.3-10	Vertical <1°
Surveys every 30' through the curve	Mud logger onsite	Ojo Alamo Ss. Kirtland Shale	808 1,000						
		Fruitland Coal	1,144						
		Pictured Cliffs Ss. Lewis Shale	1,551 1,724						
		Cliffhouse Ss. Menefee Fn.	2,417 3,141						
		Point Lookout Ss. Mancos Shale	4,035 4,194						
		KOP	500	500					
		Mancos Silt	4,827						
		Gallup Fn.	5,080						
		7" Csg	5,335	5,770'					
Surveys every stand to TD unless directed otherwise by Geologist	No OH Logs	Horizontal Target TD	5,338 5,311	10,360		6 1/8	100' overlap at liner top 4590' Drilled Lateral		Horz Inc/TVD 90.3deg/5337.6ft TD = 10360 MD
MWD Gamma Directional		Base Gallup	5,401				4 1/2" 11.6ppf SB80 LTC TOC @ hanger (50% OH excess) Stage 1 Total: 267sks Stage 1 Blend: 267 sks Premium Lite High Strength FM + 0.7% bwoc R-3 + 3% bwoc Potassium Chloride + 0.25lbs/sack Cello Flake + 0.5% bwoc CD-32 + 1.15% bwoc FL- 52A + 60 lbs/sack Calcium Carbonate + 124.4% Fresh Water. Yield 2.83 cuft/sk.	WBM 8.3-10	

NOTES:

- 1) Drill with 26" bit to 60', set 16" 42.09ppf conductor pipe
- 2) Drill surface to 500', R&C 9 5/8" casing
- 3) N/U BOP and surface equipment
- 4) Drill to KOP of 500', 8 3/4 inch holesize
- 5) Start curve at 10deg/100' build rate
- 6) Drill to csg point of 5770' MD
- 7) R&C 7" csg, circ cmt to surface
- 8) Land at ~55 deg, drill lateral to 10360' run 4 1/2 inch cemented liner




SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	500.0	0.00	0.00	500.0	0.0	0.0	0.00	0.00	0.0	
3	781.4	5.63	23.83	780.9	12.6	5.6	2.00	23.83	-5.6	
4	4612.5	5.63	23.83	4593.6	356.3	157.4	0.00	0.00	-156.9	
5	5769.6	90.30	270.07	5335.0	424.5	-561.9	8.00	-113.62	562.5	NAGEEZI UNIT 101H POE
6	10360.0	90.30	270.07	5311.0	430.4	-5152.3	0.00	0.00	5152.8	NAGEEZI UNIT 101H PBHL

OIL CONS. DIV DIST. 3


NOV 19 2015

Project: San Juan County, NM
Site: S22-T24N-R9W
Well: NAGEEZI UNIT 101H
Wellbore: OH
Design: PLAN #1

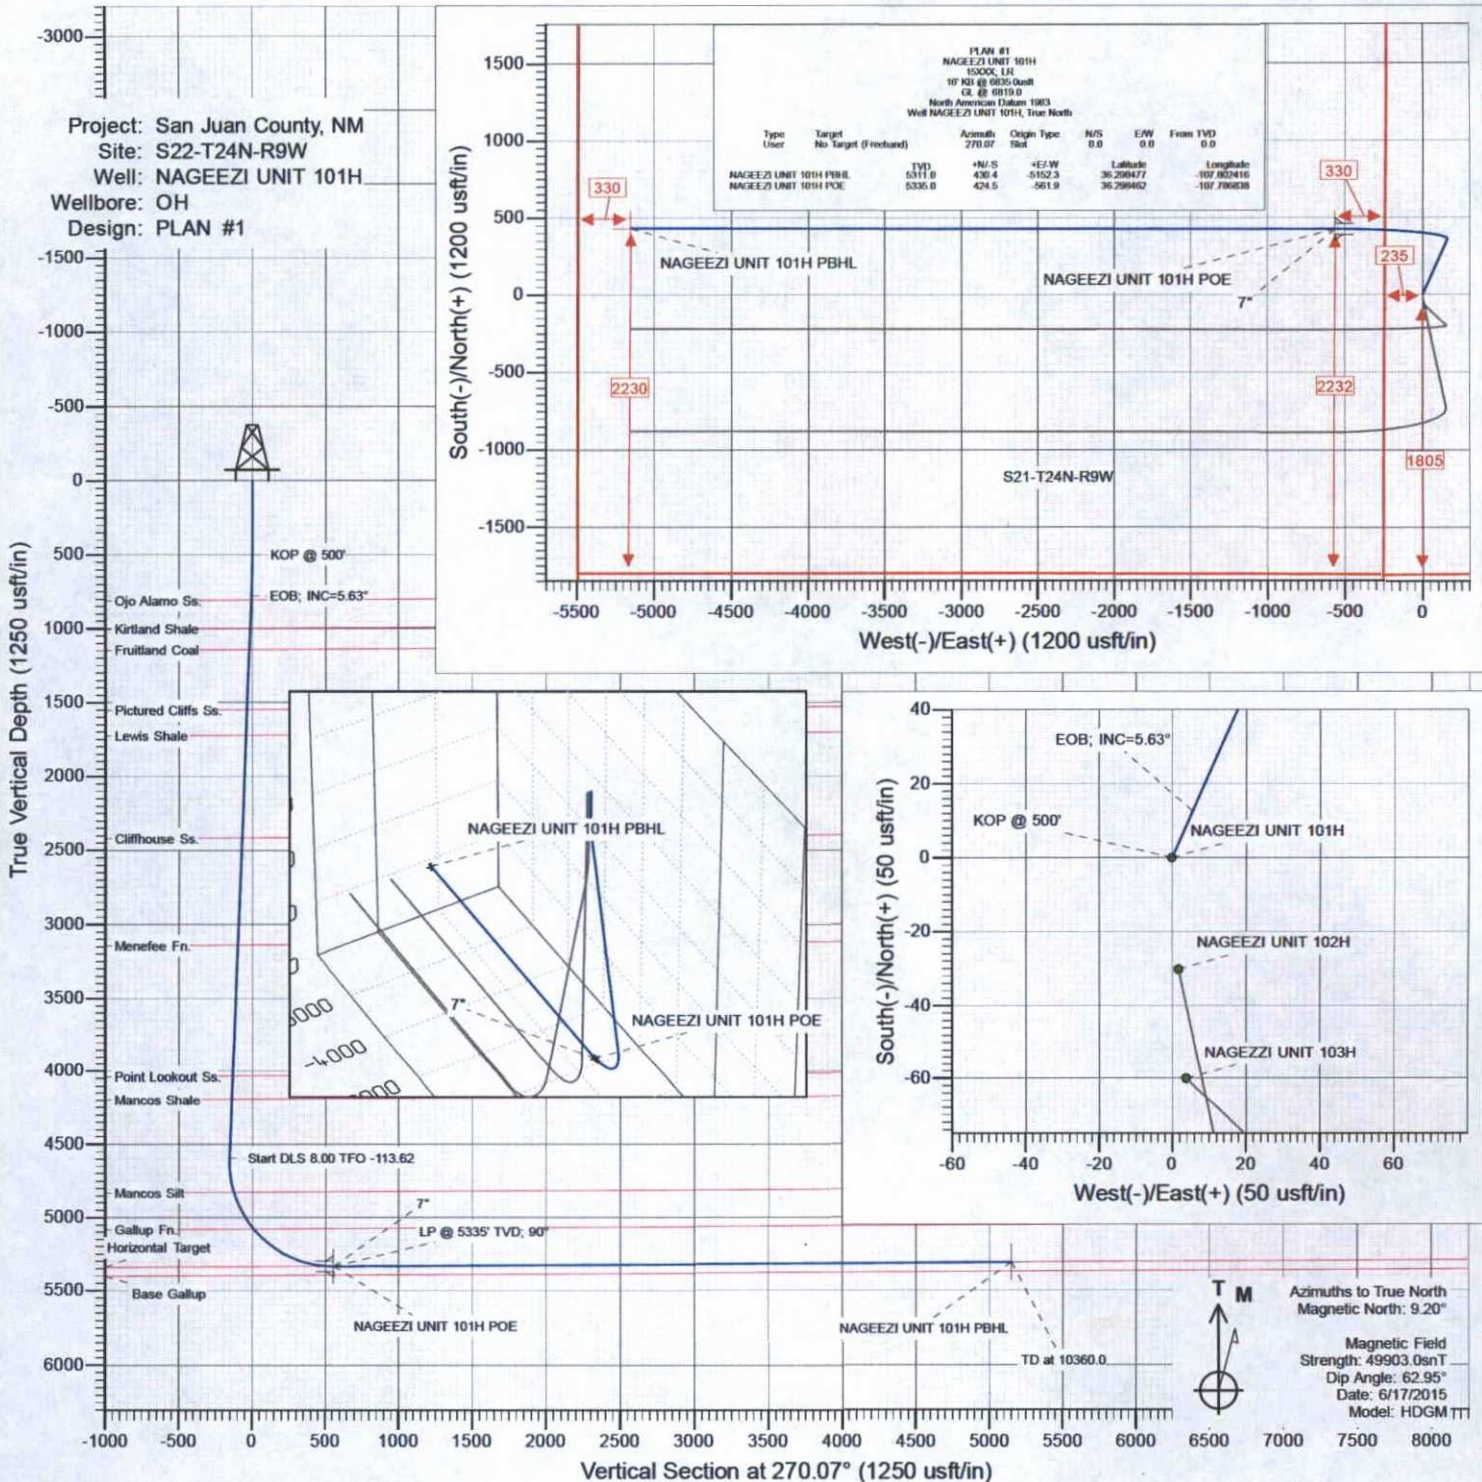

PLAN #1
NAGEEZI UNIT 101H
10000 LIT
10' KID @ 6835.0usf
CL @ 6819.0
North American Datum 1983
Well NAGEEZI UNIT 101H, True North

Type	Target	No Target (Freehand)	Acme	Origin	Type	N/S	E/W	From TVD
NAGEEZI UNIT 101H PBHL	TVI	5311.0	+N/-S	430.4	+E/-W	-5152.3	Latitude	36.298477
NAGEEZI UNIT 101H POE	TVI	5335.0	+N/-S	424.5	+E/-W	-561.9	Longitude	-107.786416

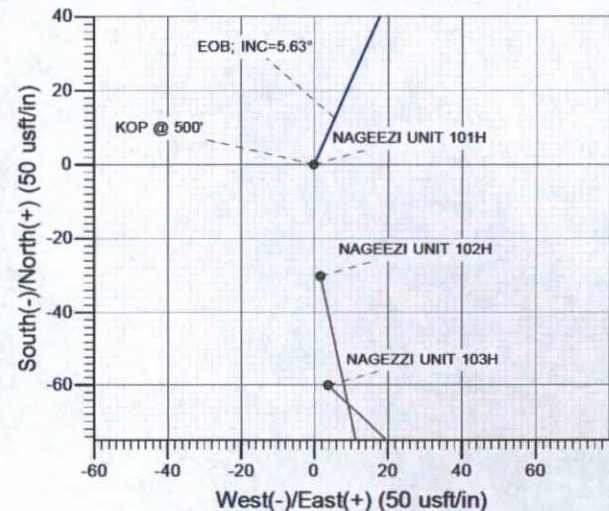

WELL DETAILS: NAGEEZI UNIT 101H

+N/-S	+E/-W	North	East	Ground Level:	6819.0	Latitude	Longitude	Slot
0.0	0.0	1927518.97	2737354.54			36.297296	-107.784931	



NOV 19 2015

Planning Report

Database: USA EDM 5000 Multi Users DB
 Company: EnCana Oil & Gas (USA) Inc
 Project: San Juan County, NM
 Site: S22-T24N-R9W
 Well: NAGEEZI UNIT 101H
 Wellbore: OH
 Design: PLAN #1

Local Co-ordinate Reference: Well NAGEEZI UNIT 101H
 TVD Reference: 16' KB @ 6835.0usft
 MD Reference: 16' KB @ 6835.0usft
 North Reference: True
 Survey Calculation Method: Minimum Curvature

Project San Juan County, NM

Map System: US State Plane 1983
 Geo Datum: North American Datum 1983
 Map Zone: New Mexico Western Zone

System Datum: Mean Sea Level

Site S22-T24N-R9W

Site Position: Northing: 1,927,518.97 usft Latitude: 36.297296
 From: Lat/Long Easting: 2,737,354.54 usft Longitude: -107.784931
 Position Uncertainty: 0.0 usft Slot Radius: 13-3/16" Grid Convergence: 0.03 °

Well NAGEEZI UNIT 101H

Well Position +N/-S 0.0 usft Northing: 1,927,518.97 usft Latitude: 36.297296
 +E/-W 0.0 usft Easting: 2,737,354.54 usft Longitude: -107.784931
 Position Uncertainty 0.0 usft Wellhead Elevation: 0.0 usft Ground Level: 6,819.0 usft

Wellbore OH

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	6/17/2015	9.20	62.95	49,903

Design PLAN #1

Audit Notes:

Version: Phase: PLAN Tie On Depth: 0.0

Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	270.07

Plan Sections

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
500.0	0.00	0.00	500.0	0.0	0.0	0.00	0.00	0.00	0.00	
781.4	5.63	23.83	780.9	12.6	5.6	2.00	2.00	0.00	23.83	
4,612.5	5.63	23.83	4,593.6	356.3	157.4	0.00	0.00	0.00	0.00	
5,769.6	90.30	270.07	5,335.0	424.5	-561.9	8.00	7.32	-9.83	-113.62	NAGEEZI UNIT 101H
10,360.0	90.30	270.07	5,311.0	430.4	-5,152.3	0.00	0.00	0.00	0.00	NAGEEZI UNIT 101H

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well NAGEEZI UNIT 101H
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	16' KB @ 6835.0usft
Project:	San Juan County, NM	MD Reference:	16' KB @ 6835.0usft
Site:	S22-T24N-R9W	North Reference:	True
Well:	NAGEEZI UNIT 101H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1		

Planned Survey									
Measured Depth (usft)	Inclination (")	Azimuth (")	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate ("/100usft)	Build Rate ("/100u)	Comments / Formations
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	KOP @ 500'
600.0	2.00	23.83	600.0	1.6	0.7	-0.7	2.00	2.00	
700.0	4.00	23.83	699.8	6.4	2.8	-2.8	2.00	2.00	
781.4	5.63	23.83	780.9	12.6	5.6	-5.6	2.00	2.00	EOB; INC=5.63°
800.0	5.63	23.83	799.5	14.3	6.3	-6.3	0.00	0.00	
808.5	5.63	23.83	807.9	15.1	6.7	-6.6	0.00	0.00	Ojo Alamo Ss.
900.0	5.63	23.83	899.0	23.3	10.3	-10.2	0.00	0.00	
1,000.0	5.63	23.83	998.5	32.2	14.2	-14.2	0.00	0.00	
1,001.3	5.63	23.83	999.8	32.4	14.3	-14.3	0.00	0.00	Kirtland Shale
1,100.0	5.63	23.83	1,098.0	41.2	18.2	-18.2	0.00	0.00	
1,146.0	5.63	23.83	1,143.8	45.3	20.0	-20.0	0.00	0.00	Fruitland Coal
1,200.0	5.63	23.83	1,197.5	50.2	22.2	-22.1	0.00	0.00	
1,300.0	5.63	23.83	1,297.0	59.2	26.1	-26.1	0.00	0.00	
1,400.0	5.63	23.83	1,396.6	68.1	30.1	-30.0	0.00	0.00	
1,500.0	5.63	23.83	1,496.1	77.1	34.0	-34.0	0.00	0.00	
1,554.8	5.63	23.83	1,550.6	82.0	36.2	-36.1	0.00	0.00	Pictured Cliffs Ss.
1,600.0	5.63	23.83	1,595.6	86.1	38.0	-37.9	0.00	0.00	
1,700.0	5.63	23.83	1,695.1	95.0	42.0	-41.9	0.00	0.00	
1,728.5	5.63	23.83	1,723.5	97.6	43.1	-43.0	0.00	0.00	Lewis Shale
1,800.0	5.63	23.83	1,794.6	104.0	45.9	-45.8	0.00	0.00	
1,900.0	5.63	23.83	1,894.2	113.0	49.9	-49.8	0.00	0.00	
2,000.0	5.63	23.83	1,993.7	121.9	53.9	-53.7	0.00	0.00	
2,100.0	5.63	23.83	2,093.2	130.9	57.8	-57.7	0.00	0.00	
2,200.0	5.63	23.83	2,192.7	139.9	61.8	-61.6	0.00	0.00	
2,300.0	5.63	23.83	2,292.2	148.9	65.7	-65.6	0.00	0.00	
2,400.0	5.63	23.83	2,391.7	157.8	69.7	-69.5	0.00	0.00	
2,424.5	5.63	23.83	2,416.2	160.0	70.7	-70.5	0.00	0.00	Cliffhouse Ss.
2,500.0	5.63	23.83	2,491.3	166.8	73.7	-73.5	0.00	0.00	
2,600.0	5.63	23.83	2,590.8	175.8	77.6	-77.4	0.00	0.00	
2,700.0	5.63	23.83	2,690.3	184.7	81.6	-81.4	0.00	0.00	
2,800.0	5.63	23.83	2,789.8	193.7	85.5	-85.3	0.00	0.00	
2,900.0	5.63	23.83	2,889.3	202.7	89.5	-89.3	0.00	0.00	
3,000.0	5.63	23.83	2,988.9	211.7	93.5	-93.2	0.00	0.00	
3,100.0	5.63	23.83	3,088.4	220.6	97.4	-97.2	0.00	0.00	
3,151.7	5.63	23.83	3,139.8	225.3	99.5	-99.2	0.00	0.00	Menefee Fn.
3,200.0	5.63	23.83	3,187.9	229.6	101.4	-101.1	0.00	0.00	
3,300.0	5.63	23.83	3,287.4	238.6	105.4	-105.1	0.00	0.00	
3,400.0	5.63	23.83	3,386.9	247.5	109.3	-109.0	0.00	0.00	
3,500.0	5.63	23.83	3,486.4	256.5	113.3	-113.0	0.00	0.00	
3,600.0	5.63	23.83	3,586.0	265.5	117.2	-116.9	0.00	0.00	
3,700.0	5.63	23.83	3,685.5	274.4	121.2	-120.9	0.00	0.00	
3,800.0	5.63	23.83	3,785.0	283.4	125.2	-124.8	0.00	0.00	
3,900.0	5.63	23.83	3,884.5	292.4	129.1	-128.8	0.00	0.00	
4,000.0	5.63	23.83	3,984.0	301.4	133.1	-132.7	0.00	0.00	
4,049.6	5.63	23.83	4,033.4	305.8	135.1	-134.7	0.00	0.00	Point Lookout Ss.
4,100.0	5.63	23.83	4,083.6	310.3	137.0	-136.7	0.00	0.00	
4,200.0	5.63	23.83	4,183.1	319.3	141.0	-140.6	0.00	0.00	

Planning Report

Database: USA EDM 5000 Multi Users DB
Company: EnCana Oil & Gas (USA) Inc
Project: San Juan County, NM
Site: S22-T24N-R9W
Well: NAGEEZI UNIT 101H
Wellbore: OH
Design: PLAN #1

Local Co-ordinate Reference:
TVD Reference:
MD Reference:
North Reference:
Survey Calculation Method:

Well NAGEEZI UNIT 101H
16' KB @ 6835.0usft
16' KB @ 6835.0usft
True
Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100u)	Comments / Formations
4,209.3	5.63	23.83	4,192.3	320.1	141.4	-141.0	0.00	0.00	Mancos Shale
4,300.0	5.63	23.83	4,282.6	328.3	145.0	-144.6	0.00	0.00	
4,400.0	5.63	23.83	4,382.1	337.2	148.9	-148.5	0.00	0.00	
4,500.0	5.63	23.83	4,481.6	346.2	152.9	-152.5	0.00	0.00	
4,600.0	5.63	23.83	4,581.1	355.2	156.9	-156.4	0.00	0.00	
4,612.5	5.63	23.83	4,593.6	356.3	157.4	-156.9	0.00	0.00	Start DLS 8.00 TFO -113.62
4,700.0	7.00	317.42	4,680.7	364.2	155.5	-155.0	8.00	1.56	
4,800.0	13.72	291.78	4,779.0	373.1	140.3	-139.9	8.00	6.73	
4,847.8	17.32	286.92	4,825.0	377.2	128.3	-127.8	8.00	7.53	Mancos Silt
4,900.0	21.34	283.45	4,874.3	381.7	111.6	-111.1	8.00	7.70	
5,000.0	29.16	279.41	4,964.7	389.9	69.8	-69.3	8.00	7.82	
5,100.0	37.05	276.97	5,048.4	397.6	15.7	-15.3	8.00	7.89	
5,137.7	40.03	276.27	5,077.9	400.3	-7.6	8.1	8.00	7.92	Gallup Fn.
5,200.0	44.97	275.28	5,123.8	404.5	-49.4	49.9	8.00	7.93	
5,300.0	52.91	274.01	5,189.4	410.6	-124.5	125.0	8.00	7.94	
5,400.0	60.87	272.98	5,244.0	415.6	-208.1	208.6	8.00	7.95	
5,500.0	68.83	272.10	5,286.5	419.6	-298.4	298.9	8.00	7.96	
5,600.0	76.79	271.31	5,316.0	422.4	-393.8	394.4	8.00	7.96	
5,700.0	84.76	270.58	5,332.1	424.1	-492.5	493.0	8.00	7.97	
5,769.6	90.30	270.07	5,335.1	424.5	-561.9	562.5	8.00	7.96	LP @ 5335' TVD; 90° - 7" - NAGEEZI UNIT 101
5,800.0	90.30	270.07	5,334.9	424.5	-592.4	592.9	0.01	0.01	
5,900.0	90.30	270.07	5,334.4	424.6	-692.4	692.9	0.00	0.00	
6,000.0	90.30	270.07	5,333.8	424.8	-792.4	792.9	0.00	0.00	
6,100.0	90.30	270.07	5,333.3	424.9	-892.4	892.9	0.00	0.00	
6,200.0	90.30	270.07	5,332.8	425.0	-992.4	992.9	0.00	0.00	
6,300.0	90.30	270.07	5,332.3	425.1	-1,092.4	1,092.9	0.00	0.00	
6,400.0	90.30	270.07	5,331.7	425.3	-1,192.4	1,192.9	0.00	0.00	
6,500.0	90.30	270.07	5,331.2	425.4	-1,292.4	1,292.9	0.00	0.00	
6,600.0	90.30	270.07	5,330.7	425.5	-1,392.4	1,392.9	0.00	0.00	
6,700.0	90.30	270.07	5,330.2	425.7	-1,492.4	1,492.9	0.00	0.00	
6,800.0	90.30	270.07	5,329.7	425.8	-1,592.4	1,592.9	0.00	0.00	
6,900.0	90.30	270.07	5,329.1	425.9	-1,692.4	1,692.9	0.00	0.00	
7,000.0	90.30	270.07	5,328.6	426.0	-1,792.4	1,792.9	0.00	0.00	
7,100.0	90.30	270.07	5,328.1	426.2	-1,892.3	1,892.9	0.00	0.00	
7,200.0	90.30	270.07	5,327.6	426.3	-1,992.3	1,992.9	0.00	0.00	
7,300.0	90.30	270.07	5,327.0	426.4	-2,092.3	2,092.9	0.00	0.00	
7,400.0	90.30	270.07	5,326.5	426.6	-2,192.3	2,192.9	0.00	0.00	
7,500.0	90.30	270.07	5,326.0	426.7	-2,292.3	2,292.9	0.00	0.00	
7,600.0	90.30	270.07	5,325.5	426.8	-2,392.3	2,392.9	0.00	0.00	
7,700.0	90.30	270.07	5,324.9	426.9	-2,492.3	2,492.9	0.00	0.00	
7,800.0	90.30	270.07	5,324.4	427.1	-2,592.3	2,592.9	0.00	0.00	
7,900.0	90.30	270.07	5,323.9	427.2	-2,692.3	2,692.9	0.00	0.00	
8,000.0	90.30	270.07	5,323.4	427.3	-2,792.3	2,792.9	0.00	0.00	
8,100.0	90.30	270.07	5,322.8	427.5	-2,892.3	2,892.9	0.00	0.00	
8,200.0	90.30	270.07	5,322.3	427.6	-2,992.3	2,992.9	0.00	0.00	
8,300.0	90.30	270.07	5,321.8	427.7	-3,092.3	3,092.9	0.00	0.00	
8,400.0	90.30	270.07	5,321.3	427.9	-3,192.3	3,192.9	0.00	0.00	
8,500.0	90.30	270.07	5,320.8	428.0	-3,292.3	3,292.8	0.00	0.00	
8,600.0	90.30	270.07	5,320.2	428.1	-3,392.3	3,392.8	0.00	0.00	
8,700.0	90.30	270.07	5,319.7	428.2	-3,492.3	3,492.8	0.00	0.00	
8,800.0	90.30	270.07	5,319.2	428.4	-3,592.3	3,592.8	0.00	0.00	
8,900.0	90.30	270.07	5,318.7	428.5	-3,692.3	3,692.8	0.00	0.00	

Planning Report

Database: USA EDM 5000 Multi Users DB
 Company: EnCana Oil & Gas (USA) Inc
 Project: San Juan County, NM
 Site: S22-T24N-R9W
 Well: NAGEEZI UNIT 101H
 Wellbore: OH
 Design: PLAN #1

Local Co-ordinate Reference: Well NAGEEZI UNIT 101H
 TVD Reference: 16' KB @ 6835.0usft
 MD Reference: 16' KB @ 6835.0usft
 North Reference: True
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (")	Azimuth (")	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate ("/100usft)	Build Rate ("/100u)	Comments / Formations
9,000.0	90.30	270.07	5,318.1	428.6	-3,792.3	3,792.8	0.00	0.00	
9,100.0	90.30	270.07	5,317.6	428.8	-3,892.3	3,892.8	0.00	0.00	
9,200.0	90.30	270.07	5,317.1	428.9	-3,992.3	3,992.8	0.00	0.00	
9,300.0	90.30	270.07	5,316.6	429.0	-4,092.3	4,092.8	0.00	0.00	
9,400.0	90.30	270.07	5,316.0	429.1	-4,192.3	4,192.8	0.00	0.00	
9,500.0	90.30	270.07	5,315.5	429.3	-4,292.3	4,292.8	0.00	0.00	
9,600.0	90.30	270.07	5,315.0	429.4	-4,392.3	4,392.8	0.00	0.00	
9,700.0	90.30	270.07	5,314.5	429.5	-4,492.3	4,492.8	0.00	0.00	
9,800.0	90.30	270.07	5,313.9	429.7	-4,592.3	4,592.8	0.00	0.00	
9,900.0	90.30	270.07	5,313.4	429.8	-4,692.3	4,692.8	0.00	0.00	
10,000.0	90.30	270.07	5,312.9	429.9	-4,792.3	4,792.8	0.00	0.00	
10,100.0	90.30	270.07	5,312.4	430.0	-4,892.3	4,892.8	0.00	0.00	
10,200.0	90.30	270.07	5,311.8	430.2	-4,992.3	4,992.8	0.00	0.00	
10,300.0	90.30	270.07	5,311.3	430.3	-5,092.3	5,092.8	0.00	0.00	
10,360.0	90.30	270.07	5,311.0	430.4	-5,152.3	5,152.8	0.00	0.00	TD at 10360.0 - NAGEEZI UNIT 101H PBHL

Targets

Target Name - hit/miss target - Shape	Dip Angle (")	Dip Dir. (")	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
NAGEEZI UNIT 101H PI - plan hits target center - Point	0.00	0.00	5,311.0	430.4	-5,152.3	1,927,946.78	2,732,202.04	36.298477	-107.802416
NAGEEZI UNIT 101H PI - plan hits target center - Point	0.00	0.00	5,335.0	424.5	-561.9	1,927,943.15	2,736,792.39	36.298462	-107.786838

Casing Points

Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
5,769.6	5,335.0	7"	0	0

Planning Report

Database: USA EDM 5000 Multi Users DB
Company: EnCana Oil & Gas (USA) Inc
Project: San Juan County, NM
Site: S22-T24N-R9W
Well: NAGEEZI UNIT 101H
Wellbore: OH
Design: PLAN #1

Local Co-ordinate Reference: Well NAGEEZI UNIT 101H
TVD Reference: 16' KB @ 6835.0usft
MD Reference: 16' KB @ 6835.0usft
North Reference: True
Survey Calculation Method: Minimum Curvature

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
808.5	808.0	Ojo Alamo Ss.		-0.30	
1,001.3	1,000.0	Kirtland Shale		-0.30	
1,146.0	1,144.0	Fruitland Coal		-0.30	
1,554.8	1,551.0	Pictured Cliffs Ss.		-0.30	
1,728.5	1,724.0	Lewis Shale		-0.30	
2,424.5	2,417.0	Cliffhouse Ss.		-0.30	
3,151.7	3,141.0	Menefee Fn.		-0.30	
4,049.6	4,035.0	Point Lookout Ss.		-0.30	
4,209.3	4,194.0	Mancos Shale		-0.30	
4,847.8	4,827.0	Mancos Silt		-0.30	
5,137.7	5,080.0	Gallup Fn.		-0.30	

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
500.0	500.0	0.0	0.0	KOP @ 500'
781.4	780.9	12.6	5.6	EOB; INC=5.63°
4,612.5	4,593.6	356.3	157.4	Start DLS 8.00 TFO -113.62
5,769.6	5,335.1	424.5	-561.9	LP @ 5335' TVD; 90°
10,360.0	5,311.0	430.4	-5,152.3	TD at 10360.0



EnCana Oil & Gas (USA) Inc

San Juan County, NM

S22-T24N-R9W

NAGEEZI UNIT 101H

OH

PLAN #1

Anticollision Report

17 June, 2015

Anticollision Report

Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well NAGEEZI UNIT 101H
Project:	San Juan County, NM	TVD Reference:	16' KB @ 6835.0usft
Reference Site:	S22-T24N-R9W	MD Reference:	16' KB @ 6835.0usft
Site Error:	0.0usft	North Reference:	True
Reference Well:	NAGEEZI UNIT 101H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA EDM 5000 Multi Users DB
Reference Design:	PLAN #1	Offset TVD Reference:	Offset Datum

Reference	PLAN #1
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria
Interpolation Method:	MD Interval 100.0usft
Depth Range:	Unlimited
Results Limited by:	Maximum center-center distance of 1,236.0usft
Warning Levels Evaluated at:	2.00 Sigma
Error Model:	Systematic Ellipse
Scan Method:	Closest Approach 3D
Error Surface:	Elliptical Conic

Survey Tool Program	Date	6/17/2015
From (usft)	To (usft)	Survey (Wellbore)
0.0	10,360.0	PLAN #1 (OH)
		Tool Name
		Geolink MWD
		Description
		Geolink MWD

Summary						
Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
S22-T24N-R9W						
NAGEEZI UNIT 102H - OH - PLAN #1	500.0	500.0	30.3	28.6	17.914	CC, ES
NAGEEZI UNIT 102H - OH - PLAN #1	700.0	699.8	36.6	34.2	15.323	SF
NAGEZZI UNIT 103H - OH - PLAN #1	400.0	400.0	60.2	58.8	44.901	CC, ES
NAGEZZI UNIT 103H - OH - PLAN #1	10,360.0	10,300.6	651.4	393.8	2.529	SF

Anticollision Report

Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well NAGEEZI UNIT 101H
Project:	San Juan County, NM	TVD Reference:	16' KB @ 6835.0usft
Reference Site:	S22-T24N-R9W	MD Reference:	16' KB @ 6835.0usft
Site Error:	0.0usft	North Reference:	True
Reference Well:	NAGEEZI UNIT 101H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA EDM 5000 Multi Users DB
Reference Design:	PLAN #1	Offset TVD Reference:	Offset Datum

Offset Design S22-T24N-R9W - NAGEEZI UNIT 102H - OH - PLAN #1													Offset Site Error:	0.0 usft
Survey Program: 0-Geolink MWD													Offset Well Error:	0.0 usft
Reference		Offset		Semi Major Axis			Distance						Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Total Uncertainty Axis	Separation Factor		
0.0	0.0	0.0	0.0	0.0	0.0	176.65	-30.2	1.8	30.3					
100.0	100.0	100.0	100.0	0.1	0.1	176.65	-30.2	1.8	30.3	30.0	0.29	103.220		
200.0	200.0	200.0	200.0	0.3	0.3	176.65	-30.2	1.8	30.3	29.6	0.64	47.122		
300.0	300.0	300.0	300.0	0.5	0.5	176.65	-30.2	1.8	30.3	29.3	0.99	30.530		
400.0	400.0	400.0	400.0	0.7	0.7	176.65	-30.2	1.8	30.3	28.9	1.34	22.579		
500.0	500.0	500.0	500.0	0.8	0.8	176.65	-30.2	1.8	30.3	28.6	1.69	17.914 CC, ES		
600.0	600.0	600.0	600.0	1.0	1.0	154.25	-30.2	1.8	31.8	29.8	2.04	15.611		
700.0	699.8	699.8	699.8	1.2	1.2	157.77	-30.2	1.8	36.6	34.2	2.39	15.323 SF		
800.0	799.5	799.5	799.5	1.4	1.4	161.92	-30.2	1.8	44.7	42.0	2.74	16.330		
900.0	899.0	899.0	899.0	1.6	1.5	165.14	-30.2	1.8	54.2	51.1	3.09	17.529		
1,000.0	998.5	998.5	998.5	1.9	1.7	167.41	-30.2	1.8	63.7	60.3	3.44	18.522		
1,100.0	1,098.0	1,095.8	1,095.7	2.1	1.9	168.52	-31.8	2.1	74.8	71.0	3.78	19.777		
1,200.0	1,197.5	1,192.2	1,192.1	2.3	2.1	168.45	-36.5	3.1	88.9	84.8	4.12	21.579		
1,300.0	1,297.0	1,287.8	1,287.3	2.5	2.2	167.67	-44.3	4.8	106.1	101.7	4.46	23.794		
1,400.0	1,396.6	1,382.2	1,381.0	2.8	2.5	166.54	-55.1	7.0	126.3	121.5	4.80	26.334		
1,500.0	1,496.1	1,475.2	1,473.0	3.0	2.7	165.29	-68.7	9.9	149.6	144.4	5.13	29.139		
1,600.0	1,595.6	1,566.8	1,563.1	3.3	2.9	164.02	-84.9	13.3	175.8	170.3	5.46	32.166		
1,700.0	1,695.1	1,659.0	1,653.3	3.5	3.2	162.81	-103.8	17.3	204.7	198.9	5.80	35.269		
1,800.0	1,794.6	1,754.5	1,746.5	3.7	3.6	161.81	-124.0	21.6	234.3	228.1	6.17	37.994		
1,900.0	1,894.2	1,849.9	1,839.7	4.0	3.9	161.04	-144.1	25.9	263.9	257.4	6.53	40.423		
2,000.0	1,993.7	1,945.4	1,932.9	4.2	4.2	160.43	-164.3	30.1	293.6	286.7	6.89	42.599		
2,100.0	2,093.2	2,040.8	2,026.1	4.5	4.6	159.92	-184.4	34.4	323.2	316.0	7.25	44.561		
2,200.0	2,192.7	2,136.3	2,119.3	4.7	5.0	159.51	-204.6	38.6	353.0	345.3	7.62	46.337		
2,300.0	2,292.2	2,231.8	2,212.5	4.9	5.3	159.15	-224.7	42.9	382.7	374.7	7.98	47.952		
2,400.0	2,391.7	2,327.2	2,305.7	5.2	5.7	158.85	-244.9	47.2	412.4	404.1	8.34	49.428		
2,500.0	2,491.3	2,422.7	2,398.9	5.4	6.1	158.59	-265.0	51.4	442.1	433.4	8.71	50.781		
2,600.0	2,590.8	2,518.1	2,492.2	5.7	6.4	158.36	-285.2	55.7	471.9	462.8	9.07	52.026		
2,700.0	2,690.3	2,613.6	2,585.4	5.9	6.8	158.16	-305.3	59.9	501.6	492.2	9.43	53.176		
2,800.0	2,789.8	2,709.0	2,678.6	6.2	7.2	157.98	-325.5	64.2	531.4	521.6	9.80	54.240		
2,900.0	2,889.3	2,804.5	2,771.8	6.4	7.6	157.82	-345.6	68.5	561.1	551.0	10.16	55.228		
3,000.0	2,988.9	2,900.0	2,865.0	6.6	8.0	157.68	-365.8	72.7	590.9	580.4	10.52	56.148		
3,100.0	3,088.4	2,995.4	2,958.2	6.9	8.4	157.55	-385.9	77.0	620.7	609.8	10.89	57.007		
3,200.0	3,187.9	3,090.9	3,051.4	7.1	8.7	157.43	-406.1	81.2	650.4	639.2	11.25	57.810		
3,300.0	3,287.4	3,186.3	3,144.6	7.4	9.1	157.32	-426.2	85.5	680.2	668.6	11.62	58.563		
3,400.0	3,386.9	3,281.8	3,237.8	7.6	9.5	157.22	-446.3	89.8	710.0	698.0	11.98	59.270		
3,500.0	3,486.4	3,377.3	3,331.0	7.9	9.9	157.13	-466.5	94.0	739.8	727.4	12.34	59.936		
3,600.0	3,586.0	3,472.7	3,424.3	8.1	10.3	157.05	-486.6	98.3	769.5	756.8	12.71	60.563		
3,700.0	3,685.5	3,568.2	3,517.5	8.3	10.7	156.97	-506.8	102.6	799.3	786.2	13.07	61.156		
3,800.0	3,785.0	3,663.6	3,610.7	8.6	11.1	156.90	-526.9	106.8	829.1	815.7	13.43	61.716		
3,900.0	3,884.5	3,759.1	3,703.9	8.8	11.5	156.83	-547.1	111.1	858.9	845.1	13.80	62.247		
4,000.0	3,984.0	3,854.5	3,797.1	9.1	11.8	156.77	-567.2	115.3	888.7	874.5	14.16	62.751		
4,100.0	4,083.6	3,950.0	3,890.3	9.3	12.2	156.71	-587.4	119.6	918.4	903.9	14.53	63.229		
4,200.0	4,183.1	4,045.5	3,983.5	9.6	12.6	156.65	-607.5	123.9	948.2	933.3	14.89	63.684		
4,300.0	4,282.6	4,140.9	4,076.7	9.8	13.0	156.60	-627.7	128.1	978.0	962.8	15.25	64.117		
4,400.0	4,382.1	4,236.4	4,169.9	10.1	13.4	156.55	-647.8	132.4	1,007.8	992.2	15.62	64.530		
4,500.0	4,481.6	4,331.8	4,263.1	10.3	13.8	156.51	-668.0	136.6	1,037.6	1,021.6	15.98	64.924		
4,600.0	4,581.1	4,427.3	4,356.4	10.5	14.2	156.46	-688.1	140.9	1,067.4	1,051.0	16.35	65.301		
4,700.0	4,680.7	4,522.5	4,449.3	10.7	14.6	-135.60	-708.2	145.1	1,097.1	1,080.4	16.66	65.864		
4,800.0	4,779.0	4,616.0	4,540.6	10.9	15.0	-108.87	-728.0	149.3	1,126.6	1,109.7	16.87	66.773		
4,900.0	4,874.3	4,710.9	4,633.3	11.0	15.3	-99.87	-748.0	147.7	1,155.7	1,138.7	17.00	67.971		
5,000.0	4,964.7	4,809.9	4,728.9	11.1	15.7	-95.28	-768.6	132.6	1,184.0	1,166.9	17.12	69.150		
5,100.0	5,048.4	4,913.9	4,826.1	11.3	16.0	-92.44	-789.6	102.5	1,211.0	1,193.6	17.35	69.779		

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

Anticollision Report

Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well NAGEEZI UNIT 101H
Project:	San Juan County, NM	TVD Reference:	16' KB @ 6835.0usft
Reference Site:	S22-T24N-R9W	MD Reference:	16' KB @ 6835.0usft
Site Error:	0.0usft	North Reference:	True
Reference Well:	NAGEEZI UNIT 101H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA EDM 5000 Multi Users DB
Reference Design:	PLAN #1	Offset TVD Reference:	Offset Datum

Anticollision Report

Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well NAGEEZI UNIT 101H
Project:	San Juan County, NM	TVD Reference:	16' KB @ 6835.0usft
Reference Site:	S22-T24N-R9W	MD Reference:	16' KB @ 6835.0usft
Site Error:	0.0usft	North Reference:	True
Reference Well:	NAGEEZI UNIT 101H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA EDM 5000 Multi Users DB
Reference Design:	PLAN #1	Offset TVD Reference:	Offset Datum

Offset Design S22-T24N-R9W - NAGEZZI UNIT 103H - OH - PLAN #1														Offset Site Error:	0.0 usft
Survey Program: O-Geolink MWD														Offset Well Error:	0.0 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Total Uncertainty Axis	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)					
0.0	0.0	0.0	0.0	0.0	0.0	176.35	-60.1	3.8	60.2						
100.0	100.0	100.0	100.0	0.1	0.1	176.35	-60.1	3.8	60.2	59.9	0.29	205.263			
200.0	200.0	200.0	200.0	0.3	0.3	176.35	-60.1	3.8	60.2	59.5	0.64	93.707			
300.0	300.0	300.0	300.0	0.5	0.5	176.35	-60.1	3.8	60.2	59.2	0.99	60.712			
400.0	400.0	400.0	400.0	0.7	0.7	176.35	-60.1	3.8	60.2	58.8	1.34	44.901 CC, ES			
500.0	500.0	498.4	498.4	0.8	0.8	175.28	-61.2	5.1	61.5	59.8	1.69	36.421			
600.0	600.0	597.5	597.4	1.0	1.0	149.45	-64.4	8.4	66.5	64.5	2.04	32.630			
700.0	699.8	697.2	696.9	1.2	1.2	148.92	-67.9	12.1	74.9	72.5	2.39	31.273			
800.0	799.5	796.5	796.1	1.4	1.4	149.67	-71.3	15.7	86.2	83.4	2.76	31.272			
900.0	899.0	895.7	895.2	1.6	1.6	150.65	-74.8	19.4	98.5	95.4	3.12	31.570			
1,000.0	998.5	995.0	994.3	1.9	1.8	151.42	-78.2	23.0	110.9	107.4	3.49	31.796			
1,100.0	1,098.0	1,094.2	1,093.4	2.1	2.0	152.03	-81.7	26.6	123.3	119.4	3.85	31.974			
1,200.0	1,197.5	1,193.4	1,192.5	2.3	2.2	152.53	-85.1	30.3	135.6	131.4	4.22	32.118			
1,300.0	1,297.0	1,292.6	1,291.6	2.5	2.4	152.94	-88.6	33.9	148.0	143.4	4.59	32.237			
1,400.0	1,396.6	1,391.9	1,390.7	2.8	2.5	153.29	-92.0	37.6	160.4	155.4	4.96	32.337			
1,500.0	1,496.1	1,491.1	1,489.8	3.0	2.7	153.60	-95.4	41.2	172.8	167.5	5.33	32.423			
1,600.0	1,595.6	1,590.3	1,588.9	3.3	2.9	153.86	-98.9	44.8	185.2	179.5	5.70	32.497			
1,700.0	1,695.1	1,689.5	1,688.0	3.5	3.1	154.08	-102.3	48.5	197.6	191.5	6.07	32.562			
1,800.0	1,794.6	1,788.8	1,787.1	3.7	3.3	154.29	-105.8	52.1	210.0	203.6	6.44	32.619			
1,900.0	1,894.2	1,888.0	1,886.2	4.0	3.5	154.46	-109.2	55.8	222.4	215.6	6.81	32.669			
2,000.0	1,993.7	1,987.2	1,985.3	4.2	3.7	154.62	-112.7	59.4	234.8	227.7	7.18	32.715			
2,100.0	2,093.2	2,086.4	2,084.4	4.5	3.9	154.77	-116.1	63.0	247.3	239.7	7.55	32.756			
2,200.0	2,192.7	2,185.7	2,183.5	4.7	4.1	154.90	-119.6	66.7	259.7	251.8	7.92	32.792			
2,300.0	2,292.2	2,284.9	2,282.6	4.9	4.3	155.02	-123.0	70.3	272.1	263.8	8.29	32.826			
2,400.0	2,391.7	2,384.1	2,381.7	5.2	4.5	155.12	-126.5	74.0	284.5	275.8	8.66	32.857			
2,500.0	2,491.3	2,483.3	2,480.8	5.4	4.7	155.22	-129.9	77.6	296.9	287.9	9.03	32.885			
2,600.0	2,590.8	2,582.6	2,579.9	5.7	4.9	155.31	-133.4	81.3	309.3	299.9	9.40	32.910			
2,700.0	2,690.3	2,681.8	2,679.0	5.9	5.1	155.40	-136.8	84.9	321.8	312.0	9.77	32.934			
2,800.0	2,789.8	2,781.0	2,778.1	6.2	5.3	155.47	-140.3	88.5	334.2	324.0	10.14	32.956			
2,900.0	2,889.3	2,880.2	2,877.2	6.4	5.4	155.55	-143.7	92.2	346.6	336.1	10.51	32.977			
3,000.0	2,988.9	2,979.5	2,976.3	6.6	5.6	155.61	-147.1	95.8	359.0	348.1	10.88	32.996			
3,100.0	3,088.4	3,078.7	3,075.4	6.9	5.8	155.68	-150.6	99.5	371.4	360.2	11.25	33.014			
3,200.0	3,187.9	3,177.9	3,174.5	7.1	6.0	155.73	-154.0	103.1	383.9	372.2	11.62	33.030			
3,300.0	3,287.4	3,277.1	3,273.6	7.4	6.2	155.79	-157.5	106.7	396.3	384.3	11.99	33.046			
3,400.0	3,386.9	3,376.4	3,372.7	7.6	6.4	155.84	-160.9	110.4	408.7	396.4	12.36	33.061			
3,500.0	3,486.4	3,475.6	3,471.8	7.9	6.6	155.89	-164.4	114.0	421.1	408.4	12.73	33.075			
3,600.0	3,586.0	3,574.8	3,570.9	8.1	6.8	155.93	-167.8	117.7	433.6	420.5	13.10	33.088			
3,700.0	3,685.5	3,674.0	3,670.0	8.3	7.0	155.98	-171.3	121.3	446.0	432.5	13.47	33.100			
3,800.0	3,785.0	3,773.3	3,769.1	8.6	7.2	156.02	-174.7	124.9	458.4	444.6	13.84	33.112			
3,900.0	3,884.5	3,872.5	3,868.2	8.8	7.4	156.06	-178.2	128.6	470.8	456.6	14.21	33.123			
4,000.0	3,984.0	3,971.7	3,967.3	9.1	7.6	156.09	-181.6	132.2	483.3	468.7	14.59	33.133			
4,100.0	4,083.6	4,070.9	4,066.4	9.3	7.8	156.13	-185.1	135.9	495.7	480.7	14.96	33.143			
4,200.0	4,183.1	4,170.2	4,165.5	9.6	8.0	156.16	-188.5	139.5	508.1	492.8	15.33	33.153			
4,300.0	4,282.6	4,269.4	4,264.6	9.8	8.2	156.19	-192.0	143.1	520.5	504.8	15.70	33.162			
4,400.0	4,382.1	4,368.6	4,363.7	10.1	8.4	156.22	-195.4	146.8	533.0	516.9	16.07	33.170			
4,500.0	4,481.6	4,467.8	4,462.8	10.3	8.5	156.25	-198.8	150.4	545.4	528.9	16.44	33.178			
4,600.0	4,581.1	4,567.0	4,561.8	10.5	8.7	156.29	-202.3	154.0	557.8	541.0	16.81	33.192			
4,700.0	4,680.7	4,665.7	4,660.3	10.7	8.9	-136.44	-205.7	149.6	570.3	553.2	17.06	33.422			
4,800.0	4,779.0	4,764.0	4,756.8	10.9	9.0	-109.91	-209.0	131.8	582.6	565.4	17.19	33.886			
4,900.0	4,874.3	4,862.0	4,849.7	11.0	9.0	-100.76	-212.2	101.1	594.5	577.3	17.27	34.427			
5,000.0	4,964.7	4,959.8	4,937.4	11.1	9.1	-96.01	-215.2	58.1	605.9	588.5	17.41	34.801			
5,100.0	5,048.4	5,057.4	5,018.3	11.3	9.2	-92.98	-217.9	3.6	616.4	598.6	17.78	34.667			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Anticollision Report

Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well NAGEEZI UNIT 101H
Project:	San Juan County, NM	TVD Reference:	16' KB @ 6835.0usft
Reference Site:	S22-T24N-R9W	MD Reference:	16' KB @ 6835.0usft
Site Error:	0.0usft	North Reference:	True
Reference Well:	NAGEEZI UNIT 101H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.0usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	USA EDM 5000 Multi Users DB
Reference Design:	PLAN #1	Offset TVD Reference:	Offset Datum

Offset Design S22-T24N-R9W - NAGEZZI UNIT 103H - OH - PLAN #1													Offset Site Error:	0.0 usft
Survey Program: 0-Geolink MWD													Offset Well Error:	0.0 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Semi Major Axis	Highside Toolface (°)	Offset Wellbore Centre +W-S (usft)	Offset Wellbore Centre +E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Total Uncertainty Axis	Separation Factor	Warning
5,200.0	5,123.8	5,154.9	5,090.9	11.6	9.6	-90.84	-220.4	-61.2	625.8	607.3	18.58	33.692		
5,300.0	5,189.4	5,252.3	5,154.1	12.1	10.3	-89.28	-222.5	-135.3	634.1	614.1	19.98	31.741		
5,400.0	5,244.0	5,350.0	5,206.7	12.9	11.3	-88.13	-224.2	-217.5	641.0	618.9	22.09	29.014		
5,500.0	5,286.5	5,447.3	5,247.6	14.0	12.7	-87.31	-225.5	-305.6	646.3	621.4	24.91	25.946		
5,600.0	5,316.0	5,544.8	5,276.2	15.5	14.4	-86.78	-226.4	-398.8	650.0	621.7	28.34	22.940		
5,700.0	5,332.1	5,642.3	5,291.9	17.3	16.3	-86.51	-226.8	-495.0	652.1	619.9	32.21	20.242		
5,800.0	5,334.9	5,740.6	5,294.9	19.2	18.4	-86.48	-226.7	-593.2	652.5	616.1	36.39	17.930		
5,900.0	5,334.4	5,840.6	5,294.3	21.3	20.5	-86.48	-226.6	-693.2	652.4	611.7	40.77	16.004		
6,000.0	5,333.8	5,940.6	5,293.8	23.5	22.8	-86.48	-226.4	-793.2	652.4	607.2	45.26	14.415		
6,100.0	5,333.3	6,040.6	5,293.3	25.7	25.1	-86.48	-226.3	-893.1	652.4	602.6	49.84	13.091		
6,200.0	5,332.8	6,140.6	5,292.8	27.9	27.4	-86.48	-226.1	-993.1	652.4	597.9	54.48	11.975		
6,300.0	5,332.3	6,240.6	5,292.2	30.2	29.7	-86.48	-226.0	-1,093.1	652.4	593.2	59.16	11.026		
6,400.0	5,331.7	6,340.6	5,291.7	32.6	32.1	-86.48	-225.8	-1,193.1	652.3	588.4	63.89	10.210		
6,500.0	5,331.2	6,440.6	5,291.2	34.9	34.5	-86.48	-225.7	-1,293.1	652.3	583.7	68.65	9.502		
6,600.0	5,330.7	6,540.6	5,290.7	37.3	36.9	-86.48	-225.5	-1,393.1	652.3	578.9	73.43	8.883		
6,700.0	5,330.2	6,640.6	5,290.1	39.6	39.3	-86.48	-225.4	-1,493.1	652.3	574.0	78.23	8.338		
6,800.0	5,329.7	6,740.6	5,289.6	42.0	41.7	-86.48	-225.2	-1,593.1	652.2	569.2	83.05	7.854		
6,900.0	5,329.1	6,840.6	5,289.1	44.4	44.1	-86.48	-225.1	-1,693.1	652.2	564.3	87.88	7.422		
7,000.0	5,328.6	6,940.6	5,288.6	46.8	46.5	-86.48	-224.9	-1,793.1	652.2	559.5	92.72	7.034		
7,100.0	5,328.1	7,040.6	5,288.0	49.2	48.9	-86.48	-224.8	-1,893.1	652.2	554.6	97.57	6.684		
7,200.0	5,327.6	7,140.6	5,287.5	51.6	51.4	-86.48	-224.6	-1,993.1	652.1	549.7	102.43	6.367		
7,300.0	5,327.0	7,240.6	5,287.0	54.1	53.8	-86.48	-224.4	-2,093.1	652.1	544.8	107.30	6.078		
7,400.0	5,326.5	7,340.6	5,286.5	56.5	56.2	-86.48	-224.3	-2,193.1	652.1	539.9	112.17	5.813		
7,500.0	5,326.0	7,440.6	5,285.9	58.9	58.7	-86.48	-224.1	-2,293.1	652.1	535.0	117.05	5.571		
7,600.0	5,325.5	7,540.6	5,285.4	61.4	61.1	-86.48	-224.0	-2,393.1	652.0	530.1	121.94	5.347		
7,700.0	5,324.9	7,640.6	5,284.9	63.8	63.6	-86.48	-223.8	-2,493.1	652.0	525.2	126.82	5.141		
7,800.0	5,324.4	7,740.6	5,284.4	66.2	66.0	-86.48	-223.7	-2,593.1	652.0	520.3	131.72	4.950		
7,900.0	5,323.9	7,840.6	5,283.8	68.7	68.5	-86.48	-223.5	-2,693.1	652.0	515.4	136.61	4.772		
8,000.0	5,323.4	7,940.6	5,283.3	71.1	70.9	-86.48	-223.4	-2,793.1	651.9	510.4	141.51	4.607		
8,100.0	5,322.8	8,040.6	5,282.8	73.6	73.4	-86.48	-223.2	-2,893.1	651.9	505.5	146.41	4.453		
8,200.0	5,322.3	8,140.6	5,282.3	76.0	75.8	-86.48	-223.1	-2,993.1	651.9	500.6	151.32	4.308		
8,300.0	5,321.8	8,240.6	5,281.7	78.5	78.3	-86.48	-222.9	-3,093.1	651.9	495.7	156.22	4.173		
8,400.0	5,321.3	8,340.6	5,281.2	80.9	80.8	-86.48	-222.8	-3,193.1	651.9	490.7	161.13	4.046		
8,500.0	5,320.8	8,440.6	5,280.7	83.4	83.2	-86.48	-222.6	-3,293.1	651.8	485.8	166.04	3.926		
8,600.0	5,320.2	8,540.6	5,280.1	85.8	85.7	-86.47	-222.5	-3,393.1	651.8	480.9	170.95	3.813		
8,700.0	5,319.7	8,640.6	5,279.6	88.3	88.1	-86.47	-222.3	-3,493.1	651.8	475.9	175.86	3.706		
8,800.0	5,319.2	8,740.6	5,279.1	90.7	90.6	-86.47	-222.2	-3,593.1	651.8	471.0	180.78	3.605		
8,900.0	5,318.7	8,840.6	5,278.6	93.2	93.1	-86.47	-222.0	-3,693.1	651.7	466.0	185.69	3.510		
9,000.0	5,318.1	8,940.6	5,278.0	95.7	95.5	-86.47	-221.8	-3,793.1	651.7	461.1	190.61	3.419		
9,100.0	5,317.6	9,040.6	5,277.5	98.1	98.0	-86.47	-221.7	-3,893.1	651.7	456.2	195.53	3.333		
9,200.0	5,317.1	9,140.6	5,277.0	100.6	100.4	-86.47	-221.5	-3,993.1	651.7	451.2	200.45	3.251		
9,300.0	5,316.6	9,240.6	5,276.5	103.0	102.9	-86.47	-221.4	-4,093.1	651.6	446.3	205.37	3.173		
9,400.0	5,316.0	9,340.6	5,275.9	105.5	105.4	-86.47	-221.2	-4,193.1	651.6	441.3	210.29	3.099		
9,500.0	5,315.5	9,440.6	5,275.4	108.0	107.8	-86.47	-221.1	-4,293.1	651.6	436.4	215.21	3.028		
9,600.0	5,315.0	9,540.6	5,274.9	110.4	110.3	-86.47	-220.9	-4,393.1	651.6	431.4	220.14	2.960		
9,700.0	5,314.5	9,640.6	5,274.4	112.9	112.8	-86.47	-220.8	-4,493.1	651.5	426.5	225.06	2.895		
9,800.0	5,313.9	9,740.6	5,273.8	115.4	115.2	-86.47	-220.6	-4,593.1	651.5	421.5	229.98	2.833		
9,900.0	5,313.4	9,840.6	5,273.3	117.8	117.7	-86.47	-220.5	-4,693.1	651.5	416.6	234.91	2.773		
10,000.0	5,312.9	9,940.6	5,272.8	120.3	120.2	-86.47	-220.3	-4,793.1	651.5	411.6	239.83	2.716		
10,100.0	5,312.4	10,040.6	5,272.3	122.7	122.6	-86.47	-220.2	-4,893.1	651.4	406.7	244.76	2.662		
10,200.0	5,311.8	10,140.6	5,271.7	125.2	125.1	-86.47	-220.0	-4,993.1	651.4	401.7	249.69	2.609		
10,300.0	5,311.3	10,240.6	5,271.2	127.7	127.6	-86.47	-219.9	-5,093.1	651.4	396.8	254.61	2.558		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Anticollision Report

Company: EnCana Oil & Gas (USA) Inc
Project: San Juan County, NM
Reference Site: S22-T24N-R9W
Site Error: 0.0usft
Reference Well: NAGEEZI UNIT 101H
Well Error: 0.0usft
Reference Wellbore: OH
Reference Design: PLAN #1

Local Co-ordinate Reference: Well NAGEEZI UNIT 101H
TVD Reference: 16' KB @ 6835.0usft
MD Reference: 16' KB @ 6835.0usft
North Reference: True
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: USA EDM 5000 Multi Users DB
Offset TVD Reference: Offset Datum

Offset Design S22-T24N-R9W - NAGEZZI UNIT 103H - OH - PLAN #1													Offset Site Error:	0.0 usft
Survey Program: 0-Geolink MWD													Offset Well Error:	0.0 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Total Uncertainty Axis	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+W-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
10,360.0	5,311.0	10,300.6	5,270.9	129.2	129.1	-86.47	-219.8	-5,153.1	651.4	393.8	257.57	2.529 SF		

Anticollision Report


Company: EnCana Oil & Gas (USA) Inc
 Project: San Juan County, NM
 Reference Site: S22-T24N-R9W
 Site Error: 0.0usft
 Reference Well: NAGEEZI UNIT 101H
 Well Error: 0.0usft
 Reference Wellbore: OH
 Reference Design: PLAN #1

Local Co-ordinate Reference: Well NAGEEZI UNIT 101H
 TVD Reference: 16' KB @ 6835.0usft
 MD Reference: 16' KB @ 6835.0usft
 North Reference: True
 Survey Calculation Method: Minimum Curvature
 Output errors are at 2.00 sigma
 Database: USA EDM 5000 Multi Users DB
 Offset TVD Reference: Offset Datum

Reference Depths are relative to 16' KB @ 6835.0usft
 Offset Depths are relative to Offset Datum
 Central Meridian is -107.833333 °

Coordinates are relative to: NAGEEZI UNIT 101H
 Coordinate System is US State Plane 1983, New Mexico Western Zone
 Grid Convergence at Surface is: 0.03°

Ladder Plot

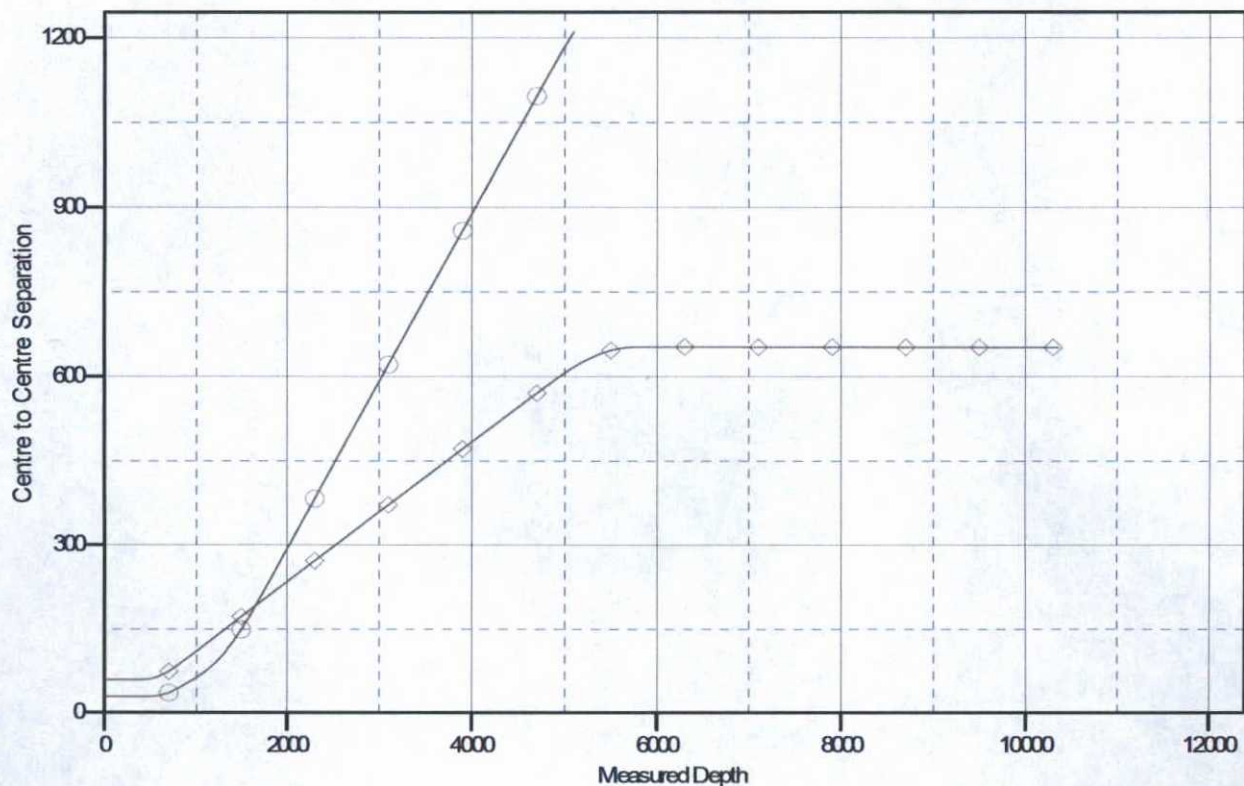

LEGEND

◆ NAGEEZI UNIT 103H, OH, PLAN#1 V0 ● NAGEEZI UNIT 102H, OH, PLAN#1 V0

Nageezi Unit 101H

**SHL: NWSW Section 22, T24N, R9W
1,805' FSL and 235' FWL**

**BHL: NWSW Section 21, T24N, R9W
2,230' FSL and 330' FWL**

San Juan County, New Mexico

Lease Number: NMNM 132981X

7. METHODS FOR HANDLING WASTE

A. Cuttings

1. A closed-loop system will be used. Cuttings will be moved through a shaker system on the drill rig that separates drilling fluids from the cuttings. Cuttings will be stored onsite in above-ground storage tanks. Cuttings will be pulled from the storage tanks, mixed with saw dust or similar absorbent material, and disposed of at the Envirotech, Inc. and/or Industrial Ecosystem, Inc. waste disposal facilities.
2. The closed-loop system storage tanks will be adequately sized to ensure confinement of all fluids and will provide sufficient freeboard to prevent uncontrolled releases.
3. A 20-mil liner will be installed under tanks, pumps, ancillary facilities, and truck loading/unloading areas associated with the closed-loop system.

B. Drilling Fluids

1. A closed-loop system will be used. Drilling fluids will be stored onsite in above-ground storage tanks. Upon termination of drilling operations, the drilling fluids will be recycled and transferred to other permitted closed-loop systems or returned to the vendor for reuse, as practical. Residual fluids will be vacuumed from the storage tanks and disposed of at Basin Disposal, Inc. and/or Industrial Ecosystem, Inc. waste disposal facilities.
2. The closed-loop system storage tanks will be adequately sized to ensure confinement of all fluids and will provide sufficient freeboard to prevent uncontrolled releases.
3. The closed-loop system storage tanks will be placed in bermed secondary containment sized to accommodate a minimum of 110 percent of the volume of the largest storage tank.
4. A 20-mil liner will be installed under tanks, pumps, ancillary facilities, and truck loading/unloading areas associated with the closed-loop system.

C. Flowback Water

1. The water-based solution that flows back to the surface during and after completion operations will be placed in storage tanks on the location.
2. Flowback water will be confined to a storage tank for a period not to exceed 90 days after initial production and will be disposed of at Basin Disposal, Inc. and/or Industrial Ecosystem, Inc. waste disposal facilities.

D. Spills – any spills of non-freshwater fluids will be immediately cleaned up and removed to an approved disposal site. Encana will also notify the BLM within 24 hours of any spill.

E. Sewage – self-contained, chemical toilets will be provided for human waste disposal. The toilet holding tanks will be pumped, as needed, and the contents thereof disposed of in an approved sewage disposal facility. The toilets will be onsite during all operations.

F. Garbage and other waste material – garbage, trash and other waste materials will be collected in a portable, self-contained and fully-enclosed trash container during drilling and completion operations. The accumulated trash will be removed, as needed, and will be disposed of at an authorized sanitary landfill. No trash will be buried or burned on location.

G. Immediately after removal of the drilling rig, all debris and other waste materials not contained in the trash container will be cleaned up and removed from the well location.

ENCANA OIL & GAS (USA) INC.

NAGEEZI UNIT #101H

1805' FSL & 235' FWL

LOCATED IN THE NW/4 SW/4 OF SECTION 22, T24N, R9W, N.M.P.M.,
SAN JUAN COUNTY, NEW MEXICO

DIRECTIONS

- 1) FROM THE INTERSECTION OF HWY 64 & HWY 550 IN BLOOMFIELD, TRAVEL SOUTH ON HWY 550 FOR 32.0 MILES. (M.P. 119.6).
- 2) TURN RIGHT AND GO 1.3 MILES WHERE ACCESS IS STAKED ON LEFT SIDE OF ROAD.

WELL FLAG LOCATED AT LAT. 36.297296° N, LONG. 107.784931° W (NAD 83).

JOB No.: ENC211

DATE: 02/06/2015

DRAWN BY: TWT



CCI

CHENAULT CONSULTING INC.

4800 COLLEGE BLVD.
SUITE 201
FARMINGTON, NM 87402
(505) 325-7707

WELLHEAD BLOWOUT CONTROL SYSTEM

encana

Well Name and Number:
Nageezi Unit 101H

