

State of New Mexico
Energy, Minerals and Natural Resources Department

Susana Martinez
Governor

Ken McQueen
Cabinet Secretary

Matthias Sayer
Deputy Cabinet Secretary

David R. Catanach, Division Director
Oil Conservation Division



New Mexico Oil Conservation Division approval and conditions listed below are made in accordance with OCD Rule 19.15.7.11 and are in addition to the actions approved by BLM on the following 3160-3 APD form.

Operator Signature Date: 10/17/2017

Well information;

Operator WPK, Well Name and Number S. Escavado Unit 3444

API# 30-043-21315, Section 21, Township 22 N/S, Range 6 E/W

Conditions of Approval: (See the below checked and handwritten conditions)

- ☒ Notify Aztec OCD 24hrs prior to casing & cement.
- ☒ Hold C-104 for directional survey & "As Drilled" Plat
 - ☐ Hold C-104 for NSL, NSP, DHC
 - ☐ Spacing rule violation. Operator must follow up with change of status notification on other well to be shut in or abandoned
 - ☐ Regarding the use of a pit, closed loop system or below grade tank, the operator must comply with the following as applicable:
 - A pit requires a complete C-144 be submitted and approved prior to the construction or use of the pit, pursuant to 19.15.17.8.A
 - A closed loop system requires notification prior to use, pursuant to 19.15.17.9.A
 - A below grade tank requires a registration be filed prior to the construction or use of the below grade tank, pursuant to 19.15.17.8.C
 - ☐ Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
 - ☐ Submit Gas Capture Plan form prior to spudding or initiating recompletion operations
 - ☒ Regarding Hydraulic Fracturing, review EPA Underground Injection Control Guidance 84
 - ☒ Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.
 - ☒ Well-bore communication is regulated under 19.15.29 NMAC. This requires well-bore Communication to be reported in accordance with 19.15.29.8.

Charles Hernandez

NMOCD Approved by Signature

7-22-2018
Date

*APD held for
Unit approval
- all agencies*

JAN 25 2018

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NMNM119281
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☐ Single Zone ☒ Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator WPX ENERGY LLC		7. If Unit or CA Agreement, Name and No.
3a. Address 720 S Main Aztec NM 87410	3b. Phone No. (include area code) (505)333-1822	8. Lease Name and Well No. S ESCAVADA UNIT 364H
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface NWSW / 2516 FSL / 145 FWL / LAT 36.123331 / LONG -107.482638 At proposed prod. zone NESE / 2312 FSL / 984 FEL / LAT 36.137867 / LONG -107.503875		9. API Well No. 30-043-21315
14. Distance in miles and direction from nearest town or post office* 53.9 miles		10. Field and Pool, or Exploratory MANCOS / RUSTY GALLUP OIL POOL
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 20 feet		11. Sec., T. R. M. or Blk. and Survey or Area SEC 21 / T22N / R6W / NMP
16. No. of acres in lease 640		12. County or Parish SANDOVAL
17. Spacing Unit dedicated to this well 360		13. State NM
18. Distance from proposed location* to nearest well, drilling, completed, 145 feet applied for, on this lease, ft.		20. BLM/BIA Bond No. on file FED: UTB000178
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 7126 feet		22. Approximate date work will start* 04/01/2018
		23. Estimated duration 30 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature (Electronic Submission)	Name (Printed/Typed) Lacey Granillo / Ph: (505)333-1816	Date 10/17/2017
Title Permitting Tech III		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) Kristopher S. Ellis / Ph: (505)564-7734	Date 01/25/2018
Title LIE FARMINGTON		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

APPROVED WITH CONDITIONS
Approval Date: 01/25/2018

AV NMLD

District I
1625 N. French Drive, Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First Street, Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Drive, Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 1, 2011

Submit one copy to
Appropriate District Office

OIL CONSERVATION DIVISION

1220 South St. Francis Drive
Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

*API Number 30043-21315	*Pool Code 52860	*Pool Name RUSTY GALLUP OIL POOL
*Property Code 322151	*Property Name S ESCAVADA UNIT	*Well Number 364H
*GRID No 120782 (372286)	*Operator Name WPX ENERGY PRODUCTION, LLC (Enduring)	*Elevation 7126'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	21	22N	6W		2516	SOUTH	145	WEST	SANDOVAL

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	18	22N	6W		2312	SOUTH	984	EAST	SANDOVAL

¹² Dedicated Acres 360.00 NE/4 SE/4 - Section 18 NE/4 NW/4, W/2 NE/4 SE/4 NE/4, NE/4 SE/4 - Section 20 W/2 SW/4, SE/4 SW/4 - Section 17	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-14347
--	-------------------------------	----------------------------------	------------------------------------

NO ALLOWABLE WILL BE ASSIGNED
TO THIS COMPLETION UNTIL ALL
INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS
BEEN APPROVED BY THE DIVISION

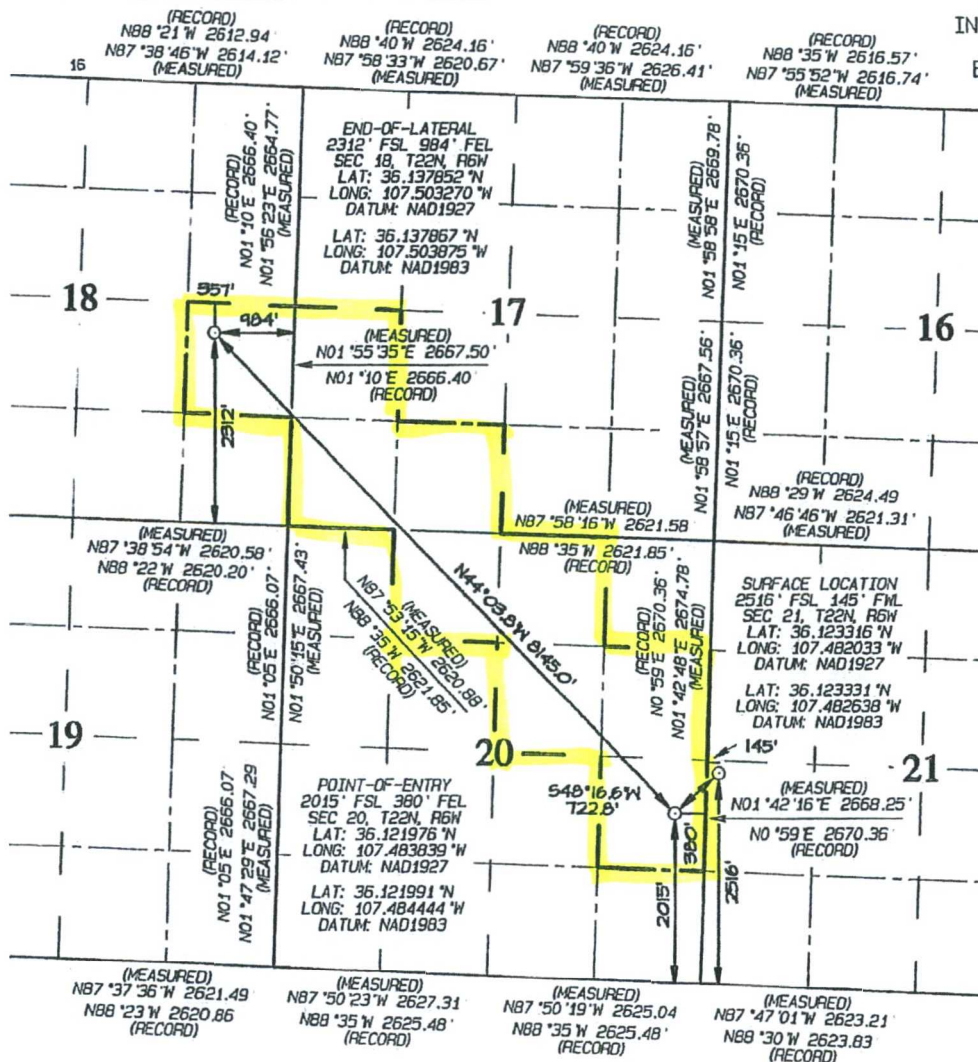

¹⁷ OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: *Lacey Granillo* Date: 10/27/17
Printed Name: Lacey Granillo
E-mail Address: lacey.granillo@wpxenergy.com

¹⁸ SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.
Date Revised: OCTOBER 6, 2017
Date of Survey: MARCH 1, 2017
Signature and Seal of Professional Surveyor



JASON C. EDWARDS
Certificate Number 15269

Navajo Surface



WPX Energy

Operations Plan

(Note: This procedure will be adjusted onsite based upon actual conditions)

Date: October 5, 2017

Well Name: S Escavada UT #364H

SH Location: NWSW Sec 21 22N-06W

BH Location: NESE Sec 18 22N-06W

Field: Rusty Gallup Oil Pool

Surface: BLM

Elevation: 7,126'

Minerals: IA

Measured Depth: 13,980'

I. GEOLOGY

Surface formation - NACIMIENTO

A. FORMATION TOPS: (KB)

NAME	MD	TVD	NAME	MD	TVD
Ojo Alamo	1,098	1,094	Mancos	4,186	4,078
Kirtland	1,271	1,262	Gallup	4,592	4,471
Picture Cliffs	1,681	1,658			
Lewis	1,830	1,802	KICKOFF POINT	4,560	4,440
Chacra	2,096	2,059	LANDING POINT	5,685	5,194
Cliff House	3,220	3,145	TOP TARGET	5,194	5,685
Menefee	3,262	3,185			
Point Lookout	4,087	3,983	TD	13,980	5,254

B. MUD LOGGING PROGRAM:

Mudlogger on location from surface csg to TD.

C. LOGGING PROGRAM:

LWD GR from surface casing to TD.

D. NATURAL GAUGES:

Gauge any noticeable increases in gas flow. Record all gauges in Tour book and on morning reports.

II. DRILLING

A. MUD PROGRAM:

LSND mud (WBM) will be used to drill the 12-1/4" Surface hole, the 8 3/4" Directional Vertical hole, and the curve portion of the wellbore. A LSND (WBM) or (OBM) will be used to drill the lateral portion of well. Treat for lost circulation as necessary. Obtain 100% returns prior to cementing. Notify Engineering of any mud losses.

B. BOP TESTING:

While drill pipe is in use, the pipe rams and the blind rams will be function tested once each trip. The BOPE will be tested to 2,000 psi (High) for 10 minutes and the annular tested to 1,500 psi for 10 minutes. Pressure test surface casing to 1,500 psi for 30 minutes and intermediate casing to 1,500 psi for 30 minutes. Utilize a BOPE Testing Unit with a recording chart and appropriate test plug for testing. All tests and inspections will be recorded in the tour book as to time and results.

III. MATERIALS

A. CASING PROGRAM:

CASING TYPE	OH SIZE (IN)	DEPTH (MD)	CSG SIZE	WEIGHT	GRADE	CONN
SURFACE	12.25"	320'	9.625"	36 LBS	J-55 or equiv	STC
INTERMEDIATE	8.75"	5685'	7"	23 LBS	J-55 or equiv	LTC
PRODUCTION	6.125"	5535' - 13980'	4.5"	11.6 LBS	P-110 or equiv	LTC
TIE BACK	6.125"	Surf. - 5535'	4.5"	11.6 LBS	P-110 or equiv	LTC

B. FLOAT EQUIPMENT:

1. SURFACE CASING:

9-5/8" notched regular pattern guide shoe. Run (1) standard centralizer on each of the bottom (4) joints of Surface Casing.

2. INTERMEDIATE CASING:

7" cement nose guide shoe with a self-fill insert float. Place float collar one joint above the shoe. Install (1) centralizer on each of the bottom (3) joints and one standard centralizer every (3) joints to 2,500 ft. Run (1) centralizer at 2,500 ft., 2,300ft., 2,000ft., 1,500 ft., and 1,000 ft. If losses are encountered during the drilling of the intermediate section a DV tool will be utilized and a 2 stage cement job may be planned to ensure cement circ back to surface. The DV tool will be placed 100' above the top of the Chacra formation. If cement is circulated back to surface on the first stage, a cancellation device will be dropped to shift the dv tool closed and the 2nd stage cement job will be aborted at that time, if no cement is seen at surface on the 1st stage the stage tool will be opened and a 2nd stage cement job will be pumped.

3. PRODUCTION LINER:

Run 4-1/2" Liner with cement nose guide Float Shoe + 2jts. of 4-1/2" casing + Landing Collar + 4-1/2" pup joint + 1 RSI (Sliding Sleeve) positioned inside the 330ft Hard line. Centralizer program will be determined by Wellbore condition and when Lateral is evaluated by Geoscientists and Reservoir Engineers. Set seals on Liner Hanger. Test TOL to 1500 psi for 15 minutes.

C. CEMENT:

(Note: Volumes may be adjusted onsite due to actual conditions)

1. Surface:

5 bbl Fresh Water Spacer, 28.0 bbls, 100 sx (160 cu.ft.) of 14.5 ppg Type I-II (Neat G) + 20% Fly Ash cement w/ 7.41 gal/sack mix water ratio @ 1.61 cu ft/sx yield. Calculated @ volume + 50% excess. WOC 12 hours. Test csg to 600psi. Total Volume: (160 cu-ft/100 sx/ 28.0 Bbls). TOC at Surface.

2. Intermediate:

Spacer #1: 20 bbl (112 cuft) Chemwash. Lead Cement: 138 bbls, 399 sks, (777 cuft), 12.3 ppg @ 1.97 cuft/sk yield. Tail Cement: 104 bbls, 448 sks, (583 cuft), 13.5 ppg @ 1.3 cuft/sk yield. Displacement: Displace w/ +/- 224 bbl Drilling mud or water.
Total Cement: 242 bbls, 847 sks, (1360 cuft)

3. Prod Liner:

Spacer #1: 10 bbl (56 cu-ft) Water Spacer. Spacer #2: 40 bbl 9.5 ppg (224.6 cu-ft) Tunned Spacer III. Spacer #3: 10 bbl Water Spacer. Lead Cement: Extencem™ System. Yield 1.36 cuft/sk 13.3 ppg (790 sx /1074 cuft /191 bbls). Tail Spacer: 20 BBL of MMCR. Displacement: Displace w/ +/-168bbl Fr Water.
Total Cement: 191 bbls, 790 sks, (1074 cuft)

D. COMPLETION:

Run CCL for perforating

A. PRESSURE TEST:

1. Pressure test 4-1/2" casing to 4500 psi max, hold for 30 minutes. Increase pressure to Open RSI sleeves.

B. STIMULATION:

1. Stimulate with approximately 1,000#/ft 20/40 mesh sand and +/- 200' stage interval for full lateral length of the well with water and N2. Isolate stages with flow through frac plug.

3. Drill out frac plugs and flowback lateral.

C. RUNNING TUBING:

1. Production Tubing: Run 2-7/8", 6.5#, J-55, EUE tubing with a SN on top of bottom joint. Land tubing near Top of Liner.

If this horizontal well is drilled past the applicable setbacks, an unorthodox location application is not required because the completed interval in this well, as defined by 19.15.16.7 B(1) NMAC, will be entirely within the applicable setbacks. This approach complies with all applicable rules, including 19.15.16.14 A(3) NMAC, 19.15.16.14 B(2) NMAC, 19.15.16.15 B(2) NMAC, and 19.15.16.15. B(4) NMAC.

NOTES:

A 4-1/2" 11.6# P-110 Liner will be run to TD and landed +/- 150 ft. into the 7" 23# J-55 Intermediate casing with a Liner Hanger and pack-off assembly then cemented to top of liner hanger.

After cementing and TOL clean up operations are complete, the TOL will be tested to 1500 psi (per BLM).

WPX Energy

Sandoval County, NM 3003 West

S Escavada UT 364 Pad

S Escavada UT 364H

API:

Wellbore #1

Plan: Plan #1

Standard Planning Report

21 September, 2017




www.scientificdrilling.com



GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)

S Escavada UT 364H
Sandoval County, NM 3003 West
Northing: 1864315.18
Easting: 603750.86
Plan #1

**WELL DETAILS** S Escavada UT 364H

Ground Level: 7126.00

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	1864315.18	603750.86	36.123316	-107.482033

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	
1246.98	14.94	174.08	1238.55	-96.32	9.98	2.00	174.08	-75.39	
4560.40	14.94	174.08	4439.96	-945.97	98.06	0.00	0.00	-740.44	
5684.51	89.59	315.21	5194.00	-594.88	-427.06	9.00	140.23	-121.31	
13979.62	89.59	315.21	5254.00	5291.94	-6270.91	0.00	0.00	8173.58	364H BHL

SITE DETAILS: S Escavada UT 364 Pad **PROJECT DETAILS:** Sandoval County, NM 3003 West

Site Centre Northing: 1864315.18
Easting: 603750.86

Positional Uncertainty: 0.00
Convergence: 0.21
Local North: True



Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico West 3003
System Datum: Mean Sea Level

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W
364H POE	5194.00	-487.40	-533.39
364H BHL	5254.00	5291.94	-6270.91

CASING DETAILS

TVD	MD	Size
5195.09	5835.44	7

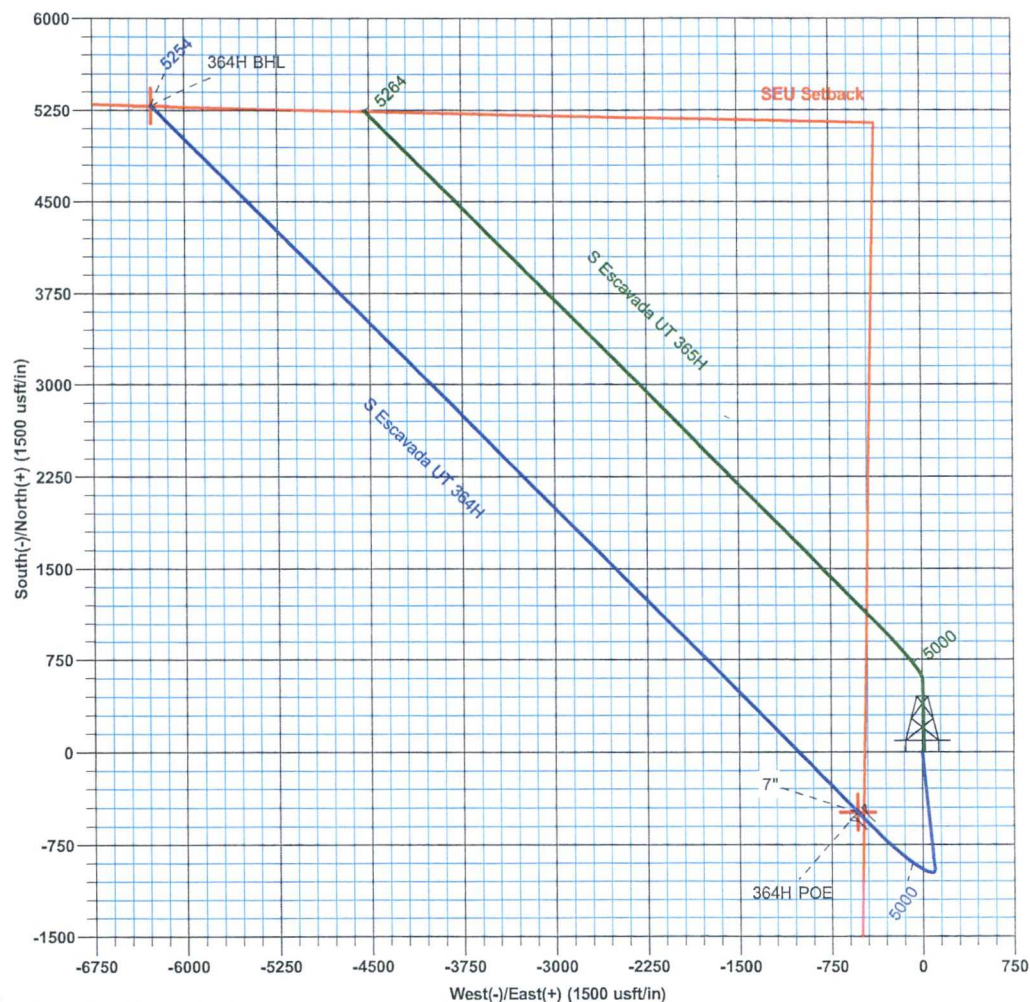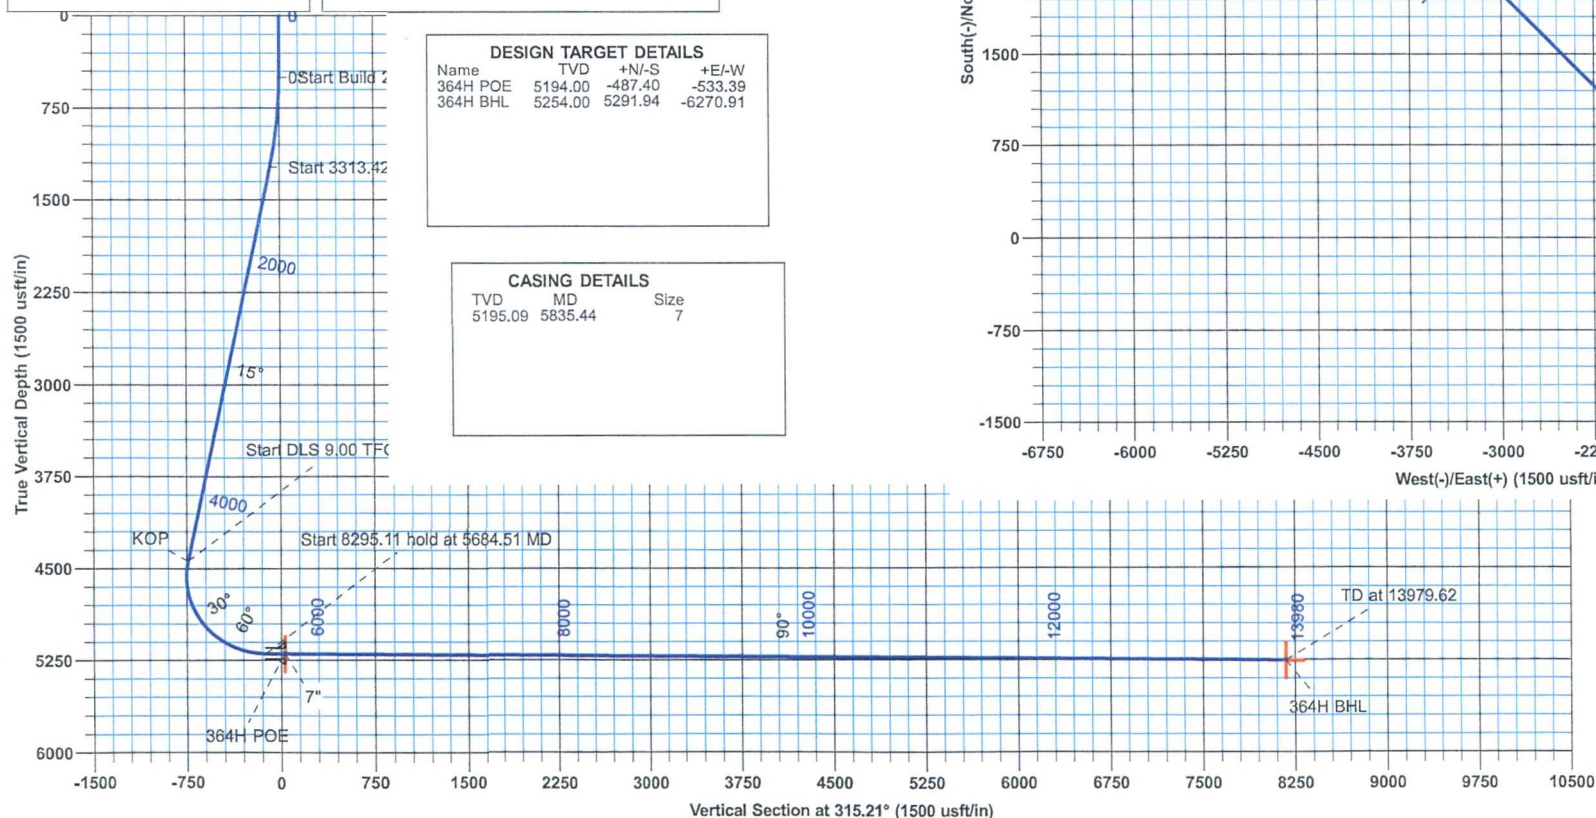

10:24 Bailey Fellows

Scientific Drilling
325 S Pauline Rd
Odessa, TX 79765

Scientific Drilling Int.

Planning Report

Database:	Grand Junction District	Local Co-ordinate Reference	Well S Escavada UT 364H
Company:	WPX Energy	TVD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Project:	Sandoval County, NM 3003 West	MD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Site:	S Escavada UT 364 Pad	North Reference:	True
Well:	S Escavada UT 364H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Project	Sandoval County, NM 3003 West		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico West 3003		

Site		S Escavada UT 364 Pad			
Site Position:		Northing:	1,864,315.18 usft	Latitude:	36.123316
From:	Lat/Long	Easting:	603,750.87 usft	Longitude:	-107.482033
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.21 °

Well	S Escavada UT 364H					
Well Position	+N/-S	0.00 usft	Northing:	1,864,315.18 usft	Latitude:	36.123316
	+E/-W	0.00 usft	Easting:	603,750.87 usft	Longitude:	-107.482033
Position Uncertainty		0.00 usft	Wellhead Elevation:	0.00 usft	Ground Level:	7,126.00 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	9/18/2017	8.90	62.88	49,468

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	315.21

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,246.98	14.94	174.08	1,238.55	-96.32	9.98	2.00	2.00	0.00	174.08	
4,560.40	14.94	174.08	4,439.96	-945.97	98.06	0.00	0.00	0.00	0.00	
5,684.51	89.59	315.21	5,194.00	-594.88	-427.06	9.00	6.64	12.55	140.23	
13,979.62	89.59	315.21	5,254.00	5,291.94	-6,270.91	0.00	0.00	0.00	0.00	364H BHL

Scientific Drilling Int.

Planning Report

Database:	Grand Junction District	Local Co-ordinate Reference	Well S Escavada UT 364H
Company:	WPX Energy	TVD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Project:	Sandoval County, NM 3003 West	MD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Site:	S Escavada UT 364 Pad	North Reference:	True
Well:	S Escavada UT 364H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 2.00									
600.00	2.00	174.08	599.98	-1.74	0.18	-1.36	2.00	2.00	0.00
700.00	4.00	174.08	699.84	-6.94	0.72	-5.43	2.00	2.00	0.00
800.00	6.00	174.08	799.45	-15.61	1.62	-12.22	2.00	2.00	0.00
900.00	8.00	174.08	898.70	-27.73	2.87	-21.71	2.00	2.00	0.00
1,000.00	10.00	174.08	997.47	-43.29	4.49	-33.88	2.00	2.00	0.00
1,098.34	11.97	174.08	1,094.00	-61.93	6.42	-48.47	2.00	2.00	0.00
Ojo Alamo									
1,100.00	12.00	174.08	1,095.62	-62.27	6.45	-48.74	2.00	2.00	0.00
1,200.00	14.00	174.08	1,193.06	-84.64	8.77	-66.25	2.00	2.00	0.00
1,246.98	14.94	174.08	1,238.55	-96.32	9.98	-75.39	2.00	2.00	0.00
Start 3313.42 hold at 1246.98 MD									
1,271.26	14.94	174.08	1,262.00	-102.54	10.63	-80.26	0.00	0.00	0.00
Kirtland									
1,300.00	14.94	174.08	1,289.77	-109.91	11.39	-86.03	0.00	0.00	0.00
1,400.00	14.94	174.08	1,386.39	-135.56	14.05	-106.10	0.00	0.00	0.00
1,500.00	14.94	174.08	1,483.01	-161.20	16.71	-126.18	0.00	0.00	0.00
1,600.00	14.94	174.08	1,579.63	-186.84	19.37	-146.25	0.00	0.00	0.00
1,681.11	14.94	174.08	1,658.00	-207.64	21.52	-162.53	0.00	0.00	0.00
Picture Cliffs									
1,700.00	14.94	174.08	1,676.25	-212.49	22.03	-166.32	0.00	0.00	0.00
1,800.00	14.94	174.08	1,772.87	-238.13	24.69	-186.39	0.00	0.00	0.00
1,830.15	14.94	174.08	1,802.00	-245.86	25.49	-192.44	0.00	0.00	0.00
Lewis									
1,900.00	14.94	174.08	1,869.49	-263.77	27.34	-206.46	0.00	0.00	0.00
2,000.00	14.94	174.08	1,966.11	-289.41	30.00	-226.53	0.00	0.00	0.00
2,096.14	14.94	174.08	2,059.00	-314.07	32.56	-245.83	0.00	0.00	0.00
Chacra									
2,100.00	14.94	174.08	2,062.73	-315.06	32.66	-246.60	0.00	0.00	0.00
2,200.00	14.94	174.08	2,159.35	-340.70	35.32	-266.67	0.00	0.00	0.00
2,300.00	14.94	174.08	2,255.97	-366.34	37.98	-286.75	0.00	0.00	0.00
2,400.00	14.94	174.08	2,352.59	-391.99	40.63	-306.82	0.00	0.00	0.00
2,500.00	14.94	174.08	2,449.21	-417.63	43.29	-326.89	0.00	0.00	0.00
2,600.00	14.94	174.08	2,545.83	-443.27	45.95	-346.96	0.00	0.00	0.00
2,700.00	14.94	174.08	2,642.45	-468.91	48.61	-367.03	0.00	0.00	0.00
2,800.00	14.94	174.08	2,739.07	-494.56	51.27	-387.10	0.00	0.00	0.00
2,900.00	14.94	174.08	2,835.69	-520.20	53.93	-407.17	0.00	0.00	0.00
3,000.00	14.94	174.08	2,932.31	-545.84	56.58	-427.24	0.00	0.00	0.00
3,100.00	14.94	174.08	3,028.93	-571.49	59.24	-447.32	0.00	0.00	0.00
3,200.00	14.94	174.08	3,125.55	-597.13	61.90	-467.39	0.00	0.00	0.00
3,220.13	14.94	174.08	3,145.00	-602.29	62.44	-471.43	0.00	0.00	0.00
Cliff House									
3,261.53	14.94	174.08	3,185.00	-612.91	63.54	-479.74	0.00	0.00	0.00
Menefee									

Scientific Drilling Int.

Planning Report

Database:	Grand Junction District	Local Co-ordinate Reference	Well S Escavada UT 364H
Company:	WPX Energy	TVD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Project:	Sandoval County, NM 3003 West	MD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Site:	S Escavada UT 364 Pad	North Reference:	True
Well:	S Escavada UT 364H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
3,300.00	14.94	174.08	3,222.17	-622.77	64.56	-487.46	0.00	0.00	0.00	
3,400.00	14.94	174.08	3,318.79	-648.41	67.22	-507.53	0.00	0.00	0.00	
3,500.00	14.94	174.08	3,415.41	-674.06	69.87	-527.60	0.00	0.00	0.00	
3,600.00	14.94	174.08	3,512.03	-699.70	72.53	-547.67	0.00	0.00	0.00	
3,700.00	14.94	174.08	3,608.65	-725.34	75.19	-567.74	0.00	0.00	0.00	
3,800.00	14.94	174.08	3,705.27	-750.98	77.85	-587.81	0.00	0.00	0.00	
3,900.00	14.94	174.08	3,801.89	-776.63	80.51	-607.89	0.00	0.00	0.00	
4,000.00	14.94	174.08	3,898.51	-802.27	83.17	-627.96	0.00	0.00	0.00	
4,087.45	14.94	174.08	3,983.00	-824.70	85.49	-645.51	0.00	0.00	0.00	
Point Lookout										
4,100.00	14.94	174.08	3,995.13	-827.91	85.82	-648.03	0.00	0.00	0.00	
4,185.77	14.94	174.08	4,078.00	-849.91	88.10	-665.24	0.00	0.00	0.00	
Mancos										
4,200.00	14.94	174.08	4,091.75	-853.56	88.48	-668.10	0.00	0.00	0.00	
4,300.00	14.94	174.08	4,188.37	-879.20	91.14	-688.17	0.00	0.00	0.00	
4,400.00	14.94	174.08	4,284.99	-904.84	93.80	-708.24	0.00	0.00	0.00	
4,500.00	14.94	174.08	4,381.61	-930.48	96.46	-728.31	0.00	0.00	0.00	
4,560.40	14.94	174.08	4,439.96	-945.97	98.06	-740.44	0.00	0.00	0.00	
Start DLS 9.00 TFO 140.23 - KOP										
4,592.37	12.86	182.38	4,471.00	-953.63	98.34	-746.06	9.00	-6.51	25.95	
Gallup										
4,600.00	12.41	184.75	4,478.44	-955.29	98.24	-747.17	9.00	-5.91	31.05	
4,650.00	10.12	204.79	4,527.50	-964.64	95.95	-752.19	9.00	-4.57	40.09	
4,700.00	9.54	231.17	4,576.79	-971.23	90.88	-753.30	9.00	-1.16	52.75	
4,750.00	10.94	255.44	4,626.01	-975.02	83.05	-750.48	9.00	2.81	48.55	
4,796.02	13.48	271.05	4,671.00	-976.02	73.45	-744.43	9.00	5.51	33.92	
Gallup Upper										
4,800.00	13.74	272.12	4,674.87	-976.00	72.52	-743.75	9.00	6.42	26.82	
4,850.00	17.25	282.71	4,723.05	-974.14	59.35	-733.15	9.00	7.03	21.17	
4,900.00	21.14	289.65	4,770.27	-969.48	43.62	-718.76	9.00	7.77	13.90	
4,950.00	25.22	294.49	4,816.23	-962.03	25.42	-700.66	9.00	8.16	9.66	
5,000.00	29.42	298.03	4,860.64	-951.84	4.88	-678.95	9.00	8.39	7.09	
5,050.00	33.69	300.75	4,903.25	-938.97	-17.89	-653.78	9.00	8.54	5.44	
5,100.00	38.00	302.92	4,943.77	-923.51	-42.74	-625.30	9.00	8.63	4.34	
5,147.35	42.12	304.62	4,980.00	-906.55	-68.05	-595.43	9.00	8.70	3.59	
Mancos Lwr										
5,150.00	42.35	304.71	4,981.96	-905.54	-69.52	-593.68	9.00	8.72	3.28	
5,174.84	44.52	305.49	5,000.00	-895.72	-83.49	-576.86	9.00	8.74	3.14	
El Vado										
5,200.00	46.73	306.22	5,017.59	-885.18	-98.06	-559.12	9.00	8.76	2.91	
5,250.00	51.12	307.53	5,050.44	-862.56	-128.20	-521.84	9.00	8.78	2.62	
5,299.47	55.48	308.67	5,080.00	-838.08	-159.39	-482.49	9.00	8.81	2.31	
Mancos Unc										
5,300.00	55.52	308.69	5,080.30	-837.81	-159.73	-482.06	9.00	8.82	2.19	
5,340.17	59.07	309.53	5,102.00	-816.49	-185.95	-448.45	9.00	8.83	2.10	
Frac Barrier										
5,350.00	59.94	309.73	5,106.99	-811.09	-192.48	-440.02	9.00	8.83	2.00	
5,400.00	64.36	310.68	5,130.34	-782.55	-226.23	-395.99	9.00	8.84	1.90	
5,450.00	68.78	311.56	5,150.22	-752.39	-260.78	-350.25	9.00	8.85	1.76	
5,494.88	72.76	312.31	5,165.00	-724.07	-292.30	-307.94	9.00	8.86	1.67	

Scientific Drilling Int.

Planning Report

Database:	Grand Junction District	Local Co-ordinate Reference	Well S Escavada UT 364H
Company:	WPX Energy	TVD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Project:	Sandoval County, NM 3003 West	MD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Site:	S Escavada UT 364 Pad	North Reference:	True
Well:	S Escavada UT 364H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
PS 3									
5,500.00	73.21	312.39	5,166.50	-720.78	-295.91	-303.06	9.00	8.87	1.62
5,550.00	77.65	313.18	5,179.07	-687.91	-331.42	-254.72	9.00	8.87	1.59
5,600.00	82.08	313.95	5,187.87	-654.00	-367.07	-205.53	9.00	8.87	1.53
5,608.65	82.85	314.08	5,189.00	-648.04	-373.24	-196.96	9.00	8.87	1.51
PS2									
5,650.00	86.52	314.70	5,192.83	-619.24	-402.66	-155.80	9.00	8.88	1.50
5,684.51	89.59	315.21	5,194.00	-594.88	-427.06	-121.31	9.00	8.88	1.49
Start 8295.11 hold at 5684.51 MD									
5,700.00	89.59	315.21	5,194.11	-583.89	-437.97	-105.82	0.00	0.00	0.00
5,800.00	89.59	315.21	5,194.84	-512.92	-508.42	-5.83	0.00	0.00	0.00
5,835.44	89.59	315.21	5,195.09	-487.77	-533.39	29.61	0.00	0.00	0.00
7"									
5,900.00	89.59	315.21	5,195.56	-441.95	-578.87	94.17	0.00	0.00	0.00
6,000.00	89.59	315.21	5,196.28	-370.98	-649.32	194.17	0.00	0.00	0.00
6,100.00	89.59	315.21	5,197.01	-300.02	-719.77	294.17	0.00	0.00	0.00
6,200.00	89.59	315.21	5,197.73	-229.05	-790.22	394.16	0.00	0.00	0.00
6,300.00	89.59	315.21	5,198.45	-158.08	-860.67	494.16	0.00	0.00	0.00
6,400.00	89.59	315.21	5,199.18	-87.11	-931.12	594.16	0.00	0.00	0.00
6,500.00	89.59	315.21	5,199.90	-16.15	-1,001.57	694.16	0.00	0.00	0.00
6,600.00	89.59	315.21	5,200.62	54.82	-1,072.02	794.15	0.00	0.00	0.00
6,700.00	89.59	315.21	5,201.35	125.79	-1,142.47	894.15	0.00	0.00	0.00
6,800.00	89.59	315.21	5,202.07	196.75	-1,212.92	994.15	0.00	0.00	0.00
6,900.00	89.59	315.21	5,202.79	267.72	-1,283.37	1,094.14	0.00	0.00	0.00
7,000.00	89.59	315.21	5,203.52	338.69	-1,353.81	1,194.14	0.00	0.00	0.00
7,100.00	89.59	315.21	5,204.24	409.66	-1,424.26	1,294.14	0.00	0.00	0.00
7,200.00	89.59	315.21	5,204.96	480.62	-1,494.71	1,394.14	0.00	0.00	0.00
7,300.00	89.59	315.21	5,205.69	551.59	-1,565.16	1,494.13	0.00	0.00	0.00
7,400.00	89.59	315.21	5,206.41	622.56	-1,635.61	1,594.13	0.00	0.00	0.00
7,500.00	89.59	315.21	5,207.13	693.53	-1,706.06	1,694.13	0.00	0.00	0.00
7,600.00	89.59	315.21	5,207.86	764.49	-1,776.51	1,794.13	0.00	0.00	0.00
7,700.00	89.59	315.21	5,208.58	835.46	-1,846.96	1,894.12	0.00	0.00	0.00
7,800.00	89.59	315.21	5,209.30	906.43	-1,917.41	1,994.12	0.00	0.00	0.00
7,900.00	89.59	315.21	5,210.03	977.40	-1,987.86	2,094.12	0.00	0.00	0.00
8,000.00	89.59	315.21	5,210.75	1,048.36	-2,058.31	2,194.12	0.00	0.00	0.00
8,100.00	89.59	315.21	5,211.47	1,119.33	-2,128.76	2,294.11	0.00	0.00	0.00
8,200.00	89.59	315.21	5,212.20	1,190.30	-2,199.21	2,394.11	0.00	0.00	0.00
8,300.00	89.59	315.21	5,212.92	1,261.27	-2,269.66	2,494.11	0.00	0.00	0.00
8,400.00	89.59	315.21	5,213.64	1,332.23	-2,340.11	2,594.11	0.00	0.00	0.00
8,500.00	89.59	315.21	5,214.37	1,403.20	-2,410.55	2,694.10	0.00	0.00	0.00
8,600.00	89.59	315.21	5,215.09	1,474.17	-2,481.00	2,794.10	0.00	0.00	0.00
8,700.00	89.59	315.21	5,215.81	1,545.13	-2,551.45	2,894.10	0.00	0.00	0.00
8,800.00	89.59	315.21	5,216.54	1,616.10	-2,621.90	2,994.10	0.00	0.00	0.00
8,900.00	89.59	315.21	5,217.26	1,687.07	-2,692.35	3,094.09	0.00	0.00	0.00
9,000.00	89.59	315.21	5,217.98	1,758.04	-2,762.80	3,194.09	0.00	0.00	0.00
9,100.00	89.59	315.21	5,218.70	1,829.00	-2,833.25	3,294.09	0.00	0.00	0.00
9,200.00	89.59	315.21	5,219.43	1,899.97	-2,903.70	3,394.08	0.00	0.00	0.00
9,300.00	89.59	315.21	5,220.15	1,970.94	-2,974.15	3,494.08	0.00	0.00	0.00
9,400.00	89.59	315.21	5,220.87	2,041.91	-3,044.60	3,594.08	0.00	0.00	0.00
9,500.00	89.59	315.21	5,221.60	2,112.87	-3,115.05	3,694.08	0.00	0.00	0.00
9,600.00	89.59	315.21	5,222.32	2,183.84	-3,185.50	3,794.07	0.00	0.00	0.00

Scientific Drilling Int.
Planning Report

Database:	Grand Junction District	Local Co-ordinate Reference	Well S Escavada UT 364H
Company:	WPX Energy	TVD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Project:	Sandoval County, NM 3003 West	MD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Site:	S Escavada UT 364 Pad	North Reference:	True
Well:	S Escavada UT 364H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
9,700.00	89.59	315.21	5,223.04	2,254.81	-3,255.95	3,894.07	0.00	0.00	0.00	
9,800.00	89.59	315.21	5,223.77	2,325.78	-3,326.40	3,994.07	0.00	0.00	0.00	
9,900.00	89.59	315.21	5,224.49	2,396.74	-3,396.85	4,094.07	0.00	0.00	0.00	
10,000.00	89.59	315.21	5,225.21	2,467.71	-3,467.29	4,194.06	0.00	0.00	0.00	
10,100.00	89.59	315.21	5,225.94	2,538.68	-3,537.74	4,294.06	0.00	0.00	0.00	
10,200.00	89.59	315.21	5,226.66	2,609.65	-3,608.19	4,394.06	0.00	0.00	0.00	
10,300.00	89.59	315.21	5,227.38	2,680.61	-3,678.64	4,494.06	0.00	0.00	0.00	
10,400.00	89.59	315.21	5,228.11	2,751.58	-3,749.09	4,594.05	0.00	0.00	0.00	
10,500.00	89.59	315.21	5,228.83	2,822.55	-3,819.54	4,694.05	0.00	0.00	0.00	
10,600.00	89.59	315.21	5,229.55	2,893.52	-3,889.99	4,794.05	0.00	0.00	0.00	
10,700.00	89.59	315.21	5,230.28	2,964.48	-3,960.44	4,894.05	0.00	0.00	0.00	
10,800.00	89.59	315.21	5,231.00	3,035.45	-4,030.89	4,994.04	0.00	0.00	0.00	
10,900.00	89.59	315.21	5,231.72	3,106.42	-4,101.34	5,094.04	0.00	0.00	0.00	
11,000.00	89.59	315.21	5,232.45	3,177.38	-4,171.79	5,194.04	0.00	0.00	0.00	
11,100.00	89.59	315.21	5,233.17	3,248.35	-4,242.24	5,294.04	0.00	0.00	0.00	
11,200.00	89.59	315.21	5,233.89	3,319.32	-4,312.69	5,394.03	0.00	0.00	0.00	
11,300.00	89.59	315.21	5,234.62	3,390.29	-4,383.14	5,494.03	0.00	0.00	0.00	
11,400.00	89.59	315.21	5,235.34	3,461.25	-4,453.59	5,594.03	0.00	0.00	0.00	
11,500.00	89.59	315.21	5,236.06	3,532.22	-4,524.03	5,694.02	0.00	0.00	0.00	
11,600.00	89.59	315.21	5,236.79	3,603.19	-4,594.48	5,794.02	0.00	0.00	0.00	
11,629.34	89.59	315.21	5,237.00	3,624.01	-4,615.15	5,823.36	0.00	0.00	0.00	
PS1										
11,700.00	89.59	315.21	5,237.51	3,674.16	-4,664.93	5,894.02	0.00	0.00	0.00	
11,800.00	89.59	315.21	5,238.23	3,745.12	-4,735.38	5,994.02	0.00	0.00	0.00	
11,900.00	89.59	315.21	5,238.96	3,816.09	-4,805.83	6,094.01	0.00	0.00	0.00	
12,000.00	89.59	315.21	5,239.68	3,887.06	-4,876.28	6,194.01	0.00	0.00	0.00	
12,100.00	89.59	315.21	5,240.40	3,958.03	-4,946.73	6,294.01	0.00	0.00	0.00	
12,200.00	89.59	315.21	5,241.13	4,028.99	-5,017.18	6,394.01	0.00	0.00	0.00	
12,300.00	89.59	315.21	5,241.85	4,099.96	-5,087.63	6,494.00	0.00	0.00	0.00	
12,400.00	89.59	315.21	5,242.57	4,170.93	-5,158.08	6,594.00	0.00	0.00	0.00	
12,500.00	89.59	315.21	5,243.30	4,241.90	-5,228.53	6,694.00	0.00	0.00	0.00	
12,600.00	89.59	315.21	5,244.02	4,312.86	-5,298.98	6,794.00	0.00	0.00	0.00	
12,700.00	89.59	315.21	5,244.74	4,383.83	-5,369.43	6,893.99	0.00	0.00	0.00	
12,800.00	89.59	315.21	5,245.47	4,454.80	-5,439.88	6,993.99	0.00	0.00	0.00	
12,900.00	89.59	315.21	5,246.19	4,525.76	-5,510.33	7,093.99	0.00	0.00	0.00	
13,000.00	89.59	315.21	5,246.91	4,596.73	-5,580.77	7,193.99	0.00	0.00	0.00	
13,100.00	89.59	315.21	5,247.64	4,667.70	-5,651.22	7,293.98	0.00	0.00	0.00	
13,200.00	89.59	315.21	5,248.36	4,738.67	-5,721.67	7,393.98	0.00	0.00	0.00	
13,300.00	89.59	315.21	5,249.08	4,809.63	-5,792.12	7,493.98	0.00	0.00	0.00	
13,400.00	89.59	315.21	5,249.81	4,880.60	-5,862.57	7,593.97	0.00	0.00	0.00	
13,500.00	89.59	315.21	5,250.53	4,951.57	-5,933.02	7,693.97	0.00	0.00	0.00	
13,600.00	89.59	315.21	5,251.25	5,022.54	-6,003.47	7,793.97	0.00	0.00	0.00	
13,700.00	89.59	315.21	5,251.98	5,093.50	-6,073.92	7,893.97	0.00	0.00	0.00	
13,800.00	89.59	315.21	5,252.70	5,164.47	-6,144.37	7,993.96	0.00	0.00	0.00	
13,900.00	89.59	315.21	5,253.42	5,235.44	-6,214.82	8,093.96	0.00	0.00	0.00	
13,979.62	89.59	315.21	5,254.00	5,291.94	-6,270.91	8,173.58	0.00	0.00	0.00	
TD at 13979.62										

Scientific Drilling Int.

Planning Report

Database:	Grand Junction District	Local Co-ordinate Reference	Well S Escavada UT 364H
Company:	WPX Energy	TVD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Project:	Sandoval County, NM 3003 West	MD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Site:	S Escavada UT 364 Pad	North Reference:	True
Well:	S Escavada UT 364H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Design Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
364H POE	0.00	0.00	5,194.00	-487.40	-533.39	1,863,825.85	603,219.24	36.121977	-107.483839
- plan misses target center by 1.12usft at 5835.69usft MD (5195.09 TVD, -487.59 N, -533.56 E)									
- Point									
364H BHL	0.00	0.00	5,254.00	5,291.94	-6,270.91	1,869,584.42	597,460.87	36.137852	-107.503270
- plan hits target center									
- Point									

Casing Points					
Measured Depth	Vertical Depth		Name	Casing Diameter	Hole Diameter
(usft)	(usft)			(")	(")
5,835.44	5,195.09	7"		7	8-3/4

Formations						
Measured Depth	Vertical Depth		Name	Lithology	Dip	Dip Direction
(usft)	(usft)				(°)	(°)
1,098.34	1,094.00		Ojo Alamo			
1,271.26	1,262.00		Kirtland			
1,681.11	1,658.00		Picture Cliffs			
1,830.15	1,802.00		Lewis			
2,096.14	2,059.00		Chacra			
3,220.13	3,145.00		Cliff House			
3,261.53	3,185.00		Menefee			
4,087.45	3,983.00		Point Lookout			
4,185.77	4,078.00		Mancos			
4,592.37	4,471.00		Gallup			
4,796.02	4,671.00		Gallup Upper			
5,147.35	4,980.00		Mancos Lwr			
5,174.84	5,000.00		El Vado			
5,299.47	5,080.00		Mancos Unc			
5,340.17	5,102.00		Frac Barrier			
5,494.88	5,165.00		PS 3			
5,608.65	5,189.00		PS2			
11,629.34	5,237.00		PS1			

Scientific Drilling Int.

Planning Report

Database:	Grand Junction District	Local Co-ordinate Reference	Well S Escavada UT 364H
Company:	WPX Energy	TVD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Project:	Sandoval County, NM 3003 West	MD Reference:	GL 7126 + KB 21 = @ 7147.00usft (Cyclone 32)
Site:	S Escavada UT 364 Pad	North Reference:	True
Well:	S Escavada UT 364H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Plan #1		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
500.00	500.00	0.00	0.00	Start Build 2.00
1,246.98	1,238.55	-96.32	9.98	Start 3313.42 hold at 1246.98 MD
4,560.40	4,439.96	-945.97	98.06	Start DLS 9.00 TFO 140.23
4,560.40	4,439.96	-945.97	98.06	KOP
5,684.51	5,194.00	-594.88	-427.06	Start 8295.11 hold at 5684.51 MD
13,979.62	5,254.00	5,291.94	-6,270.91	TD at 13979.62

4.6 Construction Material

Construction material would consist of native material at the site locations. All features would be built with a balanced cut and fill, such that all material would be native. Topsoil would be stripped and placed as a berm along the outer edge of the pad or as a windrow along the edge of the access and/or well-connect pipeline corridor. Topsoil would be stored separately and protected for use during interim reclamation. Subsoil horizons from cuts would be used as fill material to establish a level working surface, and to construct earthen berms where necessary.

Sandstone would be used as surfacing material along the road if natural occurring binding material is not present in sufficient amounts within the existing soil and subsoil. If sandstone is needed for surfacing, the sandstone would be retrieved from a permitted location.

WPX would likely need to permit the expansion of existing rock quarry pits in the area to provide surfacing materials for construction. If a new rock quarry pit is needed and identified, WPX would pursue permitting as a separate action.

Construction and maintenance activities would cease if soil or road surfaces become saturated to the extent that construction equipment is unable to stay within the project area and/or when activities cause irreparable harm to roads, soils, or streams.

4.7 Waste

4.7.1 Cuttings


Drilling operations would utilize a closed-loop system. Drilling of the horizontal laterals would be accomplished with water-based mud. All cuttings would be placed in roll-off bins and hauled to a commercial disposal facility or land farm. WPX would follow Onshore Oil and Gas Order No. 1 regarding the placement, operation, and removal of closed-loop systems. No blow pit would be used. Closed-loop tanks would be adequately sized for containment of all fluids.


4.7.2 Drilling Fluids

Drilling fluids would be stored onsite in above-ground storage tanks. Upon termination of drilling operations, the drilling fluids would be recycled and transferred to other permitted closed-loop systems or returned to the vendor for reuse, as practical. All residual fluids would be hauled to a commercial disposal facility.

4.7.3 Spills

Upon discovery of a spill of oil, gas, or any other potentially hazardous substance, actions would be implemented to stop the release source and secure the site, unless the action could result in a threat to personal or public safety. Spill notifications would be made according to applicable federal and state regulations. Appropriate measures for cleanup would be implemented, and the spill remediated in accordance with applicable federal and state regulations.

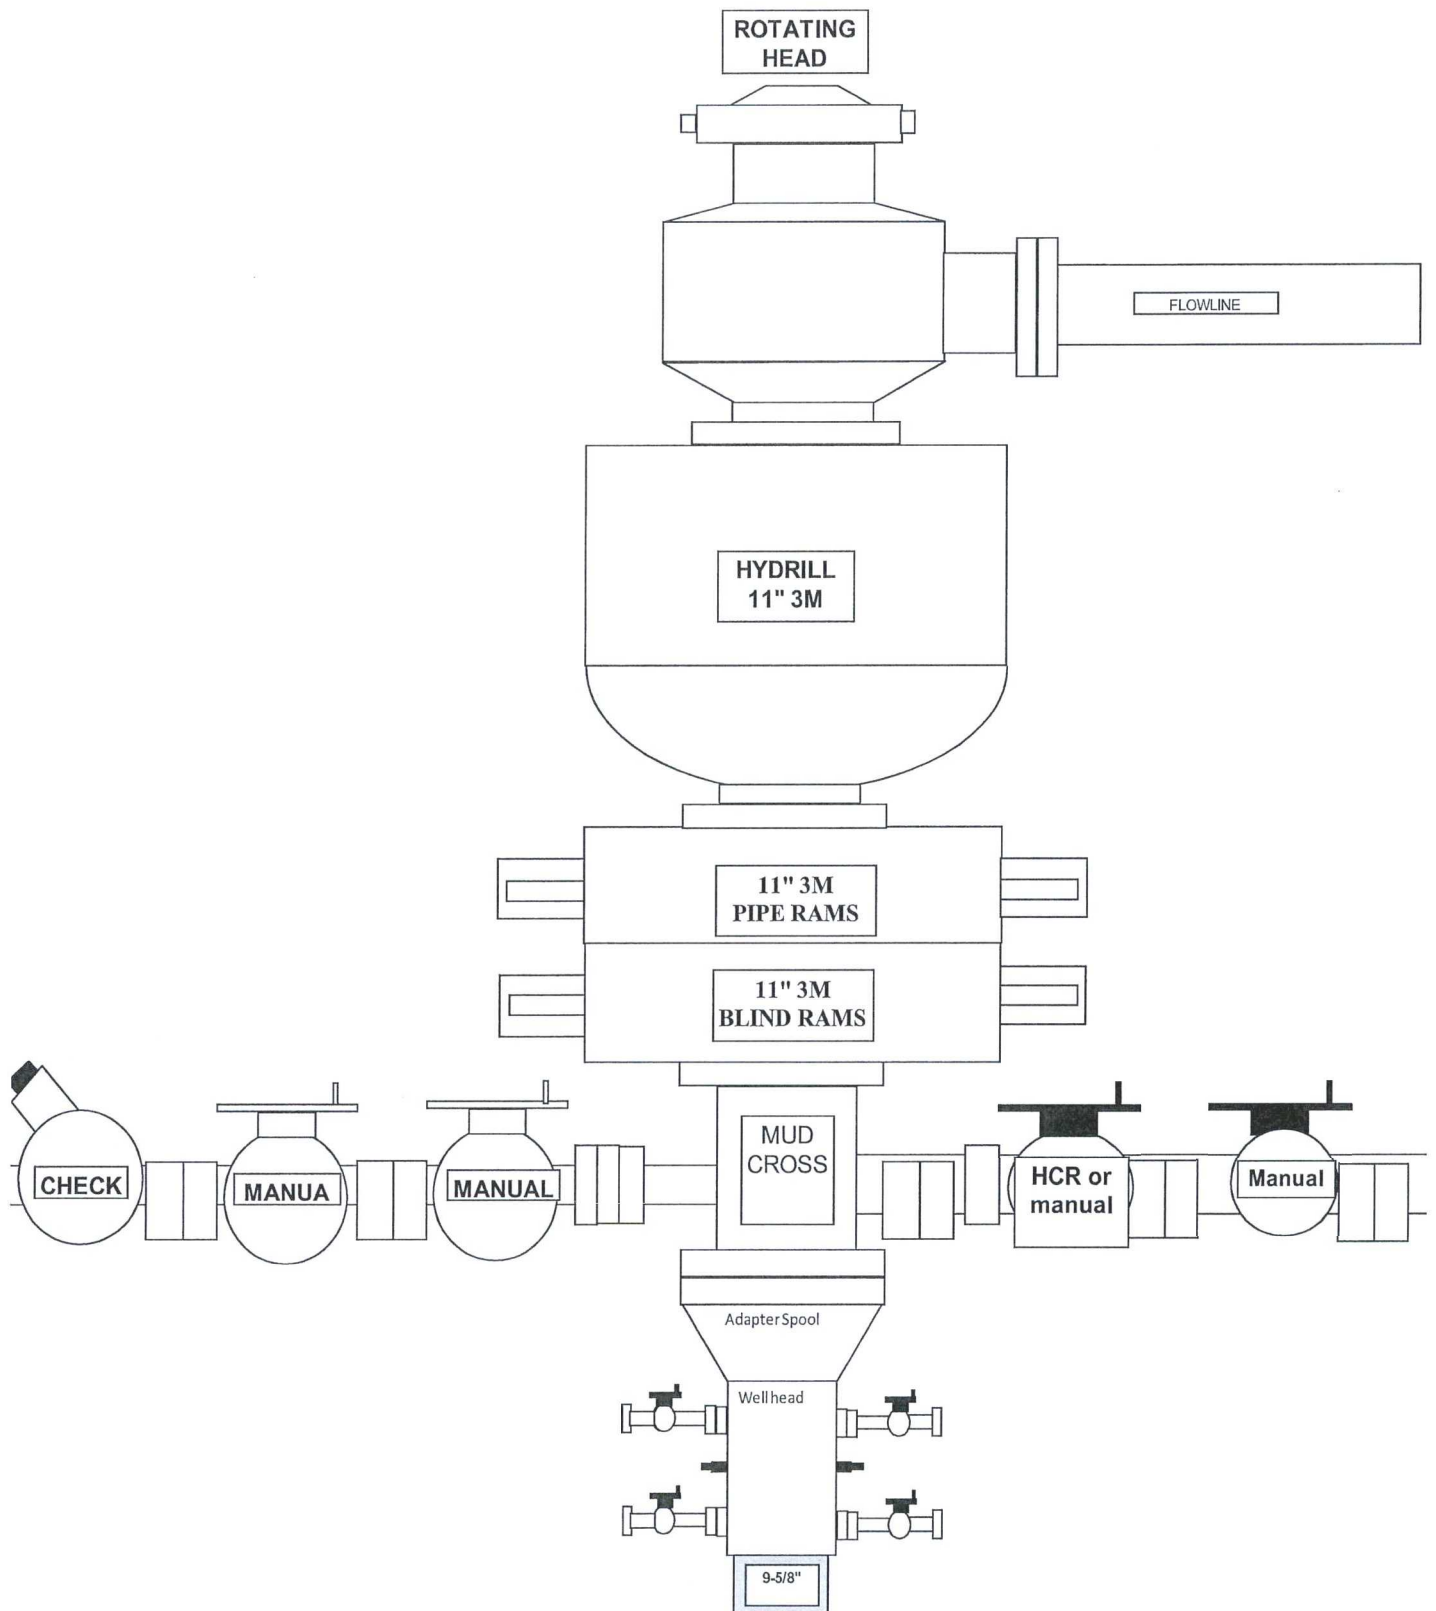

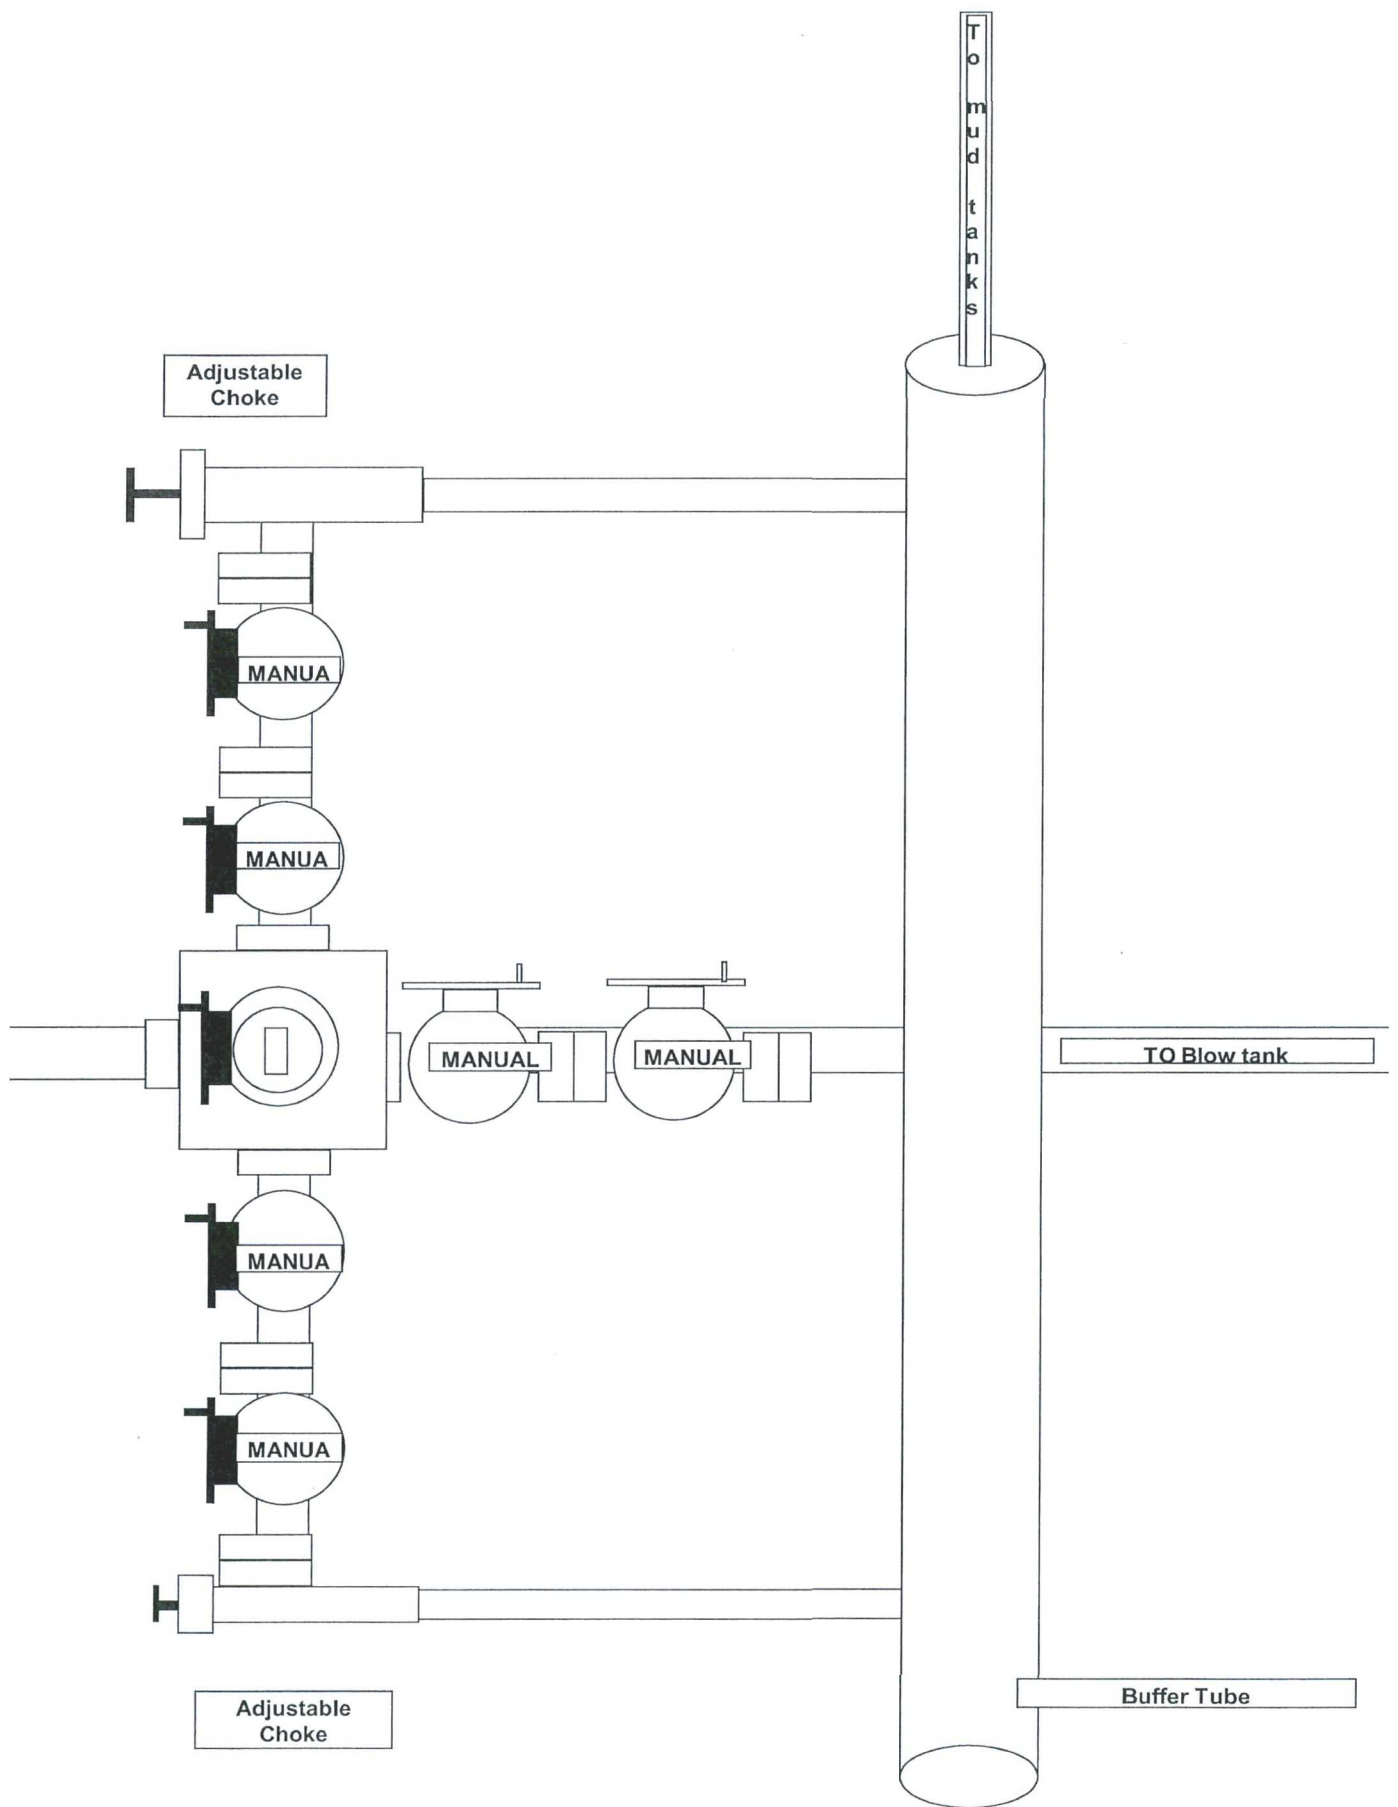

Directions from the Intersection of US Hwy 550 & US Hwy 64

in Bloomfield, NM to WPX Energy Production, LLC S Escavada Unit #364H

2516' FSL & 145' FWL, Section 21, T22N, R6W, N.M.P.M., Sandoval County, NM

Latitude: 36.123331°N Longitude: 107.482638°W Datum: NAD1983

From the intersection of US Hwy 550 & US Hwy 64 in Bloomfield, NM, travel Southerly on US Hwy 550 for 53.6 miles to Mile Marker 97.7;

Go Right (Southerly) on Indian Service Route #46 for 3.6 miles to fork in roadway;

Go Right (Southerly) which is straight continuing on Indian Service Route #46 for 1.0 miles to fork in roadway;

Go Left (Southerly) continuing on Indian Service Route #46 for 0.2 miles to fork in roadway;

Go Right (Southerly) which is straight continuing on Indian Service Route #46 for 2.6 miles to new access on right-hand side of roadway which continues for 155.4' to staked WPX S Escavada Unit #364H location.