

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED

Budget Bureau No.1004-035

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen
or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT" For such proposals

Lease Designation and Ser. No

JAT 129

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

Jicarilla Apache Tribe

8. Well Name and No.

Apache #12

9. API Well No.

30 03920707

10. Field and Pool, or Exploratory Area

S.BLANCO P.C.

11. County or Parish, State

Rio Arriba N.M.

SUBMIT IN TRIPLICATE

1. Type of Well:

☒ Oil Well Gas Well Other

2. Name of Operator

Apache Corporation

3. Address and Telephone No.

2855 Southside River Road Suite A, Farmington, NM 87401 505-325-0318

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

790 FNL & 1850 FWL NE NW Sec 13 T24N R4W

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
☐ Notice of Intent	☒ Abandonment
☒ Subsequent Report	Recompletion
Final Abandonment Notice	Plugging Back
	Casing Repair
	Altering Casing
	Other _____
	Change of Plans
	New Construction
	Non-Routine Fracturing
	Water Shut-Off
	Conversion to Injection
	Dispose Water

(Note: Report results of multiple completions on Well Completion or Recompletion Report and LogForm.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Apache Corporation plugged and abandoned the wellbore according to the attached Wellbore Diagram and P&A Report.

The location will be remediated per BLM specifications.

14. I Certify that the foregoing is true and correct.

Signed Jeff Cron Title Senior Pumper

Date 7/17/03

(This space for Federal or State office use)

Approved by /s/ David R. Sitzler Title Division of Multi-Resources Date AUG 13 2003


Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly to make to any department or agency to the United States any false, fictitious or

Fraudulent statements or representations as to any matter within its jurisdiction.

Apache Corporation
 JAT 129 #12-13
 NENW SEC13 T24N R4W
 RIO ARriba CO. N.M.
 API # 3003920707

P&A WELLBORE DIAGRAM
 ALL CEMENT - CLASS B 15.6 #/gal
 SPACER FLUID - WATER.

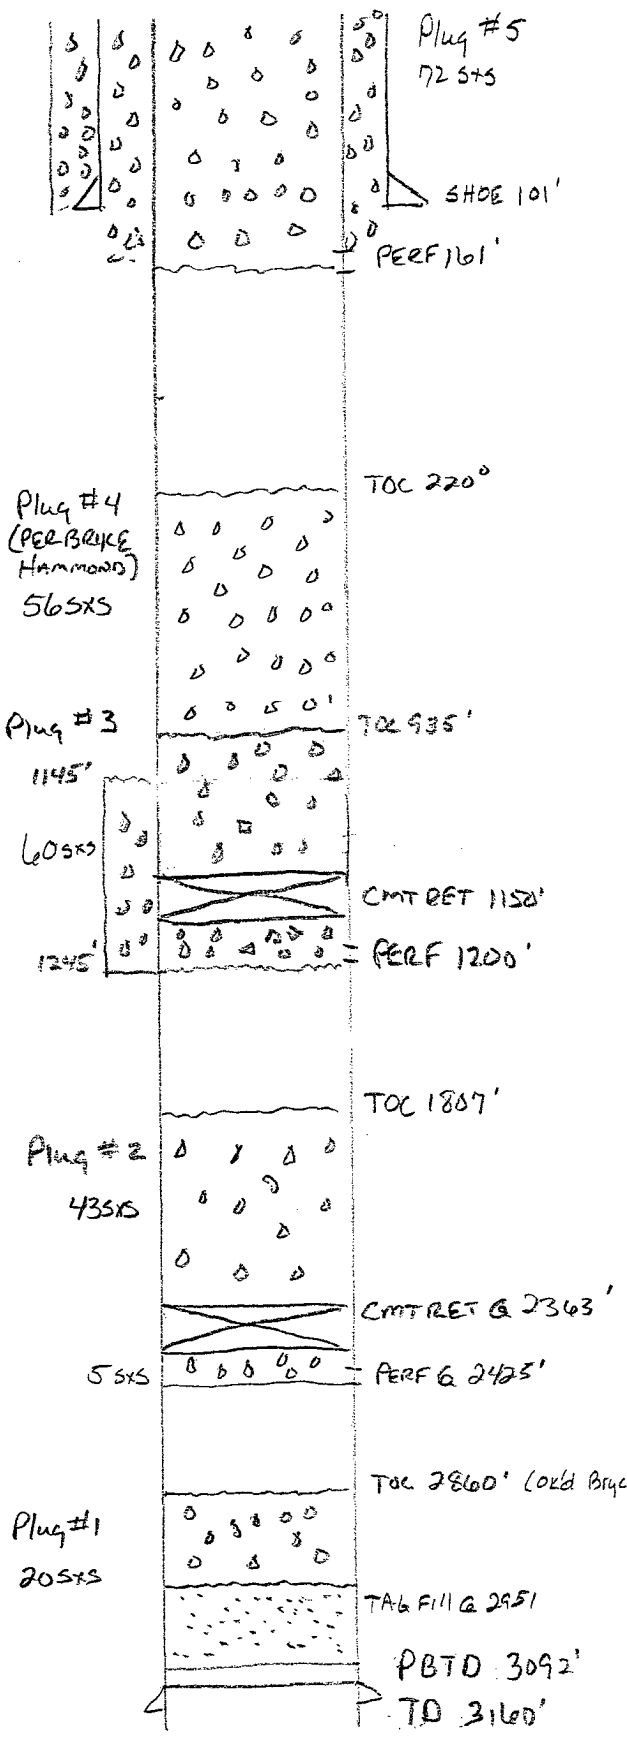

7-11-03 MIRUSU - A-Plus well service
 TOH w/1 1/2" TBG. FL @ 640'
 7-14-03 TALLY IN w/2 3/8" WORK STRING, TAG FILL @ 2951'
 Pump Plug #1 FROM 2860' TO 2951', ATTEMPT TO PRESS TEST
 CSG. 1 1/2 BPM @ 200 PSI -, TAG 1st plug @ 2860'
 (OK'd By Bryce Hammond J. & TRIBAL Imp.)
 PERF CSG @ 2425', SET CMT RET @ 2363'
 ATTEMPT TO PRESS TEST CSG 1 1/2 BPM @ 200 PSI
 START PUMPING Plug #2 - TBG PRESS UP TO 1500 PSI
 Pump 5 SXS UNDER CMT RET, 43 SXS ABOVE CMT RET
 FROM 1807' TO 2363'
 PERF CSG @ 1200', SET CMT RET @ 1150'
 Pump Plug #3, 44 SXS below Ret (39 outside, 5 UNDER
 CMT RET) 16 SXS ABOVE CMT RET f/935' TO 1150'
 7-15-03 ATTEMPT TO PRESSURE TEST CSG - 1 1/2 BPM @ 200 PSI
 TAG TOC @ 935'
 Pump 4th Plug (PER Bryce Hammond) 56 SXS cement
 f/220' TO 935' - PRESS TEST CSG 200 # (held)
 TAG TOC @ 220', PERF CSG @ 161'.
 ESTABLISHES CIRC OUT BRADEN HEAD
 Pump Plug #5 72 SXS cement f/161' TO
 SURFACE INSIDE 4 1/2 and 8 5/8 CSG'S.
 Circ. CMT TO SURFACE, CUT OFF WELL HEAD
 INSTALL DRY HOLE MARKER.
 TOTAL APPROX CMT 256 SXS.

FORMATION TOPS

NACIEMTO	1150'
QJO ALAMO	2376'
PICTURED CLIFFS	3000'

8

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-035

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen
or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT" For such proposals

Lease Designation and Ser. No.

JAT 127

6. If Indian, Allottee or Tribe Name

Jicarilla Apache Tribe

7. If Unit or CA, Agreement Designation

SUBMIT IN TRIPLICATE

1. Type of Well:

XX Oil Well Gas Well Other

2. Name of Operator

Apache Corporation

3. Address and Telephone No.

2855 Southside River Road Suite A, Farmington, NM 87401 505-325-0318

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980 FSL & 1890 FWL NE SW Sec 4 T24N R4W

8. Well Name and No.

Apache 132

9. API Well No.

30 03922216

10. Field and Pool, or Exploratory Area

W. Lindrith Gal / Dak

11. County or Parish, State

Rio Arriba NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION	
☐ Notice of Intent	☒ Abandonment	Change of Plans
☒ Subsequent Report	Recompletion	New Construction
	Plugging Back	Non-Routine Fracturing
	Casing Repair	Water Shut-Off
	Altering Casing	Conversion to Injection
	Other _____	Dispose Water

(Note: Report results of multiple completions on Well Completion or Recompletion Report and LogForm.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Apache Corporation plugged and abandoned the wellbore according to the attached Wellbore Diagram and P&A Report.

The location will be remediated per BLM specifications.

7-11-03

14. I Certify that the foregoing is true and correct.

Signed Jeff Woods Title Senior Pumper

Date 7-17-03

(This space for Federal or State Approval)
Approved by David R. Sitzler

Title Division of Multi-Resources

Date AUG 13 2003

Conditions of approval, if any:


Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly to make to any department or agency to the United States any false, fictitious or

Fraudulent statements or representations as to any matter within its jurisdiction.

Apache Corporation
 JAT 127 #132-4
 NESW SEC 4 T24N R4W
 Rio Arriba Co. N.M.
 API 3003922216

P&A'd Wellbore Diagram

All cement - Class B 15.4 #/gal
 Spacer Fluid - WATER.

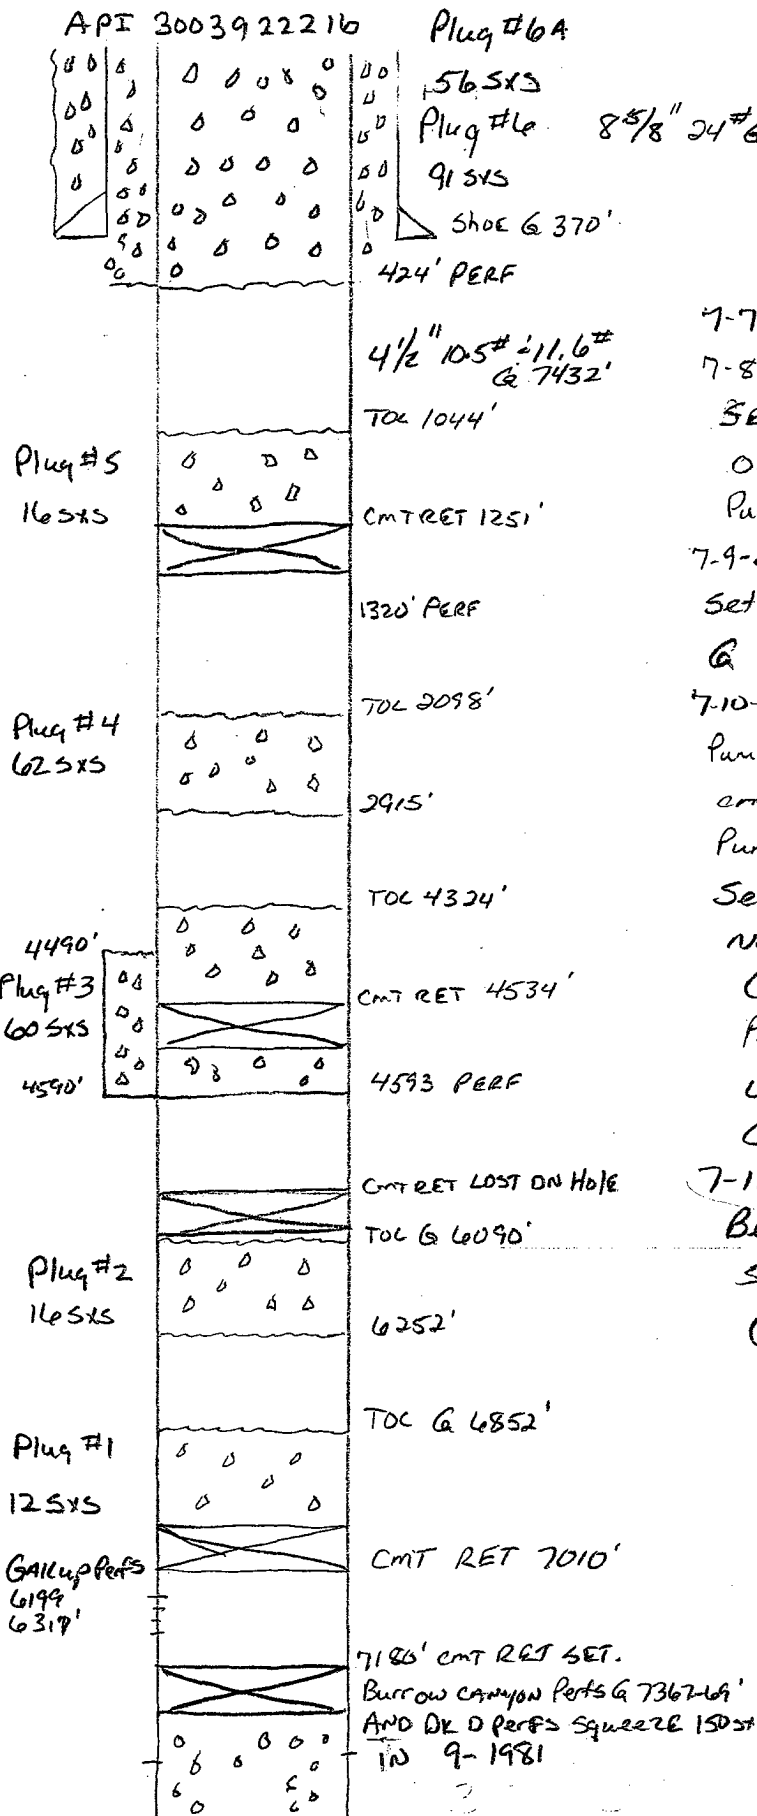

- 7-7-2003 MIRUSH A-PLUS WELL SERVICE.
- 7-8-2003 (TERRANCE MUNIZ J.C. TRIBAL INSP. on location)
 SET CMT RET @ 7010' Press Test csq 500psi
 OK'd By Terrance Muniz.
 Pump Plug #1 From 6852' TO 7010', Pump Plug #2 A/ 6090 TO 6252'
- 7-9-2003 TAB plug #2 @ 6090', PERF csq @ 4593', ATTEMPT TO
 SET CMT RET @ 4535' (LOST RET DOWN CSQ), SET NEW CMT RET
 @ 4534'
- 7-10-2003 Pump DNTB6 INTO Perfs EST. RATE 1/2 BPM @ 1300psi
 Pump Plug #3 44 SXs UNDER CMT RET (39 outside csq, 5 UNDER
 CMT RET) 116 SXs ABOVE CMT RET, A/ PERF @ 4593 TO TOL @ 4324'
 Pump plug #4 from 2098' TO 2915', PERF csq @ 1320'
 Set CMT RET @ 1251', TRY TO pump INTO Perfs, would
 NOT TAKE FLUID Pump Plug #5 from 1044' TO 1251'
 (PER BRICE HAMMOND J.C. TRIBAL INSP.)
 PERF csq. @ 424', Pump Plug #6 91 SXs, csq LOCKED
 UP, ATTEMPT TO pump DW. B.H. would NOT TAKE FLUID.
 Calculated TOL 143' SI WELL
- 7-11-2003 CUT OFF WELL HEAD, STING IN 1" PIPE
 BETWEEN 4 1/2 csq AND 8 5/8 csq. Pump Plug #6A
 56 SXs TO SURFACE, FILL VOIDS, INSTALL DRYHOLE MARKER.
 (OK'd By Terrance Muniz J.C. TRIBAL INSP.)
 TOTAL CMT APPROX 313 SXs.

Tops

Nacimiento	1268'
Ojo Alamo	2223'
Pictured Cliffs	2865'
Cliff House	4535'
Gallup	6193'
Dakota	7017'