

DIST. 3

Form 3160-5
(February 2005)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on page 2.

1. Type of Well

☐ Oil Well ☐ Gas Well ☒ Other Water Source Well

2. Name of Operator
Pride Energy Company

3a. Address
PO Box 701950
Tulsa, OK 74170-1950

3b. Phone No. (include area code)
(918) 524-9200

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
660' FNL & 660' FWL
Unit D, Sec. 14-20N-3W

5. Lease, Serial No.
NM 36039

6. If Indian, Allottee or Tribe Name

7. Unit of CA/Agreement, Name and/or No.

8. Well Name and No.
San Isidro No. 14-4

9. API Well No.
300-43-20701

10. Field and Pool or Exploratory Area
Rio Puerco

11. Country or Parish, State
Sandoval Co., NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input checked="" type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

8/19/02: Set CIBP @ 2626 ft. Spotted 35' cmt over CIBP. Ran mechanical integrity test - OK
11/22/05: Set CIBP @ 1000 ft. Spotted 20' cmt over CIBP. Tested to 1000# - OK.
11/22/05: Perforated Fruitland @ 827'-30' & 835'-48'
12/27/05: Acidized Fruitland w/ 1000 gal. Foam Frac'd w/ 78,000 # 20/40 sd.
1/05/06: Ran pump & rods. Put on pump to test.

NOTE: AFTER TESTING, WELL PRODUCES ONLY WATER W/ TRACE OF GAS. SHUT-IN UNTIL THE WELL CAN BE USED AS A WATER SOURCE WELL FOR A PLANNED GALLUP WATERFLOOD.

All CIBP's must be capped w 35' cmt for Pd A status.

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)

Larry Miller

Title Engineer

Signature

Date 03/28/2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

ACCEPTED FOR RECORD

Approved by

Title

APR 17 2007

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

FARMINGTON FIELD OFFICE

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

NMOCD

Proposed Completion

KB: 6861.0'

DF: 6860.0'

GL: 6848.0'

Datum: 13.0' above GL

9 3/4" TOC @ ??'

7" dv TOC @ ??'

9 3/4" 36#, J-55, STC @ 181'
w/ 200 sx in 13 1/2" hole

Fruitland perms: 827'-30', 35'-48',
4 spf, 64 holes

CIBP @ 1100' CAPPED
WITH 20' CMT

7" DV tool @ 1193' w/ 225 sx

7" shoe TOC above 2231'

Menefee perms: 2726'-34', 46'-50'

CIBP @ 2769'

Lower Menefee perms: 2896'-2900'

CIBP @ 3002'

4 1/2" TOL @ 3420' w/ PBR

4 1/2" TOC @ 3420"

7" 23# J-55 STC @ 3699'
w/ 430 sx out shoe in 8 3/4" hole


Gallup "C" perms 4118-32', 4 spf, 58 holes

PBTD = 4210'

CIBP @ 4236' w/ 14' cmt on top

4 1/2" 10.5# J-55 @ 4300'
w/ 110 sx in 6 1/4" hole

San Isidro 14-4

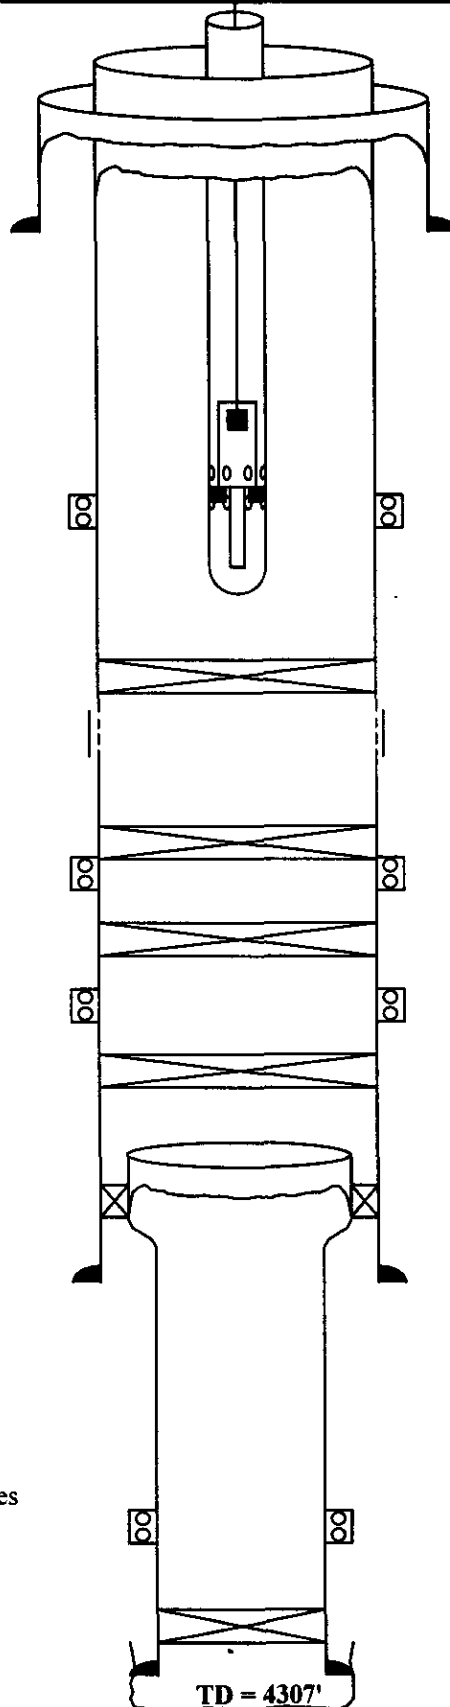

Steve Gillett 11/18/05

API # 30-043-20701

660' FNL & 660' FWL

Unit D, Sec 14-20N-3W

Sandoval Co., NM

Field: Rio Puerco

BLM LS # 36936

CIBP @ 2626' CAPPED
WITH 35' CMT

7" x 4 1/2" Mountain States mech
set liner hanger w/ pkr and 10' x
4" PBR aboe hanger.

fill @ 4206'