

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY


SUBMIT IN TRIPLICATE\*  
(Other instructions on reverse side)

Form approved.  
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. NM 26655	
2. NAME OF OPERATOR Rijan Oil Company, Inc.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME N/A	
3. ADDRESS OF OPERATOR 20 First Plaza, Suite 402, Albuquerque, NM 87102		7. UNIT AGREEMENT NAME N/A	
4. LOCATION OF WELL (Report location clearly and in accordance with applicable requirements. See also space 17 below.) At surface 760' fwl, 1650' fsl		8. FARM OR LEASE NAME PLR, Inc.	
14. PERMIT NO.		9. WELL NO. 1	
15. ELEVATIONS (Show whether DF, RT, SA, etc.) 6764' GR, 6768' KB		10. FIELD AND POOL, OR WILDCAT Media Gallup	
		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 23, T19N, R3W, NMPM	
		12. COUNTY OR PARISH Sandoval	
		13. STATE New Mexico	

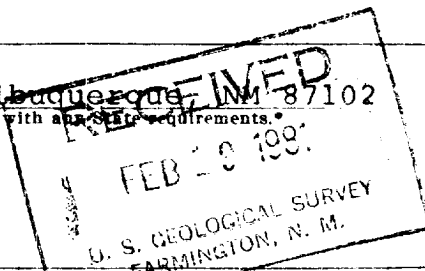

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
(Other) ☐

PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
ABANDON\* ☐  
CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐  
FRACTURE TREATMENT ☐  
SHOOTING OR ACIDIZING ☐  
(Other) ☐

REPAIRING WELL ☐  
ALTERING CASING ☐  
ABANDONMENT\* ☒

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

On December 19, 1980 set 20 sx, cement plug from 1680'-1583'. Set 15 sx. cement plug from 100' to surface. All plugs were inside of 5½" casing. Installed dry hole marker and cleaned up location.



18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Petroleum Engineer

DATE Feb. 12, 1981

(This space for Federal use only)

APPROVED

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL AND: 1981

JAMES F. SIMS  
DISTRICT ENGINEER

See Instructions on Reverse Side

NMOCC