

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐

2. NAME OF OPERATOR
J. Gregory Merrion & Robert L. Bayless

3. ADDRESS OF OPERATOR
P.O. Box 1541, Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1650 FEL & 990 FSL
AT TOP PROD. INTERVAL: same
AT TOTAL DEPTH: same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE
Contract 428

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Jicarilla

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Jicarilla 428

9. WELL NO.
9

10. FIELD OR WILDCAT NAME
Ballard Pictured Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 30, T23N, R4W

12. COUNTY OR PARISH
Sandoval

13. STATE
NM


14. API NO.
30-043-20290

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6873' GL

REQUEST FOR APPROVAL TO:
TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) Swab Testing

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐
☒

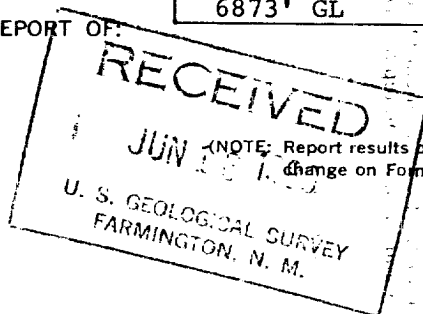

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

See attached chronological well history.

ACCEPTED FOR RECORD

JUN 26 1980

FARMINGTON DISTRICT

BY ELB


Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Operator DATE June 13, 1980

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:



JICARILLA 428-9
Well History

- 12-01-78 - Found TD @ 2190, fluid level @ 1000'. Swabbed down to 250'. Fluid in hole. Had some sand in hole; got stuck two times and worked loose. Had good blow after pulling swab for a few minutes. (Swabbed 36 bbls. fluid.)
- 12-02-78 - Had 700' fluid in hole. Swabbed down to 250'; would blow a little after pulling swab. Make 4 runs per hr. (30 bbls. fluid)
- 12-04-78 - Had 700 ft. fluid in hole. Swabbed down to 250 ft., 5 runs, 5 bbls. fluid; blow about same. Moved to 430-1Y.
- 04-29-80 - Ran sinker bar. Found fill at 2152'. Fluid level at 1200'. Swabbed 8 runs. Brought back 8 bbls fluid. Swab cup showing sand. Rig down. (JCA)
- 05-01-80 - Run 1" siphon string. Cleaned out w/ pump truck to 2200'. Lost circulation. Lay down string and rig up to swab. (JCA)
- 05-02-80 - Swabbed 30 runs. Cup sanded up. 100' of fluid. Checked depth of fill @ 2160'. Shut in. (JCA)
- 05-03-80 - Ran 1" string to clean out. Plug at 2160'. Good circulation. No sand in returns. (JCA)
- 05-05-80 - Trip tubing for sawtooth collar. Clean hole to 2230'. Trip tubing. RUTS. (JCA)
- 05-06-80 - Swab 25 runs. Making 100' of fluid every 45 min. Slight show of gas. Tight spot in casing @ 2160'. Run sinker bar. Found fill @ 2178. Shut in & released rig. (JCA)

