

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other

2. NAME OF OPERATOR  
Merrion Oil & Gas Corporation

3. ADDRESS OF OPERATOR  
P. O. Box 1017, Farmington, New Mexico 87499

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 990' FNL and 990' FEL

AT TOP PROD. INTERVAL: Same

AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☒  
(other) \_\_\_\_\_

☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐

RECEIVED

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Propose to P & A for lack of commercial quantities of natural gas as follows:

1. Fill casing with 63 sx Class B (75 Cu. ft.) from TD to surface.
  2. Tie onto Bradenhead, place 10 sx cement from 115' to surface (12 cu. ft.).
  3. Cut off wellhead and install dry hole marker.
  4. Reclaim surface per specifications.
- No casing will be recovered.

RECEIVED

AUG 24 1984

OIL CON. DIV.  
DIST. 3

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Operations Manager DATE 8/13/84

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

TITLE \_\_\_\_\_ DATE


APPROVED  
AS AMENDED

AUG 23 1984  
/s/ J. Stan McKee

ASST. M. MILLENBACH  
AREA MANAGER

\*See Instructions on Reverse Side

JIC. 429-3  
WELL BORE SCHEMATIC

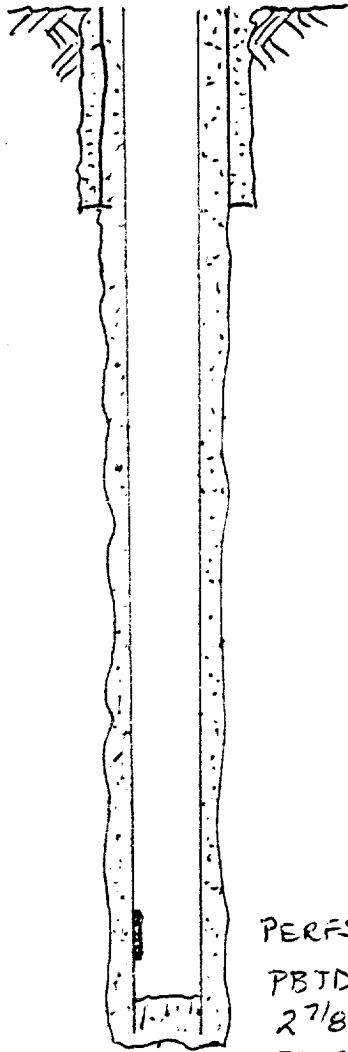

7" 23 lb/FT @ 65 FT w/ 40 SX CIRC. TO SURFACE.

PERFS 2274'-86'

PBTD @ 230' 5-55

2 7/8" 6.4 lb/FT @ 2397' w/ 225 SX

TDC @ 2415' w/ 5 1/8" OPEN HOLE.

TOP OF CEMENT CALCULATED @ SURFACE w/ 5 1/4" HOLE.