District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr.

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

1402	102	
------	-----	--

Proposed Alternative Method Permit or Closure Plan Application

Santa Fe, NM 87505

Proposed Alternative Method Permit or Closure Plan Application
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Existing BGT Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
lease be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the nvironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator: OGRID #: Address: 382 Road 3100 Aztec, NM 87410 Facility or well name: GT + TFF G + S = G = A = A = A = A = A = A = A = A = A
Facility or well name: STATE GAS COM N #3
API Number:
U/L or Qtr/Qtr Section16 Township 31NRange 12W County: San Juan Center of Proposed Design: Latitude
2. Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Emergency Cavitation P&A Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other String-Reinforced Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
3. Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of
intent) Drying Pad
XBelow-grade tank: Subsection I of 19.15.17.11 NMAC Yolume:
5. Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6.	
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)	hospital,
Four foot height, four strands of barbed wire evenly spaced between one and four feet	
Alternate. Please specify	
7.	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)	
Wonding inspections (if netting of screening is not physically leasible)	
Signs: Subsection C of 19.15.17.11 NMAC	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
☑ Signed in compliance with 19.15.3.103 NMAC	
9. Administrative Appropriate and Everytions.	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau of the Santa Fe En	office for
consideration of approval.	
Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
10. Siting Criteria (regarding permitting): 19.15.17.10 NMAC	
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accep	otable source
material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appro office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a	priate district pproval
Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dryi	ing pads or
above-grade tanks associated with a closed-loop system.	
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ⊠ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	☐ Yes ⊠ No
- Topographic map; Visual inspection (certification) of the proposed site	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☑ No ☐ NA
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits)	Yes No
Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ⊠ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	103 🔄 110
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	☐ Yes ⊠ No
adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality; Written approval obtained from the municipality	
Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ⊠ No
Within an unstable area Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☒ No
Within a 100-year floodplain.	☐ Yes ☑ No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15 17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Factors Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Factors Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Factors Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Monitoring and Inspection Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Erosion Control Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fc Environmental Bureau for consideration)
Usate Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or H Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and facilities are required.	aul-off Bins Only: (19.15.17.13.L drill cuttings. Use attachment if r	O NMAC) nore than two
	Permit Number:	
	Permit Number:	
Will any of the proposed closed-loop system operations and associated activities occur on or in areas Yes (If yes, please provide the information below) No		
Required for impacted areas which will not be used for future service and operations Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Service Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 No. Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.	IMAC	C
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Rec provided below. Requests regarding changes to certain siting criteria may require administrative a considered an exception which must be submitted to the Santa Fe Environmental Bureau office fo demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	pproval from the appropriate distr	rict office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from ne	earby wells	☐ Yes ☐ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from ne	earby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from ne	earby wells	☐ Yes ☐ No ☐ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercour lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	se or lakebed, sinkhole, or playa	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	e time of initial application.	☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five househ watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the	at the time of initial application.	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from t	,	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certi	fication) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Divi	sion	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resormance Society; Topographic map	urces; USGS; NM Geological	Yes No
Within a 100-year floodplain FEMA map		☐ Yes ☐ No
Soli Cover Design - based upon the appropriate requirements of Subsection F of I Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in Soil Cover Design - based upon the appropriate requirements of Subsection F of I Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in Site Reclamation Plan - based upon the appropriate requirements of Subsection F of I Site Reclamation Plan - based upon the appropriate requirements of Subsection F of I Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 Name Site Reclamation Pla	5.17.10 NMAC 9.15.17.13 NMAC nents of 19.15.17.11 NMAC he appropriate requirements of 19. ection F of 19.15.17.13 NMAC 9.15.17.13 NMAC case on-site closure standards cannot NMAC NMAC	15.17.11 NMAC

19.		
Operator Application Certification: I hereby certify that the information submitted with this application is true, ac	aurate and complete to	the best of any leaves lades and belief
Name (Print): Kim Champlin		Environmental Representative
Signature: Kim (namplin		
e-mail address: kim_champlin@xtoenergy.com		(505) 333-3100
20.		
OCD Approval: Permit Application (including closure plan) Closure	e Plan (only) 🔲 OCI	O Conditions (see attachment)
1		Approval Date:
Title: Ensivo/spec	OCD Permit Num	nber:
Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan price. The closure report is required to be submitted to the division within 60 days a section of the form until an approved closure plan has been obtained and the	or to implementing any of the completion of the e closure activities have	closure activities and submitting the closure report. e closure activities. Please do not complete this e been completed.
	☐ Closure Con	pletion Date:
22. Closure Method: Waste Excavation and Removal On-Site Closure Method Alte	ernative Closure Method	d ☐ Waste Removal (Closed-loop systems only)
23. Closure Report Regarding Waste Removal Closure For Closed-loop Syste Instructions: Please indentify the facility or facilities for where the liquids, a two facilities were utilized. Disposal Facility Name:	drilling fluids and drill	e Ground Steel Tanks or Haul-off Bins Only: cuttings were disposed. Use attachment if more than Permit Number:
		Permit Number:
Disposal Facility Name:		
Were the closed-loop system operations and associated activities performed or Yes (If yes, please demonstrate compliance to the items below) No		to be used for future service and operations:
Required for impacted areas which will not be used for future service and open Site Reclamation (Photo Documentation)	rations	
Soil Backfilling and Cover Installation		
Re-vegetation Application Rates and Seeding Technique		
24. Closure Report Attachment Checklist: Instructions: Each of the following mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)	re)	
On-site Closure Location: Latitude Lor	ngitude	NAD: □1927 □ 1983
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closu belief. I also certify that the closure complies with all applicable closure requi	rements and conditions	specified in the approved closure plan.
Name (Print):	Title:	
Signature:	Date:	
	Talanhana	

DISTRICT 1 1825 N. Prenchi Dr., Hobbs, N.M. 88240)

DISTRICT D. 1301 W. Grand Ave., Artenia, N.M. 88210

DISTRUCT III 1000 Rio Brazos Rd., Autec, N.M. 67410

State of New Mexico Ruergy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 67505

Form C-102 Revised June 10, 2003 Submit to Appropriate District Office State Lease - 4 Copies

ESTIGET IV 220 South St. P	rancis Dr.	Santa Fe. N	M 187506		Janua Per, 1	,,			NDED REPO
				COCATIO	N AND AC	CREAGE DED	ICATION P		MADED REFU
'API	Number			Pool Code			Pool Non		and the second s
*Property C	ode	***************************************		***************************************	Property				Yell Number
OGRID No) <u>.</u>			THE RESERVE OF THE PERSON OF T	STATE GAS:				3
					XTO ENERG				*Klevation
		· · · · · · · · · · · · · · · · · · ·	***************************************	***************************************	¹⁰ Surface		······································		6155.
L or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Peet from the	Bast/West line	County
D'	16	31-N	12-W		720	NORTH	1190	WEST	SAN JUAN
L or lot no.	Section			om Hole		lf Different Fr			······································
is or torato.	Section	Township	Range	lot ida	Peet from the	North/South line	Frot from the	Post/Vest line	County
Dedicated Acre	i 3	, I setting	to Joint or	ln/til	14 Consolidation	Code	¹⁸ Order No.	***************************************	
				,					
	TI	S 87-3	7-19 E	FD. 3	1/4" BC.	ON UNTIL ALL EEN APPROVED	BY THE DIV	TSION	- Control of the Cont
1190'	720	2638.7	(M)	B.L.M.	1952		I haretu certii	PERATOR CE by that the invermental lets to the best of may	reminded bases to
(M)		FD. 3 1, B.L.M. 19				\			
2603.6' (M)		LAT. 36 LONG.	'54'16"N 108'06'20	, (NAD 5.	7) 27)		Signature Printed No.	mo	
. 3 1/4" E M. 1952	3C.			16			TiUe		
							I hereby certify was plotted fro	RVEYOR CER	s shown on this plat I surveys made by a
							or under my second to the to	and of my destrict. MARINE WHKO MEY A MEY	

PO Box 4465, Dur PO Box 4465, Dur API#: Name: epth to groundwater: Distance to closest continuously flowing watercourse: significant vatercourse, lakebed,	3004532660 STATE GAS COM N-3 > 100 ft 3.7 miles to La Plata River; 7.5 miles to the Animas River	Project: Revised: Prepared by: USPLSS: Lat/Long: Geologic formation:	Pit Permits 27-Aug-08 Brooke Herb T31N,R12W,S16D 36.9044444, -108.10556 Nacimiento Formation
PO Box 4465, Dur API#: Name: Poth to groundwater: Distance to closest continuously flowing watercourse: significant	3004532660 STATE GAS COM N-3 > 100 ft 3.7 miles to La Plata River; 7.5 miles to the Animas River	USPLSS: Lat/Long: Geologic	Brooke Herb T31N,R12W,S16D 36.9044444, -108.10556
Name: epth to groundwater: Distance to closest continuously flowing watercourse: significant	3004532660 STATE GAS COM N-3 > 100 ft 3.7 miles to La Plata River; 7.5 miles to the Animas River	USPLSS: Lat/Long: Geologic	T31N,R12W,S16D 36.9044444, -108.10556
Name: Ppth to groundwater: Distance to closest continuously flowing watercourse: significant	> 100 ft 3.7 miles to La Plata River; 7.5 miles to the Animas River	Lat/Long:	T31N,R12W,S16D 36.9044444, -108.10556
pth to groundwater: Distance to closest ontinuously flowing watercourse: significant	> 100 ft 3.7 miles to La Plata River; 7.5 miles to the Animas River	Geologic	
Distance to closest continuously flowing watercourse: significant	3.7 miles to La Plata River; 7.5 miles to the Animas River	,	Nacimiento Formation
continuously flowing watercourse: significant	miles to the Animas River		
•		المستحد ستستم المالية	المتعارضين والمتعارضين والمتعارضين والمتعارض و
playa lake, or sinkhole:	3550 ft to Farmington Glade		
		Soil Type:	· Entisols
ermanent residence, school, hospital, institution or church within 300'	No	* * * * * * * * * * * * * * * * * * *	
		Annual Precipitation:	8.21 inches average annual
Domestic fresh water well or spring within 500'		Precipitation Notes:	no significant precip events
Any other fresh water well or spring within 1000'	No		
Within incorporated nunicipal boundaries	I No I	Attached Documents:	roundwater report and Data, FEMA Flood Zone Map
Within defined nunicipal fresh water well field	No	Ae	rial Photo, Topo Map, Mines Mills and Quarries Map
Wetland within 500'	No	Mining Activity:	none near
TANKAN PERIODE IN SERVICE SERV	1		2.6miles to Kenneth Huggins pit
Within unstable area	No		
Vithin 100 year flood plain	I NO I		·
Additional Notes:			

STATE GAS COM N #3 Below Ground Tank Siting Criteria and Closure Plan

General Geology and Hydrology

The San Juan Basin is a typical Rocky Mountain basin with a gently dipping southern flank and a steeply dipping northern flank. Asymmetrically layered Tertiary sandstones and shales, along with Quaternary alluvial deposits dominate surficial geology (Dane and Bachman, 1965). The proposed below ground tank location will be located on the flanks of the Farmington Glade between Aztec and La Plata, New Mexico. Within the Farmington Glade, the Tertiary Nacimiento Formation is exposed, along with Quaternary alluvial and aeoloian sands surrounding the center of the wash.

Cretaceous and Tertiary sandstones, as well as Quaternary alluvial deposits serve as the primary aquifers in the San Juan basin (Stone et al., 1983). In most of the proposed area, the Nacimiento Formation lies at the surface. Thickness of the Nacimiento ranges from 418 to 2232 feet (Stone et al., 1983). Aquifers within the coarser and continuous sandstone bodies of the Nacimiento Formation are between 0 and 1000' deep in this section of the basin (Stone et al., 1983). Groundwater within these aquifers flows toward the nearby San Juan River and its tributaries.

The prominent soil type at the proposed site is entisols, which are defined as soils that do not show any profile development. Soils are basically unaltered from their parent rock. Miles of arroyos, washes and intermittent streams exist as part of the drainage network towards the La Plata River (www.emnrd.state.nm.us). These features often cut into soil and other unconsolidated materials, contributing to sedimentation downstream. The sudden influx of water from storm events easily erodes soils that cover the area.

The climate of the region is arid, averaging just over 8 inches of rainfall annually. As is typical of the southwestern United States monsoonal weather patterns, most precipitation falls from August through October. The heaviest rainfall occurs in the summer in isolated, intense cloudbursts. November through June is relatively dry. Snow generally falls from December to mid-February and averages less than one-half inch in depth. However, most recharge occurs during the winter months during snowmelt periods from the upper elevations (Western Regional Climate Center www.wrcc.dri.edu).


The predominant vegetation is sagebrush and grasses with a more restricted pinon-juniper association (Dick-Peddie, 1993).

Site Specific Hydrogeology

Depth to groundwater is estimated to be greater than 100 feet. This estimation is based on data from Stone and others, 1983 and depth to groundwater data published on the New Mexico State Engineer's iWaters Database website. Local topography and proximity to surface hydrologic features are also taken into consideration.


Local aquifers include sandstones within the Nacimiento Formation, which ranges from 0 to 1000 feet deep in this area, as well as shallow aquifers within Quaternary alluvial deposits (Stone et al., 1983). The 1000-foot depth range for Nacimiento aquifers covers an area over 20 miles wide, and depth decreases towards the margin of the San Juan Basin. The site in question is more centrally located, and depth to the aquifer is expected to be closer to 1000 feet. It is well known that groundwater close to the Farmington Glade can be shallow, as the Quaternary deposits near the wash itself form shallow aquifers. However, the proposed site is situated about half a mile to the northwest and approximately 125 feet higher in elevation from Glade Wash (Google Earth).

Groundwater data available from the NM State Engineer's iWaters Database for wells near the proposed site are attached. A map showing the location of wells in reference to the proposed pit location is also included. Pinpoints show locations of wells and the labels for each pinpoint indicate depth to groundwater in feet. The closest well to the proposed site has a depth to ground water of 142 feet and is approximately 100 feet lower in elevation than the site in question. Wells clustered to the northeast have depths to groundwater ranging from 42 to 275 feet.

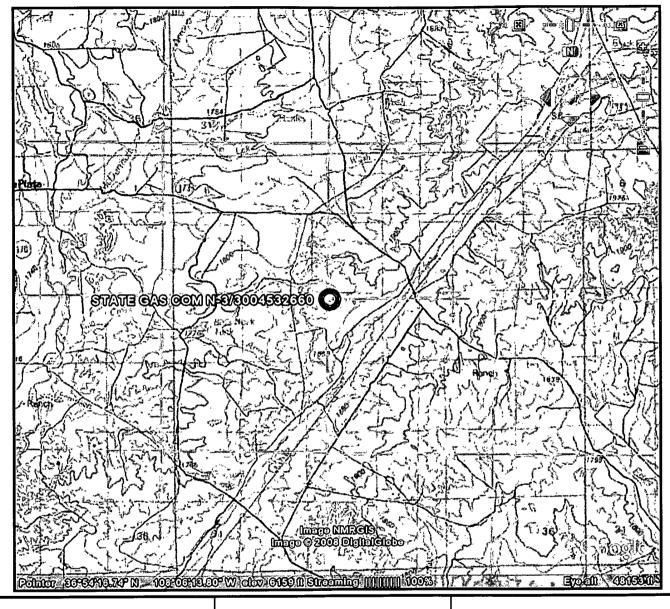

STATE GAS COM N-3 T31N, R12W, S16D San Juan County, NM

Topographic Map

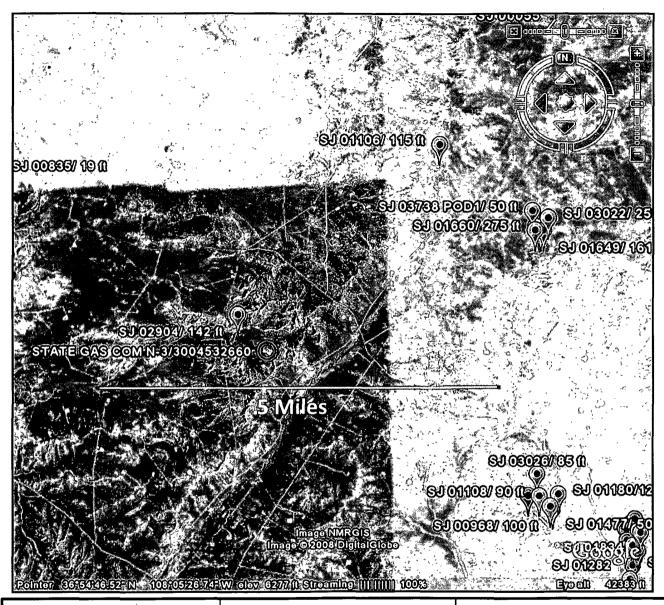

STATE GAS COM N-3 T31N, R12W, S16D San Juan County, NM

iWaters Groundwater Data Map

New Mexico Office of the State Engineer POD Reports and Downloads

	Township: 31h Range: 12V Sec	tions: 5	
	NAD27 X: Y: Zone	Search Radius:	
	County: Basin:	Number: Suffix:	
	Owner Name: (First) (Last)	Non-Domestic Domestic All	
	POD / Surface Data ReportAvg Depth	to Water ReportWater Column Report	
	WATER COLUMN REPORT	08/27/2008	
PCID Number SJ 02904	(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) Tws Rng Sec q q q Zone X 31N 12W 08 4 4 4	Depth Depth Water (in feet) Y Well Water Column 325 142 183	
Record Count	t: 1		

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 21h	Range: 12V Sections:	1
NAD27 X:	Y: Zone:	Search Radius:
County: Basin	-	Number: Suffix:
Owner Name: (First)	(Last)	Non-Domestic Domestic All
POD / Surface Data I	ReportAvg Depth to Wa	iter ReportWater Column Report

WATER COLUMN REPORT 08/27/2008

(q	uarter	s are	e 1=	NW	2=	NE.	3=SW 4=SI	3)					
(q	uarter	s are	e bi	gge	est	: to	o smallest	t)		Depth	Depth	Water	(in feet)
POD Number	Tws	Rng	Sec	q	q	q	Zone	X	Y	Well	Water	Column	
SJ 03488	31N	12W	01	3	3	2				150			
SJ 03738 POD1	_ 31N	12W	01	4	1	3				115	50	65	
SJ 02034	31N	12W	01	4	3					85	55	30	
SJ 03134	31N	12W	01	4	3	2				90	20	60	
SJ 03022	_ 31N	12W	01	4	3	2				490	250	240	
SJ 01660	31N	12W	01	4	3	3				320	275 .	45	
SJ 01649	31N	12W	01	4	3	4				220	161	59	
SJ 03660	31N	12W	01	4	3	4				70	42	28	
SJ 02099	_ 31N	12W	01	4	4					95			

Record Count: 9


New Mexico Office of the State Engineer POD Reports and Downloads

Township: 31h Ra	ange: 12V Sections:	25	
NAD27 X: Y:	Zone:	Search Radius	:
County: Basin:		Number:	Suffix:
Owner Name: (First)	(Last)	C Non-Domestic	Domestic All
POD / Surface Data Re	portAvg Depth to Wa	ter ReportWater Column	Report

WATER COLUMN REPORT 08/27/2008


	(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest)								Depth	Depth	Water	(in	feet)
POD Number	Tws	Rng	Sec	q e	PF	Zone	X	Y	Well	Water	Column		
SJ 01477	31N	12W	25	2					565	505	60		
SJ 01163	31N	12W	25	2 :	L 3				200	90	110		
SJ 01108	31N	12W	25	2 :	4				245	90	155		
SJ 01303	31N	12W	25	2 2	2 3				210				
SJ 01180	31N	12W	25	2 2	2 4				200	120	80		
SJ 00968	31N	12W	25	2 4	1				170	100	70		

Record Count: 6

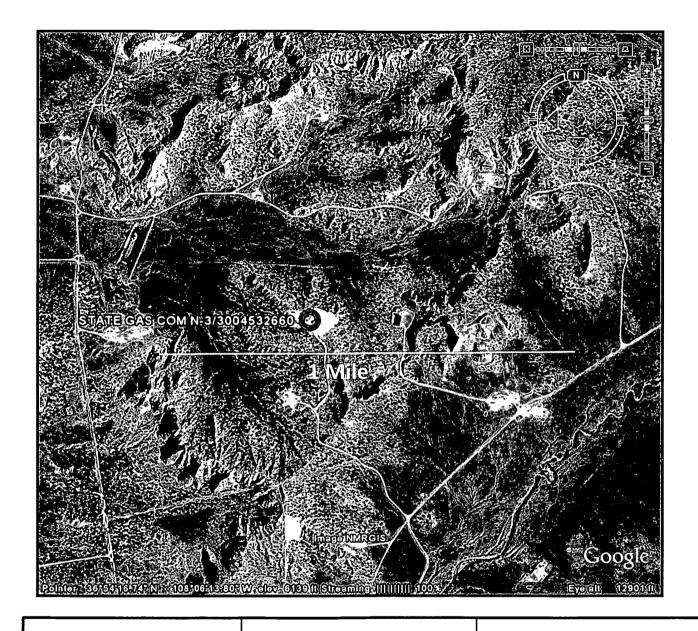

STATE GAS COM N-3 T31N, R12W, S16D San Juan County, NM


Aerial Photograph

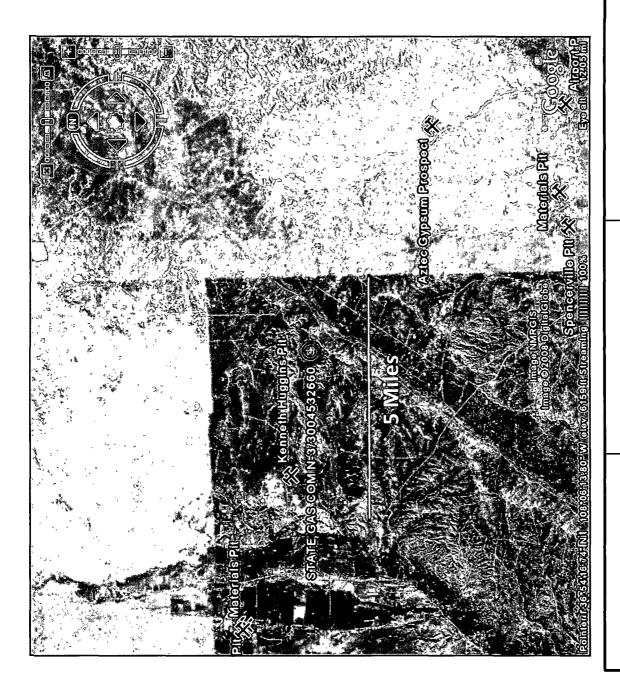

Lodestar Services, Inc STA PO Box 4465 T3: Durango, CO 81302 Sar

STATE GAS COM N-3 T31N, R12W, S16D San Juan County, NM

Mines, Mills, and Quarries Map

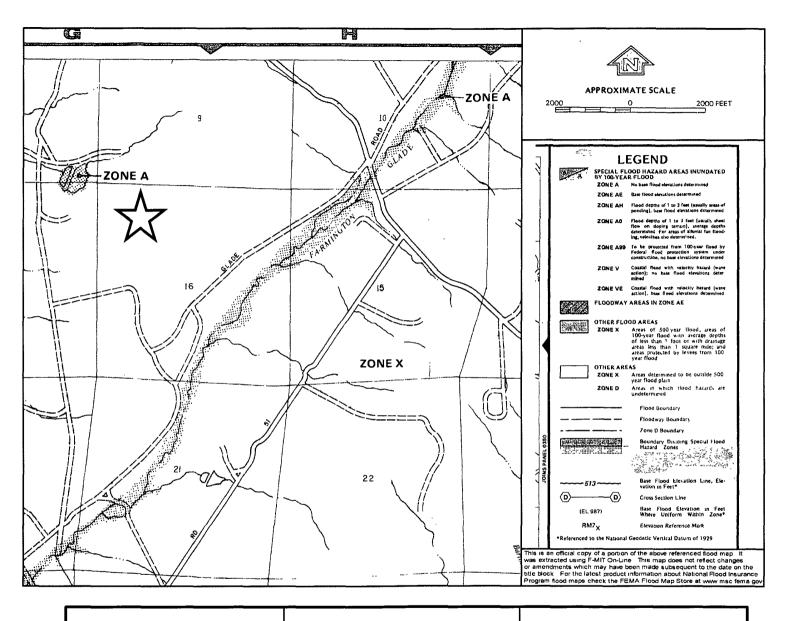

STATE GAS COM N-3 T31N, R12W, S16D San Juan County, NM

FEMA Flood Zone Map

XTO Energy Inc. San Juan Basin Below Grade Tank Design and Construction Plan

In accordance with Rule 19.15.17.11 NMAC the following information describes the design and construction of below grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below grade tanks. A separate plan will be submitted for any below grade tank (BGT) which does not conform to this plan.

General Plan

- 1. XTO will design and construct a BGT to contain liquids and solids and prevent contamination of fresh water and protect public heath and environment.
- 2. Prior to constructing the pit, topsoil will be stockpiled in the construction zone for later use in restoration
- 3. XTO will post a well sign, in compliance with 19.15.3.103 NMAC, on the well site prior to construction of the BGT. The sign will list the Operator on record as the operator, the location of the well site by unit letter, section, township, range, and emergency telephone numbers.
- 4. XTO shall construct all new fences utilizing 48" steel mesh field-fence (hogwire) on the bottom with two strands of barbed wire on top, or with a pipe top rail. A 6' chain link fence topped with three stands of barbed wire will be used if the well location is within 1000' of a permanent residence, school, hospital, institution or church.
- 5. XTO shall construct an expanded metal covering on top of the BGT.
- 6. XTO will ensure that a BGT is constructed of materials resistant to the BGT's particular contents and resistant to damage from sunlight.
- The BGT system will have a properly constructed foundation consisting of a level base free of
 rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner
 or tank bottom.
- XTO will construct a berm and/or diversion ditch in a manner that prevents the collection of surface water run-on.
- 9. XTO will construct and use BGT that does not have double walls. The BGT sidewalls will be open for visual inspection for leaks, the BGT bottom will be elevated a minimum of 6" above the underlying ground surface and the BGT will be underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected.
- 10. XTO will equip BGT's designed in this manner with a properly functioning automatic high-level shut-off control device and manual controls to prevent overflows.
- 11. The geomembrane liner shall consist of 30-mil flexible PVC or 60-mil HDPE liner, or an equivalent liner material that the appropriate division district office approves. The geomembrane liner shall have a hydraulic conductivity greater that 1 x 10-9 cm/sec. The geomembrane liner shall be composed of an impervious, synthetic material that is resistant to petroleum hydrocarbons, salts and acidic and alkaline solutions. The liner material shall be resistant to ultraviolet light. Liner compatibility shall comply with EPA SW-846 method 9090A.
- 12. The general specifications for design and construction are attached.

XTO Energy Inc. San Juan Basin Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17.11 NMAC the following information describes the operation and maintenance of below grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below grade tanks. A separate plan will be submitted for any below grade tank (BGT) which does not conform to this plan.

General Plan

- 1. XTO will operate and maintain a BGT to contain liquids and solids and prevent contamination of fresh water and protect public health and the environment.
- 2. XTO will not allow a BGT to overflow and will use berms and/or diversion ditch to prevent surface run on to enter the BGT.
- 3. XTO will continuously remove any visible or measurable layer of oil from the fluid surface of a BGT in order to prevent significant accumulation of oil.
- 4. XTO will inspect the BGT monthly and maintain written records for five years.
- 5. XTO will maintain adequate freeboard to prevent over topping of the BGT.

XTO Energy Inc. San Juan Basin Below Grade Tank Closure Plan

In accordance with Rule 19.15.17.11 NMAC the following information describes the closure requirements of below grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below grade tanks. A separate plan will be submitted for any below grade tank (BGT) which does not conform to this plan.

General Plan

- XTO will close a BGT within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.
- 2. XTO will close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. XTO will close a permitted BGT within 60 days of cessation of the BGT's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.
- 4. XTO will remove liquids and sludge from a BGT prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility.
- 5. XTO will remove the BGT and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
- 6. XTO will remove any on-site equipment associated with a BGT unless the equipment is required for some other purpose.
- 7. XTO will test the solids beneath the BGT to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.
- 8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.
- 9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.
- 10. Notice of Closure will be given to the Aztec Division District III office between 72 hours and one week of closure via email or verbally. The notification will include the following:
 - i. Operator's name
 - Location by Unit Letter, Section, Township, and Range. Well name and API number.

- 11. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the BGT. Closure report will be filed on form C-144 and incorporate the following:
 - i. Details on capping and covering, where applicable
 - ii. Inspection reports
 - iii. Sampling results
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. XTO will seed the disturbed areas the first growing season after the operator closes the pit.

 Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.
- 14. A minimum of 4' of cover shall be achieved and the cover shall include 1' of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.
- 15. The surface owner shall be notified of XTO's proposal to close the BGT as per the approved closure plan using certified mail, return receipt requested.