REPAIR WELL

ABANDON*

UNITED STATES DEPARTMENT OF THE INTERIOR GEOLOGICAL SURVEY

measured and true vertical depths for all markers and zones pertinent to this work.)*

REQUEST FOR APPROVAL TO: TEST WATER SHUT-OFF FRACTURE TREAT SHOOT OR ACIDIZE

PULL OR ALTER CASING MULTIPLE COMPLETE CHANGE ZONES

Dec. 1973	Budget Bureau No. 42-R1424
UNITED STATES	5. LEASE
DEPARTMENT OF THE INTERIOR	NM 5452
GEOLOGICAL SURVEY	6. IF INDIAN, ALLOTTEE OR TRIBE NAME
SUNDRY NOTICES AND REPORTS ON WELLS (Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9–331–C for such proposals.)	7. UNIT AGREEMENT NAME
	8. FARM OR LEASE NAME
1. oil gas X other	Dome Navajo 18-22-6
	9. WELL NO.
2. NAME OF OPERATOR	2
Dome Petroleum Corp.	10. FIELD OR WILDCAT NAME
3. ADDRESS OF OPERATOR 501 Airport Drive,	Rusty Chacra Extension
Suite 114, Farmington, New Mexico 87401 4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17	11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
helow.)	Sec. 18, T22N, R6W
AT SURFACE: 1030' FSL, 1810' FEL	12. COUNTY OR PARISH 13. STATE
AT TOP PROD. INTERVAL: AT TOTAL DEPTH:	Sandoval New Mexico 14. API NO.
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE,	
REPORT, OR OTHER DATA	15. ELEVATIONS (SHOW DF, KDB, AND WD)

(NOTE: Report results of multiple completion or zone


change on Form 9-330.)

Spud & Set Surface Casing (other) 17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and

SUBSEQUENT REPORT OF:

Spudded 124" hole at 12:05 a.m., 9/27/80. Drilled to 142'. Ran 3 jts. (137') 8 5/8", 24#, K55, ST&C Casing. Casing landed at 139' G.L. Cemented with 100 sx. Class "B" Cement with 2% CaCl. Plug down at 8:00 a.m., 9/27/80. Circulated Cement

M eyr

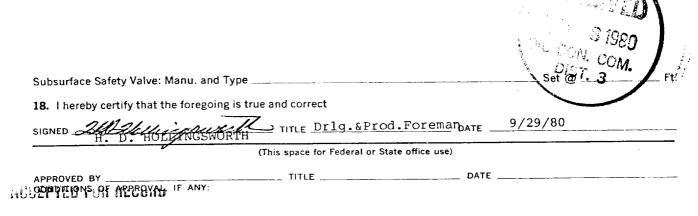

UCT 0 4 1980

*See Instructions on Reverse Side

