

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen, or plug back to a different reservoir. Use Form 5-331-0 for such proposals.)

1. oil gas other
well well

2. NAME OF OPERATOR
Dome Petroleum Corp.

3. ADDRESS OF OPERATOR 501 Airport Drive,
Suite 114, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1760' FNL, 980' FNL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

5. LEASE
NM 21455

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Dome Federal 18-22-6

9. WELL NO.
3

10. FIELD OR WILDCAT NAME
Rusty Chacra Extension

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 18, T22N, R6W

12. COUNTY OR PARISH: 13. STATE
Sandoval New Mexico


14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6923' GR

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON <input type="checkbox"/>	<input type="checkbox"/>
(other) <u>Spud & Set Surface Casing.</u>	

(NOTE: Report results of multiple completion or zone change on Form 5-330.)

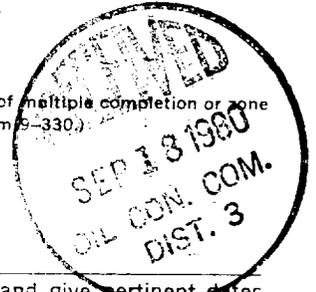

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 12 1/2" hole at 5:00 p.m. 9/14/80. Drilled to 135'. Ran 3 jts. (133') & 5/8", 24#, K55 Casing. Casing landed at 135' G.L. Cemented with 100 sacks Class "B" Cement with 2% CaCl. Plug down at 4:45 a.m. 9/15/80. Circulated cement.

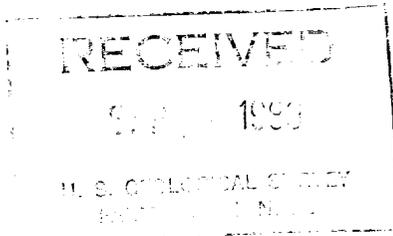

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Drill & Prod. Foreman DATE September 15, 1980

(This space for Federal or State office use)

ACCEPTED FOR RECORD ANY. TITLE DATE

SEP 17 1980

BY [Signature] FARMINGTON DISTRICT

*See Instructions on Reverse Side

MOCC