

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

| | | | |
|---|--|--------------------------|-----------------|
| 1. Type of Well GAS | 5. Lease Number Jic.Contract 117 | | |
| 2. Operator Meridian Oil Inc. | 6. If Indian, All.or Tribe Name Jicarilla | | |
| 3. Address & Phone No. of Operator PO Box 4289, Farmington, NM 87499 | 7. Unit Agreement Name | | |
| 4. Location of Well 896'S, 1700'W | 8. Farm or Lease Name Jicarilla 117 E | | |
| | 9. Well No. 1 | | |
| | 10. Field, Pool, Wildcat Tapacitos Pic.Cliffs | | |
| | 11. Sec. T. R. M. or Blk Sec.33, T-26-N, R- 3-W NMPM | | |
| 14. Permit No. | 15. Elevations 7374'GR | 12. County Rio Arriba | 13. State NM |
| 16. Intent to/Subsequent Report of : | | | |
| 17. Describe proposed or completed operations: | | | |

It is intended to plug back the Pictured Cliffs and recomplete in the Fruitland Coal formation in the following manner:

Run CNL. Set CIBP @ 3950'. Pressure test to 1000 psi. Run CBL. Perforate at 3815-18', 3856-94', 3896-3900', 3928-40' w/2 spf. Break down formation with 714 gal. 15% Hcl. Evaluate well. Fracture stimulate with 101,000# sand and 77,840 gal. fluid. Flow well back. Land 1 1/4" tbg @ 3935'.

18. Authorized by: [Signature]
Regulatory Affairs

RECEIVED
OCT 11 1989
OIL CON. DIV.
DIST. 3
09-12-89
Date

NOTE: This format is issued in lieu of US BLM Form 3

**APPROVED
AS AMENDED**

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____
CONDITION OF APPROVAL, IF ANY:

OCT 04 1989
[Signature]
AREA MANAGER


Set 4 Cement Retainer @ 3.50 and
squeeze the perforations in the pictured cliffs.

JICARILLA 117 E #1

UNIT N SECTION 33, T-26-N, R-3-W
FRUITLAND COAL RECOMPLETION

BEFORE

AFTER

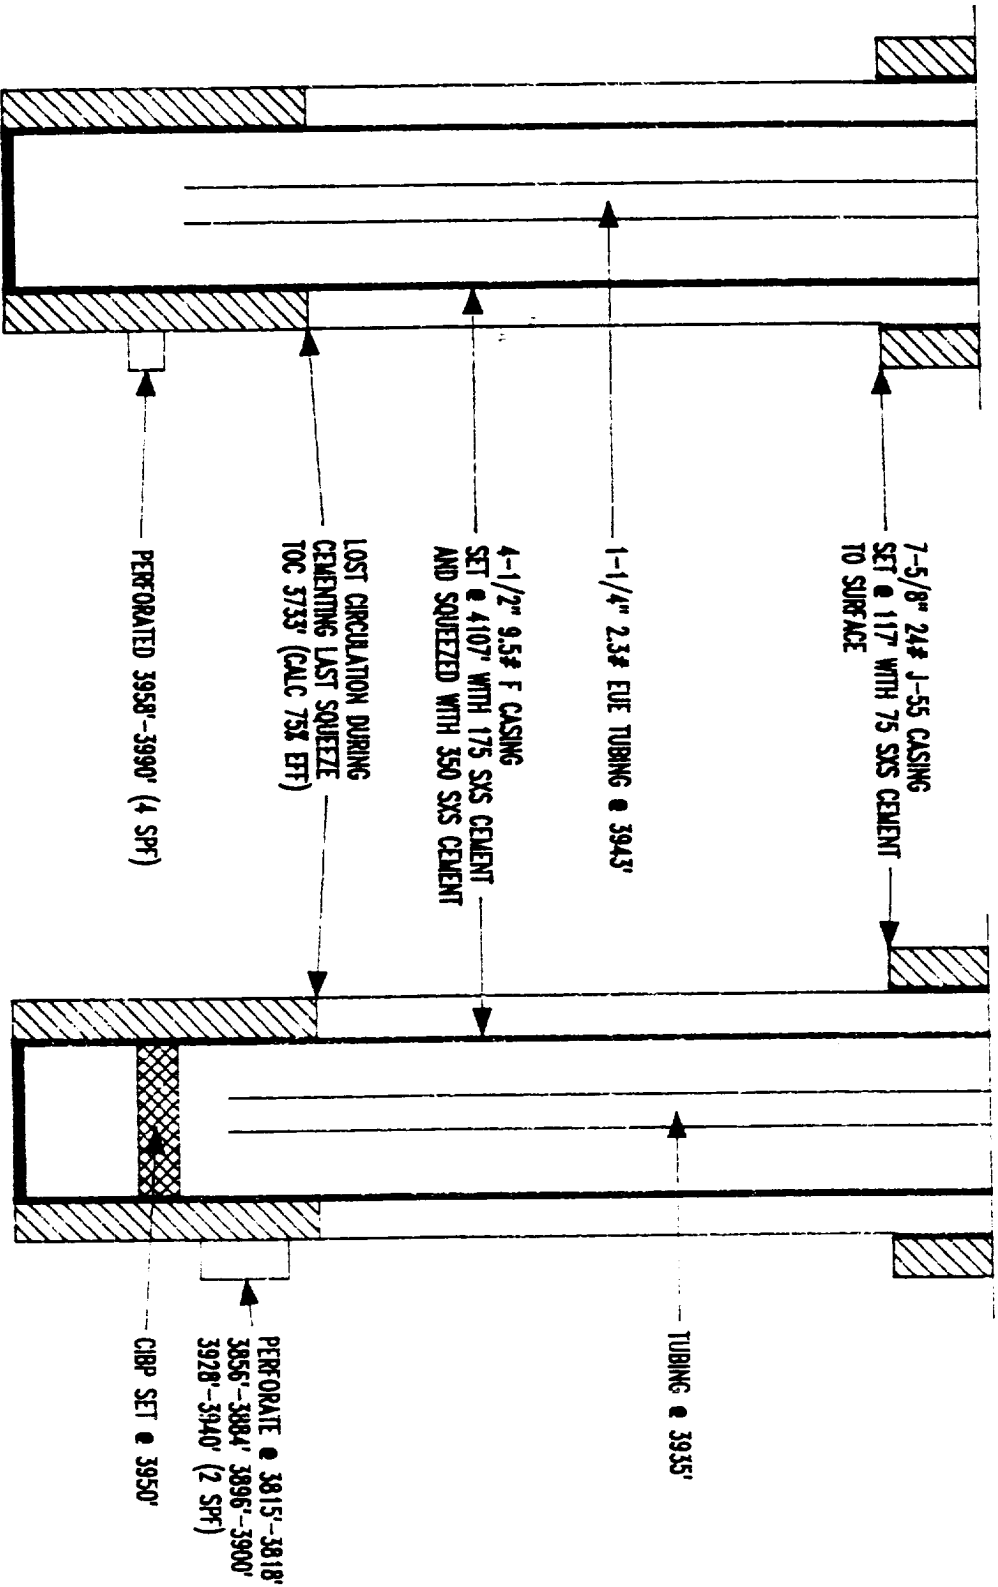

TD-4107

0410 ALAMO-3630'
KIRTLAND-3703'
FRUITLAND-3789'
PICTURED CLIFTS-3947'