

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐
2. NAME OF OPERATOR  
DOME PETROLEUM CORP.
3. ADDRESS OF OPERATOR 501 Airport Drive,  
Suite 114, Farmington, New Mexico 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1670' FSL, 690' FWL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:


- TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐

(other) Run Production Casing

SUBSEQUENT REPORT OF:

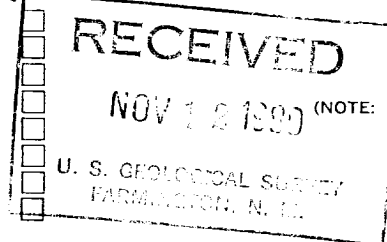

5. LEASE  
N00-C-14-20-5360
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
NAVAJO ALLOTTED
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
9. WELL NO.  
DOME TESORO 223 #/
10. FIELD OR WILDCAT NAME  
Wildcat/Gallup
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 23, T22N, R7W
12. COUNTY OR PARISH Sandoval 13. STATE New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
6775' GR

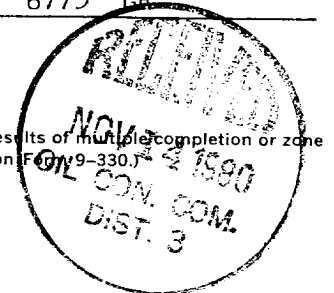

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*  
Ran 123 jts. (4800') 4½", 10.5#, K55, ST&C Casing. Casing landed at 4800' K.B. Cemented 1st stage with 275 sacks 65/35 Pozmix, with 6% Gel and 10# Gilsonite/Sx. Followed with 200 sacks Class "B" Cement with 10% salt. Plug down at 6:00 p.m., 11/8/80. Opened DV Tool and circulated 4 hours. Cemented 2nd stage with 250 sacks 65/35 Pozmix with 6% Gel and 10# Gilsonite/sx. Followed with 300 sacks Class "B" Cement with 10% salt. Plug down at 11:00 p.m., 11/8/80. Circulated cement on both stages.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED H. D. HOLDINGSWORTH TITLE Drig. & Prod. Foreman DATE NOVEMBER 10, 1980

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

NMOC

\*See Instructions on Reverse Side

BY BW