

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

30-043-26511

5. LEASE DESIGNATION AND SERIAL NO.

NM-36941

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

LASSMAN

9. WELL NO.

3

10. FIELD AND POOL, OR WILDCAT

Wildcat Chacra

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 22, T21N, R6W

12. COUNTY OR PARISH 13. STATE

Sandoval

New Mexico

1a. TYPE OF WORK

DRILL ☒

DEEPEN ☐

PLUG BACK ☐

b. TYPE OF WELL

OIL WELL ☐

GAS WELL ☒

OTHER

SINGLE ZONE ☐

MULTIPLE ZONE ☐

2. NAME OF OPERATOR

COLEMAN OIL & GAS, INC.

3. ADDRESS OF OPERATOR

Drawer 3337

Farmington, New Mexico 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)\*

At surface

1040' FNL, 1600' FWL

At proposed prod. zone

Same

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*

12 miles south Councilor's, New Mexico

15. DISTANCE FROM PROPOSED\*

LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any)

1600'

16. NO. OF ACRES IN LEASE

2040

17. NO. OF ACRES ASSIGNED TO THIS WELL

160

18. DISTANCE FROM PROPOSED LOCATION\* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.

5780'

19. PROPOSED DEPTH

1700' Chacra

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

6962 GR.

22. APPROX. DATE WORK WILL START\*

12-25-1980

23.

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
11	7	24#	100	100 Circ.
6-3/4	4 1/2	9.5#	1700	200 Circ.

SEE NTL-6 ATTACHMENTS

GAS NOT DEDICATED



IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED

*James C. Kennedy*

TITLE

Agent

DATE

9-29-1980

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

APPROVED BY

AS AMENDED

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

DEC 09 1980  
JAMES F. SIMS  
DISTRICT ENGINEER

\*See Instructions On Reverse Side

## OIL CONSERVATION DIVISION

P. O. BOX 2088

Form C-107  
Revised 10-1-78

STATE OF NEW MEXICO

SANTA FE, NEW MEXICO 87501

All distances must be from the outer boundaries of the Section.

ENERGY AND MINERALS DEPARTMENT


Operator <b>COLEMAN OIL &amp; GAS, INCORPORATED</b>			Lease <b>LASSMAN</b>		Well No. <b>3</b>
Unit Letter <b>C</b>	Section <b>22</b>	Township <b>21N</b>	Range <b>6W</b>	County <b>Sandoval</b>	
Actual Footage Location of Well: <b>1040</b> feet from the <b>North</b> line and <b>1600</b> feet from the <b>West</b> line					
Ground Level Elev. <b>6962</b>	Producing Formation <b>Chacra</b>		Pool <b>Wildcat</b>		Dedicated Acreage: <b>160</b> Acres

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation \_\_\_\_\_

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) \_\_\_\_\_

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

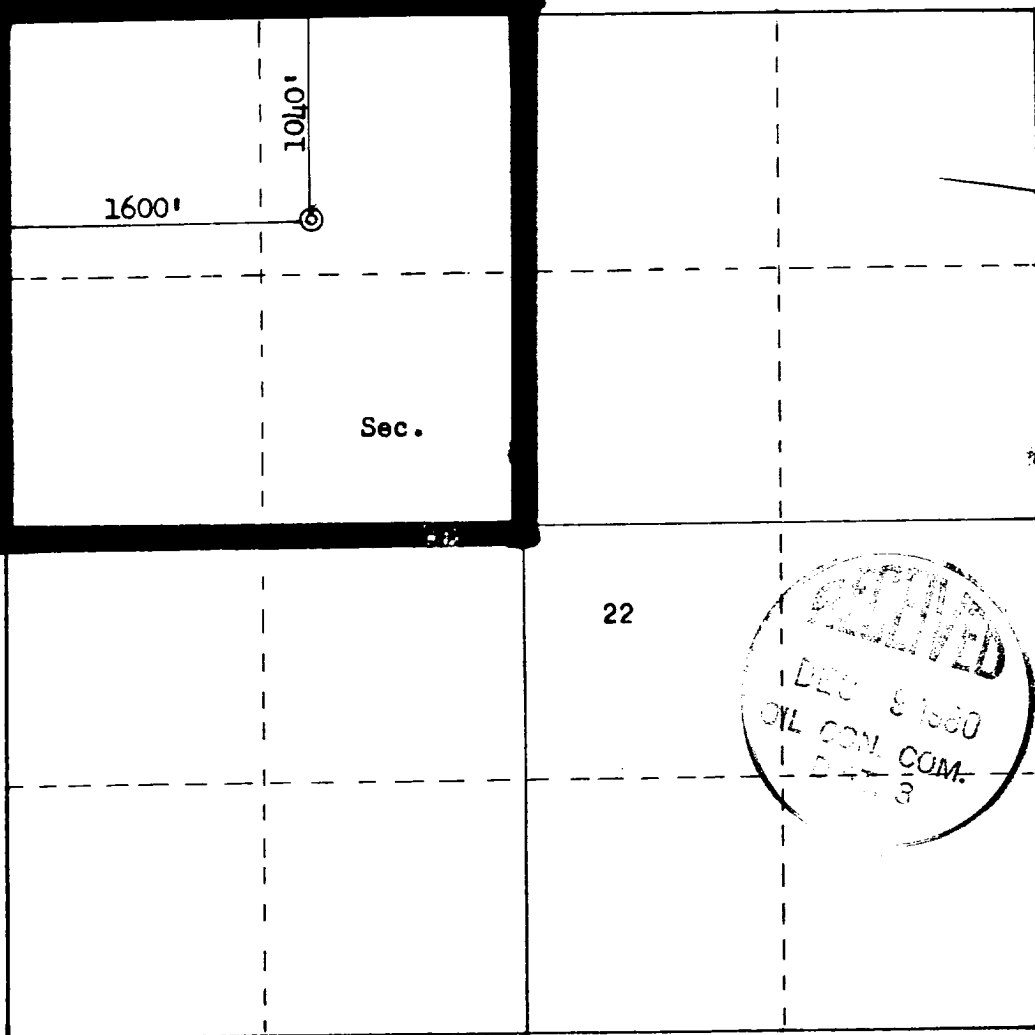

Scale: 1"=1000'

## CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Name **Claude C. Kennedy**

Position **Agent**

Company  
**Coleman Oil & Gas, Inc.**

Date **9-29-1980**

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed

**September 24, 1980**

Registered Professional Engineer  
and Land Surveyor

**Fred B. Kerr Jr.**

Certificate No. **3950**

# FORMATION INFORMATION & DRILLING PRACTICE

## 1. Geologic name of surface formation.

Tertiary

## 2. Estimated tops of important geologic markers.

Ojo 325 to 625

PC 905

Chacra 1225

## 3. Estimated depths at which anticipated water, oil, gas or other mineral-bearing formations are expected.

Gas 1250 -1300

## 4. Proposed casing program.

Surface: 7", 24#, Used casing to be set @ 100' Cement will be 50 sx Class B, 2% CaCl or adequate to circulate.

Production: 4½ csg, K-55, new casing to be set at 1650' cement will be 100 sx 50/50 Poz, plus 100 sx Class B, 2% CaCl or adequate to circulate.

## 5. Specifications for pressure control equipment.

The attached schematic shows the type of blow out preventer to be used while drilling. The unit will be tested to 200 psi as soon as possible after its installation on the surface pipe. Testing will be done with the rig pump. This is a manual type preventer, and its operation will be manually checked when practical.

## 6. Drilling fluids.

Depth	Type	Viscosity	Weight	Fluid Loss (cc)
0-100	Gel-lime	35-45	8.6-9.0	N/C
100- 1650	Low-solids	29-33	8.4-8.8	15

## 7. Auxiliary equipment.

- bit float
- full opening stabbing valve to be used when kelly is not in the string

## 8. Logging - Coring - Testing.

Logging: Induction Electric Log, Formation Compensated Density, Gamma Ray Caliper

Coring: None

Drill Stem Testing: None

9. Abnormal temperatures, pressure, or hazardous conditions.

None expected

10. Starting Date.

Anticipated starting date is 12-25-1980      Approximately six days will be needed to build roads and location and drill the well to total depth. If commercial, completion will commence immediately and require ten days.



## SHAFFER HYDRAULIC BLOWOUT PREVENTERS

(Patented)

TYPE LWS PREVENTERS—8", 3000 lb. & 5000 lb.—10", 5000 lb.  
12", 3000 lb.—13 $\frac{1}{2}$ ", 5000 lb.—16", 3000 lb.

## PARTS AND DIMENSIONAL ILLUSTRATIONS

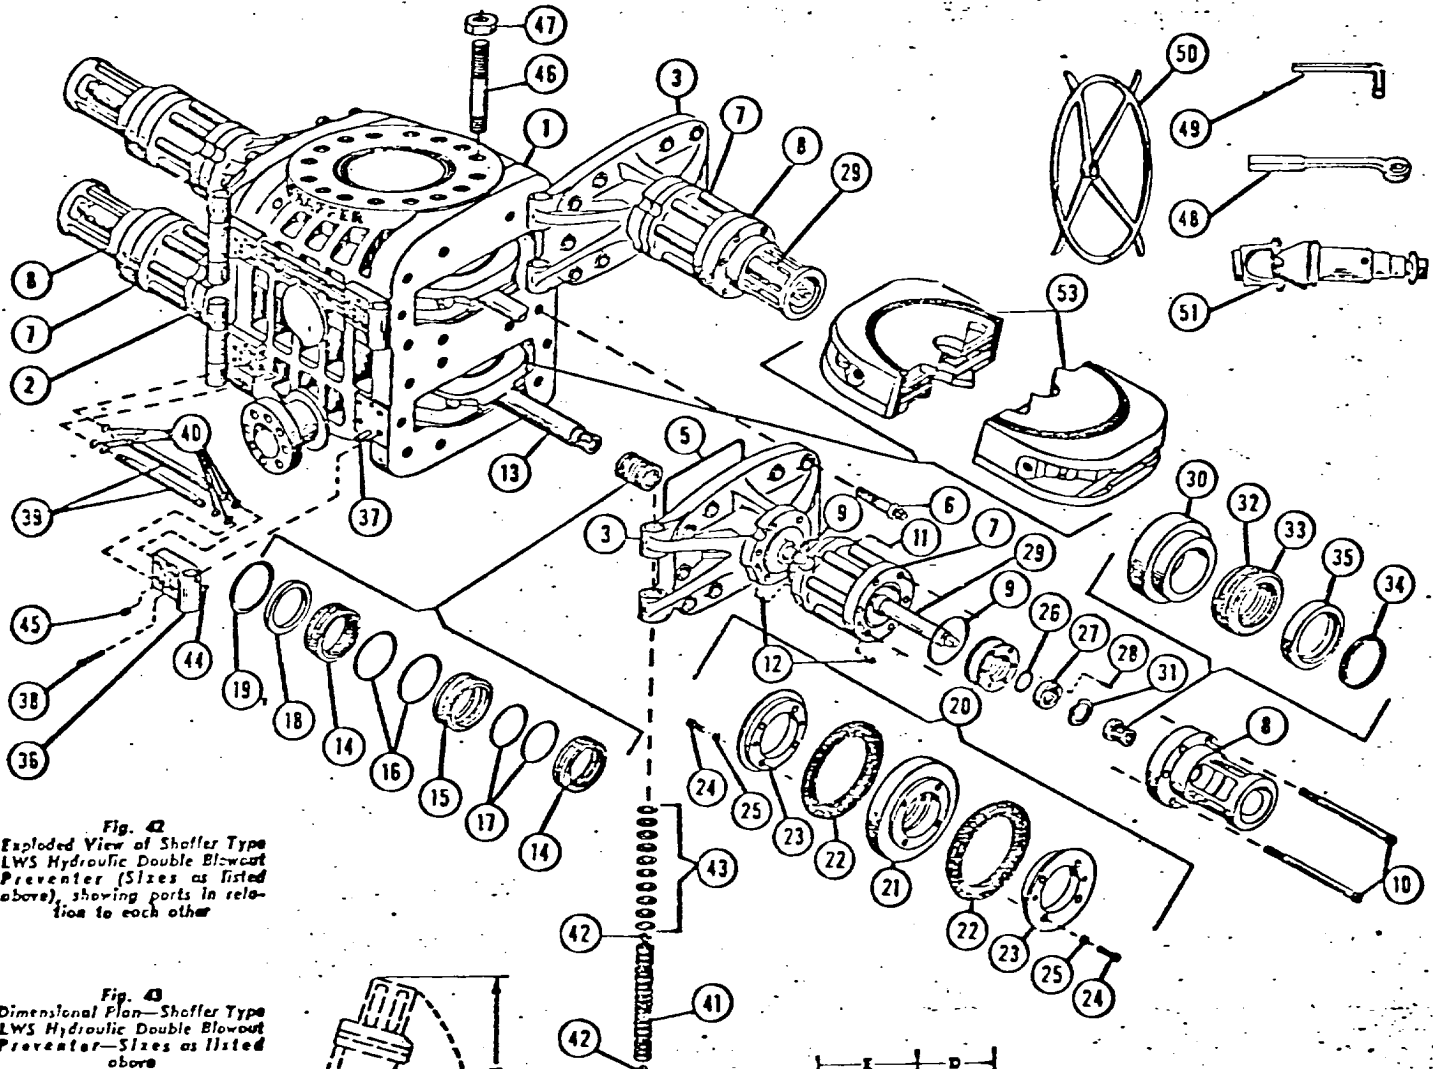


Fig. 42  
Exploded View of Shaffer Type  
LWS Hydraulic Double Blowout  
Preventer (Sizes as listed  
above), showing parts in rela-  
tion to each other

Fig. 43  
Dimensional Plan—Shaffer Type  
LWS Hydraulic Double Blowout  
Preventer—Sizes as listed  
above


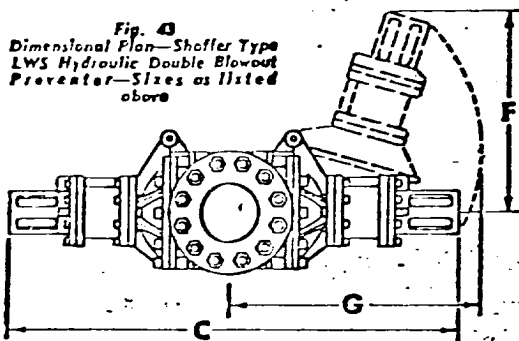


Fig. 44  
Dimensional End Elevation—  
Shaffer Type LWS Hydraulic  
Double Blowout Preventer—  
Sizes as listed above



## STANDARD ACCESSORIES

- (50) 4 Hand Wheels
- (48) 1 Door Wrench
- (49) 1 Cylinder & Cylinder Head Wrench
- (51) 4 Universal Joints

## DIMENSIONAL AND ENGINEERING DATA ON ABOVE SIZES OF TYPE LWS PREVENTERS

Refer to Figs. 43 and 44

Size	Max. Service Pressure Rating, psi	Test Pressure, psi	Vertical Hole	Max. Yarn Size	Approx. Weight Lbs.		A				B	C	D	E	F	G	Closing Rate	Opening Rate	U.S. Gals. Fluid To Close Rams	U.S. Gals. Fluid To Open Rams
							Height													
					Studded Flange		Single		Double											
Single	Double	Studded Flange	Ball Flange	Studded Flange	Ball Flange	Width	Length	Center To Front	Center To Rear	Door Open To Change Rams	Door Open To Change Rams									
8"	2,000	8,000	8"	7"	.....	2,500	.....	.....	29 1/2"	41 1/2"	25 1/2"	75 1/2"	11 1/2"	14 1/2"	22"	48"	5.5 to 1	1.85 to 1	2.75	2.5
10"	5,000	10,000	10"	9"	.....	2,500	.....	.....	29 1/2"	41 1/2"	25 1/2"	75 1/2"	11 1/2"	14 1/2"	22"	48"	5.5 to 1	1.85 to 1	2.75	2.5
12"	8,000	10,000	11"	10 1/2"	5,000	7,000	2 1/2"	2 1/2"	23"	30 1/2"	25 1/2"	75 1/2"	12 1/2"	15"	22"	48"	5.5 to 1	1.85 to 1	2.75	2.5
13 1/2"	2,000	8,000	11 1/2"	10 1/2"	6,200	6,200	2 1/2"	2 1/2"	24 1/2"	32 1/2"	25 1/2"	75 1/2"	13 1/2"	15 1/2"	22"	48"	5.5 to 1	1.85 to 1	2.75	2.5
16"	2,000	10,000	13 1/2"	12 1/2"	6,200	6,200	2 1/2"	2 1/2"	26"	34 1/2"	25 1/2"	75 1/2"	14 1/2"	15 1/2"	22"	48"	5.5 to 1	1.85 to 1	2.75	2.5
16"	2,000	8,000	13 1/2"	12 1/2"	.....	2,500	.....	.....	26"	34 1/2"	25 1/2"	75 1/2"	14 1/2"	15 1/2"	22"	48"	5.5 to 1	1.85 to 1	2.75	2.5

### 13 POINT SURFACE USE PLAN

Coleman Oil & Gas, Inc. #3 Lassman

1. EXISTING ROADS: (Shown in Green)

The attached topographic map shows all existing roads within (3) miles of the proposed location. All roads are in fair condition and will require a minimal amount of work to upgrade them to handle normal drilling activity traffic.

2. PLANNED ACCESS ROAD (Shown in Red)

Width: 20' flat bladed.

Maximum Grades: 2% or less, road is flat.

New road required: 100' to none, on road.

No cut, fill, turnouts, culverts or gates will be required.

Water bars will be consistent with existing drainage pattern.

3. LOCATION OF EXISTING WELLS:

Map attached.

4. LOCATION OF EXISTING OR PROPOSED PRODUCTION FACILITIES:

A. All production facilities are to be contained within the proposed location.

B. Production facilities are present on wells as per 3. above.

5. LOCATION AND TYPE OF WATER SUPPLY:

Private Source: Escrito TP

6. SOURCE OF CONSTRUCTION MATERIAL:

Any construction material required for road or location will be excess materials accumulated during building of such sites.

7. METHOD FOR HANDLING WASTE DISPOSAL:

1. The cuttings will be retained in the reserve pit.

2. Drilling fluids will be contained in a reserve pit or mud tanks until well is completed.

3. Oil will be collected in tanks. Little or no water is anticipated at this location. If volume of oil is sufficient, it will be trucked from location.

4. A portable toilet will be provided.

5. A fenced pit will be provided for trash. The trash pit will be enclosed with small mesh wire. The reserve pit will be fenced.

6. Location and mud pits will be leveled and seeded as soon as feasible after well is completed. The area will be cleaned of all trash and materials.

13 POINT SURFACE USE PLAN - continued

Page - 2

8. ANCILLARY FACILITIES:

No camps or airstrips will be constructed.

9. WELL SITE LAYOUT:

The attached layout shows the drilling rig with all supporting facilities. Cut and fill, required for pad construction, is also shown.

10. SURFACE RESTORATION PLANS:

Restoration of the well site and access road will begin within 90 days of well completion, weather permitting.

Should the well be abandoned, the drilling site will be reshaped to its approximate former contour. The access road will be plowed and leveled. Both road and location will have top soil replaced and will be reseeded when germination can occur.

Should the well be commercial, that portion of location not needed for operation will be repaired as above. The portion of the location needed for daily production operations, and the access road, will be kept in good repair and clean.

In either case, cleanup of the site will include burning any safely burnable material, filling of all pits, and proper disposal of any nonburnable material that can not be safely buried. Any oil that has accumulated on the pits will be trucked away.

11. OTHER INFORMATION:

A. General topography of the area may be seen on the attached map.

B. There were no archaeological or cultural sites visible on the location. The archaeologist's report is forthcoming.

C. Animal life: Wild, small sheep

D. Dwellings: none within 2 miles or more

E. Drainage: South, southwest

F. Surface Owner: BLM

G. General location: Mule Dam Quad

12. OPERATOR REPRESENTATIVES:

CLAUDE C. KENNEDY  
INDEPENDENT OIL AND GAS OPERATOR

6109 DEL CAMPO PLACE, N.E.  
ALBUQUERQUE, N. M. 87109

PHONE (505) 883-9624

13 POINT SURFACE USE PLAN - continued

Page - 3


13. CERTIFICATION:

I hereby certify that I or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which presently exist; that the statements made in the plan are to the best of my knowledge; true and correct; and, that the work associated with the operations proposed herein will be performed by operator, and his contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

  
Claude C. Kennedy


Date: 9-29-1980



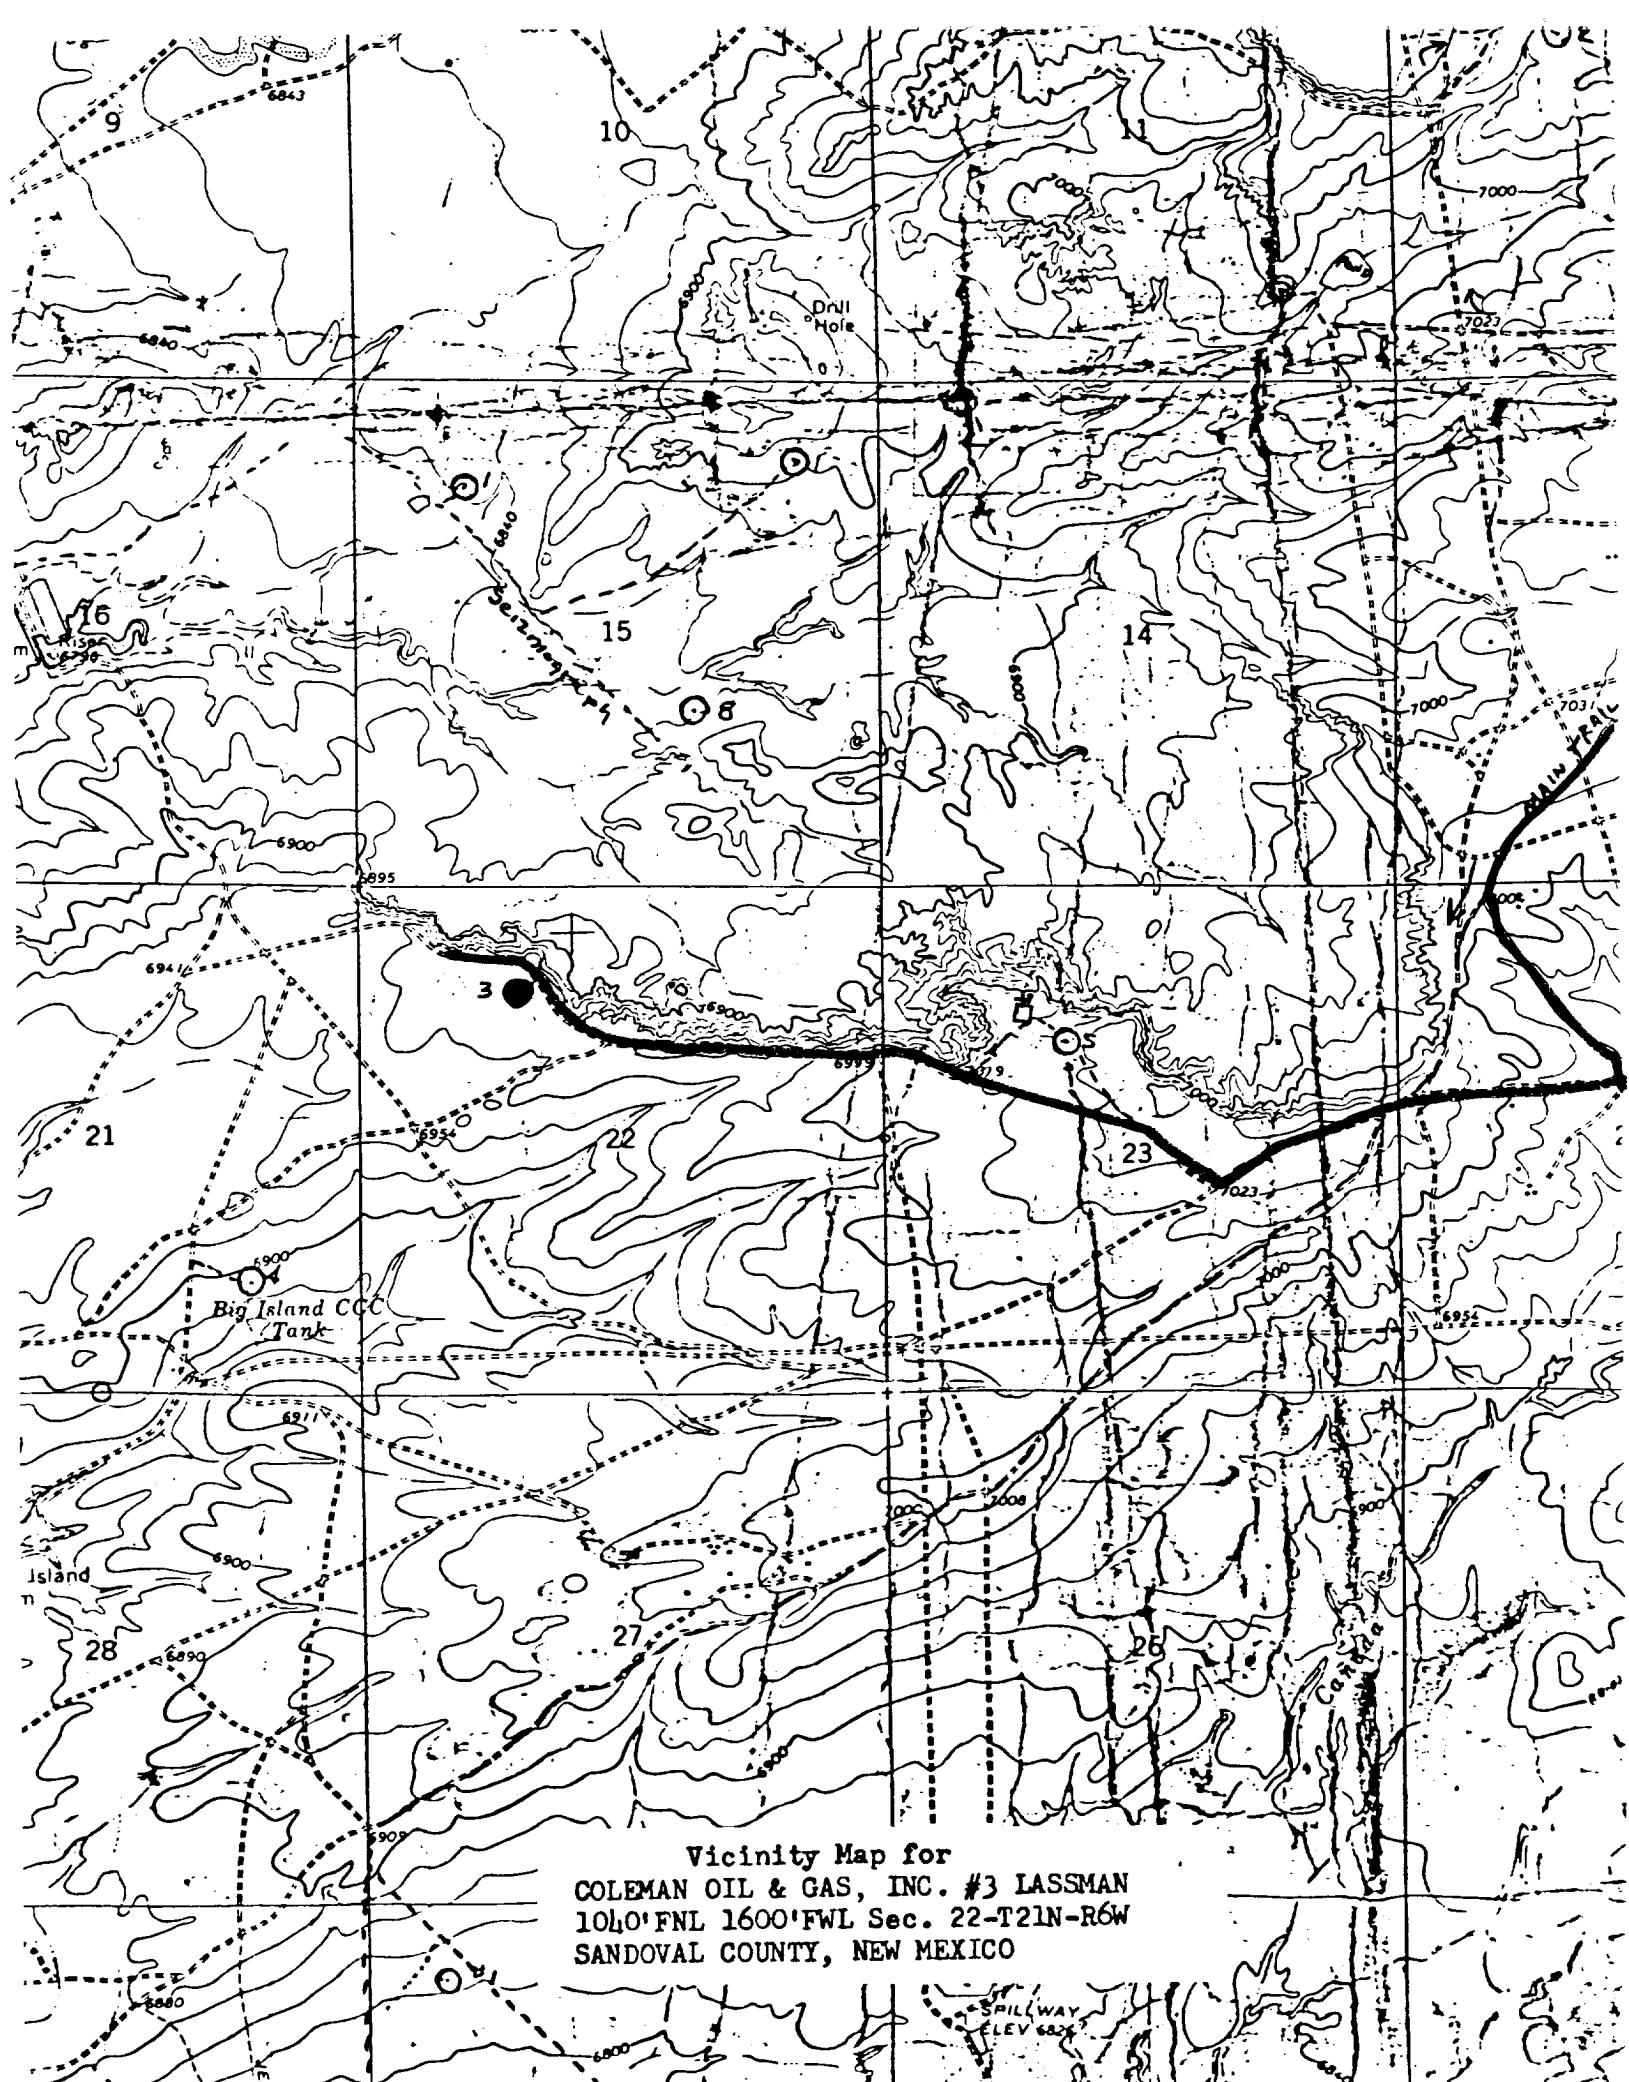

Vicinity Map for  
COLEMAN OIL & GAS, INC. #3 LASSMAN  
1040'FNL 1600'FWL Sec. 22-T21N-R6W  
SANDOVAL COUNTY, NEW MEXICO

LASSMAN FEDERAL LEASE  
NM 36941




R-6-M

٢١٤

# LOCATION LAYOUT

COLEMAN OIL & GAS, INC. # 3 LASSMAN

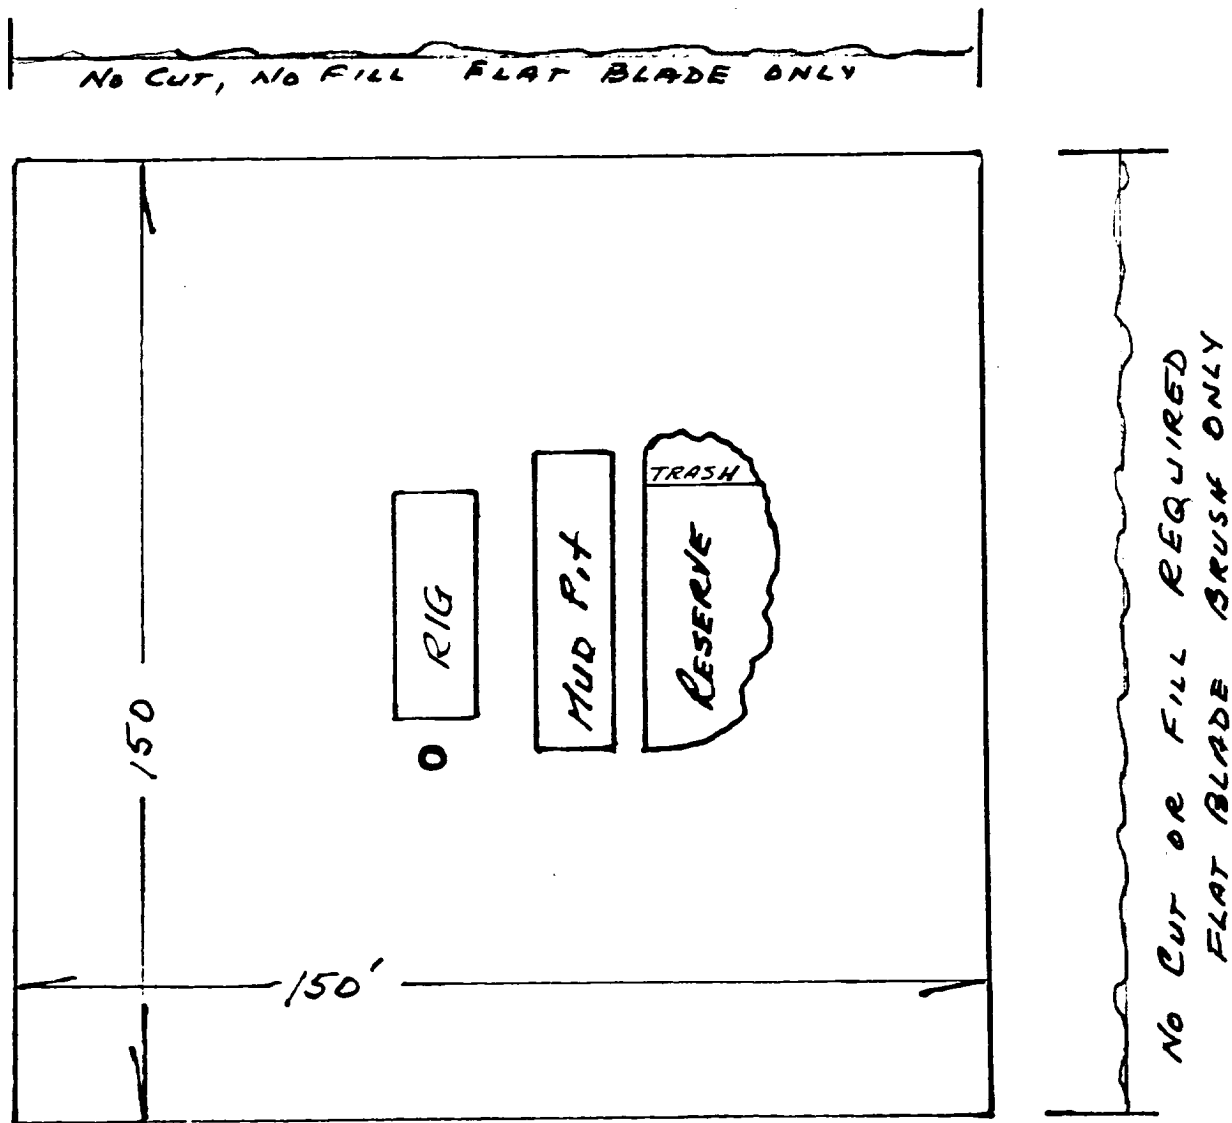

SCALE: 1 INCH = 30 FEET

