

OIL CONSERVATION COMMISSION
3 DISTRICT

OIL CONSERVATION COMMISSION
BOX 2088
SANTA FE, NEW MEXICO

DATE 5-23-72

Re: Proposed NSP _____

Proposed NWI _____

Proposed NSL _____

Proposed NFO _____

Proposed MC ✓

Gentlemen:

I have examined the application dated 5-17-72
for the Wynn + Brooks Federal 3 D-13.27-8
Operator Lease and Well No. S-T-R

and my recommendations are as follows:

Approved

Yours very truly,

Ernest C. Ames

NEW MEXICO OIL CONSERVATION COMMISSION
SANTA FE, NEW MEXICO
APPLICATION FOR MULTIPLE COMPLETION

Form C-107
5-1-61

| | | | |
|--|-------------------|---------------------------|------------------------|
| Operator Wynn & Brooks | | County San Juan | Date 5-17-72 |
| Address 1525 Republic Bank Bldg. Dallas, Texas 75201 | | Lease Federal E | Well No. 3 |
| Location of Well D | Unit 13 | Township 27N | Range 8W |

1. Has the New Mexico Oil Conservation Commission heretofore authorized the multiple completion of a well in these same pools or in the same zones within one mile of the subject well? YES _____ NO X
2. If answer is yes, identify one such instance: Order No. _____ ; Operator Lease, and Well No.: _____

| 3. The following facts are submitted: | Upper Zone | Intermediate Zone | Lower Zone |
|--|------------------|-------------------|------------------|
| a. Name of Pool and Formation | Chacra | | Mesaverde |
| b. Top and Bottom of Pay Section (Perforations) | 3964-3972 | | 4664-5439 |
| c. Type of production (Oil or Gas) | Gas | | Gas |
| d. Method of Production (Flowing or Artificial Lift) | Flowing | | Flowing |

4. The following are attached. (Please check YES or NO)


- | Yes | No | |
|-------------------------------------|--------------------------|---|
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | a. Diagrammatic Sketch of the Multiple Completion, showing all casing strings, including diameters and setting depths, centralizers and/or turbolizers and location thereof, quantities used and top of cement, perforated intervals, tubing strings, including diameters and setting depth, location and type of packers and side door chokes, and such other information as may be pertinent. |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | b. Plat showing the location of all wells on applicant's lease, all offset wells on offset leases, and the names and addresses of operators of all leases offsetting applicant's lease. |
| <input type="checkbox"/> | <input type="checkbox"/> | c. Waivers consenting to such multiple completion from each offset operator, or in lieu thereof, evidence that said offset operators have been furnished copies of the application.* |
| <input type="checkbox"/> | <input type="checkbox"/> | d. Electrical log of the well or other acceptable log with tops and bottoms of producing zones and intervals of perforation indicated thereon. (If such log is not available at the time application is filed it shall be submitted as provided by Rule 112-A.) |

5. List all offset operators to the lease on which this well is located together with their correct mailing address.

El Paso Natural Gas Company, El Paso, Texas

6. Were all operators listed in Item 5 above notified and furnished a copy of this application? YES X NO ____ . If answer is yes, give date of such notification **May 17, 1972**.

CERTIFICATE: I, the undersigned, state that I am the **Operator** of the **well** **XXXXXX**, and that I am authorized by said company to make this report; and that this report was prepared under my supervision and direction and that the facts stated therein are true, correct and complete to the best of my knowledge.


Signature

*Should waivers from all offset operators not accompany an application for administrative approval, the New Mexico Oil Conservation Commission will hold the application for a period of twenty (20) days from date of receipt by the Commission's Santa Fe office. If, after said twenty-day period, no protest nor request for hearing is received by the Santa Fe office, the application will then be processed.

NOTE: If the proposed multiple completion will result in an unorthodox well location and/or a non-standard proration unit in one or more of the producing zones, then separate application for approval of the same should be filed simultaneously with this application.

WYNN & BROOKS
DUAL COMPLETION SCHEMATIC

Casing:

Surface: 4 jts. 8-5/8"
23# @ 176.50' w/100 sx
Intermediate: _____
 None
Production: 131 jts. 4 1/2"
9.5# @ 5500 w/512 sx

Tubing: all 1-1/4" I.J.

Upper zone: 125 jts.
@ 3950

Lower zone: 168 jts.
@ 5340' (24 jts. below
packer, 144 jts. above)

B&R seating nipple on
bottom long string, above
2' perforated pup jt.
short string

MESAVERDE COMPLETION

Cliffhouse: 4664-88
 (24 holes)
SWF: 45,000# 20-40 sd
 45,000 gal wtr.
Point Lookout: 5338-48;
 5372-74; 5427-29;
 5437-39 (32 holes)
SWF: 55,000 # 20-40 sd
 55,000 gal wtr.

Well: Federal E No. 3

SF 078476

Location: 790' FNL - 790' FWL

Sec. 13 T 27 N R 8 W NMPM

County: San Juan

State: New Mexico

Elevation: _____

G.L. 6672

D.F. 6684

Zero 6685

Producing Zones: _____

Blanco Mesaverde

Undesignated Chacra

Chacra Completion

Perfs: 3964-72 (24 holes)


SWF: 30,000# 20-40 sd
 30,000 gal wtr.

Stage Collar: None

Packer: Otis R-4 @ 4580 btm.

PBTD: 5452

TD: 5500

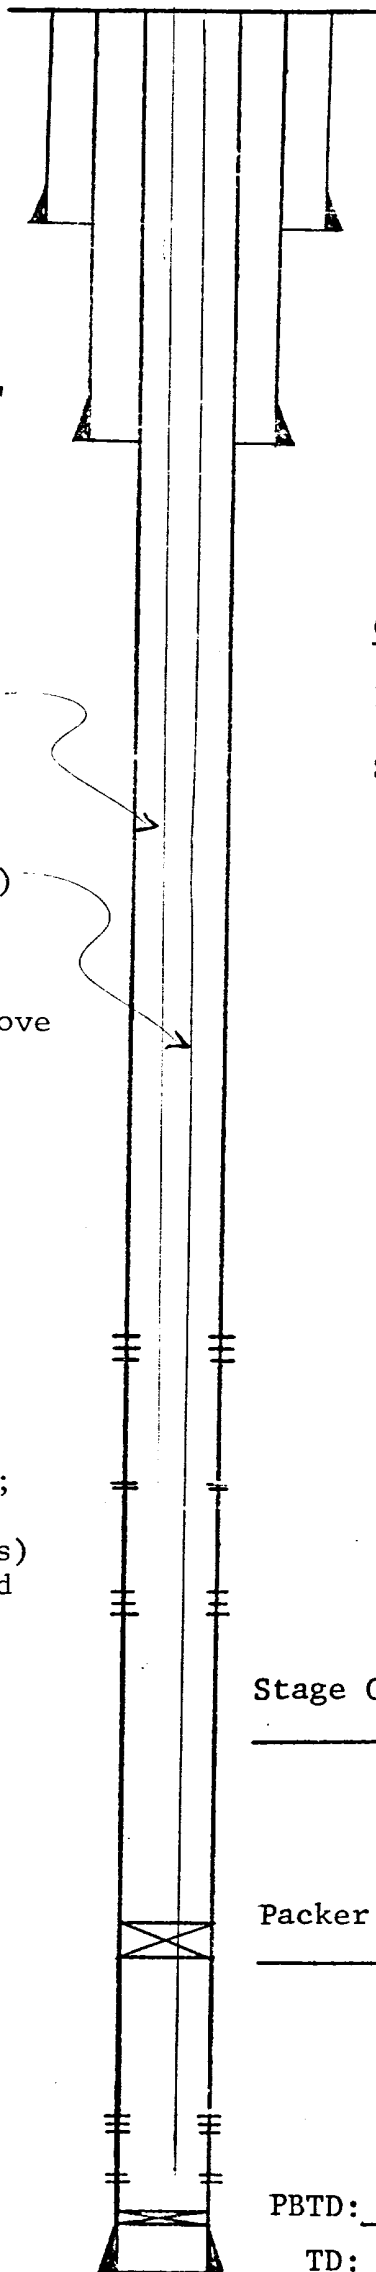

WYNN & BROOKS
DUAL COMPLETION SCHEMATIC

Casing:

Surface: 4 jts. 8-5/8"
23# @ 176.50' w/100 sx
Intermediate: _____
 None
Production: 131 jts. 4 1/2"
9.5# @ 5500 w/512 sx

Tubing: all 1-1/4" I.J.

Upper zone: 125 jts.
@ 3950

Lower zone: 158 jts.
@ 5340' (24 jts. below
packer, 144 jts. above)

B&R seating nipple on
bottom long string, above
2' perforated pup jt.
short string

MESAVERDE COMPLETION

Cliffhouse: 4664-88
 (24 holes)
SWF: 45,000# 20-40 sd
 45,000 gal wtr.
Point Lookout: 5338-48;
 5372-74; 5427-29;
 5437-39 (32 holes)
SWF: 55,000 # 20-40 sd
 55,000 gal wtr.

Well: Federal E No. 3

SF 078476

Location: 790' FNL - 790' FWL

Sec. 13 T27N R 8W NMPM

County: San Juan

State: New Mexico

Elevation: _____

G.L. 6672

D.F. 6684

Zero 6685

Producing Zones: _____

Blanco Mesaverde

Undesignated Chacra

Chacra Completion

Perfs: 3964-72 (24 holes)

SWF: 30,000# 20-40 sd
30,000 gal wtr.

Stage Collar: None

Packer: Otis R-4 @ 4580 btm.

PBTD: 5452

TD: 5500

