

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. NM21454
b. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <input type="checkbox"/> SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME
2. NAME OF OPERATOR Jack A. Cole		7. UNIT AGREEMENT NAME
3. ADDRESS OF OPERATOR P. O. Box 191, Farmington, New Mexico 87401		8. FARM OR LEASE NAME Alamos Canyon
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)* At surface 945/N and 1650/W Sec. 9-T21N-R6W C At proposed prod. zone Same		9. WELL NO. 10
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE* 14 miles SW Counselors, N.M.		10. FIELD AND POOL, OR WILDCAT Wildcat <i>Area</i>
15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any) 945	16. NO. OF ACRES IN LEASE 1040	11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 9-T21N-R6W
18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 2000'	19. PROPOSED DEPTH 1900	12. COUNTY OR PARISH Sandoval
21. ELEVATIONS (Show whether DF, RT, GR, etc.) 6819 Gr.		13. STATE N.M.
23. PROPOSED CASING AND CEMENTING PROGRAM		17. NO. OF ACRES ASSIGNED TO THIS WELL 160
20. ROTARY OR CABLE TOOLS Rotary		22. APPROX. DATE WORK WILL START*


SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4	8 5/8	24.0	120	Circulate
6 3/4	4 1/2	10.5	2000	Circulate

It is proposed to drill to T.D. of 2000'. Run ES-Ind logs, run 4½ casing to T.D. Perforate casing opposite Chacra sand and sand-water frac treat. Run 1" tubing to 1800 and complete as Chacra natural gas well.

Gas is not dedicated to a pipeline.

See Attached.

This action is subject to administrative
appeal pursuant to 30 CFR 290.

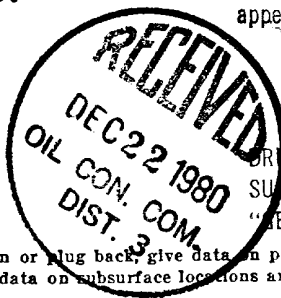

DRILLING OPERATIONS AUTHORIZED ARE
SUBJECT TO COMPLIANCE WITH ATTACHED
"GENERAL REQUIREMENTS"

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Jack A. Cole TITLE Operator DATE Nov. 25, 1980

(This space for Federal or State office use)

PERMIT NO. **APPROVED
AS AMENDED**

APPROVAL DATE

APPROVED BY James F. Sims
CONDITIONS OF APPROVAL, IF ANY

TITLE

DATE

**JAMES F. SIMS
DISTRICT ENGINEER**

NMOCC

*See Instructions On Reverse Side

All distances must be from the outer boundaries of the Section.


Operator JACK A. COLE			Lease ALAMOS CANYON		Well No. 10
Unit Letter C	Section 9	Township 21N	Range 6W	County Sandoval	
Actual Footage Location of Well: 945 feet from the North line and 1650 feet from the West line					
Ground Level Elev: 6819	Producing Formation		Pool		Dedicated Acreage: Acres

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

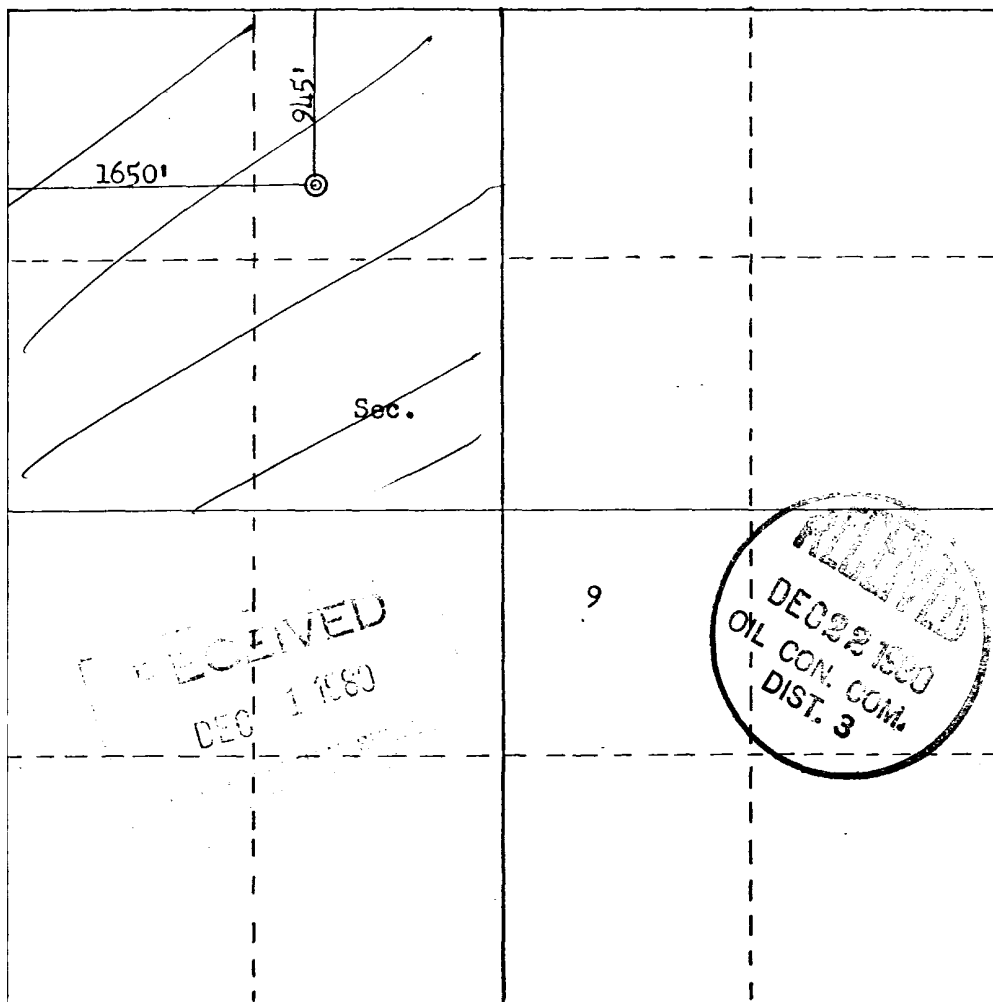

Scale: 1"=1000'

CERTIFICATION	
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.	
Name <i>Jack A. Cole</i>	Operator
Position	
Company November 25, 1980	Date
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.	
Date Surveyed November 24, 1980	Registered Professional Engineer and Land Surveyor <i>Fred B. Kerr Jr.</i> Fred B. Kerr Jr.
Certificate No. 3950 JR.	

ADDENDUM TO INTENT TO DRILL APPLICATION

Jack A. Cole
Alamos Canyon No. 10
945/N and 1650/W Sec. 9-T21N-R6W
Sandoval County, New Mexico

1. A schematic diagram of the blowout prevention equipment is enclosed. The BOP's will be hydraulically tested to the full working pressure after nipping up and after any use under pressure. Pipe rams will be operationally checked each 24 hour period as will blind rams each time pipe is pulled out of hole. Such checks of BOP equipment will be noted on daily drilling reports.

Accessories to the BOP will include floor safety valve, and choke manifold with pressure rating equivalent to the BOP stack.
2. All casing and tubing strings will be new. The 8 5/8" surface casing will be 24.0 lb/ft, K-55 8 round ST&C. The 4 1/2" casing will be K-55 8 round ST&C.
3. The type of cement to be used is as follows:
 8 5/8" surface casing: Circulate 100 sacks of Class B, 2% CaCl₂.


 4 1/2" production casing: 150 sacks 50-50 pozmix, 2% gel to raise to surface.
4. The surface formation is Tertiary Wasatch-San Jose.
5. The estimated tops of geologic markers:

Ojo Alamo Sand	410
Fruitland Shale	610
Pictured Cliffs Sand	930
Lewis Shale	1110
Chacra Sand	1360
Mesaverde Sand	1710
6. Anticipated water zones:

Ojo Alamo Sand
Pictured Cliffs Sand
Mesaverde Sand
7. Anticipated gas bearing zone:

Chacra Sand

8. To protect the Ojo Alamo aquifer it is proposed to cement the production string from TD to the surface.

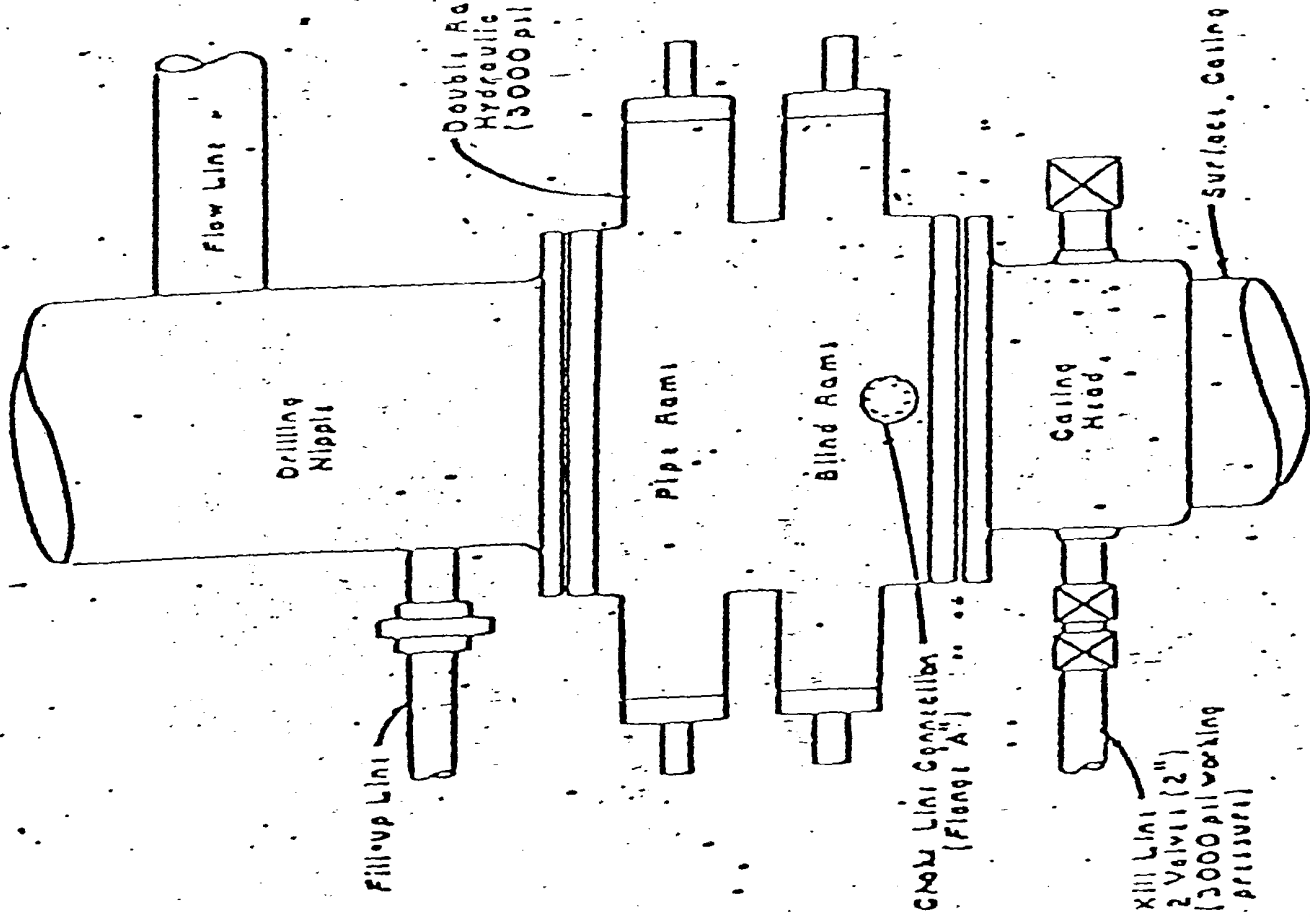

Flanged Casing with Pressure Gate in Outside Opening

Long Perforated Casing

2" Plug Valve
2000 CWP

Perforated Casing
Vertical

Flange 2"

PLAN VIEW - CHOKE MANIFOLD

JACK A. COLE
PETROLEUM GEOLOGIST
P.O. BOX 191
FARMINGTON, NEW MEXICO 87401
(505) 325 - 1415

November 25, 1980

United States Department of Interior
Geological Survey
P. O. Box 959
Farmington, New Mexico 87401

Reference: 13 Point Environmental Program - Jack A. Cole -
Alamos Canyon #10, 945/N and 1650/W Sec. 9-T21N-R6W
Sandoval County, New Mexico

Gentlemen:


In compliance with governmental requirements, I hereby respectfully submit the following environmental data to accompany the application for permit to drill the above referenced test well.

1. Access to location from N.M. Highway 44, turn right at Counselors New Mexico, on main road. Travel south approximately 12 miles and turn left approximately 3 miles, all on existing roads.
2. Existing road to be utilized to within $\frac{1}{4}$ mile of drillsite from which point a minimum width graded access road to be prepared to drillsite.
3. Well location as shown on attached survey plat and map.
4. Lateral road to well location as described in Item 2.
5. If gas production established, adequate production facilities to be installed immediately west of wellsite to accommodate a pipeline connection.
6. Water will be trucked to location from nearest source, Chapman water hole at Lybrook.
7. A reserve pit will be utilized for waste disposal. Trash will be buried 4 feet below surface.
8. No camps are planned.

Aztec Drilling Company.

11. Following drilling, mud pits to be fenced and allowed to dry, then filled with surface soil previously evacuated. Location, except for wellhead site and production equipment, to be restored to original condition as much as practicable.
12. The location is located in an area of relatively flat topography. No major rivers are in the immediate vicinity.
13. Three sides of reserve pit shall be fenced during drilling operations and the fourth side to be fenced after rig moves.

Very truly yours,

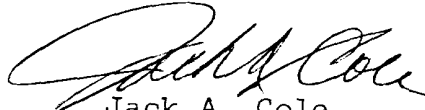

Jack A. Cole

JAC/plc

JACK A. COLE
PETROLEUM GEOLOGIST
P.O. BOX 191
FARMINGTON, NEW MEXICO 87401
(505) 325-1415

November 25, 1980


United States Geological Survey
P. O. Box 959
Farmington, New Mexico 87401

Certification: Operator's Representative-Jack A. Cole,
P. O. Box 191, Farmington, New Mexico
(505) 325-1415 - Alamos Canyon #10

Gentlemen:


I hereby certify that I, or persons under my direct supervision, have inspected the proposed drilling site and access routes; that I am familiar with the conditions that presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by Jack A. Cole, and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

Very truly yours,

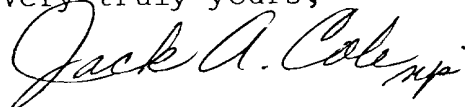A handwritten signature in cursive script that reads "Jack A. Cole" followed by a small flourish.

Jack A. Cole
Operator's Representative

Location Layout
 Jack A. Cole
 ALAMOS CANYON #10
 Sec. 9-T21N-R6W

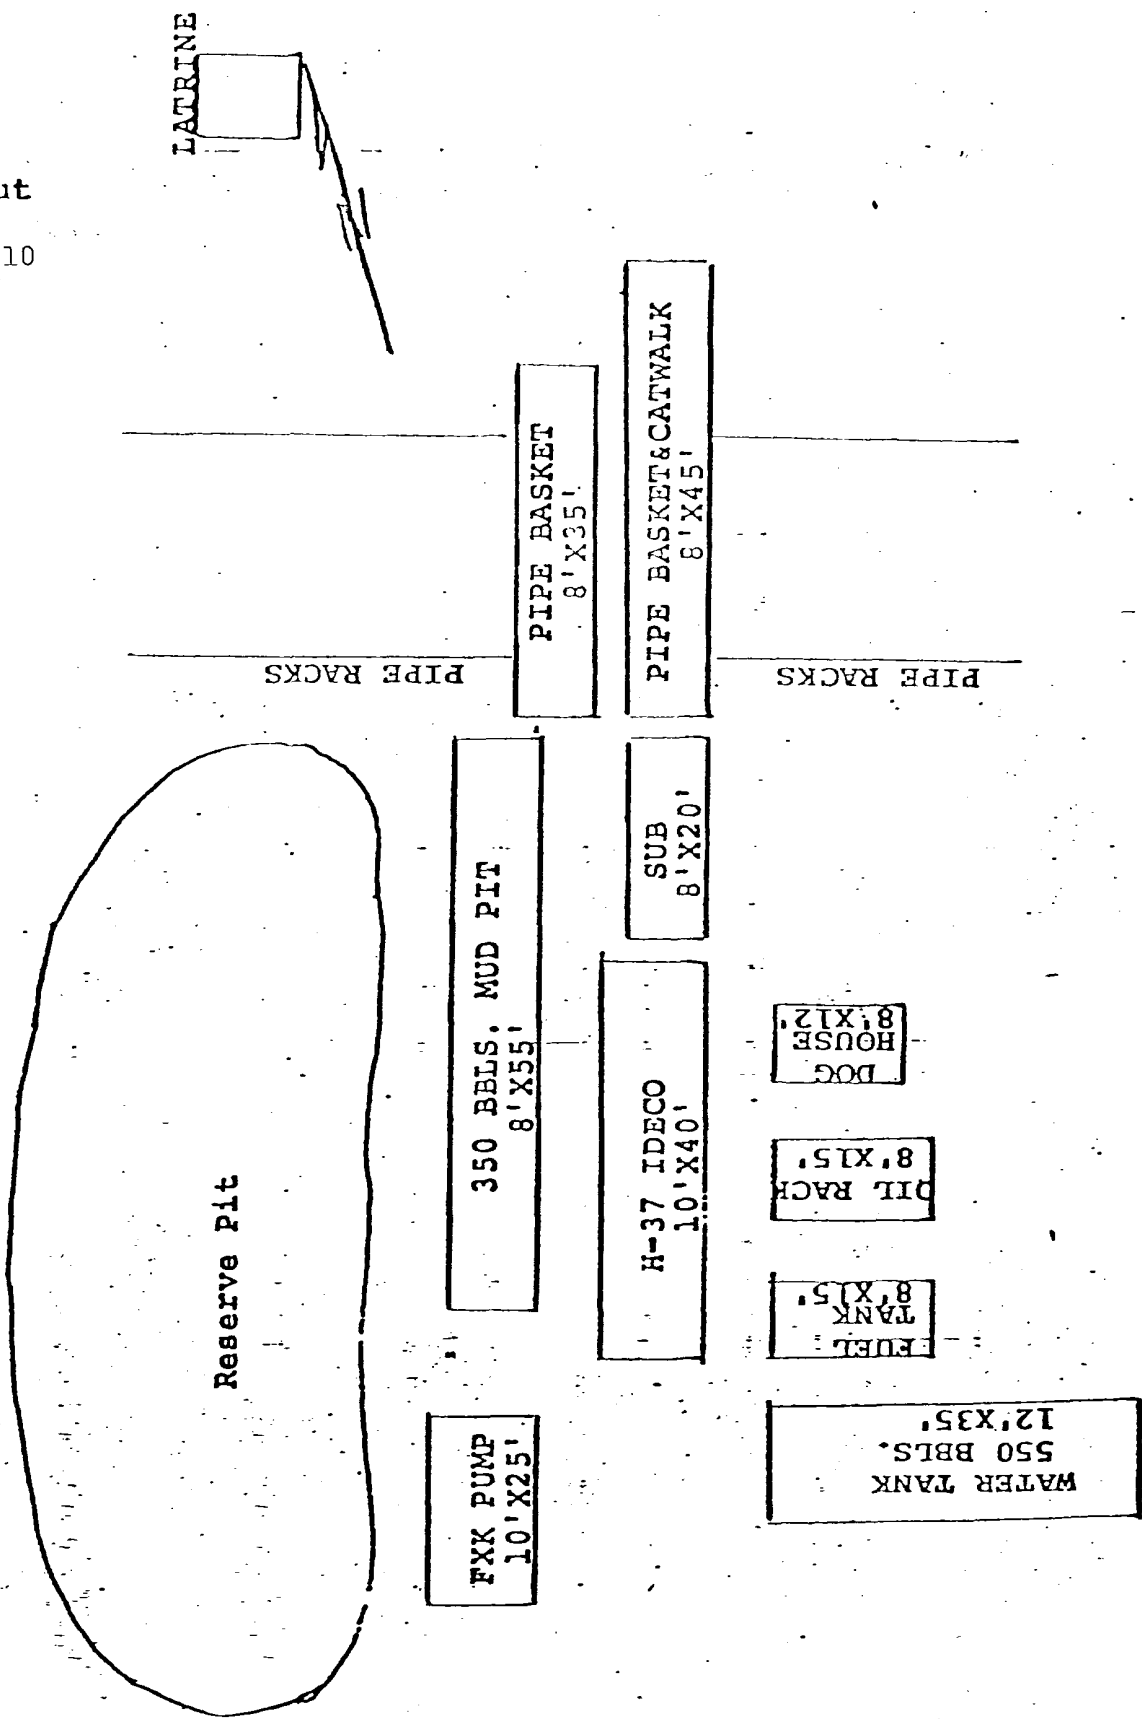

Aztec Well Service
 Rig No. 1

JACK A. COLE
ALAMOS CANYON #10
945/N and 1650/W Sec. 9-T21N-R6W
Sandoval County, New Mexico

Seven Point Well Control Program

1. Surface Casing.
See Application for Permit to Drill.
2. Spools and Flanges.
 - A. Surface Casing - 10", Series 600, 1500 psi W.P.
 - B. Production, 10", Series 600, 1500 psi W.P.
 - C. Tubing Head - Series 600, 1500 psi W.P.
3. Intermediate Casing.
None
4. Blowout Preventers.
Production Hole - 10", 300 psi
Fill, kill and choke manifold - 5000 psi W.P.
5. Additional Equipment (If necessary)
 - A. Kelly Cock
 - B. Bit Float
 - C. Degasser
 - D. Pit Level Indicator
 - E. Sub with Valve for drill pipe.
6. Anticipated Bottom Hole Pressure.
1000 psi. Current mud program is for 9.2 lb./gal. mud with hydrostatic head of 1500 psi at 3000 feet. Mud weight will be increased if necessary for higher pressures.
7. Drilling fluid.
Low solids. Low water loss.

