



TONEY ANAYA
GOVERNOR

STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENT
OIL CONSERVATION DIVISION
AZTEC DISTRICT OFFICE

1000 RIO BRAZOS ROAD
AZTEC, NEW MEXICO 87410
(505) 334-6178

January 11, 1984

Wexpro Co.
P.O. Box 458
Rock Springs, WY 82901

Re: Armijo Reservoir #1 P&A

Gentlemen:

The attached form C-103, Notice of Intention to Plug and Abandon your Armijo Reservoir #1, has been approved as amended with the following conditions:

1. All plugs shall be of class A, B, or C neat cement and may be accelerated by up to 3% Ca Cl.
2. All plugs are to be separated by gel mud of minimum nine pounds per gallon.
3. This office must be notified a minimum of 24 hours before plugging operations are commenced.

The subsequent report of plugging cannot be approved until the following requirements have been met:

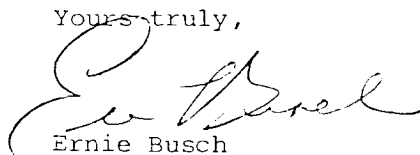
1. All pits have been filled and leveled.
2. A steel marker at least 4" in diameter and approximately 4' above ground level has been set in cement. The well name and number, and the well location by unit letter, section, township, and range shall be permanently welded, stamped, or engraved into the metal of the marker.
3. The location has been cleared and cleaned.
4. The deadman wires have been removed or cut off 4' below ground level.

Wexpro Co.
January 11, 1984
Page two

5. All information required by rule 1105 has been filed.

The subsequent notice of plugging must state that the above work has been done and that the site is ready for inspection.

Yours truly,

A handwritten signature in cursive script, appearing to read "Ernie Busch".

Ernie Busch
Geologist

EB/dj