

Only 1 Table

(SUBMIT IN TRIPLICATE)


Indian Agency _____

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Ute Mountain Tribal

Allottee _____

Lease No. 14-20-604-125

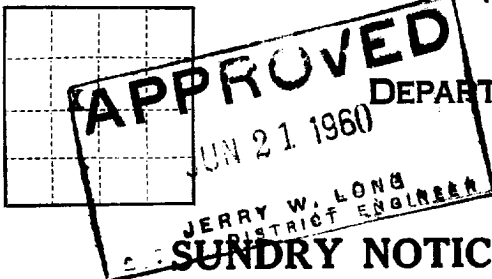

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	1960
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL	SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	X
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Ute Mountain Tribal "E" Farmington, New Mexico February 5, 1960

Well No. 6 is located 1980 ft. from N line and 2310 ft. from E line of sec. 26

NW/4 of Section 26 T-31N R-15W N.M.P.M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Verde Gallup San Juan New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 5549 ft. (RDB)

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

As a result of not obtaining oil in commercial quantities Ute Mountain Tribal "E" Well No. 6 was plugged and abandoned as follows on February 3, 1960.

1. Pulled rods, tubing and 4" liner.
2. Spotted 50 sack cement plug and squeezed open hole section with minimum pressure leaving cement fill-up 3071-3295'.
3. Filled hole with fluid.
4. Pumped 50 sack cement plug down 5-1/2" 8-5/8" annulus 0-214' and squeezed with 400 psi to anchor pipe.
5. Spotted 5 sacks of cement for surface plug 0-40 and erected dry hole marker.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company PAN AMERICAN PETROLEUM CORPORATION

Address P.O. Box 487

Farmington, New Mexico

Attn: L. O. Speer, Jr.

ORIGINAL SIGNED BY
R. M. Bauer, Jr.

By _____

Title Area Engineer

