

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☒ gas ☐ other ☐
well well
2. NAME OF OPERATOR
Lewis Energy Corporation
3. ADDRESS OF OPERATOR
232 N. Schwartz, Farmington, NM 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 510' FSL 565' FEL S1 T20N R3W
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

- TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) Spud & Surface Casing

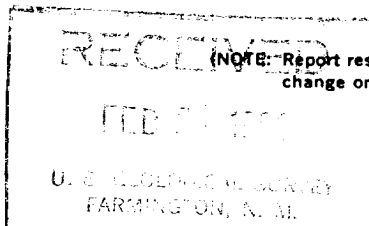

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

The Lewis 1-20-3 #2 was spudded on 1/9/82 @ 5:00 PM. A 12-1/4" hole was drilled to 985'. On 1/10/82, 24 Jts. of 8-5/8" 24# J-55 casing was run and set @ 980'. Float collar set @ 940'. Casing was cemented w/650 sx class "B" + 2% CaCL. Cement was circulated to surface w/30 bbls. returns. Surface casing was tested to 1000 psi for 30 min. w/no pressure decline. The top of the Ojo Alamo is @ 650'. The top of the Kirtland - Fruitland is @ 735'.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Zachary C. Lewis TITLE Operations Mgr. DATE 2/19/82

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____ **ACCEPTED FOR RECORD**

CONDITIONS OF APPROVAL, IF ANY: