UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on	Wells
1. Type of Well GAS	5. Lease Number SF-078389 6. If Indian, All.or Tribe Name 7. Unit Agreement Name
 Name of Operator Meridian Oil Inc. Address & Phone No. of Operator Box 4289, Farmington, NM 87499 (505)326-9700 Location of Well, Footage, Sec, T, R, M. 980'S, 800'W Sec.3, T-31-N, R-10-W, NMPM 	8. Well Name & Number Lucerne A #6 9. API Well No. 10.Field and Pool Blanco Pic.Cliffs 11.County and State
<pre>X Notice of Intent</pre>	Rio Arriba Co., NM OTICE, REPORT, OTHER DATA f Action Change of Plans New Construction Non-Routine Fracturing Water Shut Off Conversion to Injection
It is proposed to plug and abandon this well per and diagram. APRI 2 1990 OIL CON. DIV.	APPRO MARIA MANAGER
14. I hereby certify that the foregoing is true Signed Land Manager Title Regulatory (This space for Federal or State office use)	and correct Affairs Date <u>4-9-9</u> 6
APPROVED BY TITLE CONDITION OF APPROVAL, IF ANY:	DATE

J 188 And the same of the same


Plug and Abandon Procedure Lucerne A #6

- 1. TIH with 1 1/4" IJ tubing open-ended to 165'. Establish circulation with water.
- Cement down 1 1/4" tubing with class 'B' cement. Pump cement until good cement returns to surface (calculated volume is 50 sacks). TOOH with 1 1/4" tubing. Fill to surface with cement.
- 3. Cut off wellhead and install dry hole marker.

ROS/4-9-90

Lucerne A #6 SW/4 Section 3, T-31-N, R-10-W San Juan County, New Mexico

Wellbore Schematics

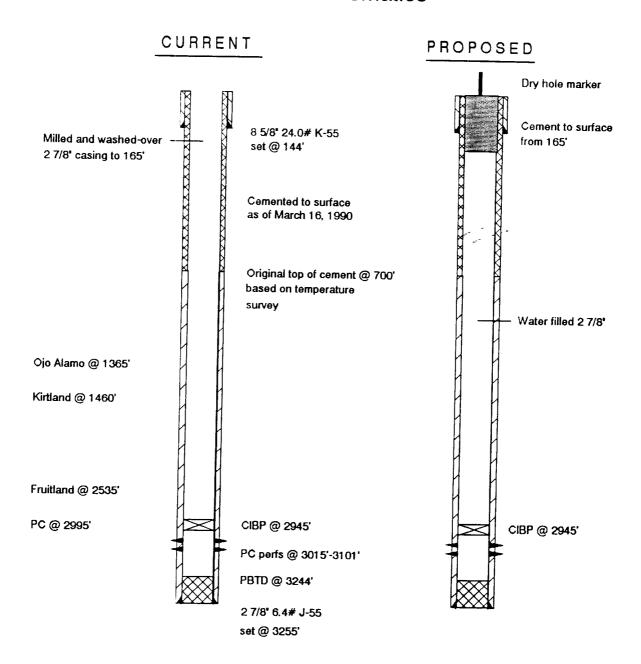

MERIDIAN OIL CO. ENGINEERING CALCULATION

Sheet:
Date: 4996

LUCERNE A #6 SM 3-31-10 SAN JUAN CO, NM

NOTE : ANGLE OF SURFACE CASING EXAGGERATED FOR ILLUSTRATION PURPOSES. DEVIATION @ 152' WAS 18" = 4" DEPARTURE FROM VERTIC 838" @ 144" (ID=8.097", DUFT = 7.972") CEMENTED-FROM TO TO SURFACE WASHOVER TO 165' ORIGINAL DRILL TO > 10" + FILLED WITH CEMENT FROM RECENT SOUREZE JOBS.