

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**


(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well ☒ gas well ☐ other ☐
2. NAME OF OPERATOR  
DAVE M. THOMAS, JR.
3. ADDRESS OF OPERATOR  
P.O. Box 2026 Farmington, N.M. 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 990'FSL, 1850'FEL  
AT TOP PROD. INTERVAL: Same  
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:


- TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

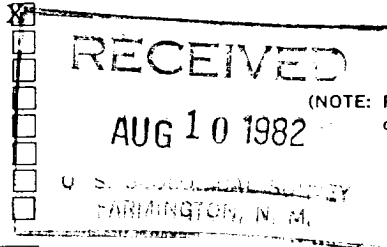

5. LEASE  
Contract No. 55-A
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
Jicarilla Apache
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME  
Chacon Jicarilla Apache "D"
9. WELL NO.  
111
10. FIELD OR WILDCAT NAME  
Chacon Dakota Associated
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 36-T23N-R3W  
N.M.P.M.
12. COUNTY OR PARISH  
Sandoval
13. STATE  
N.M.
14. API NO.  
30-043-20639
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
7192'G.L.

(NOTE: Report results of multiple completion or zone change on Form 9-330-3)



17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

8/8/82 T.D. 7264

Ran 178 joints 4-1/2", 10.50 & 11.60 K-55 casing (7262.19') set at 7264' with:

First Stage: 610 sacks of 50-50 Pozmix (2% Gel) with 6-1/4 lbs. Gilsonite and 6 lbs. salt per sack. Calculated top of cement 5521'.

Second Stage: 350 sacks 65-35 Pozmix (12% Gel) with 6-1/4 lbs. Gilsonite per sack, followed by 50 sacks Class "B" Neat Cement. Cement circulated to surface. Stage collar at 3014'.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

FOR: DAVE M. THOMAS, JR.

18. I hereby certify that the foregoing is true and correct

SIGNED EWELL N. WALSH, PE ORIGINAL SIGNED BY President, Walsh Engr. DATE 8/9/82  
EWELL N. WALSH, PE TITLE & Prod. Corp.

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

**ACCEPTED FOR RECORD**

**AUG 10 1982**

\*See Instructions on Reverse Side

NMOCC

BY EWELL N. WALSH FARMINGTON DISTRICT