

January 2023

Volume 1 C-147 Permit Package for Tatanka North AST Containment Section 35 T25S R35E, Lea County

Transmittal Letter

C-147 Form

Operations and Closure Plans

Siting Criteria Demonstration Text and Plates

Appendix Well Logs and USGS Data Appendix

Site Photos



View northeast from center of USGS mapped watercourse and USA mapped wetland to drilling pad that is the location of the Tatanka North AST Containment

Prepared for:
Franklin Mountain Energy LLC
44 Cook Street Suite 1000
Denver, CO 80206

Prepared by:
R.T. Hicks Consultants, Ltd.
901 Rio Grande NW Suite F-142
Albuquerque, New Mexico 87104

R. T. HICKS CONSULTANTS, LTD.

901 Rio Grande Blvd NW ▲ Suite F-142 ▲ Albuquerque, NM 87104 ▲ 505.266.5004 ▲ Since 1996

January 19, 2023

Ms. Leigh Barr
EMNRD - Oil Conservation Division
1220 S. St. Francis Drive
Santa Fe, NM 87505
Via E-Mail

Ms. Victoria Venegas
NMOCD - District 2
811 S. First St.
Artesia, NM 88210
Via E-Mail

RE: Franklin Mountain Energy, LLC
60,000 bbl. Tatanka North AST Containment, Section 35 T25S R35E, Lea County

Dear Ms. Barr and Ms. Venegas:

On behalf Franklin Mountain Energy, LLC (FME), R.T. Hicks Consultants is pleased to submit a C-147 permit application for the above-referenced project. Franklin anticipates that construction of the 60,000 bbl. ASTs will commence in Mid-Late January 2023 with produced water flowing into the containment no sooner than March 07, 2023.

Volume 1 of the C-147 package contains:

- The C-147 Form
- Operations & Maintenance Plan (2022 update) and Closure Plan (previously approved)
- Siting Criteria Demonstration

Volume 2 is all material that OCD has previously approved:

- Design/Construction Plan
- Engineering Drawings and Liner Specifications
- Well Water Services Manual
- Variances for AST Storage Containments

FME will transmit the registration package to OCD via the OCD online portal. In compliance with 19.15.34.10 of the Rule, this submission is copied to the BLM, the surface owner's representative. If you have any questions or concerns regarding this permit or the attached C-147, please contact me. As always, we appreciate your work ethic and diligence.

Sincerely,
R.T. Hicks Consultants



Randall T. Hicks PG
Principal

Copy: Franklin Mountain Energy, LLC,
Robert Gomez, BLM

Statement Explaining Why the Applicant Seeks a Variance for Monitoring of TATANKA Above Ground Storage Tank (AST) Containment

The prescriptive mandates of the Rule that are the subject of this variance request are the following subsections of NMAC 19.15.34

19.15.34.13 OPERATIONAL REQUIREMENTS FOR RECYCLING CONTAINMENTS:

A. The operator shall inspect the recycling containment and associated leak detection systems weekly while it contains fluids. The operator shall maintain a current log of such inspections and make the log available for review by the division upon request.

With respect to storage of produced water for use in lieu of fresh water, Rule 34 is written for earthen, lined pits, not free-standing modular open top tanks that employ liners as their primary fluid containment system. The authors of the Rule, and some OCD staff, considered these large ASTs as process tanks, not storage “containments.” Yet, the definition of a “containment” caused regulation of these ASTs under the Rule. No Rule is perfect.

With respect to this request for a variance:

- A modular impoundment does not exceed a capacity of 60,000 bbls.
- After E&P processes that employ ASTs are complete, the AST is typically
 - Removed and closed or
 - Placed in a “standby” mode with minimal residual fluid to keep the liner in place for future use

The applicant requests that the TATANKA AST Containment when not in use be exempt from weekly inspections per 19.15.34.13(A) under the following conditions

1. After completion of stimulation, the operator will leave 1-foot or 2-feet of produced water from the AST to provide enough water weight to protect the liner system from wind damage.
2. Every two months after evacuation of most of the water, the operator will record in the inspection log
 - a. the fluid level in the AST Containment and
 - b. a reading of fluid in the leak detection system
3. The operator will provide a schedule for removal of the AST Containment or the next stimulation event that will use the AST Containment.

Demonstration That the Variance Will Provide Equal or Better Protection of Fresh Water, Public Health, and the Environment

During what some call a standby period between stimulation events or closure, 1-2 feet of residual fluid in the AST is very small compared to the volume of fluid stored in above-ground containments, for which the Rule is written. Monitoring of the leak detection system every two months in an AST with only 1-2 feet of standing fluid to identify a loss of integrity of the

primary liner provides equal protection of fresh water versus weekly or monthly monitoring of a large in-ground containment. Fewer trips to monitor the leak detection system of a nearly empty AST minimizes travel, thereby providing better protection of public health (fewer road accidents) and the environment (less emissions).

In a typical in-ground containment (200,000+ bbls), weekly monitoring of leak detection is appropriate. In an AST with 1-foot of water weight (6000 bbls), monitoring leak detection every eight weeks provides an equal level of protection.

C-147

State of New Mexico
Energy Minerals and Natural Resources
Department Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-147
Revised October 11, 2022

<https://www.emnrd.nm.gov/ocd/ocd-e-permitting/>

Recycling Facility and/or Recycling Containment

Type of Facility: ☒ Recycling Facility ☒ Recycling Containment*
Type of action: ☒ Permit ☐ Registration
☐ Modification ☐ Extension
☐ Closure ☐ Other (explain) _____

*** At the time C-147 is submitted to the division for a Recycling Containment, a copy shall be provided to the surface owner.**

Be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.
 Operator: Franklin Mountain Energy, LLC (For multiple operators attach page with information) OGRID #: 373910
 Address: 44 Cook Street, Suite 1000, Denver, CO 80206
 Facility or well name (include API# if associated with a well): Tatanka North AST Containment
 OCD Permit Number: _____ (For new facilities the permit number will be assigned by the district office)
 U/L or Qtr/Qtr N Section 35 Township 25S Range 35E County: Lea
 Surface Owner: ☒ Federal ☐ State ☐ Private ☐ Tribal Trust or Indian Allotment

2.
☒ **Recycling Facility:**
 Location of recycling facility (if applicable): Latitude 32.08238 Longitude -103.33993 NAD83
 Proposed Use: ☒ Drilling* ☒ Completion* ☒ Production* ☒ Plugging*
**The re-use of produced water may NOT be used until fresh water zones are cased and cemented*
☐ Other, *requires permit for other uses. Describe use, process, testing, volume of produced water and ensure there will be no adverse impact on groundwater or surface water.*
☒ Fluid Storage
☒ Above ground tanks ☒ Recycling containment ☐ Activity permitted under 19.15.17 NMAC explain type _____
☐ Activity permitted under 19.15.36 NMAC explain type: _____ ☐ Other explain _____
☐ For multiple or additional recycling containments, attach design and location information of each containment
☐ **Closure Report (required within 60 days of closure completion):** ☐ Recycling Facility Closure Completion Date: _____

3.
☒ **Recycling Containment:**
☐ Annual Extension after initial 5 years (attach summary of monthly leak detection inspections for previous year)
 Center of Recycling Containment (if applicable): Latitude 32.08238 Longitude -103.33993 NAD83
☐ For multiple or additional recycling containments, attach design and location information of each containment
☒ Lined ☒ Liner type: Thickness 40 & 30 mil ☒ LLDPE ☐ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
 Liner Seams: ☒ Welded ☐ Factory ☐ Other _____ Volume: 60,000 bbl Dimensions: L _____ x W _____ x D _____
☐ Recycling Containment Closure Completion Date: _____

4.

Bonding:

- ☒ Covered under bonding pursuant to 19.15.8 NMAC per 19.15.34.15(A)(2) NMAC (These containments are limited to only the wells owned or operated by the owners of the containment.)
- ☐ Bonding in accordance with 19.15.34.15(A)(1). Amount of bond \$ _____ (work on these facilities cannot commence until bonding amounts are approved)
- ☐ Attach closure cost estimate and documentation on how the closure cost was calculated.

5.

Fencing:

- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify See Variance

6.

Signs:

- ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☒ Signed in compliance with 19.15.16.8 NMAC

7.

Variances:

Justifications and/or demonstrations that the proposed variance will afford reasonable protection against contamination of fresh water, human health, and the environment.

Check the below box only if a variance is requested:

- ☒ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. If a Variance is requested, include the variance information on a separate page and attach it to the C-147 as part of the application.

If a Variance is requested, it must be approved prior to implementation. See attached variances

8.

Siting Criteria for Recycling Containment

Instructions: The applicant must provide attachments that demonstrate compliance for each siting criteria below as part of the application. Potential examples of the siting attachment source material are provided below under each criteria.

General siting**Ground water is less than 50 feet below the bottom of the Recycling Containment.**

NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Figures 1 and 2

☐ Yes ☒ No
☐ NA

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

☐ Yes ☒ No
☐ NA

- Written confirmation or verification from the municipality; written approval obtained from the municipality

Within the area overlying a subsurface mine.

☐ Yes ☒ No

- Written confirmation or verification or map from the NM EMNRD-Mining and Minerals Division

Within an unstable area.

☐ Yes ☒ No

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; topographic map

Within a 100-year floodplain. FEMA map

☐ Yes ☒ No

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

☐ Yes ☒ No

- Topographic map; visual inspection (certification) of the proposed site

Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

☐ Yes ☒ No

- Visual inspection (certification) of the proposed site; aerial photo; satellite image

Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.

☐ Yes ☒ No

- NM Office of the State Engineer - iWATERS database search; visual inspection (certification) of the proposed site

Within 500 feet of a wetland.

☐ Yes ☒ No

- US Fish and Wildlife Wetland Identification map; topographic map; visual inspection (certification) of the proposed site

9.

Recycling Facility and/or Containment Checklist:


Instructions: Each of the following items must be attached to the application. Indicate, by a check mark in the box, that the documents are attached.

- ☒ Design Plan - based upon the appropriate requirements.
- ☒ Operating and Maintenance Plan - based upon the appropriate requirements.
- ☒ Closure Plan - based upon the appropriate requirements.
- ☒ Site Specific Groundwater Data -
- ☒ Siting Criteria Compliance Demonstrations –
- ☒ **Certify that notice of the C-147 (only) has been sent to the surface owner(s)**

10.

Operator Application Certification:

I hereby certify that the information and attachments submitted with this application are true, accurate and complete to the best of my knowledge and belief.


Name (Print): Mark Hinaman P.E. Title: Director of Engineering Innovation
Signature:  Date: 01/17/2022
e-mail address: mark@fmellc.com Telephone: 970 069-0668 (cell)

11.

OCD Representative Signature: _____ **Approval Date:** _____

Title: _____ **OCD Permit Number:** _____

- ☐ OCD Conditions _____
- ☐ Additional OCD Conditions on Attachment _____

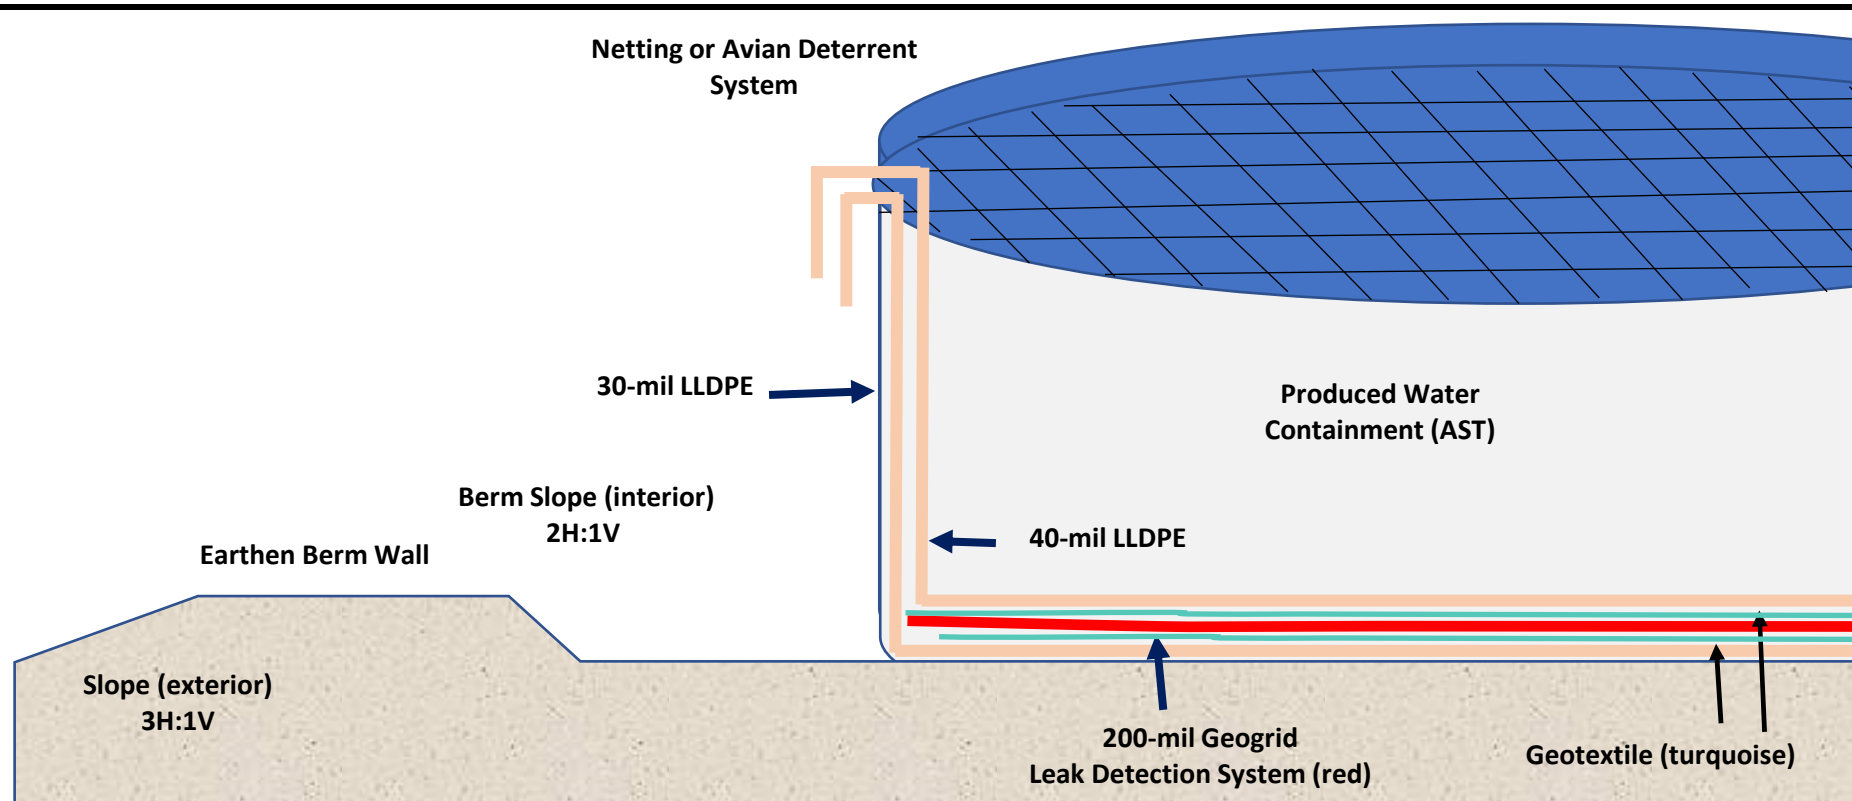

Description of Leak Detection System

- 40-mil LLDPE comprise primary liner and 30-mil LLDPE comprise the secondary liner
- 200-mil geogrid drainage layer lies between the primary and secondary liner per Plate 2
- Geotextile between the geogrid and each liner
- > 3-inch deep sump excavated on down slope side of AST per Sump Design Drawing
- A small hose runs from the collection sump to top of AST via tube (see Section D)
- Every week, a portable self-priming peristaltic pump connects to the leak detection system.
- The self-priming pump discharge hose runs back into the AST, on top of the primary liner
- If fluid is detected, it is tested for conductance to determine the origin of the water (i.e. produced water or condensation)

**R.T. Hicks Consultants
Albuquerque, NM**

Design Sketch

Plate 1




Well Water Solutions

May-21

Use laser level to determine slope of pad and low point of AST

- 200 mil geogrid placed
 - above 8-oz geotextile and 30-mil secondary liner
 - inside of AST after set up, before install of primary liner
 - below 40-mil primary liner
- 8-oz geotextile is placed
 - over the 30-mil LLDPE liner inside the steel AST ring
 - under the 40-mil primary liner inside the AST

Sump at lowest point of the AST set up

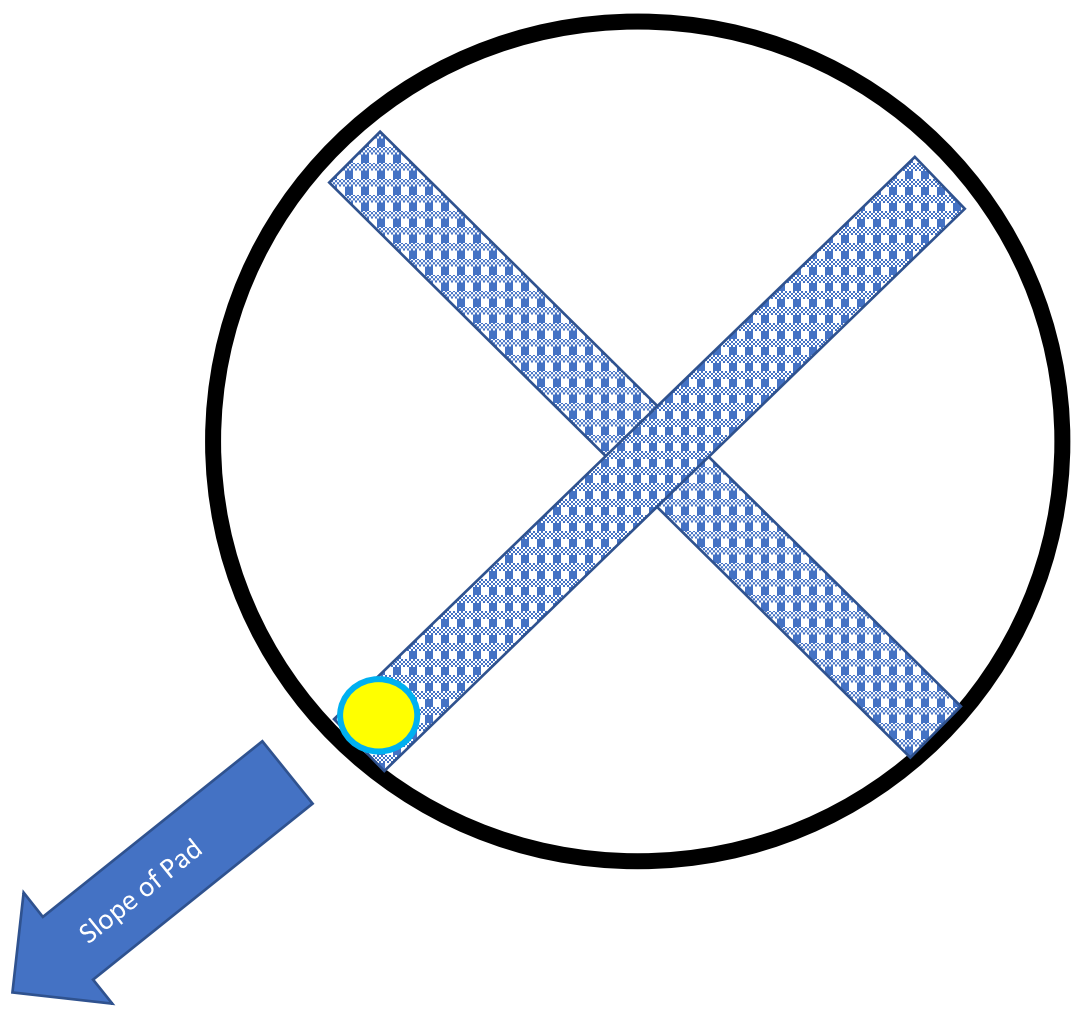

R.T. Hicks Consultants Albuquerque, NM	Layout of Geogrid Drainage Mat	Plate 1
	WWS AST	June 2021

OPERATIONS AND MAINTENANCE PLAN & CLOSURE PLAN

Operations and Maintenance Plan Above Ground Tank Containment (AST)

General Specifications

This plan provides additional protocols to cause the proposed recycling containments (AST Containments) to conform to NMOCD Rules.

The operator will maintain and operate the recycling containments and facility in accordance with the following plan to contain liquids and maintain the integrity of the liner to prevent contamination of fresh water and protect public health and the environment.

- The operator will use the treated produced water in the containments for drilling, completion (stimulation), producing or processing oil or gas or both. If other uses are planned, the operator will notify the OCD though the submission of a modified C-147.
- For all exploration and production operations that use produced water, the operator will conduct these activities in a manner consistent with hydrogen sulfide gas provisions in 19.15.11 NMAC or NORM provisions in 19.15.35 NMAC, as applicable.
- The operator will address all releases from the recycling and re-use of produced water in accordance with 19.15.29 NMAC.

19.15.34.10 B

Recycling containments may hold produced water for use in connection with drilling, completion, producing or processing oil or gas or both.

19.15.34.8 A

(6) All releases from the recycling and re-use of produced water shall be handled in accordance with 19.15.29 NMAC.

19.15.34.10 B

Recycling containments may hold produced water for use in connection with drilling, completion, producing or processing oil or gas or both. Such fluids may include fresh water, brackish water, recycled and treated water, fluids added to water to facilitate well drilling or completion, water produced with oil and gas, flowback from operations, water generated by an oil or gas processing facility or other waters that are gathered for well drilling or completion but may not include any hazardous waste.

19.15.34.8 A

(5) All operations in which produced water is used shall be conducted in a manner consistent with hydrogen sulfide gas provisions in 19.15.11 NMAC or NORM provisions in 19.15.35 NMAC, as applicable.

19.15.29.6

To prohibit releases and require persons who operate or control the release or the location of the release to report the unauthorized release of oil, gases, produced water, condensate or oil field waste including regulated NORM or other oil field related chemicals, contaminants or mixtures of those chemicals or contaminants that occur during drilling, producing, storing, disposing, injecting, transporting, servicing or processing and to establish procedures for reporting, site assessment, remediation, closure, variance and enforcement.

Operations and Maintenance Plan Above Ground Tank Containment (AST)

- | | |
|--|---|
| <ul style="list-style-type: none"> • The operator will not discharge into or store any hazardous waste in the recycling containments, but they may hold fluids such as freshwater, brackish water, recycled and treated water, water generated by oil or gas processing facilities, or other waters that are gathered for well drilling or completion. The recycling facility will not be used for the disposal of produced water. The operator will maintain the containments free of miscellaneous solid waste or debris. | <p>19.15.34.9 G
Recycling facilities may not be used for the disposal of produced water.</p> |
| <ul style="list-style-type: none"> • The operator will verify that no oil is on the surface of the contained fluid. If oil is observed, the oil shall be removed using an absorbent boom or other device and properly disposed at an approved facility. An absorbent boom or other device will be maintained on site. | <p>19.15.34.13 B
(1) The operator shall remove any visible layer of oil from the surface of the recycling containment
(7) The operator shall install, or maintain on site, an oil absorbent boom or other device to contain an unanticipated release.</p> |
| <ul style="list-style-type: none"> • The operator will install and use a header and diverter described in the design/construction plan in order to prevent damage to the liner by erosion, fluid jets or impact from installation and removal of hoses or pipes during injection or withdrawal of liquids. | <p>19.15.34.13 B
(3) The injection or withdrawal of fluids from the containment shall be accomplished through a header, diverter or other hardware that prevents damage to the liner by erosion, fluid jets or impact from installation and removal of hoses or pipes.</p> |
| <ul style="list-style-type: none"> • The operator shall maintain at least three feet of freeboard at each containment. | <p>19.15.34.13 B
(2) The operator shall maintain at least three feet of freeboard at each containment.</p> |
| <ul style="list-style-type: none"> • If the liner develops a leak or if any penetration of the liner occurs above the liquid's surface, then the operator will repair the damage or initiate replacement of the liner within 48 hours of discovery or will seek a variance from the division district office within this time period. | <p>19.5.34.13 B
(4) If the containment's primary liner is compromised above the fluid's surface, the operator shall repair the damage or initiate replacement of the primary liner within 48 hours of discovery or seek an extension of time from the division district office.</p> |
| <ul style="list-style-type: none"> • If visible inspection suggests that the liner developed a leak or if any penetration of the liner occurs below the liquid's surface, then the operator will remove all liquid above the damage or leak line within 48 hours of discovery. The operator will also notify the district division office within this same 48 hours of the discovery and repair the damage or replace the liner. | <p>(5) If the primary liner is compromised below the fluid's surface, the operator shall remove all fluid above the damage or leak within 48 hours of discovery, notify the division district office and repair the damage or replace the primary liner.</p> |

Operations and Maintenance Plan Above Ground Tank Containment (AST)

- In the event of a leak due to a hole in the liner, the following steps will be followed:
 1. If the source of the fluid is uncertain, comparative field tests may need to be performed on both the water in the containment and that which may have been released (e.g. pH, conductance, and chloride).
 2. If the fluid is found to be coming from the containment, determine the location from which the leak is originating.
 3. Mark the point where the water is coming out of the tank.
 4. Locate the puncture or hole in the liner.
 5. Empty the containment to the point of damage in liner.
 6. Clean area of liner that needs to be repaired.
 7. Cut out piece of material (patch or tape) to overlay liner.
 8. Either weld the patch to the injured area in the liner or apply tape over the rupture.
 9. Make sure rupture is completely covered.
 10. Monitor as needed.

The operator will inspect and remove, as necessary, surface water run-on accumulated in the secondary containment

Monitoring, Inspections, and Reporting

An inspection log will be maintained by the operator and will be made available to the division upon request. Inspection will include: freeboard monitoring, leak detection, identifying potential hazards that may have developed, change in site conditions or if the contents of the containment change from the initial use.

Weekly inspections consist of:

- Reading and recording the fluid height of staff gauges and freeboard
- Recording any evidence of visible oil on surface

19.15.29.8 B.

Requirements. For all releases regardless of volume, the responsible party shall comply with 19.15.29.8 NMAC and shall remediate the release. For major and minor releases, the responsible party shall also comply with 19.15.29.9, 19.15.29.10, 19.15.29.11, 19.15.29.12 and 19.15.29.13 NMAC.

19.15.34.13

(6) The containment shall be operated to prevent the collection of surface water run-on.

19.15.34.13 A.

The operator shall inspect the recycling containment and associated leak detection systems weekly while it contains fluids. The operator shall maintain a current log of such inspections and make the log available for review by the division upon request.

Operations and Maintenance Plan Above Ground Tank Containment (AST)

- Visually inspecting the containments exposed liners
- Checking the leak detection system for any evidence of a loss of integrity of the primary liner
- Inspect any diversion ditches and berms around the containment to check for erosion and collection of surface water run-on.
- Inspect the leak detection system for evidence of damage or malfunction and monitor for leakage.
- Inspect netting (may not be used if Mega Blaster Pro avian deterrent is used) for damage or dead wildlife, including migratory birds. Operator shall report the discovery of a dead animal to the appropriate wildlife agency and to the district within 30 days of discovery. Further prevention measures may be required.

Additional monitoring to identify hazards that may have developed, changes in site conditions, tank use, and to enable early detection of structural issues such as uneven tank panel settlement, soil settlement, liner damage, insufficient liner slack or leaks. If changes are noted the AST contractor should be notified

- If observed conditions indicate a potential tank failure is imminent, the vicinity will be immediately cleared and the AST will be drained.

Monthly, the operator will:

- Report to the division, the total volume of water received for recycling, with the amount of fresh water received listed separately, and the total volume of water leaving the facility for disposition by use on form C-148.
- Record sources and disposition of all recycled water.

Cessation of Operations

If less than 20% of the total fluid capacity is utilized every six months, beginning from the first withdraw, operation of the facility has ceased and the division district office will be

19.15.34.12 E

Netting. The operator shall ensure that a recycling containment is screened, netted or otherwise protective of wildlife, including migratory birds. The operator shall on a monthly basis inspect for and, within 30 days of discovery, report the discovery of dead migratory birds or other wildlife to the appropriate wildlife agency and to the division district office in order to facilitate assessment and implementation of measures to prevent incidents from reoccurring.

19.15.34.9 E

The operator of a recycling facility shall keep accurate records and shall report monthly to the division the total volume of water received for recycling, with the amount of fresh water received listed separately, and the total volume of water leaving the facility for disposition by use on form C-148.

19.15.34.13 C

A recycling containment shall be deemed to have ceased operations if less than 20% of the total fluid capacity is used every six

Operations and Maintenance Plan Above Ground Tank Containment (AST)

notified. The division district may grant an extension not to exceed six months to determine the cessation of operations.

The operator will remove all fluids from the recycling facility within 60 days of cessation of operations. An extension, not to exceed 2 months, may be granted by the district division for the removal of fluids from the facility.

The breakdown of the containments follows the reverse order of the setup steps presented in the set-up manual.

months following the first withdrawal of produced water for use. The operator must report cessation of operations to the appropriate division district office. The appropriate division district office may grant an extension to this determination of cessation of operations not to exceed six months.

19.15.34.14 A

Once the operator has ceased operations, the operator shall remove all fluids within 60 days and close the containment within six months from the date the operator ceases operations from the containment for use. The division district office may grant an extension for the removal of all fluids not to exceed two months.

Closure Plan Above Ground Tank Containment (AST)

Closure Plan

The containments are expected to contain a small volume of solids, the majority of which will be windblown sand and dust with some mineral precipitates from the water.

The operator will notify the division district (phone or email) before initiating closure of the containments and/or facility.

Excavation and Removal Closure Plan – Protocols and Procedures

1. Residual fluids in the containments will be sent to disposal at a division-approved facility.
2. The operator will remove all solid contents and transfer those materials to the following division-approved facility:
Disposal Facility Name: R360
Permit Number NM 01-0006
3. If possible, geomembrane textiles and liners that exhibit good integrity may be recycled for use as an under liner of tank batteries or other use as approved by OCD.
4. Disassemble the recycling containment infrastructure according to manufacturer's recommendations
5. After the disassemble of the containments and removal of the contents and liners, soils beneath the tanks will be tested as follows
 - a. Collect a five-point (minimum) composite from beneath the liner to include any obviously stained or wet soils, or any other evidence of impact from the containments for laboratory analyses for the constituents listed in Table I of 19.15.34.14 NMAC.
 - b. If any concentration is higher than the parameters listed in Table I, additional delineation may be required, and closure activities will not proceed without Division approval.
 - c. If all constituents' concentrations are less than or equal to the parameters listed in Table I, then the operator will backfill the facility as necessary using non-waste containing, uncontaminated, earthen material and proceed to reclaim the surface to pre-existing conditions.

19.15.34.14 B

The operator shall close a recycling containment by first removing all fluids, contents and synthetic liners and transferring these materials to a division approved facility.

19.15.34.14 C

The operator shall test the soils beneath the containment for contamination with a five-point composite sample which includes stained or wet soils, if any, and that sample shall be analyzed for the constituents listed in Table I below.

(1) If any contaminant concentration is higher than the parameters listed in Table I, the division may require additional delineation upon review of the results and the operator must receive approval before proceeding with closure.

(2) If all contaminant concentrations are less than or equal to the parameters listed in Table I, then the operator can proceed to backfill with non-waste containing, uncontaminated, earthen material.

Closure Plan Above Ground Tank Containment (AST)

Closure Documentation

Within 60 days of closure completion, the operator will submit a closure report (Form C-147) to the District Division, with necessary attachments to document all closure activities are complete, including sampling results and details regarding backfilling and capping as necessary.

In the closure report, the operator will certify that all information in the report and attachments is correct and that the operator has complied with all applicable closure requirements and conditions specified in the closure plan.

Reclamation and Revegetation

The operator will reclaim the surface to safe and stable pre-existing conditions that blends with the surrounding undisturbed area. "Pre-existing conditions" may include a caliche well pad that existed prior to the construction of the recycling containment and that supports active oil and gas operations.

Areas not reclaimed as described herein due to their use in production or drilling operations will be stabilized and maintained to minimize dust and erosion.

For all areas disturbed by the closure process that will not be used for production operations or future drilling, the operator will

1. Replace topsoils and subsoils to their original relative positions
2. Grade so as to achieve erosion control, long-term stability and preservation of surface water flow patterns
3. Reseed in the first favorable growing season following closure

Federal, state trust land, or tribal lands may impose alternate reclamation and revegetation obligations that provide equal or better protection of fresh water, human health, and the environment. Revegetation and reclamation plans imposed by the surface owner will be outlined in communications with the OCD.

The operator will notify the division when the site meets the surface owner's requirements or exhibits a uniform vegetative cover that reflects a life-form ratio of plus or minus fifty percent (50%) of pre-disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. The operator will notify the Division when reclamation and re-vegetation is complete.

19.15.34.14 D

Within 60 days of closure completion, the operator shall submit a closure report on form C-147, including required attachments, to document all closure activities including sampling results and the details on any backfilling, capping or covering, where applicable. The closure report shall certify that all information in the report and attachments is correct and that the operator has complied with all applicable closure requirements and conditions specified in division rules or directives.

19.15.34.14 E

Once the operator has closed the recycling containment, the operator shall reclaim the containment's location to a safe and stable condition that blends with the surrounding undisturbed area. Topsoils and subsoils shall be replaced to their original relative positions and contoured so as to achieve erosion control, long-term stability and preservation of surface water flow patterns. The disturbed area shall then be reseeded in the first favorable growing season following closure of a recycling containment. The operator shall substantially restore the impacted surface area to the condition that existed prior to the construction of the recycling containment.

19.15.34.14 G

The revegetation and reclamation obligations imposed by federal, state trust land or tribal agencies on lands managed by those agencies shall supersede these provisions and govern the obligations of any operator subject to those provisions, provided that the other requirements provide equal or better protection of fresh water, human health and the environment.

19.15.34.14 F

Reclamation of all disturbed areas no longer in use shall be considered complete when all ground surface disturbing activities at the site have been completed, and a uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre-disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds.

Closure Plan Above Ground Tank Containment (AST)

Closure Plan

The containments are expected to contain a small volume of solids, the majority of which will be windblown sand and dust with some mineral precipitates from the water.

The operator will notify the division district (phone or email) before initiating closure of the containments and/or facility.

Excavation and Removal Closure Plan – Protocols and Procedures

1. Residual fluids in the containments will be sent to disposal at a division-approved facility.
2. The operator will remove all solid contents and transfer those materials to the following division-approved facility:
Disposal Facility Name: R360
Permit Number NM 01-0006
3. If possible, geomembrane textiles and liners that exhibit good integrity may be recycled for use as an under liner of tank batteries or other use as approved by OCD.
4. Disassemble the recycling containment infrastructure according to manufacturer's recommendations
5. After the disassemble of the containments and removal of the contents and liners, soils beneath the tanks will be tested as follows
 - a. Collect a five-point (minimum) composite from beneath the liner to include any obviously stained or wet soils, or any other evidence of impact from the containments for laboratory analyses for the constituents listed in Table I of 19.15.34.14 NMAC.
 - b. If any concentration is higher than the parameters listed in Table I, additional delineation may be required, and closure activities will not proceed without Division approval.
 - c. If all constituents' concentrations are less than or equal to the parameters listed in Table I, then the operator will backfill the facility as necessary using non-waste containing, uncontaminated, earthen material and proceed to reclaim the surface to pre-existing conditions.

19.15.34.14 B

The operator shall close a recycling containment by first removing all fluids, contents and synthetic liners and transferring these materials to a division approved facility.

19.15.34.14 C

The operator shall test the soils beneath the containment for contamination with a five-point composite sample which includes stained or wet soils, if any, and that sample shall be analyzed for the constituents listed in Table I below.

(1) If any contaminant concentration is higher than the parameters listed in Table I, the division may require additional delineation upon review of the results and the operator must receive approval before proceeding with closure.

(2) If all contaminant concentrations are less than or equal to the parameters listed in Table I, then the operator can proceed to backfill with non-waste containing, uncontaminated, earthen material.

Closure Plan Above Ground Tank Containment (AST)

Closure Documentation

Within 60 days of closure completion, the operator will submit a closure report (Form C-147) to the District Division, with necessary attachments to document all closure activities are complete, including sampling results and details regarding backfilling and capping as necessary.

In the closure report, the operator will certify that all information in the report and attachments is correct and that the operator has complied with all applicable closure requirements and conditions specified in the closure plan.

Reclamation and Revegetation

The operator will reclaim the surface to safe and stable pre-existing conditions that blends with the surrounding undisturbed area. "Pre-existing conditions" may include a caliche well pad that existed prior to the construction of the recycling containment and that supports active oil and gas operations.

Areas not reclaimed as described herein due to their use in production or drilling operations will be stabilized and maintained to minimize dust and erosion.

For all areas disturbed by the closure process that will not be used for production operations or future drilling, the operator will

1. Replace topsoils and subsoils to their original relative positions
2. Grade so as to achieve erosion control, long-term stability and preservation of surface water flow patterns
3. Reseed in the first favorable growing season following closure

Federal, state trust land, or tribal lands may impose alternate reclamation and revegetation obligations that provide equal or better protection of fresh water, human health, and the environment. Revegetation and reclamation plans imposed by the surface owner will be outlined in communications with the OCD.

The operator will notify the division when the site meets the surface owner's requirements or exhibits a uniform vegetative cover that reflects a life-form ratio of plus or minus fifty percent (50%) of pre-disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. The operator will notify the Division when reclamation and revegetation is complete.

19.15.34.14 D

Within 60 days of closure completion, the operator shall submit a closure report on form C-147, including required attachments, to document all closure activities including sampling results and the details on any backfilling, capping or covering, where applicable. The closure report shall certify that all information in the report and attachments is correct and that the operator has complied with all applicable closure requirements and conditions specified in division rules or directives.

19.15.34.14 E

Once the operator has closed the recycling containment, the operator shall reclaim the containment's location to a safe and stable condition that blends with the surrounding undisturbed area. Topsoils and subsoils shall be replaced to their original relative positions and contoured so as to achieve erosion control, long-term stability and preservation of surface water flow patterns. The disturbed area shall then be reseeded in the first favorable growing season following closure of a recycling containment. The operator shall substantially restore the impacted surface area to the condition that existed prior to the construction of the recycling containment.

19.15.34.14 G

The revegetation and reclamation obligations imposed by federal, state trust land or tribal agencies on lands managed by those agencies shall supersede these provisions and govern the obligations of any operator subject to those provisions, provided that the other requirements provide equal or better protection of fresh water, human health and the environment.

19.15.34.14 F

Reclamation of all disturbed areas no longer in use shall be considered complete when all ground surface disturbing activities at the site have been completed, and a uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre-disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds.

GENERAL SITING CRITERIA DEMONSTRATION AND SITE-SPECIFIC GROUNDWATER DATA

SITING CRITERIA (19.15.34.11 NMAC)
FRANKLIN MOUNTAIN ENERGY – TATANKA NORTH AST CONTAINMENT**Distance to Groundwater**

Plates 1a, 1b, 2, and the discussion below demonstrate that groundwater (fresh water as defined by NMOCD Rules) at the location is greater than 100 feet beneath the area of interest that will include the location of the recycling containment.

Plate 1a is a topographic map that shows:

1. The Tatanka North Containment area identified by the blue stippled polygon. Within this area will be the proposed AST Containment identified in the C-147.
2. Water wells from the OSE database as a blue triangle inside colored circles that indicate well depth. OSE wells are often mislocated in the WATERS database as older wells are plotted in the center of the quarter, quarter, quarter, of the Section Township and Range. Additionally, the OSE database can include locations of proposed wells (i.e. permit applications). The permit data that show “no date” or “DTW=0” are existing wells or permits only. We did not inspect all of these locations by foot or by Google Earth. We believe several of these locations are active wells.

Well CP-01305 (west of Tatanka North) is plotted using the Lat/Long on the OSE well record but the actual location provided on the log is 25S 37E Section 31.41, which is about 12 miles east (see Appendix Well Logs). We examined Google Earth and conducted a foot survey and this well is not located as shown on Plate 1. Other wells that display a depth to water appear to exist as plotted to the best of our knowledge. Wells with a depth to water of “0” are probably a permit only and not drilled.

Plate 1b presents depth to water data from the USGS and Misc. databases.

3. Water wells from the USGS database as large triangles color-coded to the formation from which the well draws water.
4. Water wells, which are not documented in on-line databases but were identified by field inspection or published reports as colored squares (Misc. well database).
5. The depth-to-water from the most recent available measurement for each well is provided adjacent to the well symbol.

Depth to water measurements in the USGS and Misc. databases are typically obtained by professionals and provide good static water levels. We believe the locations of these wells on Plate 1b are accurate to the best of our knowledge.

Plate 2a is a geologic/topographic map showing:

1. The Tatanka North Recycling Facility and Containment area identified by the blue stippled polygon with the surface elevation noted.
2. Water wells measured by the USGS after year 2000. Also shown is the year of the measurement and the calculated elevation of the groundwater surface

Because the USGS data are good and relatively recent, we elected to exclude showing the Misc. wells on Plate 2a as these data obscured the USGS data in places and did not add to the accuracy of the map.

SITING CRITERIA (19.15.34.11 NMAC)
FRANKLIN MOUNTAIN ENERGY – TATANKA NORTH AST CONTAINMENT**Geology**

Quaternary Age eolian and piedmont deposits (Qe/Qp on Plate 2a) are the dominant exposed material in the area. These deposits are a thin covering of the underlying Triassic upper Chinle Formation (Tr cu) that is exposed in the north center of Plate 2. Quaternary Piedmont deposits are present within many of the drainages and between drainage, such as north of the Tatanka North Recycling project area. These Quaternary deposits can be more than 100 feet thick, and host perched water-bearing zone overlying the Chinle red beds.

The red beds of the upper Chinle (aka Dockum Group) are dominantly red clay/silt with interbedded thin sandstone units that can transmit usable groundwater. The base of the Chinle is the Santa Rosa Sandstone and is the principal bedrock aquifer of the area.

Based on information from Ground-Water Report 6 (GWR-6) *Geology and Ground-Water Conditions in Southern Lea County, New Mexico* by Alexander Nicholson and Alfred Clebsch (1961), the top of the red beds (upper Chinle Formation) in the area of the Tatanka North containment is about 3050 feet above sea level (see Plate 2b), which corresponds to a depth from ground surface of about $(3130-3050=)$ 80 feet. Because groundwater elevation at the Tatanka North site is about 2870 feet asl (see Groundwater Data, below), the base of Quaternary and/or Tertiary alluvial deposits about $(3050-2870=)$ 180 feet higher than the groundwater surface, and therefore not saturated. However, within and near some drainages, the data demonstrate that alluvium (Qp) is saturated.

The Appendix Well Logs contains several driller's logs from the OSE files. Well CP-1170 (POD 5), which lies about three miles northeast of the Tatanka North recycling project area, is a producing water well (formally a windmill now powered by an electric pump). The driller's log suggests the Chinle Red Beds were penetrated at a depth of 502 feet. Plate 2b does not present any data in this area for the top surface of the red beds. Based upon our experience in the area and the driller's log, we suggest the thickness of the alluvium is about 320 feet. The driller reports a groundwater surface of 270 feet and a Rock/Sand unit (320-335 feet deep) producing 17 GPM, which allows us to conclude that the contact between the Triassic and overlying alluvium is between 305-320 feet deep. Thus, in this area, the alluvium does not produce sufficient water for a supply well.

CP-858 (POD 2) in the Appendix Well Logs, which is almost 4 miles east of the Tatanka North site. As shown in Plate 2a, this location is south of the area mapped as Quaternary Piedmont (Qp) deposits. The well log suggests to us that the Triassic Chinle is penetrated at 80 feet and groundwater encountered at 282 feet in the gray silty sand unit.

CP-1265 is about 3 miles southeast of the Tatanka site and has a reasonable driller's log showing a thick saturated zone above the red bed (Chinle). These data are consistent with the red bed elevation displayed in Plate 2b.

All of these data permit a conclusion that the uppermost groundwater beneath the Tatanka North site is found in the Triassic Chinle and the alluvium and/or any Piedmont deposits are unsaturated. Groundwater in the Chinle flows southeast into the Javalina Basin and recharges

SITING CRITERIA (19.15.34.11 NMAC)
FRANKLIN MOUNTAIN ENERGY – TATANKA NORTH AST CONTAINMENT

the thick alluvium described above. Thus, groundwater in the Chinle northeast of the Javalina Basin is hydraulically connected to the alluvium in the Basin.

Groundwater Data

We relied upon the most recent data measured by the USGS to generate the water table elevations in Plate 2a. Water level data from the OSE database rely upon observed water levels by drillers during the completion of the water well. The OSE dataset provides some useful data in certain areas but were not used to generate groundwater elevations for Plate 2a. Based upon our field survey and examination of Google Earth images, we are confident that the wells shown in Plate 2a are located within ¼ mile of the plotted point.

Based upon the geology of the area, we are confident that groundwater in USGS-14844, which draws water from alluvium overlying the Chinle (red bed), is hydraulically connected to water in the Chinle, that is the source of water at USGS-14775. The Tatanka North AST Containment is very close to the midpoint between these two wells (3000 feet to USGS-14775 and 2700 feet from USGS-14844). Thus, groundwater elevation at the Tatanka North AST is approximately the average elevation between these two wells. The calculation yields a reasonable groundwater depth at the Tatanka North site as $(3014 + 2721)/2 = 2863$ feet above sea level.

We conclude the depth to groundwater at the Tatanka North AST site is approximately $(3050 - 2863) = 187$ feet.

Distance to Municipal Boundaries and Fresh Water Fields

Plate 3 demonstrates that the Tatanka North facility is not within incorporated municipal boundaries or within defined municipal fresh water well fields covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

- The closest municipality is Jal, NM approximately 8 miles to the east of the Tatanka North project area
- The closest public well fields belong to the City of Jal. One is within Jal and the second is about 2.5 miles southeast of the Tatanka North recycling project area.

Distance to Subsurface Mines

Plate 4 and our general reconnaissance of the Tatanka North area demonstrate that the nearest mines are caliche pits. This location is not within an area overlying a subsurface mine.

- The nearest mapped caliche pits are about 6000 feet northwest and 6000 feet south
- There are no subsurface mines in the area shown in Plate 4.

Distance to High or Critical Karst Areas

Plate 5 shows the Tatanka North recycling project area is not within mapped zone of high or critical with respect to BLM Karst areas.

- The proposed containments are located within a “low” potential karst area.
- The nearest medium potential karst area is located approximately 10 miles west of the proposed recycling facility. No mapped high or critical karst potential lies within the area of Plate 5.
- We observed no evidence of solution voids or unstable ground near the site during the field inspection.

SITING CRITERIA (19.15.34.11 NMAC)
FRANKLIN MOUNTAIN ENERGY – TATANKA NORTH AST CONTAINMENT**Distance to 100-Year Floodplain**

Plate 6 demonstrates that the Tatanka North recycling project area is within Zone D as designated by the Federal Emergency Management Agency with respect to the Flood Insurance Rate 100-Year Floodplain.

- FEMA describes the location as an area with possible but undetermined flood hazards. No flood hazard analysis has been conducted.
- Our field inspection and examination of the topography permits a conclusion that the location is not within any floodplain and has low risk for flooding.
- The nearest mapped flood hazard lies within the City of Jal

Distance to Surface Water

Plate 7 shows Antelope Draw as an intermittent stream mapped by the USGS about 1700 feet west of the proposed Tatanka North recycling area. The site visit and photographs demonstrate that the recycling project area is not within 300 feet of a continuously flowing watercourse or 200-feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark) or spring.

In addition to Antelope Draw, the closest mapped water bodies are Lake/Ponds southeast of the site (Dirt Tank shown on Plate 4).

Distance to Permanent Residence or Structures

Plate 8 and the site visit demonstrates that the location is not within 1000 feet from an occupied permanent residence, school, hospital, institution, church, or other structure in existence at the time of initial application.

- The nearest structures are tank batteries, well pads, and pipelines
- No residences or other structures are in the area.

Distance to Non-Public Water Supply

Plates 1 and 7 demonstrates that the Tatanka North recycling project is not within 500 horizontal feet of a spring or fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.

- Plate 1 shows the locations of all area water wells, active or plugged.
- The nearest water well is USGS-14778, which is located about 4200 feet north of the recycling facility area.
- There are no domestic water wells located within 1,000 feet of the area of interest.
- No springs were identified within the mapping area (see Plate 7)

Distance to Wetlands

Plate 9 demonstrates the Tatanka North location is not within 300 feet of mapped wetlands using the New Mexico database.


- The nearest designated wetland is a freshwater pond (excavated stock tank in Antelope Draw) about 2.7 miles northeast of the site.
- The USA wetlands database does not provide accurate information for most of New Mexico. For example, the USA database maps a riverine wetland in the dry arroyo

SITING CRITERIA (19.15.34.11 NMAC)
FRANKLIN MOUNTAIN ENERGY – TATANKA NORTH AST CONTAINMENT

southwest of the Tatanka North location and our site visit and photographs demonstrate this drainage does not contain any wetlands.

PLATES

Z:\Shared\Documents\Projects\FranklinMt\TatankaNorthAST\ArcGISProTatankaNorthAST\ArcGISProTatankaNorthAST.aprx

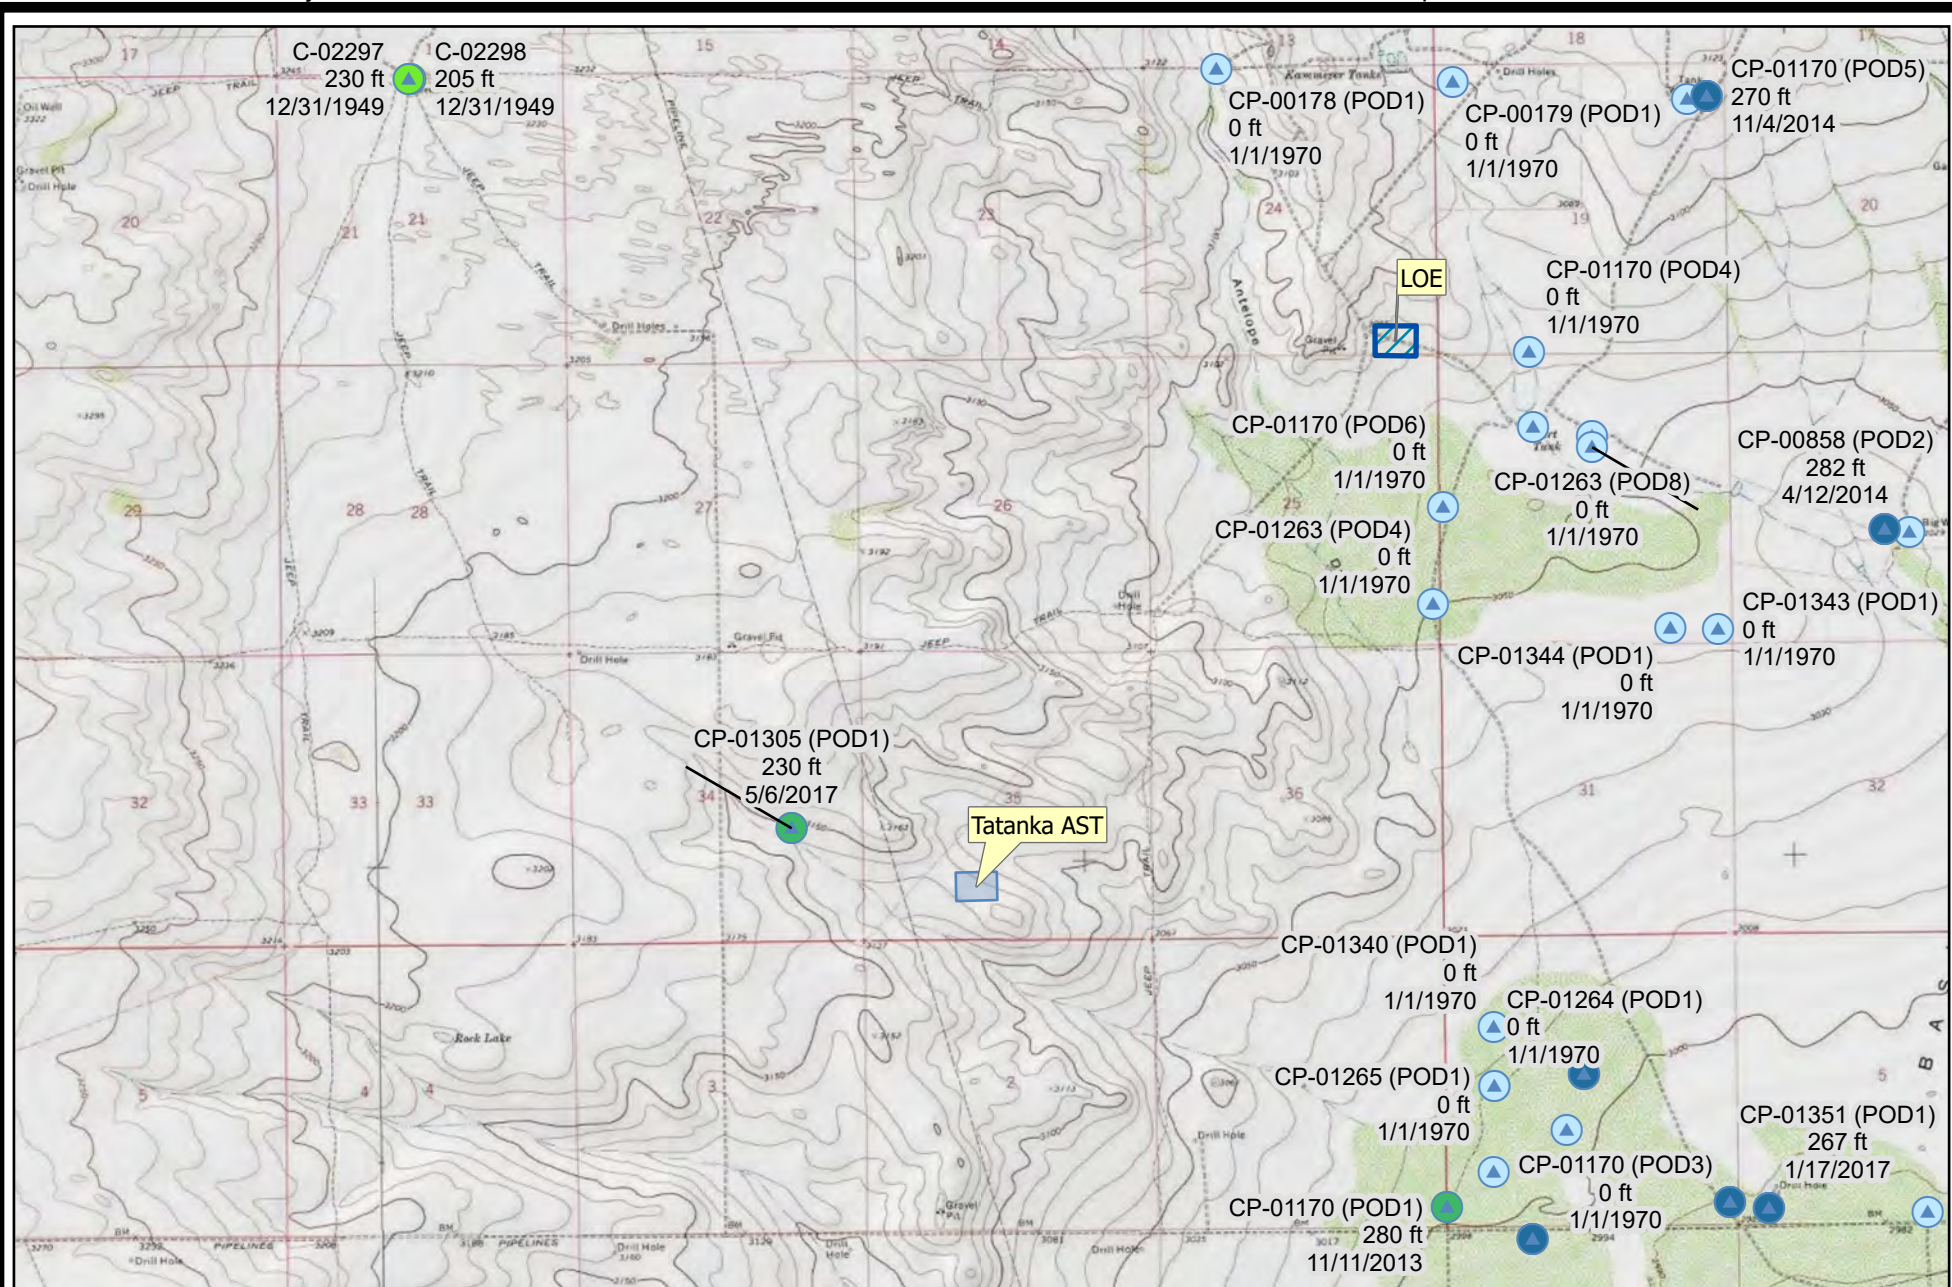

0 2,000 4,000
US Feet

R.T. Hicks Consultants, Ltd
901 Rio Grande Blvd NW Suite F-142
Albuquerque, NM 87104
Ph: 505.266.5004


Nearby Wells in OSE Database & Water Depth

Franklin Mountain Energy
Tatanka North AST

Plate 1a

Jan 2023

Z:\Shared\Documents\Projects\FranklinMt\TatankaNorthAST\ArcGISProTatankaNorthAST\ArcGISProTatankaNorthAST.aprx

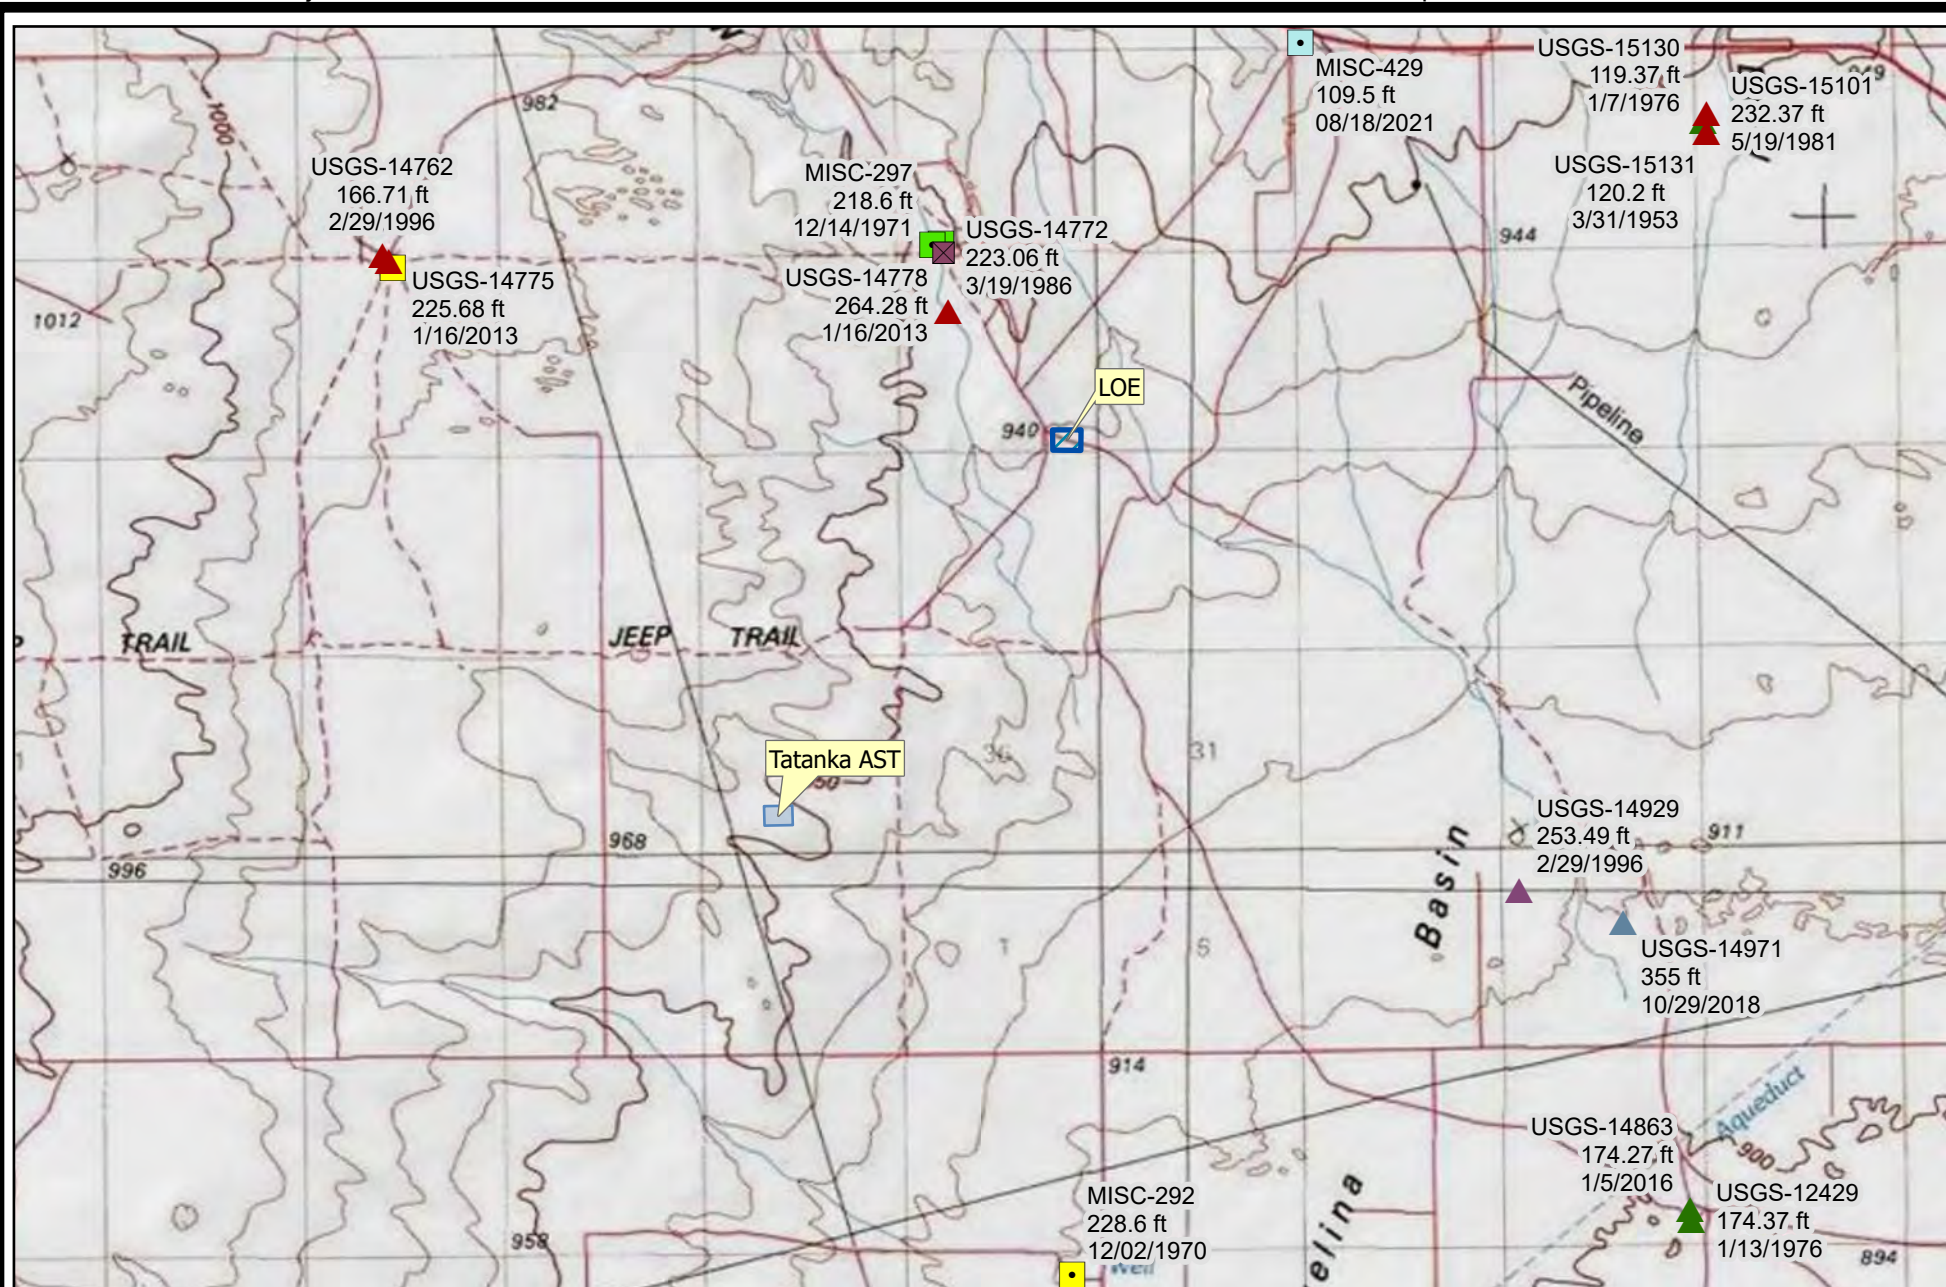

0 3,000 6,000
US Feet

R.T. Hicks Consultants, Ltd
901 Rio Grande Blvd NW Suite F-142
Albuquerque, NM 87104
Ph: 505.266.5004


Nearby Wells in OSE Database & Water Depth

Franklin Mountain Energy
Tatanka North AST

Plate 1b

Jan 2023

Z:\Shared\Documents\Projects\FranklinMt\TatankaNorthAST\ArcGISProTatankaNorthAST\ArcGISProTatankaNorthAST.aprx



R.T. Hicks Consultants, Ltd
901 Rio Grande Blvd NW Suite F-142
Albuquerque, NM 87104
Ph: 505.266.5004



Geology and Groundwater Elevation (USGS Data)

Franklin Mountain Energy
Tatanka North AST

Plate 2a

Jan 2023

Z:\Shared\Documents\Projects\FranklinMt\TatankaNorthAST\ArcGISProTatankaNorthAST\ArcGISProTatankaNorthAST.aprx

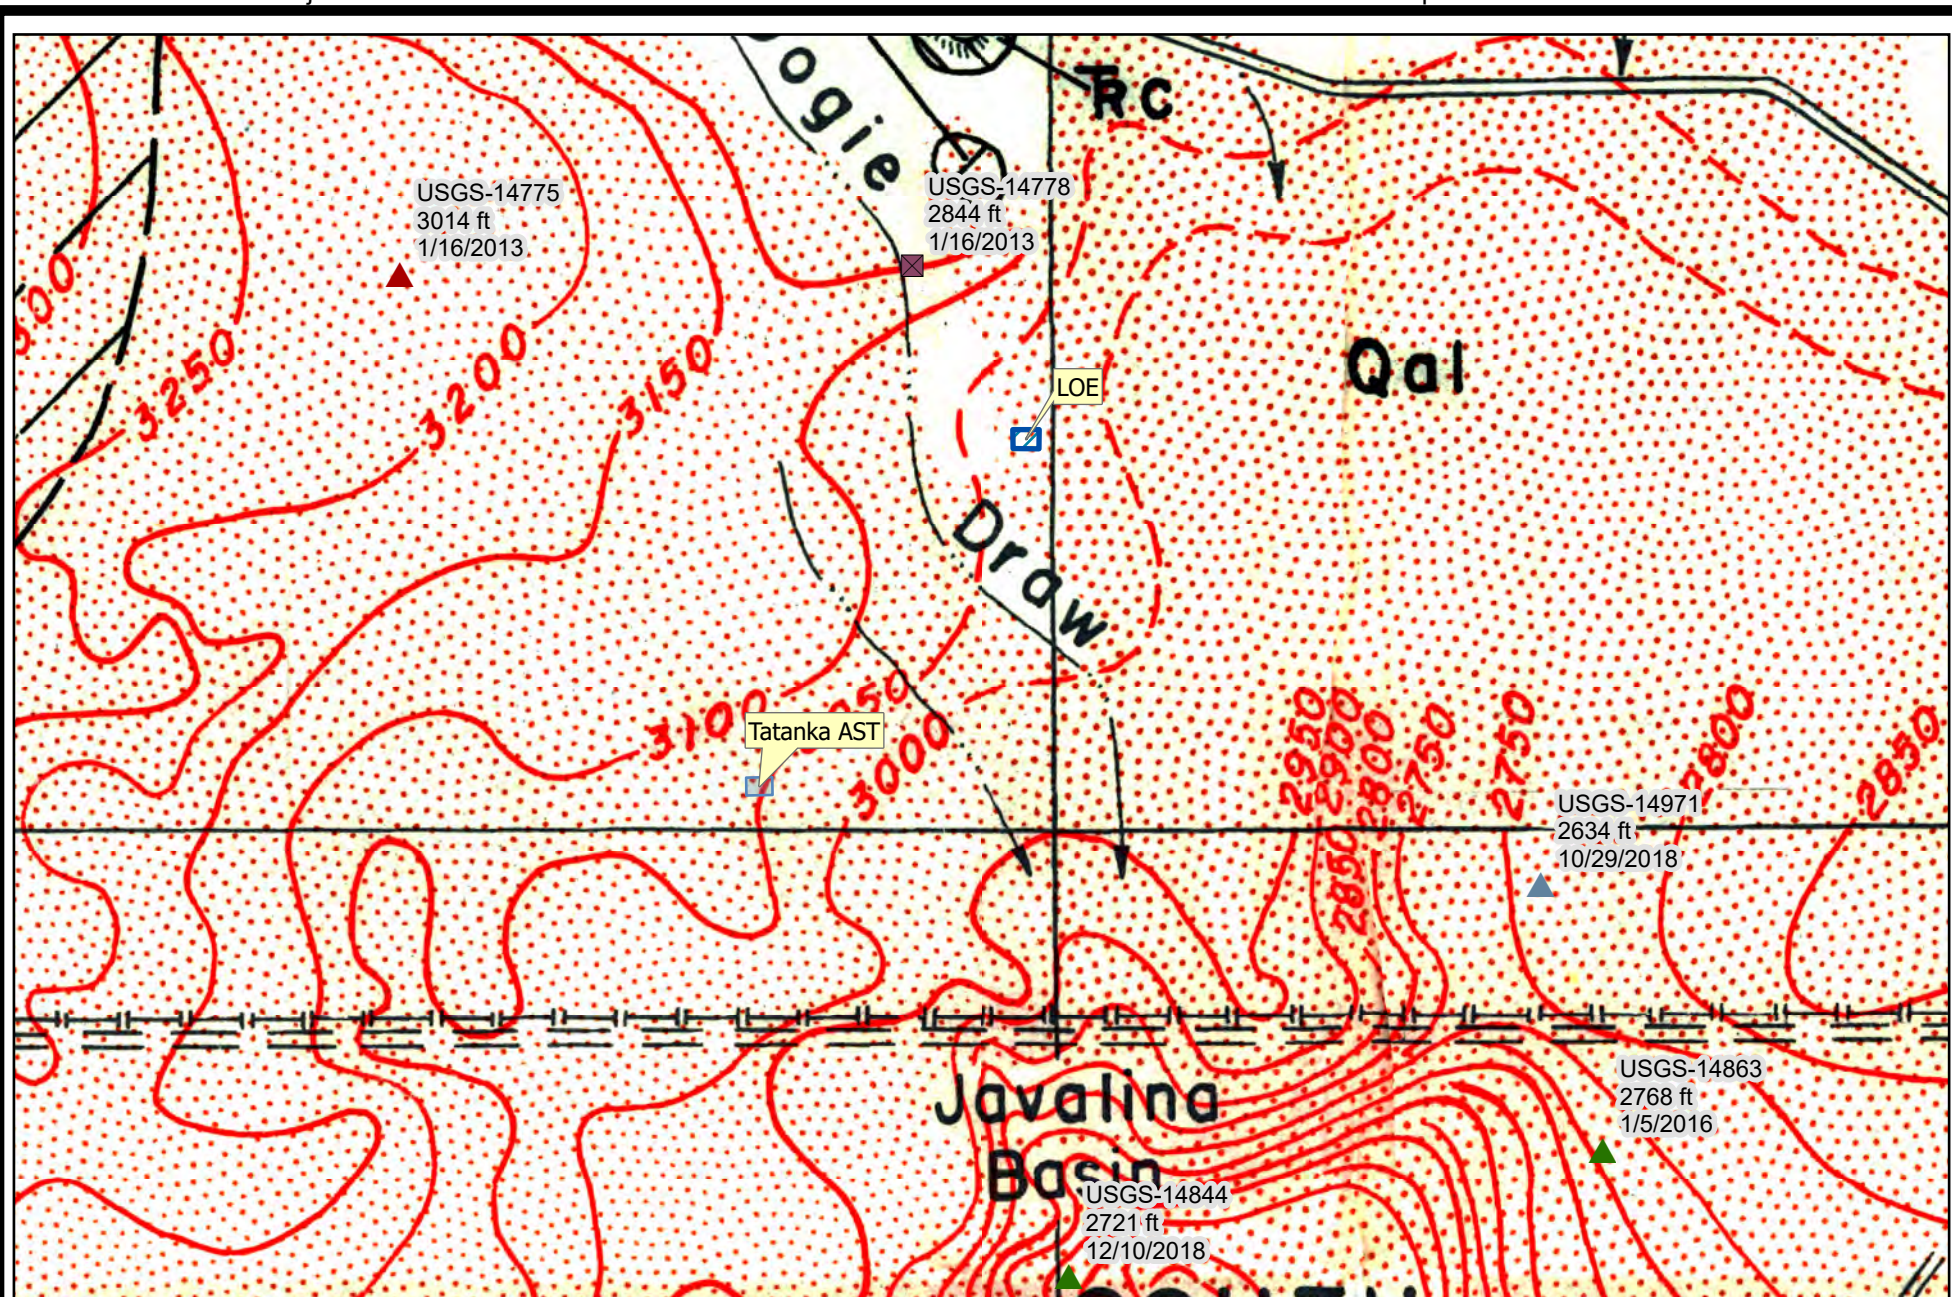


R.T. Hicks Consultants, Ltd
 901 Rio Grande Blvd NW Suite F-142
 Albuquerque, NM 87104
 Ph: 505.266.5004


Top of Red Bed (Chinle) Surface
 Franklin Mountain Energy
 Tatanka North AST

Plate 2b
 Jan 2023


Z:\Shared\Documents\Projects\FranklinMt\TatankaNorthAST\ArcGISProTatankaNorthAST\ArcGISProTatankaNorthAST.aprx

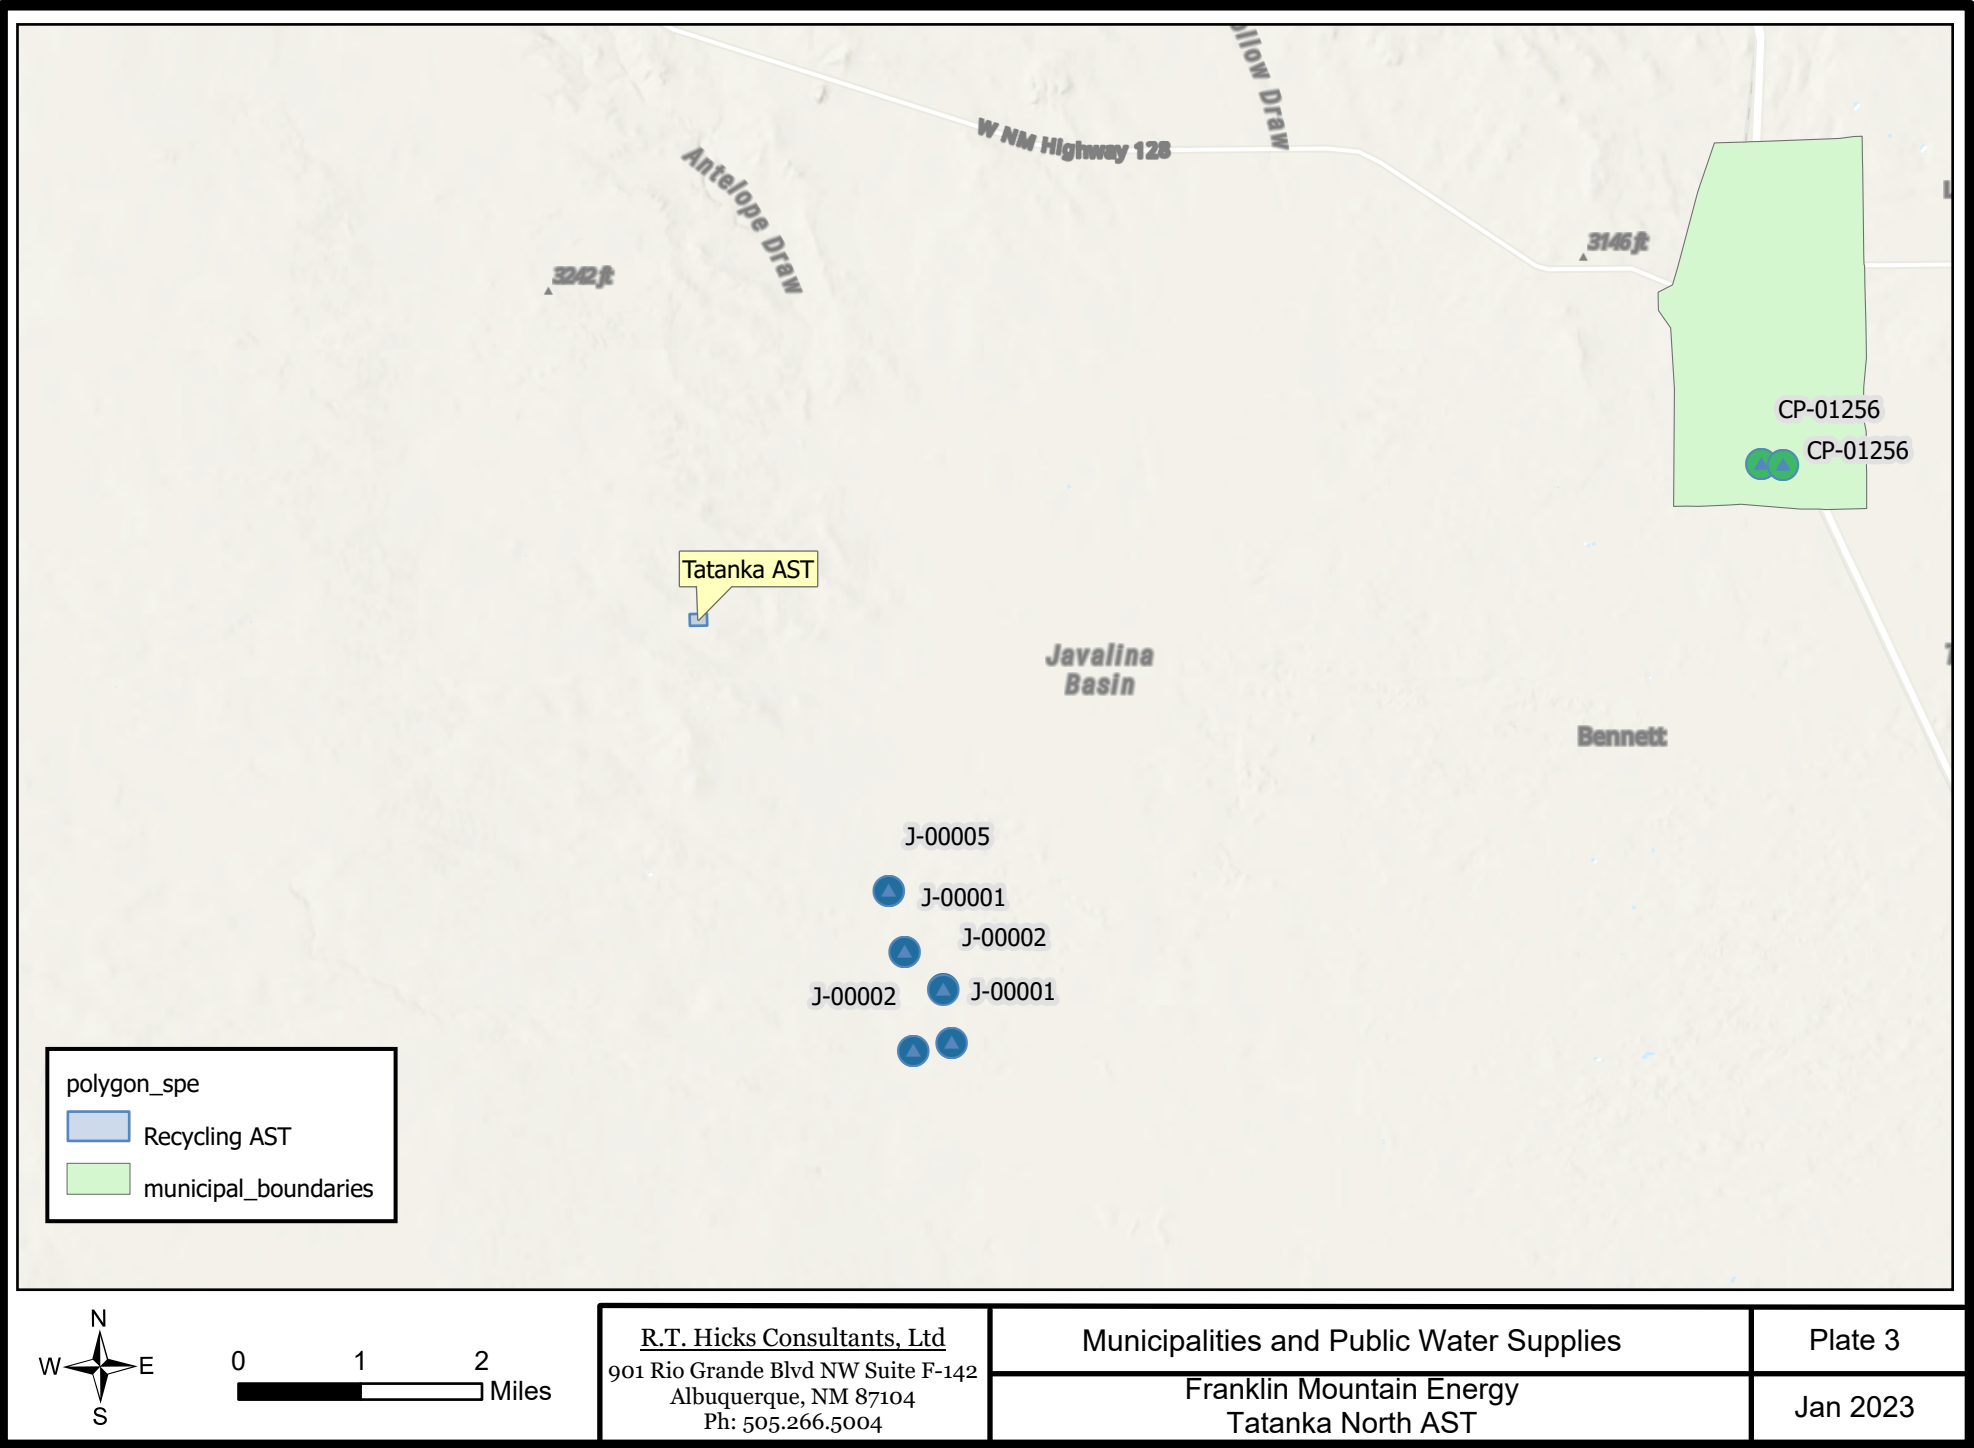

Z:\Shared\Documents\Projects\FranklinMtlTatankaNorthAST\ArcGISProTatankaNorthAST\ArcGISProTatankaNorthAST.aprx

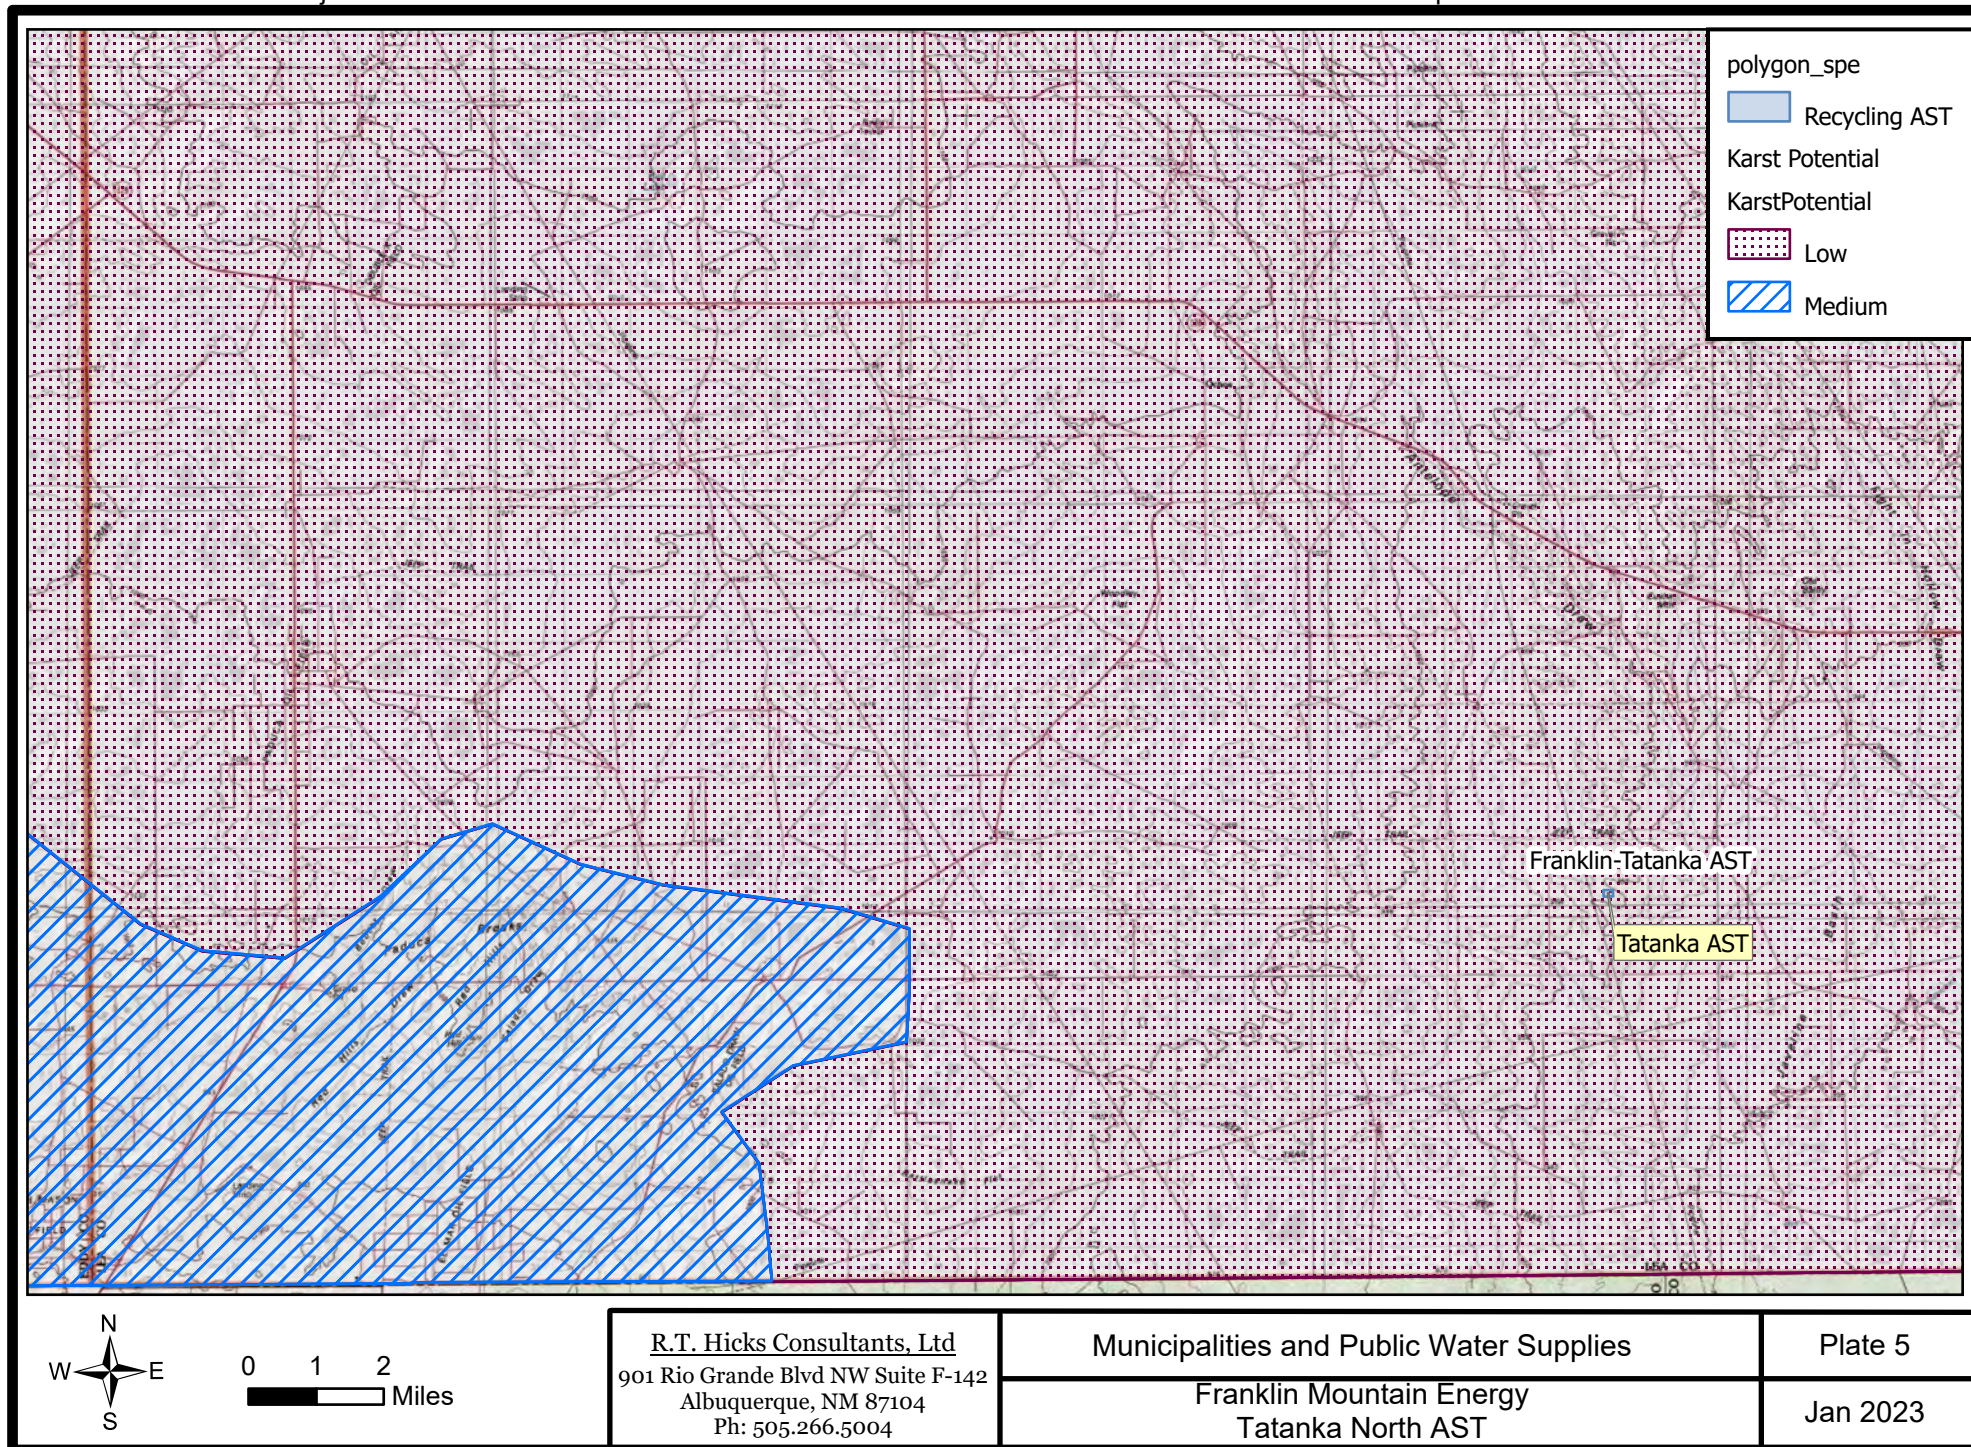

Z:\Shared\Documents\Projects\FranklinMt\TatankaNorthAST\ArcGISProTatankaNorthAST\ArcGISProTatankaNorthAST.aprx



R.T. Hicks Consultants, Ltd
901 Rio Grande Blvd NW Suite F-142
Albuquerque, NM 87104
Ph: 505.266.5004


FEMA Mapped Flood Zone

Plate 6


Franklin Mountain Energy
Tatanka North AST

Jan 2023


Z:\Shared\Documents\Projects\FranklinMnt\TatankaNorthAST\ArcGISProTatankaNorthAST\ArcGISProTatankaNorthAST.aprx

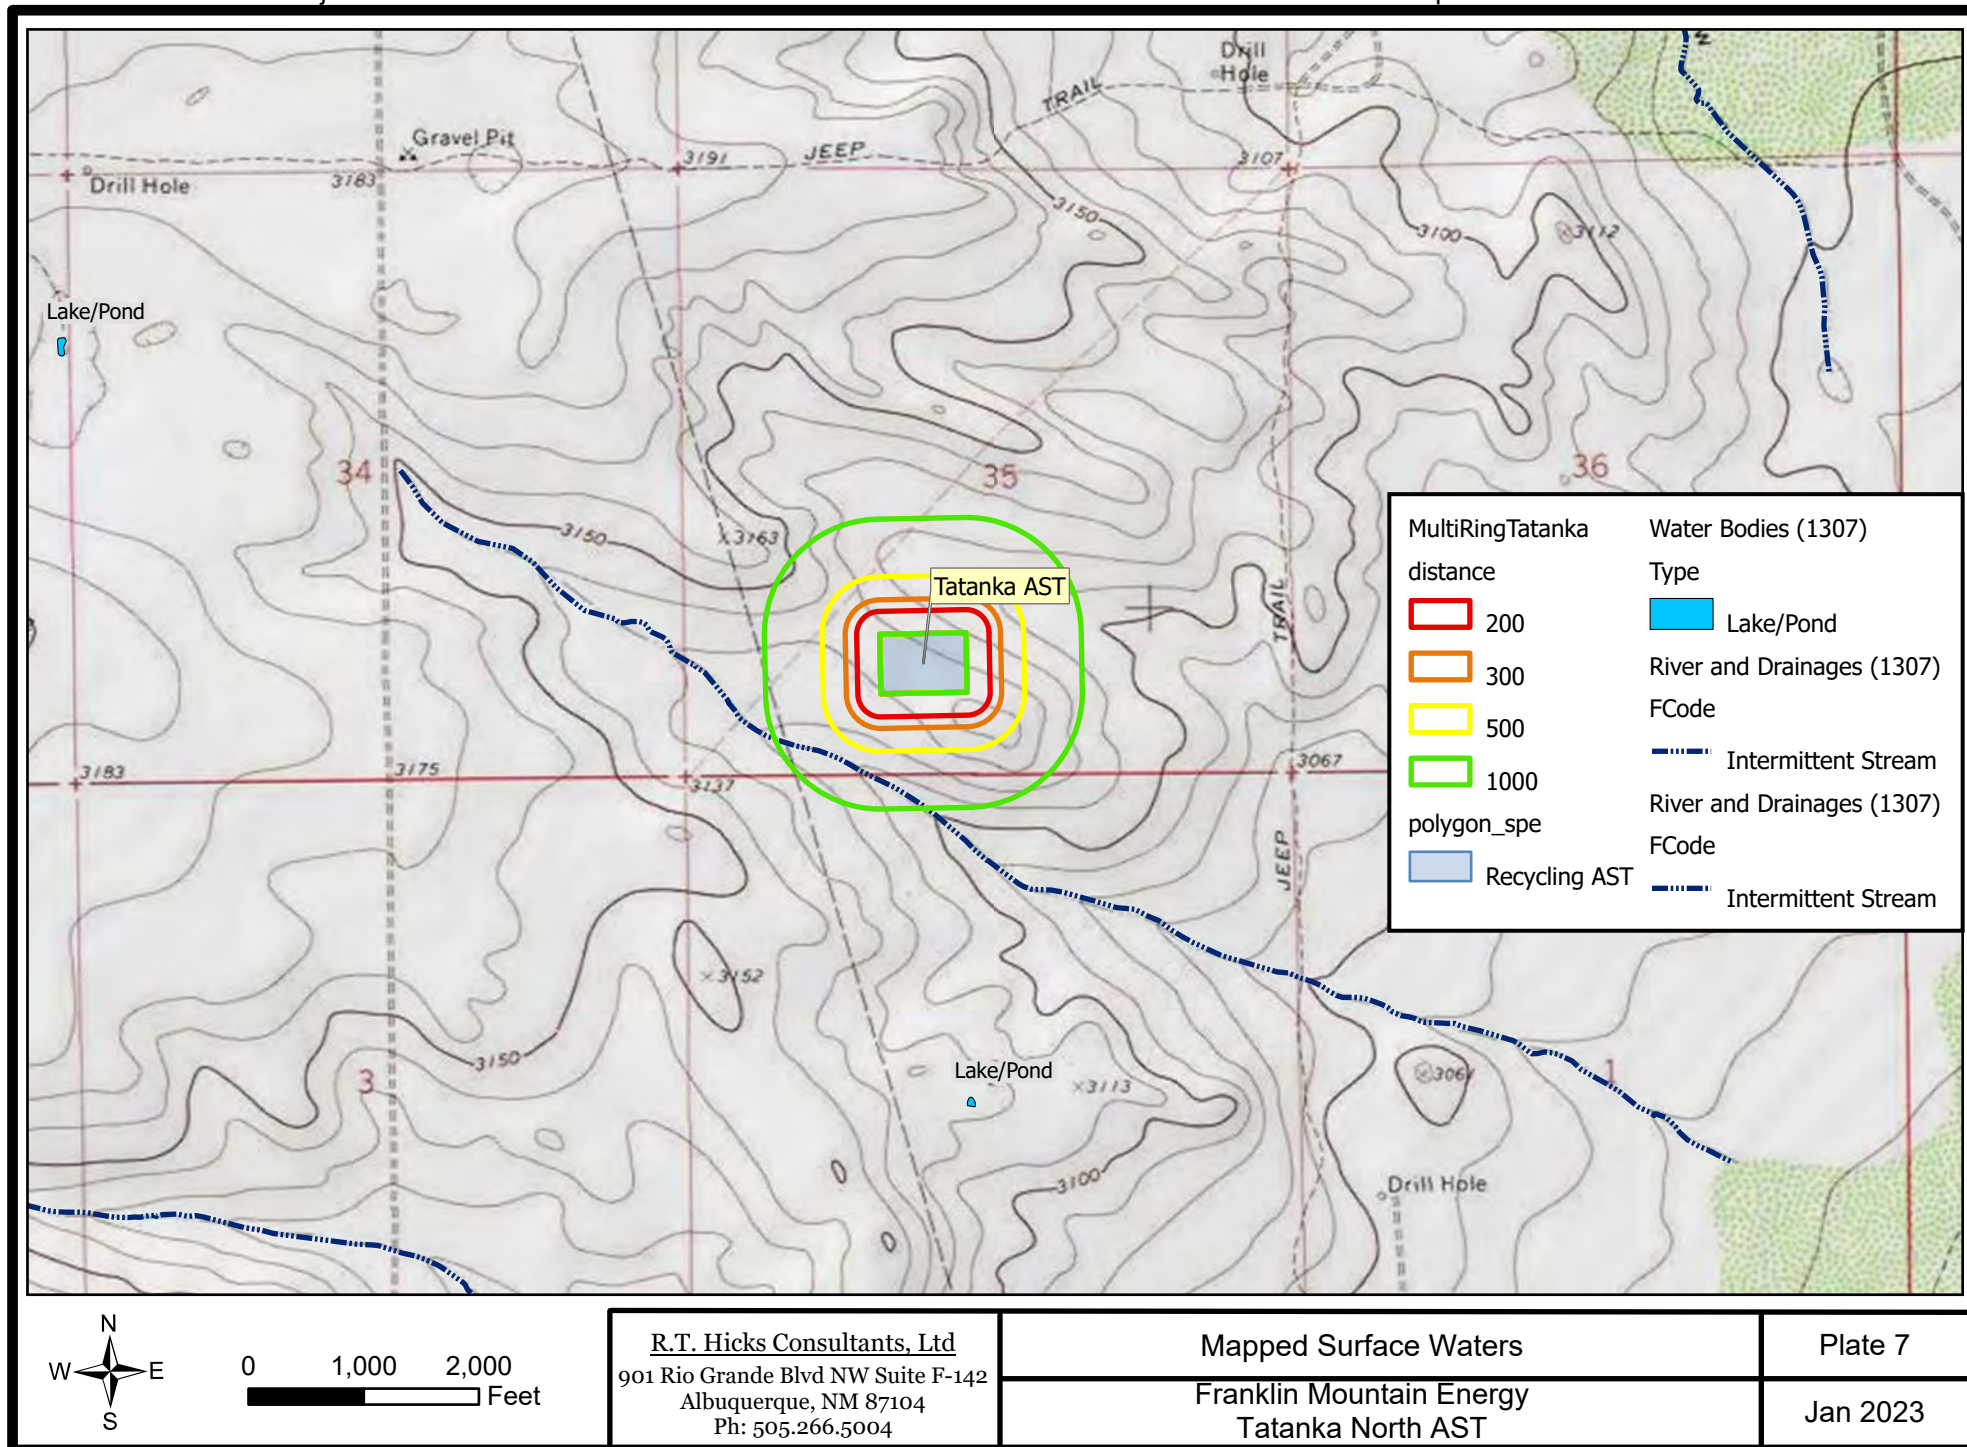

Z:\Shared\Documents\Projects\FranklinMt\TatankaNorthAST\ArcGISProTatankaNorthAST\ArcGISProTatankaNorthAST.aprx

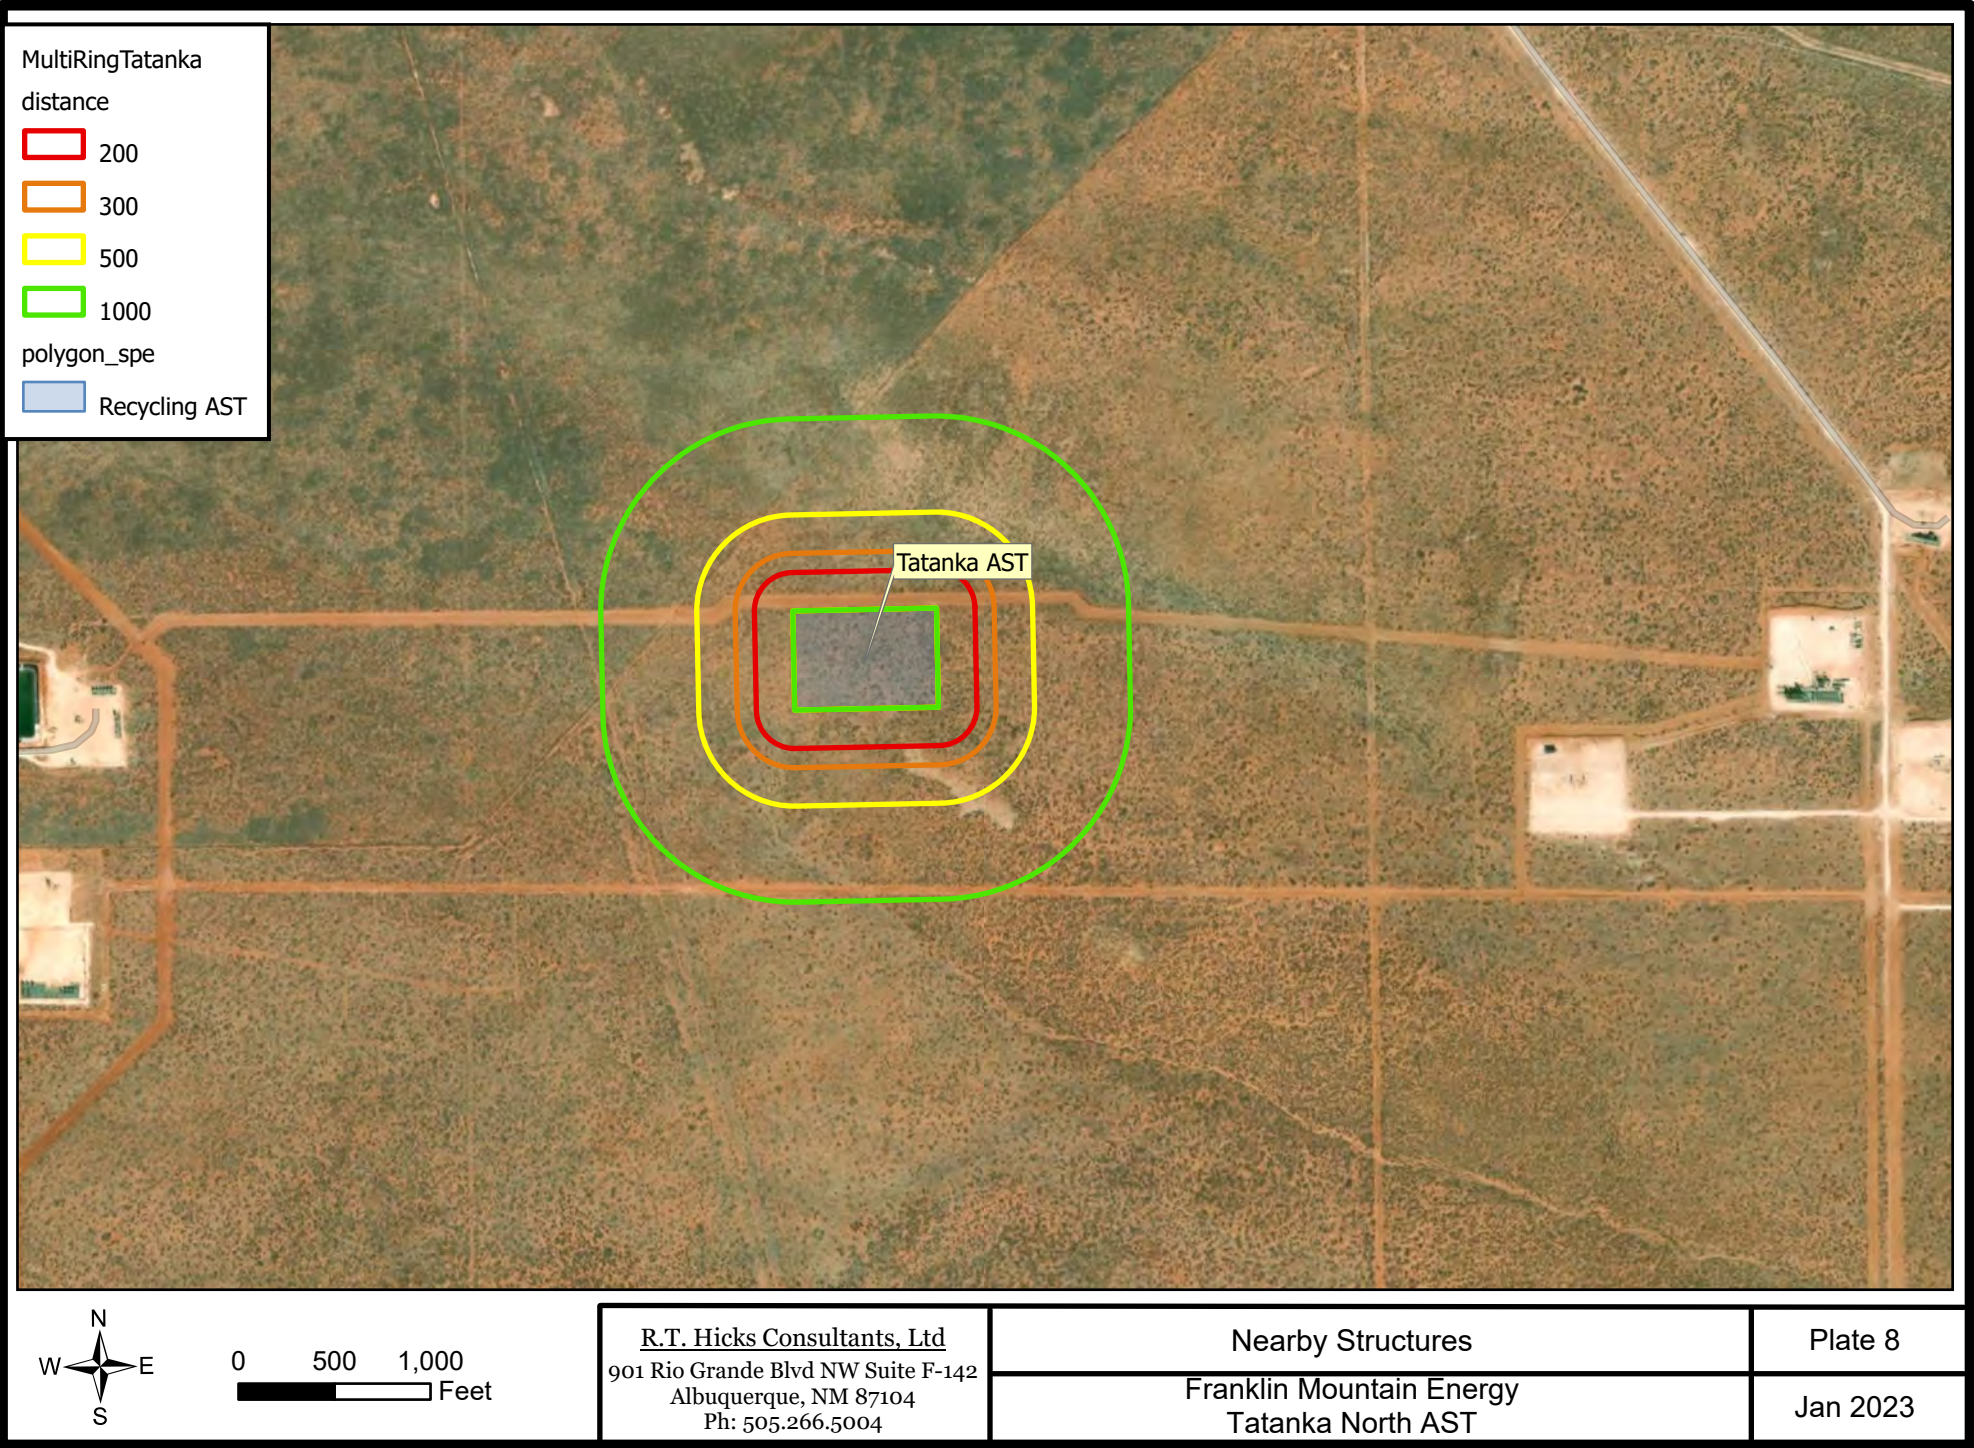

Z:\Shared\Documents\Projects\FranklinMt\TatankaNorthAST\ArcGISProTatankaNorthAST\ArcGISProTatankaNorthAST.aprx

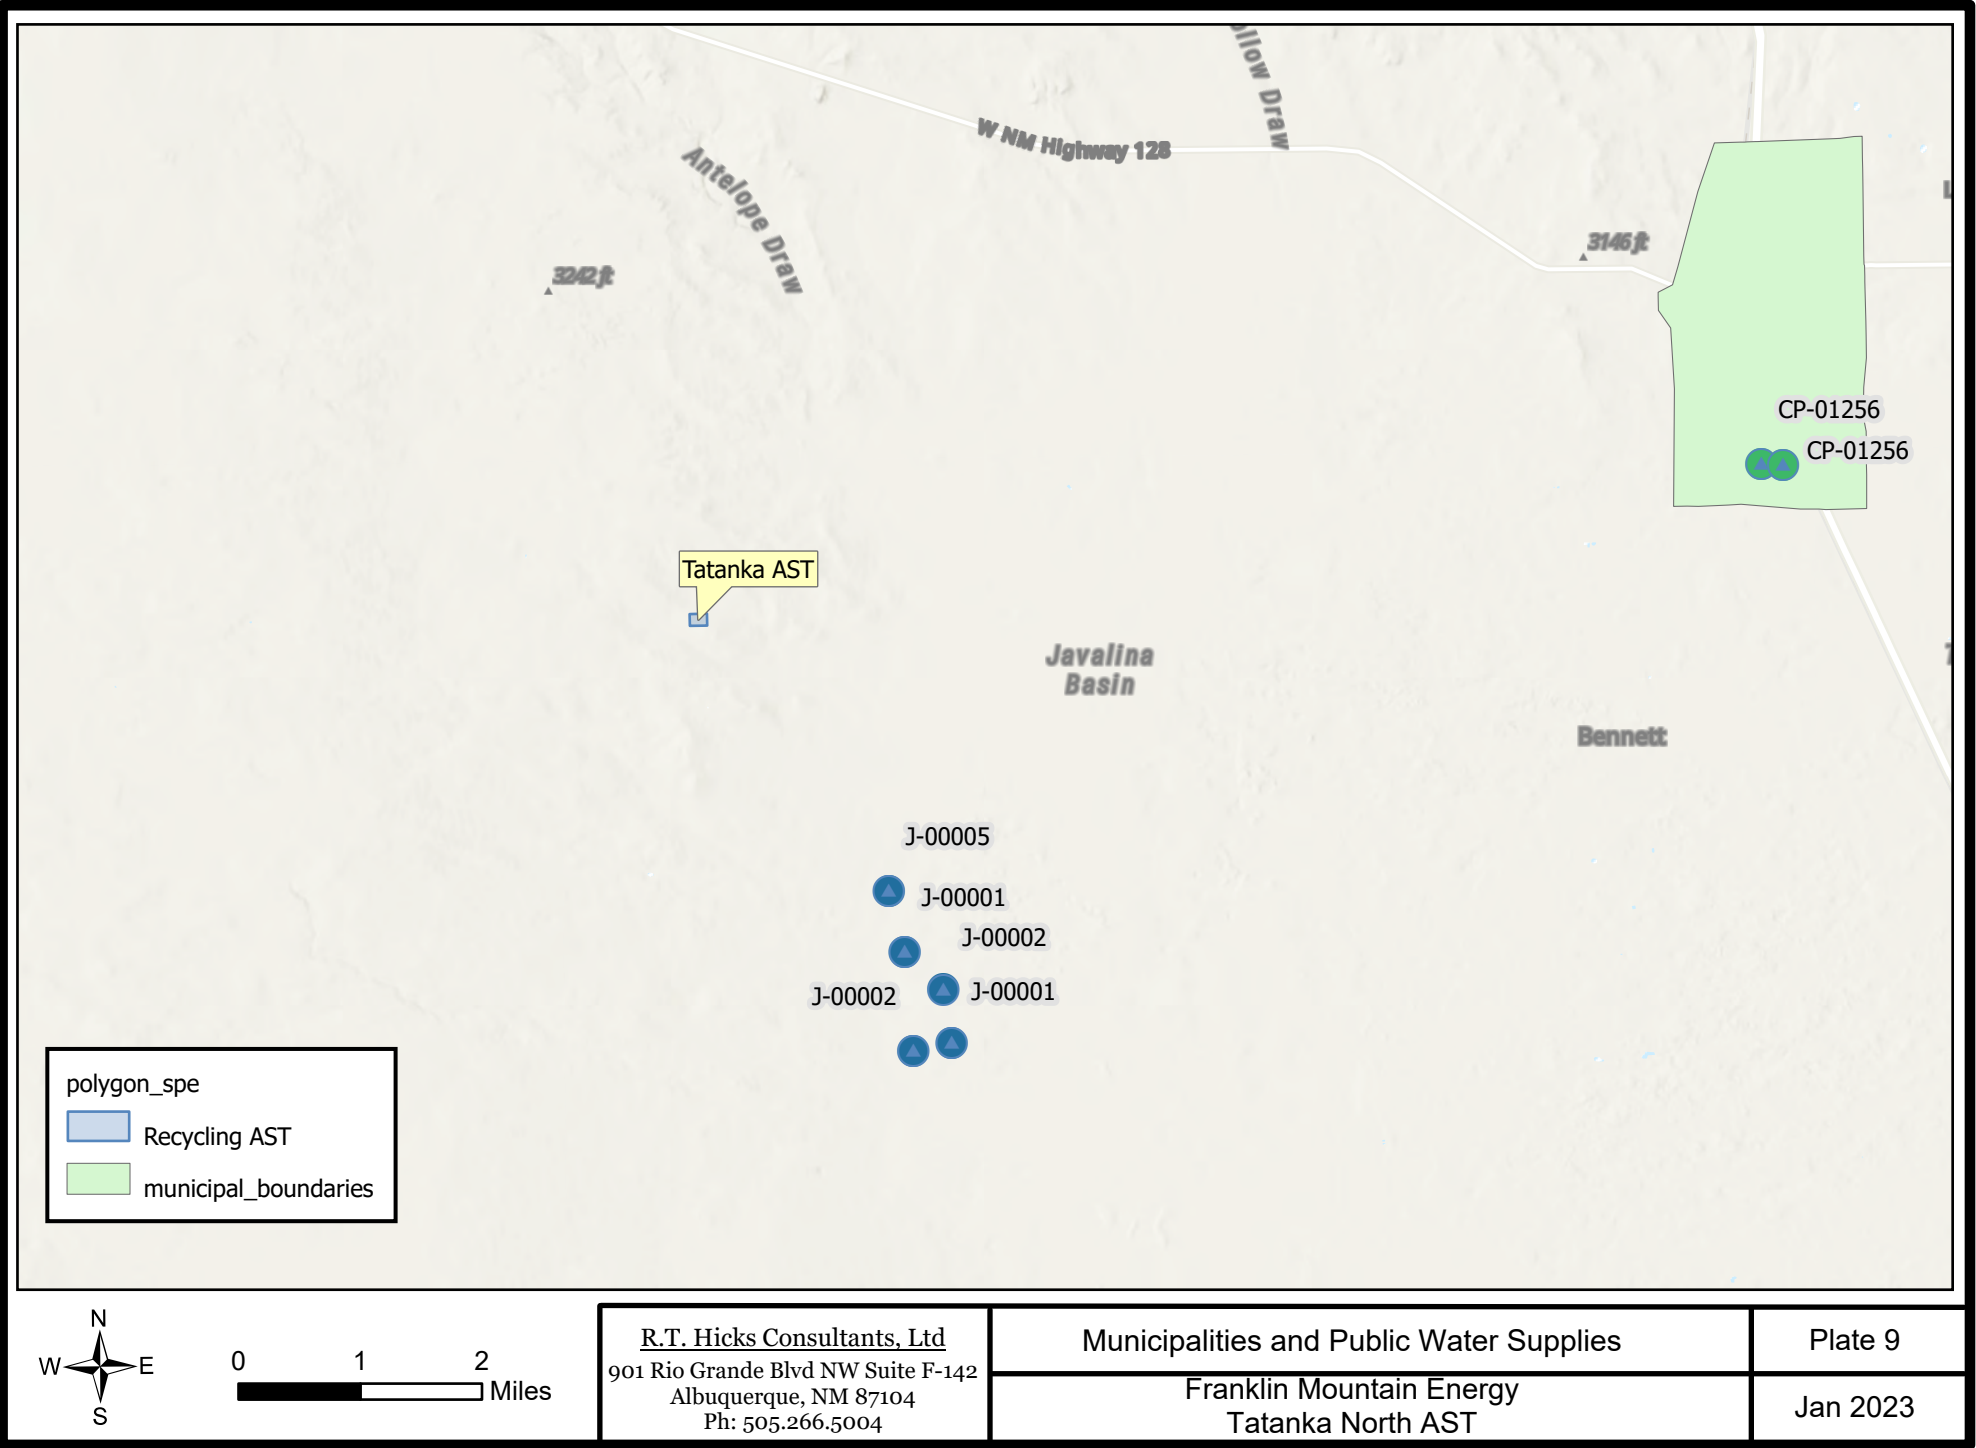

SITE PHOTOGRAPHS

Site Photos – Tatanka North AST



SP-1 – View northeast from center of USGS-mapped intermittent stream and wetland mapped by USA database. The drilling pad is the location of the proposed Tatanka North AST Containment.

32.08015, -103.34261



SP-2 View east-southeast (from same location as SP-1) toward the lease road in the center of the USGS-mapped intermittent stream. There is no bed or bank to this channel nor any evidence of flow. This channel does not meet the OCD definition of a watercourse.

Site Photos – Tatanka North AST



SP-3 Uphill from SP-1 and SP-2 from within swale that USGS maps as an intermittent stream. No evidence of bed, bank, or flow. 32.08015, -103.34261



SP-4 View west from the southwest corner of the drilling pad showing the nature of topography and vegetation around the proposed Tanaka North AST Containment. 32.08178, -103.34177

Appendix

USGS Data and WELL LOGS



WELL RECORD & LOG

OFFICE OF THE STATE ENGINEER

www.ose.state.nm.us

2017 JUL -7 AM 10:36

STATE ENGINEER OFFICE
ROSSELL, NEW MEXICO

1. GENERAL AND WELL LOCATION	OSE POD NUMBER (WELL NUMBER) CP-1305-POD1				OSE FILE NUMBER(S)			
	WELL OWNER NAME(S) Gregg Fulfer				PHONE (OPTIONAL) 575-631-0522			
	WELL OWNER MAILING ADDRESS P.O. Box 1227				CITY Jal		STATE NM	ZIP 88252
	WELL LOCATION (FROM GPS)	DEGREES LATITUDE 32	MINUTES 05	SECONDS 06.5976 N	* ACCURACY REQUIRED: ONE TENTH OF A SECOND			
	LONGITUDE 103	21	03.3840 W	* DATUM REQUIRED: WGS 84				
DESCRIPTION RELATING WELL LOCATION TO STREET ADDRESS AND COMMON LANDMARKS - PLSS (SECTION, TOWNSHIP, RANGE) WHERE AVAILABLE								
2. DRILLING & CASING INFORMATION	LICENSE NUMBER WD1706		NAME OF LICENSED DRILLER Bryce J Wallace			NAME OF WELL DRILLING COMPANY Elite Drillers Corporation		
	DRILLING STARTED 5/4/17	DRILLING ENDED 5/6/17	DEPTH OF COMPLETED WELL (FT) see driller's report 420 ft		BORE HOLE DEPTH (FT) 12.25	DEPTH WATER FIRST ENCOUNTERED (FT) 230		
	COMPLETED WELL IS: <input checked="" type="checkbox"/> ARTESIAN <input type="checkbox"/> DRY HOLE <input type="checkbox"/> SHALLOW (UNCONFINED)					STATIC WATER LEVEL IN COMPLETED WELL (FT) 215 220 ft see driller's report		
	DRILLING FLUID: <input checked="" type="checkbox"/> AIR <input type="checkbox"/> MUD ADDITIVES - SPECIFY:							
	DRILLING METHOD: <input checked="" type="checkbox"/> ROTARY <input type="checkbox"/> HAMMER <input type="checkbox"/> CABLE TOOL <input type="checkbox"/> OTHER - SPECIFY:							
	DEPTH (feet bgl)		BORE HOLE DIAM (inches)	CASING MATERIAL AND/OR GRADE (include each casing string, and note sections of screen)	CASING CONNECTION TYPE	CASING INSIDE DIAM. (inches)	CASING WALL THICKNESS (inches)	SLOT SIZE (inches)
	FROM	TO						
	0	20	17.5	A53 Grade B Steel		12.57	.188	
	0	320	12.25	A53 Grade B Steel	Weld	6.065	.280	
	320	420	12.25	SDR 21 PVC	Spline connection	6.0	SDR 21	.032
3. ANNULAR MATERIAL	DEPTH (feet bgl)		BORE HOLE DIAM. (inches)	LIST ANNULAR SEAL MATERIAL AND GRAVEL PACK SIZE-RANGE BY INTERVAL	AMOUNT (cubic feet)	METHOD OF PLACEMENT		
	FROM	TO						
	0	20	17.5	Neat Portland Cement Type 1/11	18	Pour		
	0	313	12.25	Neat Portland Cement Type 1/11	175	Trimmie		
	313	420	12.25	Silica sand 8-16	60	Pour		


FOR OSE INTERNAL USE

WR-20 WELL RECORD & LOG (Version 10/29/15)

FILE NUMBER CP-1305	POD NUMBER 255.37E.31.41	TRN NUMBER 604490
LOCATION com	PAGE 1 OF 2	

4. HYDROGEOLOGIC LOG OF WELL	DEPTH (feet bgl)		THICKNESS (feet)	COLOR AND TYPE OF MATERIAL ENCOUNTERED - INCLUDE WATER-BEARING CAVITIES OR FRACTURE ZONES (attach supplemental sheets to fully describe all units)	WATER BEARING? (YES / NO)	ESTIMATED YIELD FOR WATER- BEARING ZONES (gpm)
	FROM	TO				
	0	35	35	Sand and caliche.	Y ✓ N	STATE ENGINEER'S OFFICE ROSWELL, NEW MEXICO JUL - 7 AM 10:36 BFW
	35	70	35	Red Sandstone.	Y ✓ N	
	70	95	25	White sandstone.	Y ✓ N	
	95	125	35	Red sandstone.	Y ✓ N	
	125	165	40	Tan/Grey sandstone.	Y ✓ N	
	165	175	10	Red clay.	Y ✓ N	
	175	195	20	Sandstone with gravel.	Y ✓ N	
	195	280	85	Red/Tan/White sandstone.	Y ✓ N	
	280	320	40	Sandstone with clay stringers.	Y ✓ N	
	320	330	10	Red/Grey clay.	Y ✓ N	
	330	400	70	Sandstone.	Y ✓ N	
	400	420	20	Red clay.	Y ✓ N	
					Y N	
					Y N	
					Y N	
					Y N	
					Y N	
					Y N	
METHOD USED TO ESTIMATE YIELD OF WATER-BEARING STRATA:					TOTAL ESTIMATED WELL YIELD (gpm):	
<input type="checkbox"/> PUMP <input checked="" type="checkbox"/> AIR LIFT <input type="checkbox"/> BAILER <input type="checkbox"/> OTHER - SPECIFY:					60.00	

5. TEST; RIG SUPERVISION	WELL TEST	TEST RESULTS - ATTACH A COPY OF DATA COLLECTED DURING WELL TESTING, INCLUDING DISCHARGE METHOD, START TIME, END TIME, AND A TABLE SHOWING DISCHARGE AND DRAWDOWN OVER THE TESTING PERIOD.
	MISCELLANEOUS INFORMATION:	
	PRINT NAME(S) OF DRILL RIG SUPERVISOR(S) THAT PROVIDED ONSITE SUPERVISION OF WELL CONSTRUCTION OTHER THAN LICENSEE: Bryce J Wallace	

6. SIGNATURE	THE UNDERSIGNED HEREBY CERTIFIES THAT, TO THE BEST OF HIS OR HER KNOWLEDGE AND BELIEF, THE FOREGOING IS A TRUE AND CORRECT RECORD OF THE ABOVE DESCRIBED HOLE AND THAT HE OR SHE WILL FILE THIS WELL RECORD WITH THE STATE ENGINEER AND THE PERMIT HOLDER WITHIN 20 DAYS AFTER COMPLETION OF WELL DRILLING:	
	SIGNATURE OF DRILLER / PRINT SIGNED NAME  Bryce J Wallace	DATE 6/1/17

FOR OSE INTERNAL USE

WR-20 WELL RECORD & LOG (Version 10/29/2015)

FILE NUMBER	CP-1305	POD NUMBER	1	TRN NUMBER	604490
LOCATION	Com	25S 37E 31 41			PAGE 2 OF 2



WELL RECORD & LOG

OFFICE OF THE STATE ENGINEER

www.ose.state.nm.us

Copy

1. GENERAL AND WELL LOCATION	OSE POD NUMBER (WELL NUMBER)			OSE FILE NUMBER(S) CP-1285			
	WELL OWNER NAME(S) DINWIDDIE CATTLE COMPANY, LLC & ATKINS ENGINEERING A			PHONE (OPTIONAL) 575-354-2489			
	WELL OWNER MAILING ADDRESS P.O. BOX 3156			CITY ROSWELL			
				STATE NM			
	WELL LOCATION (FROM GPS)			ZIP 88202			
	DEGREES MINUTES SECONDS LATITUDE 32 03 55 N LONGITUDE 103 17 37 W			* ACCURACY REQUIRED: ONE TENTH OF A SECOND * DATUM REQUIRED: WGS 84			
	DESCRIPTION RELATING WELL LOCATION TO STREET ADDRESS AND COMMON LANDMARKS - PLSS (SECTION, TOWNSHIP, RANGE) WHERE AVAILABLE SE 1/4, SW 1/4, SW 1/4, SECTION 05, TOWNSHIP 26 SOUTH, RANGE 36 EAST N.M.P.M						
2. DRILLING & CASING INFORMATION	LICENSE NUMBER WD-1607		NAME OF LICENSED DRILLER LUIS A. (TONY) DURAN		NAME OF WELL DRILLING COMPANY DURAN DRILLING		
	DRILLING STARTED 7/01/15	DRILLING ENDED 7/6/15	DEPTH OF COMPLETED WELL (FT) 511	BORE HOLE DEPTH (FT) 510	DEPTH WATER FIRST ENCOUNTERED (FT) 250		
	COMPLETED WELL IS: <input type="radio"/> ARTESIAN <input type="radio"/> DRY HOLE <input checked="" type="radio"/> SHALLOW (UNCONFINED)				STATIC WATER LEVEL IN COMPLETED WELL (FT)		
	DRILLING FLUID: <input type="radio"/> AIR <input type="radio"/> MUD ADDITIVES - SPECIFY: DRILLING MUD						
	DRILLING METHOD: <input checked="" type="radio"/> ROTARY <input type="radio"/> HAMMER <input type="radio"/> CABLE TOOL <input type="radio"/> OTHER - SPECIFY:						
	DEPTH (feet bgl)		BORE HOLE DIAM (inches)	CASING MATERIAL AND/OR GRADE (include each casing string, and note sections of screen)	CASING CONNECTION TYPE	CASING INSIDE DIAM (inches)	CASING WALL THICKNESS (inches)
	FROM	TO					
	0	190	16	STEEL	STEEL PERF	10	1/4
	190	510	16	STEEL PERF	STEEL	10	1/4
3. ANNULAR MATERIAL	DEPTH (feet bgl)		BORE HOLE DIAM. (inches)	LIST ANNULAR SEAL MATERIAL AND GRAVEL PACK SIZE-RANGE BY INTERVAL	AMOUNT (cubic feet)	METHOD OF PLACEMENT	
	FROM	TO					
	0	20	16	20 BGS 80 LBS CEMENT		MIXER	
	20	510	16	36 YARDS 1/4 GRAVEL PACK			

FOR OSE INTERNAL USE

WR-20 WELL RECORD & LOG (Version 06/08/2012)

FILE NUMBER	CP-1285	POD NUMBER	TRN NUMBER	604512
LOCATION	26S.36E.5.3.3.3			

PAGE 1 OF 2

4. HYDROGEOLOGIC LOG OF WELL

5. TEST; RIG SUPERVISION

6. SIGNATURE

FOR USE INTERNAL USE		WR-20 WELL RECORD & LOG (Version 06/08/2012)	
FILE NUMBER	CP-1285	POD NUMBER	TRN NUMBER
LOCATION	26S.36E.5.3.3.3	Comm.	PAGE 2 OF 2



WELL RECORD & LOG

OFFICE OF THE STATE ENGINEER


www.ose.state.nm.us

1. GENERAL AND WELL LOCATION	OSE POD NUMBER (WELL NUMBER) 3				OSE FILE NUMBER(S) CP-1263			
	WELL OWNER NAME(S) BECKHAM RANCH, INC. / MSTAPLETON, LLC				PHONE (OPTIONAL) 575-441-3045			
	WELL OWNER MAILING ADDRESS P.O. BOX 823				CITY JAL		STATE NM	ZIP 88252
	WELL LOCATION (FROM GPS)	DEGREES LATITUDE 32	MINUTES 03	SECONDS 55	N	* ACCURACY REQUIRED: ONE TENTH OF A SECOND		
	LONGITUDE 103	18	15	W	* DATUM REQUIRED: WGS 84			
DESCRIPTION RELATING WELL LOCATION TO STREET ADDRESS AND COMMON LANDMARKS - PLSS (SECTION, TOWNSHIP, RANGE) WHERE AVAILABLE SE 1/4, NW 1/4, SW 1/4, SECTION 06, TOWNSHIP 26S, RANGE 36E								
2. DRILLING & CASING INFORMATION	LICENSE NUMBER WD-1607		NAME OF LICENSED DRILLER LUIS A. (TONY) DURAN			NAME OF WELL DRILLING COMPANY DURAN DRILLING		
	DRILLING STARTED 6/24/15	DRILLING ENDED 6/28/15	DEPTH OF COMPLETED WELL (FT) 516	BORE HOLE DEPTH (FT) 515	DEPTH WATER FIRST ENCOUNTERED (FT) 240			
	COMPLETED WELL IS: <input type="radio"/> ARTESIAN <input type="radio"/> DRY HOLE <input checked="" type="radio"/> SHALLOW (UNCONFINED)				STATIC WATER LEVEL IN COMPLETED WELL (FT)			
	DRILLING FLUID: <input type="radio"/> AIR <input type="radio"/> MUD ADDITIVES - SPECIFY: DRILLING MUD							
	DRILLING METHOD: <input checked="" type="radio"/> ROTARY <input type="radio"/> HAMMER <input type="radio"/> CABLE TOOL <input type="radio"/> OTHER - SPECIFY:							
	DEPTH (feet bgl)		BORE HOLE DIAM (inches)	CASING MATERIAL AND/OR GRADE (include each casing string, and note sections of screen)	CASING CONNECTION TYPE	CASING INSIDE DIAM. (inches)	CASING WALL THICKNESS (inches)	SLOT SIZE (inches)
	FROM	TO						
	0	215	16	STEEL	STEEL PERF	10	1/4	-
	215	515	16	STEEL PERF	STEEL	10	1/4	1/8
3. ANNULAR MATERIAL	DEPTH (feet bgl)		BORE HOLE DIAM. (inches)	LIST ANNULAR SEAL MATERIAL AND GRAVEL PACK SIZE-RANGE BY INTERVAL	AMOUNT (cubic feet)	METHOD OF PLACEMENT		
	FROM	TO						
	0	20	16	43 BGS 80 LBS CEMENT		MIXER		
	20	515	16	36 YARDS 3/8 GRAVEL				

FOR OSE INTERNAL USE

WR-20 WELL RECORD & LOG (Version 06/08/2012)

FILE NUMBER	CP-1263	POD NUMBER	3	TRN NUMBER	
LOCATION	26S. 36E. 6. 4. 3. 3			Ind.	PAGE 1 OF 2

4. HYDROGEOLOGIC LOG OF WELL	DEPTH (feet bgl)		THICKNESS (feet)	COLOR AND TYPE OF MATERIAL ENCOUNTERED - INCLUDE WATER-BEARING CAVITIES OR FRACTURE ZONES (attach supplemental sheets to fully describe all units)	WATER BEARING? (YES / NO)	ESTIMATED YIELD FOR WATER- BEARING ZONES (gpm)
	FROM	TO				
	0	1	1	TOPSOIL	<input type="radio"/> Y <input checked="" type="radio"/> N	
	1	15	14	CALICHE	<input type="radio"/> Y <input checked="" type="radio"/> N	
	15	35	20	SAND	<input type="radio"/> Y <input checked="" type="radio"/> N	
	35	85	50	SAND STONE	<input type="radio"/> Y <input checked="" type="radio"/> N	
	85	160	75	SANDY CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
	160	195	35	BROWN CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
	195	254	59	SAND	<input checked="" type="radio"/> Y <input type="radio"/> N	25
	254	350	96	SANDY CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
	350	384	34	SAND	<input checked="" type="radio"/> Y <input type="radio"/> N	100
	384	512	128	SANDY CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
	512	515	3	RED CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
METHOD USED TO ESTIMATE YIELD OF WATER-BEARING STRATA: <input type="radio"/> PUMP					TOTAL ESTIMATED WELL YIELD (gpm): 125	
<input type="radio"/> AIR LIFT <input checked="" type="radio"/> BAILER <input type="radio"/> OTHER - SPECIFY:						
5. TEST; RIG SUPERVISION	WELL TEST	TEST RESULTS - ATTACH A COPY OF DATA COLLECTED DURING WELL TESTING, INCLUDING DISCHARGE METHOD, START TIME, END TIME, AND A TABLE SHOWING DISCHARGE AND DRAWDOWN OVER THE TESTING PERIOD.				
	MISCELLANEOUS INFORMATION:					
	PRINT NAME(S) OF DRILL RIG SUPERVISOR(S) THAT PROVIDED ONSITE SUPERVISION OF WELL CONSTRUCTION OTHER THAN LICENSEE: LUIS A. DURAN					
6. SIGNATURE	THE UNDERSIGNED HEREBY CERTIFIES THAT, TO THE BEST OF HIS OR HER KNOWLEDGE AND BELIEF, THE FOREGOING IS A TRUE AND CORRECT RECORD OF THE ABOVE DESCRIBED HOLE AND THAT HE OR SHE WILL FILE THIS WELL RECORD WITH THE STATE ENGINEER AND THE PERMIT HOLDER WITHIN 20 DAYS AFTER COMPLETION OF WELL DRILLING:  SIGNATURE OF DRILLER / PRINT SIGNEE NAME					
						6-28-15 DATE

FOR OSE INTERNAL USE

WR-20 WELL RECORD & LOG (Version 06/08/2012)

FILE NUMBER	CP-1263	POD NUMBER	TRN NUMBER
LOCATION	26S. 36E. 6. 4. 3. 3	Ind.	PAGE 2 OF 2



WELL RECORD & LOG

OFFICE OF THE STATE ENGINEER

www.ose.state.nm.us

1. GENERAL AND WELL LOCATION	OSE POD NUMBER (WELL NUMBER) 5				OSE FILE NUMBER(S) CP-1170					
	WELL OWNER NAME(S) Beckham Ranch Inc.				PHONE (OPTIONAL) 706-5659					
	WELL OWNER MAILING ADDRESS 3904 Jesse James Ct				CITY Carlsbad		STATE NM			
					ZIP 88220					
WELL LOCATION (FROM GPS)	DEGREES		MINUTES		SECONDS					
	LATITUDE		32		07		16 N			
	LONGITUDE		103		17		51 W			
* ACCURACY REQUIRED: ONE TENTH OF A SECOND										
* DATUM REQUIRED: WGS 84										
DESCRIPTION RELATING WELL LOCATION TO STREET ADDRESS AND COMMON LANDMARKS - PLSS (SECTION, TOWNSHIP, RANGE) WHERE AVAILABLE SE1/4, NE1/4, NE1/4, SECTION19, TOWNSHIP25S, RANGE36E										
2. DRILLING & CASING INFORMATION	LICENSE NUMBER WD-1607		NAME OF LICENSED DRILLER LUIS A. (TONY) DURAN				NAME OF WELL DRILLING COMPANY DURAN DRILLING			
	DRILLING STARTED 10-28-14		DRILLING ENDED 11-04-14		DEPTH OF COMPLETED WELL (FT) 506		BORE HOLE DEPTH (FT) 505		DEPTH WATER FIRST ENCOUNTERED (FT) 270	
	COMPLETED WELL IS: <input type="radio"/> ARTESIAN <input type="radio"/> DRY HOLE <input checked="" type="radio"/> SHALLOW (UNCONFINED)								STATIC WATER LEVEL IN COMPLETED WELL (FT)	
	DRILLING FLUID: <input type="radio"/> AIR <input type="radio"/> MUD ADDITIVES - SPECIFY: DRILLING MUD									
	DRILLING METHOD: <input checked="" type="radio"/> ROTARY <input type="radio"/> HAMMER <input type="radio"/> CABLE TOOL <input type="radio"/> OTHER - SPECIFY:									
	DEPTH (feet bgl)		BORE HOLE DIAM (inches)	CASING MATERIAL AND/OR GRADE (include each casing string, and note sections of screen)	CASING CONNECTION TYPE	CASING INSIDE DIAM. (inches)	CASING WALL THICKNESS (inches)	SLOT SIZE (inches)		
	FROM	TO								
	0	200	12	STEEL	STEEL PERF	8	1/4	-		
	200	505	12	STEEL PERF	STEEL	8	1/4	1/8		
3. ANNULAR MATERIAL	DEPTH (feet bgl)		BORE HOLE DIAM. (inches)	LIST ANNULAR SEAL MATERIAL AND GRAVEL PACK SIZE-RANGE BY INTERVAL	AMOUNT (cubic feet)	METHOD OF PLACEMENT				
	FROM	TO								
	0	20	12	20 BGS 80 LBS CEMENT		MIXER				
	20	505	12	32 YARDS 1/4 GRAVEL						

FOR OSE INTERNAL USE

WR-20 WELL RECORD & LOG (Version 06/08/2012)

FILE NUMBER

CP-1170

POD NUMBER

5

TRN NUMBER


525599

255.36E.19.2.2.4

Commercial

4. HYDROGEOLOGIC LOG OF WELL	DEPTH (feet bgl)		THICKNESS (feet)	COLOR AND TYPE OF MATERIAL ENCOUNTERED - INCLUDE WATER-BEARING CAVITIES OR FRACTURE ZONES (attach supplemental sheets to fully describe all units)	WATER BEARING? (YES / NO)	ESTIMATED YIELD FOR WATER- BEARING ZONES (gpm)
	FROM	TO				
	0	1	1	TOP SOIL	<input type="radio"/> Y <input checked="" type="radio"/> N	
	1	2	1	CALICHE	<input type="radio"/> Y <input checked="" type="radio"/> N	
	2	36	34	CLAY & ROCK MIX	<input type="radio"/> Y <input checked="" type="radio"/> N	
	36	305	269	SAND	<input type="radio"/> Y <input checked="" type="radio"/> N	
	305	320	15	CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
	320	335	15	ROCK & SAND MIX	<input checked="" type="radio"/> Y <input type="radio"/> N	17
	335	365	30	ROCK & CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
	365	420	55	ROCK SAND MIX	<input checked="" type="radio"/> Y <input type="radio"/> N	8
	420	454	34	CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
	454	463	9	SAND	<input checked="" type="radio"/> Y <input type="radio"/> N	10
	463	502	39	CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
	502	505	3	RED BED	<input type="radio"/> Y <input checked="" type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
METHOD USED TO ESTIMATE YIELD OF WATER-BEARING STRATA: <input type="radio"/> PUMP					TOTAL ESTIMATED	
<input type="radio"/> AIR LIFT <input checked="" type="radio"/> BAILER <input type="radio"/> OTHER - SPECIFY:					WELL YIELD (gpm): 35	

5. TEST; RIG SUPERVISION	WELL TEST	TEST RESULTS - ATTACH A COPY OF DATA COLLECTED DURING WELL TESTING, INCLUDING DISCHARGE METHOD, START TIME, END TIME, AND A TABLE SHOWING DISCHARGE AND DRAWDOWN OVER THE TESTING PERIOD.
	MISCELLANEOUS INFORMATION:	
PRINT NAME(S) OF DRILL RIG SUPERVISOR(S) THAT PROVIDED ONSITE SUPERVISION OF WELL CONSTRUCTION OTHER THAN LICENSEE: LUIS A. (TONY) DURAN		

6. SIGNATURE	THE UNDERSIGNED HEREBY CERTIFIES THAT, TO THE BEST OF HIS OR HER KNOWLEDGE AND BELIEF, THE FOREGOING IS A TRUE AND CORRECT RECORD OF THE ABOVE DESCRIBED HOLE AND THAT HE OR SHE WILL FILE THIS WELL RECORD WITH THE STATE ENGINEER AND THE PERMIT HOLDER WITHIN 20 DAYS AFTER COMPLETION OF WELL DRILLING:	
	<div style="display: flex; justify-content: space-between;"> <div>  SIGNATURE OF DRILLER / PRINT SIGNEE NAME </div> <div> 11/04/14 DATE </div> </div>	

FOR OSE INTERNAL USE

WR-20 WELL RECORD & LOG (Version 06/08/2012)

FILE NUMBER

CP-1170

POD NUMBER

5

TRN NUMBER

525599

25S.36E.19.22.4



WELL RECORD & LOG

OFFICE OF THE STATE ENGINEER

www.ose.state.nm.us

2014 APR 21 AM 10:06


1. GENERAL AND WELL LOCATION	OSE POD NUMBER (WELL NUMBER) CP-858 POD 2				OSE FILE NUMBER(S)				
	WELL OWNER NAME(S) DINWIDDIE CATTLE, LLC.				PHONE (OPTIONAL) 575-631-0385				
	WELL OWNER MAILING ADDRESS P.O. BOX 963				CITY CAPITAN		STATE NM	ZIP 88354	
	WELL LOCATION (FROM GPS)	DEGREES 32	MINUTES 5	SECONDS 53.6	N	* ACCURACY REQUIRED: ONE TENTH OF A SECOND			
		LONGITUDE 103	17	10.92	W	* DATUM REQUIRED: WGS 84			
DESCRIPTION RELATING WELL LOCATION TO STREET ADDRESS AND COMMON LANDMARKS - PLSS (SECTION, TOWNSHIP, RANGE) WHERE AVAILABLE 2.5 MI SOUTH OF HWY 128 @ MILE MKR 47, LEA COUNTY. NW 1/4 NW1/4 SE1/4 S29 T25S R36E									
2. DRILLING & CASING INFORMATION	LICENSE NUMBER WD311-331		NAME OF LICENSED DRILLER PHILLIP STEWART			NAME OF WELL DRILLING COMPANY STEWART BROTHERS DRLG. CO.			
	DRILLING STARTED 04-07-14		DRILLING ENDED 04-12-14		DEPTH OF COMPLETED WELL (FT) 600'		BORE HOLE DEPTH (FT) 605'		
							DEPTH WATER FIRST ENCOUNTERED (FT) 282'		
	COMPLETED WELL IS: <input type="radio"/> ARTESIAN <input type="radio"/> DRY HOLE <input checked="" type="radio"/> SHALLOW (UNCONFINED)							STATIC WATER LEVEL IN COMPLETED WELL (FT)	
	DRILLING FLUID: <input type="radio"/> AIR <input checked="" type="radio"/> MUD ADDITIVES - SPECIFY:								
	DRILLING METHOD: <input checked="" type="radio"/> ROTARY <input type="radio"/> HAMMER <input type="radio"/> CABLE TOOL <input type="radio"/> OTHER - SPECIFY:								
	DEPTH (feet bgl)		BORE HOLE DIAM (inches)	CASING MATERIAL AND/OR GRADE (include each casing string, and note sections of screen)	CASING CONNECTION TYPE	CASING INSIDE DIAM. (inches)	CASING WALL THICKNESS (inches)	SLOT SIZE (inches)	
	FROM	TO							
	+2	260	12.25	LCS BLANK	WELDED	6.125	.25	NA	
	260	580	12.25	LCS SCREEN	WELDED	6.125	.25	.040	
580	600	12.25	LCS BLANK	WELDED	6.125	.25	.NA		
3. ANNULAR MATERIAL	DEPTH (feet bgl)		BORE HOLE DIAM. (inches)	LIST ANNULAR SEAL MATERIAL AND GRAVEL PACK SIZE-RANGE BY INTERVAL	AMOUNT (cubic feet)	METHOD OF PLACEMENT			
	FROM	TO							
	0	222	12.25	NEAT CEMENT	135	TREMIE			
	222	232	12.25	BENTONITE PELLETS	5.25	TREMIE			
	232	600	12.25	PREMIER SILICA SAND	210	TREMIE			

FOR OSE INTERNAL USE

WR-20 WELL RECORD & LOG (Version 06/08/2012)

FILE NUMBER	CP-858	POD NUMBER	2	TRN NUMBER	604615
LOCATION	25S.36E.29.4.1.3				

PAGE 1 OF 2

4. HYDROGEOLOGIC LOG OF WELL	DEPTH (feet bgl)		THICKNESS (feet)	COLOR AND TYPE OF MATERIAL ENCOUNTERED - INCLUDE WATER-BEARING CAVITIES OR FRACTURE ZONES (attach supplemental sheets to fully describe all units)	WATER BEARING? (YES / NO)	ESTIMATED YIELD FOR WATER- BEARING ZONES (gpm)
	FROM	TO				
	0	80	80	RED SILT TO PINK SILT AND (ALLUVIAL)	<input type="radio"/> Y <input checked="" type="radio"/> N	
	80	130	50	LITE GRAY SILTY AND CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
	130	160	30	RED CLAYEY SILT	<input type="radio"/> Y <input checked="" type="radio"/> N	
	160	190	30	LITE GRAY CLAYEY SILT	<input type="radio"/> Y <input checked="" type="radio"/> N	
	190	230	40	LITE GRAY SILTY CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
	230	280	50	BROWN SILTY CLAY	<input type="radio"/> Y <input checked="" type="radio"/> N	
	280	290	10	GRAY SILTY SAND	<input checked="" type="radio"/> Y <input type="radio"/> N	
	290	370	80	RED TO BROWN SILTONE WITH SMALL GRVL	<input checked="" type="radio"/> Y <input type="radio"/> N	
	370	530	160	TAN SAND FINE TO COURSE	<input checked="" type="radio"/> Y <input type="radio"/> N	
	530	560	30	GRAY LILTSTONE WITH SOME GRVL	<input checked="" type="radio"/> Y <input type="radio"/> N	
	560	605	45	PINK TO RED SILTY SHALE	<input type="radio"/> Y <input checked="" type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
					<input type="radio"/> Y <input type="radio"/> N	
METHOD USED TO ESTIMATE YIELD OF WATER-BEARING STRATA: <input type="radio"/> PUMP					TOTAL ESTIMATED WELL YIELD (gpm): 30	
<input checked="" type="radio"/> AIR LIFT <input type="radio"/> BAILER <input type="radio"/> OTHER - SPECIFY:						
5. TEST; RIG SUPERVISION	WELL TEST TEST RESULTS - ATTACH A COPY OF DATA COLLECTED DURING WELL TESTING, INCLUDING DISCHARGE METHOD, START TIME, END TIME, AND A TABLE SHOWING DISCHARGE AND DRAWDOWN OVER THE TESTING PERIOD.					
	MISCELLANEOUS INFORMATION:					
	PRINT NAME(S) OF DRILL RIG SUPERVISOR(S) THAT PROVIDED ONSITE SUPERVISION OF WELL CONSTRUCTION OTHER THAN LICENSEE: GABE ARMIJO, DON TAYLOR, JOE SANCHEZ					
6. SIGNATURE	THE UNDERSIGNED HEREBY CERTIFIES THAT, TO THE BEST OF HIS OR HER KNOWLEDGE AND BELIEF, THE FOREGOING IS A TRUE AND CORRECT RECORD OF THE ABOVE DESCRIBED HOLE AND THAT HE OR SHE WILL FILE THIS WELL RECORD WITH THE STATE ENGINEER AND THE PERMIT HOLDER WITHIN 20 DAYS AFTER COMPLETION OF WELL DRILLING:					
	 SIGNATURE OF DRILLER / PRINT SIGNEE NAME				4-17-14 DATE	

FOR OSE INTERNAL USE

WR-20 WELL RECORD & LOG (Version 06/08/2012)

FILE NUMBER

CP-858

POD NUMBER

2

TRN NUMBER

604615

LOCATION

25S.36E.29.4-1.3

PAGE 2 OF 2

January 2023

Volume 2

C-147 Registration Package for Tatanka AST Containment

Section 35 T25S R35E, Lea County NM

**Design/Construction Plan
Engineering Drawings and Liner Specifications
Well Water Services Manual
Variances for AST Storage Containments
Applicability of Engineering Variances to Variety of
Site Conditions in Permian Basin**



Aerial view showing in-ground containments designed by Magrym Consulting and permitted by Hicks Consultants. Also shown are two 60,000 bbl above-ground storage tank containments permitted by Hicks Consultants. Photograph by permission from Magrym Consulting.

Prepared for:
Franklin Mountain Energy LLC
Denver, Colorado

Prepared by:
R.T. Hicks Consultants, Ltd.
901 Rio Grande NW, Ste F-142
Albuquerque, New Mexico 87104

Box 9

DESIGN AND CONSTRUCTION PLAN

9.

Recycling Facility and/or Containment Checklist:*Instructions: Each of the following items must be attached to the application. Indicate, by a check mark in the box, that the documents are attached.*

- ☒ Design Plan - based upon the appropriate requirements.
- ☒ Operating and Maintenance Plan - based upon the appropriate requirements.
- ☒ Closure Plan - based upon the appropriate requirements.
- ☒ Site Specific Groundwater Data -
- ☒ Siting Criteria Compliance Demonstrations –
- ☒ Certify that notice of the C-147 (only) has been sent to the surface owner(s)

Design and Construction Plan Above Ground Tank (AST) Containments

General

Examination of the engineering drawings and the SOP for set-up (Appendix Engineering Drawings, Liner Specifications, Set Up) plus the history of solid performance of these AST Containments demonstrates that the AST Containment is designed and will be assembled to ensure the confinement of produced water, to prevent releases and to prevent overtopping due to wave action or rainfall. As the AST Containments are generally less than 190 feet in diameter, wave action is not a meaningful consideration.

These AST Containments are constructed of 12-foot high steel panels and are netted or employ the Mega Blaster Pro avian deterrent system to prevent ingress of migratory birds. AST Containments will be enclosed by a 4-strand barbed wire fence. Thus, complies with the Rule to fence or enclose a recycling containment in a manner that deters unauthorized wildlife and human access and shall maintain the fences in good repair.

The operator shall post an upright sign no less than 12 inches by 24 inches with lettering not less than two inches in height in conspicuous places surrounding the containment. The operator shall post the sign in a manner and location such that a person can easily read the legend. The sign shall provide the following information: the operator's name, the location of the site by quarter-quarter or unit letter, section, township and range, and emergency telephone numbers.

Site Preparation

Foundation for AST Containment

Preparation of the soils on site is required to form a dependable base for the AST Containment in accordance with the SOP. If the location of the AST Containment is on an existing pad, the operator has stripped and stockpiled the topsoil for use as the final cover or fill at the time of closure. If the pad is new construction, the operator will strip and stockpile the soil for reclamation upon cessation of site activities.

19.15.34.12 A

(1) The operator shall design and construct a recycling containment to ensure the confinement of produced water, to prevent releases and to prevent overtopping due to wave action or rainfall.

19.15.34.12 D

(1) The operator shall fence or enclose a recycling containment in a manner that deters unauthorized wildlife and human access and shall maintain the fences in good repair. The operator shall ensure that all gates associated with the fence are closed and locked when responsible personnel are not onsite.

19.15.34.12 C

Signs. The operator shall post an upright sign no less than 12 inches by 24 inches with lettering not less than two inches in height in a conspicuous place on the fence surrounding the containment. The operator shall post the sign in a manner and location such that a person can easily read the legend. The sign shall provide the following information: the operator's name, the location of the site by quarter-quarter or unit letter, section, township and range, and emergency telephone numbers.

19.15.34.12 B

Stockpiling of topsoil. Prior to constructing containment, the operator shall strip and stockpile the topsoil for use as the final cover or fill at the time of closure.

Design and Construction Plan Above Ground Tank (AST) Containments

The foundation soils must be roller compacted smooth and free of loose aggregate over ½ inch. Compaction characteristics must meet or exceed 95% of Standard Proctor Density in accordance with ASTM D 698.

Examination of the SOP shows that the AST Containment contractor will conform to the following mandates of the Rule:

- the AST Containment will have a properly constructed compacted earth foundation and interior slopes (vertical steel) consisting of a firm, unyielding base, smooth and free of rocks, debris, sharp edges or irregularities to prevent the liner's rupture or tear.
- Geotextile will be placed under the liner where needed to reduce localized stress-strain or protuberances that otherwise may compromise the liner's integrity.
- If the AST Containment is within a levee, the inside grade is no steeper than two horizontal feet to one vertical foot (2H: 1V) and the outside grade no steeper than three horizontal feet to one vertical foot (3H: 1V). The vertical steel walls of the AST Containment are the *subject of a requested variance*.

The Operator will ensure that at a point of discharge into or suction from the recycling containment, the liner is protected from excessive hydrostatic force or mechanical damage and external discharge or suction lines shall not penetrate the liner.

Liner and Leak Detection Materials

The liner and geotextile specifications show that all primary (upper) liners in a recycling containment shall be geomembrane liners composed of an impervious, synthetic material that is resistant to ultraviolet light, petroleum hydrocarbons, salts and acidic and alkaline solutions. All primary liners shall be *an equivalent liner [to that stated in Rule 34] approved by OCD pursuant to a variance*. The liner system is presented in an earlier section of this submission.

All secondary liners shall be *an equivalent liner [to that stated in Rule 34] or approved by OCD pursuant to a*

19.15.34.12 A

(2) A recycling containment shall have a properly constructed foundation and interior slopes consisting of a firm, unyielding base, smooth and free of rocks, debris, sharp edges or irregularities to prevent the liner's rupture or tear. Geotextile is required under the liner when needed to reduce localized stress-strain or protuberances that otherwise may compromise the liner's integrity. The operator shall construct the containment in a levee with an inside grade no steeper than two horizontal feet to one vertical foot (2H:1V). The levee shall have an outside grade no steeper than three horizontal feet to one vertical foot (3H:1V). The top of the levee shall be wide enough to install an anchor trench and provide adequate room for inspection and maintenance.

19.15.34.12 A

(6) At a point of discharge into or suction from the recycling containment, the operator shall insure that the liner is protected from excessive hydrostatic force or mechanical damage. External discharge or suction lines shall not penetrate the liner.

19.15.34.12 A

(4) All primary (upper) liners in a recycling containment shall be geomembrane liners composed of an impervious, synthetic material that is resistant to ultraviolet light, petroleum hydrocarbons, salts and acidic and alkaline solutions. All primary liners shall be 30-mil flexible PVC, 45-mil LLDPE string reinforced or 60-mil HDPE liners. Secondary liners shall be 30-mil LLDPE string reinforced or equivalent with a hydraulic conductivity no greater than 1×10^{-9} cm/sec. Liner compatibility shall meet or exceed the EPA SW-846 method 9090A or subsequent relevant publications.

Design and Construction Plan Above Ground Tank (AST) Containments

variance. The liner system is presented in an earlier section of this submission.

Liner compatibility shall meet or exceed the EPA SW-846 method 9090A or subsequent relevant publications.

The AST Containment will have a leak detection system between the upper and lower geomembrane liners that shall consist of 200-mil geonet to facilitate drainage.

Install Secondary Liner, Leak Detection System and Secondary Containment

All AST containments holding produced water will have a primary (upper) liner and a secondary (lower) liner with a leak detection system appropriate to the site's conditions. The rule states that the edges of all secondary liners shall be anchored in the bottom of a compacted earth-filled trench. The anchor trench shall be at least 18 inches deep. *The lack of an anchor trench with an AST Containment is also the subject of requested variance.*

The AST Containment Contractor will cause the recycling containment will have a leak detection system between the upper and lower geomembrane liners that shall consist of 200-mil geonet to facilitate drainage. The leak detection system shall consist of a properly designed drainage and collection and removal system placed above the lower geomembrane liner in depressions and sloped to facilitate the earliest possible leak detection (see attached design sketch).

The presence of the secondary containment levee or pre-fabricated secondary containment meets the OCD Rule mandate that a recycling containment shall design the containment to prevent run-on of surface water. The containment shall be surrounded by a berm, ditch or other diversion to prevent run-on of surface water.

AST Containment Setup

As with the secondary liner, AST Containment contractor will minimize liner seams and orient them up and down, as much as possible, not across, a slope. Factory welded seams shall be used where possible. AST Containment contractor will employ field seams in

19.15.34.12 A

(3) Each recycling containment shall incorporate, at a minimum, a primary (upper) liner and a secondary (lower) liner with a leak detection system appropriate to the site's conditions. The edges of all liners shall be anchored in the bottom of a compacted earth-filled trench. The anchor trench shall be at least 18 inches deep.

19.15.34.12 A

(7) The operator of a recycling containment shall place a leak detection system between the upper and lower geomembrane liners that shall consist of 200-mil geonet or two feet of compacted soil with a saturated hydraulic conductivity of 1×10^{-5} cm/sec or greater to facilitate drainage. The leak detection system shall consist of a properly designed drainage and collection and removal system placed above the lower geomembrane liner in depressions and sloped to facilitate the earliest possible leak detection.

19.15.34.12 A

(8) The operator of a recycling containment shall design the containment to prevent run-on of surface water. The containment shall be surrounded by a berm, ditch or other diversion to prevent run-on of surface water.

19.15.34.12 A

(5) The operator of a recycling containment shall minimize liner seams and orient them up and down, not across, a slope of the levee. Factory welded seams shall be used where possible. The

Design and Construction Plan Above Ground Tank (AST) Containments

geosynthetic material that are thermally seamed. Prior to field seaming, AST Containment contractor shall overlap liners four to six inches and minimize the number of field seams and corners and irregularly shaped areas. There shall be no horizontal seams within five feet of the AST Containment bottom. Qualified personnel shall perform field welding and testing.


Fluid Injection/Withdrawal Flow Diverter

The injection or withdrawal of fluids from the containment shall be accomplished through a header, diverter or other hardware that prevents damage to the liner by erosion, fluid jets or impact from installation and removal of hoses or pipes.

operator shall ensure field seams in geosynthetic material are thermally seamed. Prior to field seaming, the operator shall overlap liners four to six inches. The operator shall minimize the number of field seams and corners and irregularly shaped areas. There shall be no horizontal seams within five feet of the slope's toe. Qualified personnel shall perform field welding and testing.

19.15.34.13 B

(3) The injection or withdrawal of fluids from the containment shall be accomplished through a header, diverter or other hardware that prevents damage to the liner by erosion, fluid jets or impact from installation and removal of hoses or pipes.

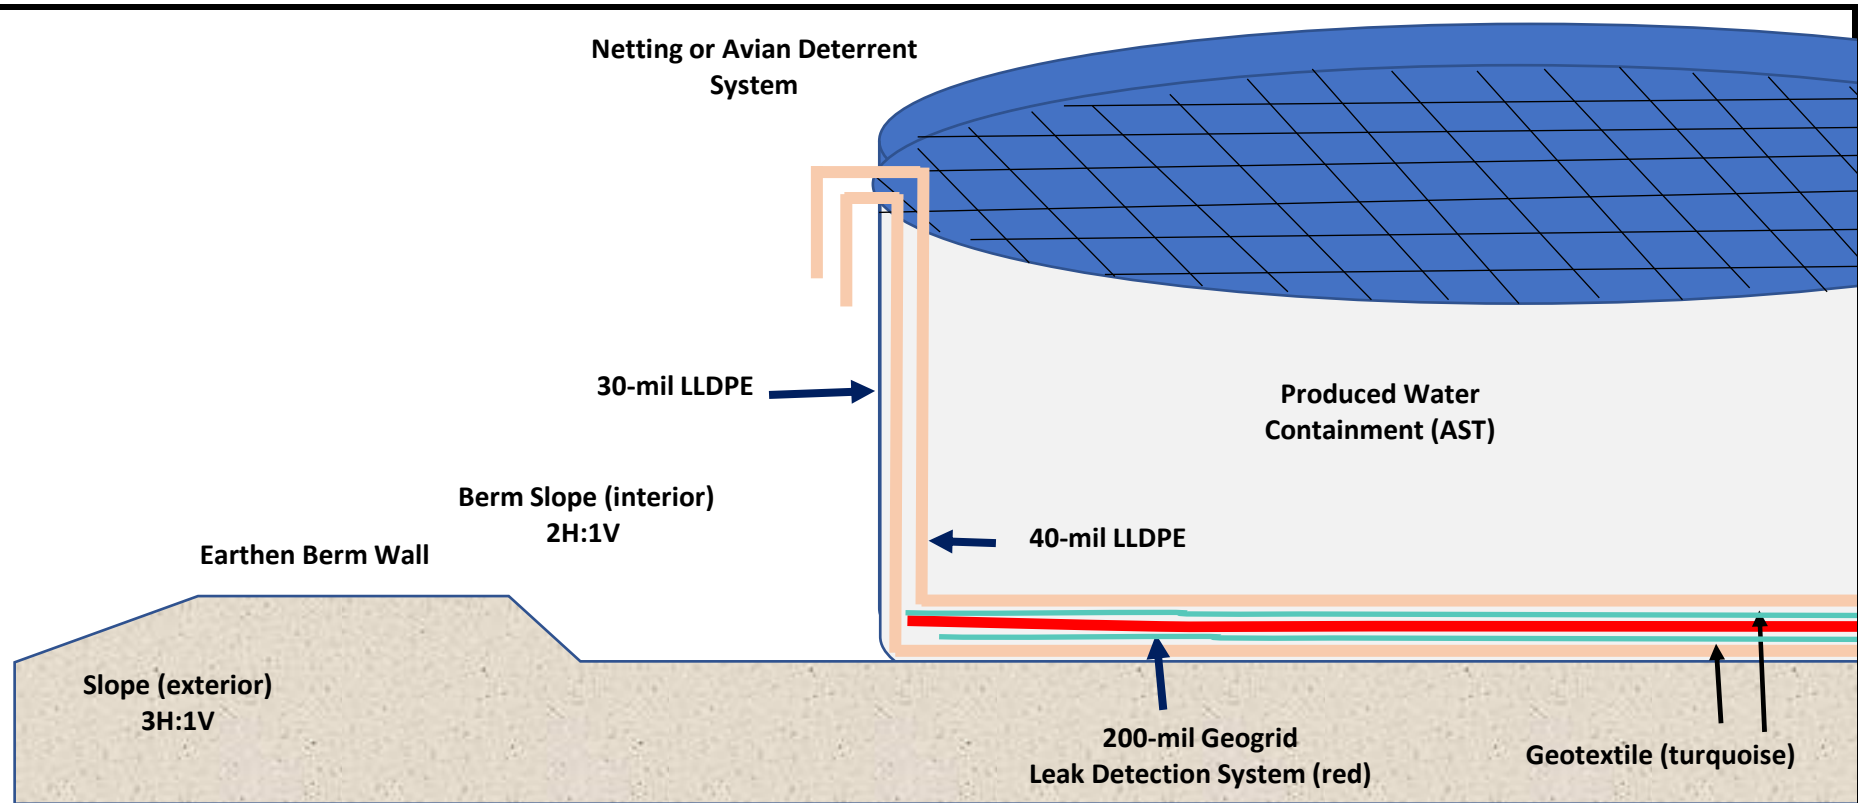




Description of Leak Detection System

- 40-mil LLDPE comprise primary liner and 30-mil LLDPE comprise the secondary liner
- 200-mil geogrid drainage layer lies between the primary and secondary liner per Plate 2
- Geotextile between the geogrid and each liner
- > 3-inch deep sump excavated on down slope side of AST per Sump Design Drawing
- A small hose runs from the collection sump to top of AST via tube (see Section D)
- Every week, a portable self-priming peristaltic pump connects to the leak detection system.
- The self-priming pump discharge hose runs back into the AST, on top of the primary liner
- If fluid is detected, it is tested for conductance to determine the origin of the water (i.e. produced water or condensation)

R.T. Hicks Consultants Albuquerque, NM	Design Sketch	Plate 1
	Well Water Solutions	May-21

200 mil geogrid placed
above 8-oz geotextile and 30-mil secondary liner
inside of AST after set up, before install of primary liner
below 40-mil primary liner
8-oz geotextile is placed
over the 30-mil LLDPE liner inside the steel AST ring
under the 40-mil primary liner inside the AST

Sump at lowest point of the AST set up

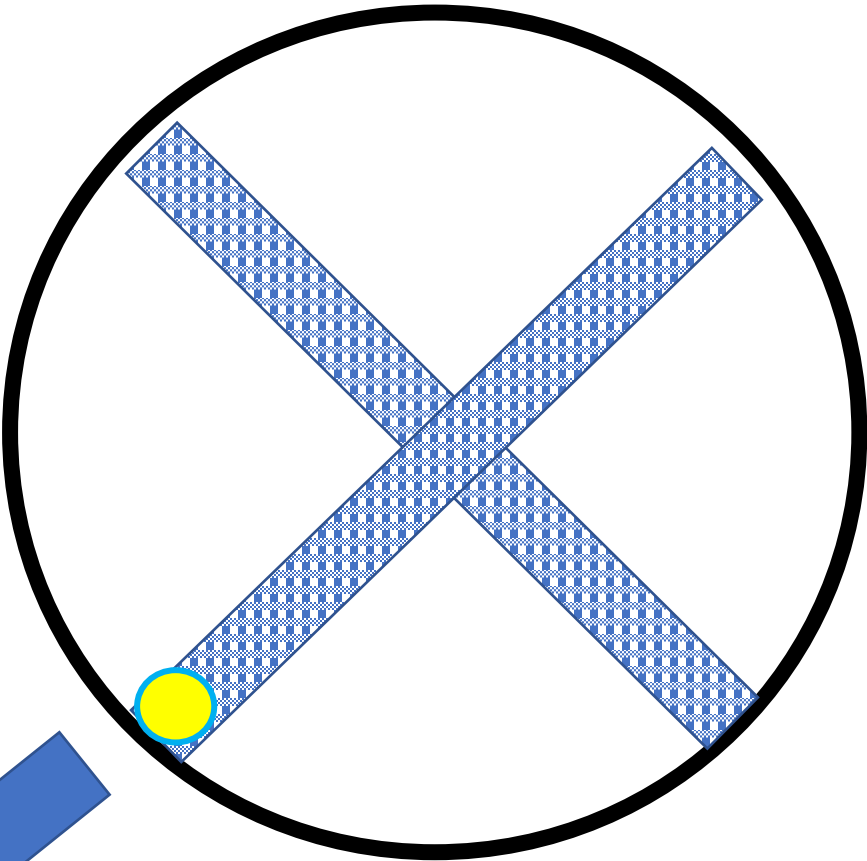

R.T. Hicks Consultants Albuquerque, NM	Layout of Geogrid Drainage Mat	Plate 2
	WWS - North Olympus AST	June 2021

C 147 – Box 3
RECYCLING CONTAINMENT DESIGN DRAWINGS
SET UP SOP
LINER SPECIFICATIONS

PILLAR STRUCTURAL ENGINEERING

June 4, 2021

Well Water Solutions and Rental, Inc.
2130 W. 40th
Casper, WY 82604
Attn: Sean Lovelace

Re: Portable Frac Tank Certification – Pinned Seams

Dear Mr. Lovelace:

Per your request our office has performed a structural analysis of the portable frac tanks as well as the associated accessories. This analysis was performed to determine that the tanks meet the required strength criteria under operating conditions according to the AISC Manual of Steel Construction.

The tanks range in diameter from approximately 60 to 217 feet and are 11 feet, 8 inches in height and are designed to store water. They are constructed of individual steel reinforced panels that are connected together with a patent pending steel pin system.

The following tanks sizes were included in the analysis:

- 6,000 BBL – Approximately 60'Ø
- 10,000 BBL – Approximately 81'Ø
- 20,000 BBL – Approximately 108'Ø
- 30,000 BBL – Approximately 135'Ø
- 33,000 BBL – Approximately 142'Ø
- 36,000 BBL – Approximately 148'Ø
- 40,000 BBL – Approximately 156'Ø
- 43,000 BBL – Approximately 162'Ø
- 47,000 BBL – Approximately 169'Ø
- 50,000 BBL – Approximately 176'Ø
- 55,000 BBL – Approximately 183'Ø
- 60,000 BBL – Approximately 190'Ø
- 80,000 BBL – Approximately 217'Ø



1964 East 1st Street
Casper, WY 82601

PHONE (307) 265-3900
FAX (307) 265-3559
WEB SITE <http://www.pillarse.com>

June 4, 2021
Page 2 of 2

The tanks are constructed of the following materials:

- Tank Panels – ASTM A36, 36 ksi Steel Plate
- Horizontal & Vertical Framing – ASTM A500, Grade B, 46 ksi Structural Steel Tubing
- Connecting Pins - ASTM A36, 36 ksi Steel Round Bar

Our office has determined that the portable frac tanks, as described herein, are capable of supporting the operating load conditions in conformance with the AISC Manual of Steel Construction.

Calculations of this analysis can be provided upon request.


If you have any questions or require additional information please contact our office.

Sincerely,

Bryan Prosinski, P.E., S.E.
Pillar Structural Engineering
Principal – Vice President




Diagram of a circular tank with a central vertical line and a horizontal line. A rectangular sump is located on the horizontal line, 5 feet from the right wall. A dashed line extends from the left wall to the sump. A label 'A' is at the left end of the dashed line. A label 'X-shaped Sump (to 5' from tank wall)' points to the sump. A label 'A' is at the right end of the dashed line. A small triangle with the number '2' is at the top right.

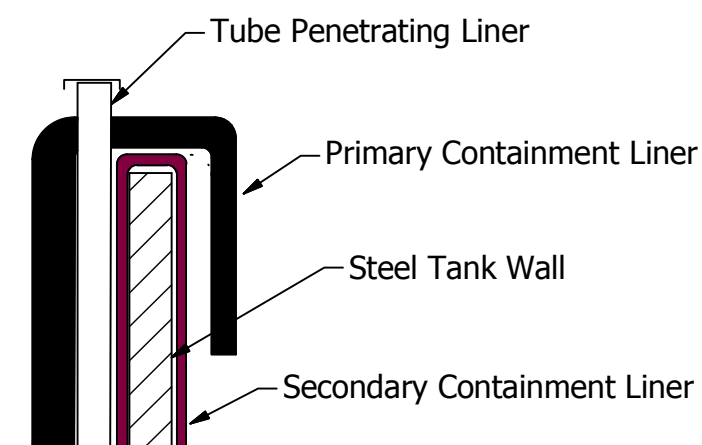


SECTION D

TUBE DETAIL

(Automated Leak Detection System Removed for Clarity)

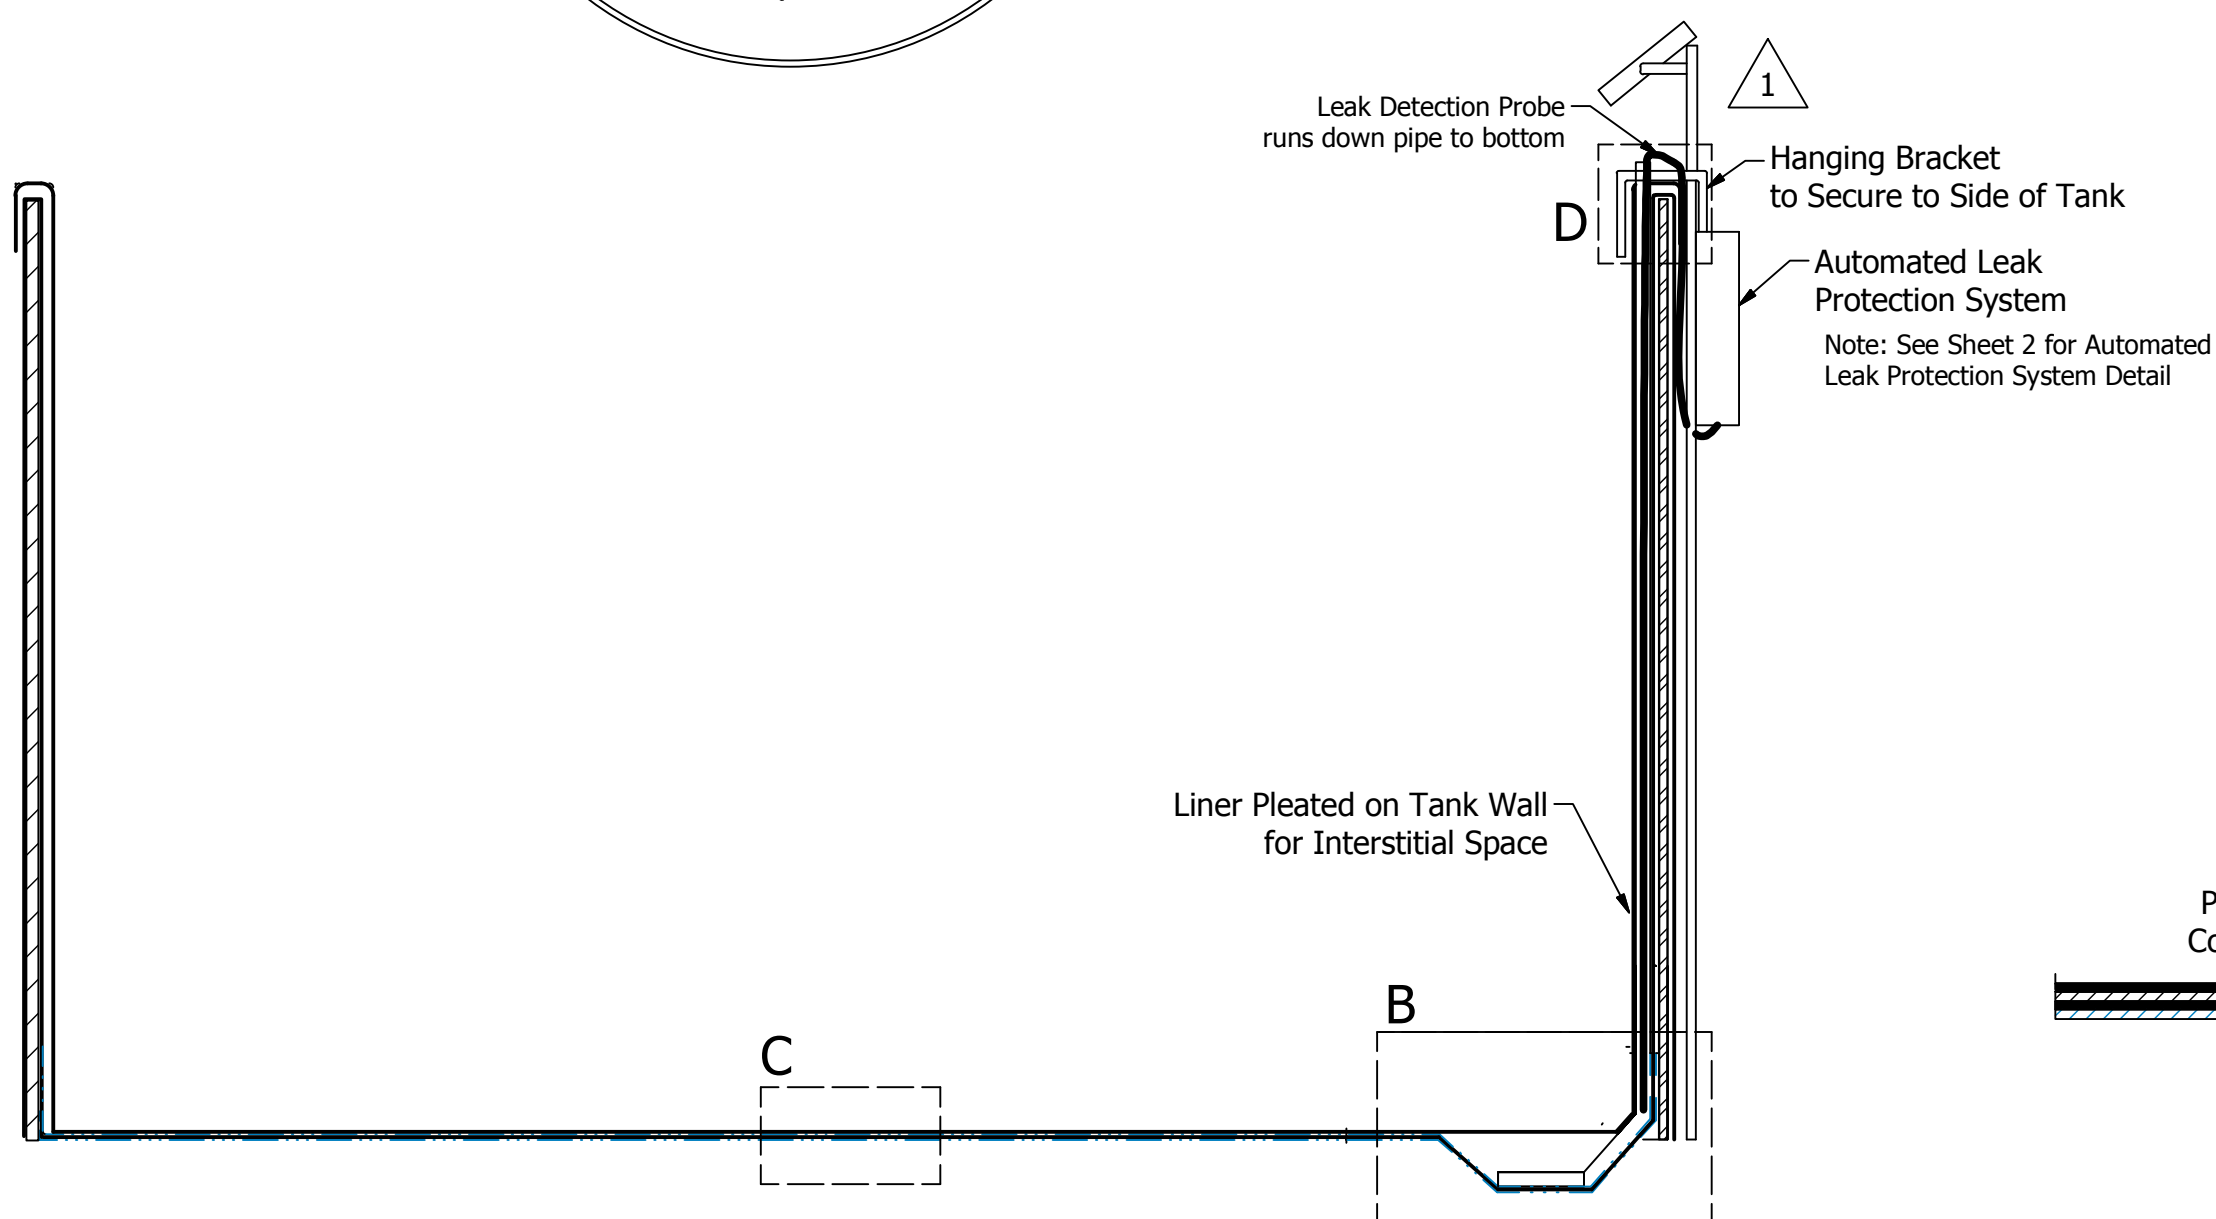


VIEW A-A
TANK DETAIL

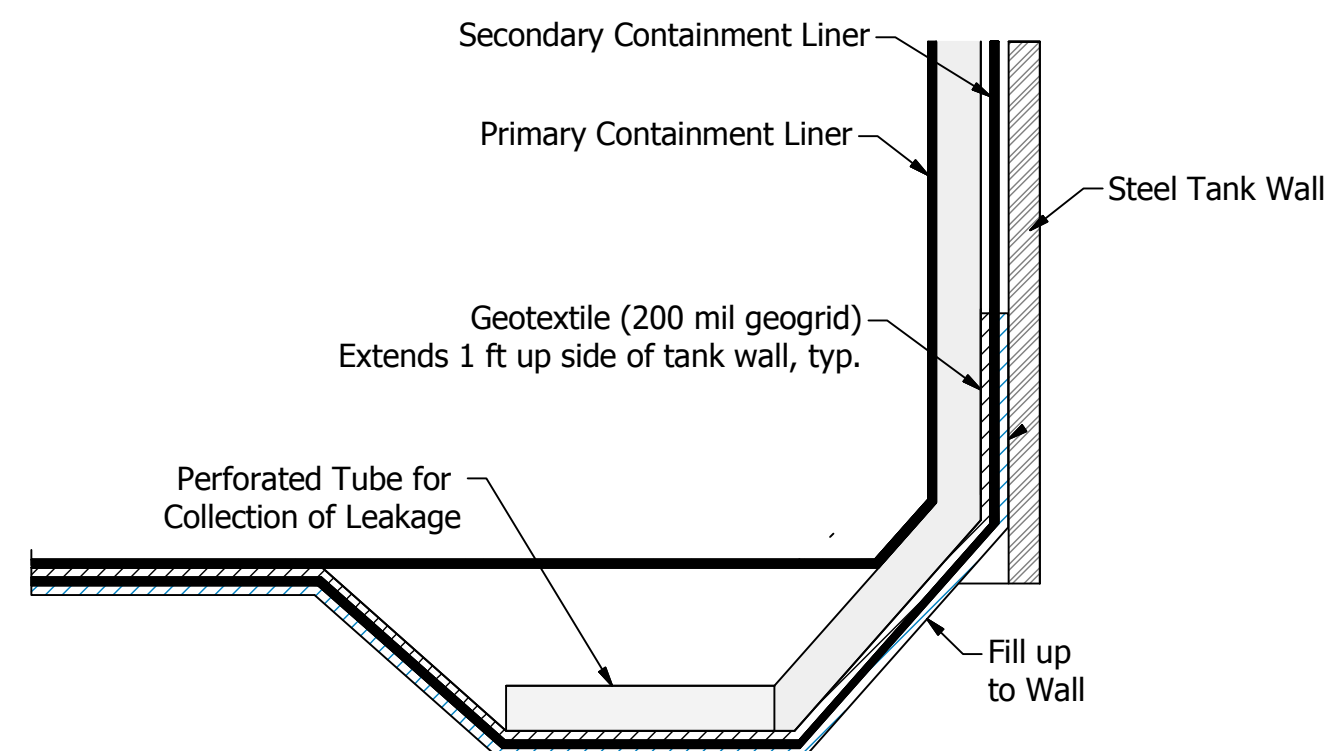

SECTION B

SUMP DETAIL

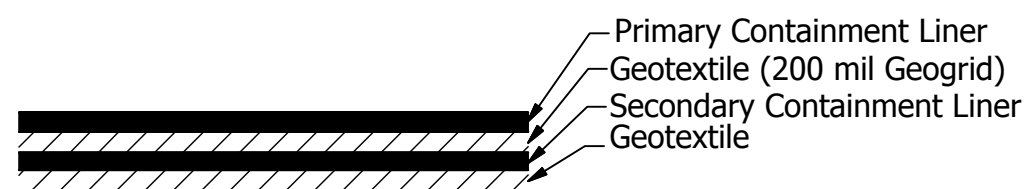


SECTION C

LINER DETAIL





LUCID
DRAFTING & DESIGN LLC
sarah@luciddrafting.com 307.752.7388

REVISION HISTORY				
REV	DESCRIPTION	DATE	BY	
0	INITIAL DWG	10/29/2015	SES	
1	ADDED LEAK DETECTION SYSTEM	11/6/2015	SES	
2	REVISED SUMP	11/6/2015	SES	
3	ADDED GEOTEXTILE UNDER AND BETWEEN LINERS	11/24/15	SES	

TITLE				<div> <div>SIZE</div> <div>C</div> </div> <div> <div>DWG NO</div> <div>LDD15-WWS-02</div> </div> <div> <div>REV</div> <div>3</div> </div>	
Double-Lined Frac Tank System					
CUSTOMER					
PROJECT/JOB WWS Double-Lined Tank System					
APPROVAL					
DRAFTER SES	DATE 10/28/2015				
THIS DOCUMENT IS THE PROPERTY OF WWS AND MAY NOT BE REPRODUCED OR DISTRIBUTED TO THIRD PARTIES WITHOUT THE PRIOR CONSENT OF WWS.				SHEET 1 OF 2	

1 AUTOMATED LEAK DETECTION SYSTEM

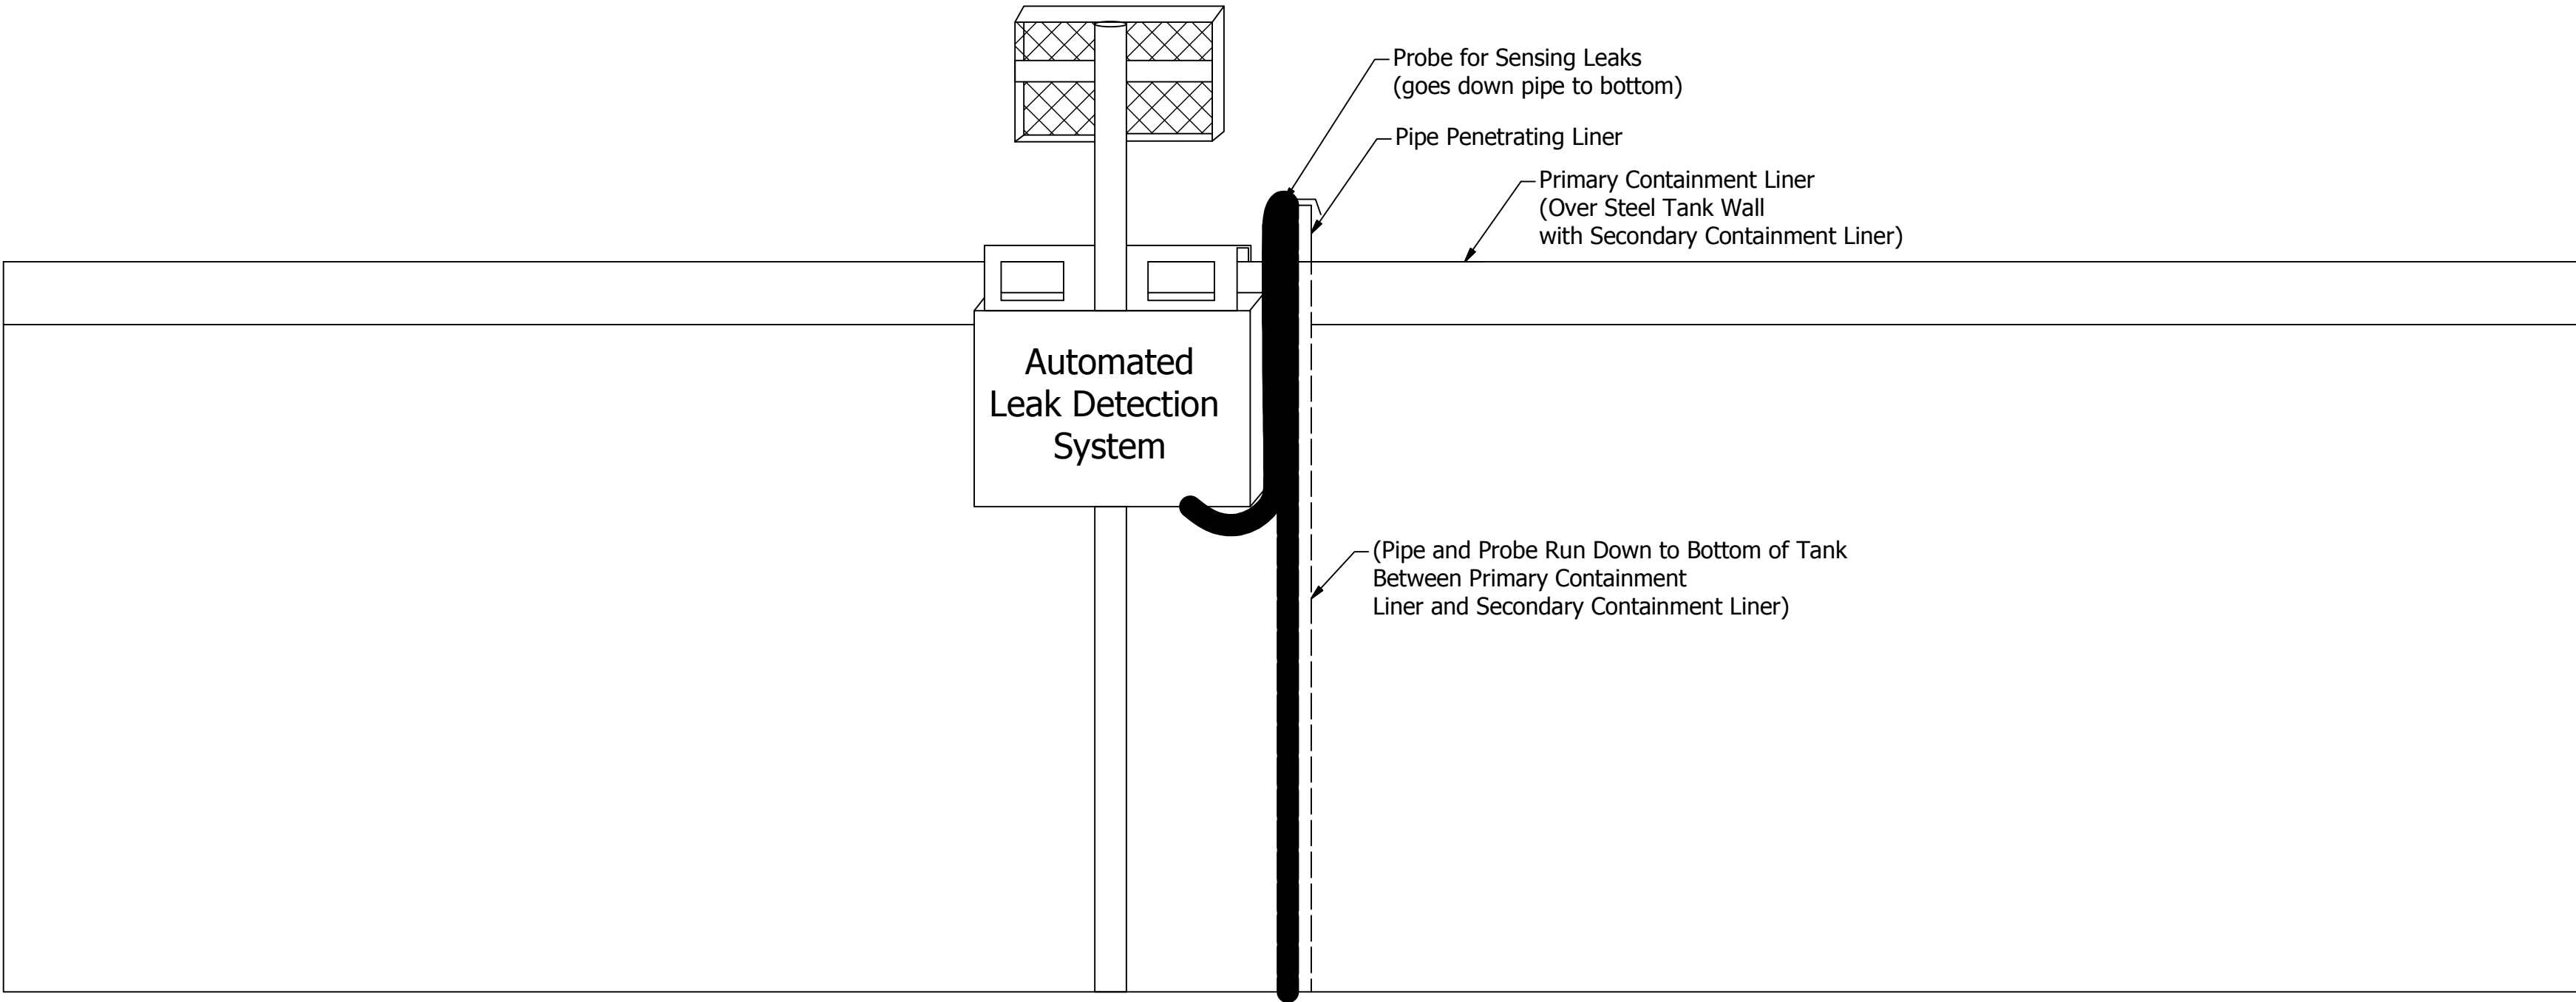

TITLE						
Double-Lined Frac Tank System						
CUSTOMER						
PROJECT/JOB						
WWS Double-Lined Tank System						
APPROVAL						
DRAFTER		DATE		SIZE	DWG NO	REV
SES		10/28/2015				
				C	LDD15-WWS-02	3
THIS DOCUMENT IS THE PROPERTY OF WWS AND MAY NOT BE REPRODUCED OR DISTRIBUTED TO THIRD PARTIES WITHOUT THE PRIOR CONSENT OF WWS.				SHEET 2 OF 2		

2020



Well Water Solutions and Rentals Inc.

STANDARD OPERATING PROCEDURE (SOP)

WELL WATER SOLUTIONS AND RENTALS INC | 1150 Coyote Bar Nunn, WY 82601

TABLE OF CONTENTS

SECTION 1.01 INTRODUCTION

- 1) ABOUT
- 2) BACKGROUND
- 3) SOP PURPOSE
- 4) EH&S PROGRAMS
- 5) SUMMARY

SECTION 1.02 AST PLANNING AND PREPARATIONS

- 1) PLANNING
- 2) REQUIRED AST ORDER INFORMATION
- 3) SITE MEETING OR SCHEDULING CALL
- 4) SITE SOIL PREPARATION
- 5) PRE-MOBILIZATION ON-SITE MEETING
- 6) CALL BEFORE YOU DIG "811"
- 7) AST MATERIAL DELIVERIES

SECTION 1.03 WWS AST PRE RIG UP REQUIREMENTS

- 1) LOADING REQUIREMENTS
- 2) JOB SAFETY ANALYSIS (JSA)
- 3) CHECK SOIL CONDITIONS
- 4) PROPER TANK POSITIONING
- 5) EQUIPMENT (WWS PROVIDED)
- 6) HAND TOOLS RECOMMENDED

SECTION 1.04 WWS AST RIG UP PROCEDURE

- 1) TANK LAYOUT
- 2) INITIAL TANK ERECTION PROCESS
- 3) SECONDARY CONTAINMENT LINERS AND INSTALLATION
- 4) TANK WALL ERECTION
- 5) PROPER LINER PLACEMENT AND CLAMPING
- 6) INSTALLING TANK ACCESSORIES
- 7) AST COMPLETION STEPS

SECTION 1.05 AST IN USE OPERATIONS

- 1) INSPECTIONS AND MONITORING
- 2) INITIAL LEAK DETECTION AND LINER REPAIR

SECTION 1.06 WWS AST RIG DOWN PROCEDURE

SECTION 1.07 WWS AST ENGINEERING STAMPS

SECTION 1.08 WWS AST ENGINEERING SPECS

SECTION 1.09 PROPER AST SETBACK AND LOCATION SAMPLE

SECTION 1.10 JLG APPROVED TELEHANDLER ATTACHMENT AND LOAD CHART

SECTION 1.11 WWS MAN BASKET UPDATED ENGINEERING DRAWINGS

SECTION 1.12 WWS MAN BASKET STAMP AND SOP

SECTION 1.13 GEOMAMBRANE FABRICATION MANUAL AND TESTING CHART

SECTION 1.14 GEOMEMBRANE INSTALLATION

SECTION 1.15 WWS PREFERRED LINER SPEC OR COMPARABLE SUBSTITUTE

SECTION 1.16 PATENTS AND PATENT PROTECTIONS

Section 1.01 Introduction

1) About

Well Water Solutions and Rentals Inc. aka (WWS), is the original pioneer of the portable Above Ground Storage Tank industry. The above ground storage tanks or AST's have become an integral part in saving cost in the oil and gas and industrial industries. WWS has been supplying and servicing these portable tanks for longer than any other company in the USA. We have focused our time and experience on providing the best tank products at the highest safety standards. We continue to learn and adapt every-day in our industry to make sure our employees are safe and our customers are happy.

Standard Operating Procedures or (SOPs) are a staple for safety and quality here at WWS. Our SOP for our above ground storage tank (AST) systems including planning, rig up, operations, and rig down. This SOP will discuss steps to be taken to promote the safest process, as well as list the potential hazards that should be identified and reviewed during our JSA prior to beginning the work process.

2) Background

WWS has over 170 AST's that are used for a variety of oil field and industrial applications within the fluid management operations. AST's can be used in place of traditional 500 BBL trailer tank farms and in-ground water impoundments, and are suitable for fresh water as well as production water. WWS tanks have standard sizes, ranging from 6,000 barrel (bbl) capacity to 60,000 bbl capacities. Through intensive design criteria WWS secured a patented design on the strongest possible design for an AST tank. We analyzed many methods to secure the panels together and all other methods failed our criteria. We have also set a standard in the industry for safe movement of the panels with our patented adaptor plate for a quick attach telehandler. We were able to successfully submit engineering documentation to the Oshkosh Corporation, which owns JLG and they have stamped and approved our adaptor plate.

3) SOP Purpose

WWS will extensively review this SOP with all new hire employees to assure proper understanding of all procedures. This SOP will also be reviewed with an employee if his/her responsibilities change under the plan. An electronic copy of this plan will be available at all WWS regional offices.

Training our employees to follow our SOP is the first step to a safe and successful work environment. We also need all our employees to treat everyone with respect and follow the lead of their supervisor to make sure every day is safe.

STOP WORK authority and who has the power to use it is another tool we use to help everyone stay involved in the safety process. We highly encourage all employees to feel comfortable in raising awareness of any unsafe situation happening or providing suggestions to help make any task safer as well. This helps everyone grow to be a stronger team.

This SOP may also be used to inform customers about WWS's typical equipment and procedures for setting up an AST system. This SOP will be reviewed and revised on an ongoing basis to keep pace with best oilfield and industrial practices and applicable OSHA regulations.

4) EH&S Programs

This SOP recognizes that oil and gas operating companies have developed their own health, safety, and environmental (HSE) programs that contractors who work at customer's sites like WWS, must comply with. In addition to this SOP, WWS personnel will strictly observe the policies and procedures of each operating company they are to do work with.

5) Summary

This SOP recognizes that oil and gas operating companies have developed their own health, safety, and environmental (HSE) programs that contractors who work at customer's sites like WWS, must comply with. In addition to this SOP, WWS personnel will strictly observe the policies and procedures of each operating company they are to do work with.

Section 1.02 **AST Planning and Preparations**

1) Planning

Proper planning and documentation will help assure a successful AST rig up and rig down. The following steps can be utilized to fully, safely, and accurately perform the tank rig up or rig down:

- AST Order Information
- Customer Meeting
- Soil Conditions and Pad Preparation (Completed by Customer)
- Pre-Mobilization and On-site Meeting
- Notifications
- Job Safety Analysis (JSA)
- AST material requirements for delivery

2) Required AST Order Information

WWS Manager or Field Supervisor will record general AST order information including the following:

- Site location directions and coordinates
- Customer Contact Name, Phone, and Email
- Emergency Medical Contacts
- Special Safety Requirements
- Tank Utilization Dates
- Tank size and Accessories
- Special piping requests

3) Site Meeting or Scheduling Call

Prior to finalizing the delivery schedule, a meeting or conference call is held with WWS and our customers required personnel to make sure all parties are coordinating well and have the same and accurate information.

This meeting is best done in person, but must at least be covered in a phone call, followed up by a brief email confirming the AST order details, delivery schedule, and noting special conditions, safety requirements, verification of pad preparation, etc.

KEY MEETING TOPICS:

- Introduce all WWS key personnel to our customer's key personnel
- Review what tanks are needed and what use they will be needing them for
- Review AST scope of work, what is normally included, what is not
- Confirm AST size(s) to be used
- Assure a 20' working space around each tank for safe working area
- Permitting for AST (as needed)
- Current site conditions and soil preparation requirements
- Site access and truck route requirements, and any weather-related issues that could affect them
- Time line for rig up and rig down of the AST
- Detailed drawings of the location layout for tank and piping placement
- Details on "Fresh Water" source to fill the tank on the day of the set up
- Assure a minimum of 24" of water the day of the setup to quickly and safely complete the job
- Identify what other charges could be incurred by the customer and result in standby time or additional charges
- Confirm customer is responsible for the used liner, residual solids left in the tank, removal of all radioactive NORM materials, and site reclamation
- Review any and all additional safety requirements the customer may have
- WWS to follow up with an email to review all changes made

4) Site Soil Preparation

Preparation of the soils on site is required to form a dependable base for the AST.

Preparation of the tank pad is solely the responsibility of the customer/operating company.

WWS Soil Requirements are:

- Minimum soil compaction of 95% compaction
- Soil testing results shall be shared with WWS if requested
- Site must be cleared and free of debris such as sticks, sharp rocks, and trash etc.
- WWS recommends soil compaction testing to be conducted via Standard Proctor Test (American Society for Testing and Materials {ASTM} Standard D698) or Modified Proctor Test (ASTM Standard D1557)
- Compaction test results must be provided to WWS prior to the commencement of AST construction upon request
- Proof roll testing maybe be used if there is doubt of site compaction standards
- Grade of the inner AST area to be a maximum of .25% or 3" drop per 100' towards sump location
- Site shall be graveled and rolled prior to tank installation, utilizing gravel size 2B or smaller. (3/4" road grade preferred, or coarse sand with minimum thickness of 4 inches)
- *Do Not Use* crushed rock as sharp edges could puncture the tank liner

Completions of all these steps will assure a smooth, safe, and seamless tank set up.

5) Pre-Mobilization Onsite Meeting

WWS's AST team will conduct a pre-mobilization onsite meeting with the customer that documents the customer requirements for the specific pad location and AST system.

6) CALL BEFORE YOU DIG “811”

Even though the customer or their subcontractor may have already called for utility locates for the sump hole, the WWS field supervisor should call the local or state underground utility location service again at least 3 days in advance before construction/digging begins. The ticket or reference number provided by the one-call service will then be documented.

The following web site has contacts for all the states and provinces.

<http://www.call811.com/state-specific.aspx>.

Call 811 in United States

7) AST Material Deliveries

Once the delivery route and schedule are established and the pre-project onsite inspection is completed, the AST materials can be delivered. Updates and notifications will be made as agreed to during the customer meeting. WWS delivery personnel will use a spotter for the equipment driver and should unload all materials safely taking extra care to avoid damage to liners, plates, and all other AST components. Should any problem arise during the scope of operations the WWS field supervisor will notify to correct customer contact to remedy the issue.

Section 1.03 WWS AST Pre Rig Up Requirements

1) Loading Requirements

WWS will have the field supervisor complete a “**Dispatch Load In Load Out Sheet**” before and after the set-up and rig down of the AST system. This sheet will identify all the needed parts and accessories to complete the AST Rig Up. During Rig Down the “Dispatch load in load out sheet” is also filled out to ensure all parts and accessories are accounted for and in good working condition. In the event parts or accessories are missing and/or damaged the customer will assume full responsibility and be billed back for the parts and accessories.

2) Job Safety Analysis (JSA)

A job safety analysis (JSA) must be completed on-site prior to the beginning of any work. The JSA will be completed according to WWS protocol and safety programs. Customer’s safety requirements will also be communicated during the JSA. All personnel, third party contractors, and customer representatives are expected to participate and sign the JSA when the JSA is completed.

3) Check Soil Conditions

Preparation of the tank pad is solely the responsibility of the customer.

However, bad weather such as wind, rain, and snow events can change the soil conditions quickly. If soil conditions change the WWS field supervisor will notify the proper customer contact.

4) Proper Tank Positioning

- Check proposed AST site to confirm that a 20’ clear work area around the perimeter of the tank is possible to provide access for equipment and laydown area for AST materials and erection equipment

- Check that the minimum setback distances to existing wells, power lines, etc. are met
- Mark out the tank location using WWS marking equipment
- Establish and mark out final location for the fill and suction tube(s) and stairs

5) Equipment (WWS provided)

All equipment is subject to daily inspection. (Check condition, rigging, oil, water, fuel and cleanliness.) Here is a list of the recommended equipment needed to set a tank. Actual equipment used will vary among region and specific projects.

- One 40' and/or 60' extending straight or z boom man-lift
- 10,000 lb. or greater capacity, rough terrain forklift (JGL 10-43A is preferred telehandler)
- Backhoe or small excavator with bucket
- Skid steer

6) Hand Tools Recommended

All hand tools are subject to daily inspection.

- Two 16' ladders
- Four 4 lb. sledgehammers
- 100' or 200' tape measure
- 1 case of marking paint – minimum
- Set of wrenches $\frac{1}{4}$ " – $1\frac{1}{2}$ "
- Set of sockets $\frac{1}{4}$ " – $1\frac{1}{2}$ "
- One small pry bar
- 8' rock bar (digging bar)
- Five safety harnesses with retractable tethers
- Five retractable lanyards
- Duct tape
- Covered hook bladed knife
- Three 40' lifting straps (minimum of 5,000 lb capacity)
- Three 20' $\frac{3}{8}$ " chains (must have visible certification tags)
- Two rolling head pry bars
- Two $\frac{1}{2}$ " impact guns
- Two sets of rigging chains
- Patch tape
- Rubbing alcohol
- Patch roller
- Leather gloves
- Wire brush or wheel with 4" angle grinder
- Generator
- Steel toed rubber boots
- All personnel must have Fire retardant clothing (FRs) Safety Hard Hats, Safety Glasses, crush resistant gloves and any safety requirements from customer

Section 1.04 AST Tank Rig Up Procedure

WWS Field Supervisor will double check all paper work and location prior to setup to assure everything is correct and ready to set the AST.

1) Tank Layout

- Determine center of tank and mark with paint. Place a non-abrasive item on the center point; preferably a sandbag. This will be used to find the center of tank after liners have been placed
- Measure and double check minimum distance from tank center to existing wells or other set backs
- Measure and paint a line to mark the circumference of tank for panel placement using WWS special design marking tool
- Also mark 15' outside the tank circumference as this will show where the liner should reach once fully stretched flat. This will assure enough liner is present to go over tank walls once placed

2) Initial Tank Erection Process

- Determine where suction pipe is to be located in the tank
- Dig at least 4' wide x 6' long x 16" deep sump hole for over the wall suction pipe to set into and taper the edges so there are no sharp corners of the excavation. Or dig 3' wide x 12' long x 10" deep sump hole for undermount suction pipe
- Remove any sharp stones and debris for the digging process
- If multiple suction manifolds are required, the sumps should have a minimum of 15' of separation

Attention:

Barricade any sump pit with appropriate cones, tape, equipment, and/or have a hole watch if left open.

- All tank set-ups will utilize a standard 10oz geotextile that will be laid on the grounds surface to act as a padded protector for the liner
- A Standard LLDPE 30 mil or 40 mil liner will then be used as the primary containment, but may also be used as a secondary containment within the tank upon request.
- Check customer specifications and regulatory permitting to assure proper liner and containment requirements are met for ASTs
- Organized crew inspection walks for the entire tank base area will be performed to pick up any sharp stones or other sharp debris that could damage the liner
- The geotextile pad can now be deployed out fully at this point. It should reach beyond the tank circumference paint lines by 1'-4'
- Once geotextile is completed the liner can be fully deployed. Crews will double check that the liner will reach to the 15' marks beyond the tank circumference
- Crews will then perform a visual inspection of the liner and repair any defects as necessary
- Fold the liner towards the middle of the tank until tank circumference paint line is fully exposed

3) Secondary Containment Liners and Installation

- If tank system requires a secondary liner and leak detection system this will be installed on top of the first liner
- WWS Field Supervisor will direct the installation of the various parts and layers of the secondary containment system

- For example, a 220-mil geo grid mesh (Reference Section 1.16 for Spec) or other suitable approved spacer material can be installed between the top and bottom liner layers to provide a separation for to water flow. Installation of inspection pipes into to the designed low points of the tank will later be used for leak inspections
- Install any other customer required components for the leak inspections if needed
- Unroll top liner over geo grid to completed the secondary containment system
- Follow the same setup guidelines for a one liner system for the two-liner system, and make sure to complete the components installation fully once the first liner is clamped.

4) Tank Wall Erection

- Field Supervisor will complete a visual inspection of each panel as it is prepared to be placed
- The first tank panel will be placed and secured using the backhoe bucket
- Once backhoe fully secures the panel the telehandler can then get the next panel. Crews will continuously provide operators with spotters during all operations
- If higher winds exist crews are cautioned to pay special close attention to all operations
- Crews will repeat the panel placement process until entire tank is erected
- Personnel secured on man lift or using a ladder (depending on customer policies) then secure the panels in place with 14 retainer pins per panel.

ATTENTION:

Proper hand and foot placement is crucial when connecting AST panels. Keep hands and feet a safe distance from pinch points. Discuss where these pinch points are located when reviewing the JSA. Keep the joints in mid-range; i.e. palms are located between waist and shoulders. Create an awareness that never goes away and designate one individual to enforce the awareness when setting panels.

- Roll up excess geo pad into minimum 6" diameter cylinders around the inside of the tank ring to help support the liner at the base of the tank wall as the tank is being filled.
- Prior to lifting liner into place against inside panel, add geo strips over all panel connections points and use spray glue to secure in place
- Prior to covering sump with the geo pad or liner, confirm sump excavation has smooth sides and corners, and that no sharp stones are present.

5) Proper Liner Placement and Clamping

- After 3 or more panels are set, and all liner protections are complete, crews inside the tank can begin to hand liner up to crews outside the tank that are in the manlift
- Crew of 2 inside the tank wall unfolds and pulls the liner toward each panel (final connection of last panel will not be made until all liner to that point is pulled and secured to avoid confined space, all personnel must be out of tank before walls are closed)
- The inside crew of 2 works with the manlift crew of 2 located outside to pull the liner up and over the top of each panel. The man lift crew lifts the liner using ropes/straps gently lowered and attached (by the inside crew). The man lift crew lifts a small liner section to

the top of the panel and folds it over the top of the panel, being sure there is enough slack in the liner inside the panel wall

- Proper slack or excess liner on the vertical wall can be tested by the inside crew. The crew will pin the liner to the bottom of the wall with their boot and pull liner at chest level outwards away from the wall. There should be about 3' from wall to liner when being pulled. This is the appropriate amount of slack. If crew ever has doubt that the liner slack may not be enough WWS's experience has proven more slack the better, so just give it a little more slack if needed

NOTE: The crew must allow sufficient slack in the liner at the wall to allow for liner movement during filling and draining.

ATTENTION: Never place hands on the railing of the man basket that faces the AST panel. Proper hand placement would be the side or back rail.

- Once a section of liner is positioned properly (with liner slack inside the tank) and over the top of each panel wall, the man lift crew secures the top of the liner with clamps. (Tools in basket secured with tool lanyards) NOTE: Each clamp is notched where D-rings on the top of each panel are located. This notch acts as an added safety retainer once clamps are fully tightened. Each panel will receive 2 liner clamps
- Crews will continue to clamp until they have reached the final panel. Crews will leave this small area of liner down until all internal piping is completed

6) Installing Tank Accessories

- Install safety stair system, fill piping, and suction piping. Ensure that stair system and piping are appropriately secured to the tank walls with ratchet straps or chains
- Assemble all interior piping and assure any connections or sharp points are fully wrapped in geo material for protection

7) AST Completion Steps

- Close final panel and secure with pins
- Lift liner and secure at the closure point to finish clamping process
- Trim liner and allow approximately 2' of liner to hang over edge of tank.
- Begin to fill the tank with water and monitor filling process
- Inspect all connections and equipment, confirming at least 2 liner clamps are in place on top of each panel
- Have a minimum of 24 inches of water put in the tank to hold liner in place
- Fill tank and monitor
- Perform periodic inspections of the tank to ensure everything is in proper working order
- Every time a tank is fully emptied and refilled, an inspection must be performed
- Water should NEVER go below 12 inches at the LOWEST level in the tank. (Mark liner as a caution).

NOTE: Filling process may begin as early as ¾ of the tank wall panels are set. Only fresh water can be used if filling while personnel is in the tank. Reasons for early filling is to assist with windy days as the water weight help to hold liner in place. It is recommended no personnel be in the tank with more than 6" of water.

Section 1.05 AST In Use Operations

1) Inspections and Monitoring

AST Operation Phase includes **weekly** **periodic** AST monitoring, leak detection, and identifying potential hazards that may have developed, change on-site conditions or tank use. If the tank is drained, it should be secured from wind impacts and the liner inspected and re-positioned (to provide sufficient slack during filling) prior to refilling. Specifically, it may be necessary to rearrange the liner folds at the walls prior to refilling if the wind has shifted the liner folds when the tank was empty.

If changes are noted, they should be communicated to the WWS Manager/Field Supervisor.

CAUTION – If conditions are observed that could indicate an imminent tank failure, clear the area immediately. Advise others in the vicinity to do so also and contact the customer to drain the tank.

2) Initial Leak Detection and Liner Repair

Notify BLM and NMOCD if leak reaches the ground

In the event of a leak in the tank due to a hole in the liner, the following steps should be followed.

- If there is a question that it is in fact a leak from the AST, a dye test or a pH balance test may need to be performed on both the water in the tank and on the ground using approved dye or a properly calibrated pH meter. Third party test results are recommended.
- If the leak is found to be coming from the tank, narrow down from which panel the leak is originating.
- Use a strap or rope to mark the point where the water is coming out of the tank.
- Determine if the water is coming out high or low on the tank.
- Locate the puncture or hole in the liner.
- Empty the tank to the point of damage in liner if necessary.
- Clean area of liner that needs to be repaired.
- Cut out piece of material (patch or tape) to overlay liner.
- Either weld the patch to the injured area in the liner or stick the tape (2 types – dry or underwater) over the leak.
- Make sure puncture is completely covered.
- Monitor as needed.

Section 1.06 WWS AST Rig Down Procedure


The AST breakdown follows the reverse order of the setup steps presented in the AST Rig Up Procedure above. The sump will be filled in with the same material taken out during excavation.


The customer is responsible for draining and disposing of all liquids and residual solids that have accumulated in the tank. Additionally, the customer is responsible for proper off-site management or recycling of the liner and geo pad materials, and final grading and/or reclamation of AST site.

Customer is responsible for any removal of radioactive NORM materials before WWS crews can rig down any tank.

WWS AST Engineering Specs

Section 1.08

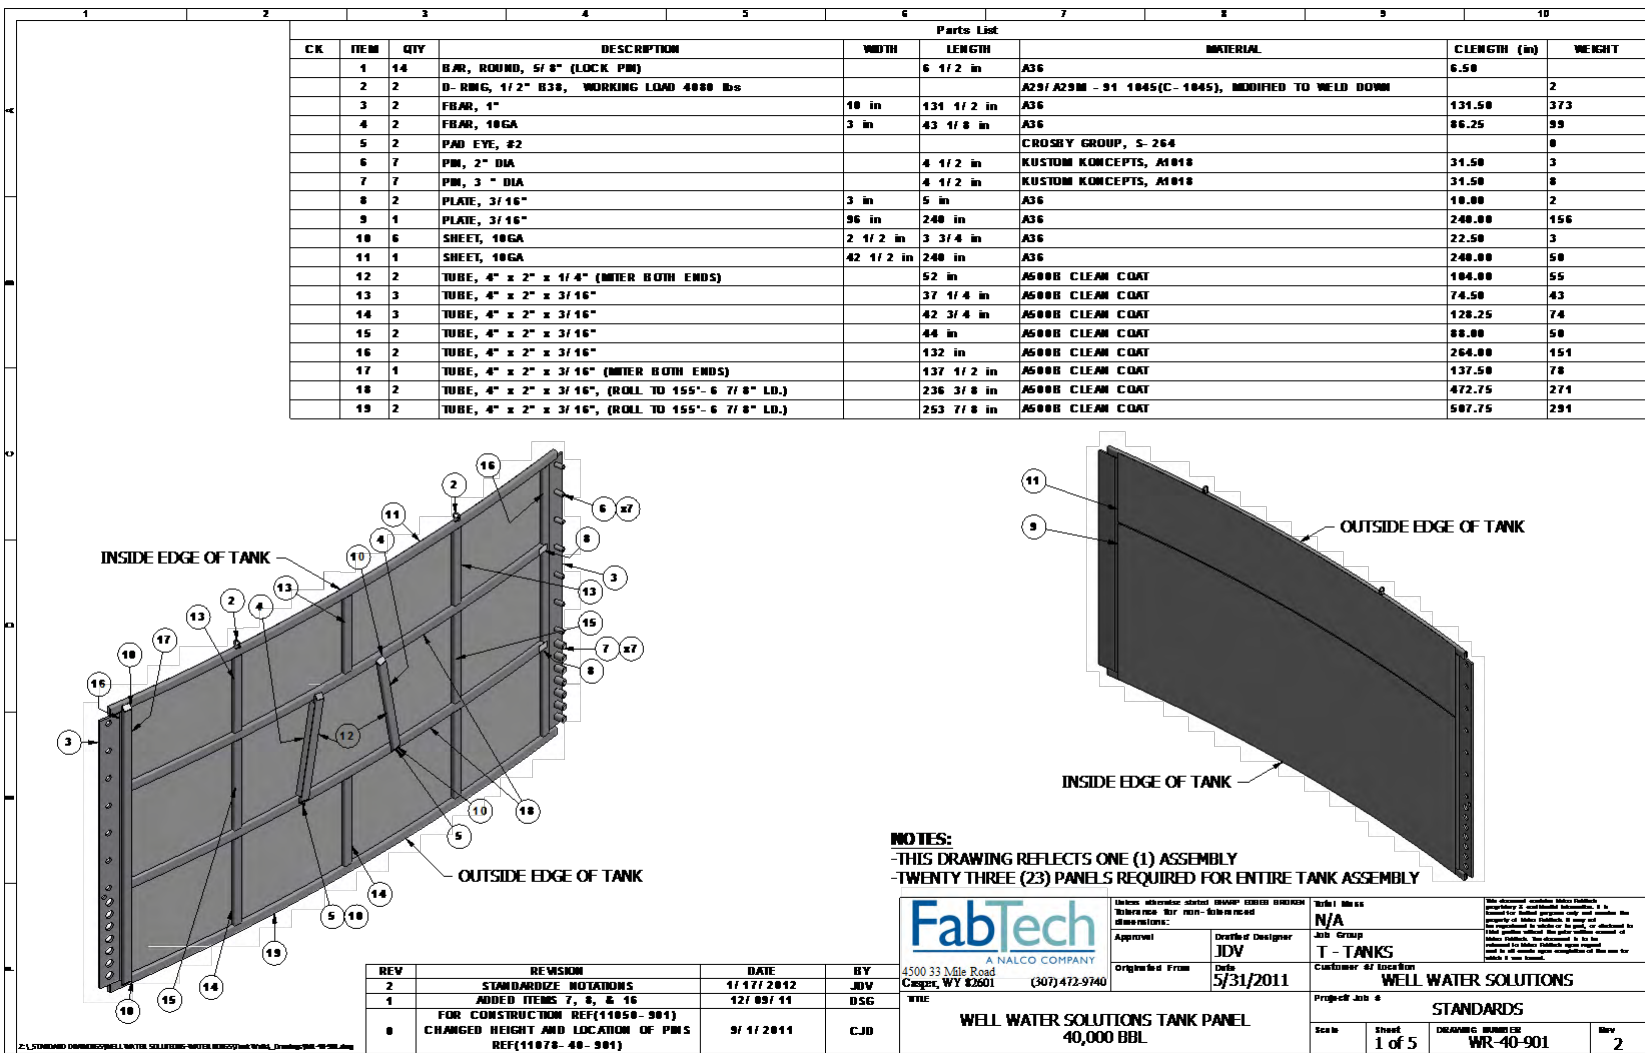

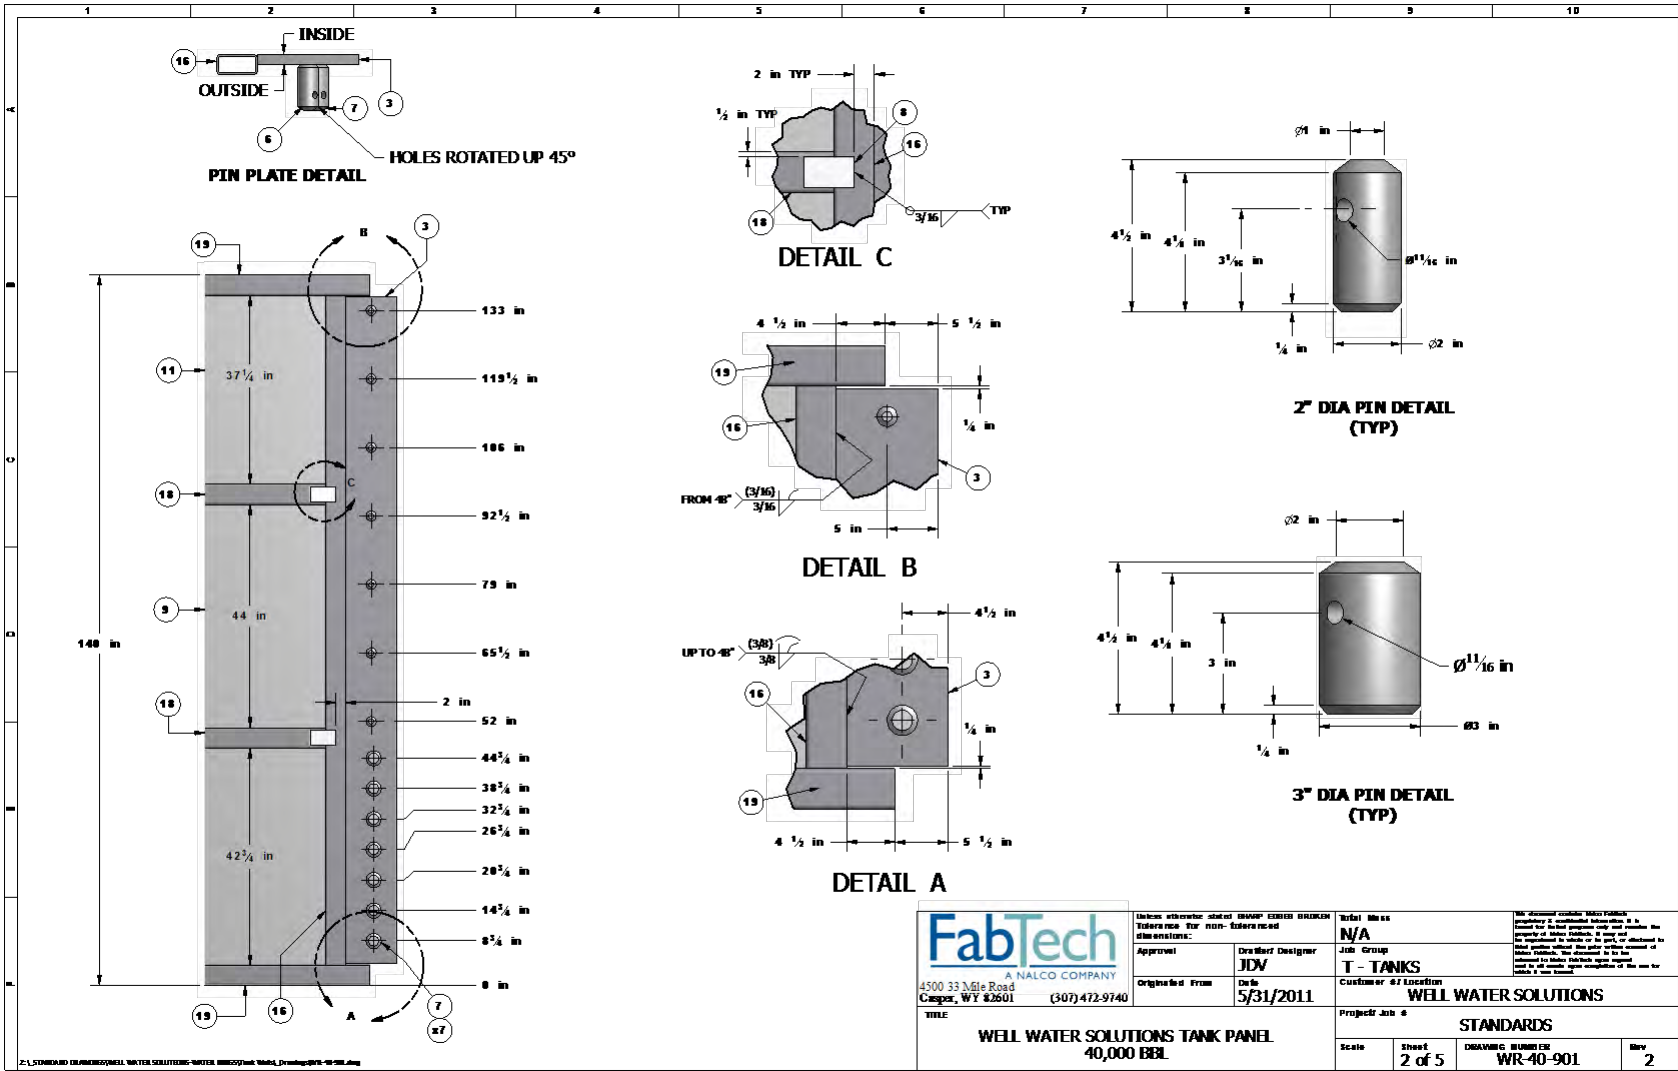










Section 1.09 Proper AST Setback and Location Sample

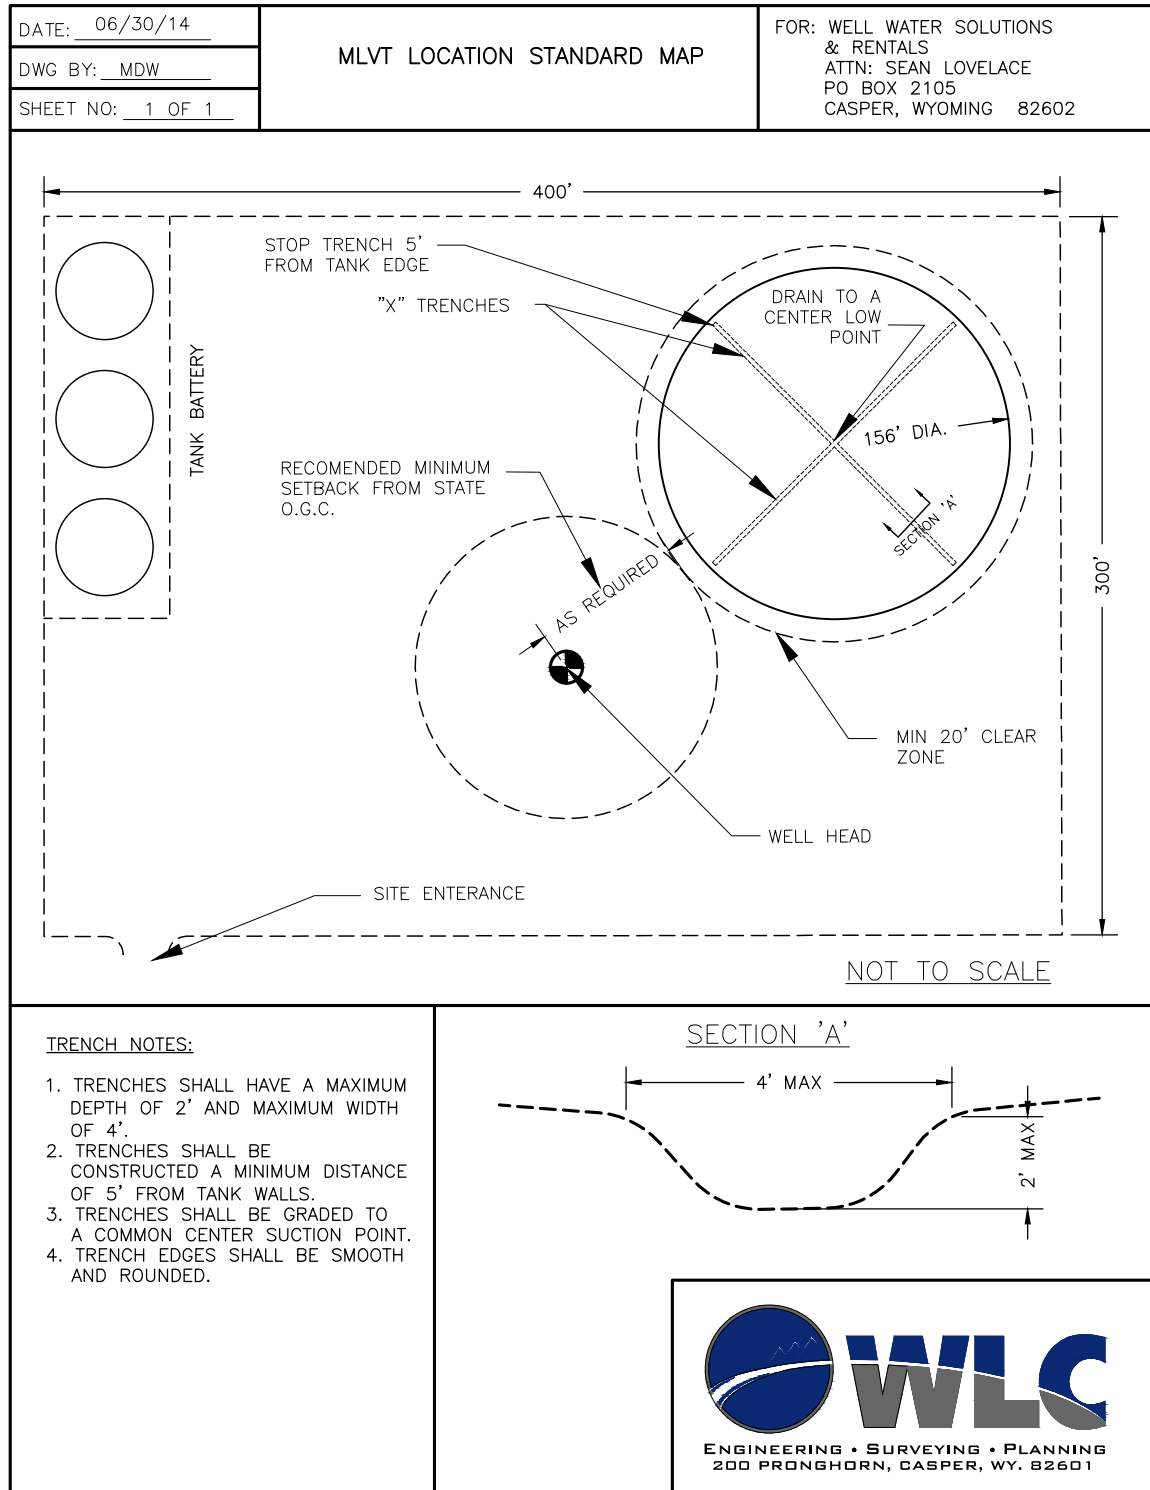


Section 1.10 JGL Approved Telehandler Attachment with Load Chart

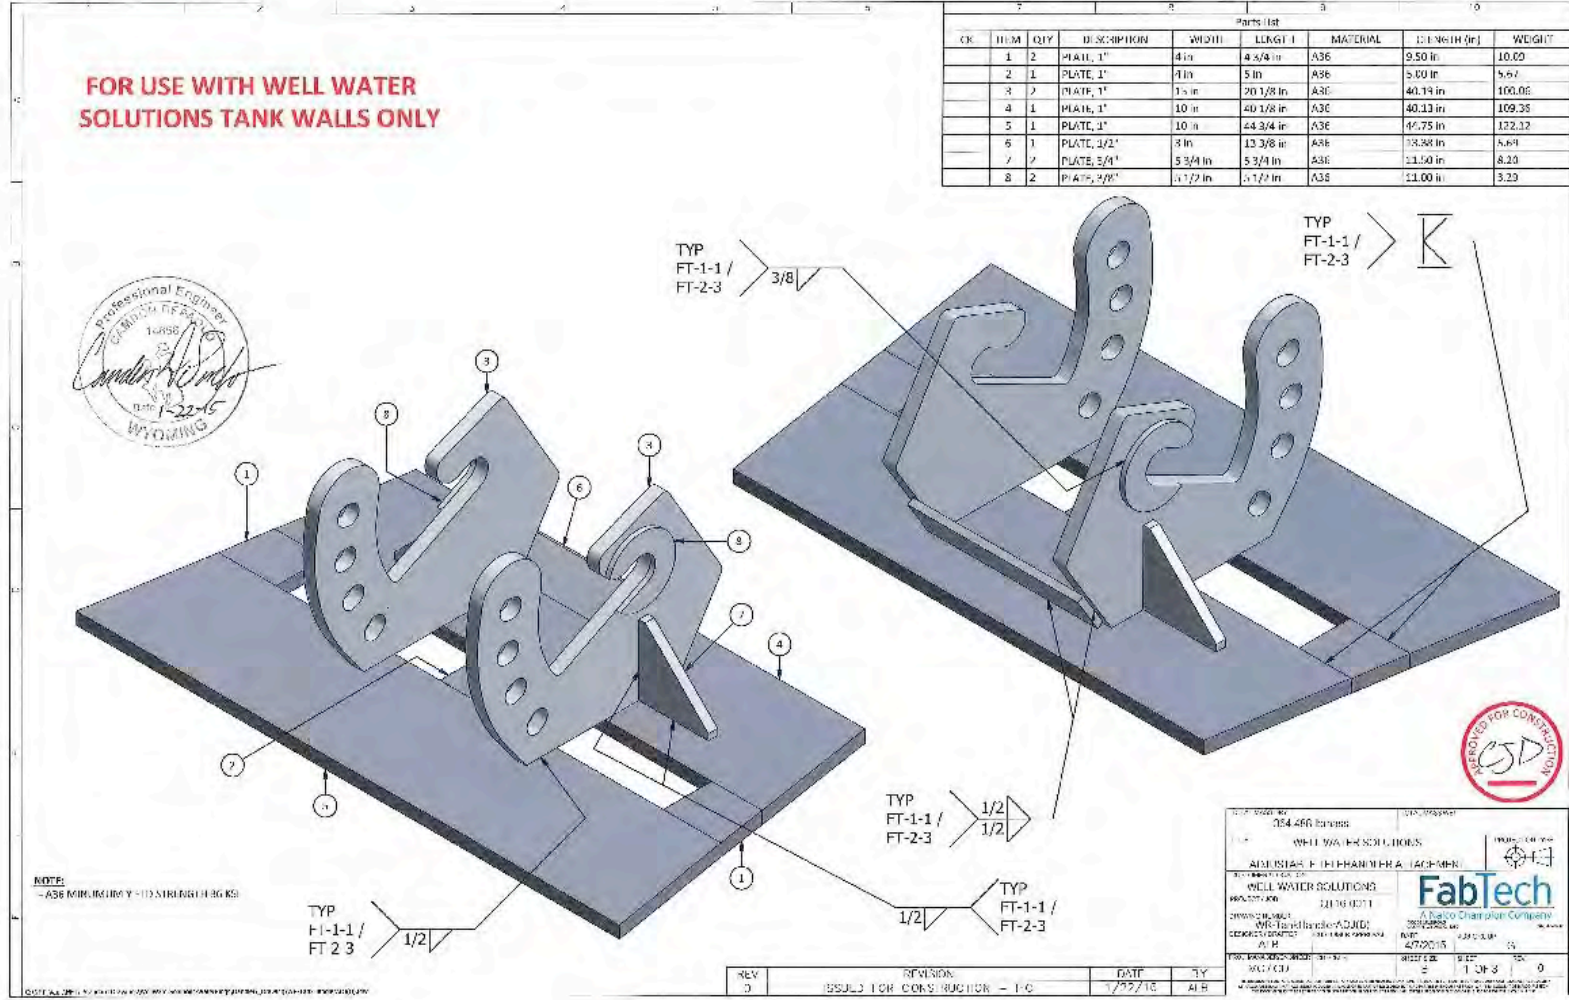

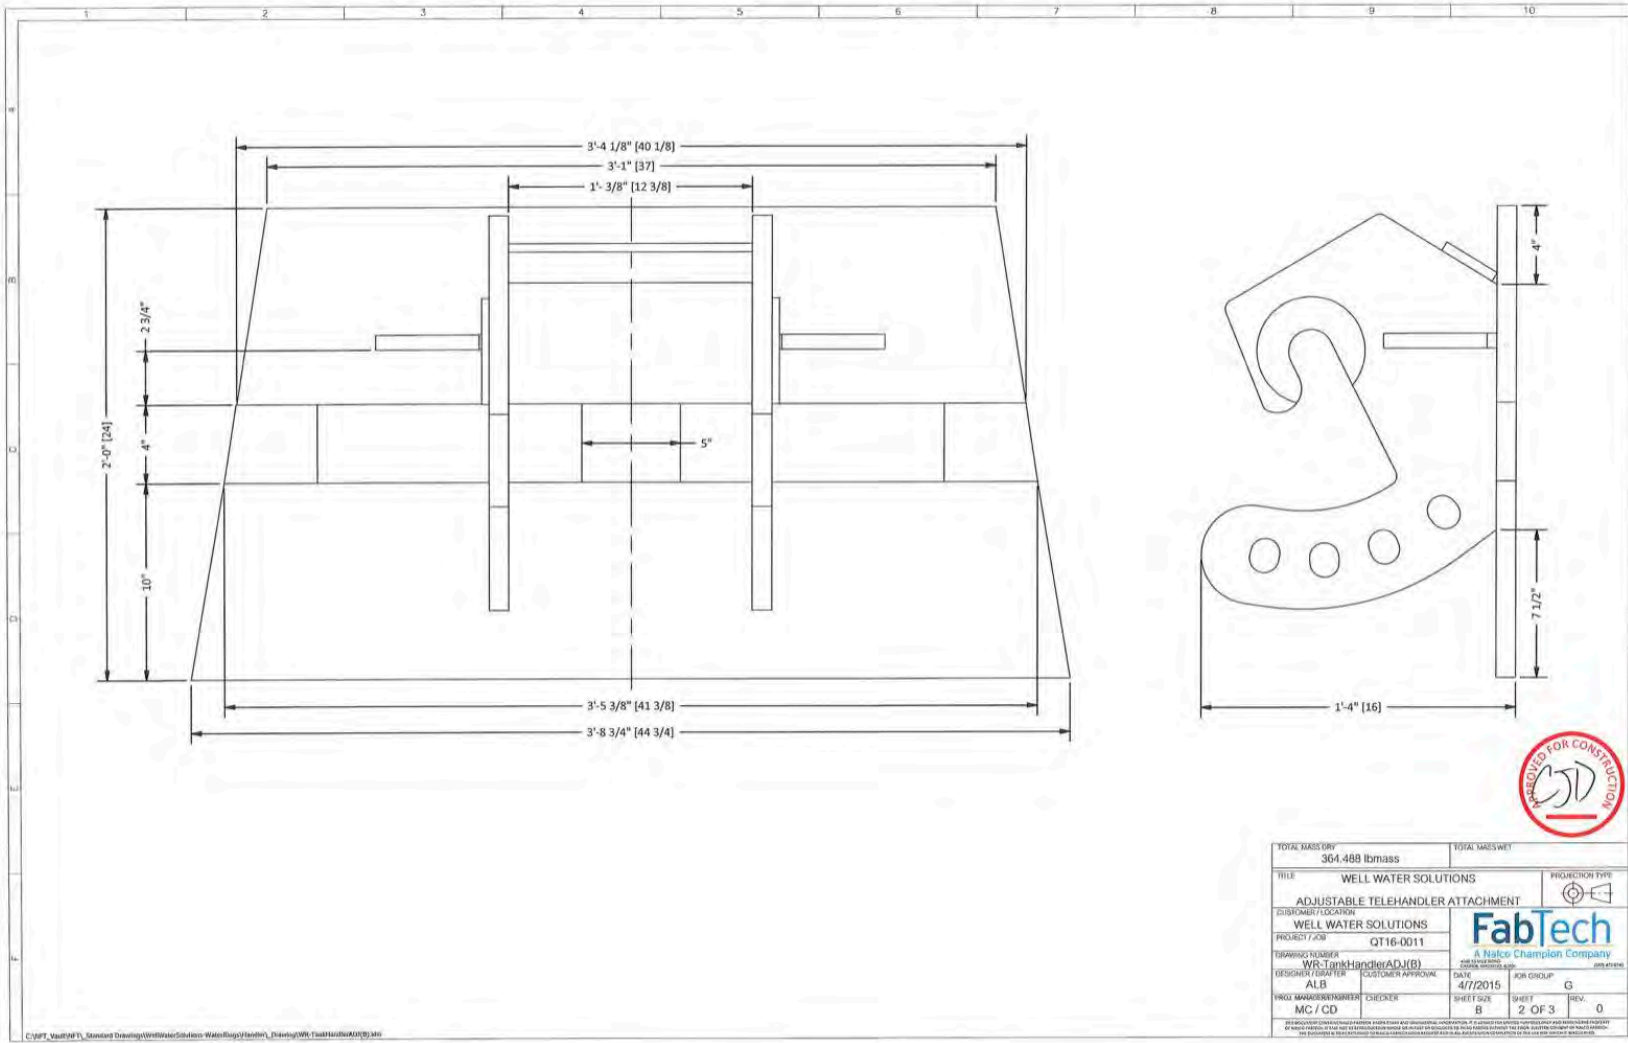



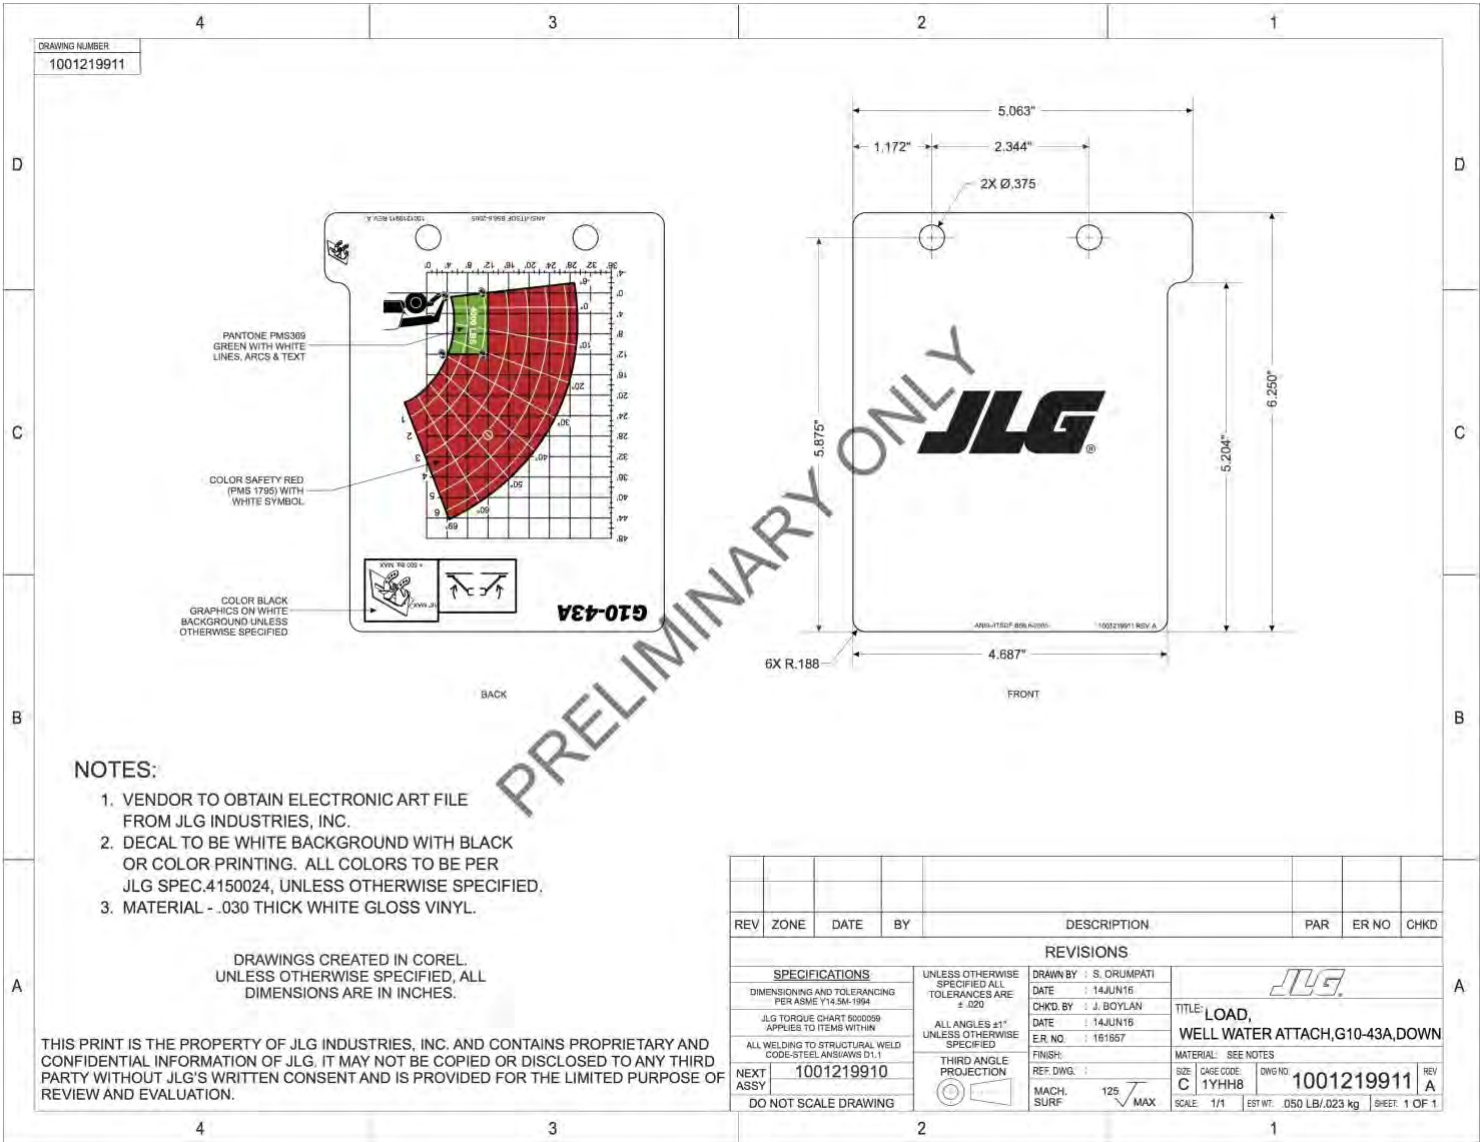

Section 1.13

Geomembrane Fabrication Manual and Testing Chart

MLVT GEOMEMBRANE PANEL FABRICATION MANUAL

Well Water Solutions, Inc.



Colorado Lining International
Parker CO 80138
800-524-8672/303-841-2022
Fax: 303-841-5780
www.coloradolining.com

TERMINOLOGY

The following definitions will be used throughout this document.

Geomembrane Manufacturer- The party responsible for compounding resin into geomembrane roll goods.

Geomembrane Fabricator- The party who is responsible for welding the geomembrane roll goods, through factory fabrication using controlled welding methods, into geomembrane panels. **Colorado Lining International – 800-524-8672**

Geomembrane Installer -The party responsible for placing and/or joining geomembrane panels in the field or on the job site.

Geomembrane Sheet -The product of the Geomembrane manufacturer, provided on rolls to the fabricator.

Geomembrane or Panels or Geomembrane Panels -The term applied to multiple geomembrane sheets that have been welded together, through factory fabrication, under controlled conditions. The actual size of the panels will depend upon weight, mil thickness, and design configurations.

Sample -The piece of liner or seam section taken for testing. It is usually large enough to contain specimens for a series of tests.

Seam -The completed process of welding two geomembrane sheets together.

Specimen -The term applied to an individual part of a sample. Specimens are used to test peel and shear values of a welded seam.

Welding -The process whereby two sheets or panels of geomembrane are joined together.

MLVT – Modular Large Volume Tank

MLVT Geomembrane Liner – One or more factory fabricated Geomembrane Panel(s) for placement inside an engineered containment ring.

1.0 GENERAL

1.1 Products

- A. The geomembrane material shall be 30 to 60 mils thick, as specified. The geomembrane shall be manufactured consisting of first quality ingredients. The finished compound shall be uniform in color, thickness, size and surface texture.

1.2 Markings

- A. In the case of round tanks, panels shall include a highly visible "cross hair" style marking denoting the center point of the panel to coincide with the center point of the tank. Radial spoke-like markings will be painted on the panel surface to assist with field measures to assure vertical alignment up the tank walls.

2.0 Subgrade Preparation

- A. The Earthwork Contractor shall be responsible for preparing and maintaining the subgrade in a condition suitable for installation of MLVT Geomembrane Panel. Any damage to the surface caused by weather conditions or other conditions must be repaired prior to MLVT Geomembrane Panel deployment. The installer will submit, prior to installing the MLVT Geomembrane Panel, written approval of the subgrade surface on which the MLVT Geomembrane Panel will be installed.
- B. All surfaces in contact with the MLVT Geomembrane Panel must be free of sharp stones, stones over 3/8" in diameter, sticks and other debris that can puncture or tear the MLVT Geomembrane Panel. No standing water, mud, snow or excessive moisture should be on the subgrade when the MLVT Geomembrane Panel is deployed. Subgrade should be constructed of a firm stable material compacted to a 95% proctor.

3.0 Deployment of MLVT Geomembrane Panels

- A. The MLVT Geomembrane Panel shall be placed at the edge of the tank layout and be lined up with the centerline of the tank layout. Unroll the MLVT Geomembrane Panel down the centerline of the tank layout. Verify the markings on the MLVT Geomembrane Panel line up with the tank layout. If needed adjust the placement of the MLVT Geomembrane Panel prior to proceeding with installation.
- B. The MLVT Geomembrane Panel is then unfolded in the perpendicular direction to which it was unrolled in one direction. The next step is to unfold the MLVT Geomembrane Panel in the opposite direction of the first unfold direction.
- C. See sketch at end of document for clarification of these steps.

4.0 MLVT Geomembrane Representative Welds

- A. At the start of each day's work and once every 4 hours thereafter, before any welding machine shall be deployed on a liner panel, a sample of a representative seam shall be produced and evaluated for each welding machine to be utilized.

Representative welds shall also be required if there is a change in environmental conditions. Representative samples shall be prepared non-destructively using strips of geomembrane cut from excess sheets of liner being seamed. Peel and shear samples are to be tested with a calibrated tensiometer. Field seam welding shall commence only after successful representative seam test results are achieved by each machine.

- B. Test results shall be representative of subsequently made seams on an actual liner fabricated after the test. There shall be one representative seam evaluation made every four hours and on each machine utilized. Representative welds shall be recorded on the CLI Seam Quality Control Form which shall be available to customers upon request.

5.0 Seam Testing Criterion

Samples shall be non-destructive, not requiring patching of fabricated panels. Four test specimens (2 shear and 2 peel) shall be cut from each seam sample and tensiometer tested for bonded seam strength and peel adhesion. All test results shall be recorded in the Seam Quality Control Form.

A. Tensiometer Peel Strength Test:

Peel adhesion shall be in accordance with ASTM D 7747. In seam samples when tested in peel, failure shall occur resulting in a Film Tearing Bond (or "FTB"). The tensiometer peel test provides a numerical value for the peel strength achieved in addition to visually inspection for film tearing bonds. Samples should be 1" wide centered over the seam.

B. Tensiometer Tensile Strength Test:

Samples shall be tested with a tensiometer and evaluated for bonded seam strength (shear) using method ASTM D 7749.

- C. Shear and peel test results shall conform to either GRI GM 19 requirements or to the manufacturer's requirements.

- D. All Field Seams shall be 100% tested by high pressure air lance in accordance with ASTM D 4437.

6.0 Field Thermal Wedge Weld Seaming Procedures

4 to 6 inches per NMOCD Rule

- A. Adjacent MLVT Geomembrane Panels shall be overlapped by approximately 4" for fusion welding. Panel edges to be seamed shall be clean of all foreign matter or debris before seaming commences. Welding can occur once the sheets to be joined have been cleaned and brought into their exact position.
- B. When starting a new weld, the machine shall be manually placed into the overlapped sheet of material.

- C. Welder alignment and temperature shall be monitored during the seaming process and adjustments will be made as necessary. The welded seams must be 100% visually inspected as welding machinery advances.
- D. All cross seams or "T" intersections caused by material roll splices where 3 layers of membrane material occur shall be patched where they intersect with 3" or larger diameter patches of the MLVT Geomembrane material. Patches shall be applied by use of a hand held heat gun and seam roller. All patches and repairs shall be 100% tested by high pressure air lance or vacuum box in accordance with ASTM D 4437 and ASTM D 5641.
- E. Should a defective seam be found, welding shall be ceased until the cause of the defect is determined and rectified and the seam is repaired. Documentation of the defect and repair shall be recorded on the Seam Quality Control Form.

7.0 Fold back of MLVT Geomembrane Panels

- A. Once all field seaming is completed the outer limits of the MLVT Geomembrane Panels need to be folded back on top of themselves far enough to provide enough room for assembly of the steel tank sections without damage to the system.

8.0 MLVT Geomembrane Panel final deployment

- A. Once the steel walls are assembled they need to be inspected for any sharp surfaces that could damage the MLVT Geomembrane Panels and there needs to be a support material placed as a chamfer at the transition from the wall to the subgrade to eliminate the possibility of stressing the MLVT Geomembrane panel at the 90 degree transition. This support material can be sand tubes, precut foam, etc.
- B. Next the MLVT Geomembrane Panels need to be placed up and over the walls. This step is completed with the assistance of equipment used to lift the edge of the MLVT Geomembrane Panel up the height of the steel wall. Enough material should be lifted up and over the wall to create the proper overhang so the liner does not fall back off the wall while the clamping system is installed.
- C. The MLVT Geomembrane Panels shall be protected at all times from damage and all equipment and methods used to lift, place and clamp shall not damage the MLVT Geomembrane Panel and shall not impart excess stress in the MLVT Geomembrane Panels and thermally welded seam areas.
- D. ALL tank panel erection, assembly, placement and lifting of MLVT Geomembrane Panel is by others. CLI shall not be responsible for damages to the MLVT Geomembrane Panel after delivery / customer pickup or once installation is completed, if performed by CLI.

End of Specification



Quality Control Air Testing

Project:
Owner:
Engineer:
Contractor:
Supervisor:
Material:

[illegible]

COLORADO LINING INTERNATIONAL
10652 Singing Hills Road Parker, Colorado 80138 / 1-800-524-8672 / 303-841-2022 / Fax 303-841-5780 / www.coloradolining.com

Section 1.14 Geomembrane Installation Manual

MLVT GEOMEMBRANE PANEL INSTALLATION MANUAL

Well Water Solutions, Inc.




Colorado Lining International
Parker CO 80138
800-524-8672/303-841-2022
Fax: 303-841-5780
www.coloradolining.com



DEPLOYMENT OF DUAL DIRECTION ACCORDION FOLDED PANELS

(SHEET 1 OF 2)

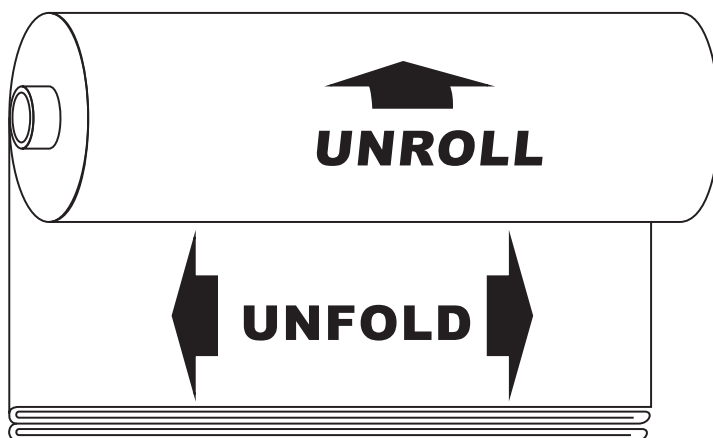




DEPLOYMENT OF DUAL DIRECTION ACCORDION FOLDED PANELS

(SHEET 2 OF 2)

CLI FABRICATES FRAC TANK PANEL LINERS AND UNDERLAYMENTS IN A DUAL DIRECTION ACCORDION FOLDED MANNER SO THAT THE PANELS CAN BE DEPLOYED ON THE TANK'S CENTERLINE. AFTER THE INITIAL UN-ROLLING THE PANELS ARE THEN UN-FOLDED IN PERPENDICULAR DIRECTIONS


TANK EXTENTS
OUTLINE

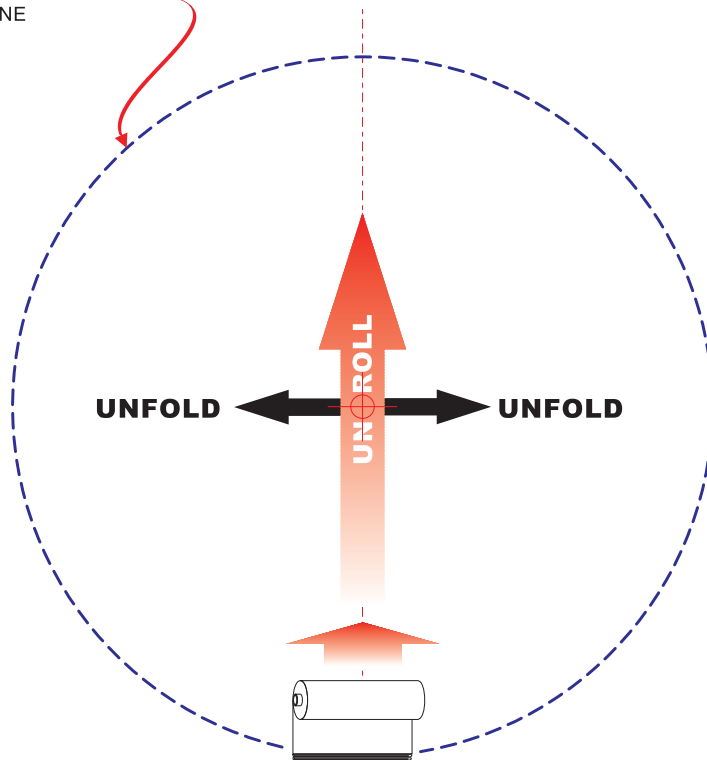

UNROLL PANEL
ON TANK'S
CENTERLINE
PRIOR TO WALLS
GOING UP



**DOUBLE DIRECTION ACCORDION FOLDED
PANEL SCHEMATIC**
(SHEET 2 OF 2)

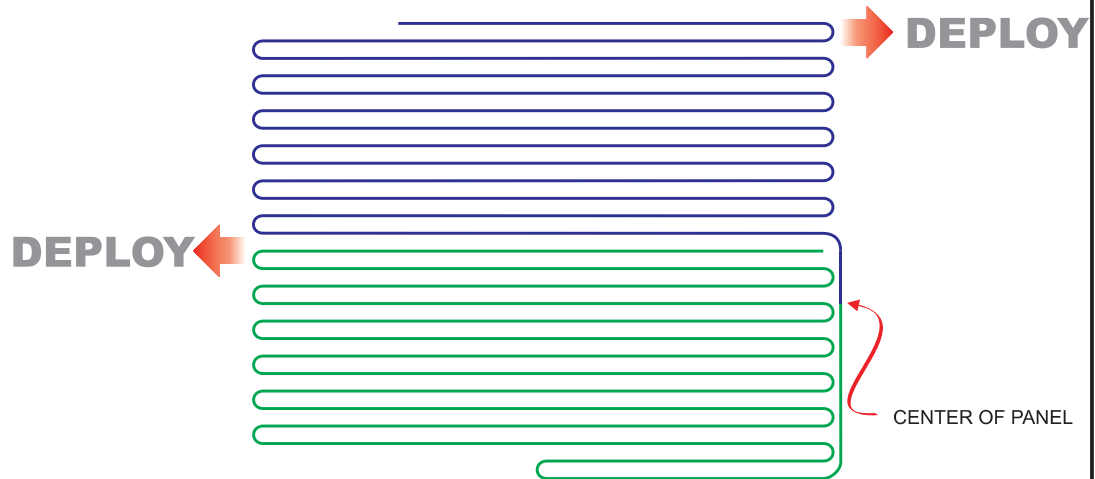

EXAMPLE OF A 26 SHEET B-40 TANK LINER

Section 1.15 WWS Preferred Liner Spec or Comparable Substitute



19103 Gundle Road
Houston, TX 77073
281 230 8650 Fax
www.gseworld.com

January 22, 2018

Western ProLine
184 Hwy 59 North
Miles City, MT 59301

RE: GSE LLDPE Geomembrane ~~CP~~ Permeability

Certification of Compliance

The undersigned, being qualified and authorized to do so, hereby certifies that GSE High Performance 30 mil Nominal and GSE High Performance 40 mil Nominal UltraFlex LLDPE Geomembranes will meet a permeability of 1×10^{-12} cm/s when tested per ASTM E96.

Sincerely,

A handwritten signature in black ink, appearing to read "Miguel Garcia", written over a light gray rectangular background.

Miguel Garcia
GSE Technical Support

MG18-0005

TECHNICAL NOTE

Chemical Resistance Chart

GSE is the world's leading supplier of high quality, polyethylene geomembranes. GSE polyethylene geomembranes are resistant to a great number and combinations of chemicals. Note that the effect of chemicals on any material is influenced by a number of variable factors such as temperature, concentration, exposed area and duration. Many tests have been performed that use geomembranes and certain specific chemical mixtures. Naturally, however, every mixture of chemicals cannot be tested for, and various criteria may be used to judge performance. Reported performance ratings may not apply to all applications of a given material in the same chemical. Therefore, these ratings are offered as a guide only.

Medium	Concentration	Resistance at:		Medium	Concentration	Resistance at:	
		20° C (68° F)	20° C (140° F)			20° C (68° F)	20° C (140° F)
A				Copper chloride	sat. sol.	S	S
Acetic acid	100%	S	L	Copper nitrate	sat. sol.	S	S
Acetic acid	10%	S	S	Copper sulfate	sat. sol.	S	S
Acetic acid anhydride	100%	S	L	Cresylic acid	sat. sol.	L	—
Acetone	100%	L	L	Cyclohexanol	100%	S	S
Adipic acid	sat. sol.	S	S	Cyclohexanone	100%	S	L
Allyl alcohol	96%	S	S	D			
Aluminum chloride	sat. sol.	S	S	Decahydronaphthalene	100%	S	L
Aluminum fluoride	sat. sol.	S	S	Dextrine	sol.	S	S
Aluminum sulfate	sat. sol.	S	S	Diethyl ether	100%	L	—
Alum	sol.	S	S	Dioctylphthalate	100%	S	L
Ammonia, aqueous	dil. sol.	S	S	Dioxane	100%	S	S
Ammonia, gaseous dry	100%	S	S	E			
Ammonia, liquid	100%	S	S	Ethanediol	100%	S	S
Ammonium chloride	sat. sol.	S	S	Ethanol	40%	S	L
Ammonium fluoride	sol.	S	S	Ethyl acetate	100%	S	U
Ammonium nitrate sat. sol.	S	S		Ethylene trichloride	100%	U	U
Ammonium sulfate	sat. sol.	S	S	F			
Ammonium sulfide	sol.	S	S	Ferric chloride	sat. sol.	S	S
Amyl acetate	100%	S	L	Ferric nitrate	sol.	S	S
Amyl alcohol	100%	S	L	Ferric sulfate	sat. sol.	S	S
B				Ferrous chloride	sat. sol.	S	S
Barium carbonate	sat. sol.	S	S	Ferrous sulfate	sat. sol.	S	S
Barium chloride	sat. sol.	S	S	Fluorine, gaseous	100%	U	U
Barium hydroxide	sat. sol.	S	S	Fluorosilicic acid	40%	S	S
Barium sulfate	sat. sol.	S	S	Formaldehyde	40%	S	S
Barium sulfide	sol.	S	S	Formic acid	50%	S	S
Benzaldehyde	100%	S	L	Formic acid	98-100%	S	S
Benzene	—	L	L	Furfuryl alcohol	100%	S	L
Benzoic acid	sat. sol.	S	S	G			
Beer	—	S	S	Gasoline	—	S	L
Borax (sodium tetraborate)	sat. sol.	S	S	Glacial acetic acid	96%	S	L
Boric acid	sat. sol.	S	S	Glucose	sat. sol.	S	S
Bromine, gaseous dry	100%	U	U	Glycerine	100%	S	S
Bromine, liquid	100%	U	U	Glycol	sol.	S	S
Butane, gaseous	100%	S	S	H			
1-Butanol	100%	S	S	Heptane	100%	S	U
Butyric acid	100%	S	L	Hydrobromic acid	50%	S	S
C				Hydrobromic acid	100%	S	S
Calcium carbonate	sat. sol.	S	S	Hydrochloric acid	10%	S	S
Calcium chlorate	sat. sol.	S	S	Hydrochloric acid	35%	S	S
Calcium chloride	sat. sol.	S	S	Hydrocyanic acid	10%	S	S
Calcium nitrate	sat. sol.	S	S	Hydrofluoric acid	4%	S	S
Calcium sulfate	sat. sol.	S	S	Hydrofluoric acid	60%	S	L
Calcium sulfide	dil. sol.	L	L	Hydrogen	100%	S	S
Carbon dioxide, gaseous dry	100%	S	S	Hydrogen peroxide	30%	S	L
Carbon disulfide	100%	L	U	Hydrogen peroxide	90%	S	U
Carbon monoxide	100%	S	S	Hydrogen sulfide, gaseous	100%	S	S
Chloracetic acid	sol.	S	S	Lactic acid	100%	S	S
Carbon tetrachloride	100%	L	U	Lead acetate	sat. sol.	S	—
Chlorine, aqueous solution	sat. sol.	L	U	Magnesium carbonate	sat. sol.	S	S
Chlorine, gaseous dry	100%	L	U	Magnesium chloride	sat. sol.	S	S
Chloroform	100%	U	U	Magnesium hydroxide	sat. sol.	S	S
Chromic acid	20%	S	L	Magnesium nitrate	sat. sol.	S	S
Chromic acid	50%	S	L	Maleic acid	sat. sol.	S	S
Citric acid	sat. sol.	S	S	Mercuric chloride	sat. sol.	S	S
				Mercuric cyanide	sat. sol.	S	S
				Mercuric nitrate	sol.	S	S

GSEworld.com



Section 1.16 Geo Grid Mesh Spec



SKAPS Industries
571 Industrial Parkway
Commerce, GA 30529 (U.S.A.)
Phone (706) 336-7000 Fax (706) 336-7007
e-mail: info@skaps.com

SKAPS TRANSNET™ (TN) HDPE GEONET 220

SKAPS TRANSNET™ Geonet consists of SKAPS GeoNet made from HDPE resin.

Property	Test Method	Unit	Required Value	Qualifier
Geonet				
Thickness	ASTM D 5199	mil.	220±20	Range
Carbon Black	ASTM D 4218	%	2 to 3	Range
Tensile Strength	ASTM D 7179	lb/in	45	Minimum
Melt Flow	ASTM D 1238 ³	g/10 min.	1	Maximum
Density	ASTM D 1505	g/cm ³	0.94	Minimum
Transmissivity ¹	ASTM D 4716	m ² /sec.	2x10 ⁻³	MARV ²

Notes:

1. Transmissivity measured using water at 21 ± 2°C (70 ± 4°F) with a gradient of 0.1 and a confining pressure of 10000 psf between stainless steel plates after 15 minutes. Values may vary between individual labs.
2. MARV is statistically defined as mean minus two standard deviations and it is the value which is exceeded by 97.5% of all the test data.
3. Condition 190/2.16

This information is provided for reference purposes only and is not intended as a warranty or guarantee. SKAPS assumes no liability in connection with the use of this information.

Visit our Web site at www.skaps.com

Section 1.17 Patents and Patent Protections



(12) **United States Patent**
Lovelace et al.

(10) **Patent No.:** **US 8,376,167 B2**
(45) **Date of Patent:** **Feb. 19, 2013**

(54) **PORTABLE RESERVOIR FRAME**

(75) Inventors: **Sean Michael Lovelace**, Casper, WY (US); **Christopher Jason Songe**, Casper, WY (US)

(73) Assignee: **Energy Innovations, LLC**, Casper, WY (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **13/469,883**

(22) Filed: **May 11, 2012**

(65) **Prior Publication Data**
US 2012/0223073 A1 Sep. 6, 2012

Related U.S. Application Data

(63) Continuation of application No. 13/245,492, filed on Oct. 21, 2011.

(51) **Int. Cl.**
B65D 6/00 (2006.01)

(52) **U.S. Cl.** **220/4.17; 220/4.16; 220/693; 220/567; 220/4.12**

(58) **Field of Classification Search** 220/1.6, 220/4.12, 4.16, 4.17, 9.4, 23.9, 495.06, 495.08, 220/567, 681, 693
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,875,666 A * 9/1932 Schwemlein 220/693
3,233,251 A * 2/1966 Barrera 52/245
3,648,303 A * 3/1972 Stewart et al. 52/5
4,124,907 A * 11/1978 Laven 52/169.7

FOREIGN PATENT DOCUMENTS

CA 2692016 7/2010

* cited by examiner

Primary Examiner — Anthony Stashick


Assistant Examiner — Christopher McKinley

(74) *Attorney, Agent, or Firm* — Gordon Silver, Ltd.; Ronald C. Gorsché

(57) **ABSTRACT**

A portable reservoir frame composed of interlocking panels secured by a series of flanges having holes and pegs. An inner liner to hold liquid inside the reservoir frame is presented.

16 Claims, 11 Drawing Sheets

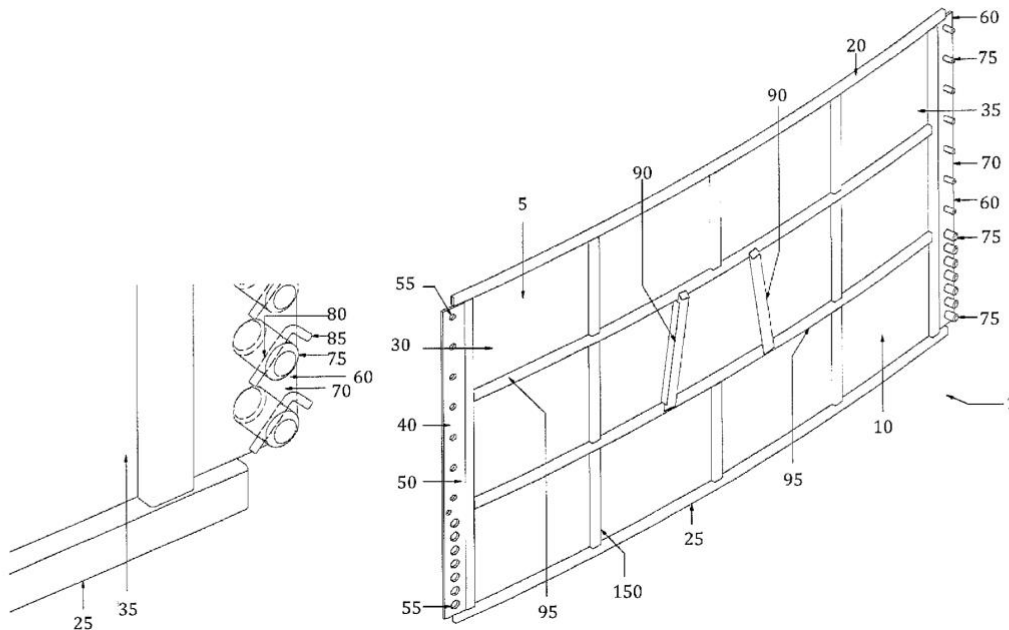



4172 North Frontage Rd E Moses Lake, WA 98837
 (800) 346-7744 (509) 766-7024 Fax (509) 766-0414

www.inlandtarp.com

TECHNICAL DATA SHEET

Geomembrane 40mil LLDPE

Property	Test Method	Frequency (A)	Unit Metric	Solmax 140-7000
Thickness (Nominal +/- 10%) (E)	ASTM D 5199	Every roll	mm	1.00
Resin Density	ASTM D 1505	1/Batch	g/cc	<0.926
Melt Index-190/2.16(max)	ASTM D 1238	1/Batch	g/10min	1.0
Sheet Density (C)	ASTM D 1505	Every 2 rolls	g/cc	<0.939
Carbon Black Content (D)	ASTM D 4218	Every 2 rolls	%	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	Every 6 rolls	Category	Cat. 1 / Cat. 2
Oxidative Induction Time (min. avg)	ASTM D3895	1/Batch	min	100
Tensile Properties (min. avg)(B)	ASTM D 6693	Every 2 rolls		
Strength as Break			kN/m	23
Elongation at Break			%	800
2% Modulus (max.)	ASTM D 5323	PerFormulation	kN/m	420
Tear Resistance (min. avg.)	ASTM D 1004	Every 6 rolls	N	85
Puncture Resistance (min. avg.)	ASTM D 4833	Every 6 rolls	N	215
Dimensional Stability	ASTM D 1204	Every 6 rolls	%	+/- 2
Multi-Axial Tensile (min.)	ASTM D 5617	PerFormulation	%	90
Oven Aging-% retained after 90 days	ASTM D 5721	PerFormulation		
STD OIT (min. avg.)	ASTM D 3895		%	35
HP OIT (min. avg.)	ASTM D 5885		%	60
UV Resistance-% retained after 1600 hr	GRI-GM-11	PerFormulation		
HP-OIT (min. avg.)	ASTM D 5885		%	35

Note;

(A) Testing frequency based on standard roll dimensions and one batch is approximately 180,000 lbs (or one railcar).

(B) Machine Direction (MD) and Cross Machine Direction (XMD or TD) average values should be on the basis of 5 specimens each direction.

(C) Correlation table is available for ASTM D792 vs. ASTM D1505. Both methods give the same results.

(D) Correlation table is available for ASTM D1603 vs. ASTM D4218. Both methods give the same results.

(E) The minimum average thickness is +/- 10% of the nominal value.

*All values are nominal test results, except when specified as minimum of maximum.

* The information contained herein is provided for reference purposes only and is not intended as warranty of guarantee. Final determination of suitability for use contemplated is the sole responsibility of the user. Solmax along with Inland Tarp & Liner assumes no liability in connection with the use of this information.

Manufacture & Distribution of Hay Tarps, Truck Tarps, Industrial Liners, Building & Athletic Field Covers.
1-800-346-7744

March 2020

**Variances and/or Equivalency Demonstrations
for:**

- 1) Above Ground Steel Tank Modular Recycling
Storage Containments (AST) Primary and
Secondary Liners**
- 2) Slope and Anchor Variance Request for
Above Ground Steel Tank Modular Recyclingg
Storage Containments**
- 3) Alternative Testing Variance Request**
- 4) Fencing Variance Request**

**Applicability of Variances for Modular AST
Containments in the Permian Basin of
New Mexico**

***40-mil Non-reinforced LLDPE Liner as Alternate
Primary and 30-mil Non-reinforced LLDPE as Secondary
Liner for Above Ground Steel Tank Modular Recycling
Storage Containments***

STATEMENT EXPLAINING WHY THE APPLICANT SEEKS A VARIANCE FOR 40 MIL NON-REINFORCED LLDPE GEOMEMBRANE AS AN ALTERNATIVE PRIMARY AND 30 MIL NON-REINFORCED AS ALTERNATIVE SECONDARY LINER FOR MODULAR STEEL AST CONTAINMENT

The prescriptive mandates of the Rule that are the subject of this variance request are the following subsections of 19.15.34.12

NMAC 19.15.34.12 A DESIGN AND CONSTRUCTION SPECIFICATIONS FOR A RECYCLING CONTAINMENT

(4) All primary (upper) liners in a recycling containment shall be geomembrane liners composed of an impervious, synthetic material that is resistant to ultraviolet light, petroleum hydrocarbons, salts and acidic and alkaline solutions. *All primary liners shall be 30-mil flexible PVC, 45-mil LLDPE string reinforced or 60-mil HDPE liners. Secondary liners shall be 30-mil LLDPE string reinforced or equivalent with a hydraulic conductivity no greater than 1×10^{-9} cm/sec. Liner compatibility shall meet or exceed the EPA SW-846 method 9090A or subsequent relevant publications.*

The applicant proposes one layer of 40-mil LLDPE non-reinforced as a primary liner and a secondary liner comprised of one layer of 30-mil LLDPE non-reinforced material

Rule 34 did not consider Above Ground Steel Storage Tanks that employ liners as a primary and secondary containment method.

This material is more readily available than the prescribed liners in the Rule and provides superior flexibility and conformity characteristics. Due to the vertical steel walls, 60-mil HDPE, 45 or 30-mil LLDPE string reinforced liners and 30-mil PCV liners are not sufficiently flexible for use in these modular containments.

All liners will have a hydraulic conductivity no greater than 1×10^{-9} cm/sec and meet or exceed EPA SW-846 method 9090A.

Demonstration That the Variance Will Provide Equal or Better Protection of Fresh Water, Public Health and the Environment

The following technical documents provide supportive data to demonstrate that this liner system (*with integrated leak detection system*) provides equal or better protection of fresh water, public health and the environment by providing the requisite containment and protection. Attached is a technical comparison of the proposed material is compared to what is advised through Rule 34. A second memorandum provides clarification that the engineering requirements for site preparation, which ensures functionality of the liner system, is crosscutting to varied locations/sites within the Permian Basin. Liner specifications are also included in submission.

R.K. FROBEL & ASSOCIATES
Consulting Engineers

Technical Memorandum: 40-mil LLDPE as Alternative Primary with 30-mil LLDPE as Alternative Secondary Liner System for Modular Steel AST Recycling Containment
NMAC 19.15.34.12 A (4)

In consideration of the liner application for modular AST impoundments, size and depth of the AST, design details for modular tanks as well as estimated length of at least five years of service time, it is my professional opinion that a 40 mil LLDPE (non-reinforced) and a 30 mil LLDPE (non-reinforced) geomembrane system will provide the requisite barrier against produced water loss as an alternative primary and secondary liner system. *The two proposed liners, 40 mil LLDPE as Primary liner and 30 mil LLDPE Secondary liner, will function equal to or better than 45 mil String Reinforced LLDPE, 30 mil PVC, or 60 mil HDPE liners as a primary liner and 30 mil LLDPE string reinforced as a secondary liner system. Additionally, this two-layer system with integrated leak detection system, will provide requisite protection for the environment that is equal to or better than the above primary and secondary liner systems referenced in OCD rule 34.* The following are discussion points that will exhibit the attributes of a 40 mil/30 mil LLDPE lining system:

The nature and formulation of LLDPE resin is very similar to HDPE. The major difference is that LLDPE is lower density, lower crystallinity (more flexible and less chemical resistant). However, LLDPE will resist aging and degradation and remain intact for many years in exposed conditions. The LLDPE resin is virtually the same for non-reinforced 30 or 40 mil LLDPE and string reinforced 30 or 45 mil LLDPE geomembranes and both will provide requisite containment and be equally protective for this application, enduring UV and chemical degradation in the produced water environment.

Flexibility Requirements. Non-reinforced LLDPE geomembranes are less stiff and far more flexible than string reinforced geomembranes as well as 60 mil HDPE and in this regard are preferred for installations in vertical wall tanks such as this proposed installation. LLDPE provides a very flexible sheet that enables it to be fabricated into large panels, folded for shipping and installed on vertical walls transitioned to flat bottom. Non-reinforced LLDPE sheet will conform better than a string reinforced LLDPE to the tank dimensions under hydrostatic loading and will exhibit less wrinkling and creasing during and after installation.

Thermal Fusion Seaming Requirements. Thermal seaming and QC seam test requirements for geomembranes are product specific and usually prescribed by the sheet manufacturer. Both dual wedge and single wedge thermal fusion welding is commonly used on LLDPE and QC testing by air channel (ASTM D 5820) or High Pressure Air Lance (ASTM D 4437) is fully acceptable and recognized as industry standards. In this regard, either non-reinforced LLDPE or string-reinforced LLDPE will be acceptable as far as QC and thermal fusion seaming methods are concerned.

R.K. FROBEL & ASSOCIATES
Consulting Engineers

Potential for Leakage through the Primary and Secondary Liners. Leakage through geomembrane liners is directly a function of the height of liquid head above any hole or imperfection. The geonet drainage media between the primary and secondary LLDPE geomembranes at the base of the AST in this application provides immediate drainage to a low point or outside the Modular AST Impoundment and thus no hydrostatic head or driving gradient is available to push leakage water through a hole in the Secondary LLDPE liner .

Leakage through any Primary geomembrane is driven by size of hole and depth and will be detected by the increase of water in the drainage system and the volume being pumped out of the secondary containment. In this regard and for this variance, the Primary consists of 40 mil LLDPE geomembrane which will perform equal to or better than a single layer of string reinforced LLDPE for potential leakage. Thus, if a leak occurs through the top layer, it will be effectively contained by the second layer of 30 mil LLDPE geomembrane. If required, location of holes in the Primary can be found by Electrical Leak Location Survey (ELLS) using a towed electrode (ASTM D 7007). Holes found can then be repaired and thus water seepage into the leakage collection and drainage system will be kept to a minimum. Dependent on OCR requirements for Action Leakage Rate (ALR), the leakage volumes may only be monitored. For example, a typical ALR is < 20 gpad whereas a rapid and large leak (RLL) may be > 100 gpad. Most states specify maximum ALR values for waste and process water impoundments usually in the range of 100 to 500 gpad. However, New Mexico does not specify an ALR for waste or process water impoundments (GRI Paper No. 15).

LLDPE (and string reinforced LLDPE) can be prefabricated into large panels and thus both types offer the following for Containment:

- Prefabrication in factory-controlled conditions into very large panels (up to 30,000 sf) results in ease of installation, less thermal fusion field seams and less on site QC and CQA. (It should be noted that HDPE cannot be prefabricated into panels and requires considerably more on-site welding and QC).
- Large prefabricated panels will provide better control of thermal fusion welding in a factory environment that will improve the liner system integrity for the long term. Ease of installation of large prefabricated custom size panels results in a greater reduction of installation time and associated installation and QC costs
- The Non-reinforced LLDPE geomembrane provides superior lay flat characteristics and conformability which allows for more intimate contact with the underlying soil, geonet, or geotextile and tank walls as well as overlying materials thus providing better flow characteristics for drainage of water. String reinforced LLDPE exhibits more wrinkling and when overlaid or in contact with a geonet drain, wrinkles tend to form pockets and dams affecting drainage of any leakage water to the exterior of the Modular AST Impoundment.

R.K. FROBEL & ASSOCIATES
Consulting Engineers

- Both types of LLDPE geomembrane are easily repaired using the same thermal fusion bonding method without the need for special surface grading preparation for extrusion welding as is typically used in repair of HDPE geomembranes. However, string reinforced LLDPE requires that all cut edges with exposed scrim must be encapsulated with extrusion bead. No encapsulation is required on non-reinforced LLDPE.

In summary, it is my professional opinion that the liner system of 40 mil non-reinforced LLDPE geomembrane as Primary liner and 30 mil non reinforced LLDPE Secondary liner, with integrated leak detection system, will provide protection that is equal to or better than 45 mil string reinforced LLDPE, 30 mil PVC, 60 mil HDPE (primary liner) and 35 mil LLDPE (secondary liner) and meets requirements as defined by the rule as an alternative liner system (resistance to UV and chemical exposure and required hydraulic conductivity). Additionally, this liner system will provide a superior installation in the AST environment and function better than liners referenced in the OCD rule and will provide the requisite protection of fresh water, public health and the environment for at least 3 years in the produced water recycling environment.

If you have any questions on the above technical memorandum or require further information, give me a call at 720-289-0300 or email geosynthetics@msn.com

Sincerely Yours,

RK Frobel

Ronald K. Frobel, MSCE, PE



References:

NMAC 19.15.34.12 DESIGN AND CONSTRUCTION SPECIFICATIONS FOR A RECYCLING CONTAINMENT

Geosynthetic Research Institute (GRI) Published Standards and Papers 2018

ASTM Standards 2018

Attachments:

R. K. Frobel C.V.

STATEMENT EXPLAINING WHY THE APPLICANT SEEKS A VARIANCE FOR 40 MIL NON-REINFORCED LLDPE GEOMEMBRANE AS AN ALTERNATIVE PRIMARY AND SECONDARY LINER FOR MODULAR STEEL AST CONTAINMENT

The prescriptive mandates of the Rule that are the subject of this variance request are the following subsections of 19.15.34.12

NMAC 19.15.34.12 A DESIGN AND CONSTRUCTION SPECIFICATIONS FOR A RECYCLING CONTAINMENT

(4) All primary (upper) liners in a recycling containment shall be geomembrane liners composed of an impervious, synthetic material that is resistant to ultraviolet light, petroleum hydrocarbons, salts and acidic and alkaline solutions. *All primary liners shall be 30-mil flexible PVC, 45-mil LLDPE string reinforced or 60-mil HDPE liners. Secondary liners shall be 30-mil LLDPE string reinforced or equivalent with a hydraulic conductivity no greater than 1×10^{-9} cm/sec.* Liner compatibility shall meet or exceed the EPA SW-846 method 9090A or subsequent relevant publications.

The applicant proposes one layer of 40-mil LLDPE as a primary liner and a secondary liner comprised of one layer of 40-mil LLDPE material.

Rule 34 did not consider Above Ground Steel Storage Tanks that employ liners as a primary and secondary containment method.

This material is more readily available than the prescribed liners in the Rule and provides superior flexibility and conformity characteristics. Due to the vertical steel walls, 60-mil HDPE, 45 or 30-mil LLDPE string reinforced liners and 30-mil PCV liners are not sufficiently flexible for use in these modular containments.

Demonstration That the Variance Will Provide Equal or Better Protection of Fresh Water, Public Health and the Environment

The following technical documents provide supportive data to demonstrate equal or better protection of fresh water, public health and the environment by providing the requisite containment and protection. Technical comparison of the proposed material is compared to what is advised through Rule 34 is discussed. A second memorandum provides clarification that the engineering requirements for site preparation, which ensures functionality of the liner system, is crosscutting to varied locations within the Permian Basin. Stamped plans from design engineer confirm applicability of this liner system to this specific site.

R.K. FROBEL & ASSOCIATES
Consulting Engineers

**Technical Memorandum: 40-mil LLDPE as Alternative
Primary/Secondary Liner System for Modular Steel AST Recycling
Containment**

NMAC 19.15.34.12 A (4)

In consideration of the Primary lining application (modular AST impoundment), size of the AST and depth, design details for modular tanks as well as estimated length of up to five years of service time, it is my professional opinion that a 40 mil LLDPE geomembrane will provide the requisite barrier against processed water loss. It should be noted that the 40 mil LLDPE exceeds the OCD mandate for a Secondary lining system. *The two proposed 40 mil LLDPE liners will function equal to or better than 45 mil String Reinforced LLDPE, 30 mil PVC, or 60 mil HDPE liners as a primary liner and 30 mil LLDPE string reinforced as a secondary liner system. Additionally, the 40 mil LLDPE in a two-layer system will provide requisite protection for the environment that is equal to or better than the above primary and secondary liner systems referenced in OCD rule 34.* The following are discussion points that will exhibit the attributes of a 40 mil LLDPE lining system:

The nature and formulation of LLDPE resin is very similar to HDPE. The major difference is that LLDPE is lower density, lower crystallinity (more flexible and less chemical resistant). However, LLDPE will resist aging and degradation and remain intact for many years in exposed conditions. The LLDPE resin is virtually the same for non-reinforced 40 mil LLDPE and string reinforced 45 mil LLDPE geomembranes and both will provide requisite containment and be equally protective for this application.

Flexibility Requirements. Non-reinforced LLDPE geomembranes are less stiff and far more flexible than string reinforced geomembranes as well as 60 mil HDPE and in this regard are preferred for installations in vertical wall tanks such as this proposed installation. LLDPE provides a very flexible sheet that enables it to be fabricated into large panels, folded for shipping and installed on vertical walls transitioned to flat bottom. Non-reinforced LLDPE sheet will conform better than a string reinforced LLDPE to the tank dimensions under hydrostatic loading and will exhibit less wrinkling and creasing during and after installation.

Thermal Fusion Seaming Requirements. Thermal seaming and QC seam test requirements for geomembranes are product specific and usually prescribed by the sheet manufacturer. Both dual wedge and single wedge thermal fusion welding is commonly used on LLDPE and QC testing by air channel (ASTM D 5820) or High Pressure Air Lance (ASTM D 4437) is fully acceptable and recognized as industry standards. In this regard, either non-reinforced LLDPE or string-reinforced LLDPE will be acceptable as far as QC and thermal fusion seaming methods are concerned.

Potential for Leakage through the Primary and Secondary Liners. Leakage through geomembrane liners is directly a function of the height of liquid head above any hole or imperfection. The geonet drainage media between the primary and secondary LLDPE

R.K. FROBEL & ASSOCIATES
Consulting Engineers

geomembranes at the base of the AST in this application provides immediate drainage to a low point or outside the Modular AST Impoundment and thus no hydrostatic head or driving gradient is available to push leakage water through a hole in the Secondary LLDPE liner .

Leakage through any Primary geomembrane is driven by size of hole and depth and will be detected by the increase of water in the drainage system and the volume being pumped out of the secondary containment. In this regard and for this variance, the Primary consists of 40 mil LLDPE geomembrane which will perform equal to or better than a single layer of string reinforced LLDPE for potential leakage. Thus, if a leak occurs through the top layer, it will be effectively contained by the second layer of 40 mil LLDPE geomembrane. If required, location of holes in the Primary can be found by Electrical Leak Location Survey (ELLS) using a towed electrode (ASTM D 7007). Holes found can then be repaired and thus water seepage into the leakage collection and drainage system will be kept to a minimum. Dependent on OCR requirements for Action Leakage Rate (ALR), the leakage volumes may only be monitored. For example, a typical ALR is < 20 gpad whereas a rapid and large leak (RLL) may be > 100 gpad. Most states specify maximum ALR values for waste and process water impoundments usually in the range of 100 to 500 gpad. However, New Mexico does not specify an ALR for waste or process water impoundments (GRI Paper No. 15).

Both non-reinforced LLDPE and string reinforced LLDPE can be prefabricated into large panels and thus both types offer the following for Containment:

- Prefabrication in factory-controlled conditions into very large panels (up to 30,000 sf) results in ease of installation, less thermal fusion field seams and less on site QC and CQA. (It should be noted that HDPE cannot be prefabricated into panels and requires considerably more on-site welding and QC).
- Large prefabricated panels will provide better control of thermal fusion welding in a factory environment that will improve the liner system integrity for the long term. Ease of installation of large prefabricated custom size panels results in a greater reduction of installation time and associated installation and QC costs
- The Non-reinforced LLDPE geomembrane provides superior lay flat characteristics and conformability which allows for more intimate contact with the underlying soil, geonet, or geotextile and tank walls as well as overlying materials thus providing better flow characteristics for drainage of water. String reinforced LLDPE exhibits more wrinkling and when overlaid or in contact with a geonet drain, wrinkles tend to form pockets and dams affecting drainage of any leakage water to the exterior of the Modular AST Impoundment.
- Both types of LLDPE geomembrane are easily repaired using the same thermal fusion bonding method without the need for special surface grinding/preparation for extrusion welding as is typically used in repair of HDPE geomembranes.

R.K. FROBEL & ASSOCIATES
Consulting Engineers

However, string reinforced LLDPE requires that all cut edges with exposed scrim must be encapsulated with extrusion bead. No encapsulation is required on non-reinforced LLDPE.

In summary, it is my professional opinion that the two layers of 40 mil non-reinforced LLDPE geomembranes will provide a Primary/Secondary liner system that is equal to or better than 45 mil string reinforced LLDPE, 30 mil PVC, 60 mil HDPE (primary liner) and 35 mil LLDPE (secondary liner). Additionally, the two layers of 40 mil LLDPE will provide a superior installation and function better than liners referenced in the OCD rule. The two layers of 40 mil non-reinforced LLDPE will provide the requisite protection of fresh water, public health and the environment for at least 5 years in the frack water environment.

If you have any questions on the above technical memorandum or require further information, give me a call at 720-289-0300 or email geosynthetics@msn.com

Sincerely Yours,

R K Frobel

Ronald K. Frobel, MSCE, PE



References:

NMAC 19.15.34.12 DESIGN AND CONSTRUCTION SPECIFICATIONS FOR A RECYCLING CONTAINMENT

Geosynthetic Research Institute (GRI) Published Standards and Papers 2018

ASTM Standards 2018

Attachments:

R. K. Frobel C.V

***Slope and Anchor Variance Request for Above Ground
Steel Tank Modular Recycling Storage Containments***

STATEMENT EXPLAINING WHY THE APPLICANT SEEKS A VARIANCE FOR SLOPE AND ANCHOR FOR MODULAR STEEL AST CONTAINMENT

Statement Explaining Why the Applicant Seeks a Variance

The prescriptive mandates of the Rule that are the subject of this variance request are the following subsections of NMAC 19.15.34.12.

NMAC 19.15.34.12 DESIGN AND CONSTRUCTION SPECIFICATIONS FOR A RECYCLING CONTAINMENT:

A. An operator shall design and construct a recycling containment in accordance with the following specifications.

(2) A recycling containment shall have a properly constructed foundation and interior slopes consisting of a firm, unyielding base, smooth and free of rocks, debris, sharp edges or irregularities to prevent the liner's rupture or tear. Geotextile is required under the liner when needed to reduce localized stress-strain or protuberances that otherwise may compromise the liner's integrity. *The operator shall construct the containment in a levee with an inside grade no steeper than two horizontal feet to one vertical foot (2H:1V). The levee shall have an outside grade no steeper than three horizontal feet to one vertical foot (3H:1V).* The top of the levee shall be wide enough to install an anchor trench and provide adequate room for inspection and maintenance.

(3) Each recycling containment shall incorporate, at a minimum, a primary (upper) liner and a secondary (lower) liner with a leak detection system appropriate to the site's conditions. *The edges of all liners shall be anchored in the bottom of a compacted earth-filled trench. The anchor trench shall be at least 18 inches deep.*

The applicant requests a variance to prescribed slope and anchor in the setting of above ground modular steel containments.

With respect to storage of produced water for use in lieu of fresh water, Rule 34 is written for earthen, lined pits, not free-standing modular impoundments that employ liners as their primary fluid containment system. A modular impoundment consists of a professionally designed steel tank ring with vertical walls. There is no slope to consider as the segmental steel sections are set vertical.

There is no anchor trench as envisioned by the Rule, liners are anchored to the top of the steel walls with clips, no anchor trench is required.

Demonstration That the Variance Will Provide Equal or Better Protection of Fresh Water, Public Health and the Environment

The following technical memorandum provides supportive data to demonstrate equal or better protection of fresh water, public health and the environment by providing the requisite containment and protection.

R.K. FROBEL & ASSOCIATES
Consulting Engineers

Technical Memorandum: Slope and Anchor Trench Variance for Above Ground Steel Modular Containments

NMAC 19.15.34.12 A (2), (3)

Side Slope

The design of soil side slope (inclination) is a geotechnical engineering design consideration. Liquid impoundments such as fresh water or process water containments are usually built within an excavation or with raised earthen embankments. For a liquid impoundment with an exposed liner system, the slope soils and construction dictate slope inclination and very detailed slope stability analysis may be required to determine if slope failure within the embankment will occur once loaded with impounded water. Slope failure may also occur during construction or when the impoundment is empty. A maximum slope is usually specified and is dependent on soil type and cohesive strength, saturated or unsaturated conditions, etc. Detailed analysis for slope stability can be found in "Designing with Geosynthetics" by R.M Koerner as well as many geotechnical books.

A modular impoundment, on the other hand, consists of a professionally designed steel tank ring with vertical walls. *There is no slope to consider as the segmental steel sections are set vertical.* Design of steel tanks, in regard to hydrostatic loading, wind loading, seismic loads, etc. are thoroughly referenced with detailed procedures in the design code - American Petroleum Institute (API) 650-98 "Welded Steel Tanks for Oil Storage". *There are no requirements for maximum slope inclination other than perhaps 90 degrees or vertical wall.*

Anchor Trench

All earthen impoundments with a geomembrane lining system require some form of top of slope anchor, the most common of which is an excavated and backfilled anchor trench usually set back at least 3 ft from the top of slope. Again, there are detailed procedures for anchor trench design in "Designing with Geosynthetics" by R.M Koerner.

A Modular Impoundment requires mechanical anchoring of the geomembrane at the top of the vertical steel wall using standard liner clips that prevent the geomembrane or geomembrane layers from slipping down the side wall. These are detailed in the Tank Installation Manual. *There are no requirements for an "anchor trench" as this is not an in-ground impoundment.*

In summary, based on the design and specifications of a modular steel impoundment, there is no requirement for a maximum interior slope angle of 2H:1V due to the fact that this impoundment is a steel tank with vertical walls. Additionally, there is no requirement for an anchor trench as the geomembrane is attached to the top of the Modular Impoundment vertical walls with large steel clips. This provides the requisite protection of fresh water, public health and the environment for many years.

R.K. FROBEL & ASSOCIATES
Consulting Engineers

American Petroleum Institute (API) 650-98 “Welded Steel Tanks for Oil Storage”

Koerner, R.M., 2005 “Designing With Geosynthetics” Prentice Hall Publishers

Attachments:

R. K. Frobel C.V.

The modular impoundment is designed for use with fluids that are 8.34 pounds/gallon (62.4 pounds per cubic foot) or lighter. Exceeding this specification for fluid weight at full tank capacity (12') could lead to failure at the connection plate(s).

Assuming a freeboard of 0.5 ft (minimum modular impoundment freeboard requirement) the Hydro Pressure (p) of water is 718 pounds per square foot (psf), where

$$\begin{aligned}
 p &= \text{Design Density} \times \text{Height} \\
 &= 62.4 \text{ PCF} \times 11.5 \text{ ft} \\
 (\text{design density} &= 8.34 \frac{\text{lb}}{\text{gal}} \times 7.48 \frac{\text{ft}^3}{\text{gal}})
 \end{aligned}$$

The density of the conditioned produced water is 9.3 pounds/gallon. Assuming a freeboard of 3-ft (19.15.17.12.F(3) NMAC) , the Hydro Pressure (p) of conditioned produced water is 626 psf, where

$$\begin{aligned}
 p &= \text{Design Density} \times \text{Height} \\
 &= 69.64 \text{ PCF} \times 9 \text{ ft} \\
 (\text{design density} &= 9.3 \frac{\text{lb}}{\text{gal}} \times 7.48 \frac{\text{ft}^3}{\text{gal}})
 \end{aligned}$$

Using conditioned produced water with the Pit Rule freeboard requirements of 3-feet results in a Hydro Pressure 92 psf less than the engineered design.

The operator asks the District Division to allow for a 2-foot freeboard, which yields a Hydro Pressure (p) of 696.4 psf, where

$$\begin{aligned}
 p &= \text{Design Density} \times \text{Height} \\
 &= 69.64 \text{ PCF} \times 10 \text{ ft} \\
 (\text{design density} &= 9.3 \frac{\text{lb}}{\text{gal}} \times 7.48 \frac{\text{ft}^3}{\text{gal}})
 \end{aligned}$$

Additional VARIANCE FOR RECYCLING STORAGE CONTAINMENTS (Inground and AST)

- **Alternative Testing Methods**

Request for OCD Approval of Alternative Test Methods to Analyze Concentrations of TPH and Chloride

The prescriptive mandates of the Rule that are the subject of this request are the following subsections of NMAC 19.15.17.13 [emphasis added], 19.15.34.14 and 19.15.29. 12 D

19.15.17.13 CLOSURE AND SITE RECLAMATION REQUIREMENTS:

D.(5) The operator shall collect, at a minimum, a five point composite of the contents of the temporary pit or drying pad/tank associated with a closed-loop system to demonstrate that, after the waste is solidified or stabilized with soil or other non-waste material at a ratio of no more than 3:1 soil or other non-waste material to waste, the concentration of any contaminant in the stabilized waste is not higher than the parameters listed in Table II of 19.15.17.13 NMAC.

The referenced Table II, which is reproduced in part below, notes the Method with asterisk signifying: “*Or other test methods approved by the division”.

Table II Closure Criteria for Burial Trenches and Waste Left in Place in Temporary Pits			
Depth below bottom of pit to groundwater less than 10,000 mg/l TDS	Constituent	Method*	Limit**
25-50 feet	Chloride	EPA Method 300.0	20,000 mg/kg
	TPH	EPA SW-846 Method 418.1	100 mg/kg

19.15.34.14 CLOSURE AND SITE RECLAMATION REQUIREMENTS FOR RECYCLING CONTAINMENTS:

C. The operator shall test the soils beneath the containment for contamination with a five-point composite sample which includes stained or wet soils, if any, and that sample shall be analyzed for the constituents listed in Table I below.

(1) If any contaminant concentration is higher than the parameters listed in Table I, the division may require additional delineation upon review of the results and the operator must receive approval before proceeding with closure.

The referenced Table I, which is reproduced in part below, notes the Method with asterisk signifying: “*Or other test methods approved by the division”.

Table I Closure Criteria for Recycling Containments			
Depth below bottom of containment to groundwater less than 10,000 mg/l TDS	Constituent	Method*	Limit**
51 feet - 100 feet	Chloride	EPA 300.0	10,000 mg/kg
	TPH (GRO+DRO+MRO)	EPA SW-846 Method 8015M	2,500 mg/kg

After sampling solids of more than 50 drilling pits in the Permian Basin, we have observed and reported to OCD on numerous occasions significant problems with non-petroleum drilling additives (e.g. starch) interfering with the laboratory method 418.1. It is not surprising that in many instances we found no correlation between the laboratory results using 418.1 and the results using Method 8015.

We request approval of Method 8015 (GRO + DRO + MRO) for Method 418.1.

19.15.29.12 D. CLOSURE REQUIREMENTS. The responsible party must take the following action for any major or minor release containing liquids.

(1) The responsible party must test the remediated areas for contamination with representative five-point composite samples from the walls and base, and individual grab samples from any wet or discolored areas. The samples must be analyzed for the constituents listed in Table I of 19.15.29.12 NMAC or constituents from other applicable remediation standards.

The referenced Table I, is reproduced in part below.

Table I Closure Criteria for Soils Impacted by a Release			
Minimum depth below any point within the horizontal boundary of the release to ground water less than 10,000 mg/l TDS	Constituent	Method*	Limit**
≤ 50 feet	Chloride***	EPA 300.0 or SM4500 Cl B	600 mg/kg
	TPH (GRO+DRO+MRO)	EPA SW-846 Method 8015M	100 mg/kg
	BTEX	EPA SW-846 Method 8021B or 8260B	50 mg/kg
	Benzene	EPA SW-846 Method 8021B or 8260B	10 mg/kg

We request approval of EPA 300.0 or SM4500 for the analysis of chloride.

Demonstration that OCD Approval Will Provide Equal or Better Protection of Fresh Water, Public Health and the Environment

The purpose of TPH analyses in the Pit Rule is to measure total petroleum hydrocarbons not all non-polar compounds, such as starch or cellulose that can interfere with Method 418.1. While Method 418.1 may provide some useful data for transportation of crude oil or condensate spills to disposal, the addition of non-polar organic materials in drilling fluids, especially for horizontal wells, renders Method 418.1 highly problematic to determine compliance with the Rule. Using Method 8015 for TPH (GRO+DRO+MRO) provides a better measurement of what we believe the Commission intended operators to measure.

In hearings before the Oil Conservation Commission technical arguments were presented regarding the use of SM4500 in lieu of EPA 300.00 for chloride analysis for Rule 29. The Division and the Commission agreed that these two methods provide equal or better protection of fresh water, public health and the environment.

January 2022

Variance Request for Fencing Requirement

Statement Explaining Why the Applicant Seeks a Variance

The prescriptive mandates of the Rule that are the subject of this variance request are presented below with emphasis added:

D. Fencing.

(1) The operator shall fence or enclose a recycling containment in a manner that deters unauthorized wildlife and human access and shall maintain the fences in good repair. The operator shall ensure that all gates associated with the fence are closed and locked when responsible personnel are not onsite.

(2) Recycling containments shall be fenced with a four foot fence that has at least four strands of barbed wire evenly spaced in the interval between one foot and four feet above ground level.

E. Netting. The operator shall ensure that a recycling containment is screened, netted or otherwise protective of wildlife, including migratory birds. The operator shall on a monthly basis inspect for and, within 30 days of discovery, report the discovery of dead migratory birds or other wildlife to the appropriate wildlife agency and to the division district office in order to facilitate assessment and implementation of measures to prevent incidents from reoccurring.

The subject AST employs netting or sonic bird hazing (Mega Bird X with bird calls specific to the Permian Basin). These methods effectively protect avian species such as waterfowl and bats. OCD and BLM have approved both methods per Rule 34 and by BLM Rules respectively.

The steel structure of the AST is 11-feet high, which obviously encloses the containment “in a manner that deters...[terrestrial] wildlife.” Thus, the steel structure meets the mandate of the Rule for enclosure. Thus, netting and the steel structure meet the mandate of Rule 34 for deterring/protecting avian and terrestrial wildlife.

Because AST Containments have a steel stairway between ground surface and the open top, the operator proposes the following deterrent to unauthorized human access:

1. Install gate (e.g. <https://www.saferack.com/product/industrial-safety-gates/safety-swing-gates/>) or chain across the stairway
2. Place an appropriate sign on the gate or chain to help deter unauthorized human access to the open top of the containment
3. Provide for a mechanism to lock the gate when responsible personnel are not onsite.

Demonstration That the Variance Will Provide Equal or Better Protection of Fresh Water, Public Health and the Environment

We believe the proposed protocol provides equal protection of Public Health as a 4-strand barbed wire fence.



PRODUCTS ▾

Enter your search...





Products About Us Industries ▾ Contact | Gallery Videos Reviews News Careers

HOME >> PRODUCTS >> INDUSTRIAL SAFETY GATES >> SELF-CLOSING SAFETY SWING GATES – INDUSTRIAL SAFETY GATES

Self-closing Safety Swing Gates – Industrial Safety Gates

YellowGate, SafeRack's line of industrial safety gates is the most flexible product on the market.

It's able to cover openings between 16" [406mm] and 36" [914mm] and is field adjustable with nothing more than a wrench. Simply slide the gate to the desired width, tighten the adjustment bolts and you're done. This kind of flexibility allows you to keep your facility safe, saves time, and money.

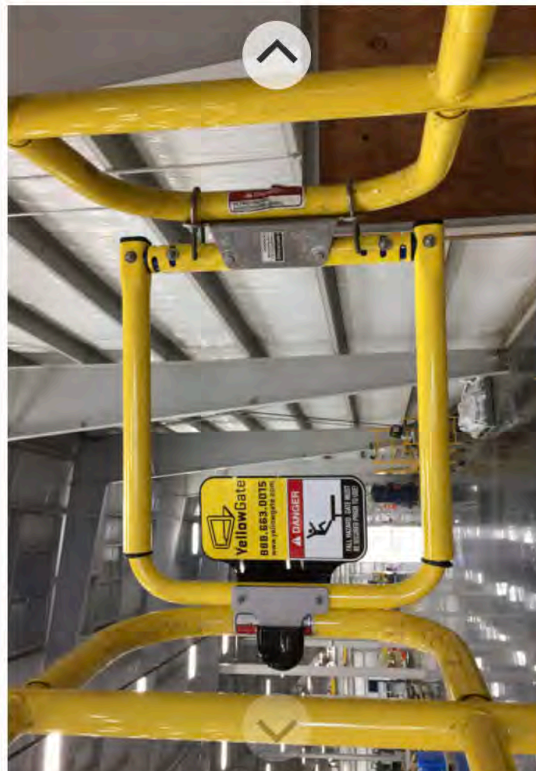

- Easily Adjusted in the Field (16"-36")
- Stainless Mounting Kit Included
- Tension Adjustment Tool Included
- Universal Mount for Simple Installation
- Stainless-steel Mounting Hardware
- Lightweight Aluminum Construction
- Lightweight Aluminum Construction
- Rust-proof
- Powder-coated Safety Yellow
- Patented and Patent-pending Designs
- No Exposed Springs
- In-Stock and Ready-to-Ship

Have Questions?



WE CAN HELP

QUESTION, GET A QUOTE, LIVE DEMO OR REQUEST AN ON-SITE VISIT
OUR EXPERTS SIMPLIFY THE COMPLEX

ORDER NOW

REQUEST ON-SITE VISIT



Chat Live
QUESTIONS OR QUOTES

January 2020

***Applicability of Variances for Modular AST Containments
in the Permian Basin of New Mexico***

R.K. FROBEL & ASSOCIATES
Consulting Engineers

Technical Memorandum: Applicability of Variances for Modular AST Containments in the Permian Basin of New Mexico
NMAC 19.15.34.12 A (2)

I have reviewed the most recent historical variances for AST Containments in the document titled "Variances for C-147 Registration Packages Permian Basin of New Mexico" (January 2020) and examined the applicable design drawings and permits for the following modular AST containments located in the Permian Basin of New Mexico.

- C-147 Registration Package for Myox Above Ground Storage Tank Section 32, T25S, R28E, Eddy County (January 20, 2020)
- C-147 Registration Package for Fez Recycling Containment and Recycling Facility Area (100+ acres) Section 8, T25-S, R35-E, Lea County, Volume 2 – Above-Ground Storage Tank Containments
- Hackberry 16 Recycling Containments and Recycling Facility Section 16, T19S, R31E, Eddy County

Locations of the modular containments range from west of the Pecos River to slightly west of Jal, NM. All locations exhibit different surface and subsurface geology, different topography and are of various sizes and volumes. *However, in regard to structural integrity of the base soils that support the AST and in particular the geomembrane containment system, the specification requirements are the same.* The foundation soils must be roller compacted smooth and free of loose aggregate over ½ inch. Compaction characteristics must meet or exceed 95% of Standard Proctor Density in accordance with ASTM D 698. This specification requirement is specific and causes the general or earthworks contractor to meet this standard regardless of the site- specific geology or topography. Provided that the design drawings and associated specifications call out the minimum requirements for subsoils compaction (i.e., 95% Standard Proctor Density – ASTM D 698), the design engineer or owners representative will carry out soils testing on the foundation materials to provide certainty to the AST containment owner that the earthworks contractor has met these obligations.

Thus, provided that the contractor meets the minimum specified requirements for foundation soils preparation and density, the location, geology or depth to groundwater will make no difference in regard to geomembrane liner equivalency as demonstrated by the AST variances presented in this volume and are considered valid for meeting NMOCD Rule 34 requirements for all locations within the Permian Basin of New Mexico.

If you have any questions on the above technical memorandum or require further information, give me a call at 720-289-0300 or email geosynthetics@msn.com

R.K. FROBEL & ASSOCIATES
Consulting Engineers

Sincerely Yours,

R.K. Frobel

Ronald K. Frobel, MSCE, PE

References:

NMAC 19.15.34.12 DESIGN AND CONSTRUCTION SPECIFICATIONS FOR A
RECYCLING CONTAINMENT

ASTM Standards 2019



RONALD K. FROBEL, MSCE, P.E.

**CIVIL ENGINEERING
GEOSYNTHETICS
EXPERT WITNESS
FORENSICS**

FIRM: R. K. FROBEL & ASSOCIATES
Consulting Civil / Geosynthetics Engineers

TITLE: Principal and Owner

PROFESSIONAL

AFFILIATIONS: American Society for Testing and Materials (ASTM) -
Founding member of Committee D 35 on Geosynthetics
Chairman ASTM D35 Subcommittee on Geomembranes 1985-2000
ASTM Award of Merit Recipient/ASTM Fellow - 1992
ASTM D18 Soil and Rock - Special Service Award - 2000
Transportation Research Board (TRB) of The National Academies
Appointed Member A2K07 Geosynthetics 2000 - 2003
National Society of Professional Engineers (NSPE) - Member
American Society of Civil Engineers (ASCE) - Member
Colorado Section - ASCE - Member
International Society of Soil Mechanics and Foundation Engineers
(ISSMFE) - Member
International Geosynthetics Society (IGS) - Member
North American Geosynthetics Society (NAGS) - Member
International Standards Organization (ISO) - Member TC 221
Team Leader - USA Delegation Geosynthetics 1985 - 2001
European Committee for Standardization (CEN) - USA Observer
EPA Advisory Committee on Geosynthetics (Past Member)
Association of State Dam Safety Officials (ASDSO) – Member
U. S. Committee on Irrigation and Drainage (USCID) - Member
Technical Advisory Committee - Geosynthetics Magazine
Editorial Board - Geotextiles and Geomembranes Journal
Fabricated Geomembrane Institute (FGI) – Board of Directors
Co-Chairman International Conference on Geomembranes
Co-Chairman ASTM Symposium on Impermeable Barriers
U.S. Naval Reserve Officer (Inactive)
Registered Professional Engineer – Civil (Colorado)
Mine Safety Health Administration (MSHA) Certified

ACADEMIC

BACKGROUND: University of Arizona: M.S. - Civil Engineering - 1975
University of Arizona: B. S. - Civil Engineering – 1969
Wentworth Institute of Technology: A.S. Architecture – 1966

RONALD K. FROBEL, MSCE, P.E.

Page 2

PROFESSIONAL

EXPERIENCE:

R. K. Frobel & Associates - Consulting Engineers
Evergreen, Colorado, Principal and Owner, 1988 - Present

Chemie Linz AG and Polyfelt Ges.m.b.H., Linz, Austria
U. S. Technical Manager Geosynthetics, 1985 - 1988

U.S. Bureau of Reclamation, Engineering and Research Center
Denver, Colorado, Technical Specialist in Construction
Materials Research and Application, 1978 - 1985

Water Resources Research Center (WRRC), University of Arizona
Tucson, AZ, Associate Research Engineer, 1975 - 1978

Engineering Experiment Station, University of Arizona
Tucson, AZ, Research Assistant, 1974 - 1975

United States Navy, Commissioned Naval Officer, 1970 - 1973

REPRESENTATIVE

EXPERIENCE:

R.K. Frobel & Associates: Civil engineering firm specializing in the fields of geotechnical, geo-environmental and geosynthetics. Expertise is provided to full service civil/geotechnical engineering firms, federal agencies, municipalities or owners on a direct contract, joint venture or sub-consultant basis. Responsibilities are primarily devoted to specialized technical assistance in design and application for foreign and domestic projects such as the following:

Forensics investigations into geotechnical and geosynthetics failures; providing expert report and testimony on failure analysis; providing design and peer review on landfill lining and cover system design, mine waste reclamation, water treatment facilities, hydro-technical canal, dam, reservoir and mining projects, floating reservoir covers; oil and gas waste containment; design of manufacturers technical literature and manuals; development and presentation of technical seminars; new product development and testing; MQA/CQA program design and implementation.

Polyfelt Ges.m.b.H., Linz, Austria and Denver Colorado: As U.S. technical manager, primary responsibilities included technical development for the Polyfelt line of geosynthetics for the U.S. civil engineering market as well as worldwide applications.

RONALD K. FROBEL, MSCE, P.E.**Page 3**

U.S. Bureau of Reclamation, Denver, Colorado: As technical specialist, responsibilities included directing laboratory research, design and development investigations into geosynthetics and construction materials for use on large western water projects such as dams, canals, power plants and other civil structures. Included were material research, selection and testing, specification writing, large scale pilot test programs, MQA/CQA program design and supervision of site installations. Prime author or contributor to several USBR technical publications incorporating geosynthetics.

University of Arizona, Tucson, Arizona: As research engineer at the Water Resources Research Center, responsibilities included research, design and development of engineering materials and methods for use in construction of major water projects including potable water reservoirs, canals and distribution systems. Prime author or contributor to several WRRC technical publications.

Northeast Utilities, Hartford, Connecticut: As field engineer for construction at Northeast Utilities, responsibilities included liaison for many construction projects including additions to power plants, construction of substations, erection of fuel oil pipelines and fuel oil storage tanks. Responsibilities also included detailed review, inspection and reporting on numerous construction projects.

U.S. Navy: Commissioned Naval Officer – Nuclear Program

PUBLICATIONS: Over 85 published articles, papers and books.

CONTACT DETAILS:

Ronald K. Frobel, MSCE, P.E.
R. K. Frobel & Associates
Consulting Civil/Geosynthetics Engineers
PO Box 2633
Evergreen, Colorado 80439 USA
Phone 720-289-0300
Email: geosynthetics@msn.com

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 178109

CONDITIONS

Operator: Franklin Mountain Energy LLC 44 Cook Street Denver, CO 80206	OGRID: 373910
	Action Number: 178109
	Action Type: [C-147] Water Recycle Long (C-147L)

CONDITIONS

Created By	Condition	Condition Date
vvenegas	NMOCD has reviewed and approved the recycling containment permit application and related documents, submitted by Franklin Mountain Energy LLC [373910] on January 20, 2023, for 1RF-502 - TATANKA NORTH AST CONTAINMENT FACILITY ID [fVV2302436608] in Unit Letter N, Section 35, Township 25S, Range 35E, Lea County, New Mexico. • The requested variance that the 1RF-502 - TATANKA NORTH AST CONTAINMENT FACILITY ID [fVV2302436608], when not in use, be exempt from weekly inspections per 19.15.34.13(A) is denied. • 1RF-502 - TATANKA NORTH AST CONTAINMENT FACILITY ID [fVV2302436608] permit expires on January 20, 2028. If Franklin Mountain Energy LLC [373910] wishes to extend operations past five years, an annual permit extension request must be submitted using an OCD form C-147 through OCD Permitting by December 20, 2027	1/24/2023