

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 293472

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address COG OPERATING LLC 600 W Illinois Ave Midland, TX 79701		2. OGRID Number 229137
		3. API Number 30-015-48098
4. Property Code 330287	5. Property Name KRAKEN STATE COM	6. Well No. 701H

7. Surface Location

UL - Lot P	Section 33	Township 25S	Range 28E	Lot Idn P	Feet From 600	N/S Line S	Feet From 1000	E/W Line E	County Eddy
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	----------------

8. Proposed Bottom Hole Location

UL - Lot P	Section 16	Township 26S	Range 28E	Lot Idn P	Feet From 200	N/S Line S	Feet From 330	E/W Line E	County Eddy
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	------------------	---------------	----------------

9. Pool Information

PURPLE SAGE;WOLFCAMP (GAS)	98220
----------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type GAS	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 2959
16. Multiple N	17. Proposed Depth 25252	18. Formation Wolfcamp	19. Contractor	20. Spud Date 7/1/2021
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	650	500	0
Int1	12.25	9.625	40	9000	1400	0
Prod	8.75	5.5	20	25252	3500	8600

Casing/Cement Program: Additional Comments

--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	5000	5000	Cameron

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.	OIL CONSERVATION DIVISION	
Signature:		
Printed Name: Electronically filed by Robyn Russell	Approved By: Kurt Simmons	
Title: Regulatory Compliance Lead	Title: Petroleum Specialist - A	
Email Address: robyn.m.russell@conocophillips.com	Approved Date: 3/16/2021	Expiration Date: 3/16/2023
Date: 3/15/2021	Phone: 432-685-4385	Conditions of Approval Attached

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number 30-015-		2 Pool Code 98220		3 Pool Name Purple Sage; Wolfcamp (Gas)					
4 Property Code		5 Property Name KRAKEN STATE COM						6 Well Number 701H	
7 OGRID No. 229137		8 Operator Name COG OPERATING LLC						9 Elevation 2959'	
10 Surface Location									
UL or lot no. P	Section 33	Township 25-S	Range 28-E	Lot Idn	Feet from the 600'	North/South line SOUTH	Feet from the 1000'	East/West line EAST	County EDDY
11 Bottom Hole Location If Different From Surface									
UL or lot no. P	Section 16	Township 26-S	Range 28-E	Lot Idn	Feet from the 200'	North/South line SOUTH	Feet from the 330'	East/West line EAST	County EDDY
12 Dedicated Acres 960		13 Joint or Infill		14 Consolidation Code		15 Order No.			

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	CORNER DATA NEW MEXICO EAST - NAD 83 A - FOUND IRON PIPE W/ BRASS CAP N:392529.06' E:613351.46' B - FOUND IRON PIPE W/ BRASS CAP N:392531.80' E:616012.57' C - FOUND IRON PIPE W/ BRASS CAP N:392534.13' E:618672.01' D - CALCULATED CORNER N:389881.51' E:618722.69' E - FOUND IRON ROD NO CAP N:387228.88' E:618773.38' F - CALCULATED CORNER N:387234.29' E:616099.89' G - CALCULATED CORNER N:387239.69' E:613426.41' H - FOUND IRON ROD NO CAP N:389887.40' E:613383.37' I - CALCULATED CORNER N:384578.45' E:618773.81' J - FOUND IRON N:381928.01' E:618774.25' K - CALCULATED CORNER N:381936.14' E:616099.30' L - CALCULATED CORNER N:381944.28' E:613424.35' M - CALCULATED CORNER N:384591.98' E:613425.38' N - FOUND 5/8" IRON ROD W/ ALUM CAP N:379277.91' E:618772.66' O - FOUND IRON PIPE W/ BRASS CAP N:376622.82' E:618799.52' P - CALCULATED CORNER N:376631.44' E:616063.29' Q - FOUND BENT IRON PIPE TAGGED W/ WASHER N:376640.07' E:613327.06' R - FOUND LIMESTONE MARKED 1/4 N:379296.57' E:613303.89'	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>Stan Wagner</i> 3/11/2021 Signature Date Stan Wagner Printed Name E-mail Address
	SURFACE HOLE LOCATION (SHL) NEW MEXICO EAST - NAD 83 X=617676.03 Y=393133.26 LAT.= 32.08056325° N LONG.= 104.08685511° W 600' FSL, 1000' FEL SECTION 33	FIRST TAKE POINT (FTP) NEW MEXICO EAST - NAD 83 X=618342.14 Y=392523.84 LAT.= 32.07888379° N LONG.= 104.08470894° W 10' FNL, 330' FEL SECTION 4
	LAST TAKE POINT (LTP) NEW MEXICO EAST - NAD 83 X=618466.16 Y=376953.87 LAT.= 32.03608187° N LONG.= 104.08442445° W 330' FSL, 330' FEL SECTION 16	BOTTOM HOLE LOCATION (BHL) NEW MEXICO EAST - NAD 83 X=618467.47 Y=376823.87 LAT.= 32.03572449° N LONG.= 104.08442117° W 200' FSL, 330' FEL SECTION 16
	18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey Signature and Seal of Professional Surveyor GARRETT J SMELKER NEW MEXICO 25036 01/28/2021 PROFESSIONAL SURVEYOR Certificate Number	

Intent ☒ As Drilled ☐

API # 30-015-		
Operator Name: COG Operating LLC	Property Name: Kraken State Com	Well Number 701H

Kick Off Point (KOP)

UL P	Section 33	Township 25S	Range 28E	Lot	Feet	From N/S	Feet	From E/W	County Eddy
Latitude					Longitude				NAD 83

First Take Point (FTP)

UL A	Section 4	Township 26S	Range 28E	Lot	Feet 10	From N/S North	Feet 330	From E/W East	County Lea
Latitude 32.07888379					Longitude -104.08470894				NAD 83

Last Take Point (LTP)

UL P	Section 16	Township 26S	Range 28E	Lot	Feet 330	From N/S South	Feet 330	From E/W East	County Lea
Latitude 32.03608187					Longitude -104.08442445				NAD 83

Is this well the defining well for the Horizontal Spacing Unit?

☐ Yes

Is this well an infill well?

☐ No

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API # 30-015-		
Operator Name: COG Operating LLC	Property Name: Kraken State Com	Well Number 701H

KZ 06/29/2018

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

GAS CAPTURE PLAN

Date: 3/16/2021

☒ Original

Operator & OGRID No.: [229137] COG OPERATING LLC

☐ Amended - Reason for
Amendment: _____

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomple to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location (ULSTR)	Footages	Expected MCF/D	Flared or Vented	Comments
KRAKEN STATE COM #701H	30-015-48098	P-33-25S-28E	0600S 1000E	4650	None	Red Bluff Plant Sec 35-BLK 57 T2, Culberson TX

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. The gas produced from production facility is dedicated to ETC Texas Pipeline, Ltd. and will be connected to ETC Texas Pipeline, Ltd. Low Pressure gathering system located in Eddy County, New Mexico. It will require 0' of pipeline to connect the facility to Low Pressure gathering system. COG OPERATING LLC provides (periodically) to ETC Texas Pipeline, Ltd. a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, COG OPERATING LLC and ETC Texas Pipeline, Ltd. have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at ETC Texas Pipeline, Ltd. Processing Plant located in Sec. 33, Twn. 25S, Rng. 28E, Eddy County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on ETC Texas Pipeline, Ltd. system at that time. Based on current information, it is COG OPERATING LLC's belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Comments

Permit 293472

PERMIT COMMENTS

Operator Name and Address: COG OPERATING LLC [229137] 600 W Illinois Ave Midland, TX 79701		API Number: 30-015-48098
		Well: KRAKEN STATE COM #701H
Created By	Comment	Comment Date

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 293472

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: COG OPERATING LLC [229137] 600 W Illinois Ave Midland, TX 79701	API Number: 30-015-48098
	Well: KRAKEN STATE COM #701H

OCD Reviewer	Condition
ksimmons	Notify OCD 24 hours prior to casing & cement
ksimmons	Will require a File As Drilled C-102 and a Directional Survey with the C-104
ksimmons	Cement is required to circulate on both surface and intermediate1 strings of casing
kpickford	Surface casing must be set 25' below top of Rustler Anhydrite or salt in order to seal off protectable water
kpickford	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud
kpickford	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud 2)- Drilling Sundries Form C-103 (Casing and Cement test are to be submitted within 10 days 3)- Completion Reports & Logs are to be submitted within 45 days 4)- Deviation / Directional Drill Survey are to be filed with or prior to C-104
kpickford	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
kpickford	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
kpickford	Will require a administrative order for non-standard location prior to placing the well on production

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Reference	PWP1
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria
Interpolation Method:	Stations
Depth Range:	Unlimited
Results Limited by:	Maximum ellipse separation of 2,000.0 usft
Warning Levels Evaluated at:	2.00 Sigma
Error Model:	ISCWSA
Scan Method:	Closest Approach 3D
Error Surface:	Pedal Curve
Casing Method:	Not applied

Survey Tool Program		Date	2/25/2021		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.0	9,090.0	PWP1 (OWB)	Standard Keeper 104	Standard Wireline Keeper ver 1.0.4	
9,090.0	25,252.0	PWP1 (OWB)	MWD+IFR1+FDIR	OWSG MWD + IFR1 + FDIR Correction	

Summary						
Site Name Offset Well - Wellbore - Design	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Between Ellipses (usft)	Separation Factor	Warning
KRAKEN ST COM PROJECT						
KRAKEN ST COM #702H - OWB - PWP1	2,500.0	2,500.0	30.0	23.1	4.349	CC, ES
KRAKEN ST COM #702H - OWB - PWP1	25,252.0	25,284.9	888.0	612.5	3.222	SF
KRAKEN ST COM #703H - OWB - PWP1	2,500.0	2,500.0	60.0	47.3	4.728	CC, ES, SF
MYOX 28 STATE PROJECT (ATLAS 2528)						
MYOX 28 ST COM #701H - OWB - AWP	9,300.0	19,592.0	216.6	123.7	2.331	SF
MYOX 28 ST COM #701H - OWB - AWP	9,325.0	19,592.0	210.4	120.3	2.334	ES
MYOX 28 ST COM #701H - OWB - AWP	9,358.4	19,592.0	207.3	121.8	2.423	CC
MYOX 28 ST COM #702H - OWB - AWP	9,275.0	19,507.0	751.4	654.1	7.721	SF
MYOX 28 ST COM #702H - OWB - AWP	9,307.2	19,507.0	750.2	653.0	7.725	CC, ES
SRO STATE PROJECT (ATLAS 2628)						
SRO STATE COM #30H - OWB - ACTUAL WELLPATH	8,118.9	17,905.0	529.0	474.5	9.710	CC, ES
SRO STATE COM #30H - OWB - ACTUAL WELLPATH	8,400.0	17,905.0	599.0	530.3	8.711	SF
SRO STATE UNIT #1H - OWB - ACTUAL WELLPATH	7,199.6	11,237.7	848.0	676.5	4.945	CC, ES, SF

KRAKEN ST COM PROJECT - KRAKEN ST COM #702H - OWB - PWP1													Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 8721-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis			Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
0.0	0.0	0.0	0.0	3.0	3.0	-90.13	-0.1	-30.0	30.0					
100.0	100.0	100.0	100.0	3.0	3.0	-90.13	-0.1	-30.0	30.0	24.0	6.00	5.000		
200.0	200.0	200.0	200.0	3.0	3.0	-90.13	-0.1	-30.0	30.0	24.0	6.00	4.997		
300.0	300.0	300.0	300.0	3.0	3.0	-90.13	-0.1	-30.0	30.0	24.0	6.01	4.992		
400.0	400.0	400.0	400.0	3.0	3.0	-90.13	-0.1	-30.0	30.0	24.0	6.02	4.985		
500.0	500.0	500.0	500.0	3.1	3.1	-90.13	-0.1	-30.0	30.0	24.0	6.03	4.974		
600.0	600.0	600.0	600.0	3.1	3.1	-90.13	-0.1	-30.0	30.0	24.0	6.05	4.961		
700.0	700.0	700.0	700.0	3.1	3.1	-90.13	-0.1	-30.0	30.0	23.9	6.07	4.946		
800.0	800.0	800.0	800.0	3.2	3.2	-90.13	-0.1	-30.0	30.0	23.9	6.09	4.928		
900.0	900.0	900.0	900.0	3.2	3.2	-90.13	-0.1	-30.0	30.0	23.9	6.11	4.908		
1,000.0	1,000.0	1,000.0	1,000.0	3.2	3.2	-90.13	-0.1	-30.0	30.0	23.9	6.14	4.885		
1,100.0	1,100.0	1,100.0	1,100.0	3.3	3.3	-90.13	-0.1	-30.0	30.0	23.8	6.17	4.860		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design													Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 8721-MWD+IFR1+FDIR													Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
1,200.0	1,200.0	1,200.0	1,200.0	3.4	3.4	-90.13	-0.1	-30.0	30.0	23.8	6.21	4.834		
1,300.0	1,300.0	1,300.0	1,300.0	3.4	3.4	-90.13	-0.1	-30.0	30.0	23.8	6.24	4.805		
1,400.0	1,400.0	1,400.0	1,400.0	3.5	3.5	-90.13	-0.1	-30.0	30.0	23.7	6.28	4.774		
1,500.0	1,500.0	1,500.0	1,500.0	3.5	3.5	-90.13	-0.1	-30.0	30.0	23.7	6.33	4.742		
1,600.0	1,600.0	1,600.0	1,600.0	3.6	3.6	-90.13	-0.1	-30.0	30.0	23.6	6.37	4.708		
1,700.0	1,700.0	1,700.0	1,700.0	3.7	3.7	-90.13	-0.1	-30.0	30.0	23.6	6.42	4.672		
1,800.0	1,800.0	1,800.0	1,800.0	3.8	3.8	-90.13	-0.1	-30.0	30.0	23.5	6.47	4.635		
1,900.0	1,900.0	1,900.0	1,900.0	3.9	3.9	-90.13	-0.1	-30.0	30.0	23.5	6.53	4.597		
2,000.0	2,000.0	2,000.0	2,000.0	3.9	3.9	-90.13	-0.1	-30.0	30.0	23.4	6.58	4.558		
2,100.0	2,100.0	2,100.0	2,100.0	4.0	4.0	-90.13	-0.1	-30.0	30.0	23.4	6.64	4.518		
2,200.0	2,200.0	2,200.0	2,200.0	4.1	4.1	-90.13	-0.1	-30.0	30.0	23.3	6.70	4.477		
2,300.0	2,300.0	2,300.0	2,300.0	4.2	4.2	-90.13	-0.1	-30.0	30.0	23.2	6.76	4.435		
2,400.0	2,400.0	2,400.0	2,400.0	4.3	4.3	-90.13	-0.1	-30.0	30.0	23.2	6.83	4.392		
2,500.0	2,500.0	2,500.0	2,500.0	4.4	4.4	-90.13	-0.1	-30.0	30.0	23.1	6.90	4.349 CC, ES		
2,600.0	2,600.0	2,600.0	2,600.0	4.4	4.5	132.31	-0.1	-30.0	31.1	24.2	6.97	4.468		
2,700.0	2,699.8	2,699.8	2,699.8	4.4	4.6	138.63	-0.1	-30.0	34.9	27.8	7.08	4.927		
2,750.0	2,749.7	2,749.7	2,749.7	4.4	4.6	142.51	-0.1	-30.0	37.9	30.8	7.16	5.294		
2,800.0	2,799.5	2,799.5	2,799.5	4.4	4.7	146.17	-0.1	-30.0	41.5	34.2	7.26	5.713		
2,900.0	2,899.1	2,899.1	2,899.1	4.4	4.8	151.85	-0.1	-30.0	49.0	41.5	7.45	6.572		
3,000.0	2,998.7	2,998.7	2,998.7	4.4	4.9	156.00	-0.1	-30.0	56.8	49.2	7.63	7.446		
3,100.0	3,098.4	3,098.4	3,098.4	4.4	5.0	159.13	-0.1	-30.0	64.9	57.1	7.79	8.324		
3,200.0	3,198.0	3,198.0	3,198.0	4.4	5.1	161.57	-0.1	-30.0	73.1	65.1	7.95	9.197		
3,300.0	3,297.6	3,297.6	3,297.6	4.4	5.2	163.51	-0.1	-30.0	81.4	73.3	8.09	10.059		
3,400.0	3,397.2	3,397.2	3,397.2	4.4	5.3	165.09	-0.1	-30.0	89.8	81.6	8.23	10.906		
3,500.0	3,496.8	3,496.8	3,496.8	4.4	5.4	166.39	-0.1	-30.0	98.2	89.9	8.37	11.735		
3,600.0	3,596.4	3,596.4	3,596.4	4.4	5.5	167.49	-0.1	-30.0	106.7	98.2	8.51	12.545		
3,700.0	3,696.1	3,696.1	3,696.1	4.4	5.7	168.43	-0.1	-30.0	115.3	106.6	8.64	13.332		
3,800.0	3,795.7	3,795.7	3,795.7	4.5	5.8	169.24	-0.1	-30.0	123.8	115.0	8.78	14.097		
3,900.0	3,895.3	3,895.3	3,895.3	4.5	5.9	169.95	-0.1	-30.0	132.4	123.5	8.92	14.838		
4,000.0	3,994.9	3,994.9	3,994.9	4.5	6.0	170.56	-0.1	-30.0	141.0	131.9	9.06	15.555		
4,100.0	4,094.5	4,094.5	4,094.5	4.6	6.1	171.11	-0.1	-30.0	149.6	140.4	9.21	16.248		
4,200.0	4,194.2	4,194.2	4,194.2	4.6	6.2	171.60	-0.1	-30.0	158.2	148.8	9.35	16.917		
4,300.0	4,293.8	4,293.8	4,293.8	4.6	6.3	172.04	-0.1	-30.0	166.8	157.3	9.50	17.562		
4,400.0	4,393.4	4,393.4	4,393.4	4.7	6.5	172.43	-0.1	-30.0	175.5	165.8	9.65	18.182		
4,500.0	4,493.0	4,493.0	4,493.0	4.7	6.6	172.79	-0.1	-30.0	184.1	174.3	9.80	18.779		
4,600.0	4,592.6	4,592.6	4,592.6	4.8	6.7	173.11	-0.1	-30.0	192.7	182.8	9.96	19.354		
4,700.0	4,692.3	4,692.3	4,692.3	4.9	6.8	173.41	-0.1	-30.0	201.4	191.3	10.12	19.905		
4,800.0	4,791.9	4,791.9	4,791.9	4.9	6.9	173.68	-0.1	-30.0	210.1	199.8	10.28	20.435		
4,900.0	4,891.5	4,891.5	4,891.5	5.0	7.0	173.93	-0.1	-30.0	218.7	208.3	10.44	20.943		
5,000.0	4,991.1	4,991.1	4,991.1	5.1	7.2	174.17	-0.1	-30.0	227.4	216.8	10.61	21.430		
5,100.0	5,090.7	5,090.7	5,090.7	5.1	7.3	174.38	-0.1	-30.0	236.1	225.3	10.78	21.898		
5,200.0	5,190.4	5,190.4	5,190.4	5.2	7.4	174.58	-0.1	-30.0	244.7	233.8	10.95	22.346		
5,300.0	5,290.0	5,290.0	5,290.0	5.3	7.5	174.77	-0.1	-30.0	253.4	242.3	11.13	22.776		
5,400.0	5,389.6	5,389.6	5,389.6	5.4	7.6	174.94	-0.1	-30.0	262.1	250.8	11.30	23.188		
5,500.0	5,489.2	5,489.2	5,489.2	5.4	7.8	175.10	-0.1	-30.0	270.8	259.3	11.48	23.583		
5,600.0	5,588.8	5,593.1	5,593.1	5.5	7.8	174.99	-1.5	-30.4	278.8	267.2	11.61	24.014		
5,700.0	5,688.5	5,697.6	5,697.4	5.6	7.8	174.20	-6.6	-32.0	285.1	273.5	11.67	24.434		
5,800.0	5,788.1	5,801.1	5,800.5	5.7	7.7	172.81	-15.1	-34.7	290.0	278.2	11.71	24.754		
5,900.0	5,887.7	5,900.7	5,899.6	5.8	7.7	171.29	-24.5	-37.6	294.4	282.7	11.76	25.031		
6,000.0	5,987.3	6,000.3	5,998.8	5.8	7.6	169.82	-33.9	-40.5	299.1	287.3	11.82	25.301		
6,100.0	6,086.9	6,099.9	6,097.9	5.9	7.6	168.39	-43.3	-43.4	303.9	292.1	11.89	25.562		
6,200.0	6,186.6	6,199.5	6,197.0	6.0	7.6	167.01	-52.8	-46.3	309.0	297.0	11.97	25.815		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 8721-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
6,300.0	6,286.2	6,299.1	6,296.1	6.1	7.5	165.67	-62.2	-49.2	314.2	302.1	12.06	26.059	
6,400.0	6,385.8	6,398.7	6,395.2	6.2	7.5	164.38	-71.6	-52.1	319.6	307.4	12.15	26.295	
6,500.0	6,485.4	6,498.3	6,494.3	6.3	7.5	163.13	-81.0	-55.0	325.1	312.9	12.26	26.523	
6,600.0	6,585.0	6,597.9	6,593.4	6.4	7.5	161.93	-90.4	-57.9	330.8	318.4	12.37	26.744	
6,700.0	6,684.7	6,697.5	6,692.5	6.5	7.4	160.76	-99.8	-60.8	336.6	324.1	12.49	26.957	
6,800.0	6,784.3	6,797.1	6,791.6	6.6	7.4	159.64	-109.2	-63.7	342.6	330.0	12.61	27.162	
6,900.0	6,883.9	6,896.7	6,890.7	6.7	7.4	158.55	-118.6	-66.6	348.7	335.9	12.74	27.361	
7,000.0	6,983.5	6,996.3	6,989.9	6.8	7.4	157.50	-128.0	-69.5	354.9	342.0	12.88	27.554	
7,100.0	7,083.1	7,095.9	7,089.0	6.9	7.4	156.49	-137.4	-72.4	361.2	348.2	13.02	27.740	
7,200.0	7,182.7	7,195.5	7,188.1	7.0	7.4	155.51	-146.8	-75.3	367.7	354.5	13.17	27.920	
7,300.0	7,282.4	7,295.1	7,287.2	7.1	7.4	154.56	-156.2	-78.2	374.2	360.9	13.32	28.095	
7,400.0	7,382.0	7,394.7	7,386.3	7.2	7.4	153.65	-165.7	-81.2	380.8	367.4	13.47	28.265	
7,500.0	7,481.6	7,494.3	7,485.4	7.3	7.4	152.77	-175.1	-84.1	387.6	373.9	13.63	28.430	
7,600.0	7,581.2	7,593.9	7,584.5	7.4	7.4	151.92	-184.5	-87.0	394.4	380.6	13.79	28.590	
7,700.0	7,680.8	7,693.5	7,683.6	7.5	7.4	151.10	-193.9	-89.9	401.3	387.3	13.96	28.746	
7,800.0	7,780.5	7,793.1	7,782.7	7.6	7.4	150.31	-203.3	-92.8	408.3	394.2	14.13	28.897	
7,900.0	7,880.1	7,892.7	7,881.9	7.7	7.4	149.54	-212.7	-95.7	415.3	401.0	14.30	29.045	
8,000.0	7,979.7	7,992.2	7,981.0	7.8	7.4	148.80	-222.1	-98.6	422.5	408.0	14.47	29.188	
8,100.0	8,079.3	8,091.8	8,080.1	7.9	7.4	148.08	-231.5	-101.5	429.7	415.0	14.65	29.328	
8,200.0	8,178.9	8,191.4	8,179.2	8.0	7.4	147.39	-240.9	-104.4	436.9	422.1	14.83	29.464	
8,300.0	8,278.6	8,291.0	8,278.3	8.1	7.4	146.72	-250.3	-107.3	444.3	429.2	15.01	29.597	
8,400.0	8,378.2	8,390.6	8,377.4	8.3	7.5	146.07	-259.7	-110.2	451.6	436.4	15.19	29.726	
8,500.0	8,477.8	8,490.2	8,476.5	8.4	7.5	145.44	-269.1	-113.1	459.1	443.7	15.38	29.852	
8,600.0	8,577.4	8,589.8	8,575.6	8.5	7.5	144.84	-278.6	-116.0	466.6	451.0	15.57	29.974	
8,700.0	8,677.0	8,689.4	8,674.7	8.6	7.5	144.25	-288.0	-118.9	474.1	458.4	15.75	30.093	
8,800.0	8,776.7	8,789.0	8,773.8	8.7	7.6	143.68	-297.4	-121.8	481.7	465.8	15.91	30.274	
8,900.0	8,876.3	8,888.6	8,873.0	8.8	7.7	143.13	-306.8	-124.8	489.3	473.3	16.04	30.499	
9,000.0	8,975.9	8,988.2	8,972.1	8.9	7.7	142.59	-316.2	-127.7	497.0	480.8	16.19	30.697	
9,090.0	9,065.6	9,079.0	9,062.4	9.0	7.8	142.11	-324.9	-130.3	504.0	487.6	16.31	30.892	
9,100.0	9,075.5	9,090.1	9,073.4	9.0	7.8	137.95	-326.3	-130.7	504.8	488.4	16.32	30.932	
9,125.0	9,100.3	9,117.7	9,100.6	9.0	7.8	131.94	-330.9	-131.7	507.1	490.8	16.33	31.050	
9,150.0	9,124.9	9,145.2	9,127.3	9.0	7.8	128.54	-337.1	-132.9	510.0	493.7	16.35	31.191	
9,175.0	9,149.2	9,172.3	9,153.4	9.0	7.9	126.18	-344.6	-134.3	513.4	497.1	16.38	31.354	
9,200.0	9,173.1	9,199.3	9,178.7	9.0	7.9	124.30	-353.6	-135.8	517.4	501.0	16.40	31.540	
9,225.0	9,196.7	9,226.0	9,203.3	9.1	7.9	122.67	-363.8	-137.4	521.9	505.4	16.44	31.748	
9,250.0	9,219.8	9,252.3	9,227.0	9.1	8.0	121.16	-375.3	-139.1	526.9	510.4	16.48	31.977	
9,275.0	9,242.4	9,278.4	9,249.8	9.1	8.0	119.72	-387.9	-141.0	532.3	515.8	16.52	32.225	
9,300.0	9,264.4	9,304.2	9,271.5	9.1	8.1	118.31	-401.5	-143.0	538.3	521.8	16.57	32.491	
9,325.0	9,285.7	9,329.7	9,292.3	9.1	8.1	116.90	-416.1	-145.0	544.8	528.2	16.62	32.772	
9,350.0	9,306.3	9,354.8	9,312.0	9.1	8.2	115.48	-431.6	-147.2	551.7	535.0	16.68	33.066	
9,375.0	9,326.2	9,379.7	9,330.6	9.2	8.2	114.05	-447.9	-149.4	559.1	542.3	16.75	33.371	
9,400.0	9,345.2	9,404.2	9,348.2	9.2	8.3	112.60	-465.0	-151.7	566.9	550.0	16.83	33.684	
9,425.0	9,363.4	9,428.5	9,364.6	9.2	8.3	111.12	-482.7	-154.0	575.1	558.1	16.91	34.001	
9,450.0	9,380.6	9,452.5	9,380.0	9.3	8.4	109.63	-501.0	-156.4	583.6	566.6	17.00	34.322	
9,475.0	9,396.9	9,476.3	9,394.2	9.3	8.4	108.12	-519.8	-158.8	592.5	575.4	17.10	34.643	
9,500.0	9,412.2	9,499.7	9,407.4	9.4	8.5	106.59	-539.1	-161.3	601.8	584.6	17.21	34.962	
9,525.0	9,426.4	9,523.0	9,419.4	9.4	8.5	105.04	-558.8	-163.8	611.3	594.0	17.33	35.278	
9,550.0	9,439.5	9,546.1	9,430.4	9.5	8.6	103.48	-578.9	-166.3	621.2	603.7	17.45	35.588	
9,575.0	9,451.4	9,568.9	9,440.4	9.5	8.6	101.91	-599.3	-168.8	631.2	613.6	17.59	35.892	
9,600.0	9,462.3	9,591.6	9,449.2	9.6	8.7	100.34	-620.1	-171.3	641.5	623.8	17.73	36.189	
9,625.0	9,471.9	9,614.2	9,457.0	9.6	8.7	98.78	-641.1	-173.9	651.9	634.1	17.87	36.478	
9,650.0	9,480.3	9,636.6	9,463.8	9.7	8.7	97.21	-662.3	-176.5	662.5	644.5	18.02	36.759	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 8721-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Tooface (")	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
9,675.0	9,487.4	9,658.9	9,469.6	9.7	8.8	95.66	-683.7	-179.0	673.2	655.1	18.18	37.030	
9,700.0	9,493.3	9,681.1	9,474.3	9.8	8.8	94.12	-705.3	-181.6	684.1	665.7	18.34	37.291	
9,725.0	9,497.9	9,703.3	9,478.0	9.9	8.9	92.60	-727.0	-184.2	694.9	676.4	18.51	37.542	
9,750.0	9,501.2	9,725.5	9,480.6	10.0	8.9	91.11	-748.8	-186.7	705.8	687.1	18.68	37.783	
9,775.0	9,503.3	9,747.6	9,482.3	10.0	9.0	89.65	-770.8	-189.3	716.7	697.9	18.85	38.013	
9,802.4	9,504.0	9,771.9	9,482.9	10.1	9.0	88.09	-794.8	-192.0	728.6	709.5	19.05	38.252	
9,900.0	9,503.7	9,892.8	9,482.7	10.5	9.5	88.26	-915.2	-203.3	767.5	747.6	19.97	38.432	
10,000.0	9,503.4	10,022.9	9,482.6	11.0	10.2	88.40	-1,045.2	-209.8	800.1	779.0	21.10	37.915	
10,100.0	9,503.2	10,158.1	9,482.4	11.5	11.0	88.49	-1,180.4	-210.2	824.9	802.5	22.39	36.849	
10,200.0	9,502.9	10,255.1	9,482.3	12.1	11.6	88.55	-1,277.3	-208.4	844.2	820.6	23.55	35.849	
10,300.0	9,502.7	10,353.8	9,482.2	12.7	12.2	88.60	-1,376.0	-206.5	860.0	835.2	24.78	34.701	
10,400.0	9,502.4	10,453.0	9,482.1	13.3	12.9	88.64	-1,475.3	-204.7	872.3	846.2	26.07	33.457	
10,500.0	9,502.1	10,552.6	9,482.0	14.0	13.6	88.68	-1,574.8	-202.8	881.2	853.8	27.41	32.150	
10,600.0	9,501.9	10,652.5	9,481.9	14.6	14.3	88.70	-1,674.7	-200.9	886.6	857.8	28.78	30.802	
10,705.0	9,501.6	10,757.5	9,481.7	15.3	15.1	88.72	-1,779.6	-198.9	888.5	858.2	30.26	29.362	
10,800.0	9,501.3	10,852.5	9,481.6	16.0	15.8	88.73	-1,874.6	-197.1	888.5	856.9	31.62	28.098	
10,900.0	9,501.1	10,952.5	9,481.5	16.7	16.5	88.74	-1,974.6	-195.3	888.5	855.4	33.08	26.857	
11,000.0	9,500.8	11,052.5	9,481.4	17.4	17.3	88.75	-2,074.6	-193.4	888.5	853.9	34.57	25.703	
11,100.0	9,500.5	11,152.5	9,481.3	18.1	18.1	88.76	-2,174.6	-191.5	888.5	852.4	36.07	24.630	
11,200.0	9,500.3	11,252.5	9,481.2	18.9	18.9	88.77	-2,274.5	-189.6	888.4	850.9	37.60	23.631	
11,300.0	9,500.0	11,352.5	9,481.1	19.6	19.7	88.78	-2,374.5	-187.7	888.4	849.3	39.14	22.700	
11,400.0	9,499.8	11,452.5	9,480.9	20.4	20.5	88.79	-2,474.5	-185.8	888.4	847.7	40.69	21.832	
11,500.0	9,499.5	11,552.5	9,480.8	21.1	21.3	88.80	-2,574.5	-183.9	888.4	846.2	42.26	21.021	
11,600.0	9,499.2	11,652.5	9,480.7	21.9	22.1	88.81	-2,674.5	-182.0	888.4	844.6	43.84	20.263	
11,700.0	9,499.0	11,752.5	9,480.6	22.7	22.9	88.82	-2,774.5	-180.2	888.4	843.0	45.43	19.554	
11,800.0	9,498.7	11,852.5	9,480.5	23.5	23.7	88.83	-2,874.4	-178.3	888.4	841.4	47.03	18.888	
11,900.0	9,498.4	11,952.5	9,480.4	24.2	24.5	88.83	-2,974.4	-176.4	888.4	839.7	48.64	18.264	
12,000.0	9,498.2	12,052.5	9,480.3	25.0	25.3	88.84	-3,074.4	-174.5	888.4	838.1	50.26	17.676	
12,100.0	9,497.9	12,152.5	9,480.1	25.8	26.2	88.85	-3,174.4	-172.6	888.4	836.5	51.88	17.123	
12,200.0	9,497.7	12,252.5	9,480.0	26.6	27.0	88.86	-3,274.4	-170.7	888.4	834.8	53.51	16.601	
12,300.0	9,497.4	12,352.5	9,479.9	27.4	27.8	88.87	-3,374.3	-168.8	888.3	833.2	55.15	16.109	
12,400.0	9,497.1	12,452.5	9,479.8	28.2	28.6	88.88	-3,474.3	-167.0	888.3	831.5	56.79	15.644	
12,500.0	9,496.9	12,552.5	9,479.7	29.1	29.5	88.89	-3,574.3	-165.1	888.3	829.9	58.43	15.203	
12,600.0	9,496.6	12,652.5	9,479.6	29.9	30.3	88.90	-3,674.3	-163.2	888.3	828.2	60.08	14.785	
12,700.0	9,496.3	12,752.5	9,479.4	30.7	31.1	88.91	-3,774.3	-161.3	888.3	826.6	61.73	14.389	
12,800.0	9,496.1	12,852.5	9,479.3	31.5	32.0	88.92	-3,874.3	-159.4	888.3	824.9	63.39	14.013	
12,900.0	9,495.8	12,952.5	9,479.2	32.3	32.8	88.93	-3,974.2	-157.5	888.3	823.2	65.05	13.655	
13,000.0	9,495.5	13,052.5	9,479.1	33.2	33.7	88.94	-4,074.2	-155.6	888.3	821.6	66.72	13.314	
13,100.0	9,495.3	13,152.5	9,479.0	34.0	34.5	88.95	-4,174.2	-153.8	888.3	819.9	68.38	12.990	
13,200.0	9,495.0	13,252.5	9,478.9	34.8	35.3	88.96	-4,274.2	-151.9	888.3	818.2	70.05	12.680	
13,300.0	9,494.8	13,352.5	9,478.8	35.6	36.2	88.97	-4,374.2	-150.0	888.3	816.5	71.72	12.384	
13,400.0	9,494.5	13,452.5	9,478.6	36.5	37.0	88.98	-4,474.1	-148.1	888.2	814.8	73.40	12.102	
13,500.0	9,494.2	13,552.5	9,478.5	37.3	37.9	88.99	-4,574.1	-146.2	888.2	813.2	75.08	11.831	
13,600.0	9,494.0	13,652.5	9,478.4	38.1	38.7	89.00	-4,674.1	-144.3	888.2	811.5	76.75	11.572	
13,700.0	9,493.7	13,752.5	9,478.3	39.0	39.6	89.01	-4,774.1	-142.4	888.2	809.8	78.44	11.324	
13,800.0	9,493.4	13,852.5	9,478.2	39.8	40.4	89.02	-4,874.1	-140.5	888.2	808.1	80.12	11.086	
13,900.0	9,493.2	13,952.5	9,478.1	40.6	41.2	89.02	-4,974.1	-138.7	888.2	806.4	81.80	10.858	
14,000.0	9,492.9	14,052.5	9,478.0	41.5	42.1	89.03	-5,074.0	-136.8	888.2	804.7	83.49	10.638	
14,100.0	9,492.7	14,152.5	9,477.8	42.3	42.9	89.04	-5,174.0	-134.9	888.2	803.0	85.18	10.428	
14,200.0	9,492.4	14,252.5	9,477.7	43.1	43.8	89.05	-5,274.0	-133.0	888.2	801.3	86.86	10.225	
14,300.0	9,492.1	14,352.5	9,477.6	44.0	44.6	89.06	-5,374.0	-131.1	888.2	799.6	88.55	10.029	
14,400.0	9,491.9	14,452.5	9,477.5	44.8	45.5	89.07	-5,474.0	-129.2	888.1	797.9	90.25	9.841	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 8721-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Tooface (")	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
14,500.0	9,491.6	14,552.5	9,477.4	45.7	46.3	89.08	-5,573.9	-127.3	888.1	796.2	91.94	9.660	
14,600.0	9,491.3	14,652.5	9,477.3	46.5	47.2	89.09	-5,673.9	-125.5	888.1	794.5	93.63	9.485	
14,700.0	9,491.1	14,752.5	9,477.1	47.4	48.0	89.10	-5,773.9	-123.6	888.1	792.8	95.33	9.317	
14,800.0	9,490.8	14,852.5	9,477.0	48.2	48.9	89.11	-5,873.9	-121.7	888.1	791.1	97.02	9.154	
14,827.1	9,490.8	14,879.6	9,477.0	48.4	49.1	89.11	-5,901.0	-121.2	888.1	790.6	97.48	9.111	
14,846.3	9,490.7	14,894.3	9,477.0	48.6	49.2	89.11	-5,915.7	-120.9	888.2	790.4	97.76	9.085	
14,900.0	9,490.6	14,935.6	9,476.9	49.0	49.6	89.12	-5,957.0	-120.7	888.3	789.8	98.53	9.016	
15,000.0	9,490.3	15,035.7	9,476.8	49.9	50.4	89.13	-6,057.1	-120.7	888.3	788.1	100.22	8.863	
15,100.0	9,490.0	15,135.7	9,476.7	50.7	51.3	89.14	-6,157.1	-120.7	888.3	786.4	101.92	8.716	
15,200.0	9,489.8	15,235.7	9,476.5	51.6	52.2	89.15	-6,257.1	-120.7	888.3	784.7	103.61	8.574	
15,300.0	9,489.5	15,335.7	9,476.4	52.4	53.0	89.15	-6,357.1	-120.7	888.4	783.0	105.31	8.436	
15,400.0	9,489.3	15,435.7	9,476.3	53.3	53.9	89.16	-6,457.1	-120.7	888.4	781.4	107.00	8.302	
15,500.0	9,489.0	15,535.7	9,476.2	54.1	54.7	89.17	-6,557.1	-120.7	888.4	779.7	108.70	8.173	
15,600.0	9,488.8	15,635.7	9,476.0	54.9	55.6	89.18	-6,657.1	-120.7	888.4	778.0	110.40	8.047	
15,700.0	9,488.5	15,735.7	9,475.9	55.8	56.4	89.19	-6,757.1	-120.7	888.4	776.3	112.10	7.925	
15,800.0	9,488.3	15,835.7	9,475.8	56.6	57.3	89.20	-6,857.1	-120.7	888.4	774.6	113.80	7.807	
15,900.0	9,488.0	15,935.7	9,475.6	57.5	58.1	89.20	-6,957.1	-120.7	888.4	772.9	115.50	7.692	
16,000.0	9,487.7	16,035.7	9,475.5	58.3	59.0	89.21	-7,057.1	-120.7	888.4	771.2	117.20	7.581	
16,100.0	9,487.5	16,135.7	9,475.4	59.2	59.8	89.22	-7,157.1	-120.7	888.5	769.6	118.90	7.472	
16,200.0	9,487.2	16,235.7	9,475.3	60.0	60.7	89.23	-7,257.1	-120.7	888.5	767.9	120.60	7.367	
16,300.0	9,487.0	16,335.7	9,475.1	60.9	61.5	89.24	-7,357.1	-120.8	888.5	766.2	122.30	7.265	
16,400.0	9,486.7	16,435.7	9,475.0	61.7	62.4	89.25	-7,457.1	-120.8	888.5	764.5	124.01	7.165	
16,500.0	9,486.5	16,535.7	9,474.9	62.6	63.2	89.25	-7,557.1	-120.8	888.5	762.8	125.71	7.068	
16,600.0	9,486.2	16,635.7	9,474.7	63.4	64.1	89.26	-7,657.1	-120.8	888.5	761.1	127.41	6.974	
16,700.0	9,485.9	16,735.7	9,474.6	64.3	64.9	89.27	-7,757.1	-120.8	888.5	759.4	129.12	6.882	
16,800.0	9,485.7	16,835.7	9,474.5	65.1	65.8	89.28	-7,857.1	-120.8	888.5	757.7	130.82	6.792	
16,900.0	9,485.4	16,935.7	9,474.4	66.0	66.7	89.29	-7,957.1	-120.8	888.6	756.0	132.53	6.705	
17,000.0	9,485.2	17,035.7	9,474.2	66.8	67.5	89.29	-8,057.1	-120.8	888.6	754.3	134.23	6.620	
17,100.0	9,484.9	17,135.7	9,474.1	67.7	68.4	89.30	-8,157.1	-120.8	888.6	752.6	135.94	6.537	
17,200.0	9,484.7	17,235.7	9,474.0	68.5	69.2	89.31	-8,257.1	-120.8	888.6	750.9	137.64	6.456	
17,300.0	9,484.4	17,335.7	9,473.9	69.4	70.1	89.32	-8,357.1	-120.8	888.6	749.3	139.35	6.377	
17,400.0	9,484.1	17,435.7	9,473.7	70.2	70.9	89.33	-8,457.1	-120.8	888.6	747.6	141.05	6.300	
17,500.0	9,483.9	17,535.7	9,473.6	71.1	71.8	89.34	-8,557.1	-120.8	888.6	745.9	142.76	6.225	
17,600.0	9,483.6	17,635.7	9,473.5	71.9	72.6	89.34	-8,657.1	-120.8	888.6	744.2	144.47	6.151	
17,700.0	9,483.4	17,735.7	9,473.3	72.8	73.5	89.35	-8,757.1	-120.8	888.7	742.5	146.18	6.079	
17,800.0	9,483.1	17,835.7	9,473.2	73.6	74.4	89.36	-8,857.1	-120.8	888.7	740.8	147.88	6.009	
17,900.0	9,482.9	17,935.7	9,473.1	74.5	75.2	89.37	-8,957.1	-120.9	888.7	739.1	149.59	5.941	
18,000.0	9,482.6	18,035.7	9,473.0	75.3	76.1	89.38	-9,057.1	-120.9	888.7	737.4	151.30	5.874	
18,100.0	9,482.4	18,135.7	9,472.8	76.2	76.9	89.39	-9,157.1	-120.9	888.7	735.7	153.01	5.808	
18,200.0	9,482.1	18,235.7	9,472.7	77.0	77.8	89.39	-9,257.1	-120.9	888.7	734.0	154.72	5.744	
18,300.0	9,481.8	18,335.7	9,472.6	77.9	78.6	89.40	-9,357.1	-120.9	888.7	732.3	156.43	5.681	
18,400.0	9,481.6	18,435.7	9,472.4	78.7	79.5	89.41	-9,457.1	-120.9	888.7	730.6	158.14	5.620	
18,500.0	9,481.3	18,535.7	9,472.3	79.6	80.3	89.42	-9,557.1	-120.9	888.8	728.9	159.85	5.560	
18,600.0	9,481.1	18,635.7	9,472.2	80.4	81.2	89.43	-9,657.1	-120.9	888.8	727.2	161.56	5.501	
18,700.0	9,480.8	18,735.7	9,472.1	81.3	82.1	89.44	-9,757.1	-120.9	888.8	725.5	163.27	5.444	
18,800.0	9,480.6	18,835.7	9,471.9	82.1	82.9	89.44	-9,857.1	-120.9	888.8	723.8	164.98	5.387	
18,900.0	9,480.3	18,935.7	9,471.8	83.0	83.8	89.45	-9,957.1	-120.9	888.8	722.1	166.69	5.332	
19,000.0	9,480.0	19,035.7	9,471.7	83.8	84.6	89.46	-10,057.1	-120.9	888.8	720.4	168.40	5.278	
19,100.0	9,479.8	19,135.7	9,471.5	84.7	85.5	89.47	-10,157.1	-120.9	888.8	718.7	170.11	5.225	
19,200.0	9,479.5	19,235.7	9,471.4	85.5	86.3	89.48	-10,257.1	-120.9	888.8	717.0	171.82	5.173	
19,300.0	9,479.3	19,335.7	9,471.3	86.4	87.2	89.49	-10,357.1	-120.9	888.9	715.3	173.53	5.122	
19,400.0	9,479.0	19,435.7	9,471.2	87.3	88.1	89.49	-10,457.1	-121.0	888.9	713.6	175.24	5.072	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 8721-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference	Offset	Semi Major Axis		Distance		Warning							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Tooface (")	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
19,500.0	9,478.8	19,535.7	9,471.0	88.1	88.9	89.50	-10,557.1	-121.0	888.9	711.9	176.95	5.023	
19,600.0	9,478.5	19,635.7	9,470.9	89.0	89.8	89.51	-10,657.1	-121.0	888.9	710.2	178.66	4.975	
19,700.0	9,478.2	19,735.7	9,470.8	89.8	90.6	89.52	-10,757.1	-121.0	888.9	708.5	180.38	4.928	
19,800.0	9,478.0	19,835.7	9,470.6	90.7	91.5	89.53	-10,857.1	-121.0	888.9	706.8	182.09	4.882	
19,900.0	9,477.7	19,935.7	9,470.5	91.5	92.3	89.53	-10,957.1	-121.0	888.9	705.1	183.80	4.836	
20,000.0	9,477.5	20,035.6	9,470.4	92.4	93.2	89.54	-11,057.1	-121.0	889.0	703.4	185.51	4.792	
20,100.0	9,477.2	20,135.6	9,470.3	93.2	94.1	89.55	-11,157.1	-121.0	889.0	701.7	187.23	4.748	
20,146.9	9,477.1	20,183.7	9,470.2	93.6	94.5	89.56	-11,205.2	-121.0	889.0	700.9	188.04	4.727	
20,159.7	9,477.1	20,199.6	9,470.2	93.7	94.6	89.56	-11,221.0	-120.9	888.9	700.7	188.30	4.721	
20,200.0	9,477.0	20,239.9	9,470.1	94.1	94.9	89.56	-11,261.3	-120.8	888.9	700.0	188.99	4.704	
20,300.0	9,476.7	20,339.9	9,470.0	94.9	95.8	89.57	-11,361.3	-120.3	888.9	698.2	190.70	4.661	
20,400.0	9,476.5	20,439.9	9,469.9	95.8	96.7	89.58	-11,461.3	-119.8	888.9	696.5	192.41	4.620	
20,500.0	9,476.2	20,539.9	9,469.8	96.7	97.5	89.59	-11,561.3	-119.3	888.9	694.8	194.13	4.579	
20,600.0	9,475.9	20,639.9	9,469.6	97.5	98.4	89.59	-11,661.3	-118.9	888.9	693.0	195.84	4.539	
20,700.0	9,475.7	20,739.9	9,469.5	98.4	99.2	89.60	-11,761.3	-118.4	888.8	691.3	197.56	4.499	
20,800.0	9,475.4	20,839.9	9,469.4	99.2	100.1	89.61	-11,861.3	-117.9	888.8	689.6	199.27	4.460	
20,900.0	9,475.2	20,939.9	9,469.3	100.1	101.0	89.62	-11,961.3	-117.5	888.8	687.8	200.98	4.422	
21,000.0	9,474.9	21,039.9	9,469.2	100.9	101.8	89.63	-12,061.3	-117.0	888.8	686.1	202.70	4.385	
21,100.0	9,474.7	21,139.9	9,469.0	101.8	102.7	89.64	-12,161.3	-116.5	888.8	684.4	204.41	4.348	
21,200.0	9,474.4	21,239.9	9,468.9	102.6	103.5	89.65	-12,261.3	-116.0	888.8	682.6	206.13	4.312	
21,300.0	9,474.1	21,339.9	9,468.8	103.5	104.4	89.66	-12,361.3	-115.6	888.7	680.9	207.84	4.276	
21,400.0	9,473.9	21,439.9	9,468.7	104.4	105.2	89.66	-12,461.3	-115.1	888.7	679.2	209.56	4.241	
21,500.0	9,473.6	21,539.9	9,468.5	105.2	106.1	89.67	-12,561.3	-114.6	888.7	677.4	211.27	4.206	
21,600.0	9,473.4	21,639.9	9,468.4	106.1	107.0	89.68	-12,661.3	-114.2	888.7	675.7	212.99	4.172	
21,700.0	9,473.1	21,739.9	9,468.3	106.9	107.8	89.69	-12,761.3	-113.7	888.7	674.0	214.70	4.139	
21,800.0	9,472.9	21,839.9	9,468.2	107.8	108.7	89.70	-12,861.3	-113.2	888.6	672.2	216.42	4.106	
21,900.0	9,472.6	21,939.9	9,468.1	108.6	109.5	89.71	-12,961.3	-112.7	888.6	670.5	218.13	4.074	
22,000.0	9,472.3	22,039.9	9,467.9	109.5	110.4	89.72	-13,061.3	-112.3	888.6	668.8	219.85	4.042	
22,100.0	9,472.1	22,139.9	9,467.8	110.4	111.3	89.72	-13,161.3	-111.8	888.6	667.0	221.57	4.011	
22,200.0	9,471.8	22,239.9	9,467.7	111.2	112.1	89.73	-13,261.3	-111.3	888.6	665.3	223.28	3.980	
22,300.0	9,471.6	22,339.9	9,467.6	112.1	113.0	89.74	-13,361.3	-110.9	888.6	663.6	225.00	3.949	
22,400.0	9,471.3	22,439.9	9,467.5	112.9	113.8	89.75	-13,461.3	-110.4	888.5	661.8	226.71	3.919	
22,500.0	9,471.1	22,539.9	9,467.3	113.8	114.7	89.76	-13,561.3	-109.9	888.5	660.1	228.43	3.890	
22,600.0	9,470.8	22,639.9	9,467.2	114.6	115.5	89.77	-13,661.3	-109.4	888.5	658.4	230.14	3.861	
22,700.0	9,470.5	22,739.9	9,467.1	115.5	116.4	89.78	-13,761.3	-109.0	888.5	656.6	231.86	3.832	
22,800.0	9,470.3	22,839.9	9,467.0	116.4	117.3	89.79	-13,861.3	-108.5	888.5	654.9	233.58	3.804	
22,900.0	9,470.0	22,939.9	9,466.8	117.2	118.1	89.79	-13,961.3	-108.0	888.4	653.2	235.29	3.776	
23,000.0	9,469.8	23,039.9	9,466.7	118.1	119.0	89.80	-14,061.3	-107.6	888.4	651.4	237.01	3.748	
23,100.0	9,469.5	23,139.9	9,466.6	118.9	119.8	89.81	-14,161.3	-107.1	888.4	649.7	238.73	3.721	
23,200.0	9,469.3	23,239.9	9,466.5	119.8	120.7	89.82	-14,261.3	-106.6	888.4	647.9	240.44	3.695	
23,300.0	9,469.0	23,339.9	9,466.4	120.6	121.6	89.83	-14,361.3	-106.1	888.4	646.2	242.16	3.669	
23,400.0	9,468.8	23,439.9	9,466.2	121.5	122.4	89.84	-14,461.3	-105.7	888.4	644.5	243.87	3.643	
23,500.0	9,468.5	23,539.9	9,466.1	122.4	123.3	89.85	-14,561.3	-105.2	888.3	642.7	245.59	3.617	
23,600.0	9,468.2	23,639.9	9,466.0	123.2	124.1	89.86	-14,661.3	-104.7	888.3	641.0	247.31	3.592	
23,700.0	9,468.0	23,739.9	9,465.9	124.1	125.0	89.86	-14,761.3	-104.3	888.3	639.3	249.02	3.567	
23,800.0	9,467.7	23,839.9	9,465.8	124.9	125.9	89.87	-14,861.3	-103.8	888.3	637.5	250.74	3.543	
23,900.0	9,467.5	23,939.9	9,465.6	125.8	126.7	89.88	-14,961.3	-103.3	888.3	635.8	252.46	3.518	
24,000.0	9,467.2	24,039.9	9,465.5	126.6	127.6	89.89	-15,061.3	-102.8	888.2	634.1	254.18	3.495	
24,100.0	9,467.0	24,139.9	9,465.4	127.5	128.4	89.90	-15,161.3	-102.4	888.2	632.3	255.89	3.471	
24,200.0	9,466.7	24,239.9	9,465.3	128.4	129.3	89.91	-15,261.3	-101.9	888.2	630.6	257.61	3.448	
24,300.0	9,466.4	24,339.9	9,465.1	129.2	130.1	89.92	-15,361.3	-101.4	888.2	628.9	259.33	3.425	
24,400.0	9,466.2	24,439.9	9,465.0	130.1	131.0	89.93	-15,461.3	-101.0	888.2	627.1	261.04	3.402	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design KRAKEN ST COM PROJECT - KRAKEN ST COM #702H - OWB - PWP1												Offset Site Error:	3.0 usft
Survey Program: 0-Standard Keeper 104, 8721-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference	Offset	Semi Major Axis		Distance									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
24,500.0	9,465.9	24,539.9	9,464.9	130.9	131.9	89.93	-15,561.3	-100.5	888.2	625.4	262.76	3.380	
24,600.0	9,465.7	24,639.9	9,464.8	131.8	132.7	89.94	-15,661.3	-100.0	888.1	623.7	264.48	3.358	
24,700.0	9,465.4	24,739.9	9,464.7	132.6	133.6	89.95	-15,761.3	-99.5	888.1	621.9	266.19	3.336	
24,800.0	9,465.2	24,839.9	9,464.5	133.5	134.4	89.96	-15,861.3	-99.1	888.1	620.2	267.91	3.315	
24,900.0	9,464.9	24,939.9	9,464.4	134.4	135.3	89.97	-15,961.3	-98.6	888.1	618.5	269.63	3.294	
25,000.0	9,464.6	25,039.9	9,464.3	135.2	136.2	89.98	-16,061.2	-98.1	888.1	616.7	271.35	3.273	
25,100.0	9,464.4	25,139.9	9,464.2	136.1	137.0	89.99	-16,161.2	-97.7	888.0	615.0	273.06	3.252	
25,200.0	9,464.1	25,239.9	9,464.1	136.9	137.9	89.99	-16,261.2	-97.2	888.0	613.3	274.78	3.232	
25,245.2	9,464.0	25,284.9	9,464.0	137.3	138.3	90.00	-16,306.3	-97.0	888.0	612.5	275.55	3.223	
25,252.0	9,464.0	25,284.9	9,464.0	137.4	138.3	90.00	-16,306.3	-97.0	888.0	612.5	275.59	3.222 SF	
25,252.5	9,464.0	25,284.9	9,464.0	137.4	138.3	90.00	-16,306.3	-97.0	888.1	612.5	275.59	3.222	

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference	Offset	Semi Major Axis		Distance		Warning							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
0.0	0.0	0.0	0.0	3.0	3.0	-90.07	-0.1	-60.0	60.0				
100.0	100.0	100.0	100.0	3.0	3.0	-90.07	-0.1	-60.0	60.0	54.0	6.00	9.991	
200.0	200.0	200.0	200.0	3.0	3.0	-90.07	-0.1	-60.0	60.0	53.9	6.04	9.928	
300.0	300.0	300.0	300.0	3.0	3.1	-90.07	-0.1	-60.0	60.0	53.9	6.12	9.796	
400.0	400.0	400.0	400.0	3.0	3.2	-90.07	-0.1	-60.0	60.0	53.7	6.24	9.606	
500.0	500.0	500.0	500.0	3.1	3.4	-90.07	-0.1	-60.0	60.0	53.6	6.40	9.371	
600.0	600.0	600.0	600.0	3.1	3.6	-90.07	-0.1	-60.0	60.0	53.4	6.59	9.103	
700.0	700.0	700.0	700.0	3.1	3.8	-90.07	-0.1	-60.0	60.0	53.2	6.80	8.815	
800.0	800.0	800.0	800.0	3.2	4.0	-90.07	-0.1	-60.0	60.0	52.9	7.04	8.517	
900.0	900.0	900.0	900.0	3.2	4.2	-90.07	-0.1	-60.0	60.0	52.7	7.30	8.216	
1,000.0	1,000.0	1,000.0	1,000.0	3.2	4.5	-90.07	-0.1	-60.0	60.0	52.4	7.58	7.918	
1,100.0	1,100.0	1,100.0	1,100.0	3.3	4.8	-90.07	-0.1	-60.0	60.0	52.1	7.86	7.627	
1,200.0	1,200.0	1,200.0	1,200.0	3.4	5.1	-90.07	-0.1	-60.0	60.0	51.8	8.17	7.345	
1,300.0	1,300.0	1,300.0	1,300.0	3.4	5.4	-90.07	-0.1	-60.0	60.0	51.5	8.48	7.075	
1,400.0	1,400.0	1,400.0	1,400.0	3.5	5.7	-90.07	-0.1	-60.0	60.0	51.2	8.80	6.818	
1,500.0	1,500.0	1,500.0	1,500.0	3.5	6.0	-90.07	-0.1	-60.0	60.0	50.9	9.13	6.572	
1,600.0	1,600.0	1,600.0	1,600.0	3.6	6.3	-90.07	-0.1	-60.0	60.0	50.5	9.46	6.339	
1,700.0	1,700.0	1,700.0	1,700.0	3.7	6.6	-90.07	-0.1	-60.0	60.0	50.2	9.80	6.119	
1,800.0	1,800.0	1,800.0	1,800.0	3.8	6.9	-90.07	-0.1	-60.0	60.0	49.8	10.15	5.910	
1,900.0	1,900.0	1,900.0	1,900.0	3.9	7.2	-90.07	-0.1	-60.0	60.0	49.5	10.50	5.712	
2,000.0	2,000.0	2,000.0	2,000.0	3.9	7.6	-90.07	-0.1	-60.0	60.0	49.1	10.86	5.525	
2,100.0	2,100.0	2,100.0	2,100.0	4.0	7.9	-90.07	-0.1	-60.0	60.0	48.8	11.22	5.348	
2,200.0	2,200.0	2,200.0	2,200.0	4.1	8.2	-90.07	-0.1	-60.0	60.0	48.4	11.58	5.180	
2,300.0	2,300.0	2,300.0	2,300.0	4.2	8.6	-90.07	-0.1	-60.0	60.0	48.0	11.95	5.021	
2,400.0	2,400.0	2,400.0	2,400.0	4.3	8.9	-90.07	-0.1	-60.0	60.0	47.7	12.32	4.870	
2,500.0	2,500.0	2,500.0	2,500.0	4.4	9.2	-90.07	-0.1	-60.0	60.0	47.3	12.69	4.728 CC, ES, SF	
2,600.0	2,600.0	2,597.9	2,597.9	4.4	9.6	130.82	-0.4	-61.6	62.8	49.8	13.04	4.815	
2,700.0	2,699.8	2,695.3	2,695.1	4.4	9.9	133.06	-1.2	-66.5	71.3	57.9	13.38	5.330	
2,750.0	2,749.7	2,743.6	2,743.3	4.4	10.0	134.40	-1.9	-70.2	77.7	64.2	13.54	5.740	
2,800.0	2,799.5	2,792.1	2,791.6	4.4	10.2	135.68	-2.6	-74.6	85.2	71.5	13.71	6.218	
2,900.0	2,899.1	2,890.9	2,889.9	4.4	10.5	137.65	-4.3	-83.9	100.7	86.7	14.07	7.158	
3,000.0	2,998.7	2,989.6	2,988.2	4.4	10.8	139.09	-5.9	-93.2	116.3	101.9	14.44	8.056	
3,100.0	3,098.4	3,088.4	3,086.5	4.4	11.2	140.19	-7.6	-102.5	131.9	117.1	14.81	8.911	
3,200.0	3,198.0	3,187.1	3,184.8	4.4	11.5	141.06	-9.2	-111.9	147.6	132.4	15.18	9.725	
3,300.0	3,297.6	3,285.9	3,283.1	4.4	11.8	141.76	-10.9	-121.2	163.3	147.7	15.55	10.499	
3,400.0	3,397.2	3,384.6	3,381.4	4.4	12.2	142.34	-12.5	-130.5	179.0	163.1	15.93	11.235	
3,500.0	3,496.8	3,483.3	3,479.7	4.4	12.5	142.82	-14.1	-139.8	194.7	178.4	16.32	11.935	
3,600.0	3,596.4	3,582.1	3,577.9	4.4	12.8	143.23	-15.8	-149.1	210.5	193.8	16.70	12.601	
3,700.0	3,696.1	3,680.8	3,676.2	4.4	13.2	143.59	-17.4	-158.5	226.2	209.1	17.09	13.234	
3,800.0	3,795.7	3,779.6	3,774.5	4.5	13.5	143.90	-19.1	-167.8	242.0	224.5	17.49	13.836	
3,900.0	3,895.3	3,878.3	3,872.8	4.5	13.9	144.17	-20.7	-177.1	257.7	239.8	17.89	14.409	
4,000.0	3,994.9	3,977.1	3,971.1	4.5	14.2	144.41	-22.4	-186.4	273.5	255.2	18.29	14.955	
4,100.0	4,094.5	4,075.8	4,069.4	4.6	14.5	144.62	-24.0	-195.8	289.3	270.6	18.69	15.475	
4,200.0	4,194.2	4,174.5	4,167.7	4.6	14.9	144.81	-25.7	-205.1	305.0	285.9	19.10	15.970	
4,300.0	4,293.8	4,273.3	4,266.0	4.6	15.2	144.99	-27.3	-214.4	320.8	301.3	19.51	16.442	
4,400.0	4,393.4	4,372.0	4,364.3	4.7	15.6	145.14	-28.9	-223.7	336.6	316.7	19.93	16.892	
4,500.0	4,493.0	4,470.8	4,462.5	4.7	15.9	145.28	-30.6	-233.0	352.4	332.0	20.34	17.321	
4,600.0	4,592.6	4,569.5	4,560.8	4.8	16.3	145.41	-32.2	-242.4	368.2	347.4	20.76	17.731	
4,700.0	4,692.3	4,668.3	4,659.1	4.9	16.6	145.53	-33.9	-251.7	384.0	362.8	21.19	18.122	
4,800.0	4,791.9	4,767.0	4,757.4	4.9	17.0	145.64	-35.5	-261.0	399.7	378.1	21.61	18.496	
4,900.0	4,891.5	4,865.7	4,855.7	5.0	17.3	145.75	-37.2	-270.3	415.5	393.5	22.04	18.853	
5,000.0	4,991.1	4,964.5	4,954.0	5.1	17.7	145.84	-38.8	-279.6	431.3	408.9	22.47	19.195	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	3.0 usft
Survey Program: 0-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Tooface (")	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
5,100.0	5,090.7	5,063.2	5,052.3	5.1	18.0	145.93	-40.4	-289.0	447.1	424.2	22.90	19.522	
5,200.0	5,190.4	5,162.0	5,150.6	5.2	18.4	146.01	-42.1	-298.3	462.9	439.6	23.34	19.836	
5,300.0	5,290.0	5,260.7	5,248.9	5.3	18.7	146.09	-43.7	-307.6	478.7	454.9	23.77	20.136	
5,400.0	5,389.6	5,359.5	5,347.1	5.4	19.1	146.16	-45.4	-316.9	494.5	470.3	24.21	20.423	
5,500.0	5,489.2	5,458.2	5,445.4	5.4	19.4	146.22	-47.0	-326.2	510.3	485.6	24.65	20.699	
5,600.0	5,588.8	5,557.0	5,543.7	5.5	19.8	146.29	-48.7	-335.6	526.1	501.0	25.09	20.964	
5,700.0	5,688.5	5,655.7	5,642.0	5.6	20.1	146.35	-50.3	-344.9	541.9	516.3	25.54	21.218	
5,800.0	5,788.1	5,754.4	5,740.3	5.7	20.5	146.40	-51.9	-354.2	557.7	531.7	25.98	21.462	
5,900.0	5,887.7	5,853.2	5,838.6	5.8	20.8	146.45	-53.6	-363.5	573.5	547.0	26.43	21.696	
6,000.0	5,987.3	5,951.9	5,936.9	5.8	21.2	146.50	-55.2	-372.8	589.3	562.4	26.88	21.922	
6,100.0	6,086.9	6,050.7	6,035.2	5.9	21.5	146.55	-56.9	-382.2	605.1	577.7	27.33	22.138	
6,200.0	6,186.6	6,149.4	6,133.5	6.0	21.9	146.60	-58.5	-391.5	620.9	593.1	27.78	22.347	
6,300.0	6,286.2	6,248.2	6,231.7	6.1	22.2	146.64	-60.2	-400.8	636.7	608.4	28.24	22.548	
6,400.0	6,385.8	6,346.9	6,330.0	6.2	22.6	146.68	-61.8	-410.1	652.5	623.8	28.69	22.741	
6,500.0	6,485.4	6,445.6	6,428.3	6.3	22.9	146.72	-63.5	-419.4	668.3	639.1	29.15	22.928	
6,600.0	6,585.0	6,544.4	6,526.6	6.4	23.3	146.76	-65.1	-428.8	684.1	654.4	29.60	23.108	
6,700.0	6,684.7	6,643.1	6,624.9	6.5	23.6	146.79	-66.7	-438.1	699.9	669.8	30.06	23.281	
6,800.0	6,784.3	6,741.9	6,723.2	6.6	24.0	146.82	-68.4	-447.4	715.6	685.1	30.52	23.448	
6,900.0	6,883.9	6,840.6	6,821.5	6.7	24.4	146.86	-70.0	-456.7	731.4	700.5	30.98	23.610	
7,000.0	6,983.5	6,939.4	6,919.8	6.8	24.7	146.89	-71.7	-466.0	747.2	715.8	31.44	23.766	
7,100.0	7,083.1	7,038.1	7,018.0	6.9	25.1	146.92	-73.3	-475.4	763.0	731.1	31.91	23.916	
7,200.0	7,182.7	7,136.8	7,116.3	7.0	25.4	146.95	-75.0	-484.7	778.8	746.5	32.37	24.062	
7,300.0	7,282.4	7,235.6	7,214.6	7.1	25.8	146.97	-76.6	-494.0	794.6	761.8	32.83	24.203	
7,400.0	7,382.0	7,334.3	7,312.9	7.2	26.1	147.00	-78.2	-503.3	810.4	777.2	33.30	24.339	
7,500.0	7,481.6	7,433.1	7,411.2	7.3	26.5	147.02	-79.9	-512.6	826.3	792.5	33.77	24.470	
7,600.0	7,581.2	7,531.8	7,509.5	7.4	26.8	147.05	-81.5	-522.0	842.1	807.8	34.23	24.598	
7,700.0	7,680.8	7,630.6	7,607.8	7.5	27.2	147.07	-83.2	-531.3	857.9	823.2	34.70	24.721	
7,800.0	7,780.5	7,729.3	7,706.1	7.6	27.6	147.10	-84.8	-540.6	873.7	838.5	35.17	24.841	
7,900.0	7,880.1	7,828.0	7,804.4	7.7	27.9	147.12	-86.5	-549.9	889.5	853.8	35.64	24.957	
8,000.0	7,979.7	7,926.8	7,902.6	7.8	28.3	147.14	-88.1	-559.2	905.3	869.1	36.11	25.069	
8,100.0	8,079.3	8,025.5	8,000.9	7.9	28.6	147.16	-89.7	-568.6	921.1	884.5	36.58	25.178	
8,200.0	8,178.9	8,124.3	8,099.2	8.0	29.0	147.18	-91.4	-577.9	936.9	899.8	37.05	25.283	
8,300.0	8,278.6	8,223.0	8,197.5	8.1	29.3	147.20	-93.0	-587.2	952.7	915.1	37.53	25.386	
8,400.0	8,378.2	8,321.8	8,295.8	8.3	29.7	147.21	-94.7	-596.5	968.5	930.5	38.00	25.485	
8,500.0	8,477.8	8,420.5	8,394.1	8.4	30.1	147.23	-96.3	-605.8	984.3	945.8	38.48	25.582	

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design MYOX 28 STATE PROJECT (ATLAS 2528) - MYOX 28 ST COM #701H - OWB - AWP												Offset Site Error:	0.0 usft
Survey Program: 100-Standard Keeper 104, 8751-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference	Offset	Semi Major Axis		Distance		Warning							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Tooface (")	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
8,500.0	8,477.8	19,592.0	9,353.1	8.9	90.2	-65.72	-398.4	565.4	904.7	807.6	97.16	9.312	
8,600.0	8,577.4	19,592.0	9,353.1	9.0	90.2	-65.72	-398.4	565.4	807.4	709.9	97.45	8.285	
8,700.0	8,677.0	19,592.0	9,353.1	9.1	90.2	-65.72	-398.4	565.4	710.7	612.9	97.75	7.271	
8,800.0	8,776.7	19,592.0	9,353.1	9.2	90.2	-65.72	-398.4	565.4	615.1	517.1	98.05	6.273	
8,900.0	8,876.3	19,592.0	9,353.1	9.3	90.2	-65.72	-398.4	565.4	521.2	422.8	98.36	5.298	
9,000.0	8,975.9	19,592.0	9,353.1	9.4	90.2	-65.72	-398.4	565.4	430.0	331.3	98.67	4.358	
9,090.0	9,065.6	19,592.0	9,353.1	9.5	90.2	-65.72	-398.4	565.4	352.0	252.9	99.09	3.553	
9,100.0	9,075.5	19,592.0	9,353.1	9.5	90.2	-71.48	-398.4	565.4	343.8	244.7	99.10	3.469	
9,125.0	9,100.3	19,592.0	9,353.1	9.5	90.2	-81.20	-398.4	565.4	323.4	224.3	99.10	3.264	
9,150.0	9,124.9	19,592.0	9,353.1	9.5	90.2	-87.79	-398.4	565.4	303.8	204.8	99.01	3.069	
9,175.0	9,149.2	19,592.0	9,353.1	9.5	90.2	-92.81	-398.4	565.4	285.2	186.4	98.80	2.887	
9,200.0	9,173.1	19,592.0	9,353.1	9.5	90.2	-96.81	-398.4	565.4	267.7	169.3	98.40	2.721	
9,225.0	9,196.7	19,592.0	9,353.1	9.5	90.2	-100.03	-398.4	565.4	251.8	154.1	97.72	2.577	
9,250.0	9,219.8	19,592.0	9,353.1	9.6	90.2	-102.60	-398.4	565.4	237.7	141.0	96.66	2.459	
9,275.0	9,242.4	19,592.0	9,353.1	9.6	90.2	-104.60	-398.4	565.4	225.8	130.7	95.10	2.375	
9,300.0	9,264.4	19,592.0	9,353.1	9.6	90.2	-106.09	-398.4	565.4	216.6	123.7	92.95	2.331 SF	
9,325.0	9,285.7	19,592.0	9,353.1	9.6	90.2	-107.10	-398.4	565.4	210.4	120.3	90.16	2.334 ES	
9,350.0	9,306.3	19,592.0	9,353.1	9.6	90.2	-107.67	-398.4	565.4	207.5	120.7	86.80	2.391	
9,358.4	9,313.1	19,592.0	9,353.1	9.6	90.2	-107.77	-398.4	565.4	207.3	121.8	85.57	2.423 CC	
9,375.0	9,326.2	19,592.0	9,353.1	9.7	90.2	-107.81	-398.4	565.4	208.1	125.1	83.06	2.506	
9,400.0	9,345.2	19,592.0	9,353.1	9.7	90.2	-107.52	-398.4	565.4	212.1	132.9	79.17	2.679	
9,425.0	9,363.4	19,592.0	9,353.1	9.7	90.2	-106.82	-398.4	565.4	219.3	143.9	75.39	2.909	
9,450.0	9,380.6	19,592.0	9,353.1	9.7	90.2	-105.68	-398.4	565.4	229.4	157.6	71.87	3.192	
9,475.0	9,396.9	19,592.0	9,353.1	9.8	90.2	-104.10	-398.4	565.4	242.1	173.4	68.71	3.523	
9,500.0	9,412.2	19,592.0	9,353.1	9.8	90.2	-102.08	-398.4	565.4	256.8	190.9	65.91	3.896	
9,525.0	9,426.4	19,592.0	9,353.1	9.9	90.2	-99.59	-398.4	565.4	273.3	209.8	63.46	4.307	
9,550.0	9,439.5	19,592.0	9,353.1	9.9	90.2	-96.63	-398.4	565.4	291.2	229.9	61.29	4.750	
9,575.0	9,451.4	19,592.0	9,353.1	10.0	90.2	-93.21	-398.4	565.4	310.1	250.8	59.36	5.225	
9,600.0	9,462.3	19,592.0	9,353.1	10.0	90.2	-89.34	-398.4	565.4	330.0	272.4	57.61	5.728	
9,625.0	9,471.9	19,592.0	9,353.1	10.1	90.2	-85.06	-398.4	565.4	350.5	294.5	55.99	6.260	
9,650.0	9,480.3	19,592.0	9,353.1	10.1	90.2	-80.44	-398.4	565.4	371.6	317.1	54.47	6.822	
9,675.0	9,487.4	19,592.0	9,353.1	10.2	90.2	-75.56	-398.4	565.4	393.0	340.0	53.01	7.413	
9,700.0	9,493.3	19,592.0	9,353.1	10.3	90.2	-70.54	-398.4	565.4	414.7	363.1	51.60	8.036	
9,725.0	9,497.9	19,592.0	9,353.1	10.3	90.2	-65.49	-398.4	565.4	436.5	386.3	50.22	8.693	
9,750.0	9,501.2	19,592.0	9,353.1	10.4	90.2	-60.53	-398.4	565.4	458.5	409.6	48.86	9.385	
9,775.0	9,503.3	19,592.0	9,353.1	10.5	90.2	-55.76	-398.4	565.4	480.5	432.9	47.51	10.114	
9,802.4	9,504.0	19,592.0	9,353.1	10.6	90.2	-50.85	-398.4	565.4	504.5	458.4	46.04	10.957	
9,900.0	9,503.7	19,592.0	9,353.1	10.9	90.2	-48.22	-398.4	565.4	592.3	550.3	41.99	14.107	
10,000.0	9,503.4	19,592.0	9,353.1	11.4	90.2	-44.52	-398.4	565.4	685.9	646.4	39.51	17.363	
10,100.0	9,503.2	19,592.0	9,353.1	11.9	90.2	-39.48	-398.4	565.4	781.8	743.8	37.96	20.593	
10,200.0	9,502.9	19,592.0	9,353.1	12.5	90.2	-32.64	-398.4	565.4	879.1	842.1	36.94	23.798	
10,300.0	9,502.7	19,592.0	9,353.1	13.0	90.2	-23.46	-398.4	565.4	977.3	941.1	36.20	26.997	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design MYOX 28 STATE PROJECT (ATLAS 2528) - MYOX 28 ST COM #702H - OWB - AWP												Offset Site Error:	0.0 usft
Survey Program: 100-Standard Keeper 104, 8755-MWD+IFR1+FDIR												Offset Well Error:	3.0 usft
Reference	Offset	Semi Major Axis		Distance		Warning							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Tooface (")	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
8,800.0	8,776.7	19,507.0	9,486.8	9.2	88.6	135.12	-394.8	-323.0	973.6	876.4	97.21	10.016	
8,900.0	8,876.3	19,507.0	9,486.8	9.3	88.6	135.12	-394.8	-323.0	908.1	810.6	97.48	9.316	
9,000.0	8,975.9	19,507.0	9,486.8	9.4	88.6	135.12	-394.8	-323.0	849.4	751.7	97.70	8.694	
9,090.0	9,065.6	19,507.0	9,486.8	9.5	88.6	135.12	-394.8	-323.0	803.6	705.8	97.78	8.219	
9,100.0	9,075.5	19,507.0	9,486.8	9.5	88.6	131.70	-394.8	-323.0	799.0	701.2	97.78	8.172	
9,125.0	9,100.3	19,507.0	9,486.8	9.5	88.6	127.45	-394.8	-323.0	788.3	690.6	97.77	8.063	
9,150.0	9,124.9	19,507.0	9,486.8	9.5	88.6	125.74	-394.8	-323.0	778.8	681.1	97.75	7.968	
9,175.0	9,149.2	19,507.0	9,486.8	9.5	88.6	124.98	-394.8	-323.0	770.6	672.9	97.70	7.887	
9,200.0	9,173.1	19,507.0	9,486.8	9.5	88.6	124.61	-394.8	-323.0	763.7	666.0	97.64	7.821	
9,225.0	9,196.7	19,507.0	9,486.8	9.5	88.6	124.41	-394.8	-323.0	758.2	660.6	97.56	7.771	
9,250.0	9,219.8	19,507.0	9,486.8	9.6	88.6	124.25	-394.8	-323.0	754.0	656.6	97.45	7.738	
9,275.0	9,242.4	19,507.0	9,486.8	9.6	88.6	124.07	-394.8	-323.0	751.4	654.1	97.32	7.721 SF	
9,300.0	9,264.4	19,507.0	9,486.8	9.6	88.6	123.83	-394.8	-323.0	750.2	653.1	97.16	7.721	
9,307.2	9,270.6	19,507.0	9,486.8	9.6	88.6	123.74	-394.8	-323.0	750.2	653.0	97.11	7.725 CC, ES	
9,325.0	9,285.7	19,507.0	9,486.8	9.6	88.6	123.50	-394.8	-323.0	750.5	653.6	96.97	7.739	
9,350.0	9,306.3	19,507.0	9,486.8	9.6	88.6	123.07	-394.8	-323.0	752.3	655.6	96.76	7.775	
9,375.0	9,326.2	19,507.0	9,486.8	9.7	88.6	122.52	-394.8	-323.0	755.6	659.1	96.51	7.829	
9,400.0	9,345.2	19,507.0	9,486.8	9.7	88.6	121.85	-394.8	-323.0	760.3	664.1	96.24	7.901	
9,425.0	9,363.4	19,507.0	9,486.8	9.7	88.6	121.04	-394.8	-323.0	766.5	670.5	95.93	7.990	
9,450.0	9,380.6	19,507.0	9,486.8	9.7	88.6	120.09	-394.8	-323.0	773.9	678.4	95.59	8.097	
9,475.0	9,396.9	19,507.0	9,486.8	9.8	88.6	118.98	-394.8	-323.0	782.7	687.5	95.21	8.221	
9,500.0	9,412.2	19,507.0	9,486.8	9.8	88.6	117.71	-394.8	-323.0	792.7	697.9	94.81	8.362	
9,525.0	9,426.4	19,507.0	9,486.8	9.9	88.6	116.27	-394.8	-323.0	803.9	709.5	94.37	8.519	
9,550.0	9,439.5	19,507.0	9,486.8	9.9	88.6	114.66	-394.8	-323.0	816.1	722.3	93.90	8.692	
9,575.0	9,451.4	19,507.0	9,486.8	10.0	88.6	112.86	-394.8	-323.0	829.4	736.0	93.40	8.880	
9,600.0	9,462.3	19,507.0	9,486.8	10.0	88.6	110.87	-394.8	-323.0	843.6	750.7	92.87	9.083	
9,625.0	9,471.9	19,507.0	9,486.8	10.1	88.6	108.69	-394.8	-323.0	858.5	766.2	92.32	9.300	
9,650.0	9,480.3	19,507.0	9,486.8	10.1	88.6	106.31	-394.8	-323.0	874.3	782.6	91.74	9.530	
9,675.0	9,487.4	19,507.0	9,486.8	10.2	88.6	103.74	-394.8	-323.0	890.7	799.6	91.14	9.773	
9,700.0	9,493.3	19,507.0	9,486.8	10.3	88.6	100.98	-394.8	-323.0	907.7	817.2	90.52	10.027	
9,725.0	9,497.9	19,507.0	9,486.8	10.3	88.6	98.04	-394.8	-323.0	925.2	835.3	89.89	10.293	
9,750.0	9,501.2	19,507.0	9,486.8	10.4	88.6	94.95	-394.8	-323.0	943.2	853.9	89.24	10.568	
9,775.0	9,503.3	19,507.0	9,486.8	10.5	88.6	91.71	-394.8	-323.0	961.5	872.9	88.59	10.853	
9,802.4	9,504.0	19,507.0	9,486.8	10.6	88.6	88.05	-394.8	-323.0	981.9	894.0	87.87	11.174	

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	0.0 usft
Survey Program: 100-Standard Keeper 104, 7528-MWD+IFR1+MS												Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
7,300.0	7,282.4	17,905.0	8,129.1	7.7	77.2	6.44	-806.1	598.9	974.9	896.1	78.85	12.365	
7,400.0	7,382.0	17,905.0	8,129.1	7.8	77.2	6.44	-806.1	598.9	892.6	815.7	76.92	11.605	
7,500.0	7,481.6	17,905.0	8,129.1	7.9	77.2	6.44	-806.1	598.9	814.2	739.8	74.43	10.939	
7,600.0	7,581.2	17,905.0	8,129.1	8.0	77.2	6.44	-806.1	598.9	741.0	669.8	71.27	10.397	
7,700.0	7,680.8	17,905.0	8,129.1	8.1	77.2	6.44	-806.1	598.9	674.8	607.4	67.36	10.018	
7,800.0	7,780.5	17,905.0	8,129.1	8.2	77.2	6.44	-806.1	598.9	617.7	554.9	62.80	9.836	
7,900.0	7,880.1	17,905.0	8,129.1	8.3	77.2	6.44	-806.1	598.9	572.5	514.4	58.16	9.844	
8,000.0	7,979.7	17,905.0	8,129.1	8.4	77.2	6.44	-806.1	598.9	542.2	487.5	54.72	9.908	
8,100.0	8,079.3	17,905.0	8,129.1	8.5	77.2	6.44	-806.1	598.9	529.3	475.2	54.17	9.772	
8,118.9	8,098.2	17,905.0	8,129.1	8.5	77.2	6.44	-806.1	598.9	529.0	474.5	54.48	9.710 CC, ES	
8,200.0	8,178.9	17,905.0	8,129.1	8.6	77.2	6.44	-806.1	598.9	535.2	478.0	57.19	9.357	
8,300.0	8,278.6	17,905.0	8,129.1	8.7	77.2	6.44	-806.1	598.9	559.1	496.5	62.66	8.923	
8,400.0	8,378.2	17,905.0	8,129.1	8.8	77.2	6.44	-806.1	598.9	599.0	530.3	68.77	8.711 SF	
8,500.0	8,477.8	17,905.0	8,129.1	8.9	77.2	6.44	-806.1	598.9	651.9	577.6	74.33	8.771	
8,600.0	8,577.4	17,905.0	8,129.1	9.0	77.2	6.44	-806.1	598.9	715.0	636.1	78.94	9.058	
8,700.0	8,677.0	17,905.0	8,129.1	9.1	77.2	6.44	-806.1	598.9	785.8	703.2	82.58	9.515	
8,800.0	8,776.7	17,905.0	8,129.1	9.2	77.2	6.44	-806.1	598.9	862.4	776.9	85.44	10.093	
8,900.0	8,876.3	17,905.0	8,129.1	9.3	77.2	6.44	-806.1	598.9	943.3	855.7	87.68	10.759	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Offset Design SRO STATE PROJECT (ATLAS 2628) - SRO STATE UNIT #1H - OWB - ACTUAL WELLPATH													Offset Site Error:	0.0 usft
Survey Program: 230-INC-ONLY, 6649-MWD													Offset Well Error:	3.0 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
							+N/-S (usft)	+E/-W (usft)						
6,700.0	6,684.7	11,233.4	7,152.3	7.1	165.0	35.74	-1,149.0	317.6	984.2	828.1	156.06	6.306		
6,800.0	6,784.3	11,234.2	7,152.3	7.2	165.0	35.68	-1,149.0	318.4	937.4	775.7	161.68	5.798		
6,900.0	6,883.9	11,235.1	7,152.2	7.3	165.0	35.63	-1,148.9	319.3	899.3	732.9	166.44	5.403		
7,000.0	6,983.5	11,235.9	7,152.2	7.4	165.0	35.57	-1,148.8	320.1	871.1	701.2	169.90	5.127		
7,100.0	7,083.1	11,236.8	7,152.2	7.5	165.1	35.51	-1,148.8	321.0	853.8	682.1	171.66	4.974		
7,199.6	7,182.3	11,237.7	7,152.1	7.6	165.1	35.45	-1,148.7	321.9	848.0	676.5	171.48	4.945 CC, ES, SF		
7,200.0	7,182.7	11,237.7	7,152.1	7.6	165.1	35.45	-1,148.7	321.9	848.0	676.5	171.47	4.945		
7,300.0	7,282.4	11,238.7	7,152.1	7.7	165.1	35.38	-1,148.6	322.9	853.9	684.6	169.29	5.044		
7,400.0	7,382.0	11,239.7	7,152.1	7.8	165.1	35.31	-1,148.5	323.9	871.3	706.0	165.29	5.271		
7,500.0	7,481.6	11,240.7	7,152.0	7.9	165.1	35.24	-1,148.5	324.9	899.6	739.7	159.85	5.628		
7,600.0	7,581.2	11,241.8	7,152.0	8.0	165.1	35.17	-1,148.4	326.0	937.7	784.3	153.42	6.112		
7,700.0	7,680.8	11,243.0	7,151.9	8.1	165.2	35.09	-1,148.3	327.1	984.6	838.1	146.44	6.723		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation


Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Reference Depths are relative to KB=26' @ 2984.0usft (PIONEER 84) Coordinates are relative to: KRAKEN ST COM #701H
 Offset Depths are relative to Offset Datum Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
 Central Meridian is 104° 20' 0.000 W Grid Convergence at Surface is: 0.13°

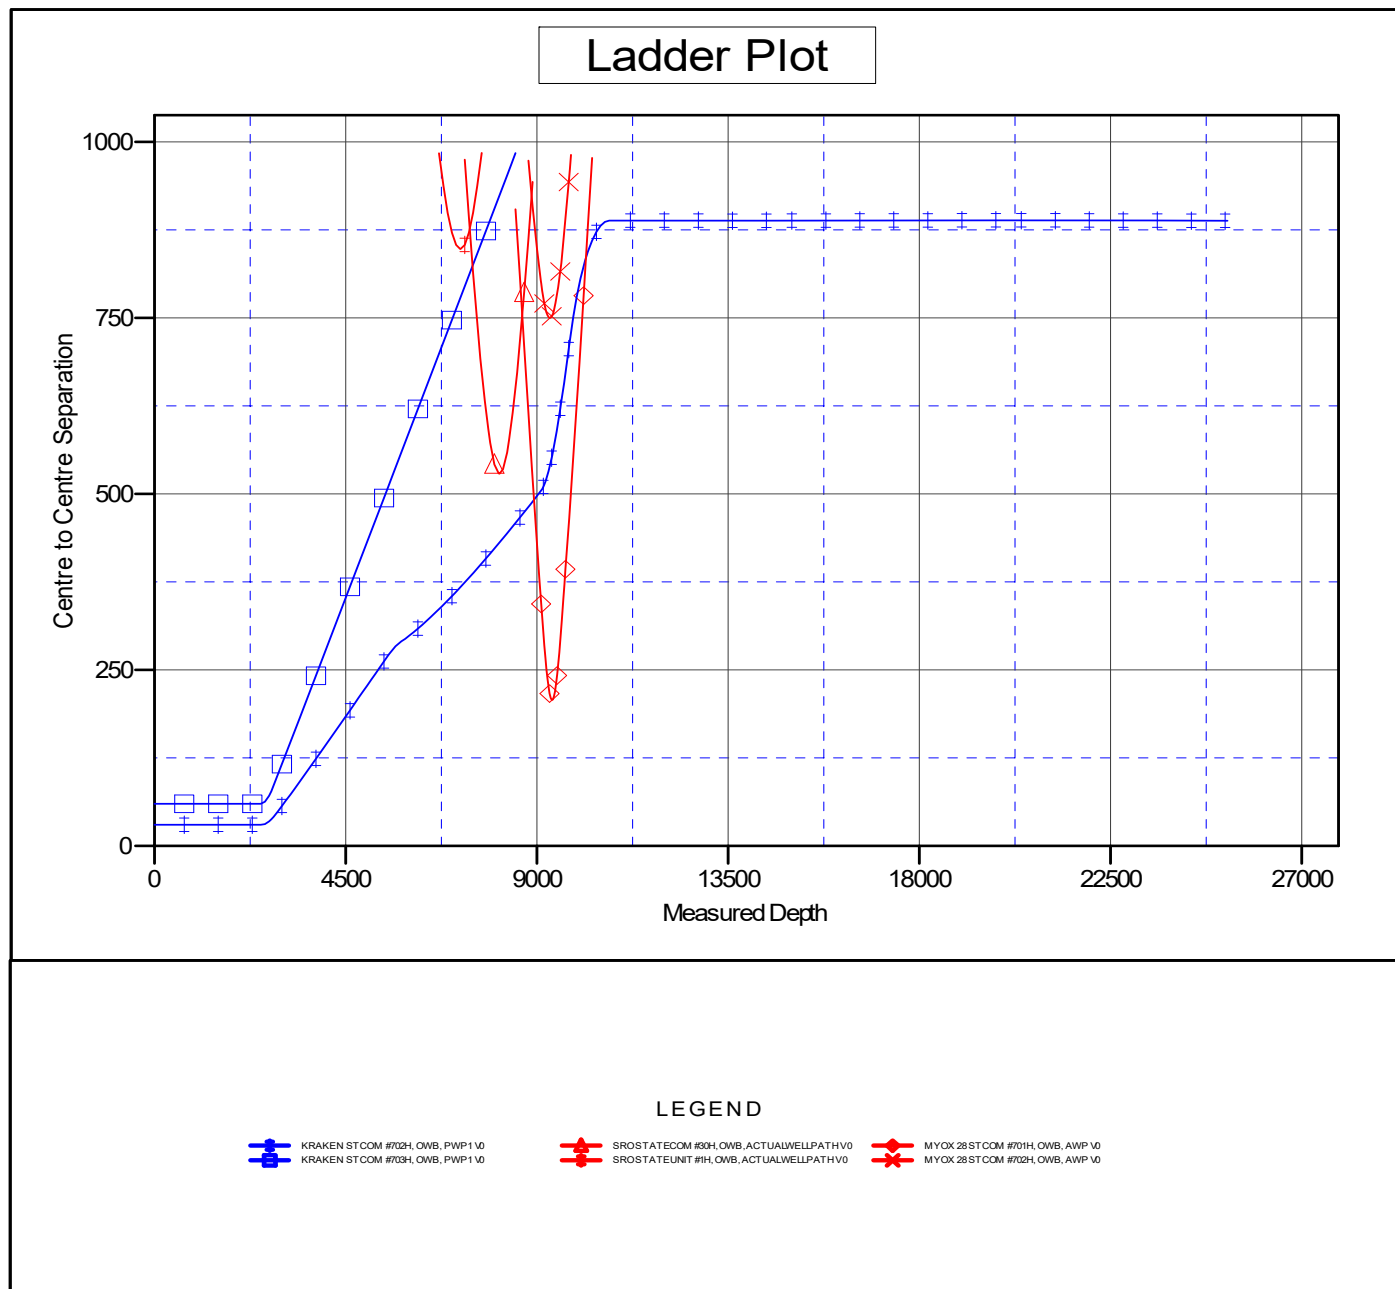

Concho Resources LLC

Anticollision Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Reference Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site Error:	3.0 usft	North Reference:	Grid
Reference Well:	KRAKEN ST COM #701H	Survey Calculation Method:	Minimum Curvature
Well Error:	3.0 usft	Output errors are at	2.00 sigma
Reference Wellbore	OWB	Database:	edm
Reference Design:	PWP1	Offset TVD Reference:	Offset Datum

Reference Depths are relative to KB=26' @ 2984.0usft (PIONEER 84) Coordinates are relative to: KRAKEN ST COM #701H


Offset Depths are relative to Offset Datum

Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30

Central Meridian is 104° 20' 0.000 W

Grid Convergence at Surface is: 0.13°

Separation Factor Plot

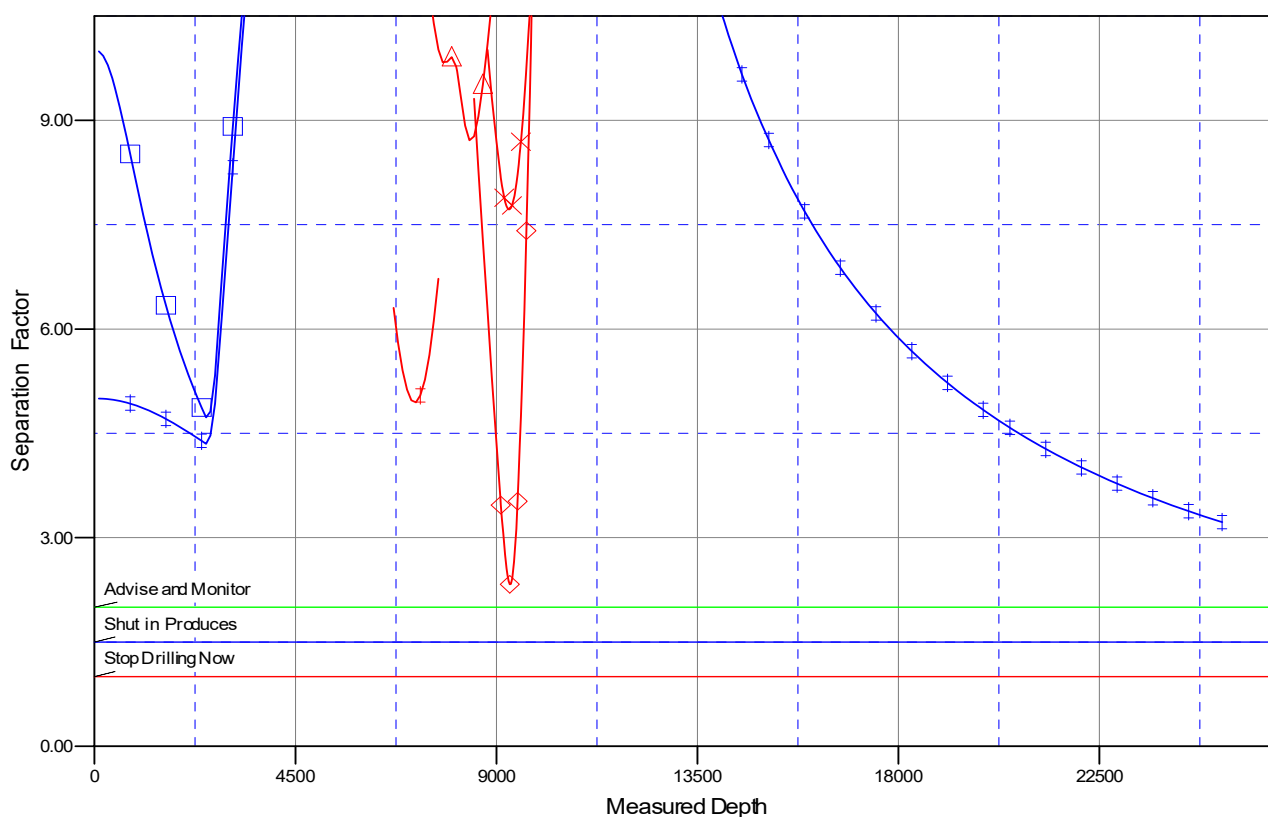

LEGEND

KRAKEN ST COM #701H, OWB, PWP1 V0
 KRAKEN ST COM #701H, OWB, PWP1 V0

SROSTATECOM #93H, OWB, ACTUALWELLPATH V0
 SROSTATECOM #93H, OWB, ACTUALWELLPATH V0

MYOK 28 ST COM #701H, OWB, AWP V0
 MYOK 28 ST COM #701H, OWB, AWP V0

DELAWARE BASIN WEST

**ATLAS PROSPECT (NM-E)
KRAKEN ST COM PROJECT
KRAKEN ST COM #701H**

OWB

Plan: PWP1

Standard Survey Report

25 February, 2021



Concho Resources LLC

Survey Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Well:	KRAKEN ST COM #701H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP1	Database:	edm

Project	ATLAS PROSPECT (NM-E)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Well	KRAKEN ST COM #701H				
Well Position	+N/-S	0.0 usft	Northing:	393,075.69 usft	Latitude: 32° 4' 49.584 N
	+E/-W	0.0 usft	Easting:	576,491.57 usft	Longitude: 104° 5' 10.920 W
Position Uncertainty		3.0 usft	Wellhead Elevation:	usft	Ground Level: 2,959.0 usft

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	2/25/2021	6.81	59.70	47,389.90525980

Design	PWP1				
Audit Notes:					
Version:	Phase:	PLAN	Tie On Depth:	0.0	
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	177.22	

Survey Tool Program	Date	2/25/2021			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.0	9,090.0	PWP1 (OWB)	Standard Keeper 104	Standard Wireline Keeper ver 1.0.4	
9,090.0	25,252.0	PWP1 (OWB)	MWD+IFR1+FDIR	OWSG MWD + IFR1 + FDIR Correction	

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00	
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00	
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00	
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00	
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00	
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00	
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00	

Concho Resources LLC

Survey Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Well:	KRAKEN ST COM #701H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP1	Database:	edm

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
Start Build 2.00									
2,600.0	2.00	140.00	2,600.0	-1.3	1.1	1.4	2.00	2.00	0.00
2,700.0	4.00	140.00	2,699.8	-5.3	4.5	5.6	2.00	2.00	0.00
2,750.0	5.00	140.00	2,749.7	-8.4	7.0	8.7	2.00	2.00	0.00
Start 6340.0 hold at 2750.0 MD									
2,800.0	5.00	140.00	2,799.5	-11.7	9.8	12.2	0.00	0.00	0.00
2,900.0	5.00	140.00	2,899.1	-18.4	15.4	19.1	0.00	0.00	0.00
3,000.0	5.00	140.00	2,998.7	-25.0	21.0	26.0	0.00	0.00	0.00
3,100.0	5.00	140.00	3,098.4	-31.7	26.6	33.0	0.00	0.00	0.00
3,200.0	5.00	140.00	3,198.0	-38.4	32.2	39.9	0.00	0.00	0.00
3,300.0	5.00	140.00	3,297.6	-45.1	37.8	46.9	0.00	0.00	0.00
3,400.0	5.00	140.00	3,397.2	-51.7	43.4	53.8	0.00	0.00	0.00
3,500.0	5.00	140.00	3,496.8	-58.4	49.0	60.7	0.00	0.00	0.00
3,600.0	5.00	140.00	3,596.4	-65.1	54.6	67.7	0.00	0.00	0.00
3,700.0	5.00	140.00	3,696.1	-71.8	60.2	74.6	0.00	0.00	0.00
3,800.0	5.00	140.00	3,795.7	-78.5	65.8	81.6	0.00	0.00	0.00
3,900.0	5.00	140.00	3,895.3	-85.1	71.4	88.5	0.00	0.00	0.00
4,000.0	5.00	140.00	3,994.9	-91.8	77.0	95.4	0.00	0.00	0.00
4,100.0	5.00	140.00	4,094.5	-98.5	82.6	102.4	0.00	0.00	0.00
4,200.0	5.00	140.00	4,194.2	-105.2	88.2	109.3	0.00	0.00	0.00
4,300.0	5.00	140.00	4,293.8	-111.8	93.8	116.3	0.00	0.00	0.00
4,400.0	5.00	140.00	4,393.4	-118.5	99.4	123.2	0.00	0.00	0.00
4,500.0	5.00	140.00	4,493.0	-125.2	105.0	130.1	0.00	0.00	0.00
4,600.0	5.00	140.00	4,592.6	-131.9	110.6	137.1	0.00	0.00	0.00
4,700.0	5.00	140.00	4,692.3	-138.5	116.3	144.0	0.00	0.00	0.00
4,800.0	5.00	140.00	4,791.9	-145.2	121.9	151.0	0.00	0.00	0.00
4,900.0	5.00	140.00	4,891.5	-151.9	127.5	157.9	0.00	0.00	0.00
5,000.0	5.00	140.00	4,991.1	-158.6	133.1	164.8	0.00	0.00	0.00
5,100.0	5.00	140.00	5,090.7	-165.2	138.7	171.8	0.00	0.00	0.00
5,200.0	5.00	140.00	5,190.4	-171.9	144.3	178.7	0.00	0.00	0.00
5,300.0	5.00	140.00	5,290.0	-178.6	149.9	185.7	0.00	0.00	0.00
5,400.0	5.00	140.00	5,389.6	-185.3	155.5	192.6	0.00	0.00	0.00

Concho Resources LLC

Survey Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Well:	KRAKEN ST COM #701H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP1	Database:	edm

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,500.0	5.00	140.00	5,489.2	-192.0	161.1	199.5	0.00	0.00	0.00
5,600.0	5.00	140.00	5,588.8	-198.6	166.7	206.5	0.00	0.00	0.00
5,700.0	5.00	140.00	5,688.5	-205.3	172.3	213.4	0.00	0.00	0.00
5,800.0	5.00	140.00	5,788.1	-212.0	177.9	220.4	0.00	0.00	0.00
5,900.0	5.00	140.00	5,887.7	-218.7	183.5	227.3	0.00	0.00	0.00
6,000.0	5.00	140.00	5,987.3	-225.3	189.1	234.2	0.00	0.00	0.00
6,100.0	5.00	140.00	6,086.9	-232.0	194.7	241.2	0.00	0.00	0.00
6,200.0	5.00	140.00	6,186.6	-238.7	200.3	248.1	0.00	0.00	0.00
6,300.0	5.00	140.00	6,286.2	-245.4	205.9	255.1	0.00	0.00	0.00
6,400.0	5.00	140.00	6,385.8	-252.0	211.5	262.0	0.00	0.00	0.00
6,500.0	5.00	140.00	6,485.4	-258.7	217.1	268.9	0.00	0.00	0.00
6,600.0	5.00	140.00	6,585.0	-265.4	222.7	275.9	0.00	0.00	0.00
6,700.0	5.00	140.00	6,684.7	-272.1	228.3	282.8	0.00	0.00	0.00
6,800.0	5.00	140.00	6,784.3	-278.7	233.9	289.8	0.00	0.00	0.00
6,900.0	5.00	140.00	6,883.9	-285.4	239.5	296.7	0.00	0.00	0.00
7,000.0	5.00	140.00	6,983.5	-292.1	245.1	303.6	0.00	0.00	0.00
7,100.0	5.00	140.00	7,083.1	-298.8	250.7	310.6	0.00	0.00	0.00
7,200.0	5.00	140.00	7,182.7	-305.5	256.3	317.5	0.00	0.00	0.00
7,300.0	5.00	140.00	7,282.4	-312.1	261.9	324.5	0.00	0.00	0.00
7,400.0	5.00	140.00	7,382.0	-318.8	267.5	331.4	0.00	0.00	0.00
7,500.0	5.00	140.00	7,481.6	-325.5	273.1	338.3	0.00	0.00	0.00
7,600.0	5.00	140.00	7,581.2	-332.2	278.7	345.3	0.00	0.00	0.00
7,700.0	5.00	140.00	7,680.8	-338.8	284.3	352.2	0.00	0.00	0.00
7,800.0	5.00	140.00	7,780.5	-345.5	289.9	359.2	0.00	0.00	0.00
7,900.0	5.00	140.00	7,880.1	-352.2	295.5	366.1	0.00	0.00	0.00
8,000.0	5.00	140.00	7,979.7	-358.9	301.1	373.0	0.00	0.00	0.00
8,100.0	5.00	140.00	8,079.3	-365.5	306.7	380.0	0.00	0.00	0.00
8,200.0	5.00	140.00	8,178.9	-372.2	312.3	386.9	0.00	0.00	0.00
8,300.0	5.00	140.00	8,278.6	-378.9	317.9	393.9	0.00	0.00	0.00
8,400.0	5.00	140.00	8,378.2	-385.6	323.5	400.8	0.00	0.00	0.00
8,500.0	5.00	140.00	8,477.8	-392.3	329.1	407.7	0.00	0.00	0.00
8,600.0	5.00	140.00	8,577.4	-398.9	334.7	414.7	0.00	0.00	0.00
8,700.0	5.00	140.00	8,677.0	-405.6	340.3	421.6	0.00	0.00	0.00
8,800.0	5.00	140.00	8,776.7	-412.3	345.9	428.6	0.00	0.00	0.00
8,900.0	5.00	140.00	8,876.3	-419.0	351.5	435.5	0.00	0.00	0.00
9,000.0	5.00	140.00	8,975.9	-425.6	357.1	442.4	0.00	0.00	0.00
9,090.0	5.00	140.00	9,065.6	-431.6	362.2	448.7	0.00	0.00	0.00
Start DLS 12.00 TFO 20.94									
9,100.0	6.13	144.00	9,075.5	-432.4	362.8	449.5	12.00	11.36	40.18
9,200.0	17.95	155.35	9,173.1	-450.8	372.4	468.3	12.00	11.82	11.35
9,300.0	29.91	157.76	9,264.4	-488.0	388.3	506.3	12.00	11.96	2.41
9,400.0	41.90	158.87	9,345.2	-542.4	409.9	561.7	12.00	11.98	1.11
9,500.0	53.89	159.56	9,412.2	-611.7	436.1	632.1	12.00	11.99	0.69
9,600.0	65.88	160.07	9,462.3	-692.7	465.9	714.5	12.00	11.99	0.50

Concho Resources LLC

Survey Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Well:	KRAKEN ST COM #701H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP1	Database:	edm

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,700.0	77.87	160.48	9,493.3	-782.0	497.9	805.2	12.00	11.99	0.42
9,800.0	89.87	160.86	9,504.0	-875.7	530.7	900.4	12.00	11.99	0.38
9,802.4	90.15	160.87	9,504.0	-877.9	531.5	902.7	12.00	11.99	0.37
Start DLS 2.00 TFO 89.97									
9,900.0	90.15	162.82	9,503.7	-970.7	561.9	996.8	2.00	0.00	2.00
10,000.0	90.15	164.82	9,503.4	-1,066.7	589.8	1,094.1	2.00	0.00	2.00
10,100.0	90.15	166.82	9,503.2	-1,163.7	614.3	1,192.1	2.00	0.00	2.00
10,200.0	90.15	168.82	9,502.9	-1,261.4	635.4	1,290.7	2.00	0.00	2.00
10,300.0	90.15	170.82	9,502.7	-1,359.9	653.0	1,389.9	2.00	0.00	2.00
10,400.0	90.15	172.82	9,502.4	-1,458.8	667.2	1,489.4	2.00	0.00	2.00
10,500.0	90.15	174.82	9,502.1	-1,558.2	678.0	1,589.3	2.00	0.00	2.00
10,600.0	90.15	176.82	9,501.9	-1,658.0	685.3	1,689.2	2.00	0.00	2.00
10,700.0	90.15	178.82	9,501.6	-1,757.9	689.1	1,789.2	2.00	0.00	2.00
10,705.0	90.15	178.92	9,501.6	-1,762.9	689.2	1,794.2	2.00	0.00	2.00
Start 4141.3 hold at 10705.0 MD									
10,800.0	90.15	178.92	9,501.3	-1,857.9	691.0	1,889.2	0.00	0.00	0.00
10,900.0	90.15	178.92	9,501.1	-1,957.9	692.9	1,989.1	0.00	0.00	0.00
11,000.0	90.15	178.92	9,500.8	-2,057.8	694.7	2,089.1	0.00	0.00	0.00
11,100.0	90.15	178.92	9,500.5	-2,157.8	696.6	2,189.0	0.00	0.00	0.00
11,200.0	90.15	178.92	9,500.3	-2,257.8	698.5	2,289.0	0.00	0.00	0.00
11,300.0	90.15	178.92	9,500.0	-2,357.8	700.4	2,389.0	0.00	0.00	0.00
11,400.0	90.15	178.92	9,499.8	-2,457.8	702.3	2,488.9	0.00	0.00	0.00
11,500.0	90.15	178.92	9,499.5	-2,557.8	704.1	2,588.9	0.00	0.00	0.00
11,600.0	90.15	178.92	9,499.2	-2,657.7	706.0	2,688.8	0.00	0.00	0.00
11,700.0	90.15	178.92	9,499.0	-2,757.7	707.9	2,788.8	0.00	0.00	0.00
11,800.0	90.15	178.92	9,498.7	-2,857.7	709.8	2,888.7	0.00	0.00	0.00
11,900.0	90.15	178.92	9,498.4	-2,957.7	711.7	2,988.7	0.00	0.00	0.00
12,000.0	90.15	178.92	9,498.2	-3,057.7	713.5	3,088.6	0.00	0.00	0.00
12,100.0	90.15	178.92	9,497.9	-3,157.6	715.4	3,188.6	0.00	0.00	0.00
12,200.0	90.15	178.92	9,497.7	-3,257.6	717.3	3,288.6	0.00	0.00	0.00
12,300.0	90.15	178.92	9,497.4	-3,357.6	719.2	3,388.5	0.00	0.00	0.00
12,400.0	90.15	178.92	9,497.1	-3,457.6	721.1	3,488.5	0.00	0.00	0.00
12,500.0	90.15	178.92	9,496.9	-3,557.6	722.9	3,588.4	0.00	0.00	0.00
12,600.0	90.15	178.92	9,496.6	-3,657.6	724.8	3,688.4	0.00	0.00	0.00
12,700.0	90.15	178.92	9,496.3	-3,757.5	726.7	3,788.3	0.00	0.00	0.00
12,800.0	90.15	178.92	9,496.1	-3,857.5	728.6	3,888.3	0.00	0.00	0.00
12,900.0	90.15	178.92	9,495.8	-3,957.5	730.4	3,988.2	0.00	0.00	0.00
13,000.0	90.15	178.92	9,495.5	-4,057.5	732.3	4,088.2	0.00	0.00	0.00
13,100.0	90.15	178.92	9,495.3	-4,157.5	734.2	4,188.2	0.00	0.00	0.00
13,200.0	90.15	178.92	9,495.0	-4,257.4	736.1	4,288.1	0.00	0.00	0.00
13,300.0	90.15	178.92	9,494.8	-4,357.4	738.0	4,388.1	0.00	0.00	0.00
13,400.0	90.15	178.92	9,494.5	-4,457.4	739.8	4,488.0	0.00	0.00	0.00
13,500.0	90.15	178.92	9,494.2	-4,557.4	741.7	4,588.0	0.00	0.00	0.00

Concho Resources LLC

Survey Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Well:	KRAKEN ST COM #701H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP1	Database:	edm

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,600.0	90.15	178.92	9,494.0	-4,657.4	743.6	4,687.9	0.00	0.00	0.00
13,700.0	90.15	178.92	9,493.7	-4,757.4	745.5	4,787.9	0.00	0.00	0.00
13,800.0	90.15	178.92	9,493.4	-4,857.3	747.4	4,887.8	0.00	0.00	0.00
13,900.0	90.15	178.92	9,493.2	-4,957.3	749.2	4,987.8	0.00	0.00	0.00
14,000.0	90.15	178.92	9,492.9	-5,057.3	751.1	5,087.8	0.00	0.00	0.00
14,100.0	90.15	178.92	9,492.7	-5,157.3	753.0	5,187.7	0.00	0.00	0.00
14,200.0	90.15	178.92	9,492.4	-5,257.3	754.9	5,287.7	0.00	0.00	0.00
14,300.0	90.15	178.92	9,492.1	-5,357.3	756.8	5,387.6	0.00	0.00	0.00
14,400.0	90.15	178.92	9,491.9	-5,457.2	758.6	5,487.6	0.00	0.00	0.00
14,500.0	90.15	178.92	9,491.6	-5,557.2	760.5	5,587.5	0.00	0.00	0.00
14,600.0	90.15	178.92	9,491.3	-5,657.2	762.4	5,687.5	0.00	0.00	0.00
14,700.0	90.15	178.92	9,491.1	-5,757.2	764.3	5,787.4	0.00	0.00	0.00
14,800.0	90.15	178.92	9,490.8	-5,857.2	766.2	5,887.4	0.00	0.00	0.00
14,846.3	90.15	178.92	9,490.7	-5,903.5	767.0	5,933.7	0.00	0.00	0.00
Start DLS 2.00 TFO 90.19									
14,900.0	90.15	180.00	9,490.6	-5,957.1	767.5	5,987.3	2.00	-0.01	2.00
Start 5247.0 hold at 14900.0 MD									
15,000.0	90.15	180.00	9,490.3	-6,057.1	767.5	6,087.2	0.00	0.00	0.00
15,100.0	90.15	180.00	9,490.0	-6,157.1	767.6	6,187.1	0.00	0.00	0.00
15,200.0	90.15	180.00	9,489.8	-6,257.1	767.6	6,287.0	0.00	0.00	0.00
15,300.0	90.15	180.00	9,489.5	-6,357.1	767.6	6,386.9	0.00	0.00	0.00
15,400.0	90.15	180.00	9,489.3	-6,457.1	767.6	6,486.8	0.00	0.00	0.00
15,500.0	90.15	180.00	9,489.0	-6,557.1	767.6	6,586.6	0.00	0.00	0.00
15,600.0	90.15	180.00	9,488.8	-6,657.1	767.6	6,686.5	0.00	0.00	0.00
15,700.0	90.15	180.00	9,488.5	-6,757.1	767.6	6,786.4	0.00	0.00	0.00
15,800.0	90.15	180.00	9,488.3	-6,857.1	767.6	6,886.3	0.00	0.00	0.00
15,900.0	90.15	180.00	9,488.0	-6,957.1	767.6	6,986.2	0.00	0.00	0.00
16,000.0	90.15	180.00	9,487.7	-7,057.1	767.6	7,086.0	0.00	0.00	0.00
16,100.0	90.15	180.00	9,487.5	-7,157.1	767.6	7,185.9	0.00	0.00	0.00
16,200.0	90.15	180.00	9,487.2	-7,257.1	767.6	7,285.8	0.00	0.00	0.00
16,300.0	90.15	180.00	9,487.0	-7,357.1	767.6	7,385.7	0.00	0.00	0.00
16,400.0	90.15	180.00	9,486.7	-7,457.1	767.7	7,485.6	0.00	0.00	0.00
16,500.0	90.15	180.00	9,486.5	-7,557.1	767.7	7,585.5	0.00	0.00	0.00
16,600.0	90.15	180.00	9,486.2	-7,657.1	767.7	7,685.3	0.00	0.00	0.00
16,700.0	90.15	180.00	9,485.9	-7,757.1	767.7	7,785.2	0.00	0.00	0.00
16,800.0	90.15	180.00	9,485.7	-7,857.1	767.7	7,885.1	0.00	0.00	0.00
16,900.0	90.15	180.00	9,485.4	-7,957.1	767.7	7,985.0	0.00	0.00	0.00
17,000.0	90.15	180.00	9,485.2	-8,057.1	767.7	8,084.9	0.00	0.00	0.00
17,100.0	90.15	180.00	9,484.9	-8,157.1	767.7	8,184.8	0.00	0.00	0.00
17,200.0	90.15	180.00	9,484.7	-8,257.1	767.7	8,284.6	0.00	0.00	0.00
17,300.0	90.15	180.00	9,484.4	-8,357.1	767.7	8,384.5	0.00	0.00	0.00
17,400.0	90.15	180.00	9,484.1	-8,457.1	767.7	8,484.4	0.00	0.00	0.00
17,500.0	90.15	180.00	9,483.9	-8,557.1	767.7	8,584.3	0.00	0.00	0.00
17,600.0	90.15	180.00	9,483.6	-8,657.1	767.7	8,684.2	0.00	0.00	0.00

Concho Resources LLC

Survey Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Well:	KRAKEN ST COM #701H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP1	Database:	edm

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
17,700.0	90.15	180.00	9,483.4	-8,757.1	767.8	8,784.1	0.00	0.00	0.00	
17,800.0	90.15	180.00	9,483.1	-8,857.1	767.8	8,883.9	0.00	0.00	0.00	
17,900.0	90.15	180.00	9,482.9	-8,957.1	767.8	8,983.8	0.00	0.00	0.00	
18,000.0	90.15	180.00	9,482.6	-9,057.1	767.8	9,083.7	0.00	0.00	0.00	
18,100.0	90.15	180.00	9,482.4	-9,157.1	767.8	9,183.6	0.00	0.00	0.00	
18,200.0	90.15	180.00	9,482.1	-9,257.1	767.8	9,283.5	0.00	0.00	0.00	
18,300.0	90.15	180.00	9,481.8	-9,357.1	767.8	9,383.3	0.00	0.00	0.00	
18,400.0	90.15	180.00	9,481.6	-9,457.1	767.8	9,483.2	0.00	0.00	0.00	
18,500.0	90.15	180.00	9,481.3	-9,557.1	767.8	9,583.1	0.00	0.00	0.00	
18,600.0	90.15	180.00	9,481.1	-9,657.1	767.8	9,683.0	0.00	0.00	0.00	
18,700.0	90.15	180.00	9,480.8	-9,757.1	767.8	9,782.9	0.00	0.00	0.00	
18,800.0	90.15	180.00	9,480.6	-9,857.1	767.8	9,882.8	0.00	0.00	0.00	
18,900.0	90.15	180.00	9,480.3	-9,957.1	767.8	9,982.6	0.00	0.00	0.00	
19,000.0	90.15	180.00	9,480.0	-10,057.1	767.9	10,082.5	0.00	0.00	0.00	
19,100.0	90.15	180.00	9,479.8	-10,157.1	767.9	10,182.4	0.00	0.00	0.00	
19,200.0	90.15	180.00	9,479.5	-10,257.1	767.9	10,282.3	0.00	0.00	0.00	
19,300.0	90.15	180.00	9,479.3	-10,357.1	767.9	10,382.2	0.00	0.00	0.00	
19,400.0	90.15	180.00	9,479.0	-10,457.1	767.9	10,482.1	0.00	0.00	0.00	
19,500.0	90.15	180.00	9,478.8	-10,557.1	767.9	10,581.9	0.00	0.00	0.00	
19,600.0	90.15	180.00	9,478.5	-10,657.1	767.9	10,681.8	0.00	0.00	0.00	
19,700.0	90.15	180.00	9,478.2	-10,757.1	767.9	10,781.7	0.00	0.00	0.00	
19,800.0	90.15	180.00	9,478.0	-10,857.1	767.9	10,881.6	0.00	0.00	0.00	
19,900.0	90.15	180.00	9,477.7	-10,957.1	767.9	10,981.5	0.00	0.00	0.00	
20,000.0	90.15	180.00	9,477.5	-11,057.1	767.9	11,081.4	0.00	0.00	0.00	
20,100.0	90.15	180.00	9,477.2	-11,157.1	767.9	11,181.2	0.00	0.00	0.00	
20,146.9	90.15	180.00	9,477.1	-11,204.0	767.9	11,228.1	0.00	0.00	0.00	
Start DLS 2.00 TFO -89.99										
20,159.7	90.15	179.74	9,477.1	-11,216.8	768.0	11,240.8	2.00	0.00	-2.00	
Start 5092.3 hold at 20159.7 MD										
20,200.0	90.15	179.74	9,477.0	-11,257.1	768.2	11,281.1	0.00	0.00	0.00	
20,300.0	90.15	179.74	9,476.7	-11,357.1	768.6	11,381.0	0.00	0.00	0.00	
20,400.0	90.15	179.74	9,476.5	-11,457.1	769.1	11,480.9	0.00	0.00	0.00	
20,500.0	90.15	179.74	9,476.2	-11,557.1	769.5	11,580.8	0.00	0.00	0.00	
20,600.0	90.15	179.74	9,475.9	-11,657.1	770.0	11,680.7	0.00	0.00	0.00	
20,700.0	90.15	179.74	9,475.7	-11,757.1	770.4	11,780.6	0.00	0.00	0.00	
20,800.0	90.15	179.74	9,475.4	-11,857.1	770.9	11,880.5	0.00	0.00	0.00	
20,900.0	90.15	179.74	9,475.2	-11,957.1	771.3	11,980.4	0.00	0.00	0.00	
21,000.0	90.15	179.74	9,474.9	-12,057.1	771.8	12,080.4	0.00	0.00	0.00	
21,100.0	90.15	179.74	9,474.7	-12,157.1	772.2	12,180.3	0.00	0.00	0.00	
21,200.0	90.15	179.74	9,474.4	-12,257.1	772.7	12,280.2	0.00	0.00	0.00	
21,300.0	90.15	179.74	9,474.1	-12,357.1	773.1	12,380.1	0.00	0.00	0.00	
21,400.0	90.15	179.74	9,473.9	-12,457.1	773.6	12,480.0	0.00	0.00	0.00	
21,500.0	90.15	179.74	9,473.6	-12,557.1	774.1	12,579.9	0.00	0.00	0.00	
21,600.0	90.15	179.74	9,473.4	-12,657.1	774.5	12,679.8	0.00	0.00	0.00	

Concho Resources LLC

Survey Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Well:	KRAKEN ST COM #701H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP1	Database:	edm

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
21,700.0	90.15	179.74	9,473.1	-12,757.1	775.0	12,779.7	0.00	0.00	0.00
21,800.0	90.15	179.74	9,472.9	-12,857.1	775.4	12,879.6	0.00	0.00	0.00
21,900.0	90.15	179.74	9,472.6	-12,957.1	775.9	12,979.5	0.00	0.00	0.00
22,000.0	90.15	179.74	9,472.3	-13,057.1	776.3	13,079.4	0.00	0.00	0.00
22,100.0	90.15	179.74	9,472.1	-13,157.1	776.8	13,179.3	0.00	0.00	0.00
22,200.0	90.15	179.74	9,471.8	-13,257.1	777.2	13,279.2	0.00	0.00	0.00
22,300.0	90.15	179.74	9,471.6	-13,357.1	777.7	13,379.1	0.00	0.00	0.00
22,400.0	90.15	179.74	9,471.3	-13,457.1	778.1	13,479.0	0.00	0.00	0.00
22,500.0	90.15	179.74	9,471.1	-13,557.1	778.6	13,578.9	0.00	0.00	0.00
22,600.0	90.15	179.74	9,470.8	-13,657.1	779.0	13,678.8	0.00	0.00	0.00
22,700.0	90.15	179.74	9,470.5	-13,757.1	779.5	13,778.7	0.00	0.00	0.00
22,800.0	90.15	179.74	9,470.3	-13,857.1	779.9	13,878.6	0.00	0.00	0.00
22,900.0	90.15	179.74	9,470.0	-13,957.1	780.4	13,978.5	0.00	0.00	0.00
23,000.0	90.15	179.74	9,469.8	-14,057.1	780.9	14,078.4	0.00	0.00	0.00
23,100.0	90.15	179.74	9,469.5	-14,157.1	781.3	14,178.3	0.00	0.00	0.00
23,200.0	90.15	179.74	9,469.3	-14,257.1	781.8	14,278.2	0.00	0.00	0.00
23,300.0	90.15	179.74	9,469.0	-14,357.1	782.2	14,378.1	0.00	0.00	0.00
23,400.0	90.15	179.74	9,468.8	-14,457.1	782.7	14,478.0	0.00	0.00	0.00
23,500.0	90.15	179.74	9,468.5	-14,557.1	783.1	14,577.9	0.00	0.00	0.00
23,600.0	90.15	179.74	9,468.2	-14,657.1	783.6	14,677.8	0.00	0.00	0.00
23,700.0	90.15	179.74	9,468.0	-14,757.1	784.0	14,777.7	0.00	0.00	0.00
23,800.0	90.15	179.74	9,467.7	-14,857.1	784.5	14,877.6	0.00	0.00	0.00
23,900.0	90.15	179.74	9,467.5	-14,957.1	784.9	14,977.5	0.00	0.00	0.00
24,000.0	90.15	179.74	9,467.2	-15,057.1	785.4	15,077.4	0.00	0.00	0.00
24,100.0	90.15	179.74	9,467.0	-15,157.1	785.8	15,177.4	0.00	0.00	0.00
24,200.0	90.15	179.74	9,466.7	-15,257.1	786.3	15,277.3	0.00	0.00	0.00
24,300.0	90.15	179.74	9,466.4	-15,357.1	786.7	15,377.2	0.00	0.00	0.00
24,400.0	90.15	179.74	9,466.2	-15,457.1	787.2	15,477.1	0.00	0.00	0.00
24,500.0	90.15	179.74	9,465.9	-15,557.1	787.7	15,577.0	0.00	0.00	0.00
24,600.0	90.15	179.74	9,465.7	-15,657.1	788.1	15,676.9	0.00	0.00	0.00
24,700.0	90.15	179.74	9,465.4	-15,757.1	788.6	15,776.8	0.00	0.00	0.00
24,800.0	90.15	179.74	9,465.2	-15,857.1	789.0	15,876.7	0.00	0.00	0.00
24,900.0	90.15	179.74	9,464.9	-15,957.1	789.5	15,976.6	0.00	0.00	0.00
25,000.0	90.15	179.74	9,464.6	-16,057.1	789.9	16,076.5	0.00	0.00	0.00
25,100.0	90.15	179.74	9,464.4	-16,157.1	790.4	16,176.4	0.00	0.00	0.00
25,200.0	90.15	179.74	9,464.1	-16,257.1	790.8	16,276.3	0.00	0.00	0.00
25,252.0	90.15	179.74	9,464.0	-16,309.1	791.1	16,328.3	0.00	0.00	0.00
TD at 25252.0									

Concho Resources LLC

Survey Report



Company:	DELAWARE BASIN WEST	Local Co-ordinate Reference:	Well KRAKEN ST COM #701H
Project:	ATLAS PROSPECT (NM-E)	TVD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Site:	KRAKEN ST COM PROJECT	MD Reference:	KB=26' @ 2984.0usft (PIONEER 84)
Well:	KRAKEN ST COM #701H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	PWP1	Database:	edm

Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
LTP (KRAKEN ST CO - plan misses target center by 0.8usft at 25122.0usft MD (9464.3 TVD, -16179.1 N, 790.5 E) - Point	0.00	0.00	9,464.0	-16,179.1	789.8	376,896.61	577,281.33	32° 2' 9.449 N	104° 5' 2.175 W
PBHL (KRAKEN ST C - plan hits target center - Rectangle (sides W100.0 H5,104.0 D20.0)	0.15	359.74	9,464.0	-16,309.1	791.1	376,766.61	577,282.64	32° 2' 8.163 N	104° 5' 2.163 W
POI 2 (KRAKEN ST C - plan hits target center - Rectangle (sides W100.0 H5,306.0 D20.0)	0.15	0.00	9,477.1	-11,204.0	767.9	381,871.66	577,259.52	32° 2' 58.686 N	104° 5' 2.295 W
POI 1 (KRAKEN ST C - plan hits target center - Rectangle (sides W100.0 H5,340.0 D20.0)	0.15	358.92	9,490.7	-5,903.5	767.0	387,172.22	577,258.61	32° 3' 51.143 N	104° 5' 2.163 W
FTP (KRAKEN ST CC - plan misses target center by 220.8usft at 9602.6usft MD (9463.3 TVD, -695.0 N, 466.7 E) - Circle (radius 50.0)	0.00	0.00	9,504.0	-609.4	666.1	392,466.27	577,157.65	32° 4' 43.538 N	104° 5' 3.194 W



Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
2500	2500	0	0	Start Build 2.00
2750	2750	-8	7	Start 6340.0 hold at 2750.0 MD
9090	9066	-432	362	Start DLS 12.00 TFO 20.94
9802	9504	-878	531	Start DLS 2.00 TFO 89.97
10,705	9502	-1763	689	Start 4141.3 hold at 10705.0 MD
14,846	9491	-5903	767	Start DLS 2.00 TFO 90.19
14,900	9491	-5957	768	Start 5247.0 hold at 14900.0 MD
20,147	9477	-11,204	768	Start DLS 2.00 TFO -89.99
20,160	9477	-11,217	768	Start 5092.3 hold at 20159.7 MD
25,252	9464	-16,309	791	TD at 25252.0







Checked By: _____ Approved By: _____ Date: _____



Project: ATLAS PROSPECT (NM-E)
Site: KRAKEN ST COM PROJECT
Well: KRAKEN ST COM #701H
Wellbore: OWB
Design: PWP1
GL: 2959.0
KB=26° @ 2984.0usft (PIONEER 84)

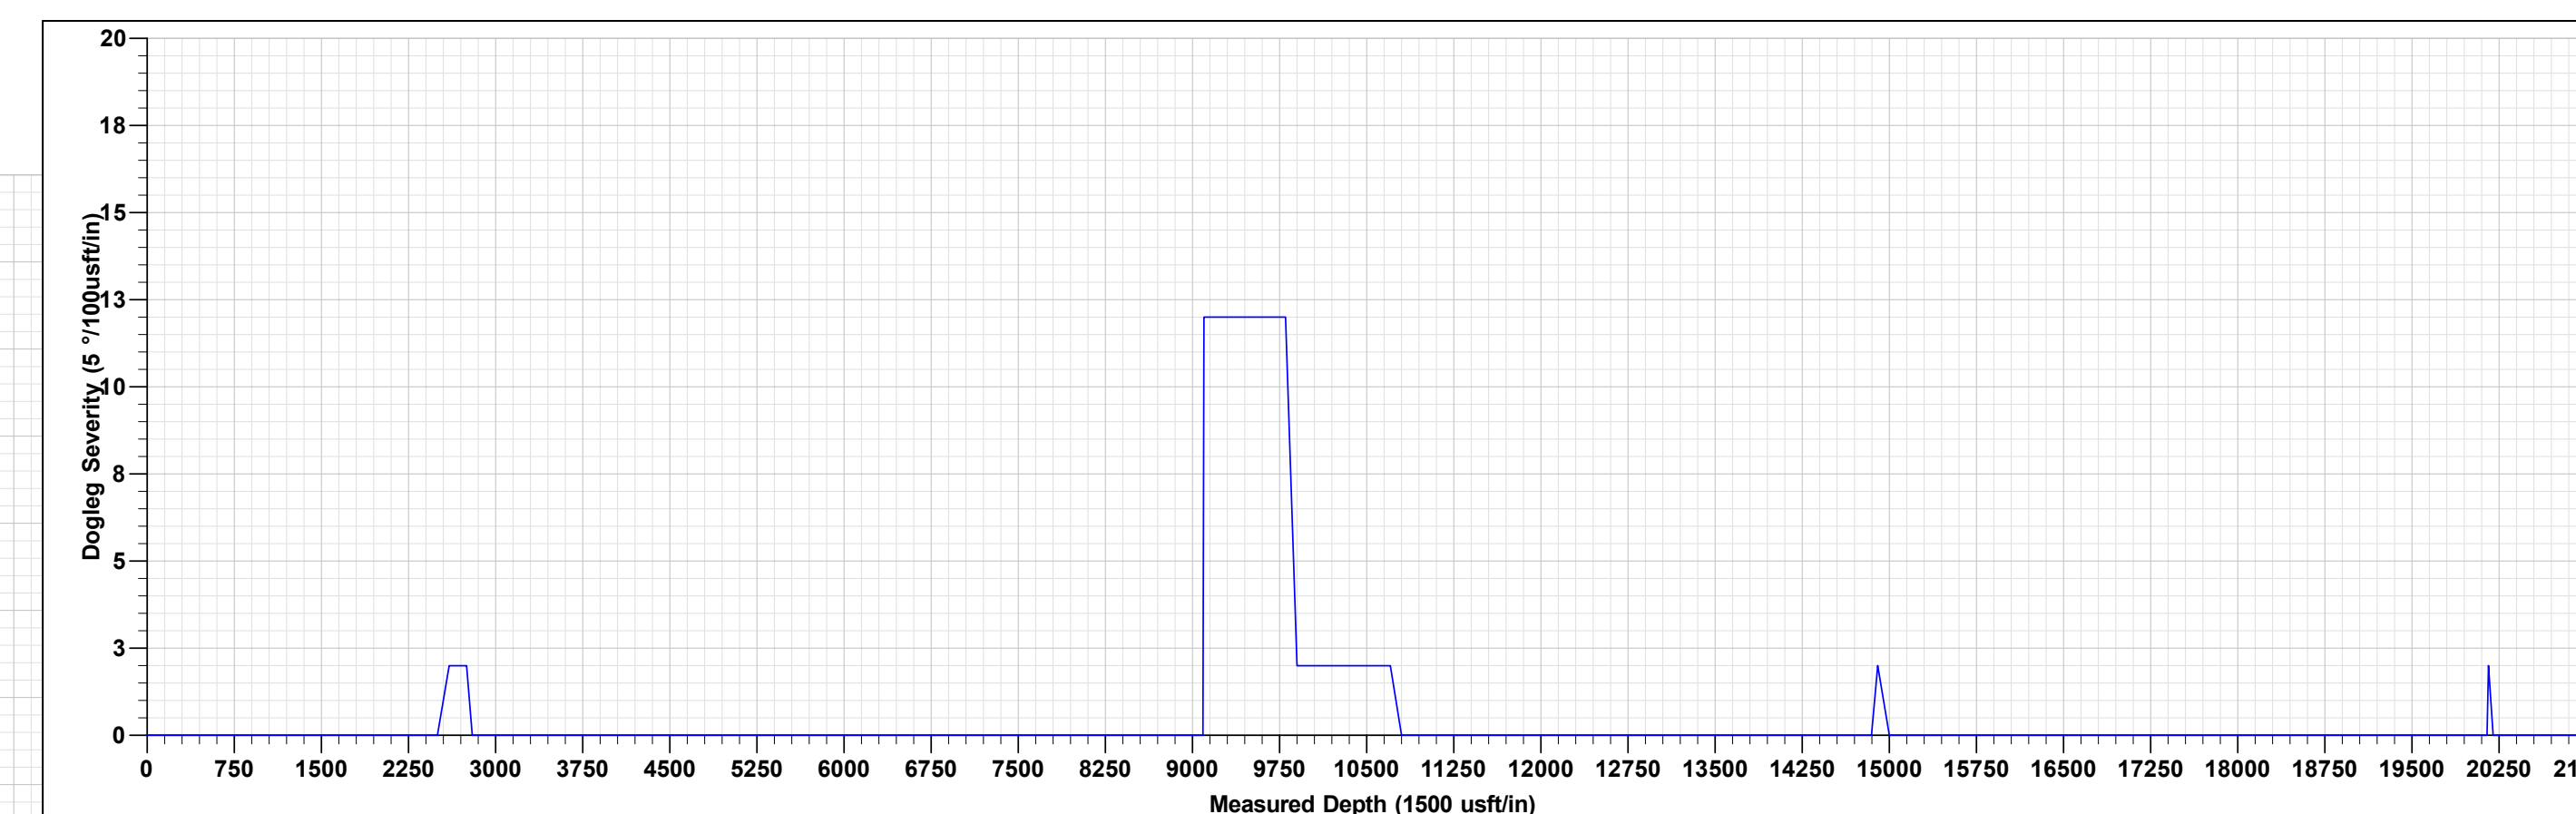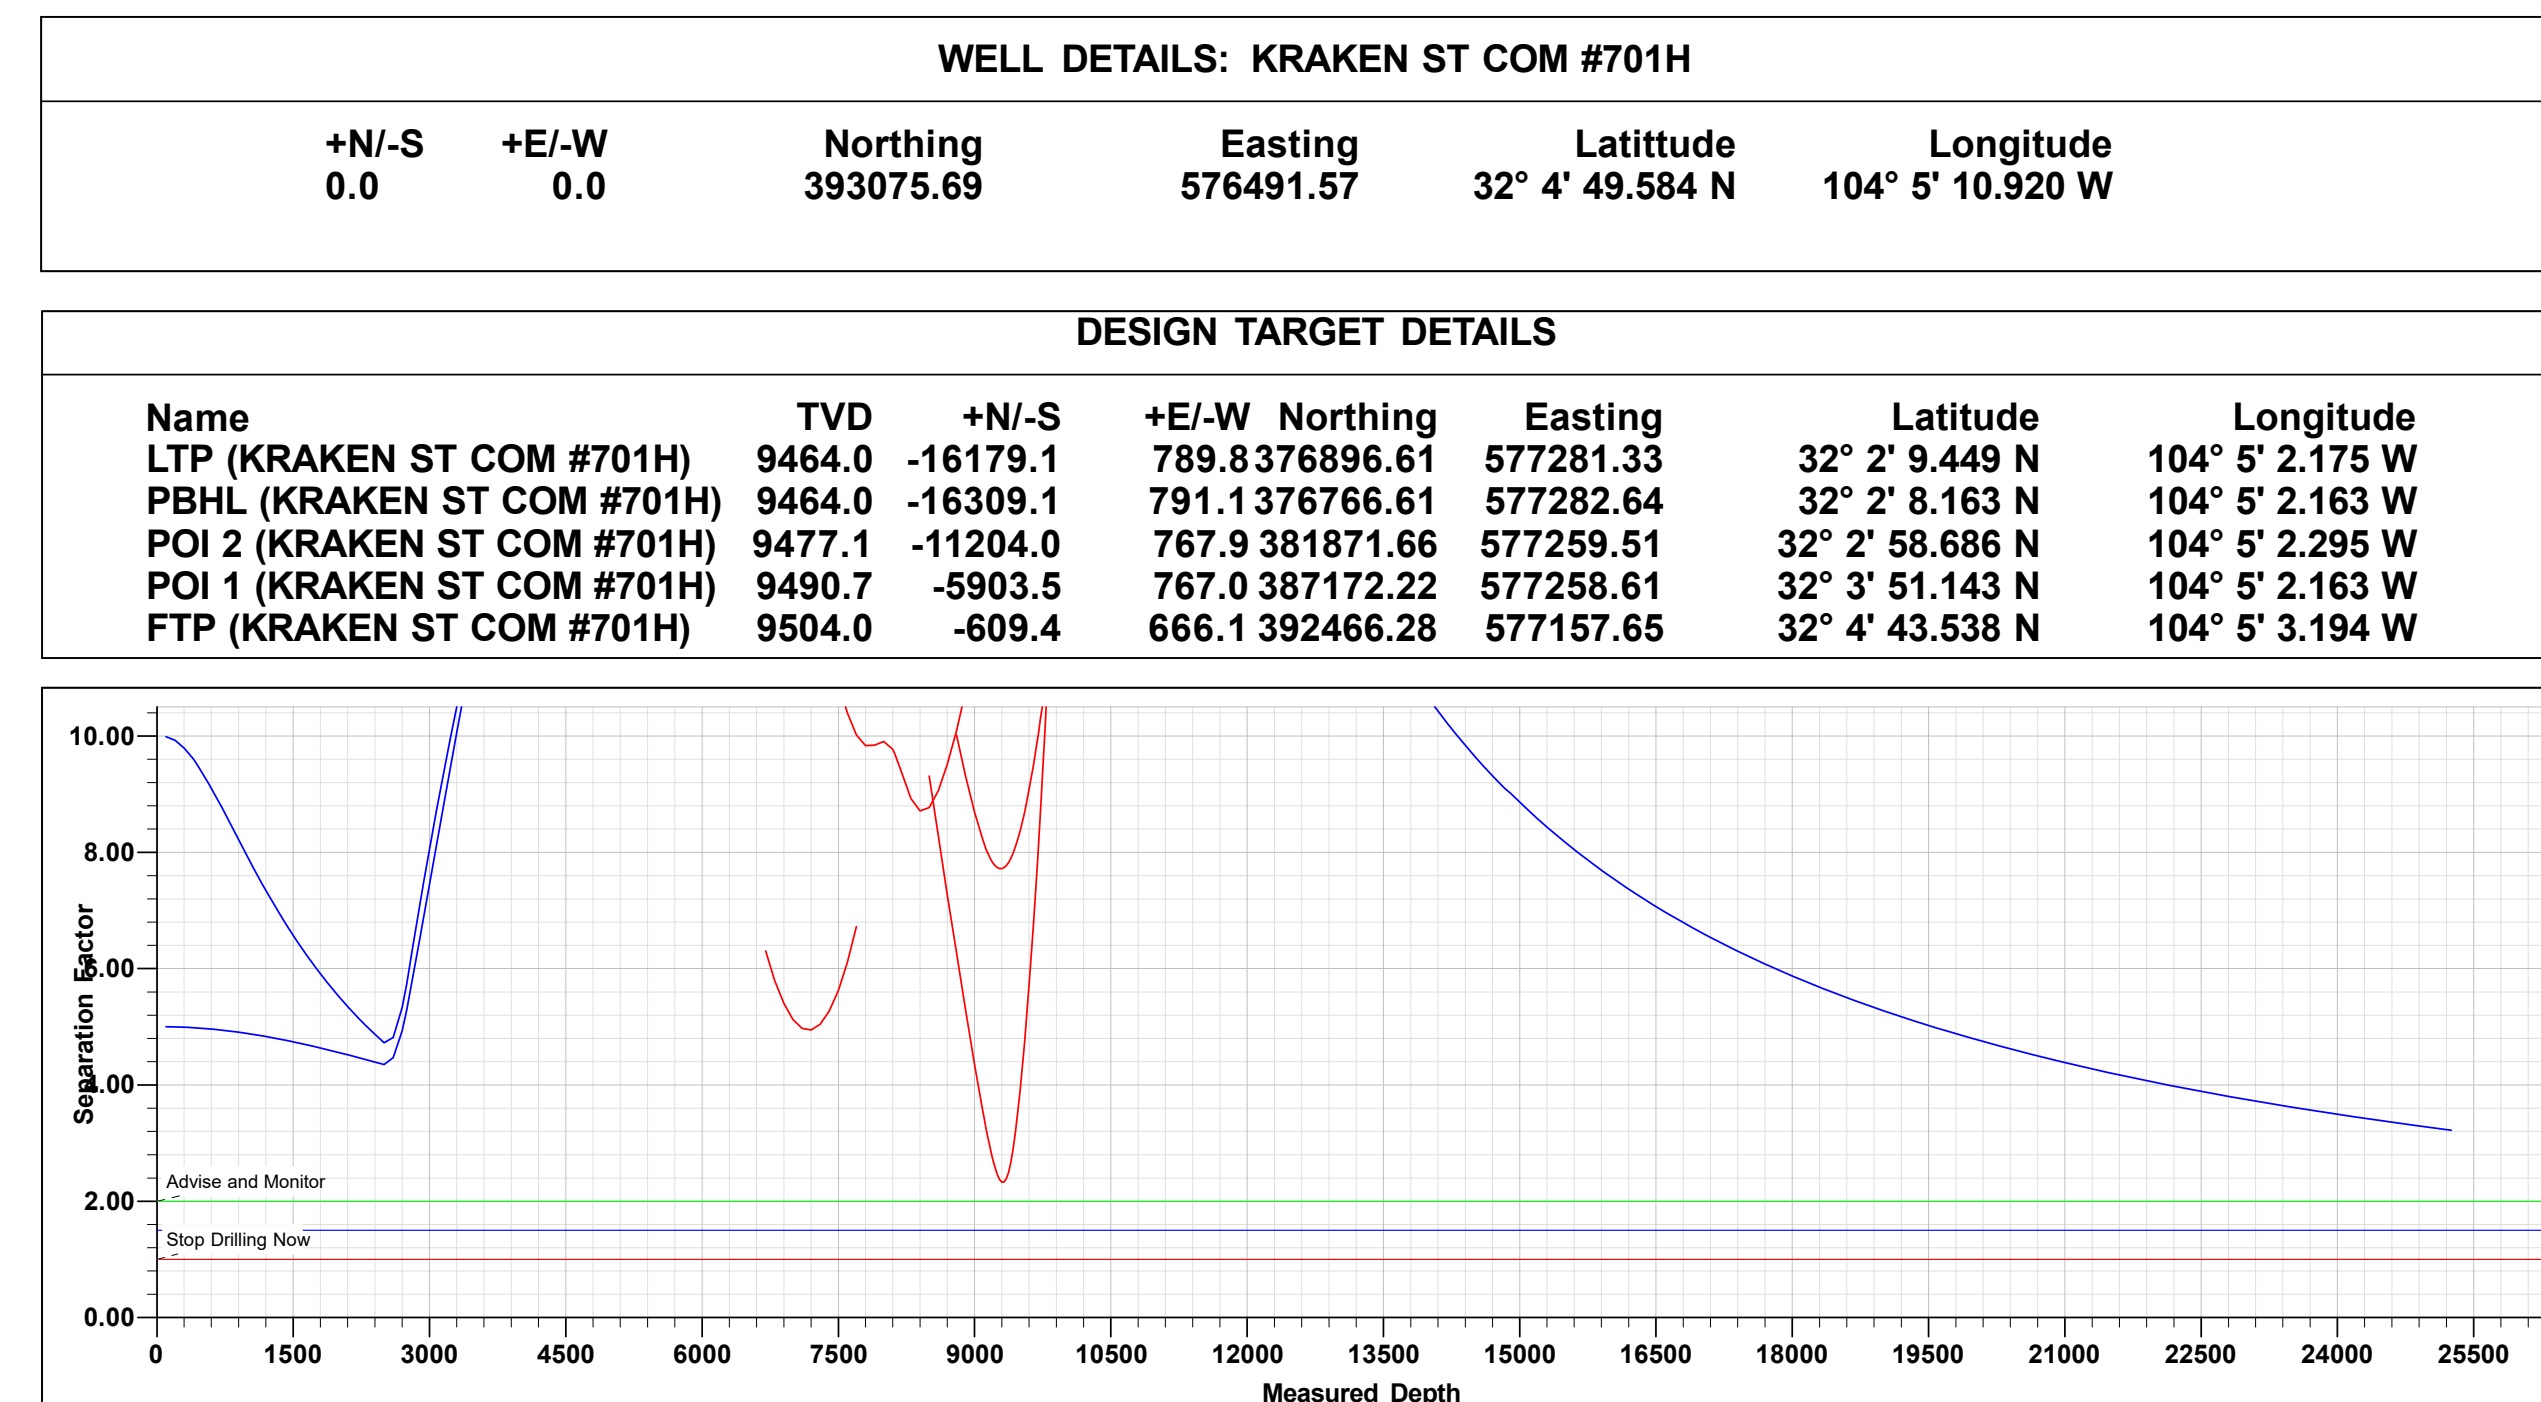

KRAKEN ST COM #701H									
MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Annotation
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2500.0	0.00	0.00	2500.0	0.0	0.0	0.00	0.00	0.0	Start Build 2.00
2750.0	5.00	140.00	2749.7	-8.4	7.0	2.00	140.00	8.7	Start 6340.0 hold at 2750.0 MD
9090.0	5.00	140.00	9065.6	-431.6	362.2	0.00	0.00	448.7	Start DLS 12.00 TFO 20.94
9802.4	90.15	160.87	9504.0	-877.9	531.5	12.00	20.94	902.7	Start DLS 2.00 TFO 89.97
10705.0	90.15	178.92	9501.6	-1762.9	689.2	2.00	89.97	1794.2	Start 4141.3 hold at 10705.0 MD
14846.3	90.15	178.92	9490.7	-5903.5	767.0	0.00	0.00	5933.7	Start DLS 2.00 TFO 90.19
14900.0	90.15	180.00	9490.6	-5957.1	767.5	2.00	90.19	5987.3	Start 5247.0 hold at 14900.0 MD
20146.9	90.15	180.00	9477.1	-11204.0	767.9	0.00	0.00	11228.1	Start DLS 2.00 TFO -89.99
20159.7	90.15	179.74	9477.1	-11216.8	768.0	2.00	-89.99	11240.8	Start 5092.3 hold at 20159.7 MD
25252.0	90.15	179.74	9464.0	-16309.1	791.1	0.00	0.00	16328.3	TD at 25252.0

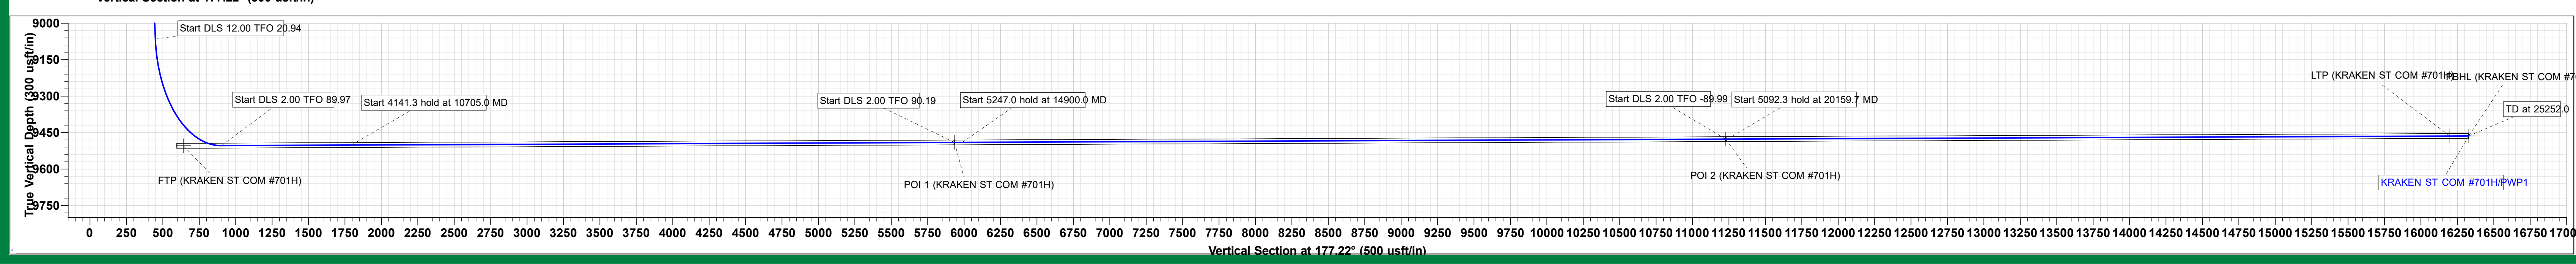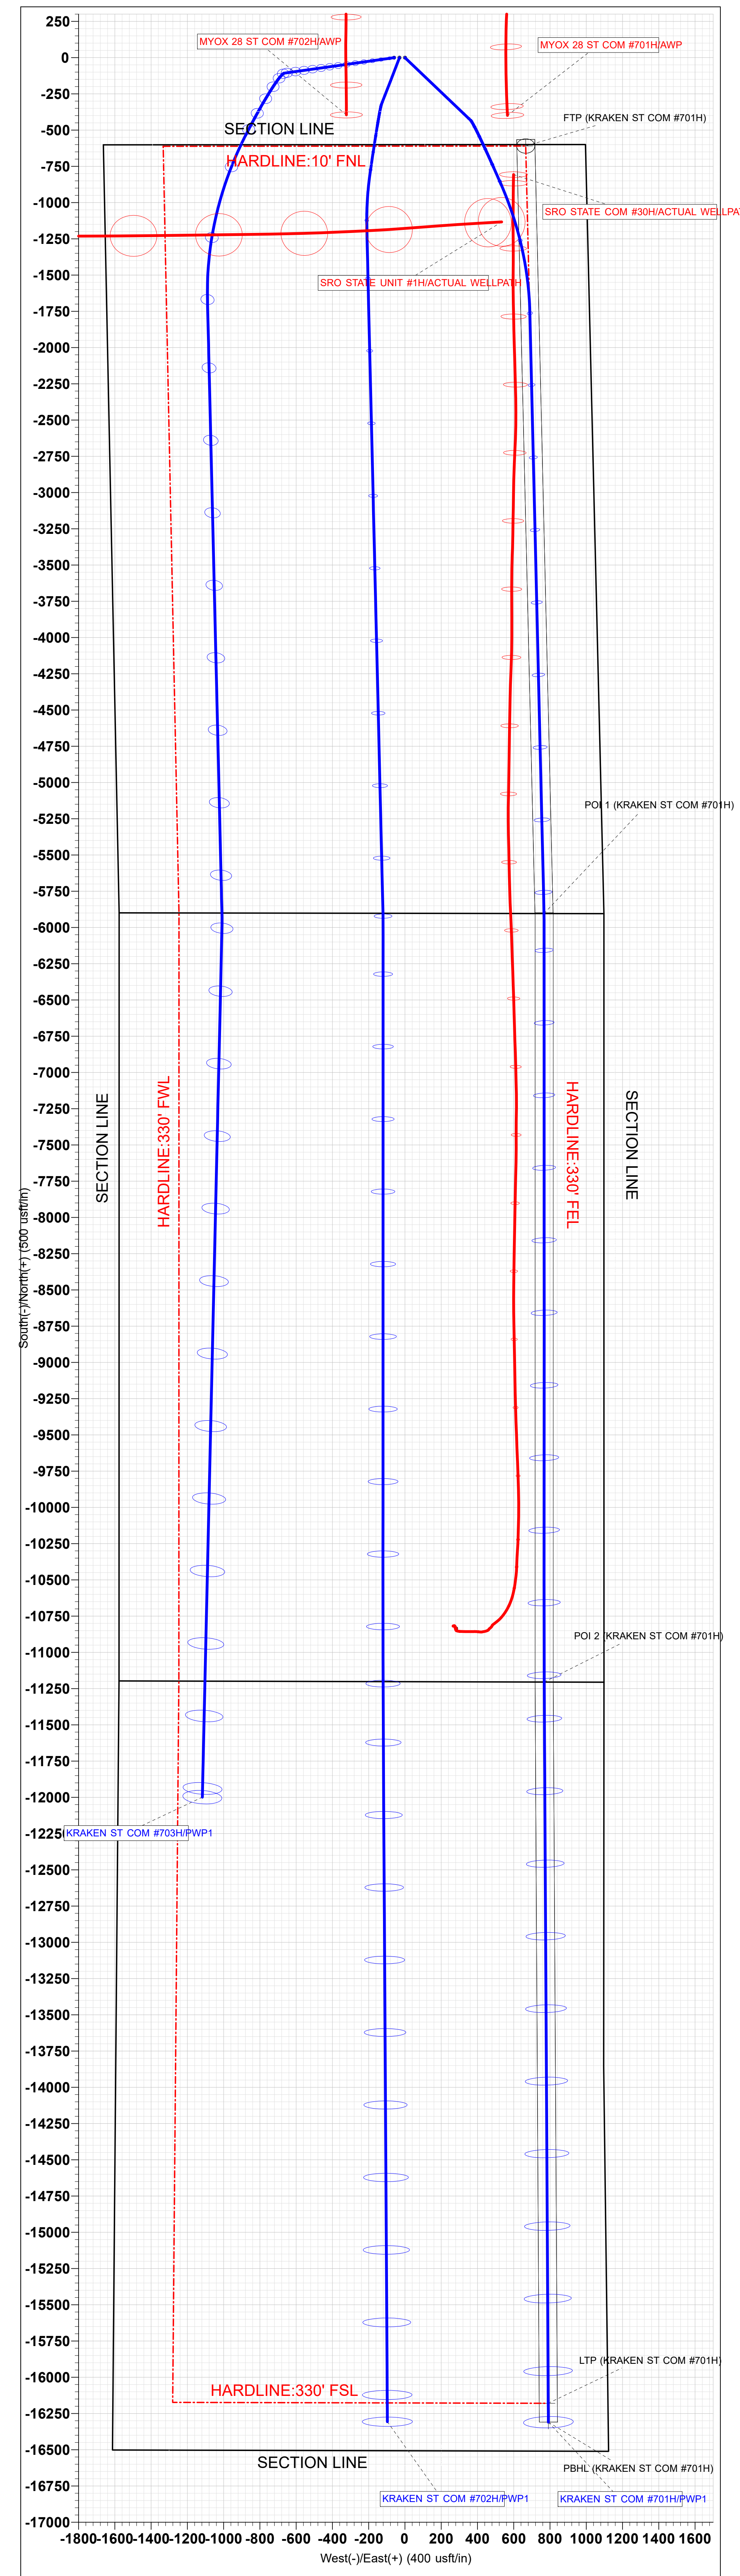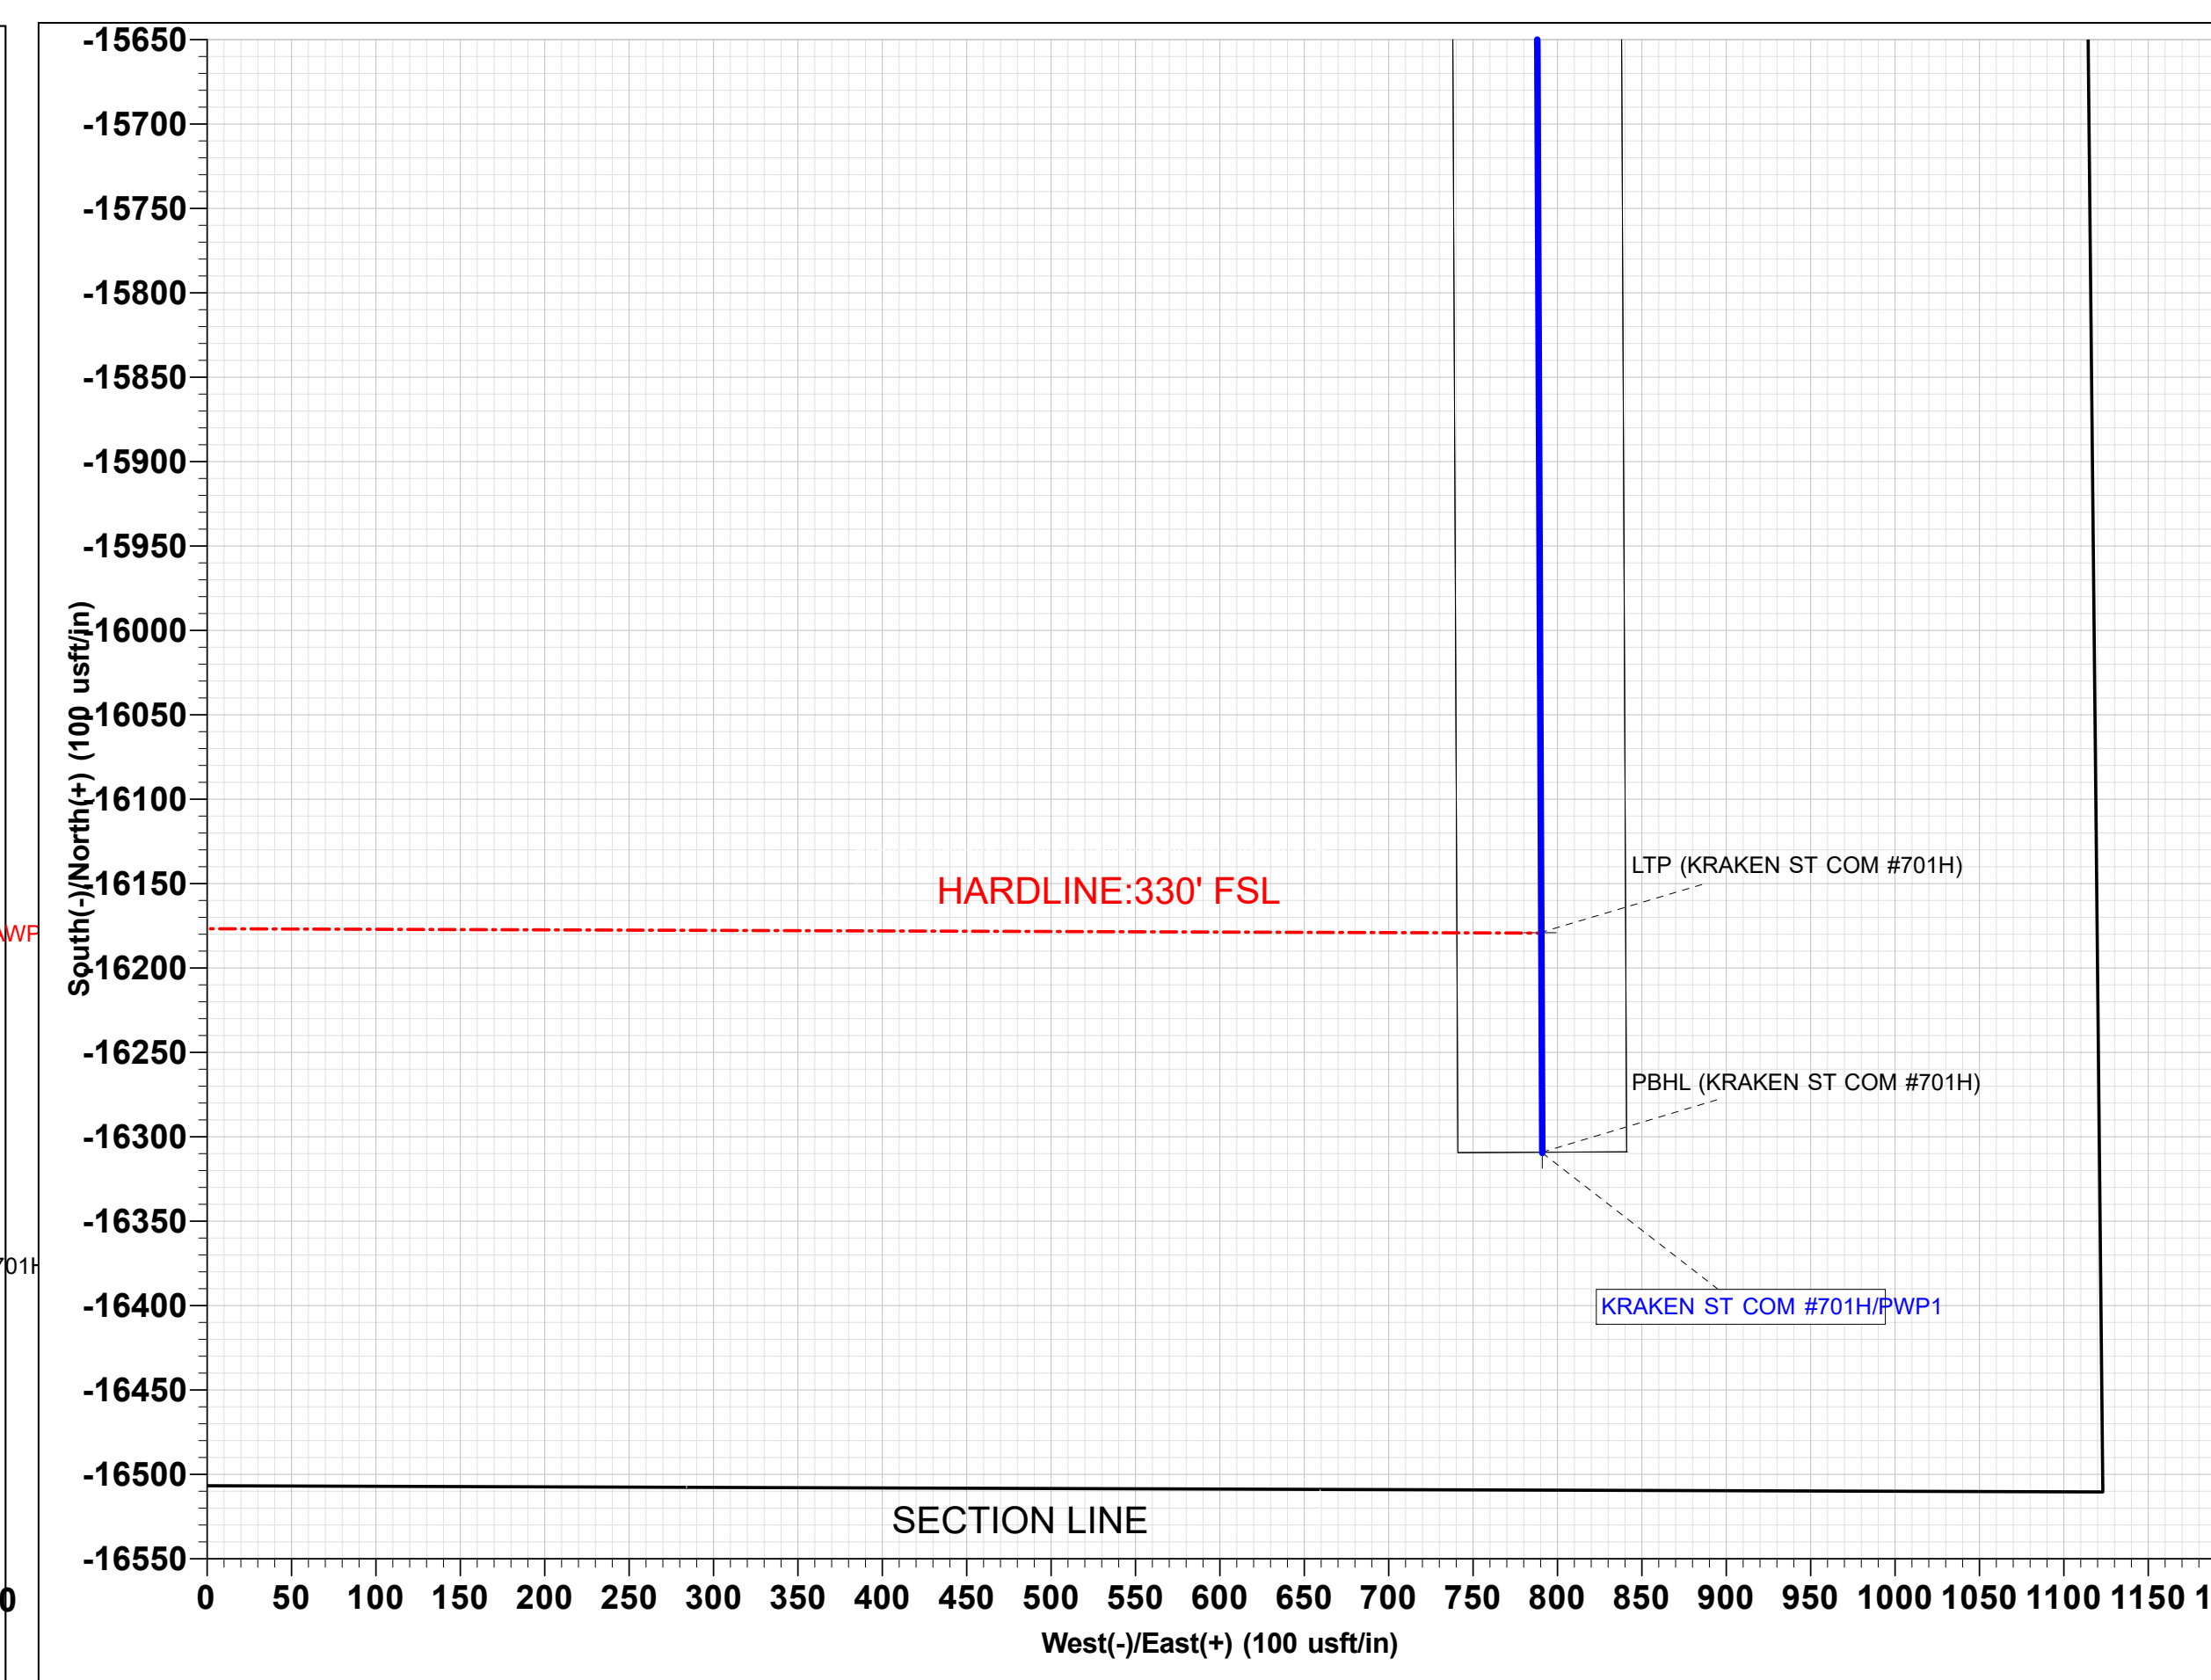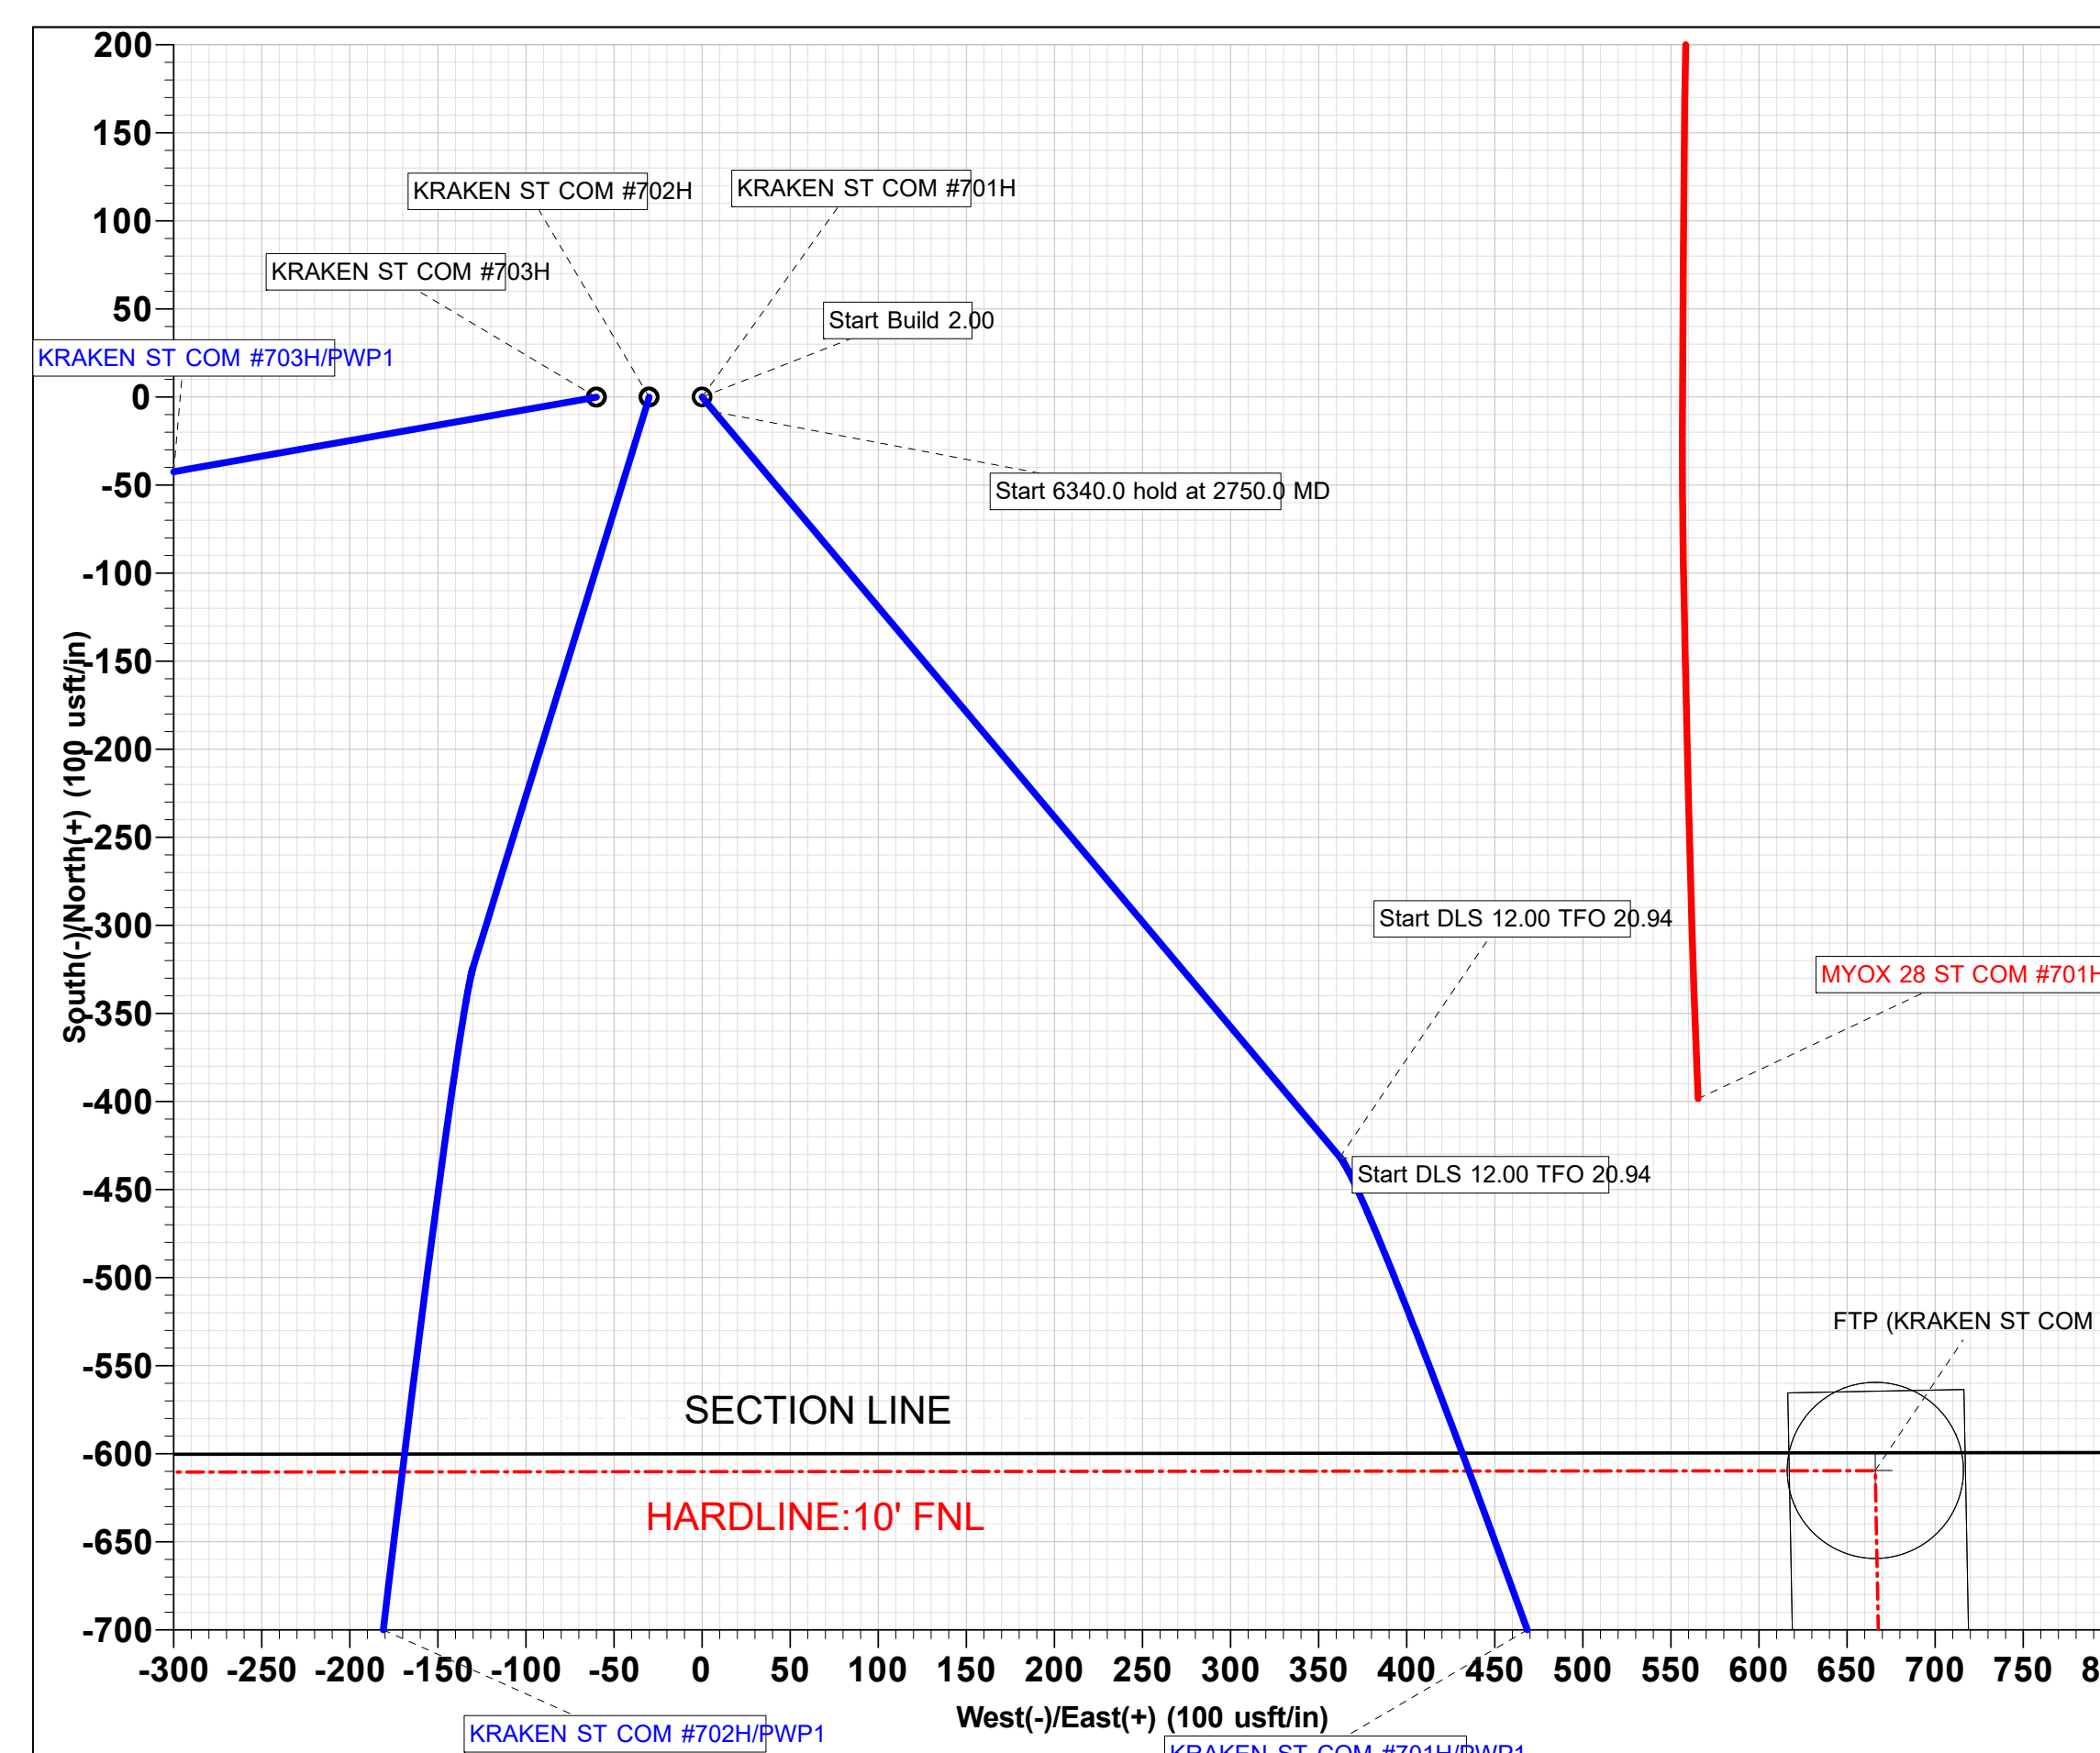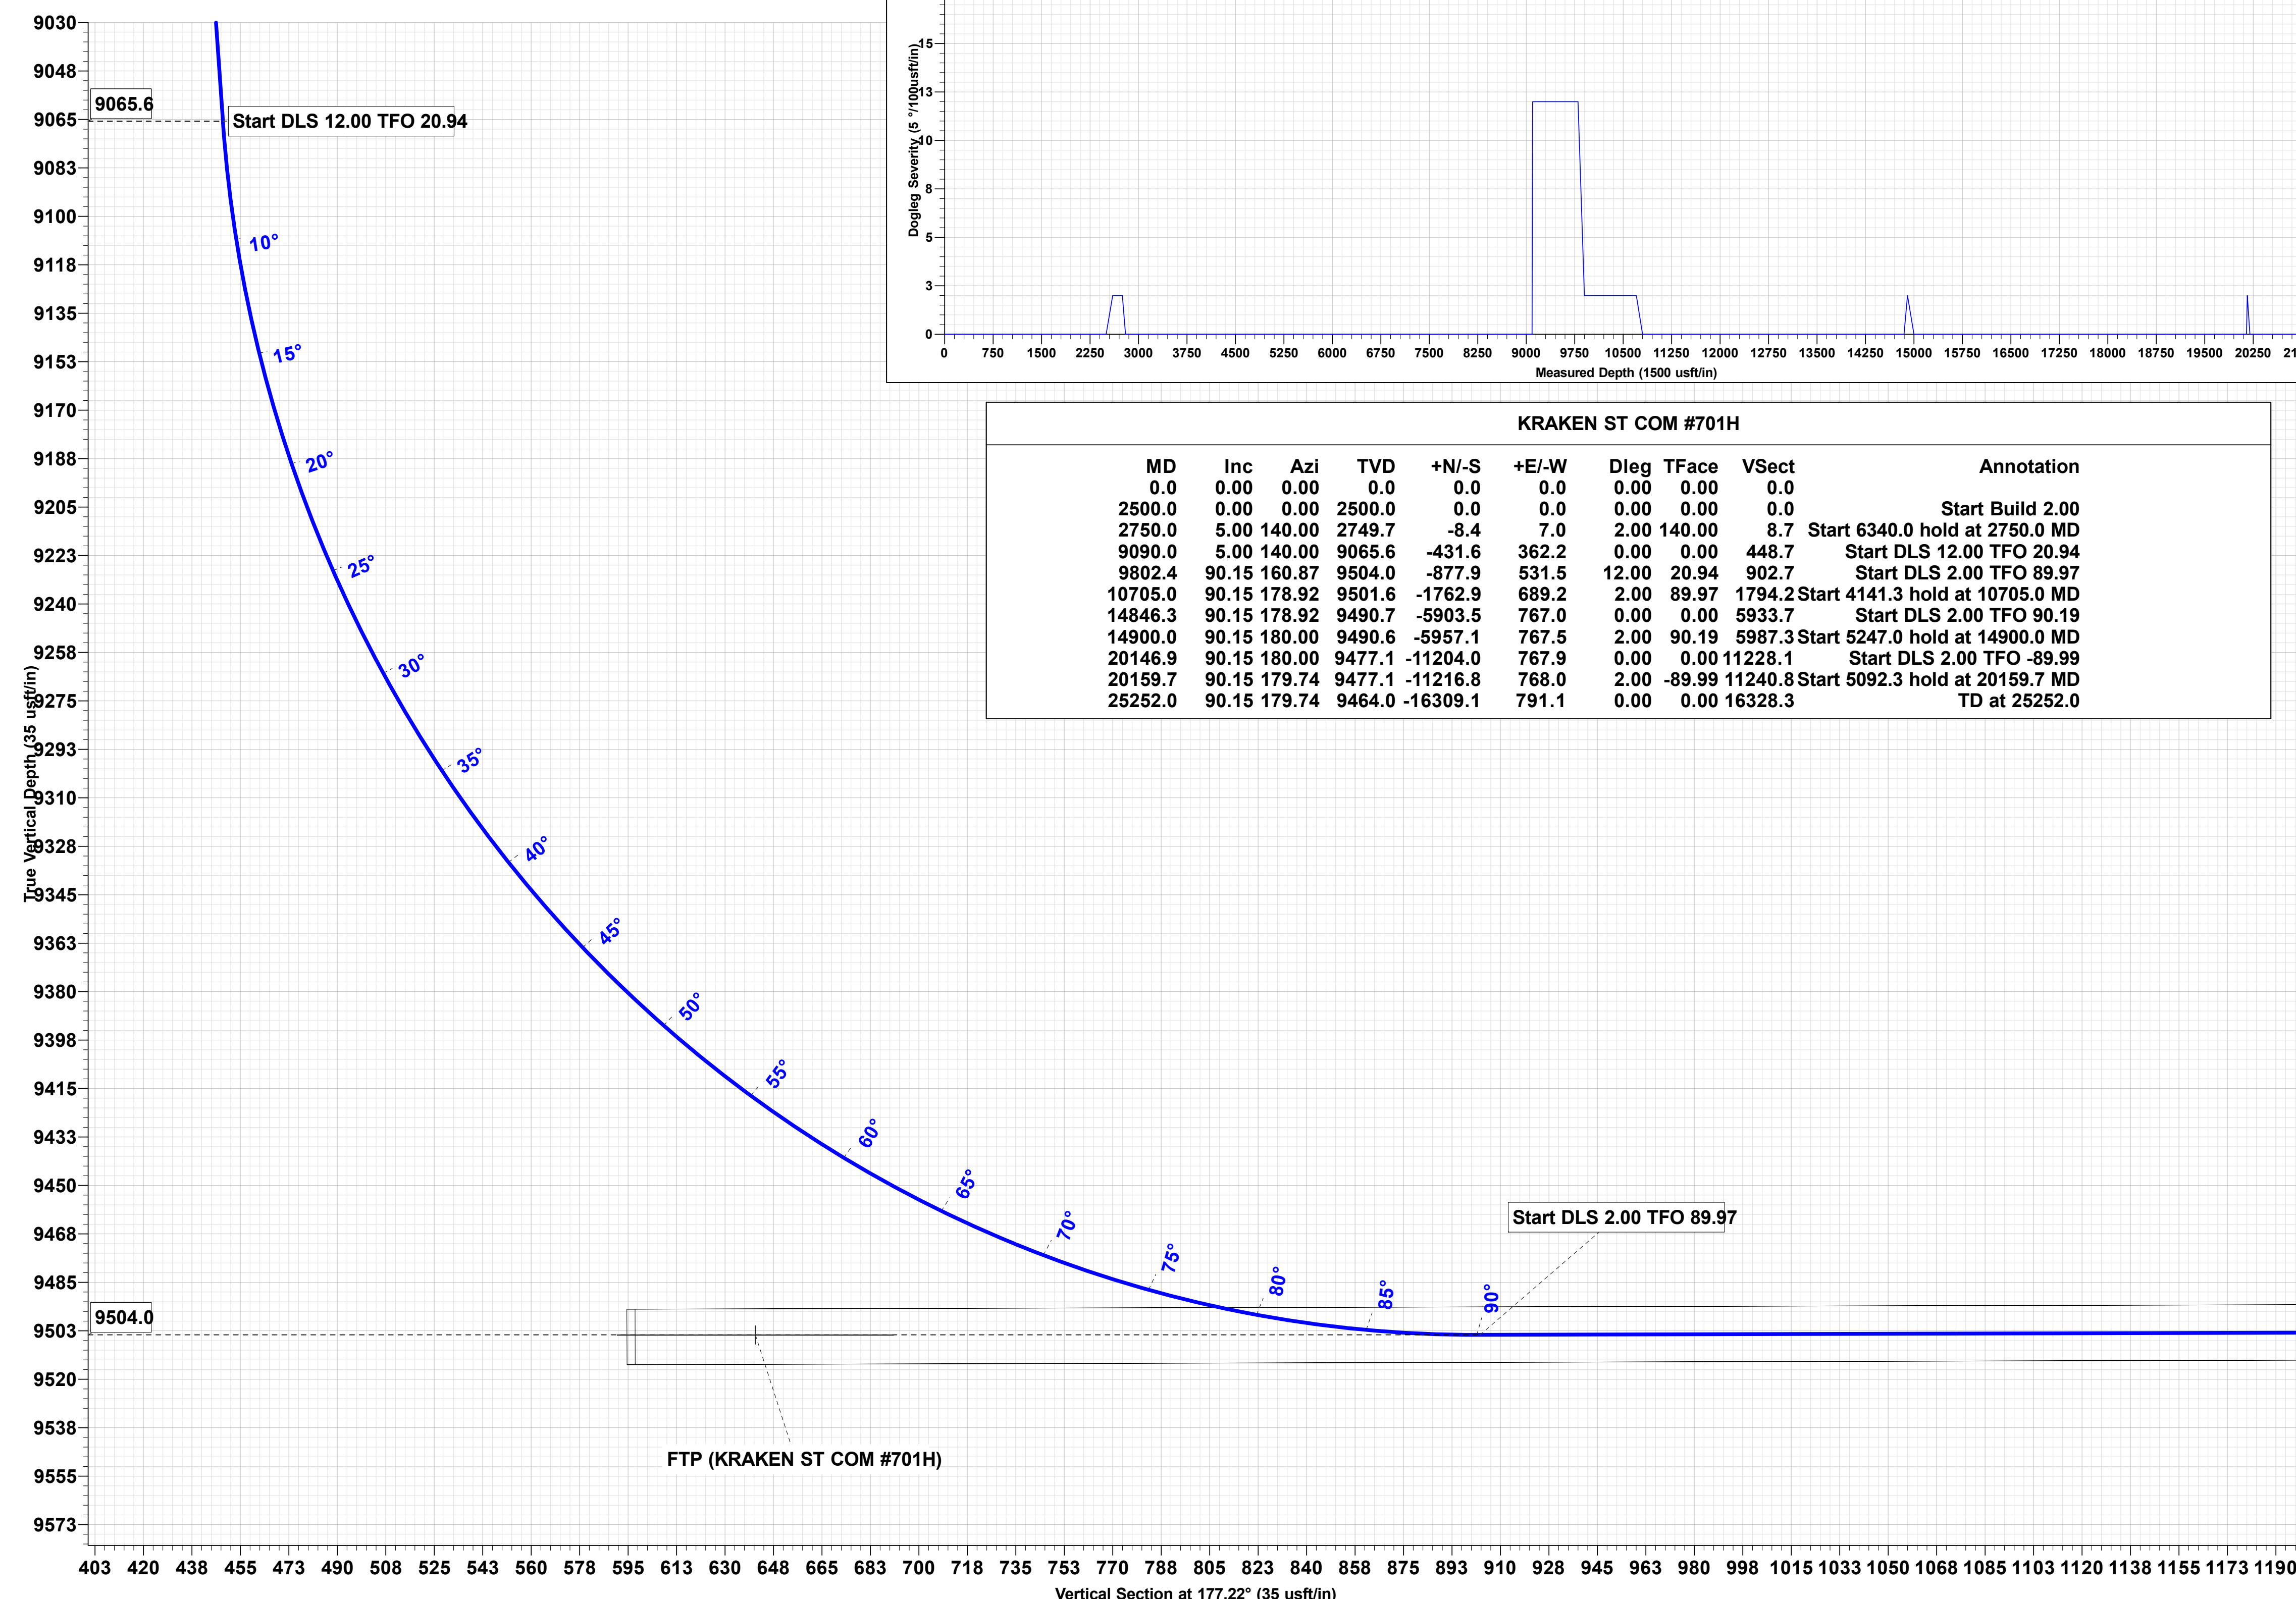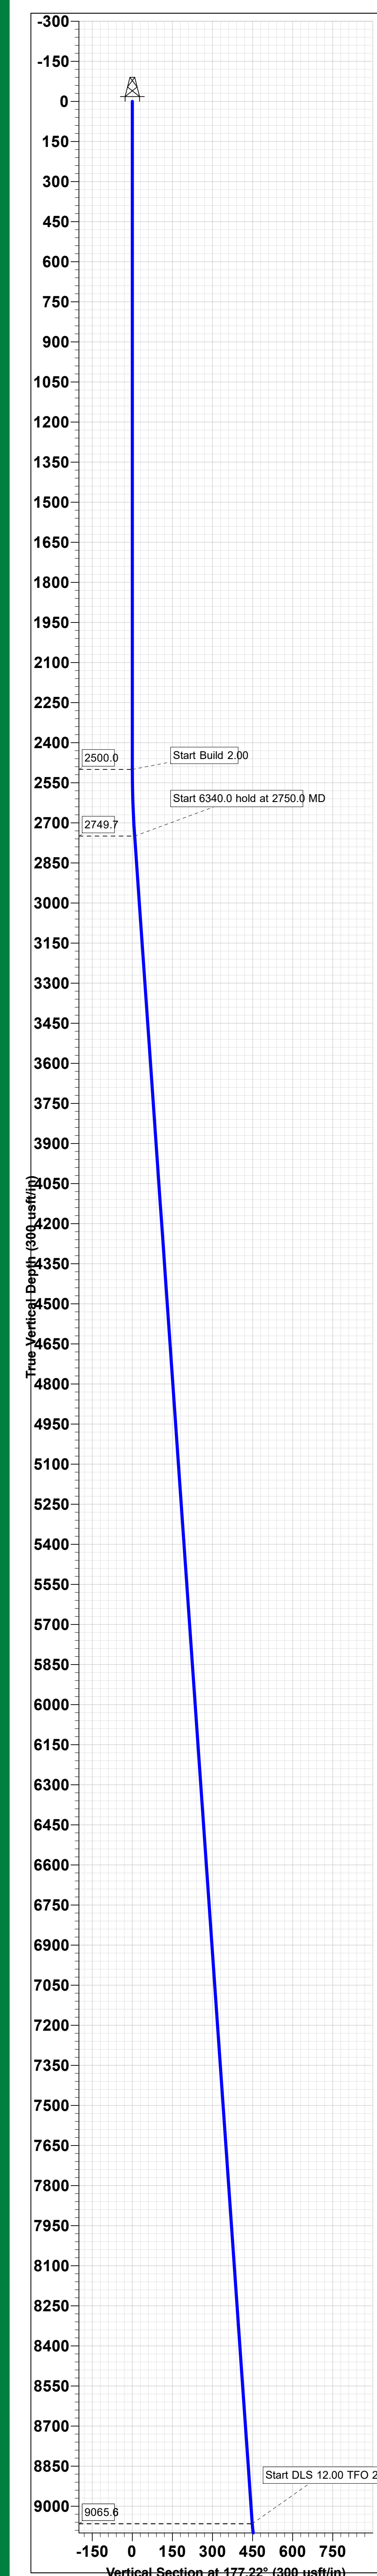

Kraken State Com #701H

Casing and Cement

<u>String</u>	<u>Hole Size</u>	<u>Csg OD</u>	<u>PPF</u>	<u>Depth</u>	<u>Sx Cement</u>	<u>TOC</u>
Surface	17-1/2"	13-3/8"	54.5#	650'	500	0'
Intermediate	12-1/4"	9-5/8"	40#	9,000'	1400	0'
Production	8-3/4"	5-1/2"	20#	25,252'	3,500	8,600'

Well Plan

Drill 17-1/2" hole to 650' into the Rustler. Run 13-3/8" 54.5# J55 STC casing to TD and cement to surface in one stage. Will set in Rustler and cover water depth.

Drill 12-1/4" hole to ~9,000' with cut brine emulsion. Run 9-5/8 40# L-80 BTC to TD and cement to surface in one stage.

Drill 8-3/4" vertical hole, curve & lateral to 25,252' with Cut Brine. Run 5-1/2" 20# P110 BTC casing to TD and cement to 8,600' in one stage.

Well Control

<u>Type</u>	<u>Working Pressure</u>	<u>Test Pressure</u>	<u>Manufacture</u>
Double Ram	5000 psi	5000 psi	Cameron

COG OPERATING LLC
HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream we will shut in and install H₂S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.

- b. Protective equipment for essential personnel:
Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H2S detection and monitoring equipment:
2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.

COG OPERATING LLC has conducted a review to determine if an H2S contingency plan is required for the above referenced well. We were able to conclude that any potential hazardous volume would be minimal. H2S concentrations of wells in this area from surface to TD are low enough; therefore, we do not believe that an H2S contingency plan is necessary.

W A R N I N G

**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED***
- 2. HARD HATS REQUIRED***
- 3. SMOKING IN DESIGNATED AREAS ONLY***
- 4. BE WIND CONSCIOUS AT ALL TIMES***
- 5. CK WITH COG OPERATING LLC FOREMAN AT MAIN OFFICE***

COG OPERATING LLC

1-575-748-6940

EMERGENCY CALL LIST

	<u>OFFICE</u>	<u>MOBILE</u>
COG OPERATING LLC OFFICE	575-748-6940	
SETH WILD	432-683-7443	432-528-3633
WALTER ROYE	575-748-6940	432-934-1886

EMERGENCY RESPONSE NUMBERS

	<u>OFFICE</u>
STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451