

Form 3160-3
(June 2015)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

1a. Type of work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NMNM0039880
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: ☐ Hydraulic Fracturing ☒ Single Zone ☐ Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator APACHE CORPORATION [873]		8. Lease Name and Well No. GHOST RIDER 22 15 FEDERAL COM [325016] 13H
3a. Address 2000 POST OAK BLVD SUITE 100, HOUSTON, TX 77056	3b. Phone No. (include area code) (999) 999-9999	9. API Well No. 30-025-49334 [96603]
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NWSE / 2357 FSL / 2206 FEL / LAT 32.2168024 / LONG -103.6610946 At proposed prod. zone SWSE / 50 FSL / 2405 FEL / LAT 32.195941 / LONG -103.6617524		10. Field and Pool, or Exploratory WOLFCAMP/TRISTE DRAW BONE SPR 11. Sec., T. R. M. or Blk. and Survey or Area SEC 15/T24S/R32E/NMP
14. Distance in miles and direction from nearest town or post office* 30 miles		12. County or Parish LEA
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 50 feet		13. State NM
16. No of acres in lease 520		17. Spacing Unit dedicated to this well 240.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 30 feet		20. BLM/BIA Bond No. in file FED: NMB000736
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3594 feet		22. Approximate date work will start* 11/16/2020
		23. Estimated duration 15 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature (Electronic Submission)	Name (Printed/Typed) SORINA FLORES / Ph: (432) 818-1000	Date 01/28/2020
Title Supv of Drilling Services		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) Cody Layton / Ph: (575) 234-5959	Date 07/30/2020
Title Assistant Field Manager Lands & Minerals Carlsbad Field Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NGMP Rec 08/18/2021

SL

(Continued on page 2)



Approval Date: 07/30/2020

KZ
08/20/2021

*(Instructions on page 2)

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-49334	² Pool Code 96603	³ Pool Name TRISTE DRAW; BONE SPRING
⁴ Property Code 325016	⁵ Property Name GHOST RIDER 22 15 FEDERAL COM	⁶ Well Number 13H
⁷ OGRID NO. 873	⁸ Operator Name APACHE CORPORATION	⁹ Elevation 3594'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet From the	East/West line	County
J	15	24S	32E		2357	SOUTH	2206	EAST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
0	22	24S	32E		50	SOUTH	2405	EAST	LEA

¹² Dedicated Acres 240	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
---	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

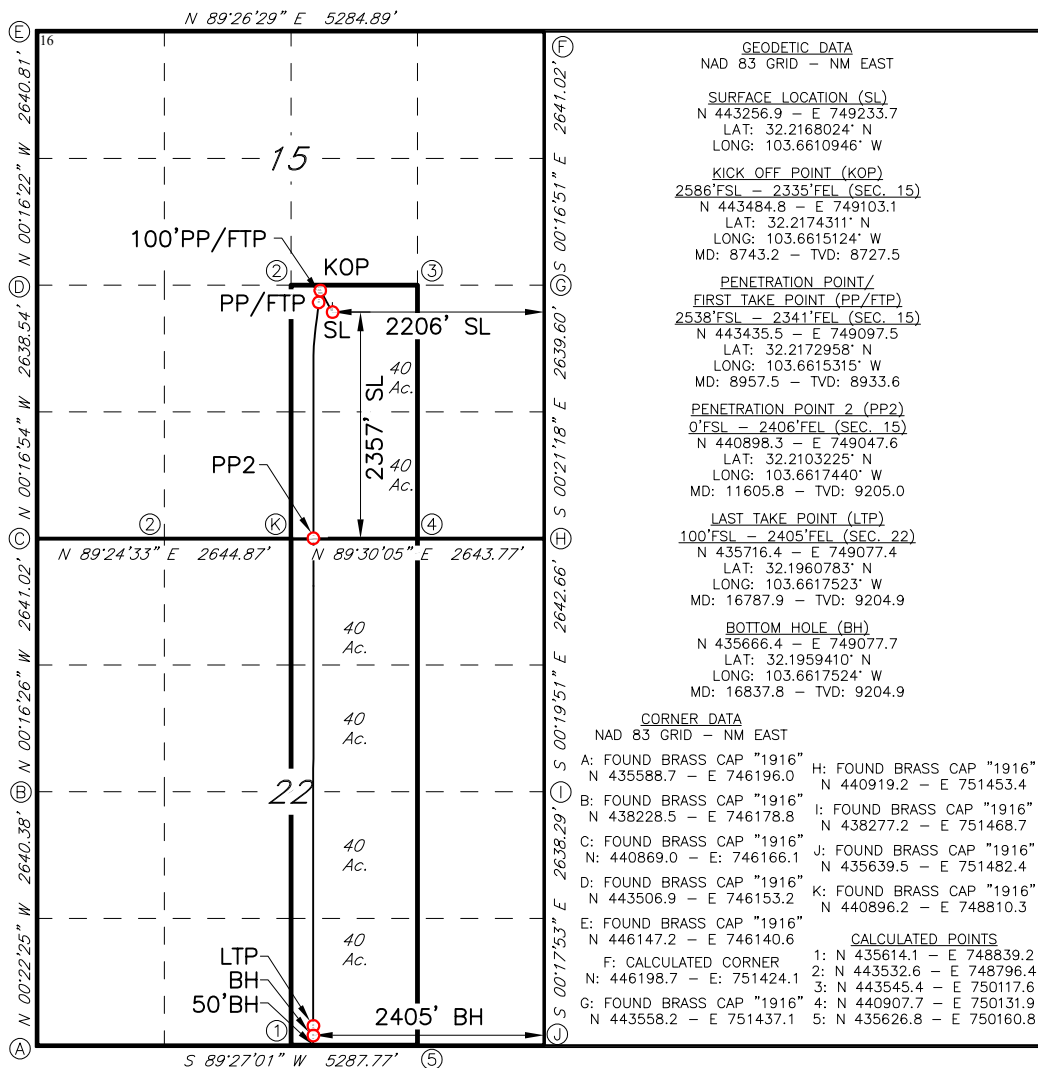

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Sorina L Flores 1/28/2020

Signature Date
Sorina L Flores
Printed Name
sorina.flores@apachecorp.com
E-mail Address


¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

03-27-2019

Date of Survey

Signature and Seal of Professional Surveyor



10034

Certificate Number

ADD P.P.2 - 01.10.20

Job No.: LS19030395DPR

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	APACHE CORPORATION
LEASE NO.:	NMNM0039880
WELL NAME & NO.:	GHOST RIDER 22 15 FEDERAL COM 13H
SURFACE HOLE FOOTAGE:	2357'/S & 2206'/E
BOTTOM HOLE FOOTAGE:	50'/S & 2405'/E
LOCATION:	Section 15, T.24 S., R.32 E., NMP
COUNTY:	Lea County, New Mexico

COA

H2S	☒ Yes	☐ No	
Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☒ Low	☐ Medium	☐ High
Cave/Karst Potential	☐ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☐ Multibowl	☒ Both
Other	☐ 4 String Area	☐ Capitan Reef	☐ WIPP
Other	☒ Fluid Filled	☒ Cement Squeeze	☐ Pilot Hole
Special Requirements	☐ Water Disposal	☒ COM	☐ Unit

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into the **Delaware Mountain Group**. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

Casing Design:

1. The 13-3/8 inch surface casing shall be set at approximately **1075** feet (a minimum of **25 feet (Lea County)**) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after

- completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The 9-5/8 inch intermediate casing shall be set at approximately **4800** feet. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Excess cement calculates to 21%, additional cement might be required.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
 - b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.
Excess cement calculates to 13%, additional cement might be required.
3. The minimum required fill of cement behind the 5-1/2 inch production casing is:

Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
Excess cement calculates to 3%, additional cement might be required.

Operator has proposed to pump down 5-1/2" X 9-5/8" annulus. Operator must run a CBL / Echo-Meter from TD of the 5-1/2" casing to surface. Submit results to BLM.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **3000 (3M)** psi.

Option 2:

1. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)**Communitization Agreement**

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure

- rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
- b. When the operator proposes to set surface casing with Spudder Rig
- Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall

have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.

- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

OTA07162020



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data Report

12/08/2020

APD ID: 10400053501

Submission Date: 01/28/2020

Highlighted data
reflects the most
recent changes

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400053501

Tie to previous NOS? N

Submission Date: 01/28/2020

BLM Office: CARLSBAD

User: Sorina Flores

Title: Supv of Drilling Services

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM0039880

Lease Acres: 520

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? Y

Permitting Agent? NO

APD Operator: APACHE CORPORATION

Operator letter of designation:

Operator Info

Operator Organization Name: APACHE CORPORATION

Operator Address: 303 Veterans Airpark Lane #1000

Zip: 79705

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)818-1000

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WOLFCAMP

Pool Name: TRISTE DRAW
BONE SPRING

Is the proposed well in an area containing other mineral resources? USEABLE WATER,NATURAL GAS,OIL

Operator Name: APACHE CORPORATION**Well Name:** GHOST RIDER 22 15 FEDERAL COM**Well Number:** 13H**Is the proposed well in an area containing other mineral resources?** USEABLE WATER,NATURAL GAS,OIL**Is the proposed well in a Helium production area?** N**Use Existing Well Pad?** Y**New surface disturbance?** N**Type of Well Pad:** MULTIPLE WELL**Multiple Well Pad Name:****Number:** 2N

GHOST RIDER 22 15

NORTHWEST

Number of Legs: 1**Well Class:** HORIZONTAL**Well Work Type:** Drill**Well Type:** OIL WELL**Describe Well Type:****Well sub-Type:** OTHER**Describe sub-type:** DEVELOPMENT WELL**Distance to town:** 30 Miles**Distance to nearest well:** 30 FT**Distance to lease line:** 50 FT**Reservoir well spacing assigned acres Measurement:** 240 Acres**Well plat:** GhostRider22_15FedCom13H_PlatSigned_20200128141528.pdf**Well work start Date:** 11/16/2020**Duration:** 15 DAYS**Section 3 - Well Location Table****Survey Type:** RECTANGULAR**Describe Survey Type:****Datum:** NAD83**Vertical Datum:** NAVD88**Survey number:****Reference Datum:** GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	2357	FSL	2206	FEL	24S	32E	15	Aliquot NWSE	32.2168024	-103.6610946	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 0039880	3594	0	0	Y
KOP Leg #1	2586	FSL	2335	FEL	24S	32E	15	Aliquot NWSE	32.2174311	-103.6615124	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 0039880	-5133	8743	8727	Y

Operator Name: APACHE CORPORATION**Well Name:** GHOST RIDER 22 15 FEDERAL COM**Well Number:** 13H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
PPP Leg #1-1	2538	FSL	2341	FEL	24S	32E	15	Aliquot SWSE	32.2172958	- 103.6615315	LEA	NEW MEXICO	NEW MEXICO	F	NMNM0039880	- 5339	8957	8933	Y
PPP Leg #1-2	0	FSL	2406	FEL	24S	32E	15	Aliquot SWSE	32.2103225	- 103.661744	LEA	NEW MEXICO	NEW MEXICO	F	NMLC0062269A	- 5611	11605	9205	Y
EXIT Leg #1	50	FSL	2405	FEL	24S	32E	22	Aliquot SWSE	32.195941	- 103.6617524	LEA	NEW MEXICO	NEW MEXICO	F	NMLC0062269A	- 5610	16837	9204	Y
BHL Leg #1	50	FSL	2405	FEL	24S	32E	22	Aliquot SWSE	32.195941	- 103.6617524	LEA	NEW MEXICO	NEW MEXICO	F	NMLC0062269A	- 5610	16837	9204	Y



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

12/08/2020

APD ID: 10400053501

Submission Date: 01/28/2020

Highlighted data
reflects the most
recent changes

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
639947	QUATERNARY	3594	0	0	ALLUVIUM	USEABLE WATER	N
639948	RUSTLER	2544	1050	1050	ANHYDRITE	POTASH	N
639949	SALADO	2232	1362	1362	ANHYDRITE	POTASH	N
639958	DELAWARE	-1198	4792	4808	LIMESTONE, MUDSTONE, SANDSTONE	NATURAL GAS, OIL	N
639964	BONE SPRING	-5135	8729	8745	LIMESTONE, MUDSTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 3M

Rating Depth: 11000

Equipment: Rotating Head, Mud Gas Separator, Blow Down Pit, Flare Line, Ignitor

Requesting Variance? YES

Variance request: Apache request a variance to use a flexible hose between BOP and Choke Manifold. Flex hose may vary pending availability. A quality control inspection and test certificate will be available for review.

Testing Procedure: BOP/BOPE will be tested by independent service company to 250psi low and high pressure indicated above per Onshore Order 2 requirements. System may be upgraded to higher pressure but sill tested to WP listed . If system is upgraded, all components installed will be functional and tested. Pipe rams will be operationally checked each 24 hr period. Blind rams will be operationally checked on each TOOH. These checks will be noted on daily tour sheets. Other accessories to BOP equipment will include Kelly cock and floor safety valve (inside BOP), choke lines and choke manifold. (see attached schematic)

Choke Diagram Attachment:

GhostRider22_15FedCom_12.25_13.625_2M_BOP_Annular_Choke_Manifold_Schem_20200121135551.pdf

BOP Diagram Attachment:

GhostRider22_15FedCom_8.75_13.625_3M_BOP_Choke_Manifold_Schem_20200121135558.pdf

Flexline_20200121135603.pdf

Operator Name: APACHE CORPORATION**Well Name:** GHOST RIDER 22 15 FEDERAL COM**Well Number:** 13H**Section 3 - Casing**

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1075	0	1075	3594	2519	1075	J-55	54.5	BUTT	4.55	1.72	BUOY	4.38	BUOY	4.67
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	4800	0	4784		-1190	4800	J-55	40	LT&C	2.01	2.12	BUOY	2.19	BUOY	1.82
3	PRODUCTION	8.75	5.5	NEW	API	N	0	9493	0	9205		-5611	9493	P-110	17	OTHER - GB-CD	1.72	1.19	BUOY	2.25	BUOY	2.36
4	PRODUCTION	8.5	5.5	NEW	API	N	9493	16837	9205	9205	-5611	-5611	7344	P-110	17	OTHER - GB-CD	1.72	1.19	BUOY	2.25	BUOY	2.36

Casing Attachments**Casing ID:** 1 **String Type:** SURFACE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

GhostRider22_15FedCom_SurfCsgAssumpt_20200121135718.pdf

Operator Name: APACHE CORPORATION**Well Name:** GHOST RIDER 22 15 FEDERAL COM**Well Number:** 13H**Casing Attachments**

Casing ID: 2 **String Type:** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**GhostRider22_15FedCom_IntermCsgAssumpt_20200121135704.pdf

Casing ID: 3 **String Type:** PRODUCTION**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**GhostRider22_15FedCom_ProdCsgAssumpt_20200120122331.pdf

Casing ID: 4 **String Type:** PRODUCTION**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**GhostRider22_15FedCom_ProdCsgAssumpt_20200121135841.pdf

Section 4 - Cement

Operator Name: APACHE CORPORATION**Well Name:** GHOST RIDER 22 15 FEDERAL COM**Well Number:** 13H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	775	405	1.72	13.5	696.6	25	CI C	4% Bentonite, 1% CaCl ₂
SURFACE	Tail		775	1075	225	1.33	14.8	299.25	25	CI C	1% CaCl ₂
INTERMEDIATE	Lead		0	3840	640	2.32	12.7	1484.8	25	CI C	10% NaCl, 6% Gel, 1% Premag M, 0.3% defoamer, 0.4% retarder
INTERMEDIATE	Tail		3840	4800	300	1.33	14.8	399	25	CI C	0.1% retarder
PRODUCTION	Lead		4700	7800	330	2.86	10.5	943.8	20	Nine lite	5% lightweight 3M beads, 0.3% fluid loss, 0.2% dispersant, 0.2% GXT-C, 0.2% suspension aid, 0.15% retarder, 0.15% citric acid

PRODUCTION	Lead		7800	8743	130	2.21	11.5	287.3	20	Nine lite	3% salt, 1% premag M, 0.15% fluid loss, 0.15% GXT-C, 0.45% retarder
PRODUCTION	Tail		8743	16837	1575	1.43	13.2	2252.25	20	Nine lite	1.3% salt, 3% expanding agent, 0.5% fluid loss, 0.1% free water control, 0.65% retarder, 0.2% dispersant, 0.25% defoamer

Section 5 - Circulating Medium

Mud System Type: Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with Onshore Order #2:****Diagram of the equipment for the circulating system in accordance with Onshore Order #2:****Describe what will be on location to control well or mitigate other conditions:** BOP, Choke Manifold, Gas Buster, Blow Down Pit, Flare Line with Igniter, Pre-Mix Pit, Rotating Head**Describe the mud monitoring system utilized:** PVT/Pason/Visual Monitoring

Operator Name: APACHE CORPORATION**Well Name:** GHOST RIDER 22 15 FEDERAL COM**Well Number:** 13H**Circulating Medium Table**

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1075	SPUD MUD	8.3	9							
1075	4800	SALT SATURATED	9.8	10.5							
4800	16840	OTHER : CUT BRINE	8.6	9.5							

Section 6 - Test, Logging, Coring**List of production tests including testing procedures, equipment and safety measures:**

Will run GR/CNL from TD to surf (horizontal well - vertical portion of hole). Stated logs run will be in the completion report & submitted to BLM.

List of open and cased hole logs run in the well:

DIRECTIONAL SURVEY, GAMMA RAY LOG, MUD LOG/GEOLOGIC LITHOLOGY LOG, CEMENT BOND LOG, MEASUREMENT WHILE DRILLING, CNL/FDC, MUD LOG/GEOLOGICAL LITHOLOGY LOG, TEMPERATURE LOG,

Coring operation description for the well:

N/A

Section 7 - Pressure**Anticipated Bottom Hole Pressure:** 4050**Anticipated Surface Pressure:** 2024**Anticipated Bottom Hole Temperature(F):** 153**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** YES**Describe:**

Loss circ in Brushy Canyon during production cement job.

Contingency Plans geohazards description:

Intermediate - If lost circ is encountered, Apache may 2-stage Interm csg, DVT may be used in 9-5/8" csg & ECP may be placed below DVT - please see cmt detail attached. The primary production cement job will be pumped as planned. If lift pressures do not indicate tieback, then a contingency bradenhead squeeze will be pumped 4 hours after primary job to achieve cement tieback into intermediate casing. A CBL will be ran afterwards and submitted to the BLM.

Contingency Plans geohazards attachment:**Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations plan:**

Operator Name: APACHE CORPORATION**Well Name:** GHOST RIDER 22 15 FEDERAL COM**Well Number:** 13H

GhostRider22_15FedCom_H2SOpsContgPlan_20190910135208.pdf

Section 8 - Other Information**Proposed horizontal/directional/multi-lateral plan submission:**

GhostRider22_15FedCom13H_DirPlan_20200121140154.pdf

Other proposed operations facets description:

Apache Corp respectfully request approval to utilize a spudder rig to pre-set surf csg. Please see attachment for procedure. *Plan - To set interm into Lamar limestone and continue with 3-string csg design if no water flows in Delaware or if water flows are small. Apache will utilize standard three string Cameron MNDS multibowl wellhead system - procedure attached.

Other proposed operations facets attachment:

5.5_17lb_P110_GB_CD_Connection_Datasheet_20190910135827.pdf

CameronRunningProcedure003612_Rev_02_20190910135552.pdf

GhostRider22_15FedCom_MultibowlWellheadProcedure_20190911140636.pdf

GhostRider22_15FedCom13H_CsgDetail_20200121140217.pdf

GhostRider22_15FedCom13H_CmtDetail_20200121140217.pdf

GhostRider22_15FedCom13H_SpudderRigProcedure_20200121140226.pdf

Other Variance attachment:

HYDROGEN SULFIDE (H₂S) DRILLING OPERATIONS PLAN

Hydrogen Sulfide Training:

All regularly assigned personnel, contracted or employed by Apache Corporation will receive training from qualified instructor(s) in the following areas prior to commencing drilling possible hydrogen sulfide bearing formations in this well:

- The hazards and characteristics of hydrogen sulfide (H₂S)
- The proper use and maintenance of personal protective equipment and life support systems.
- The proper use of H₂S detectors, alarms, warning systems, briefing area, evacuation procedures & prevailing winds.
- The proper techniques for first aid and rescue procedures.

Supervisory personnel will be trained in the following areas:

- The effects of H₂S on metal components. If high tensile tubulars are to be utilized, personnel will be trained in their special maintenance requirements.
- Corrective action & shut-in procedures when drilling or reworking a well & blowout prevention / well control procedures.
- The contents and requirements of the H₂S Drilling Operations Plan

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500') and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received proper training.

H₂S SAFETY EQUIPMENT AND SYSTEMS:

Well Control Equipment that will be available & installed if H₂S is encountered:

- Flare Line with electronic igniter or continuous pilot.
- Choke manifold with a minimum of one remote choke.
- Blind rams & pipe rams to accommodate all pipe sizes with properly sized closing unit.
- Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head & flare gun with flares

Protective Equipment for Essential Personnel:

- Mark II Survive-air 30 minute units located in dog house & at briefing areas, as indicated on wellsite diagram.

H₂S Detection and Monitoring Equipment:

- Two portable H₂S monitors positioned on location for best coverage & response. These units have warning lights & audible sirens when H₂S levels of 20 ppm are reached.
- One portable H₂S monitor positioned near flare line.

H₂S Visual Warning Systems:

- Wind direction indicators are shown on wellsite diagram.
- Caution / Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used when appropriate.

Mud Program:

- The Mud Program has been designed to minimize the volume of H₂S circulated to the surface. Proper mud weights, safe drilling practices & the use of H₂S scavengers will minimize hazards when penetrating H₂S bearing zones.
- A mud-gas separator and H₂S gas buster will be utilized as needed.

Metallurgy:

- All drill strings, casing, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold & lines, & valves will be suitable for H₂S service.
- All elastomers used for packing & seals shall be H₂S trim.

Communication:

- Cellular telephone and 2-way radio communications in company vehicles, rig floor and mud logging trailer.

HYDROGEN SULFIDE (H₂S) CONTINGENCY PLAN

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with H₂S monitors and air packs in order to control the release.
- Use the "buddy system" to ensure no injuries occur during the response
- Take precautions to avoid personal injury during this operation.
- Contact operators and/or local officials to aid in operation. See list of phone numbers attached.
- Have received training in the :
 - Detection of H₂S, and
 - Measures for protection against the gas,
 - Equipment used for protection and emergency response.

Ignition of Gas source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever this is an ignition of the gas.

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

Apache Corporation personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. Apache's response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER).

WELL CONTROL EMERGENCY RESPONSE PLAN

I. GENERAL PHILOSOPHY

Our objective is to ensure that during an emergency, a predetermined procedure is followed so that prompt decisions can be made based on accurate information.

The best way to handle an emergency is with an experienced organization set up for the sole purpose of solving the problem. The *Well Control Emergency Response Team* was organized to handle dangerous & expensive well control problems. The *Team* is structured such that each individual can contribute the most from his area of expertise. Key decision-makers are determined prior to an emergency to avoid confusion about who is in charge.

If the well is flowing uncontrolled at the surface or subsurface, *The Emergency Response Team* will be mobilized. The *Team* is customized for the people currently on the Apache staff. Staff changes may require a change in the plan.

II. EMERGENCY PROCEDURE ON DRILLING OR COMPLETION OPERATIONS

- A. In the event of an emergency the *Drilling Foreman* or *Tool-Pusher* will immediately contact only one of the following starting with the first name listed:

Name	Office	Mobile	Home
Danny Laman – Drlg Superintendent	432-818-1022	432-634-0288	
John Vacek – Drilling Engineer	432-818-1882	281-222-1812	
Bobby Smith – Drilling Manager	432-818-1020	432-556-7701	
Bill Jones – EH&S Coordinator		432-967-9576	

***This one phone call will free the Drilling Foreman to devote his full time to securing the safety of personnel & equipment. This call will initiate the process to mobilize the Well Control Emergency Response Team. Apache maintains an Emergency Telephone Conference Room in the Houston office. This room is available for us by the Permian Region. The room has 50 separate telephone lines.*

- B. The Apache employee contacted by the Drilling Foreman will begin contacting the rest of the *Team*. If **DANNY LAMAN** is out of contact, **JOHN VACEK** will be notified.
- C. If a member of the *Emergency Response Team* is away from the job, he must be available for call back. Telephone numbers should be left with secretaries or a key decision-maker.
- D. Apache's reporting procedure for spills or releases of oil or hazardous materials will be implemented when spills or releases have occurred or are probable.

EMERGENCY RESPONSE NUMBERS:

SHERIFF DEPARTMENT	
Eddy County	575-887-7551
Lea County	575-396-3611
FIRE DEPARTMENT	
	911
Artesia	575-746-5050
Carlsbad	575-885-2111
Eunice	575-394-2111
Hobbs	575-397-9308
Jal	575-395-2221
Lovington	575-396-2359
HOSPITALS	
	911
Artesia Medical Emergency	575-746-5050
Carlsbad Medical Emergency	575-885-2111
Eunice Medical Emergency	575-394-2112
Hobbs Medical Emergency	575-397-9308
Jal Medical Emergency	575-395-2221
Lovington Medical Emergency	575-396-2359
AGENT NOTIFICATIONS	
Bureau of Land Management	575-393-3612
New Mexico Oil Conservation Division	575-393-6161

PERMIAN

NW DISTRICT - NM EZ NAD 83

GHOST RIDER 22-15 FED COM PAD (N West)

Ghost Rider 22-15 Fed Com 13H

Ghost Rider 22-15 Fed Com 13H

Plan: Design #1

Standard Planning Report

06 September, 2019

Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well Ghost Rider 22-15 Fed Com 13H
Company:	PERMIAN	TVD Reference:	WELL @ 3620.0ft (Original Well Elev)
Project:	NW DISTRICT - NM EZ NAD 83	MD Reference:	WELL @ 3620.0ft (Original Well Elev)
Site:	GHOST RIDER 22-15 FED COM PAD (N West)	North Reference:	Grid
Well:	Ghost Rider 22-15 Fed Com 13H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Ghost Rider 22-15 Fed Com 13H		
Design:	Design #1		

Project	NW DISTRICT - NM EZ NAD 83		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	GHOST RIDER 22-15 FED COM PAD (N West)				
Site Position:		Northing:	443,251.80 ft	Latitude:	32° 13' 0.462 N
From:	Map	Easting:	748,709.90 ft	Longitude:	103° 39' 46.056 W
Position Uncertainty:	0.0 ft	Slot Radius:	13.200 in	Grid Convergence:	0.36 °

Well	Ghost Rider 22-15 Fed Com 13H					
Well Position	+N/-S	5.1 ft	Northing:	443,256.90 ft	Latitude:	32° 13' 0.480 N
	+E/-W	523.8 ft	Easting:	749,233.70 ft	Longitude:	103° 39' 39.958 W
Position Uncertainty		0.0 ft	Wellhead Elevation:		Ground Level:	3,594.0 ft

Wellbore	Ghost Rider 22-15 Fed Com 13H				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM_FILE	7/30/2019	6.68	59.87	47,880.60000000

Design	Design #1				
Audit Notes:					
Version:		Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.0	0.0	0.0	181.18	

Plan Survey Tool Program	Date	9/6/2019			
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.0	8,700.0	Design #1 (Ghost Rider 22-15 Fe	MWD+HDGM (MWD)	
				OWSG MWD + HDGM	
2	8,700.0	16,837.8	Design #1 (Ghost Rider 22-15 Fe	20180329 MWD+IFR1+SAG+I	
				OWSG MWD + IFR1 + Sag + I	

Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well Ghost Rider 22-15 Fed Com 13H
Company:	PERMIAN	TVD Reference:	WELL @ 3620.0ft (Original Well Elev)
Project:	NW DISTRICT - NM EZ NAD 83	MD Reference:	WELL @ 3620.0ft (Original Well Elev)
Site:	GHOST RIDER 22-15 FED COM PAD (N West)	North Reference:	Grid
Well:	Ghost Rider 22-15 Fed Com 13H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Ghost Rider 22-15 Fed Com 13H		
Design:	Design #1		

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,800.0	8.00	330.18	2,797.4	48.4	-27.7	1.00	1.00	0.00	330.18	
3,886.0	8.00	330.18	3,872.9	179.5	-102.9	0.00	0.00	0.00	0.00	
4,686.0	0.00	0.00	4,670.3	227.9	-130.6	1.00	-1.00	0.00	180.00	
8,743.3	0.00	0.00	8,727.5	227.9	-130.6	0.00	0.00	0.00	0.00	
9,493.3	90.00	186.50	9,205.0	-246.5	-184.7	12.00	12.00	0.00	186.50	
9,720.9	90.00	179.67	9,205.0	-473.7	-196.9	3.00	0.00	-3.00	-90.00	BHL Ghost Rider 22-1
16,837.8	90.00	179.67	9,205.0	-7,590.5	-156.0	0.00	0.00	0.00	0.00	BHL Ghost Rider 22-1

Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well Ghost Rider 22-15 Fed Com 13H
Company:	PERMIAN	TVD Reference:	WELL @ 3620.0ft (Original Well Elev)
Project:	NW DISTRICT - NM EZ NAD 83	MD Reference:	WELL @ 3620.0ft (Original Well Elev)
Site:	GHOST RIDER 22-15 FED COM PAD (N West)	North Reference:	Grid
Well:	Ghost Rider 22-15 Fed Com 13H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Ghost Rider 22-15 Fed Com 13H		
Design:	Design #1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00	
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00	
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00	
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00	
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00	
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00	
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
2,100.0	1.00	330.18	2,100.0	0.8	-0.4	-0.7	1.00	1.00	0.00	
2,200.0	2.00	330.18	2,200.0	3.0	-1.7	-3.0	1.00	1.00	0.00	
2,300.0	3.00	330.18	2,299.9	6.8	-3.9	-6.7	1.00	1.00	0.00	
2,400.0	4.00	330.18	2,399.7	12.1	-6.9	-12.0	1.00	1.00	0.00	
2,500.0	5.00	330.18	2,499.4	18.9	-10.8	-18.7	1.00	1.00	0.00	
2,600.0	6.00	330.18	2,598.9	27.2	-15.6	-26.9	1.00	1.00	0.00	
2,700.0	7.00	330.18	2,698.3	37.1	-21.2	-36.6	1.00	1.00	0.00	
2,800.0	8.00	330.18	2,797.4	48.4	-27.7	-47.8	1.00	1.00	0.00	
2,900.0	8.00	330.18	2,896.4	60.5	-34.6	-59.7	0.00	0.00	0.00	
3,000.0	8.00	330.18	2,995.5	72.5	-41.6	-71.7	0.00	0.00	0.00	
3,100.0	8.00	330.18	3,094.5	84.6	-48.5	-83.6	0.00	0.00	0.00	
3,200.0	8.00	330.18	3,193.5	96.7	-55.4	-95.5	0.00	0.00	0.00	
3,300.0	8.00	330.18	3,292.5	108.8	-62.3	-107.5	0.00	0.00	0.00	
3,400.0	8.00	330.18	3,391.6	120.8	-69.2	-119.4	0.00	0.00	0.00	
3,500.0	8.00	330.18	3,490.6	132.9	-76.2	-131.3	0.00	0.00	0.00	
3,600.0	8.00	330.18	3,589.6	145.0	-83.1	-143.2	0.00	0.00	0.00	
3,700.0	8.00	330.18	3,688.6	157.1	-90.0	-155.2	0.00	0.00	0.00	
3,800.0	8.00	330.18	3,787.7	169.1	-96.9	-167.1	0.00	0.00	0.00	
3,886.0	8.00	330.18	3,872.9	179.5	-102.9	-177.4	0.00	0.00	0.00	
3,900.0	7.86	330.18	3,886.7	181.2	-103.8	-179.0	1.00	-1.00	0.00	
4,000.0	6.86	330.18	3,985.9	192.3	-110.2	-190.0	1.00	-1.00	0.00	
4,100.0	5.86	330.18	4,085.3	201.9	-115.7	-199.5	1.00	-1.00	0.00	
4,200.0	4.86	330.18	4,184.8	210.0	-120.4	-207.5	1.00	-1.00	0.00	
4,300.0	3.86	330.18	4,284.5	216.6	-124.1	-214.0	1.00	-1.00	0.00	
4,400.0	2.86	330.18	4,384.4	221.7	-127.1	-219.0	1.00	-1.00	0.00	
4,500.0	1.86	330.18	4,484.3	225.3	-129.1	-222.6	1.00	-1.00	0.00	
4,600.0	0.86	330.18	4,584.2	227.3	-130.3	-224.6	1.00	-1.00	0.00	
4,686.0	0.00	0.00	4,670.3	227.9	-130.6	-225.2	1.00	-1.00	0.00	
4,700.0	0.00	0.00	4,684.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
4,800.0	0.00	0.00	4,784.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
4,900.0	0.00	0.00	4,884.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
5,000.0	0.00	0.00	4,984.2	227.9	-130.6	-225.2	0.00	0.00	0.00	

Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well Ghost Rider 22-15 Fed Com 13H
Company:	PERMIAN	TVD Reference:	WELL @ 3620.0ft (Original Well Elev)
Project:	NW DISTRICT - NM EZ NAD 83	MD Reference:	WELL @ 3620.0ft (Original Well Elev)
Site:	GHOST RIDER 22-15 FED COM PAD (N West)	North Reference:	Grid
Well:	Ghost Rider 22-15 Fed Com 13H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Ghost Rider 22-15 Fed Com 13H		
Design:	Design #1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
5,100.0	0.00	0.00	5,084.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
5,200.0	0.00	0.00	5,184.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
5,300.0	0.00	0.00	5,284.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
5,400.0	0.00	0.00	5,384.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
5,500.0	0.00	0.00	5,484.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
5,600.0	0.00	0.00	5,584.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
5,700.0	0.00	0.00	5,684.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
5,800.0	0.00	0.00	5,784.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
5,900.0	0.00	0.00	5,884.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
6,000.0	0.00	0.00	5,984.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
6,100.0	0.00	0.00	6,084.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
6,200.0	0.00	0.00	6,184.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
6,300.0	0.00	0.00	6,284.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
6,400.0	0.00	0.00	6,384.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
6,500.0	0.00	0.00	6,484.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
6,600.0	0.00	0.00	6,584.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
6,700.0	0.00	0.00	6,684.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
6,800.0	0.00	0.00	6,784.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
6,900.0	0.00	0.00	6,884.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
7,000.0	0.00	0.00	6,984.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
7,100.0	0.00	0.00	7,084.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
7,200.0	0.00	0.00	7,184.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
7,300.0	0.00	0.00	7,284.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
7,400.0	0.00	0.00	7,384.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
7,500.0	0.00	0.00	7,484.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
7,600.0	0.00	0.00	7,584.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
7,700.0	0.00	0.00	7,684.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
7,800.0	0.00	0.00	7,784.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
7,900.0	0.00	0.00	7,884.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
8,000.0	0.00	0.00	7,984.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
8,100.0	0.00	0.00	8,084.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
8,200.0	0.00	0.00	8,184.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
8,300.0	0.00	0.00	8,284.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
8,400.0	0.00	0.00	8,384.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
8,500.0	0.00	0.00	8,484.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
8,600.0	0.00	0.00	8,584.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
8,700.0	0.00	0.00	8,684.2	227.9	-130.6	-225.2	0.00	0.00	0.00	
8,743.3	0.00	0.00	8,727.5	227.9	-130.6	-225.2	0.00	0.00	0.00	
8,800.0	6.81	186.50	8,784.1	224.6	-131.0	-221.8	12.00	12.00	0.00	
8,900.0	18.81	186.50	8,881.4	202.6	-133.5	-199.8	12.00	12.00	0.00	
9,000.0	30.81	186.50	8,972.0	161.0	-138.2	-158.1	12.00	12.00	0.00	
9,100.0	42.81	186.50	9,052.0	101.5	-145.0	-98.5	12.00	12.00	0.00	
9,200.0	54.81	186.50	9,117.7	26.9	-153.5	-23.7	12.00	12.00	0.00	
9,300.0	66.81	186.50	9,166.4	-59.7	-163.4	63.0	12.00	12.00	0.00	
9,400.0	78.81	186.50	9,195.9	-154.4	-174.2	158.0	12.00	12.00	0.00	
9,493.3	90.00	186.50	9,205.0	-246.5	-184.7	250.2	12.00	12.00	0.00	
9,500.0	90.00	186.30	9,205.0	-253.2	-185.4	256.9	3.00	0.00	-3.00	
9,600.0	90.00	183.30	9,205.0	-352.8	-193.8	356.7	3.00	0.00	-3.00	
9,700.0	90.00	180.30	9,205.0	-452.8	-196.9	456.7	3.00	0.00	-3.00	
9,720.9	90.00	179.67	9,205.0	-473.7	-196.9	477.6	3.00	0.00	-3.00	
9,800.0	90.00	179.67	9,205.0	-552.8	-196.4	556.7	0.00	0.00	0.00	
9,900.0	90.00	179.67	9,205.0	-652.8	-195.9	656.7	0.00	0.00	0.00	
10,000.0	90.00	179.67	9,205.0	-752.8	-195.3	756.6	0.00	0.00	0.00	

Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well Ghost Rider 22-15 Fed Com 13H
Company:	PERMIAN	TVD Reference:	WELL @ 3620.0ft (Original Well Elev)
Project:	NW DISTRICT - NM EZ NAD 83	MD Reference:	WELL @ 3620.0ft (Original Well Elev)
Site:	GHOST RIDER 22-15 FED COM PAD (N West)	North Reference:	Grid
Well:	Ghost Rider 22-15 Fed Com 13H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Ghost Rider 22-15 Fed Com 13H		
Design:	Design #1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
10,100.0	90.00	179.67	9,205.0	-852.8	-194.7	856.6	0.00	0.00	0.00	
10,200.0	90.00	179.67	9,205.0	-952.8	-194.1	956.5	0.00	0.00	0.00	
10,300.0	90.00	179.67	9,205.0	-1,052.8	-193.6	1,056.5	0.00	0.00	0.00	
10,400.0	90.00	179.67	9,205.0	-1,152.8	-193.0	1,156.5	0.00	0.00	0.00	
10,500.0	90.00	179.67	9,205.0	-1,252.8	-192.4	1,256.4	0.00	0.00	0.00	
10,600.0	90.00	179.67	9,205.0	-1,352.8	-191.8	1,356.4	0.00	0.00	0.00	
10,700.0	90.00	179.67	9,205.0	-1,452.8	-191.3	1,456.4	0.00	0.00	0.00	
10,800.0	90.00	179.67	9,205.0	-1,552.8	-190.7	1,556.3	0.00	0.00	0.00	
10,900.0	90.00	179.67	9,205.0	-1,652.7	-190.1	1,656.3	0.00	0.00	0.00	
11,000.0	90.00	179.67	9,205.0	-1,752.7	-189.5	1,756.3	0.00	0.00	0.00	
11,100.0	90.00	179.67	9,205.0	-1,852.7	-189.0	1,856.2	0.00	0.00	0.00	
11,200.0	90.00	179.67	9,205.0	-1,952.7	-188.4	1,956.2	0.00	0.00	0.00	
11,300.0	90.00	179.67	9,205.0	-2,052.7	-187.8	2,056.2	0.00	0.00	0.00	
11,400.0	90.00	179.67	9,205.0	-2,152.7	-187.2	2,156.1	0.00	0.00	0.00	
11,500.0	90.00	179.67	9,205.0	-2,252.7	-186.7	2,256.1	0.00	0.00	0.00	
11,600.0	90.00	179.67	9,205.0	-2,352.7	-186.1	2,356.1	0.00	0.00	0.00	
11,700.0	90.00	179.67	9,205.0	-2,452.7	-185.5	2,456.0	0.00	0.00	0.00	
11,800.0	90.00	179.67	9,205.0	-2,552.7	-184.9	2,556.0	0.00	0.00	0.00	
11,900.0	90.00	179.67	9,205.0	-2,652.7	-184.4	2,656.0	0.00	0.00	0.00	
12,000.0	90.00	179.67	9,205.0	-2,752.7	-183.8	2,755.9	0.00	0.00	0.00	
12,100.0	90.00	179.67	9,205.0	-2,852.7	-183.2	2,855.9	0.00	0.00	0.00	
12,200.0	90.00	179.67	9,205.0	-2,952.7	-182.7	2,955.9	0.00	0.00	0.00	
12,300.0	90.00	179.67	9,205.0	-3,052.7	-182.1	3,055.8	0.00	0.00	0.00	
12,400.0	90.00	179.67	9,205.0	-3,152.7	-181.5	3,155.8	0.00	0.00	0.00	
12,500.0	90.00	179.67	9,205.0	-3,252.7	-180.9	3,255.8	0.00	0.00	0.00	
12,600.0	90.00	179.67	9,205.0	-3,352.7	-180.4	3,355.7	0.00	0.00	0.00	
12,700.0	90.00	179.67	9,205.0	-3,452.7	-179.8	3,455.7	0.00	0.00	0.00	
12,800.0	90.00	179.67	9,205.0	-3,552.7	-179.2	3,555.6	0.00	0.00	0.00	
12,900.0	90.00	179.67	9,205.0	-3,652.7	-178.6	3,655.6	0.00	0.00	0.00	
13,000.0	90.00	179.67	9,205.0	-3,752.7	-178.1	3,755.6	0.00	0.00	0.00	
13,100.0	90.00	179.67	9,205.0	-3,852.7	-177.5	3,855.5	0.00	0.00	0.00	
13,200.0	90.00	179.67	9,205.0	-3,952.7	-176.9	3,955.5	0.00	0.00	0.00	
13,300.0	90.00	179.67	9,205.0	-4,052.7	-176.3	4,055.5	0.00	0.00	0.00	
13,400.0	90.00	179.67	9,205.0	-4,152.7	-175.8	4,155.4	0.00	0.00	0.00	
13,500.0	90.00	179.67	9,205.0	-4,252.7	-175.2	4,255.4	0.00	0.00	0.00	
13,600.0	90.00	179.67	9,205.0	-4,352.7	-174.6	4,355.4	0.00	0.00	0.00	
13,700.0	90.00	179.67	9,205.0	-4,452.7	-174.0	4,455.3	0.00	0.00	0.00	
13,800.0	90.00	179.67	9,205.0	-4,552.7	-173.5	4,555.3	0.00	0.00	0.00	
13,900.0	90.00	179.67	9,205.0	-4,652.7	-172.9	4,655.3	0.00	0.00	0.00	
14,000.0	90.00	179.67	9,205.0	-4,752.7	-172.3	4,755.2	0.00	0.00	0.00	
14,100.0	90.00	179.67	9,205.0	-4,852.7	-171.7	4,855.2	0.00	0.00	0.00	
14,200.0	90.00	179.67	9,205.0	-4,952.7	-171.2	4,955.2	0.00	0.00	0.00	
14,300.0	90.00	179.67	9,205.0	-5,052.7	-170.6	5,055.1	0.00	0.00	0.00	
14,400.0	90.00	179.67	9,205.0	-5,152.7	-170.0	5,155.1	0.00	0.00	0.00	
14,500.0	90.00	179.67	9,205.0	-5,252.7	-169.4	5,255.1	0.00	0.00	0.00	
14,600.0	90.00	179.67	9,205.0	-5,352.7	-168.9	5,355.0	0.00	0.00	0.00	
14,700.0	90.00	179.67	9,205.0	-5,452.7	-168.3	5,455.0	0.00	0.00	0.00	
14,800.0	90.00	179.67	9,205.0	-5,552.7	-167.7	5,555.0	0.00	0.00	0.00	
14,900.0	90.00	179.67	9,205.0	-5,652.7	-167.1	5,654.9	0.00	0.00	0.00	
15,000.0	90.00	179.67	9,205.0	-5,752.7	-166.6	5,754.9	0.00	0.00	0.00	
15,100.0	90.00	179.67	9,205.0	-5,852.7	-166.0	5,854.9	0.00	0.00	0.00	
15,200.0	90.00	179.67	9,205.0	-5,952.7	-165.4	5,954.8	0.00	0.00	0.00	
15,300.0	90.00	179.67	9,205.0	-6,052.7	-164.8	6,054.8	0.00	0.00	0.00	

Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well Ghost Rider 22-15 Fed Com 13H
Company:	PERMIAN	TVD Reference:	WELL @ 3620.0ft (Original Well Elev)
Project:	NW DISTRICT - NM EZ NAD 83	MD Reference:	WELL @ 3620.0ft (Original Well Elev)
Site:	GHOST RIDER 22-15 FED COM PAD (N West)	North Reference:	Grid
Well:	Ghost Rider 22-15 Fed Com 13H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Ghost Rider 22-15 Fed Com 13H		
Design:	Design #1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
15,400.0	90.00	179.67	9,205.0	-6,152.7	-164.3	6,154.8	0.00	0.00	0.00	
15,500.0	90.00	179.67	9,205.0	-6,252.7	-163.7	6,254.7	0.00	0.00	0.00	
15,600.0	90.00	179.67	9,205.0	-6,352.7	-163.1	6,354.7	0.00	0.00	0.00	
15,700.0	90.00	179.67	9,205.0	-6,452.7	-162.5	6,454.6	0.00	0.00	0.00	
15,800.0	90.00	179.67	9,205.0	-6,552.7	-162.0	6,554.6	0.00	0.00	0.00	
15,900.0	90.00	179.67	9,205.0	-6,652.7	-161.4	6,654.6	0.00	0.00	0.00	
16,000.0	90.00	179.67	9,205.0	-6,752.7	-160.8	6,754.5	0.00	0.00	0.00	
16,100.0	90.00	179.67	9,205.0	-6,852.7	-160.2	6,854.5	0.00	0.00	0.00	
16,200.0	90.00	179.67	9,205.0	-6,952.7	-159.7	6,954.5	0.00	0.00	0.00	
16,300.0	90.00	179.67	9,205.0	-7,052.7	-159.1	7,054.4	0.00	0.00	0.00	
16,400.0	90.00	179.67	9,205.0	-7,152.7	-158.5	7,154.4	0.00	0.00	0.00	
16,500.0	90.00	179.67	9,205.0	-7,252.7	-157.9	7,254.4	0.00	0.00	0.00	
16,600.0	90.00	179.67	9,205.0	-7,352.7	-157.4	7,354.3	0.00	0.00	0.00	
16,700.0	90.00	179.67	9,205.0	-7,452.7	-156.8	7,454.3	0.00	0.00	0.00	
16,800.0	90.00	179.67	9,205.0	-7,552.7	-156.2	7,554.3	0.00	0.00	0.00	
16,837.8	90.00	179.67	9,205.0	-7,590.5	-156.0	7,592.1	0.00	0.00	0.00	

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude	
- hit/miss target										
- Shape										
BHL Ghost Rider 22-15 I	0.00	0.00	9,205.0	-7,590.5	-156.0	435,666.40	749,077.70	32° 11' 45.379 N	103° 39' 42.326 W	
- plan hits target center										
- Point										



GB Connection Performance Properties Sheet

Rev. 1 (08/25/2015)

ENGINEERING THE RIGHT CONNECTIONS™

Casing: 5.5 OD, 17 ppf
Casing Grade: P-110

Connection: GB CD Butt 6.300
Coupling Grade: API P-110

PIPE BODY GEOMETRY					
Nominal OD (in.)	5 1/2	Wall Thickness (in.)	0.304	Drift Diameter (in.)	4.767
Nominal Weight (ppf)	17.00	Nominal ID (in.)	4.892	API Alternate Drift Dia. (in.)	N/A
Plain End Weight (ppf)	16.89	Plain End Area (in. ²)	4.962		

PIPE BODY PERFORMANCE					
Material Specification	P-110	Min. Yield Str. (psi)	110,000	Min. Ultimate Str. (psi)	125,000
Collapse		Tension		Pressure	
API (psi)	7,480	Pl. End Yield Str. (kips)	546	Min. Int. Yield Press. (psi)	10,640
High Collapse (psi)	8,580	Torque		Bending	
		Yield Torque (ft-lbs)	64,680	Build Rate to Yield (°/100 ft)	91.7

GB CD Butt 6.300 COUPLING GEOMETRY					
Coupling OD (in.)	6.300	Makeup Loss (in.)	4.2500		
Coupling Length (in.)	8.500	Critical Cross-Sect. (in. ²)	8.527		

GB CD Butt 6.300 CONNECTION PERFORMANCE RATINGS/EFFICIENCIES					
Material Specification	API P-110	Min. Yield Str. (psi)	110,000	Min. Ultimate Str. (psi)	125,000
Tension		Efficiency		Bending	
Thread Str. (kips)	568	Internal Pressure (%)	100%	Build Rate to Yield (°/100 ft)	80.0
Min. Tension Yield (kips)	891	External Pressure (%)	100%	Yield Torque	
Min. Tension Ult. (kips)	1,013	Tension (%)	100%	Yield Torque (ft-lbs)	23,660
Joint Str. (kips)	568	Compression (%)	100%		
		Ratio of Areas (Cplg/Pipe)	1.72		

MAKEUP TORQUE					
Min. MU Tq. (ft-lbs)	8,990	Max. MU Tq. (ft-lbs)	17,980	Running Tq. (ft-lbs)	See GBT RP
				Max. Operating Tq. (ft-lbs)*	22,480

Units: US Customary (lbm, in., °F, lbf)

1 kip = 1,000 lbs

* See Running Procedure for description and limitations.

See attached: Notes for GB Connection Performance Properties.

GBT Running Procedure (GBT RP): www.gbconnections.com/pdf/RP-GB-DWC-Connections.pdfBlanking Dimensions: www.gbconnections.com/pdf/GB-DWC-Blanking-Dimensions.pdf

Connection yield torque rating based on physical testing or extrapolation therefrom



Notes for GB Connections Performance Properties

Rev. 1 (May, 2018)

ENGINEERING THE RIGHT CONNECTIONS™

1. All dimensions shown are nominal. Plain end weight is calculated in accordance with API TR 5C3. Performance properties are empirical, based on nominal dimensions, minimum material yield and ultimate strengths, and calculated in general accordance with industry standard formula(s) assuming uniaxial loading. All properties are calculated on the basis of materials at room temperature. NOTE: Material properties change with temperature.
2. Joint strength is the lesser of pipe thread strength and minimum coupling tension as calculated in accordance with API TR 5C3. Tensile efficiency is calculated using coupling strength based on ultimate material strength per API TR 5C3 divided by plain end yield strength of the casing. Minimum Coupling Tension based on material *yield* strength is provided *for information only*. Performance values presented for tension do not account for failure by pull-out (which can occur with heavy wall casing), effects of internal and external pressure, thermally induced axial loads, casing curvature (bending), and/or other static and dynamic loads that may occur singularly or in combination during downhole deployment and with subsequent well operations.
3. Drift diameters are based on Standard and Alternate drift sizes per API 5CT. Drift diameters are not specified for API 5L pipe. Drift diameters shown on GB Connection Performance Property Sheets represent the diameter of the drift mandrel used for end-drifting after coupling buck on. When shown, the alternate drift diameter is used for end drifting. Drift testing is performed in accordance with currently applicable API Specifications.
4. Minimum Internal Yield Pressure Performance values for Casing (API 5CT), Line Pipe (API 5L), and mill casing proprietary grades are based on API TR 5C3 formulas and assume 87.5% minimum wall thicknesses. Minimum Internal Yield Pressure efficiency for GB Connections is the lesser of the Minimum Internal Yield Pressure of the coupling and Leak Resistance divided by pipe body Minimum Internal Yield Pressure (all based on API TR 5C3 formulas). GB Connections typically demonstrate pressure resistance exceeding the mating pipe body unless otherwise noted with a pressure efficiency < 100%. Pressure efficiency can only be achieved when connections are properly assembled in strict accordance with GB Connections' Running Procedures (www.gbconnections.com/pdf/RP-GB-DWC-Connections.pdf).
5. Compression efficiency of the Casing/Connection combinations does not consider the axial load that causes pipe body buckling. The compressive load that causes buckling is usually less than the pipe body compressive yield strength and is dependent on a number of factors including, but not limited to, string length (or slenderness ratio; L/D), thermally induced axial loads, and annular clearance that may (or may not) lend side support to the casing string.
6. Bending values assume a constant radius of curvature where the casing is in uniformly intimate contact with the wall of the wellbore (i.e. when the upset at the coupling OD is small compared with wellbore wall irregularities). When the radius of curvature is not constant due to large wellbore wall irregularities, varying trajectory, micro doglegs, wash-outs, rock ledges, and other downhole conditions, unpredictable excessive bending stresses can occur that may be detrimental to casing and connection performance.
7. Fatigue failures are a function of material properties, stress range, and number of stress reversal cycles. API 5CT, API 5L, and mill proprietary casing/coupling materials have a finite fatigue life. Higher stress ranges yield lower fatigue life. So as a general rule of thumb, casing should never be rotated at higher RPMs than needed for task accomplishment. For the same stress range, casing rotated at 25 RPMs will generally last 4 times longer (more rotating hours) than casing rotated at 100 RPMs. However with fatigue, there are opportunities for unexpected higher stress reversal levels associated with vibration, thermally induced axial loads, and bending (see above) in addition to all other stress reversals imparted during running, rotating, reciprocating, pressure testing, pumping, etc. The extent and quality of the cement job is also a factor. Under aggressive, high-volume, multi-stage hydraulic fracturing operations, the casing string (including the connections) is severely taxed such that local stress range(s) and actual number of applied cycles cannot be precisely determined without full string instrumentation.
8. External pressure efficiency (expressed in percent) is the ratio of the lesser of Minimum Internal Yield Pressure and Leak Resistance for coupling (calculated per API TR 5C3) divided by the API collapse rating of the casing. External pressure efficiency has not been verified by testing and does not consider other applied loads. External pressure efficiency does not account for any high collapse rating that may be shown on GB Connection Performance Property Sheets.
9. Maximum Makeup Torque is provided for guidance only. This value is not the same as the Connection Yield Torque shown. Connection Yield Torque is the lesser of yield torque rating for the critical cross-section of pipe body, connector body, and pin nose and the threadform load flank bearing area. Connection Yield Torque does not consider radial buckling of the pipe or connection due to excessive jaw pressure during torque application. Torque in connections can increase or decrease over that applied at makeup (connection tightening/loosening) with rotating and stimulation operations due to slip-stick, shock loads, bending, tight spots, vibration(s), temperature, and other downhole factors that may occur individually or in combination. Due to circumstances beyond the control of GB Connections, User accepts all risks associated with casing and connection related issues that occur during and after rotating operations.
10. **Every** GB Connection requires the proper amount and distribution of thread compound to all pin and coupling threads and careful field make up in strict accordance with GB Connections' Running Procedures to provide expected levels of performance in service.
11. Reactions among water, drilling muds and other fluids, and chemicals introduced by User with downhole formation fluids may result in an environment detrimental to casing and connection performance. User should carefully consider all aspects of the string design including material compatibility with respect to possible corrosion, sour conditions, and other factors that may result in unexpected casing and/or connection failure at or below published ratings.
12. Performance Properties are subject to change without notice. User is advised to obtain the current GB Connection Performance Property Sheet for each application. Please visit www.gbconnections.com to download.

Limitations

Data presented in GB Performance Property Sheets and Running Procedures ("GB Information") is provided for informational purposes only and intended to be supplemented by the professional judgment of qualified personnel during design, field handling, deployment, and all subsequent well operations. The use of GB Information is at the User's sole risk.

GB Connections, LLC's Terms and Conditions of Sale, including, but not limited to, Paragraph 10 ("Warranty; Disclaimer"), Paragraph 11 ("Limitation of Remedies"), and Paragraph 18 ("Subsequent Buyers") thereof, are incorporated into the GB Information for all purposes. By using GB Information, the User represents and warrants to GB Connections, LLC. that the User has read and understands GB Connections, LLC's Terms and Conditions of Sale and agrees to be bound thereby. GB Connections, LLC's Terms and Conditions of Sale are posted on its website and available for viewing and downloading at the following link: www.gbconnections.com/pdf/Terms-and-Conditions.pdf.

All sales made by GB Connections, LLC are subject to its Terms and Conditions of Sale, reference to which is hereby made for all purposes. GB Connections, LLC's Terms and Conditions of Sale are posted on its website and available for viewing and downloading at the following link: www.gbconnections.com/pdf/Terms-and-Conditions.pdf. Purchasers and users of any product(s) from GB Connections, LLC. automatically agree to be bound by GB Connections, LLC's Terms and Conditions of Sale.

	Running Procedure for Casing with GB Drilling with Casing Connections	October 29, 2007
		Rev. 13 (05/16/2018)

OVERVIEW

This field running procedure applies to makeup of **GB Drilling with Casing** (GB DwC) Connections which include GB CD, GB CDE, GB RDB, AND GB RDB WS Connections with GB Butt (Buttress), GB 4P, and GB 3P thread forms. All of these connections are suitable for **Running** (standard casing applications), **Rotating** (to aid string advancement), **Drilling** (Drilling with Casing/Drilling with Liners) and **Driving**. This procedure also applies to the legacy GB Connections known as GB Butt and GB 3P.

Numerous factors impact the makeup torque of Buttress (GB Butt) and Modified Buttress Threads (such as GB 4P and GB 3P). Some of these factors include but are not limited to: allowable threading tolerances, joint characteristics (OD, straightness, hooked ends, and weight), vertical alignment (derrick, top drive, and elevator alignment relative to rotary table), thread compound (amount and distribution), snub line (location and orientation), distance between tongs and backups, temperature/weather, equipment type, efficiencies (electrical, hydraulic and mechanical), grips/dies (type, condition, orientation, location, contact area, and grip distribution), measurement equipment, gauge calibration, personnel, etc. The nature of these types of connections makes it impossible to provide makeup torque values that will yield proper power tight makeup on every rig under all circumstances with the wide variety of existing connection makeup equipment.

This procedure has been designed to determine the **Running Torque** required for proper power tight makeup of GB Connections under the circumstances and with the actual equipment, set up conditions, weather, etc. that exist at the time of running. With proper execution of this procedure, GB Connections will be properly and consistently assembled.

LIMITATIONS

This GB Running Procedure provides the basic recommended practices and is intended to be supplemented by the professional judgment of qualified personnel based on observation of actual makeups throughout the casing run. GB DwC Connections require the proper amount and distribution of thread compound to all pin and coupling threads and careful field makeup in strict accordance with GB Connections' Running Procedures to provide expected levels of performance in service.

GB Connections, LLC's Terms and Conditions of Sale, including, but not limited to, Paragraph 10 ("Warranty; Disclaimer"), Paragraph 11 ("Limitation of Remedies"), and Paragraph 18 ("Subsequent Buyers") thereof, are incorporated into this document for all purposes. With purchase and use of GB Connections products, the recipient represents and warrants to GB Connections, LLC. that the recipient has read and understands GB Connections, LLC's Terms and Conditions of Sale and agrees to be bound thereby. GB Connections, LLC's Terms and Conditions of Sale are posted on its website and available for viewing and downloading at the following link: www.gbconnections.com/pdf/Terms-and-Conditions.pdf.

DEFINITIONS

1. **Minimum Makeup (MU) Torque:** Connections must have at least this amount of torque applied.
2. **Shoulder Torque:** MU torque required to achieve shoulder engagement.
3. **Running Torque:** Developed at start of casing run per GB Running Procedure and once established, used for the rest of the joints in the string. Using data established with progression of the casing run. The **Running Torque** may be adjusted as needed to stay within parameters defined here. The **Running Torque** will likely vary with each job due to the factors listed in the Overview section.
4. **Delta Torque:** Difference between **Shoulder Torque** and final makeup torque.
5. **Maximum Makeup (MU) Torque:** Assembly torque shall not exceed the **Maximum MU Torque** shown on size, weight, and grade-specific GB Performance Property Sheets at the beginning of a casing run when

	Running Procedure for Casing with GB Drilling with Casing Connections	October 29, 2007 Rev. 13 (05/16/2018)
---	--	--

establishing the **Running Torque**. In the unlikely event that **Running Torque** determined by the procedure meets or exceeds the **Maximum MU Torque**, call GB Connections for assistance.

6. **Yield Torque:** Torque that causes yielding in the connection (usually yielding of the pin nose). **Yield Torque** rating does **NOT** consider the torque that may radially buckle the pipe body at the grip points. **Yield Torque** values for the pipe body and connection which are based on nominal dimensions and minimum material yield strength.
7. **Maximum Operating Torque:** The **Maximum Operating Torque** shown on the GB Connections Performance Property Sheets includes a 5% safety factor on **Yield Torque**. As such, it represents the limiting torque **spike** that can be applied to the connection during rotating operations. The **Maximum Operating Torque** is **NOT** the **Maximum MU Torque** and is **NOT** a sustainable rotating torque. Operating at the **Maximum Operating Torque** for any length of time may damage connections due to likely random, unexpected torque spikes that occur during rotating operations. USER should carefully consider this value to determine if a higher Safety Factor on **Yield Torque** is more suitable for the project-specific application.

KEY INFORMATION

- Thread Compound:** Best-O-Life 2000, Best-O-Life 2000 Arctic Grade (AG), API Modified, API Modified Hi-Pressure, or any industry recognized equivalent to these products. Thread compound may also be referred to as “dope”. User should avoid products that include Metal Free (MF) in the product name. Tool joint compounds are expressly forbidden for makeup of GB DwC Connections. Apply thread compound to all pin and box threads as described here is required per this procedure.
- Torque Values:** **Minimum and Maximum MU Torque** values are provided on individual GB Connections Performance Property Sheets available at the following link:
<http://www.gbconnections.com>
- Continuous Makeup:** Makeup of GB Connections **SHALL START AND CONTINUE WITHOUT STOPPING** until full power tight makeup is achieved.
- Makeup Speed:** Use of high gear at no more than 20 RPMs is permissible once proper starting thread engagement has occurred. **THE FINAL TWO (2) TURNS, AT A MINIMUM, SHALL BE COMPLETED IN LOW GEAR AT LESS THAN 6 RPMS.**
- Pin Nose Engagement:** Pin nose engagement is indicated by a spike on an analog torque gauge or a sharp vertical spike on a torque vs. turn plot. As a secondary check, proper power tight makeup is achieved when the coupling covers approximately half of the API Triangle Stamp on the pin. The triangle will be stamped on the pin member as indicated by a white locator stripe.
- Acceptance Criteria:** All GB Connections must exhibit shoulder engagement (achieve pin-to-pin or pin-to-shoulder engagement) with a: (1) **Delta Torque** ranging between 10% and 50% of majority of the **Shoulder Torque** and (2) final torque not exceeding the **Running Torque** as established in this procedure. Outlier joints that require additional attention would be an exception to **Maximum MU Torque** limit as discussed under Comments, Troubleshooting.

It is imperative that the following procedure be executed carefully at the beginning of every casing run to determine the **Running Torque** (torque to be used for the rest of the string). Torque values established on an individual casing run are never transferrable to other runs. The procedure should be fully executed for each and every casing run.


	Running Procedure for Casing with GB Drilling with Casing Connections	October 29, 2007
		Rev. 13 (05/16/2018)

The **Running Torque** is determined while running the first 10 joints after joints assembled with threadlocking compounds are made up. Sometimes more than the first 10 joints will be needed to establish the **Running Torque** due to erratic results and/or other run-specific conditions. The **Running Torque** may have to be re-established or adjusted during the casing run under certain conditions¹ and observations. Use the size-specific GB Connections Performance Property Sheets (<http://www.gbconnections.com>) for physical properties for the **Minimum** and **Maximum MU Torque** values.

Connections shall be made up until shoulder engagement with **Delta Torque** $\geq$ 10% of the **Shoulder Torque** (not to exceed the **Maximum MU Torque**, see procedure below) using the **Running Torque** value established in this procedure. The **Maximum MU Torque** at the beginning of the casing run for establishing the **Running Torque** shall be limited to the value shown on the applicable GB Connections Performance Property Sheet. The **Running Torque** shall be used thereafter and throughout the run as the limiting makeup torque value. The **Maximum MU Torque** on the GBC Performance Property Sheet value is given as a practical limit for avoidance of thread galling, connection damage, and possible tube damage due to excessive jaw pressure that can occur with application of extreme makeup torque. Contact GB Connections if more than the **Maximum MU Torque** value is required for shoulder engagement and/or final makeup, or if torque exceeding the **Maximum Operating Torque** value is required for the intended service.

PROCEDURE FOR ESTABLISHING RUNNING TORQUE

1. Remove coupling thread protectors only after casing is set in V-Door.
2. **Always apply fresh thread compound to coupling threads and internal shoulder (where applicable).** See Comment No. 1 (below) for discussion on proper amount of thread compound.
3. Remove pin thread protectors only after joint is raised in the derrick. Visually inspect pin threads for sufficient thread compound as described in Comment No. 1; **add fresh compound to pin threads and pin nose.**
4. Fresh thread compound should **NEVER** be added on top of dope contaminated with dust, dirt, and/or debris. Threads observed to have contaminated thread compound shall be thoroughly cleaned and dried before applying fresh thread compound.
5. Stab the pin carefully into the coupling of the joint hanging in the rotary table. A stabbing guide is recommended to protect the pin nose and leading thread from physical damage that may contribute to thread galling. Make up each connection until shoulder engagement plus **Delta Torque** between 10% and 50% of the **Shoulder Torque** without exceeding the **Maximum MU Torque**. Record the **Shoulder Torque** observed for the first 10 joints (excluding threadlocked accessory joints). The **Running Torque** is (a) the **Minimum MU Torque** shown on the GB Connections Performance Property Sheets **or** (b) the **Maximum Shoulder Torque** recorded from the first 10 makeups + 10%, **whichever is higher** (rounded to the next highest 500 ft.-lbs.) When making up the initial joints for establishing the **Running Torque** carefully watch the torque gauge for the **Shoulder Torque** and try to manually shut down the tongs before reaching **Maximum MU Torque** shown on the GB Connections Performance Property Sheets. Alternately, the dump valve should be set to the **Maximum MU Torque** during this initial process.
6. After the first 10 makeups (more if necessary due to conditions at the time of the run), use the "**Running Torque**" established in Step 5 for the remainder of the string. A dump valve is strongly recommended to stop makeup once the established **Running Torque** is achieved.

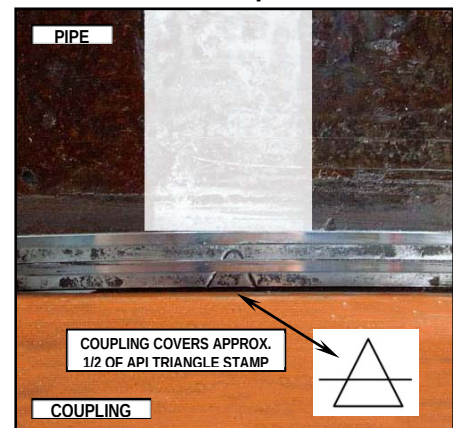


¹ Examples include but are not limited to more than an occasional low or high **Delta Torque**, string of mixed mills, equipment change, large temperature change, and wobbling or noticeable vibration when joint is turning.

	Running Procedure for Casing with GB Drilling with Casing Connections	October 29, 2007 Rev. 13 (05/16/2018)
---	--	--


7. All connections made up with the established **Running Torque** should achieve shoulder engagement with the minimum amount of **Delta Torque**. Carefully watch for the spike on the torque gauge during each make up to verify shoulder engagement. As a **secondary** verification, randomly check the makeup position relative to the API Triangle Stamp during the run. Proper power tight makeup position is achieved when the coupling covers approximately half of the API Triangle Stamp on the pin (see accompanying photo).
8. All connections should achieve shoulder engagement with at least 10% **Delta Torque** before the **Maximum MU Torque** is achieved.

COMMENTS, TROUBLESHOOTING

1. GB Connections are thread compound friendly. Thread compounds shall be handled, mixed, and applied in strict accordance with the manufacturer's instructions. **THREAD COMPOUND SHALL BE APPLIED TO BOTH PIN AND COUPLING THREADS AND OPPOSING PIN NOSE OR SHOULDER AREA OF EVERY CONNECTION.** Sufficient thread compound has been applied when all threads (pin and coupling), pin nose, and coupling ID surfaces are completely covered **WITH NO GAPS OR BARE SPOTS.** The thread form should be discernible beneath the compound; i.e. when the thread valleys appear half full. Be generous with the thread compound; but avoid over-doping to the point where **excessive** amounts are squeezed out during assembly. Use of a mustache brush is the preferred method for applying and distributing thread compounds to GB Connections.

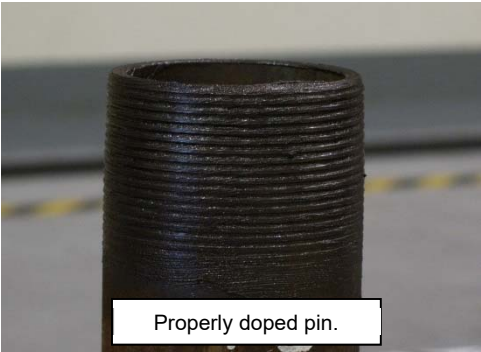

Properly doped pin.
2. If threads are cleaned on racks, new dope shall be applied in a light, even coat to both pin and coupling threads. See Comment No. 1 above for description of sufficient thread compound. Clean thread protectors shall be re-applied to freshly doped pin and coupling threads unless the casing run is imminent (no more than a few hours) to avoid contaminating exposed thread compound.
3. All connections should achieve shoulder engagement before reaching the **"Running Torque"** value determined by this procedure. Any connection that does not achieve shoulder engagement at the established **"Running Torque"** value shall be visually inspected for position relative to the API Triangle Stamp.

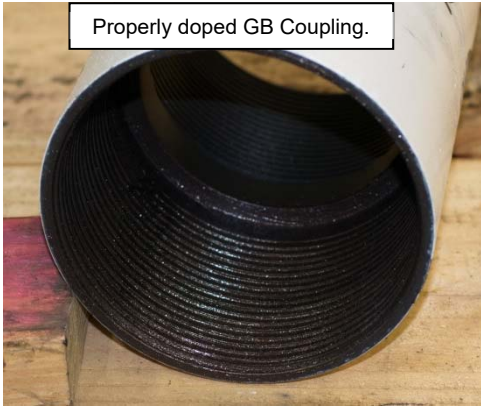

Properly doped GB Coupling.

 - a) If the coupling is shy of the API Triangle Stamp Base, the connection shall be broken out, cleaned and inspected visually for thread damage, re-doped, and made-up again (or laid down if threads are damaged). Connections that have not achieved shoulder engagement **SHALL NEVER** be backed up a couple of turns and remade. They shall be completely broken out, cleaned and inspected as described above.
 - b) If the coupling covers the API Triangle base but does not cover approximately half of the Triangle Stamp, add additional torque to achieve shouldering and finish the makeup. It is common to see high torque (possibly exceeding the **Maximum MU Torque**) to initiate connection turning. This is acceptable as long as the torque drops off once movement starts and then spikes with shoulder engagement. If acceptable makeup doesn't occur with one additional torque application, the connection shall be broken out (as described in 3a above). With an additional attempt, it is OK for the final torque to exceed the **Running Torque** but it should not exceed the **Maximum MU Torque** (except to initiate additional turning).
 - c) Any connection not properly assembled (i.e. not meeting the acceptance criteria) in two (2) attempts (provided threads pass a visual inspection each time) is reject and shall be laid down.


	Running Procedure for Casing with GB Drilling with Casing Connections	October 29, 2007
		Rev. 13 (05/16/2018)

4. At the established **Running Torque**, the connections will generally shoulder with **Delta Torque** between 10% and 50%. High interference connections will tend to have a higher **Shoulder Torque** and less **Delta Torque** (at least 10% of the **Shoulder Torque** is required). Low interference connections will tend to have lower **Shoulder Torque** and more **Delta Torque**. In general, the GB Connections makeup consistently but will vary due to any of the factors enumerated in the second paragraph of the Overview section of this procedure. However, wide variability on more than a few joints should be investigated for a root cause and, if necessary, a new **Running Torque** should be adjusted as described below.

If a connection appears to have shouldered but doesn't have at least 10% **Delta Torque**, the position relative to the API Triangle Stamp should be checked. In just about every instance, the position will have covered the triangle base, so additional torque can be added to complete the makeup as discussed in 3.b) above. Expect an instantaneous spike with showing more than 30% **Delta Torque** with application of additional torque. Under this condition, this makeup is acceptable.

Similarly, random connections here and there with more than 30% **Delta Torque** is generally not cause for concern. However, if overshooting the 30% maximum **Delta Torque** target occurs frequently, then the established **Running Torque** value should be walked down in 500 ft-lbs. to 1,000 ft-lbs. increments until connection makeup routinely falls in line with the stated acceptance criteria.

5. **Torque vs. Turn monitoring systems are recommended for field makeup of GB Connections.** While Torque vs. Turn plots provide good information about makeup, they **SHALL NOT BE SUBSTITUTED FOR DIRECT VISUAL OBSERVATION OF THE CONNECTION DURING ASSEMBLY.** There is no second chance to watch field assembly of a connection. Torque vs. Turn plots can always be viewed for verification purposes once a makeup is finished. When available, torque vs. turn plots shall finish with a clearly defined spike as shown in the graphic to the right. The general character of torque vs. turn plots for good makeups will become evident after the first ten (10) makeups (again, more may be necessary due to rig-and/or equipment-specific conditions). Any makeup that results in a plot that is "out-of-character"² when compared with the majority of plots from previous good makeups should be checked carefully.

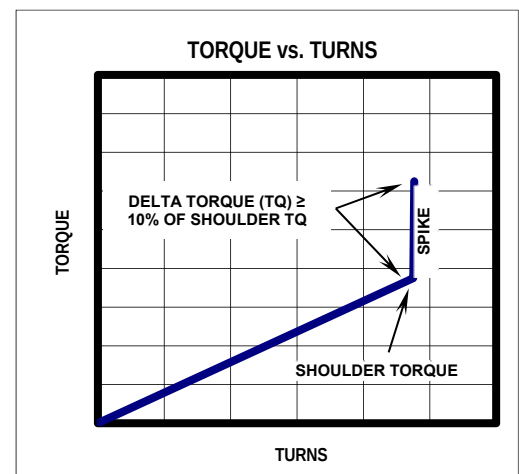

When using Torque vs. Turn monitoring equipment, GB recommends setting a reference torque value of 500 ft-lbs. or 10% of the minimum makeup torque (whichever is lower) to normalize the resulting plots. Plot scales should be set so data spans at least 2/3 of the turns scale on each plot (15 turns will usually be sufficient at the start and can be reduced based on data from the first few joints). **UNDER NO CIRCUMSTANCE SHOULD MAKEUP BE STARTED UNTIL THE MONITORING SYSTEM IS READY TO RECORD DATA.**

6. Occasionally the mill side of a GB Connection may turn during field makeup. When observed, the makeup should continue without stopping per this procedure. It may be helpful to scribe a vertical line across the coupling-pipe interface to aid estimation of mill side turning if it is observed with some frequency. The amount of mill side turn should be carefully observed and estimated. If the mill side turns less than ½ turn and all other aspects of the makeup are good, the connection is acceptable. If the mill side turns more than ½ turn trouble-shooting should be initiated paying particular attention to amount and distribution of thread compound, vertical alignment, weight of joint, hooked end on pipe, and other possible factors that may contribute to possible high torque during field makeup. Counting turns can help to estimate if coupling will need to be stopped to avoid over rotation. It should

² An "out-of-character" plot may initiate with a high torque, show significantly steeper slope from the start of makeup, wide torque undulations as makeup progresses, no clearly defined spike, insufficient/inconsistent turns, etc.

	Running Procedure for Casing with GB Drilling with Casing Connections	October 29, 2007
		Rev. 13 (05/16/2018)

be noted that mill side turning during field makeup occurs occasionally and should not be concerning. Frequent or persistent mill side turning is a symptom that needs troubleshooting and appropriate corrective action.

7. A double wrap of the pick-up sling should be used when raising casing into the derrick when lifting subs, single joint, side-door, or slip elevators are not being used.
8. Higher torque may be required to achieve shoulder engagement when threadlock compounds are applied. User is advised to carefully follow the manufacturer's instructions with respect to mixing, application, temperature, and time. Torque ranges with threadlock compounds cannot be estimated due to many variables including but not limited to temperature, time, connection tolerances, and surface finish. In these cases, carefully monitor makeup to be sure shouldering occurs. The only exception to the shouldering requirement is with float equipment (float shoe and float collar) that will be assembled with a threadlocking compound. In this case, makeup to a position that covers the base of API Triangle Stamp is considered satisfactory.
9. Manual and automated dump valves can miss the established **Running Torque** due to several factors. Slightly overshooting the **Running Torque** is not cause for concern as long as the final "dump" torque is not excessive, and the equipment used is generally consistent joint-to-joint. Overshooting the **Running Torque** with a final makeup speed greater than 10 RPMs is risky and potentially harmful to the connection as discussed below.
10. Attached is a "Worksheet for determining GB Connections **Running Torque** at the beginning of a Casing Run" for use at the start of any casing run using GB Connections. GB recommends that this worksheet be filled out and maintained with the casing run records.

MAKEUP SPEED

To reiterate: Use of high gear at no more than 20 RPMs is permissible once proper starting thread engagement has occurred. **THE FINAL TWO (2) TURNS, AT A MINIMUM, SHALL BE COMPLETED IN LOW GEAR AT LESS THAN 6 RPMS.**

Making up connections at RPM exceeding those listed above may result in unsatisfactory connection performance downhole. Risks associated with excessive makeup RPMs are common for any connection with internal pin nose engagement. High speed makeup can:

1. Impart an unnecessary impulse load at nose contact. Certain materials are more susceptible to cracking under sudden or instantaneously applied loads.
2. Inhibit efficient movement of and trap thread compound under high pressure causing additional and unquantifiable high hoop stresses in the connection.
3. Result in significant overshoot of established dump torque value due to equipment latency between signal and equipment shut down resulting in higher but unknown actual final torque value. Excessive overshoot can result in pin nose yielding.

PROCEDURE SUMMARY

1. Remove coupling protectors after casing is set in V-Door and apply fresh thread compound to coupling threads.
2. Raise joint in derrick, remove pin protectors, and apply fresh thread compound to pin threads and pin nose.
3. Carefully stab pin into coupling and makeup to pin nose engagement. Try to stop makeup without exceeding the **Maximum MU Torque** (shown on GB Connections Performance Property Sheets). Carefully watch for and note the **Shoulder Torque**.
4. Record **Shoulder Torque** and Final Torque values, and position relative to API Triangle Stamp for first ten (10) connections, more if necessary due to run/rig-specific conditions.

	Running Procedure for Casing with GB Drilling with Casing Connections	October 29, 2007
		Rev. 13 (05/16/2018)

5. The **Running Torque** is (a) the **Maximum MU Torque** shown on the GB Connections Performance Property Sheet or (b) the maximum torque required for shoulder engagement + 10% **Delta Torque** determined from the first 10 makeups, **whichever is higher**. Use the attached Worksheet to record this data and determine the **Running Torque**.
6. Make up the rest of the string at the **Running Torque** determined in the previous step verifying each connection has shouldered with between 10% and 30% **Delta Torque**.

NOTES:

- This summary is provided for quick reference and is not a substitute for the comprehensive procedure provided above.
- Does not apply to threadlock connections.

DO's and DONT's

1. **DO** check vertical alignment.
2. **DO** apply thread compound to all pin and coupling threads, pin nose and coupling shoulder area.
3. **DO** establish the **Running Torque** in accordance with GB Procedures.
4. **DO** make adjustments to **Running Torque** if indicated by inconsistent makeups during the casing run.
5. **DO** check every makeup for a clear indication of shouldering with a minimum **Delta Torque** $\geq 10\%$ of the **Shoulder Torque**.
6. **DO** reject any coupling that is not properly made up after two (2) attempts.
7. **DO** carefully stab pins into coupling (use a stabbing guide for casing smaller than 9 5/8" OD).
8. **DO** finish the makeup with at least two (2) full turns in low gear at 6 RPMs or less.
9. **DO** make up every connection continuously to pin nose engagement without stopping.
10. **DO** make note of anything that occurs with any connection makeup such as backup grips slipped, connection inspected and remade, etc.
11. **Do** check out every connection that appears out of character relative to the population. An example would be a connection that is completed in significant fewer turns than most others. Check the triangle stamp and record position and take corrective action if needed.
12. **DO** add torque to any connection that appears to achieve pin nose engagement but not 10% delta torque.
13. **DO** adjust the **Running Torque** up or down in increments to achieve consistent **Delta Torque** between 10% and 30%.
14. **Do** make note of any anomaly during any connection makeup, such as backups slipped, mill side turned, etc.
15. **DO NOT** over dope.
16. **DO NOT** exceed the **Maximum MU Torque** as shown on the GB Connections Performance Property Sheets during assembly.

	Running Procedure for Casing with GB Drilling with Casing Connections	October 29, 2007
		Rev. 13 (05/16/2018)

17. **DO NOT** make up any misaligned connection.
18. **DO NOT** exceed 20 RPMs in high gear and 6 RPMs in low gear for the final two (2) full turns.
19. **DO NOT** remove pin thread protectors until pipe is hanging in the derrick.
20. **DO NOT** ever back a connection up a couple of turns and remake. Any connection requiring this type of attention **SHALL** be broken out completely, cleaned, visually inspected, and if OK, re-doped and remade.
21. **DO NOT** hesitate to contact GB Connections with questions before and during any casing run.

RECOMMENDED EQUIPMENT

- Stabbing Guide
- Mustache Brush
- Torque vs. Turn Monitoring Equipment or Dump Valve

Worksheet for determining GB Connection Running Torque at the beginning of a Casing Run

Ignore joints that are assembled with threadlock compounds. See "Addendum Procedure for GB Connections Assembled with Threadlocking Compounds" available at www.gbconnections.com.

Pertinent Excerpt from GB Running Procedure

5. Stab the pin carefully into the coupling of the joint hanging in the rotary table. A stabbing guide is recommended to protect the pin nose and leading thread from physical damage that may contribute to thread galling. Make up each connection until shoulder engagement plus delta torque $\geq 10\%$ of the shoulder torque without exceeding the Maximum Makeup Torque. Record the shoulder torque observed for the first 10 joints (excluding threadlocked accessory joints). The Running Torque is (a) the Minimum Makeup Torque shown on the GB Connection Performance Property Sheets or (b) the Maximum Shoulder Torque recorded from the first 10 makeups + 10%, whichever is higher (rounded to the next highest 500 ft.-lbs.) When making up the initial joints for establishing the Running Torque carefully watch the torque gauge for the shoulder torque and try to manually shut down the tongs before reaching Maximum Makeup Torque shown on the GB Connection Performance Property Sheets. Alternately, the dump valve should be set to the Maximum Makeup Torque during this initial process.
6. After the first 10 makeups (more if necessary due to conditions at the time of the run), use the "Running Torque" established in Step 5 for the remainder of the string. A dump valve is strongly recommended to stop makeup once the established Running Torque is achieved.

Casing Data		Comment
OD (in)		See GBC Performance Property Sheet
Weight (ppf)		See GBC Performance Property Sheet
Grade		See GBC Performance Property Sheet
Min MU Torque (ft-lbs)		See GBC Performance Property Sheet
Max MU Torque (ft-lbs)		See GBC Performance Property Sheet
Max Operating Torque (ft-lbs)		The Maximum Operating Torque is NOT the Maximum Makeup Torque and is NOT a sustainable rotating torque. Operating at the Maximum Operating Torque for any length of time will likely damage the connection.

Notes	Joint No.	Shoulder Torque (ft-lbs)	Final Torque (ft-lbs)	Triangle Stamp Position Sketch ($\triangle$)
Required	1			
Required	2			
Required	3			
Required	4			
Required	5			
Required	6			
Required	7			
Required	8			
Required	9			
Required	10			
Optional	11			
Optional	12			
Optional	13			
Optional	14			
Optional	15			
Max. Shoulder Torque				
A Max. Shoulder Torque + 10%				
B Min. Makeup Torque (from GB Conn. Data Sheet)				
Running Torque (ft-lbs)		-	A or B, whichever is greater.	

Optional joints should be added if there is wide variability in shoulder torques recorded during the initial 10 joints. Judgement should be used to determine if more than 10 joints are needed for the purpose of establishing the Running Torque and, if so, how many more should be added.

Wide variations in Shoulder Torque during the first ten (10) joints suggest other issues requiring attention such as poor alignment, improper amount and distribution of thread compound, etc. Refer to 2nd paragraph of GB Running Procedure for possible contributing factors to aid troubleshooting.

GB Connections

950 Threadneedle, Suite 130
Houston TX 77079
Toll Free: 1-888-245-3848
Main: 713-465-3585
Fax: 713-984-1529

For Technical Information, contact:


Gene Mannella
gmannella@gbconnections.com

Qing Lu
qlu@gbconnections.com

Jordan Kies
jkies@gbconnections.com

RUNNING PROCEDURE

Apache Corp. 5-1/2" or 7" Producer

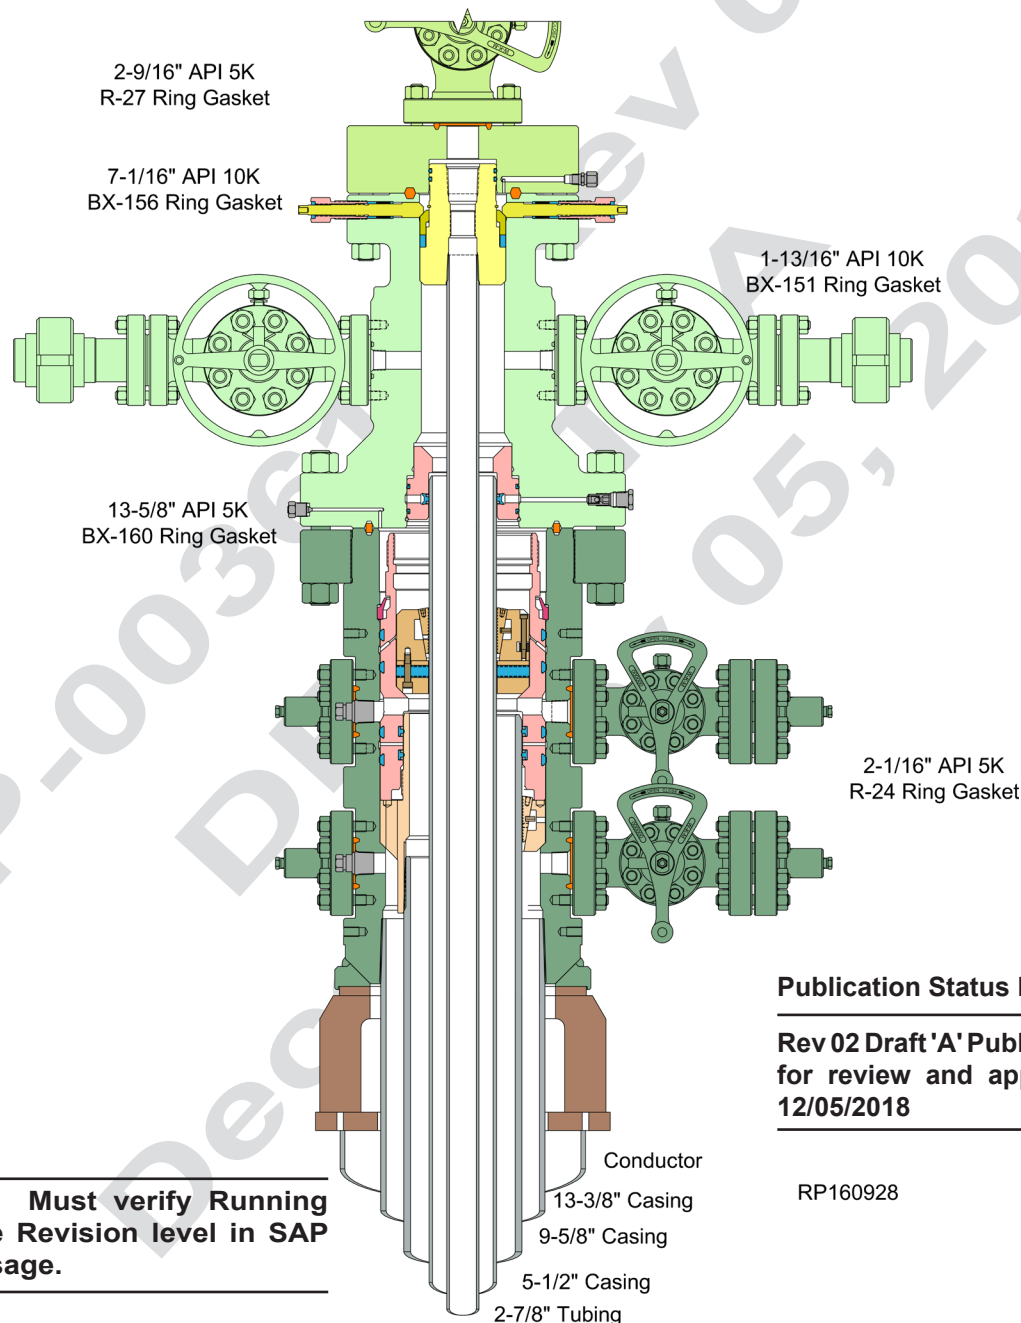

Publication Status Note:

Rev 02 Draft 'A' Publication sent
for review and approval; EA
12/05/2018

RP160928

CAUTION Must verify Running
Procedure Revision level in SAP
prior to usage.

Surface Systems Publication



CAMERON
A Schlumberger Company

13-5/8" 5K MN-DS System
13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program

RP-003612
Rev 02 Draft A

Safety Hazard Indicators

The Safety Hazard Indicators listed below will be used throughout this procedure to indicate potentially hazardous and/or personnel risks that may be encountered during the performance of the tasks outlined in this procedure.



CAUTION

Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury

WARNING

Indicates a hazardous situation which, if not avoided, could result in death or serious injury

DANGER

Indicates a hazardous situation which, if not avoided, will result in death or serious injury

NOTICE

Preferred to address practices not related to personal injury

ES-000175-02

This document alone does not qualify an individual to Install/Run the Equipment. This document is created and provided as a reference for Qualified Cameron Service Personnel and does not cover all scenarios that may occur.

© 2016 Cameron International Corporation. All rights reserved. This material is the copyrighted work of Cameron International Corporation and may not be reproduced, displayed, modified or distributed without the express prior written permission of the copyright holder.

RP-003612
Rev 02 Draft A

13-5/8" 5K MN-DS System
13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program





13-5/8" 5K MN-DS System
13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program

Released to Imaging: 8/20/2021 2:35:51 PM

Table of Contents

Stage 4.0 — Install the Capping Flange	45
4.1. Install the Temporary Abandonment Cap	45
4.2. Energize the NX Bushing 'P' Seal	46
4.3. Test the Void Between 5-1/2" or 7" Casing Hanger & Capping Flange 'NX' Bushing	46
4.4. Remove the Temporary Abandonment Cap	47
Stage 5.0 — Install the Tubing Spool.....	48
5.1. Install the Tubing Spool	48
5.2. Energize the NX Bushing 'P' Seal	50
5.3. Test the Void Between 5-1/2" or 7" Casing Hanger & Tubing Spool 'NX' Bushing ..	50
Stage 6.0 — 2-7/8" Tubing	51
6.1. Install the Tubing Hanger	51
6.2. Install the Christmas Tree.....	53
6.3. Test the Connection.....	54
Torque Chart	55
IC Test Plug Load Chart	56
Minimum Casing Load Chart for IC Type Hangers.....	56
Injection Gun Preparation.....	57
Fraction to Decimal Conversion Chart.....	58
Reference Documents.....	59
Document Control	60

RUNNING PROCEDURE GENERAL WARNING

READ AND UNDERSTAND ALL INSTRUCTIONS. Failure to follow may result in serious personal injury and damage not only to the equipment but also the environment.

1. Safety is a combination of staying alert, common sense, and experience with the oil field equipment and environment. Read this Running Procedure prior to operating and installing the equipment. Be familiar with the operation terminologies of oil field equipment.
2. This document includes basic installation guidance. **The field service personnel shall be fully trained in all aspects of handling pressure control equipment as well as of the job that they are going to perform.** If any of the procedures and policies listed in this procedure cannot be followed, contact a Cameron Representative for the best course of action.
3. Proper **Personal Protective Equipment (PPE)** shall be utilized according to Company policies. Always use proper tools when servicing the equipment.
4. A **Job Hazard Analysis (JHA)** must be performed prior to beginning any service on a well location. A JHA review meeting will be held with all affected rig personnel PRIOR to the commencement of work to review the results of the JHA, evacuation routes, emergency contacts, etc. All meeting attendees and a Company Representative will sign-off on the JHA to acknowledge this meeting has taken place
5. **Be aware of unexpected circumstances** that may arise when operating or servicing the equipment. Utilize the **Step Back 5X5 Process** in order to assess the hazards posed before, during, and after the servicing of equipment under pressure or with the potential of hazardous chemicals present. Be familiar with the company's and facility's Lockout/Tagout program in order to ensure all sources of energy (i.e. electrical, pneumatic, pressure) are isolated and/or de-energized prior to beginning work.
6. All **governmental or Company safety requirements** shall be met before working on the equipment. **Requirements of fully tested pressure barriers prior to servicing the equipment shall be observed. Cameron recommends that two mechanical pressure barriers is the preferred practice.** Additional precautions should be taken to ensure that the mechanical pressure barriers are functioning correctly prior to any work being carried out on this particular equipment.
7. Always check for any **trapped pressure** before servicing the equipment. All valves downstream of the pressure barriers must be cycled several times to release any trapped pressure.
8. Ensure the chemical and physical properties of the fluid flow product inside the equipment are known. Obtain applicable **Safety Data Sheets (SDS)** for commonly encountered chemicals such as hydrogen sulfide, cements, etc. in order to identify appropriate PPE to use, emergencies, procedures, and methods or exposure control.
9. Always use **correct lifting devices** and follow safety rules in handling heavy products. The actual weight can vary for the system configurations. Never attempt to lift the equipment by hand.
10. Cameron manufactures a variety of oil field equipment with different features and operating requirements. Be certain of the equipment model and refer to the appropriate procedure, before attempting any operation or service on the equipment. **This procedure is to assist field personnel in the operation and installation of the equipment that is listed in this document. Different procedures are available for other oil field products.**

SD-045055-01 Rev 02

 CAMERON A Schlumberger Company	13-5/8" 5K MN-DS System 13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program	RP-003612 Rev 02 Draft A Page 5
--	--	---

HSE Hand Safety Rules



1. **No Hands on Loads**
Select the appropriate device to control the load
2. **Hands on Handles Only**
Use manufacturers handles or safe alternatives
3. **Permission to Touch**
Use lifting assistance/technology for loads > 20kg or 44 lbs
4. **Hands Off...Energy On**
Remove hands from load BEFORE setting in motion
5. **Safe Cargo Handling**
Use pallets & crates designed to prevent tip over or loss of load
6. **Use the Correct PPE**
Use the right glove for the job (chemical, hot work, impact, etc.)

HSE VISION: NO ONE GETS HURT; NOTHING GETS HARMED

HEALTH, SAFETY & ENVIRONMENT

HSE Tenets of Operation

	Stop Work Stop work immediately until unsafe behaviors and conditions are addressed.		Report ALL Incidents Immediately report incidents, including injuries, illnesses, property damage, near misses, and environmental releases.
	Leadership & Accountability Hold each other accountable for working safely and complying with applicable regulations.		Equipment Operations Always operate equipment and vehicles with safety devices enabled, and never beyond their capabilities, environmental limits, or designed purposes.
	Follow Procedures Maintain all training and follow established HSE policies and practices.		HSE Observations Recognize safe behaviors and conditions, and address those at-risk.
	PPE Always wear the correct Personal Protective Equipment for the task.		Ask Ask questions when in doubt, and for assistance when dealing with new or unusual situations.



HSE VISION: NO ONE GETS HURT; NOTHING GETS HARMED

HEALTH, SAFETY & ENVIRONMENT

RP-003612
Rev 02 Draft A
 Page 6

13-5/8" 5K MN-DS System
 13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program

 **CAMERON**
 A Schlumberger Company



Bill of Materials

NOTE Contact your Cameron representative for replacement part inquiries. Cameron personnel can check the latest revision of the assembly bill-of-material to obtain the appropriate and current replacement part number.

CASING HEAD		CASING HEAD CONT.		TUBING SPOOL	
Item Qty	Description	Item Qty	Description	Item Qty	Description
Section Assembly : A1 - A14 PN: 2393657-02-01					
A1 1	Csg Hd Housing,MN-DS, 13-5/8" OEC 5K x 13-3/8" API BC box btm, (4) 2-1/16" 5M SSO's 12.615 Min Bore Part # 2345472-14-01	A15 1	Mandrel Csg Hng MN-DS, 13-5/8"Nom x 9-5/8" 40 LB/FT API Buttress Box thd btm x 10.00"-4 TPI L.H. Stub Acme R/Thd top Min. Bore: 8.835" Part # 2345509-09-01	B7 1	Ring Gasket, BX-160 Part# 702003-16-02
A2 1	Landing Base, CR, 13-5/8" Flange, 24" OD Part# 2057661-05-01	A16 1	Bushing, Packoff Support, MN-DS, 13-5/8" Nom, w/ 13-5/8" dovetail seal, w/9-5/8" 'T' seals, internal and external lock ring prep Min. Bore: 8.835" Part # 2161673-29-01	B8 4	Ring Gasket, BX-151 Part# 702003-15-14
A3 1	Body; Load Ring Adapter f/13-5/8" MN-DS Housing w/ CR Landing Base Part #2379363-01-01	A17 1	Casing Hanger, IC-2, 11" x 5-1/2" Part # Y15001-21002901	B9 1	Ring Gasket, BX-156 Part# 702003-15-62
A4 2	Gate Valve, Manual Model M, 2-1/16" 5,000 flg x flg Part# 2737400-01-12	TUBING SPOOL		CAPPING FLANGE	
A5 4	Companion Flange, 2-1/16" 5,000 x 2" LP Part# 142362-01-03-02	Item Qty	Description	Item Qty	Description
A6 2	VR Plug, 2-1/16" 1-1/2" VEE Tubing thread Part# 255290-01	B1 1	Tubing Spool, Type 'C', 13-5/8"API 5KBX-160 flg btm x 7-1/16 API 10K BX-156 flg top, w/ (2) 1-13/16" API 10KBX-151 SSO's and 11" NOM 'NX' prep btm. Min. Bore: 6.34" Part# 2247641-04-01	C1 1	Capping Flange, 13-5/8" API 5K stud'd btm w/ 11" NOM x 7" CSG NX Bushing, (1) NPT Ball valve Part # 2378469-06-01
A7 4	Bull Plug, 2" LP x 1/2" NPT Part# 007481-01	B2 1	NX Bushing, 11" x 5-1/2" w/ Integral Bit Guide Min. Bore: 4.92 Part# 2161829-02-01	C2 1	Ring Gasket, BX-160 Part# 702003-16-02
A8 4	Vent Fitting, 1/2" NPT Part# 2738068-02	B3 2	Gate Valve, Manual, Model 'FLS', 1-13/16" API 10K Part# 141510-41-95-02	C3 1	NX Bushing, 11" x 5-1/2" Part# 608783-12
A9 6	Ring Gasket, R-24 Part# 702001-24-02	B4 2	Assy; Flg, Weco, 1-13/16" API 10K x 2" Nom Weco 1502 Female Fitting, Min Bore: 1.81" Part# 2133556-02-03	CHRISTMAS TREE	
A10 16	Stud Cont thread, .875"-9 x 6" long Part# 702533-08-10-60	B5 16	Stud Cont thread, .750"-10 x 5.00" long Part# 702533-07-10-50	Item Qty	Description
A11 32	Nut, Heavy Hex, .875"-9 Part# 2709000-09-01	B6 32	Nut, Heavy Hex, .750"-10 Part# 2709000-08-01	D1 1	Assy, Hanger, TC-1A-EN, 7 In Nom., w/5.487 OD Extended Neck, 2-7/8" API EU 8RD Box Thd Btm x Top 2-1/2" Nom 'H' BPV Thread Part # 2203910-01-01
A12 1	Ring Gasket, BX-160 Part#702003-16-02			D2 1	Purchased Tubing Head Adapter A5P Shorty 7-1/16" 10K Flg Btm x 2-9/16" 5K Std'd Top w/ 5-1/2 Seal Pocket Part # 2737555-01
A13 16	Stud Cont thread, 1.625"-8 x 12.50" long Part# 702533-14-11-22	EMERGENCY EQUIPMENT			
A14 32	Nut, Heavy Hex, 1.625"-8 Part# 2709000-15-01	Item Qty	Description		
		E1 1	Casing Hanger, MN-DS-IC-1, 13-5/8" nom x 9-5/8" casing Part # 2161741-08-01		

RP-003612
Rev 02 Draft A
Page 8

13-5/8" 5K MN-DS System
13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program



Bill of Materials

NOTE Contact your Cameron representative for replacement part inquiries. Cameron personnel can check the latest revision of the assembly bill-of-material to obtain the appropriate and current replacement part number.

HOUSING CONTINGENCY		SERVICE TOOLS CONT.		SERVICE TOOLS CONT.	
Item Qty	Description	Item Qty	Description	Item Qty	Description
A1a 1	Conversion Casing Hd housing, MN-DS, 13-5/8" OEC API 5K BX-160 w/ 18.250-4TPI LH Stub ACME top for thd flange and prep f/ internal snap ring x 13-3/8" SOW btm, two upper and two lower 2-1/16" API 5K SSO's Min. Bore: 12.615 Part# 2031060-48-04	ST4 1	Hanger Running Tool, 13-5/8" nom x 10.000"-4TPI LH Stub Acme bottom thread x 9-5/8" 8RDLC top thread, w/ 3 centralizing ribs for 10K Csg Hanger Part # 2161757-69-01	ST15 1	Assy, Casing Head Housing R/Tool, W/ 18.250-4TPI LH Stub Acme Box Thd Btm x Threaded Holes Top. Min Bore 13.588 Part# 2143701-84
A2a 1	Landing Base, CR, for 13- 5/8" housing, 32" OD base plate w/ flow-by slots Capacity: 850,000 LBS Part# 2057661-04-01	ST5 1	Running Tool f/ 13-5/8" Nom Seal Packoff w/ 4-1/2" IF top and bottom and 12.375-4TPI LH Stub Acme thread Part # 2017712-10-01	ST16 1	Lift Plate f/ Casing Head Rt w/ Ext 14.75" Stub Acme LH Thd ; (2) OD O-Ring Seals. Safe Working Load 150,000 Lbf, 2,000 PSI Part# 2368935-01-01
7" CASING CONTINGENCY		ST6 1	Test Plug, C, 11" Nom x 4-1/2" IF Box top x pin btm Part # 2247042-10-01	ST17 1	Casing Hd Running Tool, 14.750"-4 TPI LH Internal Stub Acme Thd Btm x 13-3/8" API 8RND Short Thread Casing Box Thd Top, For "SSDC" Compact Casing Head, Min Bore: 12.968 Part# 2254468-03-01
Item Qty	Description	ST7 1	Wear Bushing Running and Retrieving Tool f/ 11" nom x 4-1/2" IF thd Part # 661822-06	ST18 1	Pump In Cap, f/ 13-5/8" Nom 5K MN-DS Housing, 14.750"-4 TPI LH Stub Acme Thd Btm x 2" LP Top. ***Max Working Pressure: 2000 Psi*** Part# 2394118-02-01
A17a 1	Casing Hanger, IC-2, 11" x 7" Part # 2133152-03-05	ST8 1	Wear Bushing f/ 11" nom type MN-DS; 8.910" Min. Bore Part # 2125720-10-01	ST19 1	Assy, Drilling Adapter, 13-5/8 API, 10K Top x 13-5/8 10K Fastlock Sub-Assembly, Bx-160 Gasket Prep Btm, Min Bore: 13.630, **Max WP 5,000 PSI, to be Hydro Tested to 7,500 PSI**, **Make-Up Torque is 600 Ft/Lbf **, **Max Bending Moment @ WP. 220,000 FT-LBF** Part# 2403803-01-01
B2a 1	NX Bushing, 11" x 7" w/ Integral Bit Guide Min. Bore: 6.34 Part# 2161829-17-01	ST9 1	Assy; Housing Running Tool, 13-3/8" API Btc Box Thd Top x 18.250" Od-4TPI LH Stub Acme Running Thd, Min Bore: 12.59" Part# 2017488-17	ST20 1	Assy, Fastlock Hub, Type 'MN-DS' 13-5/8 10K API 16A #15 Clamp Hub x 18.250-4 TPI LH Stub Acme, use w/ 13-5/8 API 10K Fastlock Adapter Part# 2403930-01-01
C3a 1	NX Bushing, 11" x 7" Part# 608783-17	ST10 1	Snap Ring Installation Tool Part# 2209192-01		
SERVICE TOOLS CONT.		ST11 1	Wash Tool, 13-5/8" nom x 4-1/2" IF Box top Part# 2125914-01		
Item Qty	Description	ST12 1	Saver Sub, 4-1/2" IF pin x 4-1/2" IF Box Part# 2361943-01		
ST1 1	Test Plug, 'C', 13-5/8" nom x 4-1/2" IF Box btm x top Part # 2247044-01-01	ST13 4	VR Flush Plugs, Type with 1-1/2" Vee Tubing Thrds Part# 255290-01		
ST2 1	Wear Bushing Running Tool, IC-2, 13-5/8" nom w/ double lead pin thd. btm x NC50 (4-1/2" IF) box top, w/ 6-1/2" OD ext. Part # 608536-19	ST14 2	VR Plug, 2-1/16", 1-1/2" VEE tubing thread Part# 2222164-02-01		
ST3 1	Wear Bushing, 13-5/8" Nom, w/ (4) O-Rings, Min bore. 12.615" Part # 2394103-01-01				



13-5/8" 5K MN-DS System
13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program

RP-003612
Rev 02 Draft A
Page 9

Stage 1.0 — 13-3/8" Casing

SAFETY NOTE: Always wear proper PPE (Personal Protective Equipment) such as safety shoes, safety glasses, hard hat, gloves, etc. to handle and install equipment.



CAUTION Threaded Devices should **NEVER** be routinely tightened under pressure. This includes: Flange Bolting, Pipe Plugs, Bull Plugs, Union Nuts, Tiedown/Lockscrew Glands.

CAUTION Use of Teflon tape is prohibited. Use appropriate thread compound/sealant only. TS-73; PN: 687950-38-31-26, TF-15; PN: 687950-39-31-26, Liquid O-Ring 104G or any other thread sealant approved by Cameron Engineering.

1.1. Install the MN-DS Housing and CR Landing Base


- 1.1.1. Run the Conductor and space out as required.
- 1.1.2. Final Cut the Conductor at the required elevation.

NOTE Ensure the conductor cut is level and smooth as this will determine the position and elevation of the entire Wellhead and Tree.

- 1.1.3. Ensure Conductor cut is smooth and level.
- 1.1.4. Place a 3/8" x 3/16" bevel on the OD of the conductor and remove all burrs and sharp edges and bevel the OD corner.
- 1.1.5. Run the 13-3/8" casing and space out as required. Retrieve the landing joint.

NOTE Running Tool will be bucked up to the landing joint offline and shipped to location as one assembly.

- 1.1.6. Examine the **MN-DS Housing Running Tool (Item ST9)**. Verify the following:
 - bore is clean and free of debris
 - all threads are clean and undamaged
 - o-ring seal is properly installed, clean and undamaged
 - landing joint is installed properly, clean and undamaged
- 1.1.7. Orient the Tool as illustrated.

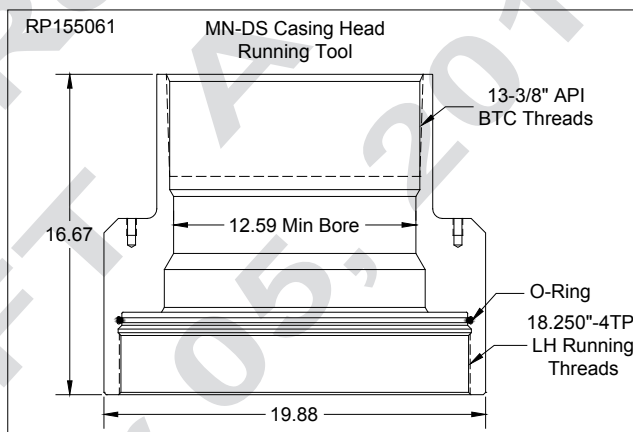

- 1.1.8. Examine the **MN-DS Housing (Item A1)**. Verify the following:
 - bore is clean and free of debris
 - ring groove and seal areas are clean and undamaged
 - all threads are clean and undamaged
 - threaded flange has been removed
 - pup joint is properly installed, clean, undamaged and compatible with casing run by rig
 - all outlet equipment has been removed and replace with Flush Plugs
 - **Load Ring Adapter and Landing Base (Items A2 & A3)** is properly installed, clean and undamaged
- 1.1.9. Orient the Housing illustrated on page 11.

RP-003612
 Rev 02 Draft A
 Page 10

13-5/8" 5K MN-DS System
 13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program

CAMERON
 A Schlumberger Company

Torque Chart

Recommended Makeup Torques for Flange Bolting Ft•Lbf				
Per API 6A: preload = .50Sy				
Bolt Size Nom OD - TPI	B7M, L7M (Sy=80 ksi)		B7, L7, 660 (Sy=105 ksi)	
	cf=0.07	cf=0.13	cf=0.07	cf=0.13
.500-13	27	45	35	59
.625-11	52	88	68	115
.750-10	90	153	118	200
.875-9	143	243	188	319
1.000-8	213	361	279	474
1.125-8	305	523	401	686
1.250-8	421	726	553	953
1.375-8	563	976	739	1280
1.500-8	733	1280	962	1680
1.625-8	934	1640	1230	2150
1.750-8	1170	2050	1530	2700
1.875-8	1440	2540	1890	3330
2.000-8	1750	3090	2300	4060
2.250-8	2500	4440	3280	5820
2.500-8	3430	6120	4500	8030
2.625-8	3970	7100	4720	8430
2.750-8	4570	8180	5420	9700
3.000-8	5930	10700	7050	12700
3.250-8	7550	13600	8970	16100
3.500-8	9430	17000	11200	20200
3.750-8	11600	21000	13800	24900
3.875-8	12800	23200	15200	27500
4.000-8	14100	25500	16700	30300

NOTE

The information in this table is based on API-6A's recommended torque for a given bolt size. The information is presented for the convenience of the user and is based on assumptions of certain coefficients of friction (cf). The coefficients of friction are based on approximations of the friction between the studs and nuts, as well as the nuts and flange face. A coefficient friction of 0.13 assumes the threads and nut bearing surfaces are bare metal and are well lubricated with thread compound. A coefficient of friction of 0.07 assumes the thread and nuts are coated with a fluoropolymer material.

- Lubrication

It is essential that threads and nut faces be well lubricated with an appropriate grease prior to assembly. Cameron clamps and fast clamps require lubrication on the hub-clamp contact area. Acceptable lubricants include thread joint compounds which meet the formulation, evaluation and testing requirements specified in API Recommended Practice 5A3/ISO13678. (Reference - Jet Lube Grease, 1 lb can PN: 2737980-02).

Studs and nuts coated with Xylan/PTFE compound in accordance with a Cameron procedure do not require lubrication. However, a light coat of API Recommended Practice 5A3/ISO13678 thread compound is recommended for Xylant-coated bolting as an aid to assembly.

Material gaskets should be lightly coated with lubricant prior to assembly. Acceptable lubricants include motor oil or Cameron gate valve greases.

 CAMERON A Schlumberger Company	13-5/8" 5K MN-DS System 13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program	RP-003612 Rev 02 Draft A Page 55
--	--	--

IC Test Plug Load Chart

IC Test Plug Maximum Load							
Bowl		Maximum Hanging Load (in 1000s lbs) at Test Pressure					
Size	Pressure	0 psi	2,000 psi	3,000 psi	5,000 psi	10,000 psi	15,000 psi
7-1/16"	2,000 to 5,000 psi	213	135	96	19	N/A	N/A
	10,000 psi	253	175	136	59	0	N/A
	15,000 psi	477	399	360	282	88	0
9"	2,000 to 10,000 psi	600	479	419	299	0	N/A
	15,000 psi	751	630	570	450	149	0
11"	2,000 to 10,000 psi	1277	1091	998	812	348	N/A
	15,000 psi	1596	1410	1317	1131	667	202
13-5/8"	2,000 to 10,000 psi	1713	1426	1283	997	281	N/A
	15,000 psi	2142	1855	1712	1426	710	5
16-3/4"	2,000 to 5,000 psi	3076	2641	2424	1990	N/A	N/A
20"	2,000 to 5,000 psi	2733	2096	1778	1142	N/A	N/A

Minimum Casing Load Chart for IC Type Hangers

Minimum Casing Load for IC-2 & IC-6 Casing Hangers		
Hanger Nom. Size	Casing Size	Load (Pounds)
9"	4-1/2"	46,000
	5-1/2"	42,000
11"	4-1/2"	78,000
	5"	74,000
	5-1/2"	70,000
	6-5/8"	59,000
	7"	55,000
	7-5/8"	48,000
	8-5/8"	44,000
13-5/8"	5-1/2"	120,000
	7"	106,000
	7-5/8"	99,000
	8-5/8"	86,000
	9-5/8"	72,000
	10-3/4"	54,000

Minimum Casing Load for IC-2 & IC-6 Casing Hangers		
Hanger Nom. Size	Casing Size	Load (Pounds)
16-3/4"	9-5/8"	146,000
	10-3/4"	128,000
	11-3/4"	110,000
	11-7/8"	109,000
	13-3/8"	79,000
20-3/4" 21-1/4"	10-3/4"	228,000
	13-3/8"	180,000
	13-5/8"	175,000
	16"	120,000

RP-000573

RP-003612 Rev 02 Draft A Page 56	13-5/8" 5K MN-DS System 13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program	
--	--	---

Fraction to Decimal Conversion Chart

FRACTION TO DECIMAL CONVERSION CHART																
4THS	8THS	16THS	32NDS	64THS	TO 3 PLACES	TO 2 PLACES	4THS	8THS	16THS	32NDS	64THS	TO 3 PLACES	TO 2 PLACES			
				1/64	.016	.02					33/64	.516	.52			
			1/32		.031	.03					17/32	.531	.53			
				3/64	.047	.05					35/64	.547	.55			
			1/16		.062	.06				9/16		.562	.56			
				5/64	.078	.08					37/64	.578	.58			
			3/32		.094	.09					19/32	.594	.59			
			7/64	.109	.11				39/64	.609	.61					
		1/8				.125			.12		5/8				.625	.62
				9/64	.141	.14					41/64	.641	.64			
			5/32		.156	.16					21/32	.656	.66			
				11/64	.172	.17					43/64	.672	.67			
		3/16				.188			.19		11/16				.688	.69
				13/64	.203	.20					45/64	.703	.70			
			7/32		.219	.22					23/32	.719	.72			
				15/64	.234	.23					47/64	.734	.73			
1/4					.250	.25	3/4					.750	.75			
				17/64	.266	.27					49/64	.766	.77			
			9/32		.281	.28					25/32	.781	.78			
				19/64	.297	.30					51/64	.797	.80			
			5/16		.312	.31				13/16		.812	.81			
				21/64	.328	.33					53/64	.828	.83			
			11/32		.344	.34					27/32	.844	.84			
			23/64	.359	.36				55/64	.859	.86					
		3/8				.375			.38	7/8				.875	.88	
				25/64	.391	.39					57/64	.891	.89			
			13/32		.406	.41					29/32	.906	.91			
				27/64	.422	.42					59/64	.922	.92			
		7/16				.438			.44	15/16				.938	.94	
				29/64	.453	.45					61/64	.953	.95			
			15/32		.469	.47					31/32	.969	.97			
				31/64	.484	.48					63/64	.984	.98			
1/2					.500	.50	1					1.000	1.00			

RP-003612
Rev 02 Draft A
Page 58

13-5/8" 5K MN-DS System
13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program



Running Procedure	Description
TC-000148-02	Cameron Type FL & FLS Operation and Maintenance Manual
TC-009084-02	WKM Model M Power R-Seal Operation and Maintenance Manual
RP-002153	Make-up Requirements for API Flange Connections
RP-001558	Valve Removal Plugs
RP-003737	Standard MN-DS Housing with Landing Base Running Procedure
RP-003767	Standard MN-DS Housing through Rotary Table Running Procedure
RP-000654	Standard IC Test Plug Procedure for BOP Test
RP-003740	Standard MN-DS Intermediate Hanger Running Procedure
RP-003734	Standard Wash Tool Procedure
RP-003741	Standard MN-DS Intermediate Packoff Support Bushing Running Procedure
RP-003757	Standard MN-DS Production Packoff Running Procedure
RP-000573	Standard IC-2 Casing Hanger Running Procedure
RP-000592	Standard 'NX' Bushing Running Procedure

Released to Imaging: 8/20/2021 2:35:51 PM

NOTE: DRAFT Publication is for Review ONLY. NOT approved for System Installation. NOT approved for field usage. NOT approved for distribution. If you obtain a DRAFT copy - it is your responsibility to verify SAP revision level or contact Houston Engineering to ensure document has been approved and released.

Document Control

Revision History

Revision	Date	Description	Prepared by:
01	April 26, 2016	Initial Release per 650205763 Houston Surface Systems Engineering	Maria Contreras
02	Draft A December 05, 2018	Revised Publication per 650356691	Eric Ayres

About this Revision

Owner: **Surface Systems Engineering - Running Procedures Department, Houston, TX**

Author: **Eric Ayres**

Reviewer:

Approver:

Released by: **Maria Contreras, SAP**

RP-003612
Rev 02 Draft A
Page 60

13-5/8" 5K MN-DS System
13-3/8" x 9-5/8" x 5-1/2"(or 7") x 2-7/8" Casing Program



Apache Corp respectfully requests approval for the following changes and additions to the drilling plan:

1. Utilize Cameron's MN-DS multibowl wellhead.
2. Description of Operations
 - a. Cameron's MN-DS multibowl wellhead will be installed after the surface rig presets surface. A T/A cap will be installed with a 1K pressure gauge to monitor pressures while the rig is not on the well.
2. The rig will N/U BOP and test the BOPE/surface casing to required pressures (Onshore Oil and Gas Order 2).
3. Intermediate will be drilled to casing depth and 9-5/8" intermediate casing will be ran & landed with a mandrel hanger on the MN-DS interior load shoulder.
4. The landing joint will be backed off and the packoff will be installed.
 - a. The packoff's upper and lower seals will be tested.
5. Since no BOP seal was broken during this process, Apache respectfully requests to continue operations without performing a BOP test. The initial pressure test should still be valid as long as no seal was broken and <30 days from the initial pressure test.
6. Intermediate casing will be tested to required pressures (Onshore Oil and Gas Order 2).
7. The vertical, curve and lateral will then be drilled according to plan.
8. Production casing will be ran and 5-1/2" slips will be used after the production cement job.
9. Once the rig is removed, Apache Corp will secure the wellhead with a tubing head and cap. The wellhead area will be protected by placing a guard rail around the cellar area.

Please refer to Cameron's MN-DS multibowl wellhead running procedures.

GHOST RIDER 22 15 FEDERAL COM 13H - CSG DETAIL

String: <u>SURFACE</u>							
Hole Size: <u>17.5</u>							
Top Setting Depth (MD):	<u>0</u>	Top Setting Depth (TVD):	<u>0</u>	Btm setting depth (MD):	<u>1075</u>	Btm setting depth (TVD):	<u>1075</u>
Size:	<u>13-3/8"</u>	Grade:	<u>J-55</u>	Weight (lbs/ft):	<u>54.5</u>	Joint (Butt,FJ, LTC,STC, SLH, N/A, Other):	<u>Buttress</u>
Condition (New/Used):		<u>New</u>		Standard (API/Non-API):		<u>API</u>	
Tapered String (Y/N)?: <u>N</u> If yes, need spec attachment							
Safety Factors							
Collapse Design Safety Factor:		<u>4.55</u>		Burst Design Safety Factor:		<u>1.72</u>	
Body Tensile Design Safety Factor type?: Dry/Buoyant				<u>Buoyant</u>			
Body Tensile Design Safety Factor:		<u>4.38</u>					
Joint Tensile Design Safety Factor type?: Dry/Buoyant				<u>Buoyant</u>			
Joint Tensile Design Safety Factor:		<u>4.67</u>					

String: <u>INTERMEDIATE</u>							
Hole Size: <u>12.25</u>							
Top Setting Depth (MD):	<u>0</u>	Top Setting Depth (TVD):	<u>0</u>	Btm setting depth (MD):	<u>4800</u>	Btm setting depth (TVD):	<u>4784</u>
Size:	<u>9-5/8"</u>	Grade:	<u>J-55</u>	Weight (lbs/ft):	<u>40</u>	Joint (Butt,FJ, LTC,STC, SLH, N/A, Other):	<u>LTC</u>

Condition (New/Used): New Standard (API/Non-API): API

Tapered String (Y/N)?: N
If yes, need spec attachment

Safety Factors

Collapse Design Safety Factor: 2.01 Burst Design Safety Factor: 2.12

Body Tensile Design Safety Factor type?: Dry/Buoyant Buoyant
Body Tensile Design Safety Factor: 2.19

Joint Tensile Design Safety Factor type?: Dry/Buoyant Buoyant
Joint Tensile Design Safety Factor: 1.82

String: PRODUCTION

Hole Size: 8.75

Top Setting Depth (MD):	<u>0</u>	Top Setting Depth (TVD):	<u>0</u>	Btm setting depth (MD):	<u>9493</u>	Btm setting depth (TVD):	<u>9205</u>
----------------------------	----------	-----------------------------------	----------	----------------------------	-------------	-----------------------------------	-------------

Size:	<u>5-1/2"</u>	Grade:	<u>P-110</u>	Weight (lbs/ft):	<u>17</u>	Joint (Butt,FJ, LTC,STC, SLH, N/A, Other):	<u>GB-CD</u>
-------	---------------	--------	--------------	------------------	-----------	--	--------------

Hole Size: 8.5

Top Setting Depth (MD):	<u>9493</u>	Top Setting Depth (TVD):	<u>9205</u>	Btm setting depth (MD):	<u>16837</u>	Btm setting depth (TVD):	<u>9205</u>
----------------------------	-------------	-----------------------------------	-------------	----------------------------	--------------	-----------------------------------	-------------

Size:	<u>5-1/2"</u>	Grade:	<u>P-110</u>	Weight (lbs/ft):	<u>17</u>	Joint (Butt,FJ, LTC,STC, SLH, N/A, Other):	<u>GB-CD</u>
-------	---------------	--------	--------------	------------------	-----------	--	--------------

Condition (New/Used): New Standard (API/Non-API): API

Safety Factors

Collapse Design Safety Factor: 1.72 Burst Design Safety Factor: 1.19

Body Tensile Design Safety Factor type?: Dry/Buoyant Buoyant

Body Tensile Design Safety Factor: 2.25

Joint Tensile Design Safety Factor type?: Dry/Buoyant Buoyant

Joint Tensile Design Safety Factor: 2.36

Tapered String (Y/N)?: N

If yes, need spec attachment

GHOST RIDER 22 15 FEDERAL COM 13H - CMT DETAIL**CEMENT: SURFACE**Stage Tool Depth: N/A**Lead:**Top MD of
Segment: 0Btm MD of
Segment: 775Cmt Type: CCmt Additives: 4% Bentonite + 1% CaCl2Quantity (sks): 405Yield (cu/ft/sk): 1.72 Volume (cu/ft): 696.6Density (lbs/gal): 13.5 Percent OH Excess: 25%**Tail:**Top MD of
Segment: 775Btm MD of
Segment: 1075Cmt Type: CCmt Additives: 1% CaCl2Quantity (sks): 225Yield (cu/ft/sk): 1.33 Volume (cu/ft): 299.25Density (lbs/gal): 14.8 Percent OH Excess: 25%**CEMENT: INTERMEDIATE****Single Stage****Lead:**Top MD of
Segment: 0Btm MD of
Segment: 3840Cmt Type: CCmt Additives: 10% NaCl + 6% Bentonite + 1%
Premag M + 0.3% Defoamer +
0.4% RetarderQuantity (sks): 640Yield (cu/ft/sk): 2.32 Volume (cu/ft): 1484.8Density (lbs/gal): 12.7 Percent OH Excess: 25%**Tail:**Top MD of
Segment: 3840Btm MD of
Segment: 4800Cmt Type: CCmt Additives: 0.1% Retarder

Quantity (sks):	<u>300</u>		
Yield (cu/ft/sk):	<u>1.33</u>	Volume (cu/ft):	<u>399</u>
Density (lbs/gal):	<u>14.8</u>	Percent OH Excess:	<u>25%</u>

2 Stage Cement Job

* DV tool depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

*If lost circulation is encountered, Apache may 2-stage Interm csg. A DVT may be used in the 9-5/8" csg & ECP may be placed below DVT.

1st Stage**Lead:**

Top MD of Segment:	<u>2280</u>	Btm MD of Segment:	<u>3840</u>
--------------------	-------------	--------------------	-------------

Cmt Type: C

Cmt Additives:

10% NaCl + 6% Bentonite + 1% Premag M + 0.3% Defoamer + 0.4% Retarder

Quantity (sks):	<u>315</u>		
Yield (cu/ft/sk):	<u>2.32</u>	Volume (cu/ft):	<u>730.8</u>
Density (lbs/gal):	<u>12.7</u>	Percent OH Excess:	<u>25%</u>

Tail:

Top MD of Segment:	<u>3840</u>	Btm MD of Segment:	<u>4800</u>
--------------------	-------------	--------------------	-------------

Cmt Type: C

Cmt Additives:

0.1% Retarder

Quantity (sks):	<u>300</u>		
Yield (cu/ft/sk):	<u>1.33</u>	Volume (cu/ft):	<u>399</u>
Density (lbs/gal):	<u>14.8</u>	Percent OH Excess:	<u>25%</u>

Stage Tool / ECP Depth: ± 2280'**2nd Stage****Lead:**

Top MD of Segment:	<u>0</u>	Btm MD of Segment:	<u>1600</u>
--------------------	----------	--------------------	-------------

Cmt Type: <u>C</u>		Cmt Additives:	10% NaCl + 6% Bentonite + 1% Premag M + 0.3% Defoamer + 0.4% Retarder
Quantity (sks):	<u>260</u>		
Yield (cu/ft/sk):	<u>2.32</u>	Volume (cu/ft):	<u>603.2</u>
Density (lbs/gal):	<u>12.7</u>	Percent OH Excess:	<u>25%</u>

Tail:

Top MD of Segment:	<u>1600</u>	Btm MD of Segment:	<u>2280</u>
Cmt Type: <u>C</u>		Cmt Additives:	<u>0.1% Retarder</u>
Quantity (sks):	<u>200</u>		
Yield (cu/ft/sk):	<u>1.33</u>	Volume (cu/ft):	<u>266</u>
Density (lbs/gal):	<u>14.8</u>	Percent OH Excess:	<u>25%</u>

CEMENT: PRODUCTION**Single Stage**

Lead 1:

Top MD of Segment:	<u>4700</u>	Btm MD of Segment:	<u>7800</u>
Cmt Type: <u>Nine Lite</u>		Cmt Additives:	5% Lightweight 3M beads + 0.3% Fluid Loss + 0.2% Dispersant + 0.2% GXT-C + 0.2% Suspension Aid + 0.15% Retarder + 0.15% Citric Acid
Quantity (sks):	<u>330</u>		
Yield (cu/ft/sk):	<u>2.86</u>	Volume (cu/ft):	<u>943.8</u>
Density (lbs/gal):	<u>10.5</u>	Percent OH Excess:	<u>20%</u>

Lead 2:

Top MD of Segment:	<u>7800</u>	Btm MD of Segment:	<u>8743</u>
Cmt Type: <u>Nine Lite</u>		Cmt Additives:	3% Salt + 1% Premag M + 0.15% Fluid Loss + 0.15% GXT-C + 0.45% Retarder
Quantity (sks):	<u>130</u>		
Yield (cu/ft/sk):	<u>2.21</u>	Volume (cu/ft):	<u>287.3</u>

Density (lbs/gal): 11.5 Percent OH Excess: 20%

Tail:

Top MD of
Segment: 8743

Btm MD of
Segment: 16837

Cmt Type: Nine Lite

Cmt Additives: 1.3% Salt + 3% Expanding Agent +
0.5% Fluid Loss + 0.1% Free Water
Control + 0.65% Retarder + 0.2%
Dispersant + 0.25% Defoamer

Quantity (sks): 1575

Yield (cu/ft/sk): 1.43 Volume (cu/ft): 2252.25

Density (lbs/gal): 13.2 Percent OH Excess: 20%

Production Bradenhead Squeeze Contingency

*Due to the Brushy Canyon being a known zone for lost circulation during the production cement jobs, Apache proposes a contingency bradenhead squeeze 4 hours after bumping the plug on the primary stage if the lift pressure is less than known tieback lift pressures. Slips will be set previous to pumping the Bradenhead squeeze (right after bumping the plug) due to issues with getting slips set after previous Bradenhead squeeze experiences. A CBL will be ran after 7-10 days and will be submitted to the BLM.

Tail:

Top MD of
Segment: 0

Btm MD of
Segment: 7500

Cmt Type: H

Cmt Additives: Class H Neat


Quantity (sks): 1885

Yield (cu/ft/sk): 1.18 Volume (cu/ft): 2224.3

Density (lbs/gal): 15.6 Percent OH Excess: 15%

Apache Corp respectfully requests approval for the following changes and additions to the drilling plan:

1. Utilize a spudder rig to pre-set surface casing.
2. Description of Operations
 1. Spudder rig will move in their rig to drill the surface hole section and pre-set surface casing on the Ghost Rider 22-15 Federal COM 13H.
 - a. After drilling the surface hole section, the rig will run casing and cement following all of the applicable rules and regulations (Onshore Oil and Gas Order No. 2).
 - b. Rig will utilize fresh water based mud to drill 17-1/2" surface hole to TD. Solids control will be handled entirely on a closed loop basis.
 2. The wellhead (page 3) will be installed and tested once the 13-3/8" surface casing is cut off and the WOC time has been reached.
 3. A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
 - a. A means for intervention will be maintained while the drilling rig is not over the well.
 4. Spudder rig operations is expected to take 1-2 days on a single well pad.
 5. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
 6. Drilling operations will be performed with the drilling rig. At that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The BLM will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.
 7. Apache Corp will have supervision over the rig to ensure compliance with all BLM regulations and to oversee operations.
 8. Once the rig is removed, Apache Corp will secure the wellhead area by placing a guard rail around the cellar area.

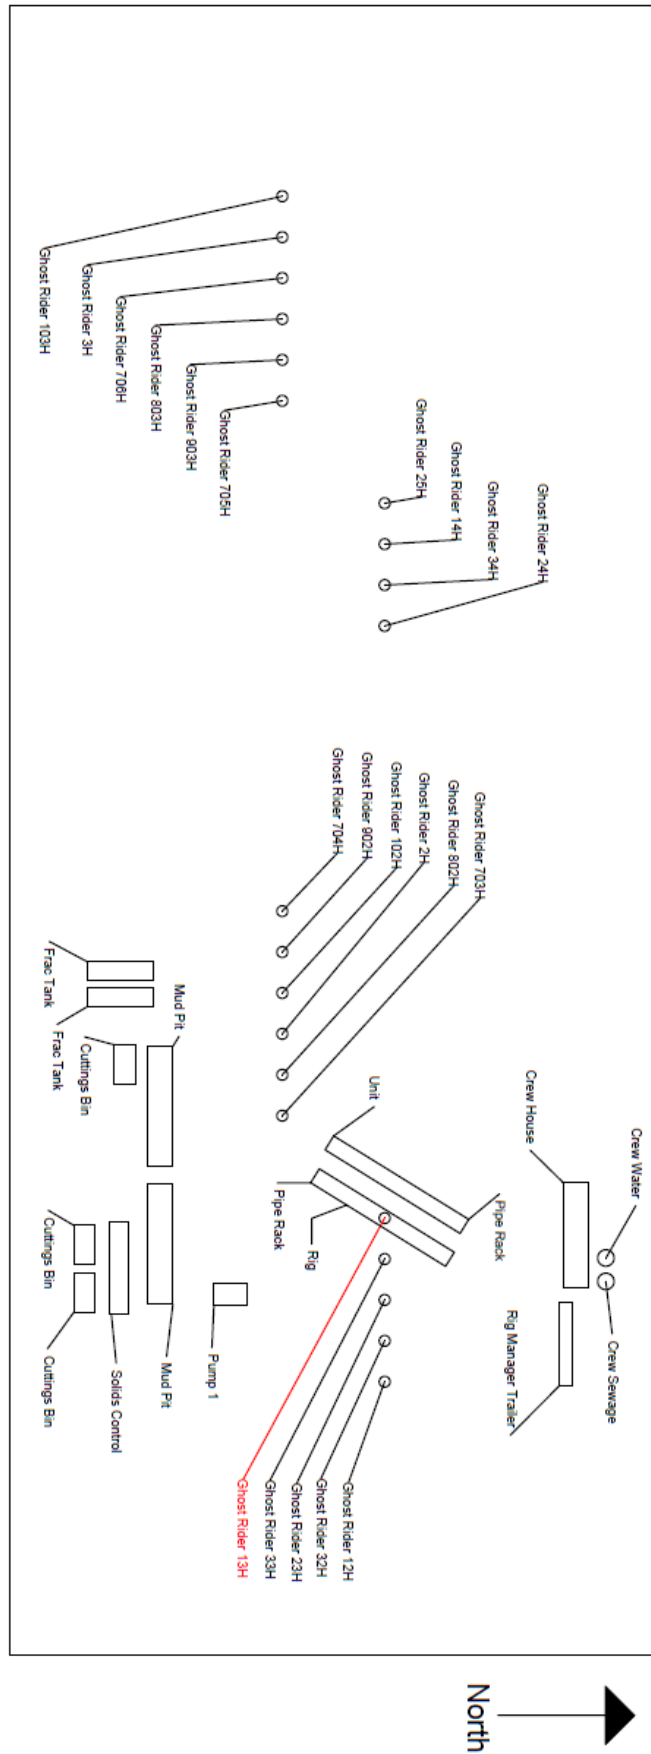





U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

SUPO Data Report

12/08/2020

APD ID: 10400053501

Submission Date: 01/28/2020

Highlighted data
reflects the most
recent changes

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

GhostRider22_15FedCom13H_ExistingRoads_20200128141759.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? NO

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

GhostRider22_15FedCom13H_1MiRadius_20200121140332.pdf

Operator Name: APACHE CORPORATION**Well Name:** GHOST RIDER 22 15 FEDERAL COM**Well Number:** 13H

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? DEFER**Estimated Production Facilities description:** Proposed facilities have been submitted with Ghost Rider 22 15 Fed Com 101H.

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: OTHER**Describe type:** BRINE**Water source use type:** INTERMEDIATE/PRODUCTION
CASING**Source latitude:** 32.429596**Source longitude:** -103.14983**Source datum:** NAD83**Water source permit type:** PRIVATE CONTRACT**Water source transport method:** TRUCKING**Source land ownership:** STATE**Source transportation land ownership:** STATE**Water source volume (barrels):** 2214.2856**Source volume (acre-feet):** 0.28540614**Source volume (gal):** 93000**Water source type:** GW WELL**Water source use type:** SURFACE CASING
DUST CONTROL
INTERMEDIATE/PRODUCTION
CASING**Source latitude:** 31.977877**Source longitude:** -103.73879**Source datum:** NAD83**Water source permit type:** PRIVATE CONTRACT**Water source transport method:**

Operator Name: APACHE CORPORATION**Well Name:** GHOST RIDER 22 15 FEDERAL COM**Well Number:** 13H

TRUCKING

Source land ownership: PRIVATE**Source transportation land ownership:** PRIVATE**Water source volume (barrels):** 2214.2856**Source volume (acre-feet):** 0.28540614**Source volume (gal):** 93000**Water source and transportation map:**

GhostRider22_15FedCom_BrineWaterSource_20190910142652.pdf

GhostRider22_15FedCom_FW_Source_20190910142652.pdf

Water source comments:**New water well?** N**New Water Well Info****Well latitude:****Well Longitude:****Well datum:****Well target aquifer:****Est. depth to top of aquifer(ft):****Est thickness of aquifer:****Aquifer comments:****Aquifer documentation:****Well depth (ft):****Well casing type:****Well casing outside diameter (in.):****Well casing inside diameter (in.):****New water well casing?****Used casing source:****Drilling method:****Drill material:****Grout material:****Grout depth:****Casing length (ft.):****Casing top depth (ft.):****Well Production type:****Completion Method:****Water well additional information:****State appropriation permit:****Additional information attachment:****Section 6 - Construction Materials****Using any construction materials:** NO**Construction Materials description:****Construction Materials source location attachment:**

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

Section 7 - Methods for Handling Waste

Waste type: DRILLING

Waste content description: Drilling fluid from well, during drilling ops, will be stored safely and recycled to next well. Any excess will be hauled to approved NMOCD disposal facility.

Amount of waste: 2500 barrels

Waste disposal frequency : One Time Only

Safe containment description: Drilling fluids will be stored in sealed frac tanks

Safe containmant attachment:

Waste disposal type: RECYCLE

Disposal location ownership: OTHER

Disposal type description:

Disposal location description: Operators next well

Waste type: GARBAGE

Waste content description: Garbage and trash produced during drilling and completion operations will be collected in a trash container and disposed of at a state approved disposal facility. All trash on and around well site will be collected for disposal.

Amount of waste: 1500 pounds

Waste disposal frequency : Weekly

Safe containment description: Garbage will be disposed of in portable trash trailers

Safe containmant attachment:

Waste disposal type: OTHER

Disposal location ownership: STATE

Disposal type description: Land fill

Disposal location description: Lea County Landfill or Eddy County Landfill

Waste type: SEWAGE

Waste content description: Human waste and grey water will be properly contained and disposed of at a state approved facility.

Amount of waste: 2000 gallons

Waste disposal frequency : Weekly

Safe containment description: Sewage will be stored in steel waste tanks

Safe containmant attachment:

Waste disposal type: OTHER

Disposal location ownership: STATE

Disposal type description: Municipal waste facility

Disposal location description: Hobbs Municipal Waste Facility

Operator Name: APACHE CORPORATION**Well Name:** GHOST RIDER 22 15 FEDERAL COM**Well Number:** 13H**Waste type:** DRILLING**Waste content description:** Excess cement returns**Amount of waste:** 40 barrels**Waste disposal frequency :** Weekly**Safe containment description:** Cement returns will be stored in steel roll off bins then transferred to disposal vacuum trucks**Safe containmant attachment:****Waste disposal type:** OTHER**Disposal location ownership:** PRIVATE**Disposal type description:** Haul to private facility**Disposal location description:** R360, 6601 W. Hobbs Hwy, Carlsbad, NM**Waste type:** CHEMICALS**Waste content description:** After drilling and completions, chemicals, salts, frac sand and other waste material will be removed and disposed of at a state approved disposal facility.**Amount of waste:** 2000 pounds**Waste disposal frequency :** Weekly**Safe containment description:** Chemicals will be stored in frac tanks**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY**Disposal location ownership:** PRIVATE**Disposal type description:****Disposal location description:** R360, 6601 W Hobbs Hwy, Carlsbad, NM 88220**Waste type:** PRODUCED WATER**Waste content description:** Produced water will be hauled to private SWD**Amount of waste:** 1500 barrels**Waste disposal frequency :** Daily**Safe containment description:** Produced water will be transported via pipeline to battery and from battery to SWD**Safe containmant attachment:****Waste disposal type:** OTHER**Disposal location ownership:** PRIVATE**Disposal type description:** Private SWD**Disposal location description:** OWL/Mesquite**Reserve Pit****Reserve Pit being used?** NO**Temporary disposal of produced water into reserve pit?** NO

Operator Name: APACHE CORPORATION**Well Name:** GHOST RIDER 22 15 FEDERAL COM**Well Number:** 13H**Reserve pit length (ft.)****Reserve pit width (ft.)****Reserve pit depth (ft.)****Reserve pit volume (cu. yd.)****Is at least 50% of the reserve pit in cut?****Reserve pit liner****Reserve pit liner specifications and installation description**

Cuttings Area

Cuttings Area being used? NO**Are you storing cuttings on location?** Y**Description of cuttings location** Cuttings will be stored in steel haul off bins and taken to an NMOCD approved disposal facility.**Cuttings area length (ft.)****Cuttings area width (ft.)****Cuttings area depth (ft.)****Cuttings area volume (cu. yd.)****Is at least 50% of the cuttings area in cut?****WCuttings area liner****Cuttings area liner specifications and installation description**

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: Y**Ancillary Facilities attachment:**

GhostRider22_15FedCom_102H_13H_33H_23H_32H_12H_GasCapturePlan_20200120124758.pdf

Comments: Gas capture plan

Section 9 - Well Site Layout

Well Site Layout Diagram:

GhostRider22_15FedCom13H_WellsiteLayout_20200121140405.pdf

GhostRider22_15FedCom13H_Topsoil_20200128141826.pdf

Comments:

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

Section 10 - Plans for Surface Reclamation

Type of disturbance: No New Surface Disturbance Multiple Well Pad Name: GHOST RIDER 22 15 NORTHWEST

Multiple Well Pad Number: 2N

Recontouring attachment:

GhostRider22_15FedCom13H_Reclamation_20200128141837.pdf

Drainage/Erosion control construction: During construction proper erosion control methods will be used to control erosion, runoff and siltation of surrounding area

Drainage/Erosion control reclamation: Reclamation is going to follow natural terrain to control erosion, runoff and siltation of surrounding area.

Well pad proposed disturbance (acres):	Well pad interim reclamation (acres): 0	Well pad long term disturbance (acres): 0
Road proposed disturbance (acres):	Road interim reclamation (acres): 0	Road long term disturbance (acres): 0
Powerline proposed disturbance (acres):	Powerline interim reclamation (acres): 0	Powerline long term disturbance (acres): 0
Pipeline proposed disturbance (acres):	Pipeline interim reclamation (acres): 0	Pipeline long term disturbance (acres): 0
Other proposed disturbance (acres):	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0
Total proposed disturbance: 0	Total interim reclamation: 0	Total long term disturbance: 0

Disturbance Comments:

Reconstruction method: Areas planned for interim reclamation will be contoured to original contour if feasible, or if not feasible, to an interim contour that blends with surrounding topography as much as possible. Where applicable, fill material of well pad will be back filled into the cut to bring area back to original contour.

Topsoil redistribution: Topsoil that was spread over interim reclamation areas will be stockpiled prior to recontouring. Topsoil will be redistributed evenly over entire disturbed site to ensure successful revegetation.

Soil treatment: No soil treatment expected.

Existing Vegetation at the well pad: Plants are sparse but include grasses, some mesquite and shinnery oak.

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Plants are sparse but include grasses, some mesquite and shinnery oak

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: Plants are sparse but include grasses, some mesquite and shinnery oak

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: Plants are sparse but include grasses, some mesquite and shinnery oak

Existing Vegetation Community at other disturbances attachment:

Non native seed used?

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project?

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation?

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed Summary

Total pounds/Acre:

Seed Type

Pounds/Acre

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name:

Last Name:

Phone:

Email:

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? N

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: Operator will consult with authorized officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

Weed treatment plan attachment:

Monitoring plan description: Reclaimed areas will be monitored periodically to ensure vegetation has re-established, that area is not re-disturbed, and erosion is controlled.

Monitoring plan attachment:

Success standards: Maintain all disturbed areas as per Gold Book Standards.

Pit closure description: Not applicable

Pit closure attachment:

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? N

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information:

Use a previously conducted onsite? Y

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

Previous Onsite information: Onsite for the Ghost Rider 22 15 Federal Com Northeast and Northwest pad conducted on March 26, 2019 with BLM Rep: Aaron Chastain.

[Other SUPO Attachment](#)



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

12/08/2020

APD ID: 10400053501

Submission Date: 01/28/2020

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data Report

12/08/2020

APD ID: 10400053501

Submission Date: 01/28/2020

Highlighted data
reflects the most
recent changes

Operator Name: APACHE CORPORATION

Well Name: GHOST RIDER 22 15 FEDERAL COM

Well Number: 13H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB000736

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: APACHE CORPORATION **OGRID:** 873 **Date:** 08 / 18 / 2021

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Ghost Rider 22 15 Fed Com 42H		Sec 15 T24S R32E	2282' FSL 2370' FEL	1380	2400	3100
Ghost Rider 22 15 Fed Com 13H	30-025-49334	Sec 15 T24S R32E	2357' FSL 2206' FEL	775	2600	1800
Ghost Rider 22 15 Fed Com 33H		Sec 15 T24S R32E	2357' FSL 2176' FEL	775	2600	1800
Ghost Rider 22 15 Fed Com 23H		Sec 15 T24S R32E	2357' FSL 2146' FEL	775	2600	1800
Ghost Rider 22 15 Fed Com 32H		Sec 15 T24S R32E	2272' FSL 480' FEL	775	2600	1800
Ghost Rider 22 15 Fed Com 12H		Sec 15 T24S R32E	2357' FSL 2086' FEL	775	2600	1800

IV. Central Delivery Point Name: GHOST RIDER 22 15 FED CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Ghost Rider 22 15 Fed Com 102H		5/18/22	6/24/22	Not yet scheduled	Not yet scheduled	Not yet scheduled
Ghost Rider 22 15 Fed Com 13H	30-025-49334	5/26/22	7/2/22	Not yet scheduled	Not yet scheduled	Not yet scheduled
Ghost Rider 22 15 Fed Com 33H		6/3/22	7/10/22	Not yet scheduled	Not yet scheduled	Not yet scheduled
Ghost Rider 22 15 Fed Com 23H		6/11/22	7/18/22	Not yet scheduled	Not yet scheduled	Not yet scheduled
Ghost Rider 22 15 Fed Com 32H		6/19/22	7/26/22	Not yet scheduled	Not yet scheduled	Not yet scheduled
Ghost Rider 22 15 Fed Com 12H		6/27/22	8/3/22	Not yet scheduled	Not yet scheduled	Not yet scheduled

VI. Separation Equipment: ☐ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ~~XX~~ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ~~XX~~ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan **EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☐ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

XXOperator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	<i>Sorina L Flores</i>
Printed Name:	Sorina L Flores
Title:	Sr Regulatory Analyst
E-mail Address:	sorina.flores@apachecorp.com
Date:	7/18/2021
Phone:	432-818-1167
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)	
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	

VI. SEPARATION EQUIPMENT

(Complete description of how Apache will size separation equipment to optimize gas capture)

Apache Corporation production tank batteries will include separation equipment designed to efficiently separate gas from liquid phases to optimize gas capture based on projected and estimated volumes from the targeted pool in conjunction with the total number of wells planned to/or existing within the facility. If determined to be undersized or needed, separation equipment will be upgraded prior to well(s) being drilled or completed. The separation equipment will be designed and built according to relevant industry specifications, ie API specifications 12J and ASME Sec VIII Div 1. Other recognized industry publications such as Gas Processors Suppliers Association will be referenced when designing separation equipment to optimize gas capture.

VII. OPERATIONAL PRACTICES

(Complete description of actions Apache will take to comply with the requirements of Subsection A-F of 19.15.27.8 NMAC)

(A) Venting & flaring of natural gas

- Apache acknowledges venting or flaring of natural gas during drilling, completion, or production operations constitutes as defined in 19.15.2 NMAC is prohibited. Apache will maximize recovery of natural gas by minimizing waste of natural gas through venting and flaring. During drilling, completion and production operations, Apache will vent, or flare natural gas only as authorized in subsections B, C and D of 19.15.27.8 NMAC. Apache shall flare rather than vent natural gas except when flaring technically infeasible or would pose a risk to safe operations or personnel safety, and venting is a safer alternative than flaring.

(B) Venting & flaring during drilling operations

- Apache shall capture or combust natural gas, if technically feasible, using best industry practices and control technologies
- A properly sized flare stack will be located at a minimum of 100 feet from the nearest surface hole location unless otherwise approved by the division.
- In the event of an emergency or malfunction, Apache may vent natural gas to avoid risk of an immediate and substantial adverse impact on safety, public health, or the environment. Apache shall report natural gas vented or flared during an emergency or malfunction to the NMOCD division pursuant Paragraph (1) of Subsection G of 19.15.27.8 NMAC.

(C) Venting & flaring during completions and recompletion

- During initial flowback, Apache shall route flowback fluids into a completion or storage tank and, if technically feasible under the applicable well conditions, flare rather than vent and commence operations of a separator as soon as it is technically feasible for a separator to function.
- During separation flowback, Apache shall capture and route natural gas from separation equipment:
 - ◆ To a gas flowline or collection system, reinject into the well, or use on-site as a fuel source or other purpose that a purchased fuel or raw material would serve; or
 - ◆ To flare if routing natural gas to a gas flowline or collecting system, reinjecting it into the well, or using it on-site as fuel source or other purpose that a purchased fuel or raw material would serve would pose a risk to safe operation or personnel safety.
- If natural gas does not meet gathering pipeline quality specifications, Apache may flare natural gas for 60 days or until the natural gas meets pipeline quality specifications, whichever is sooner, provided:
 - ◆ A properly sized flare stack is equipped with an automatic igniter or continuous pilot
 - ◆ Apache analyzes natural gas samples twice per week
 - ◆ Apache routes natural gas into a gathering pipeline as soon as pipeline specifications are met
 - ◆ Apache provides pipeline specifications and natural gas analyses to NMOCD division upon request

(D) Venting & flaring during production operations

- Apache shall not vent or flare natural gas except:
 - ◆ During an emergency or malfunction
 - ◆ To unload or clean up liquid holdup in a well to atmospheric pressure, provided:
 - Apache does not vent after well achieves stabilized rate and pressure
 - For liquids unloading by manual purging, Apache remains present on-site until the end of unloading or posts at the well site, contact information of personnel conducting liquids unloading operations in close proximity (<30 minutes' drive time) of well being unloaded until end of unloading, takes all

- reasonable actions to achieve stabilized rate and pressure at earliest practical time and takes reasonable actions to minimize venting to maximum extent practicable
- Apache will optimize system to minimize venting of natural gas for any well equipped with a plunger lift system or automated control system
- During downhole maintenance, best management practices will be used to the extent that it does not pose a risk to safe operations and personnel safety.
- ◆ During first 12 months of production from an exploratory well, or as extended by the division for good cause shown, provided:
 - Apache proposes and the division approves well as exploratory
 - Apache is in compliance with its' statewide gas capture requirements
 - Apache submits an updated C-129 form to the division, including a NGMP and timeline for connecting well to a natural gas gathering system or otherwise approved by the division
- ◆ During the following activities unless prohibited
 - Gauging or sampling a storage tank or other low pressure production vessel
 - Loading out liquids from a storage tank or other low pressure production vessel to a transport vehicle
 - Repair and maintenance, including blowing down and depressurizing production equipment to perform repair and maintenance
 - Normal operation of gas activated pneumatic controller or pump
 - Normal operation of storage tank or other low pressure production vessel, but not including venting from a thief hatch that is not properly closed or maintained on an established schedule
 - Normal operations of dehydration units and amine treatment units
 - Normal operations of compressors, compressor engines, and turbines
 - Normal operations of valves, flanges and connectors that is not the result of inadequate equipment design or maintenance
 - Bradenhead, packer leakage test or production test lasting less than 24 hours unless the division requires or approves a longer test period
 - When natural gas does not meet gathering pipeline specifications
 - Commissioning of pipelines, equipment, or facilities only for as long as necessary to purge introduced impurities from pipeline or equipment

(E) Performance standards

- All tanks and separation equipment are designed for maximum throughput and pressure to minimize waste
- Permanent storage tanks associated with production operations that is routed to a flare or control device installed after May 25, 2021, shall equip storage tank with an automatic gauging system that reduces venting of natural gas
- Apache will install a flare properly sized and designed to ensure proper combustion efficiency
 - ◆ Flare stack installed or replaced after May 25, 2021, shall be equipped with an automatic ignitor or continuous pilot
 - ◆ Flare stack installed before May 25, 2021, shall be retrofitted with an automatic ignitor, continuous pilot or technology that alerts operator that flare may have malfunctioned no later than 18 months after May 25, 2021
 - ◆ Flare stack located at well or facility, with an average daily production of equal to or less than 60 mcf of natural gas shall be equipped with an automatic ignitor or continuous pilot if flare stack is replaced after May 25, 2021
- Flare stack constructed after May 25, 2021, shall be securely anchored, and located at least 100 feet from well and storage tanks unless otherwise approved by the division
- At any point in the life of the well (drilling, completion, production, inactive) an audio, visual and olfactory (AVO) inspection will be performed weekly, during first year of production and on well or facility with average daily production greater than 60,000 cubic feet of natural gas, to confirm all production components are operating properly and there are no leaks or releases except as allowed in Subsection D of 19.15.27.8 NMAC.
- Apache will make and keep records of AVO inspections available to NMOCD for at least 5 years
- Apache may use a remote or automated monitoring technology to detect leaks and release in lieu of AVO inspections with prior NMOCD approval
- Facilities will be designed to minimize waste
- Apache will minimize waste and shall resolve emergencies as quickly and safely as feasible

(F) Measurement or estimation of vented and flared natural gas

- Apache shall measure or estimate volume of natural gas it vents, flares, or beneficially uses during drilling, completion, and production operations regardless of the reason or authorization for such venting or flaring
- Measurement equipment will be installed to measure volume of natural gas flared from existing process piping or flowline piped from equipment associated with a well or facility associated with approved application for permit to drill that has an average daily production greater than 60 mcf of natural gas
- Measuring equipment shall conform to an industry standard
- Measuring equipment shall not be designed or equipped with a manifold that allows diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment
- Apache may estimate volume of vented or flared natural gas using methodology that can be independently verified if metering is not practicable due to low flow rate or pressure
- Apache will estimate volume of vented and flared natural gas based on result of an annual GOR test for that well reported on form C-116 to allow division to independently verify volume and rate of flared natural gas for a well that does not require measuring equipment
- Apache shall install measuring equipment whenever the division determines metering is practicable or the existing measuring equipment or GOR test is not sufficient to measure volume of vented and flared natural gas

VIII. BEST MANAGEMENT PRACTICES

(Complete description of Apache's best management practices to minimize venting during active and planned maintenance)

- Apache has a flare stack designed to handle sufficient volume to ensure proper combustion efficiency. Flare stacks are securely anchored at least 100 feet from wells and storage tanks and are equipped with continuous pilots.
- Apache will not produce oil or gas but will maintain adequate well control through completion operations
- Apache will not flow well during initial production until all flowlines, tank batteries, and oil/gas takeaway are installed, tested, and determined operational
- Apache will equip storage tanks with automatic gauging system to reduce venting of natural gas
- When feasible, Apache will combust natural gas that would otherwise be vented or flared
- When feasible, Apache will minimize venting through pump downs of vessels and reducing time required to purge equipment before returning to service
- When feasible, Apache will shut in wells in the event of a takeaway disruption, emergency situations, or other operations where venting or flaring may occur due to equipment failures
- Reduce number of blowdowns by looking for opportunities to coordinate repair and maintenance activities

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 39376

CONDITIONS

Operator: APACHE CORPORATION 303 Veterans Airpark Ln Midland, TX 79705	OGRID: 873
	Action Number: 39376
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104	8/20/2021
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	8/20/2021
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system	8/20/2021
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing	8/20/2021