1301 W. Grand Ave., Artesia, NM 88210

1000 Rio Brazos Rd., Aztec, NM 87410

1220 S. St. Francis Dr., Santa Fe, NM 87505

District III

District IV

District II

State of New Mexico
Energy Minerals and Natural Resources

Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
July 21, 2008
Fary pits, closed-loop systems, and below and

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

	- Latt 1 ipplication
Type of action:	X Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
BGT 1	Modification to an existing permit
	Closure plan only submitted for an existing permitted or non-permitted pit closed leaves
	below-grade tank, or proposed alternative method
lease submit one	annication (F. C.14)

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinance.

	addictity's fules, regulations or ordinances.
Operator: Burlington Resources Oil & Gas Company, LP	RID#: 14538
Address: PO Box 4289, Farmington, NM 87499	11000
Facility or well name: HUBBARD 100	
API Number: 3004530884 OCD Permit Number:	
U/L or Qtr/Qtr: M Section: 11 Township: 32N Range: 12W	County: San Juan
Center of Proposed Design: Latitude:	
Surface Owner: Federal State X Private Tribal Trust or Indian Allo	
Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Emergency Cavitation P&A Lined Unlined Liner type: Thickness mil LLDPE HDPE String-Reinforced Liner Seams: Welded Factory Other	
bbl volume:bbl	Dimensions Lx Wx D
Drying Pad Above Ground Steel Tanks Haul-off Bins Other	es which require prior approval of a permit or
X Below-grade tank: Subsection I of 19.15.17.11 NMAC	
mil HDPE PVC X Other Unspecifie	ed
Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental B	ureau office for consideration of approval

Form C-144

Oil Conservation Division

Page 1 of 5

eived by OCD: 9/14/2021 11:40:07 AM	Page 2 of 23					
Fencing: Subsection D of 19.15.17.11 NM. plies to permanent pit, temporary pits, and below grade tank.						
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hosp Tour foot height, four strands of barbed wire evenly smooth between the strands of barbed	atal instantance to the					
spaced between one and four feet	ma, minumon or church)					
X Alternate. Please specify 4' hog wire fencing topped with two strands barbed wire.						
7						
Netting: Subsection F of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	1 - 3					
X Screen Netting Other	·					
Monthly inspections (If netting or screening is not physically feasible)						
8						
Signs: Subsection C of 19.15.17.11 NMAC						
12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers						
X Signed in compliance with 19.15.3.103 NMAC						
Administrative Approvals and Exceptions: Justifications and/or demonstrations of a second sec						
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.						
Please check a box if one or more of the following is requested, if not leave blank: X Administrative approval(s): Permet is much be a few plants.						
X Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for the Santa Fe E	r consideration of approval.					
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.						
Siting Criteria (regarding and Mr.)						
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each visite with the second complianc						
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted in the application.	1 1					
appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request.						
consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.						
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Yes X No						
Within 300 feet of a continuously flowing watercourse, or 200 feet of a second						
lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site						
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Yes X No						
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)						
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	LINA					
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.						
(Applied to permanent pits)	Yes No					
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image						
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.						
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended						
- Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a westland	Yes X No					
The state of a welland.	Yes XNo					
 US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. 	and					
- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes X No					
within an unstable area.	□v □					
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes X No					
Within a 100-year floodplain - FEMA map						
- Larter map	Yes X No					

Temporary Pits, Emergency Pits and Low-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the boy, that the documents are attached. [X] Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC [X] Siting Criteria Compliance Demonstrations - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9	
X Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC X Closure Plan (Please complete Boxes 14 through 18 if applicable), based upon the	
19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API or Permit	
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.11 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Previously Approved Operating and Maintenance Plan API	
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit X Below-grade Tank Closed-loop System Alternative Proposed Closure Method: X Waste Excavation and Removal (Below-Grade Tank) Waste Removal (Closed-loop systems only) On-site Closure Method (only for temporary pits and closed-loop systems) In-place Burial On-site Trench Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)	
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC X Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	

. 16	
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D N. Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more the	MAC)
Disposal Facility Name	an two facilities
Disposal Facility Name: Disposal Facility Permit #:	
Disposal Facility Name: Disposal Facility Permit #: Disposal Facility Permit #: Disposal Facility Permit #: Vest (If yes, please provide the information No	
Yes (If yes, please provide the information No No	uture service and operations?
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification, based on the service and operations:	
Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19.15.17.13 Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC	NMAC
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	
17	
Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	ed below. Requests regarding changes to to the Santa Fe Environmental Burgar office
Ground water is less than 50 feet below the bottom of the buried waste.	on the option
NM Office of the State Engineer - iWATERS database search; USGS: Data obtained from nearby wells	Yes No
Ground water is between 50 and 100 feet believed to the second obtained from nearby wells	□N/A
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is more than 100 S and the	□N/A
Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer (WATERS to a control of the buried waste).	Yes No
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□N/A
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	Yes No
- Topographic map: Visual inspection (certification) of the proposed site	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; satellite image	☐Yes ☐No
Acrial photo; satellite image	LI TES LINO
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring in existence at the time of the little of the	Yes No
purposes, or within 1000 horizontal fee of any other fresh water well or spring that less than five households use for domestic or stock watering NM Office of the State Engineer - iWATERS database: Visual investment of the initial application.	
Within incorporated municipal boundaries or within a defined municipal for	
pursuant to NMSA 1978, Section 3-27-3, as amended.	Yes No
Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland	
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No
and the area overlying a subsurface mine.	
- Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No
within an unstable area.	
 Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; 	Yes No
Within a 100-year floodplain.	
- FEMA map	Yes No
18	
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must bee attached to the closury of the closury of the following items must be attached to the closury of the clo	re plan. Please indicate
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	print rease mureure,
Proof of Surface Owner Notice - based upon the appropriate requirements of 19.15.17.10 NMAC Construction/Design Plan of Rusick Translation	
Total detail Design Flati of Burial Trench (if applicable) based upon the appropriate	
La constant of reliporary Pil (for in place burial of a drying god), beautiful of a drying god), beautiful of a drying god).	
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC	9.15.17.11 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection 5	
based upon the appropriate requirements of Subsection E. C.	
- spoon racing traine and retinit Number (for liquids drilling fluids and drill and	
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	not be achieved)
and the control of the control of Cubanting I	
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	

, 19	The first of the state of the s			
Operator Application	Certification:			
Thereby certify that the ir	information submitted with this application is true, ac	curate and complete to the l	pest of my knowledge and but of	
Name (Print):	Crystal Fafoya	Title:		
Signature:	reptal Jalous	Date:	Regulatory Technician	
e-mail address:	rystal rateya is conocopnillips com	-	12/22/2008	
	The state of the s	Telephone:	505-326-9837	
20				
OCD Approval:	Permit Application (including closure plan)	Classes Disascent		
OCD Representative S		Closure Plan (only)	OCD Conditions (see attachment)	
or in representative S	ignature: Pawniliniaa		Approval Date: September 23,	2021
Title: Environm	ental Specialist			
		OCD Permi	t Number: BGT 1	
21				
Closure Report (requir	red within 60 days of J			
Instructions: Operators are	red within 60 days of closure completion): Sub-	section K of 19.15.17.13 NMAC	activities and submitting the closure report. The closure	
report is required to be sub	omitted to the division within 60 days of the completi	ion of the closure activities	activities and submitting the closure report. The closure Please do not complete this section of the form until an	?
approved closure plan has	been obtained and the closure activities have been c	ompleted.	r tease do not complete this section of the form until an	
		Closure (Completion Date:	
22		Closure	ompletion Date:	
Closure Method:				
Waste Excavation a	and Removal			
	site closure wellou	Alternative Closure Me	ethod Waste Removal (Closed-loop systems only)	
in different from app	proved plan, please explain.		Justin Gilly)	
23				
Closure Report Regarding	Waste Removal Closure For Closed-loop Systems by the facility or facilities for where the liquids drill	s That Utilize Above Group	nd Steel Tonks on Hard William	
were utilized	y the facility or facilities for where the liquids, drill	ing fluids and drill cuttings	nd Steel Tanks or Haul-off Bins Only: were disposed. Use attachment if more than two faciliti	
Disposal Facility Name:				ies
Disposal Facility Name:		Disposal Facility Per	mit Number:	
	tem operations and	Disposal Facility Per	mit Number:	
Yes (If yes, please de	tem operations and associated activities performed o	on or in areas that will not be	used for future service and opeartions?	
	(die fichis below)	INO		
Site Reclamation (Ph	eas which will not be used for future service and ope	erations:		
Soil Backfilling and (
	ation Rates and Seeding Technique			
24	and seeding reclinique			
	ment Charlists I			
the box, that the documen	ats are attached.	ving items must be attached	to the closure report. Please indicate, by a check mark	i-
Proof of Closure No	tice (surface owner and division)		the state of the s	in
Proof of Deed Notic	re (required for on-site closure)			
Plot Plan (for on-site	closures and temporary pits)			
	ing Analytical Results (if applicable)			
Waste Material Same	pling Applicable)			
Disposal Facility New	pling Analytical Results (if applicable)			
	me and Permit Number			
Soil Backfilling and	over Installation			
Site Peolemetics (D)	ration Rates and Seeding Technique			
Site Reclamation (Ph				
On-site Closure Local	tion: Latitude:	Longitude:	NAD 1927 1983	
			NAD [] 1927 [] 1983	
25				
Operator Closure Certifica	tion:			
I hereby certify that the informa	tion and attachments submitted with this closure rep	port is ture, accurate and con	raplete to the best of my knowledge and belief. I also certi	
the closure complies with all ap	plicable closure requirements and conditions specifi	ied in the approved closure p	uptere to the best of my knowledge and belief. I also certi- plan	fy that
Name (Print):		, ,		
		Title:		1
Signature:		Date:		
		Date.		
e-mail address:		Telephone:		
				1

Form C-114

Oil Conservation Division

Page 5 of 5

New Mexico Office of the State Engineer POD Reports and Downloads


Township: 32N Range: 12W Sections:	
NAD27 X: Y: Zone: Search Radius:	
County: Basin: Number: Suffix:	
Owner Name: (First) (Last) C Non-Domestic C Domestic C	All
POD / Surface Data Report Avg Depth to Water Report Water Column Report	
Clear Form iWATERS Menu Help	


WATER COLUMN REPORT 08/21/2008

(quarters are 1=NW 2=NE 3=SW 4=SE)

DOD	(quarter	s ar	e bi	gg	es	t to	smal	lest)			Donth	D			
POD Number SJ 01213	Tws	Rng 12W	Sec	q	q	P	Zone			Y	Depth Well	Depth Water	Water	(in feet)	1
SJ 01212	32N	12W		4							640	20	620		
SJ 03583	32N	12W			-	_					43	5	38		
SJ 00055	32N	12W	25	2		-					167	60	107		
SJ 02110	32N	12W	28	2	1	4	W	391500	2170000)	504				
SJ 01106	32N	12W	35	3	4			331300	2170000	J	171 180	90 115	81 65		

Record Count: 6

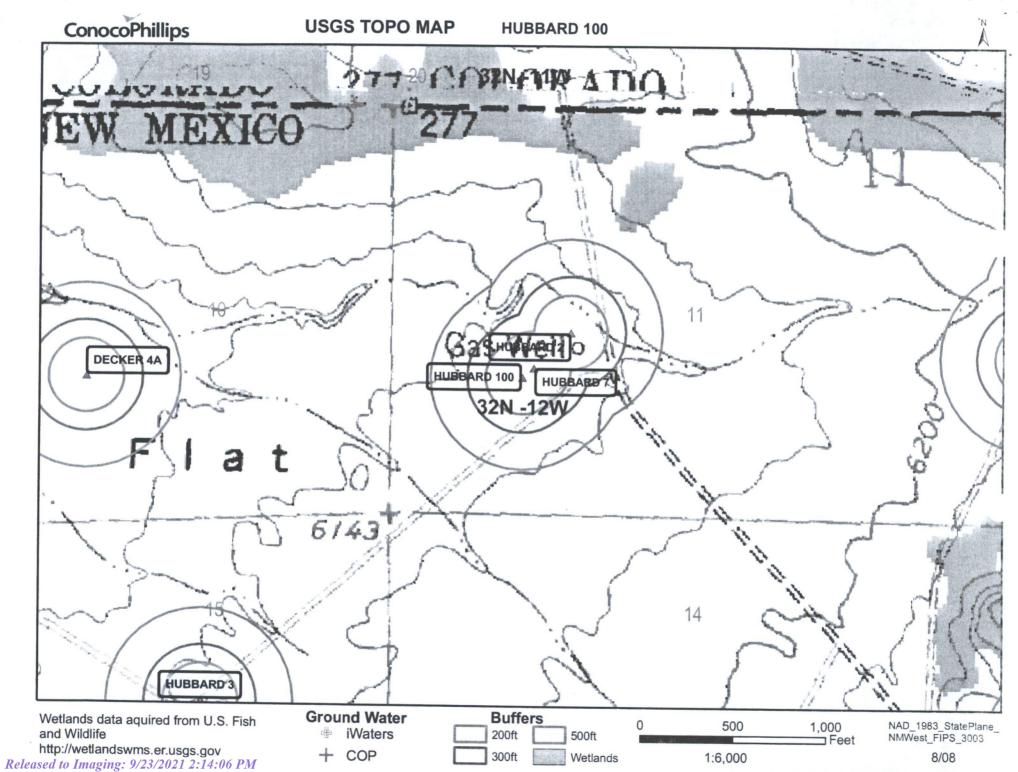


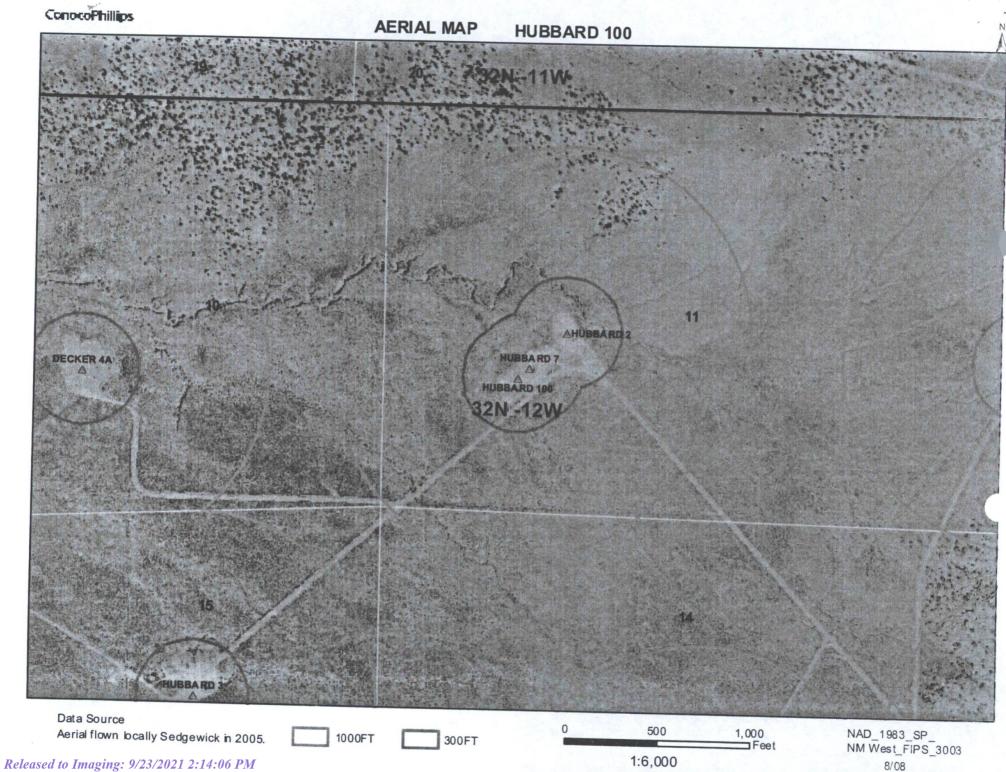


Mines, Mills and Quarries Web Map


HUBBARD 100

Unit Letter: M, Section: 11, Town: 032N, Range: 012W

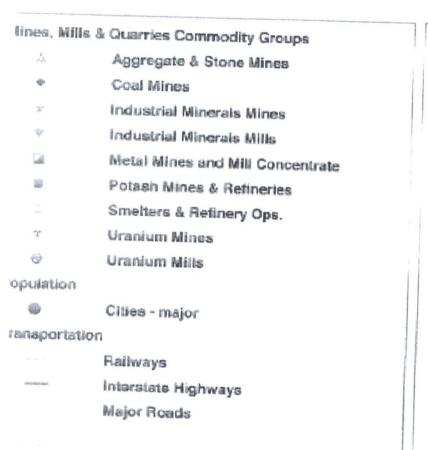

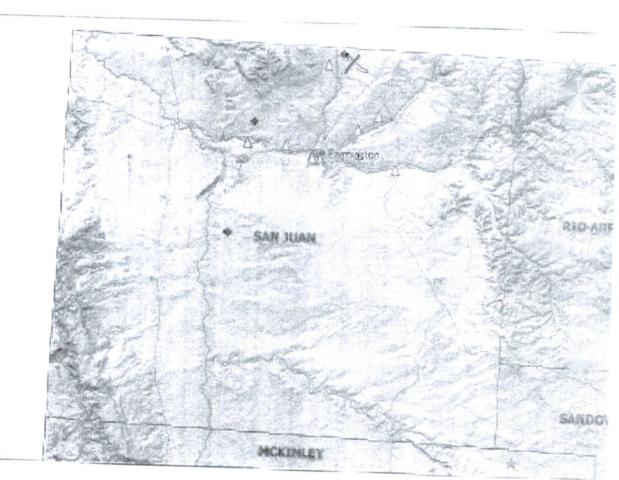



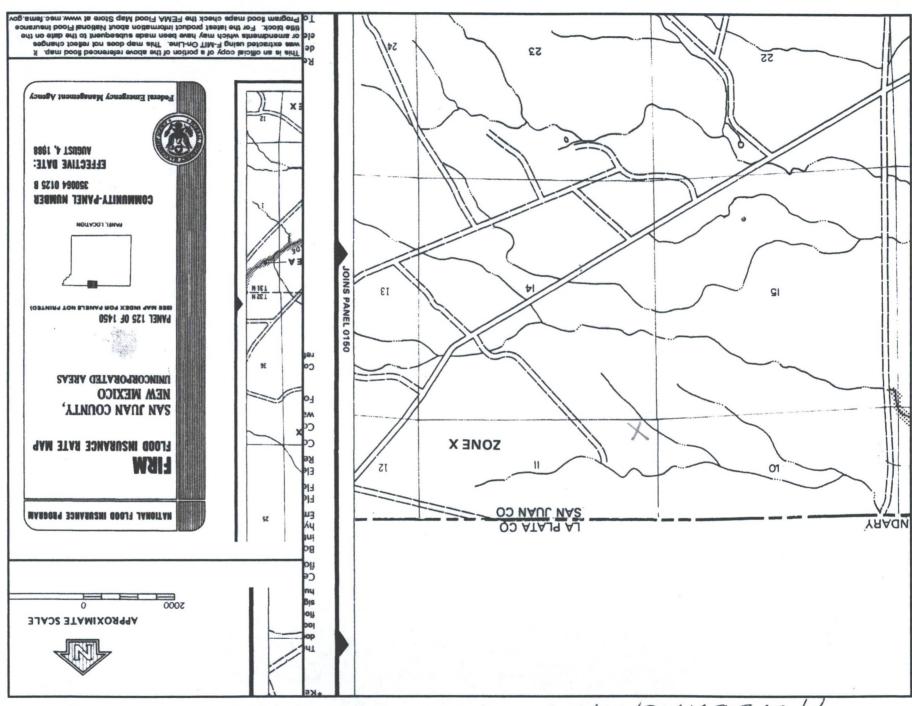

001 pryggnH

HUBBARD 100

Site Specific Hydrogeology

A visual site inspection confirming the information contained herein was performed on the well 'HUBBARD 100', which is located at 36.99571 degrees North latitude and 108.07087 degrees West longitude. This location is located on the Abode Downs Ranch 7.5' USGS topographic quadrangle. This location is in section 11 of Township 32 North Range 12 West of the Public Land Survey System (New Mexico Principal Meridian). This location is located in San Juan County, New Mexico. The nearest town is La Plata, located 8.2 miles to the southwest. The nearest large town (population greater than 10,000) is Farmington, located 19.6 miles to the southwest (National Atlas). The nearest highway is State Highway 574, located 5.4 miles to the south. The location is on Private land and is 1,474 feet from the edge of the parcel as notated in the BLM land status layer updated January 2008. This location is in the Middle San Juan. Arizona, Colorado, New Mexico, Sub-basin. This location is located 1876 meters or 6153 feet above sea level and receives 13.5 inches of rain each year. The vegetation at this location is classified as Colorado Plateau Pinon-Juniper Woodland as per the Southwest Regional Gap Analysis Program.

The estimated depth to ground water at this point is -1 feet. This estimation is based on the data published on the New Mexico Engineer's iWaters Database website and water depth data from ConocoPhillips' cathodic wells. Groundwater data available from the NM State Engineer's iWaters Database for wells near the proposed site are attached. The nearest stream is 362 feet to the northeast and is classified by the USGS as an intermittent stream. The nearest perennial stream is 6,722 feet to the north. The nearest water body is 4,190 feet to the east. It is classified by the USGS as a perennial lake and is 0.4 acres in size. The nearest spring is 15,664 feet to the west. All stream, river, water body and spring information was determined as per the USGS Hydrographic Dataset (High Resolution), downloaded 3/2008. The nearest water well is 6,391 feet to the south. There is no wetland data available for this area. The slope at this location is 1 degree to the northwest as calculated from USGS 30M National Elevation Dataset. This information is also discerned from the aerial and topographic map included. The surface geology at this location is NACIMIENTO FORMATION-Shale and sandstone with a Shale dominated formations of all ages substrate. The soil at this location is 'Blancot-Notal association, gently sloping' and is well drained and not hydric with moderate erosion potential as taken from the NRCS SSURGO map unit, downloaded January 2008. The nearest underground mine is 1.9 miles to the southwest as indicated on the Mines, Mills and Quarries Map of New Mexico provided.

Regional Geological context:

The Nacimiento Formation is of Paleocene age (Baltz, 1967, p. 35). It crops out in a broad band inside the southern and western margins of the central basin and in a narrow band along the west face of the Nacimiento Uplift. The Nacimiento is a nonresistant unit and typically erodes to low, rounded hills or forms badland topography.

The Nacimiento Formation occurs in approximately only the southern two-thirds of the San Juan Basin where it conformably overlies and intertongues with the Ojo Alamo Sandstone (Fassett, 1974, p. 229). The Nacimiento Formation grades laterally into the main part of the Animas Formation (Fassett and Hinds, 1971, p. 34); thus, in this area, the two formations occupy the same stratigraphic interval.

Strata of the Nacimiento Formation were deposited in lakebeds in the central basin area with lesser deposition in stream channels (Brimhall, 1973, p. 201). In general, the Nacimiento consists of drab, interbedded black and gray shale with discontinuous, white, medium- to very coarse grained arkosic sandstone (Stone e al., 1983, p.30). Stone et al. indicated that the formation may contain more sandstone than commonly reported because some investigators assume the slope-forming strata in the unit area shales, whereas in many places the strata actually are poorly consolidated sandstones.

Total thickness of the Nacimiento Formation ranges from about 500 to 1,300 feet. The unit generally thickens from the basin margins toward the basin center (Steven et al., 1974). The sandstone deposits within the Nacimiento Formation are much thinner than the total thickness of the formation because their environment of deposition was localized stream channels (Brimhall, 1973, p. 201). The thickness of the combined San Jose, Animas, and Nacimiento Formations ranges from 500 to more than 3.500 feet.

Hydraulic Properties:

Reported well yields for 53 wells completed in either the Animas or Nacimiento Formations range from 2 to 90 gallons per minute and the median yield is 7.5 gallons per minute. The primary use of water from Nacimiento and Animas Formations is domestic and livestock supplies. There are no known aquifer tests for the Animas or Nacimiento Formations, but specific capacities reported for six wells range from 0.24 to 2.30 gallons per minute per foot of drawdown (Levings et al., 1990).

The Animas and Nacimiento Formations are in many ways hydrologically similar to the San Jose Formation because sands in both units produce approximately the same quantities of water. However, the greater percentage of fine materials in the Animas and Nacimiento Formations may restrict downward vertical leakage to the Ojo Alamo Sandstone or Kirtland Shale. The poorly cemented fine material is highly erodible, forms a badland terrain, and supports only spotty vegetation. These conditions are more conductive to runoff than retention of precipitation.

References:

Baltz, E.H., 1967, Stratigraphy and regional tectonic implications of part of Upper Cretaceous rocks, east-central San Juan Basin, New Mexico: USGS Professional Paper 552, 101 p.

Brimhall, R.M., 1973, Ground-water hydrology of Tertiary rocks of the San Juan Basin, New Mexico, in Fassett, J.E., ed., Cretaceous and Tertiary rocks of the Southern Colorado Plateau: Four Corners Geological Society Memoir, p. 197-207.

Fassett, J.E., 1974, Cretaceous and Tertiary rocks of the eastern San Juan Basin, New Mexico and Colorado, in Guidebook of Ghost Ranch, central-northern New Mexico: New Mexico Geological Society, 25th Field Conference, p. 225-230.

Fassett, J.E., and Hinds, J.S., 1971, Geology and fuel resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado: USGS Professional Paper 676, 76 p. Levings, G.W., Craigg, S.d., Dam, W.L., Kernodle, J.M., and Thorn, C.R., 1990, Hydrogeology of the San Jose, Nacimiento, and Animas Formations in the San Juan structural basin, New Mexico, Colorado, Arizona, and Utah: USGS Hydrologic Investigations Atlas HA-720-A, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico: New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.

Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Design and Construction

In accordance with NMAC 19.15.17 the following information describes the design and construction of below grade tanks on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all below grade tanks (BGT). A separate plan will be submitted for any BGT which does not conform to this plan.

General Plan:

- BR will design and construct a properly sized and approved BGT which will contain liquids and should prevent contamination of fresh water to protect the public health and environment.
- BR signage will comply with 19.15.3.103 NMAC when BR is the operator. If BR is not the operator it will comply with 19.15.17.11NMAC. BR includes Emergency Contact information on all signage.
- 3. BR has approval to use alternative fencing that provides better protection. BR constructs fencing around the BGT using 4 foot hog wire fencing topped with two strands of barbed wire, or with a pipe top rail. A six foot chain link fence topped with three strands of barbed wire will be use if the well location is within 1000 feet of permanent residence, school, hospital, institution or church. BR ensures that personnel are not onsite.
- 4. BR will construct a screened, expanded metal covering, on the top of the BGT.
- BR shall ensure that a below-grade tank is constructed of materials resistant to the below-grade tank's particular contents and resistant to damage from sunlight as shown on design drawing and specification sheet.
- The BR below-grade tank system shall have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom as shown on design drawing.
- 7. BR shall operate and install the below-grade tank to prevent the collection of surface water run-on. BR has built in shut off devices that do not allow a belowgrade tank to overflow. BR constructs berms and corrugated retaining walls at least 6" above ground to keep from surface water run-on entering the below grade tank as shown on the design plan.
- 8. BR will construct and use a below-grade tank that does not have double walls. The below-grade tank's side walls will be open for visual inspection for leaks, the below-grade tank's bottom is elevated a minimum of six inches above the underlying ground surface and the below-grade tank is underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected.

- 9. BR has equipped the below-grade tanks with the ability to detect high level in the tank and provide alarm notification and shutdown process streams into the tank. Once high level is detected RTU logic closes the inlet separator sales valve and does not permit vent valve to open. This shutdown of the sales valve and gagging of the vent valves prevents any hydrocarbon process streams from entering the pit tank once a high level is detected. Furthermore, an electronic "Water-Hauling" Company indicating a high level and that action must be taken to address this alarm. The environmental drain line from BR's compressor skid drain line is in place to capture any collected rain water or spilled lubricants from normal operating procedures is in the closed position. The tank drain line is also position.
- 10. The geomembrane liner consists of a 45-mil flexible LLDPE material manufactured by Raven Industries as J45BB. This product is a four layer reinforced laminated containing no adhesives. The outer layers consist of a high strength polyethylene film manufactured using virgin grade resins and stabilizers for UV resistance in exposed applications. The J45BB is reinforced with 1300 denier (minimum) tri-directional scrim reinforcement. It exceeds ASTMD3083 standard by 10%. J45BB has a warranty for 20 years from Raven Industries and is attached. It is typically used in Brine Pond, Oilfield Pit liner and other industrial applications. The manufacture specific sheet is attached and the design attached displays the proper installation of the liner.
- The general specification for design and construction are attached in the BR document.

MANUAL OPERATION 1) PRODUCTION TANKS DRAINLINE 2) SWABLINE DRAIN LINE 3) ENVIROMENTAL DRAIN LINE FROM COMPRESSOR SKID DRAIN FROM SEPARATORS AUTOMATED OPERATION 1) VENT VALVE DRAIN LINE **SWABLINE** 2) DUMP LINE FROM SEPARATORS 3) AUTOMATIC SHUT OFF LSHH ACTIVATES AT 10' FROM TOP VENT LINE ENVIROMENTAL DRAIN LINE 3" TRUCK LOADOUT CONNECTION TO RTU + SLOPE TO DRAIN TRUCK GROUND CONNECTION LAHH TO RTU 5 LAH EXPANDED METAL COVER DRAIN LINES FROM TANKS LSHH Ц HINGED MANWAY 3" TRUCK LUAD LINE DRIGINAL GRADE CORROGATED RETAINING WALL 4' SLOTTED HEIGHT 56" 'SUPER MUFFLER' SA-36 3/16" PLATE SA-36 1/4" PLATE DURASKRIM J45 **IMPERMEABLE** Q, LINER FOR VISIBLE LEAK DETECTION PROPERLY CONSTRUCTED FOUNDATION VOID OF ANY SHARP DBJECTS

ConocoPhillips

San Juan Business Unit

PRODUCED WATER PIT TANK OPEN TOP GRAVITY FLOW TANK INTERNALLY COATED WITH 12-14 MILS AMERON AMERCOAT 385

30 368

Appearance Thickness Weight Lbs Per MSF	ASTM D 5199	Min. Roll Averages	Typical Rol Averages		Typical Ro		145BB
Thickness Weight Lbs Per MSF		Bla	Averages			Min D-II	
Thickness Weight Lbs Per MSF			ick/Black		Averages		
Weight Lbs Per MSF		27 mil		Bla	ck/Black		ck/Black
vveight Lbs Per MSF	ACTAID FOR		30 mil	32 mil	36 mil	40 mil	
(oz/yd²)	ASTM D 5261	126 lbs (18.14)	140 lbs (20.16)	151 lbs	168 lbs	189 lbs	45 mil
Construction				(21.74)	(24.19)	(27.21)	(30.24)
Ply Adhesion	ASTM D 413	1011-	Tusion laminate	ed with encapsu	lated tri-direction	onal scrim reinfo	rcement
2 2 4 3 3 3 3 3 3 3	101010410	10 105	20 lbs	19 lbs	24 lbs	25 lbs	31 lbs
1" Tensile Strength	ASTM D 7003	88 lbf MD 63 lbf DD	110 lbf MD 79 lbf DD	90 lbf MD 70 lbf DD	113 lbf MD 87 lbf DD	110 lbf MD 84 lbf DD	101 1410
1" Tensile Elongation @ Break. % (Film Break)	ASTM D 7003	550 MD 550 DD	750 MD 750 DD	550 MD	750 MD	550 MD	105 lbf DD 750 MD
1" Tensile Elongation @	1071	20 MD		550 DD	750 DD	550 DD	750 DD
Peak % (Scrim Break)	ASTM D 7003	20 DD	33 MD 33 DD	20 MD 20 DD	30 MD 31DD	20 MD 20 DD	36 MD 36 DD
Tongue Tear Strength	ASTM D 5884	75 lbf MD 75 lbf DD	97 lbf MD 90 lbf DD	75 lbf MD 75 lbf DD	104 lbf MD 92 lbf DD	100 lbf MD 100 lbf DD	117 lbf MD
Grab Tensile	ASTM D 7004	180 lbf MD	218 lbf MD	190 (140)	-		118 lbf DD
	7.07111 12 7004	180 lbf DD	210 lbf DD	180 lbf MD 180 lbf DD	222 lbf MD 223 lbf DD	220 lbf MD 220 lbf DD	257 lbf MD 258 lbf DD
	ASTM D 4533	120 lbf MD 120 lbf DD	146 lbf MD 141 lbf DD	130 lbf MD 130 lbf DD	189 lbf MD	160 lbf MD	193 lbf MD
Dimensional Stability	ASTM D 1204	<1	<0.5		172 lbf DD	160 lbf DD	191 lbf DD
Puncture Resistance	ASTM D 4833	50 lbf		<1	<0.5	<1	<0.5
Maximum Use Temperature			64 lbf	65 lbf	83 lbf	80 lbf	99 lbf
linimum Use Temperature		180° F					
) = Machine Direction		-70° F					

DD = Diagonal Directions



Note: Minimum Roll Averages are set to take into account product variability in addition to testing variability between laboratories.

*Dimensional Stability Maximum Value

**DURA-SKRIM J30BB, J36BB & J45BB are a four layer reinforced laminate containing no adhesives. The outer layers consist of a high strength polyethylene film manufactured using virgin grade resins and stabilizers for UV resistance in exposed applications. DURA-SKRIM J30BB, J36BB & J45BB are reinforced with a 1300 denier (minimum) tri-directional scrim

Note: RAVEN INDUSTRIES MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and

PLANT LOCATION

Sioux Falls, South Dakota

SALES OFFICE

P.O. Box 5107 Sioux Falls, SD 57117-5107 (605) 335-0174 (605) 331-0333 FAX 800-635-3456

08/06

RAVEN INDUSTRIES

RAVEN INDUSTRIES INC. EXPOSED GEOMEMBRANE LIMITED WARRANTY

Raven Industries Inc. warrants Dura-Skrim J30BB, J36BB, and J45BB to be free from manufacturing defects and to be able to withstand normal exposure to sunlight for a period of 20 years from the date of sale for normal use in approved applications in the U.S and Canada, excluding Hawaii. This warranty is effective for products sold and shipped from January 1, 2008 to December 31, 2008. These dates will be updated prior to December 31, 2008.

This Limited Warranty does not include damages or defects in the Raven geomembrane resulting from acts of God, casualty or catastrophe including but not limited to: earthquakes, floods, piercing hail, or tornadoes. The term "normal use" as used herein does not include, among other things improper handling during transportation, unloading, storage or installation, the exposure of Raven geomembranes to harmful chemicals, atypical atmospheric conditions, abuse of Raven geomembranes by machinery, equipment or people; improper site preparation or covering materials, excessive pressures or stresses from any source or improper consumer as defined in the Magnuson Moss Warranty or any similar federal, state, or local statues. The parties expressly agree

Should defects or premature loss of use within the scope of the above Limited Warranty occur, Raven Industries Inc. will, at its option, repair or replace the Raven geomembrane on a pro-rata basis at the then current price in such manner as to charge the Purchaser/User only for that portion of the warranted life which has elapsed since purchase of the material. Raven Industries Inc. will have the right to inspect and determine the cause of any alleged defect in the Raven geomembrane and to take appropriate steps to repair or replace the Raven geomembrane if a defect exists which is covered under this warranty. This Limited Warranty extends only to Raven's geomembrane, and does not extend to the installation service of third parties nor does it extend to materials furnished or installed by others in connection with the intended use of the Raven geomembranes.

Any claim for any alleged breach of this warranty must be made in writing, by certified mail, to the General Manager of Engineered Films Division of Raven Industries Inc. within ten (10) days of becoming aware of the alleged defect. Should the required notice not be given, the defect and all warranties are waived by the Purchaser, and Purchaser shall not have any rights under this warranty. Raven Industries Inc. shall not be obligated to perform repairs or replacements under this warranty unless and until the area to be replacement of replaced is clean, dry, and unencumbered. This includes, but is not limited to, the area made available for repair and/or determined that there is no claim under this Limited Warranty, Purchaser shall reimburse Raven Industries Inc. for its costs

In the event the exclusive remedy provided herein fails in its essential purpose, and in that event only, the Purchaser shall be entitled to a return of the purchase price for so much of the material as Raven Industries Inc. determines to have violated the warranty provided herein. Raven Industries Inc. shall not be liable for direct, indirect, special, consequential or incidental damages resulting from a breach of this warranty including, but not limited to, damages for loss of production, lost profits, personal injury or or alterations made by Purchaser unless Raven Industries Inc. specifically authorized, in writing, said repairs, replacements, modifications or alteration in advance of them having been made. Raven Industry's liability under this warranty shall in no event exceed the replacement cost of the material sold to the Purchaser for the particular installation in which it failed.

Raven Industries Inc. neither assumes nor authorizes any person other than the undersigned of Raven Industries Inc. to assume for it any other or additional liability in connection with the Raven geomembrane made on the basis of the Limited Warranty. The Limited Warranty on the Raven geomembrane herein is given in lieu of all other possible material warranties, either expressed or This Limited Warranty may only be modified by written document mutually executed by Owner and Raven Industries Inc.

Limited Warranty is extended to the purchaser/owner and is non-transferable and non-assignable; i.e., there are no third-party beneficiaries to this warranty.

Purchaser acknowledges by acceptance that the Limited Warranty given herein is accepted in preference to any and other possible materials warranties.

THIS LIMITED WARRANTY SHALL BE GOVERNED BY SOUTH DAKOTA LAW AND VENUE FOR ALL LEGAL PROCEEDINGS IN CONNECTION WITH THIS LIMITED WARRANTY SHALL BE IN MINNEHAHA COUNTY, SOUTH DAKOTA. RAVEN INDUSTRIES INC. MAKES NO WARRANTY OF ANY KIND OTHER THAN THAT GIVEN ABOVE AND HEREBY DISCLAIMS ALL WARRANTIES, BOTH EXPRESSED OR IMPLIED, OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THIS IS THE ONLY WARRANTY THAT APPLIES TO THE MATERIALS REFERRED TO HEREIN AND RAVEN INDUSTRIES INC. DISCLAIMS ANY LIABILITY FOR ANY WARRANTIES GIVEN BY ANY OTHER PERSON OR ENTITY, EITHER WRITTEN OR ORAL.

RAVEN INDUSTRIES' WARRANTY BECOMES AN OBLIGATION OF RAVEN INDUSTRIES INC. TO PERFORM UNDER THE WARRANTY ONLY UPON RECEIPT OF FINAL PAYMENT AND EXECUTION BY A DULY AUTHORIZED OFFICER OF RAVEN INDUSTRIES INC.

San Juan Basin Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17 the following information describes the operation and maintenance of Below Grade Tank (BGT) on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all BGT. A separate plan will be submitted for any BGT which does not conform to this plan.

General Plan:

- BR will operate and maintain a BGT to contain liquids and solids and maintain
 the integrity of the liner, liner system and secondary containment system to
 prevent contamination of fresh water and protect public health and environment.
 BR will accomplish this by performing an inspection on a monthly basis, installing
 cathodic protection, and automatic overflow shutoff devices as seen on the
 design plan.
- 2. BR will not discharge into or store any hazardous waste in the BGT.
- 3. BR shall operate and install the below-grade tank to prevent the collection of surface water run-on. BR has built in shut off devices that do not allow a belowgrade tank to overflow. BR constructs berms and corrugated retaining walls at least 6" above ground to keep from surface water run-on entering the below grade tank as shown on the design plan.
- 4. As per 19.17.15.12 Subsection D, Paragraph 3, BR will inspect the below-grade tank at least monthly reviewing several items which include 1) containment berms adequate and no oil present, 2) tanks had no visible leaks or sign of corrosion, 3) tank valves, flanges, and hatches had no visible leaks and 4) no evidence of significant spillage of produced liquids. In addition, BR's multi-skilled operators (MSOs) are required to visit each well location once per week. If detected on either inspection, BR shall remove any visible or measurable layer of oil from the fluid surface of a below-grade tank in an effort to prevent significant accumulation of oil overtime. The written record of the monthly inspections will include the items listed above and will be maintained for five years.
- BR shall require and maintain a 10" adequate freeboard to prevent overtopping of the below-grade tank.
- 6. If the below grade tank develops a leak, or if any penetration of the pit liner or below grade tank, occurs below the liquid's surface, then BR shall remove all liquid above the damage or leak line within 48 hours. BR shall notify the appropriate district office. BR shall repair or replace the pit liner or below grade tank, within 48 hours of discovery. If the below grade tank or pit liner does not demonstrate integrity, BR shall promptly remove and install a below grade tank or pit liner that complies with Subsection I of 19.15.17.11 NMAC. BR shall notify the appropriate district office of a discovery of leaks less than 25 barrels as required pursuant to Subsection B of 19.15.3.116 NMAC shall be reported within immediate verbal notification pursuant to Subsection B, Paragraph (1), and Subparagraph (d) of 19.15.3.116 NMAC shall be reported to the division's Environmental Bureau Chief.

Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Closure Plan

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of Below Grade Tanks (BGTs) on Burlington Resources Oil & Gas Company, LP locations hereinafter known as BR locations. This is BR's standard procedure for all BGTs. A separate plan will be submitted for any BGT which does not conform to this plan.

General Requirements:

- 1. BR shall close a below-grade tank within the time periods provided in Subsection A of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I o f19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) permitted below-grade tanks within 60 days of cessation of the below-grade tank's operation., or c) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.
- 2. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.
- 3. BR will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves. Documentation of how the below-grade tank was disposed of or recycled will be provided in the closure report.
- If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.
- 5. BR shall test the soils beneath the below-grade tank to determine whether a release has occurred. BR shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyze for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100 mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. BR shall notify the division of its results on form C-141.
- 6. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

- 7. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site.
- 8. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- The surface owner shall be notified of BR's closing of the below-grade tank prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 10. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 11. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federally jurisdicted lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. BR will repeat seeding or planting will be continued until successful vegetative growth occurs.
- 12. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.
- 13. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the belowgrade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation
 - Re-vegetation application rates and seeding techniques
 - Photo documentation of the site reclamation
 - Confirmation Sampling Results
 - Proof of closure notice

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III 1000 Rio Brazos Rd., Aztec, NM 87410

Phone:(505) 334-6178 Fax:(505) 334-6170 1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

QUESTIONS

Action 48531

QUESTIONS

Operator:	OGRID:
HILCORP ENERGY COMPANY	372171
1111 Travis Street	Action Number:
Houston, TX 77002	48531
	Action Type:
	[C-144] Legacy Below Grade Tank Plan (C-144LB)

QUESTIONS

Facility and Ground Water							
Please answer as many of these questions as possible in this group. More information will help us identify the appropriate associations in the system.							
Facility or Site Name	Not answered.						
Facility ID (f#), if known	Not answered.						
Facility Type	Below Grade Tank - (BGT)						
Well Name, include well number	Not answered.						
Well API, if associated with a well	Not answered.						
Pit / Tank Type	Not answered.						
Pit / Tank Name or Identifier	Not answered.						
Pit / Tank Opened Date, if known	Not answered.						
Pit / Tank Dimensions, Length (ft)	Not answered.						
Pit / Tank Dimensions, Width or Diameter (ft)	Not answered.						
Pit / Tank Dimensions, Depth (ft)	Not answered.						
Ground Water Depth (ft)	Not answered.						
Ground Water Impact	Not answered.						
Ground Water Quality (TDS)	Not answered.						

Below-Grade Tank					
Subsection I of 19.15.17.11 NMAC					
Volume / Capacity (bbls)	Not answered.				
Type of Fluid	Not answered.				
Pit / Tank Construction Material	Not answered.				
Secondary containment with leak detection	Not answered.				
Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	Not answered.				
Visible sidewalls and liner	Not answered.				
Visible sidewalls only	Not answered.				
Tank installed prior to June 18. 2008	Not answered.				
Other, Visible Notation. Please specify	Not answered.				
Liner Thickness (mil)	Not answered.				
HDPE (Liner Type)	Not answered.				
PVC (Liner Type)	Not answered.				
Other, Liner Type. Please specify (Variance Required)	Not answered.				

Fencing		
Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)		
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)	Not answered.	
Four foot height, four strands of barbed wire evenly spaced between one and four feet	Not answered.	
Alternate, Fencing. Please specify (Variance Required)	Not answered.	

Netting		
Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)		
Screen	Not answered.	
Netting	Not answered.	
Other, Netting. Please specify (Variance May Be Needed)	Not answered.	

Signs

Subsection C of 19.15.17.11 NMAC (If there are multiple operators at a site, each operator must have their own sign in compliance with Subsection C of 19.15.17.11 NMAC.)

12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	Not answered.
Signed in compliance with 19.15.16.8 NMAC	Not answered.

Variances and Exceptions		
Justifications and/or demonstrations ofequivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank:		
Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.	Not answered.	
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval	Not answered.	

Siting Criteria (regarding permitting)

19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.

ng Criteria, General Siting		
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank	Not answered.	
NM Office of the State Engineer - iWATERS database search	Not answered.	
USGS	Not answered.	
Data obtained from nearby wells	Not answered.	

Siting Criteria, Below Grade Tanks		
Within 100 feet of a continuously flowing watercourse, significant watercourse, lakebed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark)	Not answered.	
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption	Not answered.	

Proposed Closure Method		
Below-grade Tank	Below Grade Tank - (BGT)	
Waste Excavation and Removal	Not answered.	
Alternate Closure Method. Please specify (Variance Required)	Not answered.	

Operator Application Certification	
Registered / Signature Date	Not answered.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

ACKNOWLEDGMENTS

Action 48531

ACKNOWLEDGMENTS

Operator:	OGRID:	
HILCORP ENERGY COMPANY	372171	
1111 Travis Street	Action Number:	
Houston, TX 77002	48531	
	Action Type:	
	[C-144] Legacy Below Grade Tank Plan (C-144LB)	

ACKNOWLEDGMENTS

I acknowledge that I have received prior approval from the OCD to submit documentation of a legacy below-grade tank on behalf of my operator.		
1	<	I hereby certify that the information submitted with this documentation is true, accurate and complete to the best of my knowledge and belief.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 48531

CONDITIONS

Operator:	OGRID:	
HILCORP ENERGY COMPANY	372171	
1111 Travis Street	Action Number:	
Houston, TX 77002	48531	
	Action Type:	
	[C-144] Legacy Below Grade Tank Plan (C-144LB)	

CONDITIONS

Created By	Condition	Condition Date
cwhitehead	None	9/23/2021