

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☐ gas ☒ other ☐
well well
2. NAME OF OPERATOR
El Paso Natural Gas Company
3. ADDRESS OF OPERATOR
P. O. Box 289, Farmington, N. M. 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1090' N, 890' E
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

- ☐
☐
☐
☐
☐
☐
☐
☒

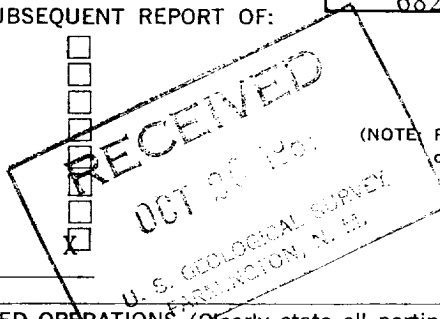


5. LEASE
SF 078925
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
Canyon Largo
8. FARM OR LEASE NAME
Canyon Largo Unit
9. WELL NO.
7
10. FIELD OR WILDCAT NAME
Ballard P.C.
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 27, T24N, R6W
12. COUNTY OR PARISH
Rio Arriba
13. STATE
N. M.
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
6821' D.F.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Oct. 8-9- 1981

1. Spot 30 sx cement plug across perforations, squeeze 5 sx into perforations.
2. Perforate 2 holes at 1700' and spot a 20 sx cement plug from 1875' to 1700' to cover Ojo Alamo.
3. Perforate 2 holes at 150' below surface pipe and circulate 75 sx plug to surface leaving production casing full.
4. Install a dry hole marker.
5. Comply general requirements. Site ready for inspection.



DEC 12 1984

OIL CON. DIV.
DIST. 3

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED CR Bowman TITLE Production Engineer

DATE

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

APPROVED
AS AMENDED

DEC 10 1984
/s/ J. Stan McKee

M. MILLENBACH
AREA MANAGER

Approved as to plugging of the well bore.
Liability under bond is retained until
surface restoration is completed.