

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

Form C-101
August 1, 2011

Permit 335592

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address Franklin Mountain Energy 3, LLC 44 Cook Street Denver, CO 80206		2. OGRID Number 331595
		3. API Number 30-025-51165
4. Property Code 333825	5. Property Name NORTE STATE COM	6. Well No. 702H

7. Surface Location

UL - Lot C	Section 3	Township 19S	Range 35E	Lot Idn 3	Feet From 325	N/S Line N	Feet From 1995	E/W Line W	County Lea
---------------	--------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot C	Section 27	Township 18S	Range 35E	Lot Idn C	Feet From 150	N/S Line N	Feet From 1700	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

9. Pool Information

REEVES;WOLFCAMP, SOUTH	97467
------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3847
16. Multiple N	17. Proposed Depth 20450	18. Formation Wolfcamp	19. Contractor	20. Spud Date 5/1/2023
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1900	1457	0
Int1	12.25	9.625	40	9080	2010	0
Prod	8.75	7	32	9700	86	8080
Prod	8.75	5.5	20	20450	2683	9700

Casing/Cement Program: Additional Comments

PROPOSED PILOT HOLE 9 5/8" casing will be set at 9,080 and cemented to surface utilizing Stage Tool placed at 4,000'. The 8 3/4" pilot hole will be drilled to the proposed TD of 11,907' using Oil Based mud with weight up to 13.5 ppg. Two OH log runs planned to evaluate formations. The pilot hole will be cemented with 2 of 1,000' consecutive cmt plugs to 9,907'. The 500' kick-off plug will be placed on top the second plug with proposed top of 9,407'. The planned KOP for the lateral section is 9,696'. Please see attached 14 Pt. Plan for additional information. Tapered production string will be ran with a X-over installed at the KOP of 9,700'. Cementing Stage tool can be placed in the 1st Intermediate string as a contingency to ensure required TOC to surface. To increase efficiency of drilling operations and minimize disturbance of the area the batch-drilling approach will be used. Off-line cementing may be utilized for Surface and Intermediate strings to further optimization of drilling

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double Ram	10000	5000	Cactus

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.
I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.

OIL CONSERVATION DIVISION

Signature:			
Printed Name:	Electronically filed by Rachael A Overbey	Approved By:	Paul F Kautz
Title:	Project Manager	Title:	Geologist
Email Address:	roverbey@fmellc.com	Approved Date:	3/7/2023
Date:	3/3/2023	Expiration Date:	3/7/2025
Phone:	303-570-4057	Conditions of Approval Attached	

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-51165	² Pool Code 97467	³ Pool Name REEVES;WOLFCAMP, SOUTH
⁴ Property Code 333825	⁵ Property Name NORTE STATE COM	⁶ Well Number 702H
⁷ OGRID No. 331595	⁸ Operator Name FRANKLIN MOUNTAIN ENERGY 3, LLC	⁹ Elevation 3847.6'


¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
3	3	19S	35E		325	NORTH	1995	WEST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	27	18S	35E		150	NORTH	1700	WEST	LEA
¹² Dedicated Acres 320	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

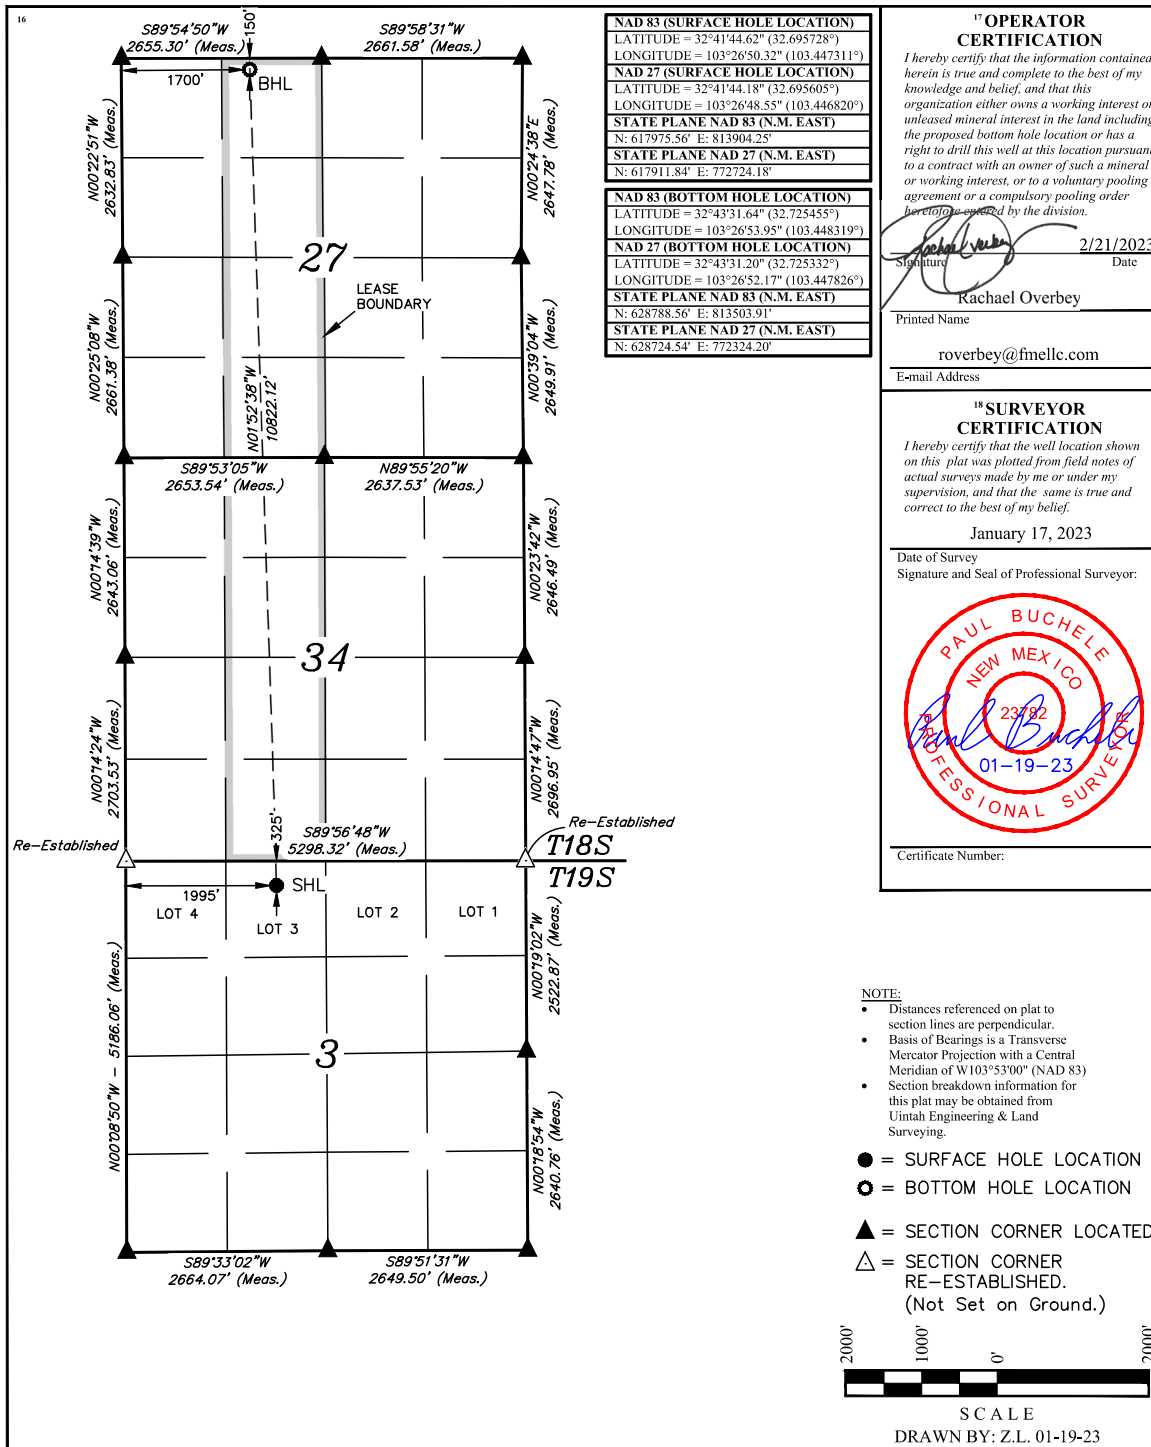

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions
Permit 335592

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: Franklin Mountain Energy 3, LLC [331595] 44 Cook Street Denver, CO 80206	API Number: 30-025-51165
	Well: NORTE STATE COM #702H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud



Norte State Com 702H

PROPOSED PILOT HOLE

1. Geologic name of surface location: Permian

2. Estimated tops of important geological markers:

Formations	PROG SS	PROG TVD	Picked TVD	delta	Potential/Issues
Cenozoic Alluvium (surface)	3,855'	30'	30'	0	Sand/Gravels/unconsolidated
Rustler	2,076'	1,809'			Carbonates
Salado	1,841'	2,044'			Salt, Carbonate & Clastics
Base Salt	924'	2,962'			Shaley Carbonate & Shale
Yates	524'	3,362'			Carbonate & Clastics
Seven Rivers	76'	3,810'			Sandstone - oil/gas/water
Queen	-684'	4,570'			Sandstone - oil/gas/water
Cherry Canyon	-2,122'	6,007'			Sand/carb/shales - oil/gas/water
Bone Spring Lime	-3,578'	7,463'			Shale/Carbonates - oil/gas
First Bone Spring Sand	-5,147'	9,033'			Shale/Carbonates - oil/gas
Second Bone Spring Carbonates	-5,413'	9,298'			Chert/Carbonate
Second Bone Spring Sand	-5,577'	9,462'			Sandstone - oil/gas/water
Third Bone Spring Carbonates	-6,006'	9,891'			Shale/Carbonates - oil/gas
Third Bone Spring Sand	-6,084'	9,970'			Sandstone - oil/gas/water
Wolfcamp	-6,242'	10,127'			Overpressure shale/sand- oil/gas
Wolfcamp B	-6,383'	10,269'			Overpressure Shale - oil/gas
Strawn	-6826	10,711'			Overpressure Shale - oil/gas
Mississippian Lime	-7098	10,983'			Overpressure Carbonate - oil/gas
Woodford Shale	-7740	11,626'			Overpressure Shale - oil/gas
Devonian	-7884	11,770'			Overpressure Carbonates- water

3. Estimated depth of anticipated fresh water, oil or gas:

Upper Permian Sands	0- 400'	Fresh Water
Delaware Sands	6,007'	Oil
1 st Bone Spring Sand	9,033'	Oil
2 nd Bone Spring Sand	9,462'	Oil
3 rd Bone Spring Sand	9,970'	Oil
Wolfcamp	10,127'	Oil
Wolfcamp B	10,269'	Oil
Strawn	10,711'	Oil
Mississippian Lime	10,983'	Oil
Woodford Shale	11,626'	Oil
Devonian	11,770'	Oil

No other formations are expected to give up oil, gas or fresh water in measurable quantities. Surface freshwater sands will be protected by setting 13 3/8" casing at 1,900' and circulating cement back to surface.



4. Casing Program:

All casing strings will be run new.

Casing string	Weight	Grade	Burst	Collapse	Tension	Conn	Length	API design factor			
								Burst	Collapse	Tension	Coupling
Surface 13 3/8" 0-1,900'	54.5	J-55	2730	1130	853	BTC 909	1900	1.02	1.14	4.19	4.47
Intermediate 9 5/8" 0-9,080'	40	HCL-80	7430	4230	916	BTC 1042	9080	1.19	1.00	1.98	2.25
Production 7" 0-9,700'	32	HCP-110	12460	10760	1025	CDC-HTQ 1053	9700	2.06	2.37	2.50	2.57
Production 5 1/2" 9,700'-20,450'	20	HCP-110	12640	12200	641	CDC-HTQ 667 TVD	10750 10269	1.15	2.42	2.03	2.12 2.18

Tapered production string will be ran with a X-over installed at the KOP of 9,700'.

Cementing Program:

Cementing Stage tool will be placed in the 1st Intermediate string to ensure required TOC to surface. To increase efficiency of drilling operations and minimize disturbance of the area the batch-drilling approach will be used.

Off-line cementing may be utilized for Surface and Intermediate strings to further optimization of drilling process and reduction of disturbance.

String Type	Hole Size	Casing Size	Setting Depth	Sacks	Type of cmt	Lead Yield ft3/sk	Water gal/sk	TOC ft	Sacks	Type of cmt	Tail Yield ft3/sk	Water gal/sk	TOC	Excess
Surf	17.5	13.375	1900	1016	85:15 Compass Poz, 12.8 ppg Class C, 5%Gel, 3#/sk Kol Seal, 4.64#/sk Salt	2.05	11.12	0	441	Tail, 14.8 ppg, 100% Class C, 1%CaCl2, 0.1%	1.34	6.35	1500	100%
Int St 1	12.25	9.625	9080	1075	Lead, 11.3 ppg, HSLD 82 10% Gel, 4%STE, 2#/sk, Gyp Seal	2.74	16.31	4000	203	Econolite Tail, 14.8 ppg, 100% Class C, 0.08% C-51	1.33	6.33	8680	100%
Int St 2	12.25	9.625	4000	732	Lead, 11.3 ppg, HSLD 82 10% Gel, 4%STE, 2#/sk, Gyp Seal	2.74	16.31	0						100%
Pilot Hole Plug 1	8.75	NA	11907	375	100% Class H Premium, .08% C-51 Susp	1.18	5.23	10907						5%



					Agent, .1% Citric Acid					
Pilot Hole Plug 2	8.75	NA	10907	375	100% Class H Premium, .06% C-51 Susp Agent, .1% Citric Acid	1.18	5.23	9907		5%
Kickoff Plug 2	8.75	NA	9907	245	100% Class H Premium, .6 % C-37 Disp/FR, .3% C-23 HT Retarder	.89	3.02	9407		5%
Prod	8.75	7	0-9700	86	HSLD 9420, 10.5 ppg, Class C, 1#/sk Salt, 4% STE 1% C-45	3.99	25.51	8080		100%
Prod	8.75	5.5	9700-20450						HSLD 80, 13.ppg , 32#/sk Salt, 4% STE, 1#/sk Gyp Seal	
						2683			1.52 7.59 9700	50%

5. Minimum Specifications for Pressure Control:

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5,000-psi WP). Both units will be hydraulically operated, and the ram-type will be equipped with blind rams on bottom and 4 ½" x 7" variable pipe rams on top. All BOPE will be tested in accordance with Onshore Oil & Gas order No. 2.

Before drilling out of the surface casing, the ram-type BOP and accessory equipment will be tested to 5,000/250 psig and the annular preventer to 5,000/250 psig. The surface casing will be tested to 1500 psi for 30 minutes.

Before drilling out of the intermediate casing, the ram-type BOP and accessory equipment will be tested to 10,000/250 psig and the annular preventer to 5,000/250 psig.

Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.

6. Types and characteristics of the proposed mud system:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal. The applicable depths and properties of the drilling fluid systems are as follows.

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,900'	Fresh - Gel	8.6-8.8	28-34	N/c
1,900' – 9,080'	Brine	8.8-10.2	28-34	N/c
9,080' – 20,450'	Oil Base	9.0-11.0	58-68	3 - 6
Lateral				



The highest mud weight needed to balance formation is expected to be 10-12 ppg. In order to maintain hole stability, mud weights up to 13.5 ppg may be utilized.

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

7. Auxiliary well control and monitoring equipment:

(A) A kelly cock will be kept in the drill string at all times.

(B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.

(C) H₂S monitoring and detection equipment will be utilized from surface casing point to TD.

(D) A wear bushing will be installed in the wellhead prior to drilling out of the surface casing.

8. Logging, testing and coring program:

GR—CCL—CNL Will be run in cased hole during completions phase of operations.

Open-hole logs are not planned for this well.

9. Abnormal conditions, pressures, temperatures and potential hazards:

The estimated bottom-hole temperature at 10,277' TVD (deepest point of the well) is 168F with an estimated maximum bottom-hole pressure (BHP) at the same point of 8,332 psig (based on 13.5 ppg MW). Hydrogen Sulfide may be present in the area. All necessary precautions will be taken before drilling operations commence. See Hydrogen Sulfide Plan below:

10. Hydrogen Sulfide Plan:

- A. All personnel shall receive proper awareness H₂S training.
- B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment
 - a. Well Control Equipment
 - i. Flare line 150' from wellhead to be ignited by auto ignition sparking system.
 - ii. Choke manifold with a remotely operated hydraulic choke.
 - iii. Mud/gas separator
 - b. Protective equipment for essential personnel
 - i. Breathing Apparatus
 - 1. Rescue packs (SCBA) – 1 unit shall be placed at each briefing area, 2 shall be stored in a safety trailer on site.
 - 2. Work/Escapes packs – 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity
 - 3. Emergency Escape Packs – 4 packs shall be stored in the doghouse for emergency evacuation.
 - ii. Auxiliary Rescue Equipment
 - 1. Stretcher
 - 2. Two OSHA full body harnesses
 - 3. 100 feet of 5/8 inches OSHA approved rope
 - 4. 1-20# class ABC fire extinguisher
 - c. H₂S Detection and Monitoring Equipment



- i. A stationary detector with three sensors will be placed in the doghouse if equipped, set to visually alarm at 10 ppm and audible at 14 ppm. The detector will be calibrated a minimum of every 30 days or as needed. The sensors will be placed in the following places:
 - 1. Rig Floor
 - 2. Below Rig Floor / Near BOPs
 - 3. End of flow line or where well bore fluid is being discharged (near shakers)
 - ii. If H2S is encountered, measured values and formations will be provided to the BLM.
- d. Visual Warning Systems
 - i. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
 - ii. A colored condition flag will be on display, reflecting the current condition at the site at the time.
 - iii. Two windsocks will be placed in strategic locations, visible from all angles.
- e. Mud Program
 - i. The Mud program will be designed to minimize the volume of H2S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H2S bearing zones.
- f. Metallurgy
 - i. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service at the anticipated operating pressures to prevent sour sulfide stress cracking.
- g. Communication
 - i. Communication will be via cell phones and walkie talkies on location.

Based on concentrations of offset wells, proximity to main roads, and distance to populated areas, the radius of exposure created by a potential release was determined to be minimal and low enough to not necessitate an H2S contingency plan. This will be reevaluated during wellbore construction if H2S is observed and after the well is on production.

11. Anticipated starting date and duration of operations:

The drilling operations on the well should be finished in approximately one month. However, in order to minimize disturbance in the area and to improve efficiency Franklin Mountain is planning to drill all the wells on the pad prior to commence completion operations. To even further reduce the time heavy machinery is used the "batch drilling" method may be used. A batch drilling sequence sundry will be submitted for State approval prior to spud. A drilling rig with walking/skidding capabilities will be used.

12. Disposal/environmental concerns:

- (A) Drilled cuttings will be hauled to and disposed of in a state-certified disposal site.
- (B) Non-hazardous waste mud/cement from the drilling process will also be hauled to and disposed of in a state-certified disposal site.
- (C) Garbage will be hauled to the Pecos City Landfill.
- (D) Sewage (grey water) will be hauled to the Carlsbad City Landfill

**13. Wellhead:**

A multi-bowl wellhead system will be utilized.

After running the 13 3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum working pressure of 10,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 5,000 psi pressure test. This pressure test will be repeated at least every 21 days.

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 5,000 psi.

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing string. After installation of the first intermediate string the pack-off and lower flanges will be pressure tested to 5000 psi.

Both the surface and intermediate casing strings will be tested as per NMOCD Rules to the one-third of manufacture's rated yield pressure, no less than 600 psi, but not greater than 1,500 psi.

14. Additional variance requests

A. Casing.

- h. Variance is requested to wave/reduce the centralizer requirements for the 7" and 5 1/2" production casing due to the tight clearance with 8 3/4" hole.

Project: Lea County, NM (NAD83)
Site: Sec 3-T19S-R35E (Eagle/Norte State)
Well: Norte State Com 702H
Wellbore: OH
Design: Plan #1
Rig:



Azimuths to Grid North
True North: -0.48°
Magnetic North: 5.74°

Magnetic Field
Strength: 47647.8nT
Dip Angle: 60.52°
Date: 2/17/2023
Model: HDGM2023

Total Magnetic Correction: 5.74°

PROJECT DETAILS: Lea County, NM (NAD83)

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone

Reference Datum: GE 3855' + KB 30' @ 3885.00usft

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
30.00	30.00	Cenozoic Alluvium (surface)
1809.00	1809.00	Rustler
2044.00	2044.00	Salado
2962.00	2968.17	Base Salt
3362.00	3372.88	Yates
3810.00	3826.15	Seven Rivers
4570.00	4595.09	Queen
6007.00	6044.34	Cherry Canyon
7463.00	7500.34	Bone Spring Lime
9033.00	9070.34	First Bone Spring Sand
9298.00	9335.34	Second Bone Spring Carbonates
9462.00	9499.34	Second Bone Spring Sand
9891.00	9932.31	Third Bone Spring Carbonates
9970.00	10019.03	Third Bone Spring Sand
10127.00	10221.17	Wolfcamp
10269.00	10633.38	Wolfcamp B

SHL

RKB Elevation: GE 3855' + KB 30' @ 3885.00usft

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
0.00	0.00	617975.56	813904.25	32.6957279	-103.4473110	

SECTION DETAILS




MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.0000	0.00	
2000.00	0.00	0.00	2000.00	0.00	0.00	0.00	0.0000	0.00	
2266.67	4.00	359.52	2266.45	9.30	-0.08	1.50	359.5213	9.30	
2666.44	8.75	323.36	2663.78	47.67	-18.35	1.50	-59.1908	47.85	
5454.29	8.75	323.36	5419.22	387.78	-271.35	0.00	0.0000	390.46	
6037.34	0.00	359.52	6000.00	423.41	-297.85	1.50	180.0000	426.36	
11907.34	0.00	359.52	11870.00	423.41	-297.85	0.00	0.0000	426.36	Pilot TD (Norte State Com 702H)

SECTION DETAILS



MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Target
9733.38	0.00	0.00	9696.04	423.41	-297.85	0.00	0.0000	426.36	
10633.38	90.00	359.43	10269.00	996.34	-303.50	10.00	359.4348	999.31	
20450.51	90.00	359.43	10269.00	10813.00	-400.34	0.00	0.0000	10816.45	PBHL (Norte State Com 702H)

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
KOP (Norte State Com 702H)	9696.04	423.42	-297.85	618398.98	813606.40	32.6968985	-103.4482677
FTP (Norte State Com 702H)	10155.02	653.41	-300.12	618628.97	813604.13	32.6975306	-103.4482688
LTP (Norte State Com 702H)	10269.00	10632.98	-398.56	628608.54	813505.69	32.7249604	-103.4483180
PBHL (Norte State Com 702H)	10269.00	10813.00	-400.34	628788.56	813503.91	32.7254552	-103.4483189

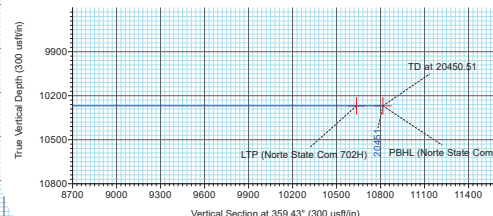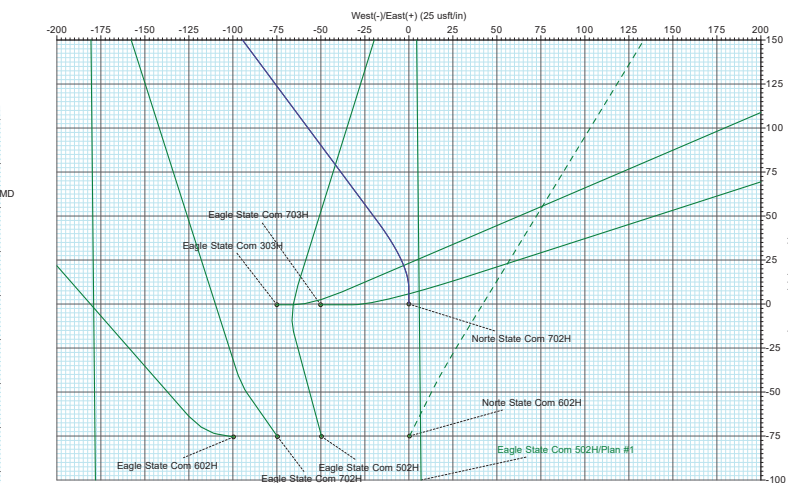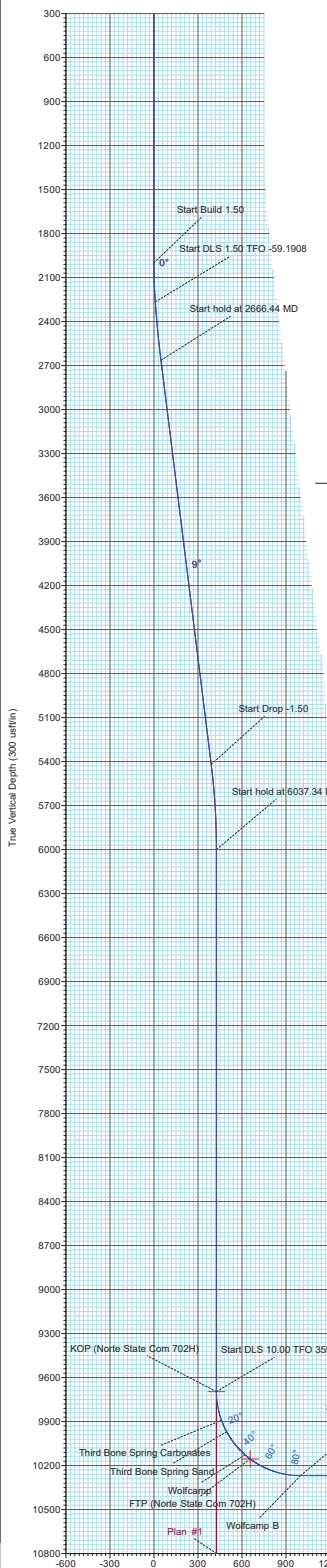

Sec 3-T19S-R35E (Eagle/Norte State) Norte State Com 702H Plan #1 (Norte State Com 702H) Created By: RCM Date: 10-08, February 21, 2023

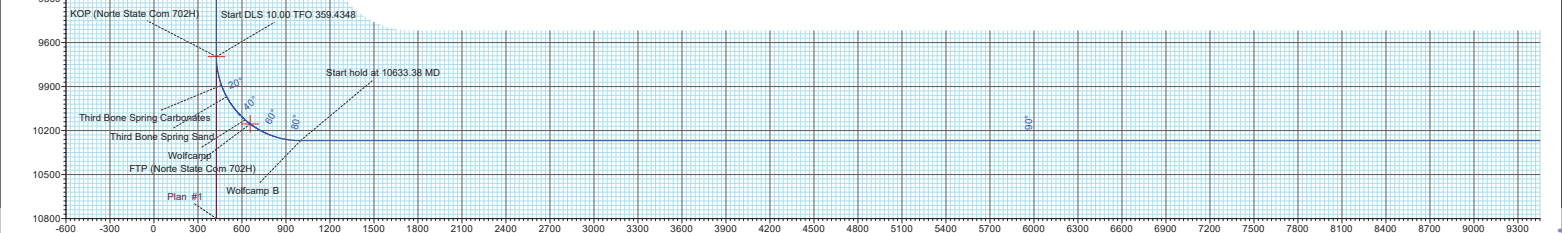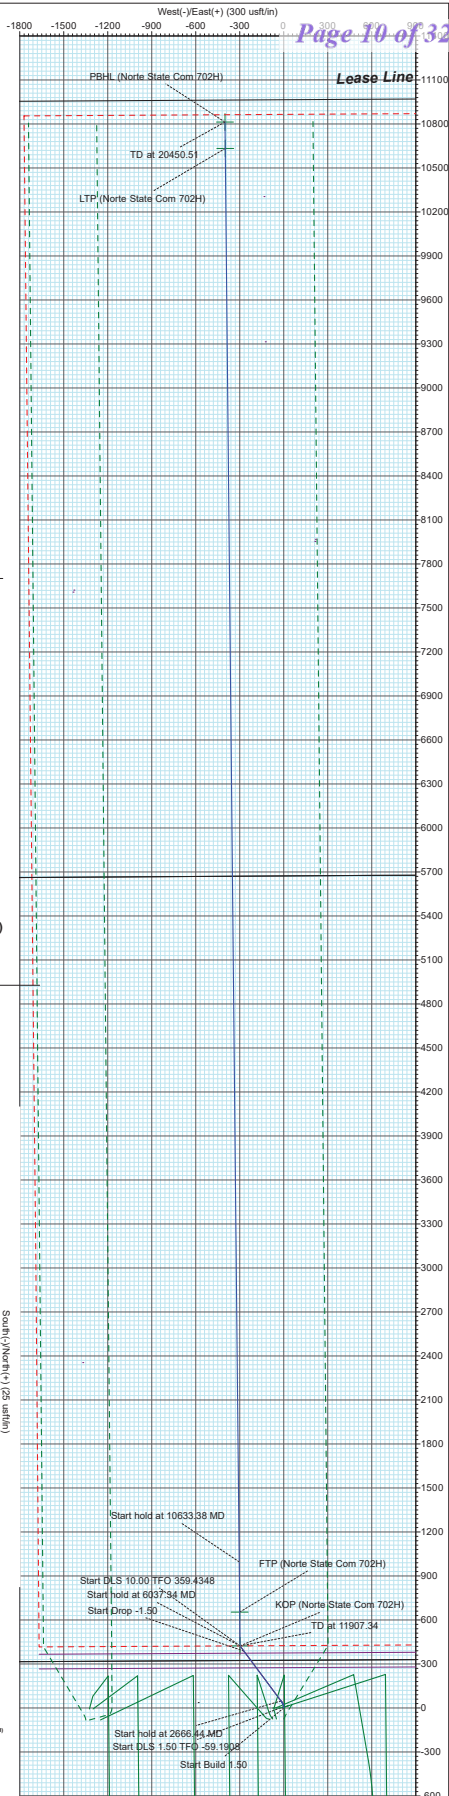

Franklin Mountain Energy

Lea County, NM (NAD83)

Sec 3-T19S-R35E (Eagle/Norte State)

Norte State Com 702H

Pilot

Plan: Plan #1

Standard Planning Report - Geographic

21 February, 2023



Total Directional

Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Pilot		
Design:	Plan #1		

Project	Lea County, NM (NAD83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Sec 3-T19S-R35E (Eagle/Norte State)			
Site Position:		Northing:	617,968.58 usft	Latitude:	32.6957397
From:	Map	Easting:	812,554.48 usft	Longitude:	-103.4516984
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "		

Well	Norte State Com 702H					
Well Position	+N/-S	0.00 usft	Northing:	617,975.56 usft	Latitude:	32.6957280
	+E/-W	0.00 usft	Easting:	813,904.25 usft	Longitude:	-103.4473110
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,855.00 usft
Grid Convergence:	0.4787 °					

Wellbore	Pilot				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM2023	2/17/2023	6.2167	60.5167	47,647.80000000

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	359.43

Plan Survey Tool Program	Date	2/20/2023		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	11,907.34 Plan #1 (Pilot)	MWD+HDGM	
			OWSG MWD + HDGM	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.0000	
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.0000	
2,266.67	4.00	359.52	2,266.45	9.30	-0.08	1.50	1.50	0.00	359.5213	
2,666.44	8.75	323.36	2,663.78	47.67	-18.35	1.50	1.19	-9.05	-59.1908	
5,454.29	8.75	323.36	5,419.22	387.78	-271.35	0.00	0.00	0.00	0.0000	
6,037.34	0.00	359.52	6,000.00	423.42	-297.85	1.50	-1.50	0.00	180.0000	
11,907.34	0.00	359.52	11,870.00	423.42	-297.85	0.00	0.00	0.00	0.0000	Pilot TD (Norte Stat

Total Directional

Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Pilot		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
0.00	0.00	0.00	0.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
30.00	0.00	0.00	30.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
Cenozoic Alluvium (surface)										
100.00	0.00	0.00	100.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
200.00	0.00	0.00	200.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
300.00	0.00	0.00	300.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
400.00	0.00	0.00	400.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
500.00	0.00	0.00	500.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
600.00	0.00	0.00	600.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
700.00	0.00	0.00	700.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
800.00	0.00	0.00	800.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
900.00	0.00	0.00	900.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,000.00	0.00	0.00	1,000.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,100.00	0.00	0.00	1,100.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,200.00	0.00	0.00	1,200.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,300.00	0.00	0.00	1,300.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,400.00	0.00	0.00	1,400.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,500.00	0.00	0.00	1,500.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,600.00	0.00	0.00	1,600.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,700.00	0.00	0.00	1,700.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,800.00	0.00	0.00	1,800.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,809.00	0.00	0.00	1,809.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
Rustler										
1,900.00	0.00	0.00	1,900.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
2,000.00	0.00	0.00	2,000.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
2,044.00	0.66	359.52	2,044.00	0.25	0.00	617,975.82	813,904.25	32.6957287	-103.4473110	
Salado										
2,100.00	1.50	359.52	2,099.99	1.31	-0.01	617,976.87	813,904.24	32.6957316	-103.4473110	
2,200.00	3.00	359.52	2,199.91	5.23	-0.04	617,980.80	813,904.20	32.6957423	-103.4473110	
2,266.67	4.00	359.52	2,266.45	9.30	-0.08	617,984.87	813,904.17	32.6957535	-103.4473110	
2,300.00	4.28	353.75	2,299.70	11.70	-0.22	617,987.27	813,904.03	32.6957601	-103.4473114	
2,400.00	5.31	340.62	2,399.35	19.78	-2.16	617,995.34	813,902.08	32.6957824	-103.4473175	
2,500.00	6.53	332.04	2,498.82	29.16	-6.36	618,004.72	813,897.89	32.6958082	-103.4473309	
2,600.00	7.84	326.24	2,598.03	39.85	-12.82	618,015.41	813,891.43	32.6958378	-103.4473516	
2,666.44	8.75	323.36	2,663.78	47.67	-18.35	618,023.23	813,885.90	32.6958594	-103.4473694	
2,700.00	8.75	323.36	2,696.95	51.76	-21.40	618,027.33	813,882.85	32.6958707	-103.4473792	
2,800.00	8.75	323.36	2,795.78	63.96	-30.47	618,039.53	813,873.78	32.6959044	-103.4474083	
2,900.00	8.75	323.36	2,894.62	76.16	-39.55	618,051.73	813,864.70	32.6959382	-103.4474375	
2,968.17	8.75	323.36	2,962.00	84.48	-45.73	618,060.04	813,858.52	32.6959612	-103.4474574	
Base Salt										
3,000.00	8.75	323.36	2,993.46	88.36	-48.62	618,063.93	813,855.63	32.6959719	-103.4474666	
3,100.00	8.75	323.36	3,092.29	100.56	-57.70	618,076.13	813,846.55	32.6960057	-103.4474958	
3,200.00	8.75	323.36	3,191.13	112.76	-66.77	618,088.33	813,837.48	32.6960394	-103.4475250	
3,300.00	8.75	323.36	3,289.97	124.96	-75.85	618,100.52	813,828.40	32.6960731	-103.4475541	
3,372.88	8.75	323.36	3,362.00	133.85	-82.46	618,109.42	813,821.79	32.6960977	-103.4475754	
Yates										
3,400.00	8.75	323.36	3,388.81	137.16	-84.92	618,112.72	813,819.33	32.6961069	-103.4475833	
3,500.00	8.75	323.36	3,487.64	149.36	-94.00	618,124.92	813,810.25	32.6961406	-103.4476125	
3,600.00	8.75	323.36	3,586.48	161.56	-103.07	618,137.12	813,801.18	32.6961743	-103.4476416	
3,700.00	8.75	323.36	3,685.32	173.76	-112.15	618,149.32	813,792.10	32.6962081	-103.4476708	
3,800.00	8.75	323.36	3,784.16	185.96	-121.22	618,161.52	813,783.03	32.6962418	-103.4477000	
3,826.15	8.75	323.36	3,810.00	189.15	-123.59	618,164.71	813,780.66	32.6962506	-103.4477076	
Seven Rivers										
3,900.00	8.75	323.36	3,882.99	198.16	-130.30	618,173.72	813,773.95	32.6962756	-103.4477291	

Total Directional

Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Pilot		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
4,000.00	8.75	323.36	3,981.83	210.36	-139.37	618,185.92	813,764.88	32.6963093	-103.4477583	
4,100.00	8.75	323.36	4,080.67	222.56	-148.44	618,198.12	813,755.80	32.6963430	-103.4477875	
4,200.00	8.75	323.36	4,179.50	234.76	-157.52	618,210.32	813,746.73	32.6963768	-103.4478166	
4,300.00	8.75	323.36	4,278.34	246.96	-166.59	618,222.52	813,737.65	32.6964105	-103.4478458	
4,400.00	8.75	323.36	4,377.18	259.16	-175.67	618,234.72	813,728.58	32.6964443	-103.4478750	
4,500.00	8.75	323.36	4,476.02	271.36	-184.74	618,246.92	813,719.50	32.6964780	-103.4479041	
4,595.09	8.75	323.36	4,570.00	282.96	-193.37	618,258.52	813,710.87	32.6965101	-103.4479319	
Queen										
4,600.00	8.75	323.36	4,574.85	283.56	-193.82	618,259.12	813,710.43	32.6965117	-103.4479333	
4,700.00	8.75	323.36	4,673.69	295.76	-202.89	618,271.32	813,701.35	32.6965455	-103.4479625	
4,800.00	8.75	323.36	4,772.53	307.96	-211.97	618,283.52	813,692.28	32.6965792	-103.4479916	
4,900.00	8.75	323.36	4,871.37	320.16	-221.04	618,295.72	813,683.20	32.6966129	-103.4480208	
5,000.00	8.75	323.36	4,970.20	332.36	-230.12	618,307.92	813,674.13	32.6966467	-103.4480500	
5,100.00	8.75	323.36	5,069.04	344.56	-239.19	618,320.12	813,665.05	32.6966804	-103.4480791	
5,200.00	8.75	323.36	5,167.88	356.76	-248.27	618,332.32	813,655.98	32.6967142	-103.4481083	
5,300.00	8.75	323.36	5,266.71	368.96	-257.34	618,344.52	813,646.90	32.6967479	-103.4481375	
5,400.00	8.75	323.36	5,365.55	381.16	-266.42	618,356.72	813,637.83	32.6967816	-103.4481666	
5,454.29	8.75	323.36	5,419.22	387.78	-271.35	618,363.34	813,632.90	32.6967999	-103.4481825	
5,500.00	8.06	323.36	5,464.43	393.14	-275.33	618,368.70	813,628.92	32.6968148	-103.4481953	
5,600.00	6.56	323.36	5,563.61	403.35	-282.93	618,378.91	813,621.32	32.6968430	-103.4482197	
5,700.00	5.06	323.36	5,663.10	411.47	-288.97	618,387.03	813,615.28	32.6968655	-103.4482391	
5,800.00	3.56	323.36	5,762.81	417.50	-293.45	618,393.06	813,610.79	32.6968821	-103.4482535	
5,900.00	2.06	323.36	5,862.69	421.43	-296.38	618,397.00	813,607.87	32.6968930	-103.4482629	
6,000.00	0.56	323.36	5,962.66	423.27	-297.74	618,398.83	813,606.50	32.6968981	-103.4482673	
6,037.34	0.00	359.52	6,000.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,044.34	0.00	0.00	6,007.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Cherry Canyon										
6,100.00	0.00	0.00	6,062.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,200.00	0.00	0.00	6,162.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,300.00	0.00	0.00	6,262.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,400.00	0.00	0.00	6,362.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,500.00	0.00	0.00	6,462.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,600.00	0.00	0.00	6,562.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,700.00	0.00	0.00	6,662.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,800.00	0.00	0.00	6,762.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,900.00	0.00	0.00	6,862.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,000.00	0.00	0.00	6,962.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,100.00	0.00	0.00	7,062.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,200.00	0.00	0.00	7,162.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,300.00	0.00	0.00	7,262.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,400.00	0.00	0.00	7,362.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,500.00	0.00	0.00	7,462.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,500.34	0.00	0.00	7,463.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Bone Spring Lime										
7,600.00	0.00	0.00	7,562.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,700.00	0.00	0.00	7,662.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,800.00	0.00	0.00	7,762.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,900.00	0.00	0.00	7,862.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,000.00	0.00	0.00	7,962.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,100.00	0.00	0.00	8,062.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,200.00	0.00	0.00	8,162.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,300.00	0.00	0.00	8,262.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,400.00	0.00	0.00	8,362.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,500.00	0.00	0.00	8,462.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	

Total Directional Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Pilot		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
8,600.00	0.00	0.00	8,562.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,700.00	0.00	0.00	8,662.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,800.00	0.00	0.00	8,762.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,900.00	0.00	0.00	8,862.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,000.00	0.00	0.00	8,962.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,070.34	0.00	0.00	9,033.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
First Bone Spring Sand										
9,100.00	0.00	0.00	9,062.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,200.00	0.00	0.00	9,162.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,300.00	0.00	0.00	9,262.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,335.34	0.00	0.00	9,298.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Second Bone Spring Carbonates										
9,400.00	0.00	0.00	9,362.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,499.34	0.00	0.00	9,462.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Second Bone Spring Sand										
9,500.00	0.00	0.00	9,462.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,600.00	0.00	0.00	9,562.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,700.00	0.00	0.00	9,662.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,800.00	0.00	0.00	9,762.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,900.00	0.00	0.00	9,862.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,928.34	0.00	0.00	9,891.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Third Bone Spring Carbonates										
10,000.00	0.00	0.00	9,962.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
10,007.34	0.00	0.00	9,970.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Third Bone Spring Sand										
10,100.00	0.00	0.00	10,062.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
10,164.34	0.00	0.00	10,127.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Wolfcamp										
10,200.00	0.00	0.00	10,162.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
10,300.00	0.00	0.00	10,262.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
10,306.34	0.00	0.00	10,269.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Wolfcamp B										
10,400.00	0.00	0.00	10,362.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
10,500.00	0.00	0.00	10,462.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
10,600.00	0.00	0.00	10,562.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
10,700.00	0.00	0.00	10,662.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
10,748.34	0.00	0.00	10,711.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Strawn										
10,800.00	0.00	0.00	10,762.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
10,900.00	0.00	0.00	10,862.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
11,000.00	0.00	0.00	10,962.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
11,020.34	0.00	0.00	10,983.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Mississippi Lime										
11,100.00	0.00	0.00	11,062.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
11,200.00	0.00	0.00	11,162.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
11,300.00	0.00	0.00	11,262.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
11,400.00	0.00	0.00	11,362.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
11,500.00	0.00	0.00	11,462.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
11,600.00	0.00	0.00	11,562.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
11,663.34	0.00	0.00	11,626.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Woodford Shale										
11,700.00	0.00	0.00	11,662.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
11,800.00	0.00	0.00	11,762.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	

Total Directional Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Pilot		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
11,807.34	0.00	0.00	11,770.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Devonian										
11,907.34	0.00	359.52	11,870.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
Pilot TD (Norte State Com 702H)										

Design Targets										
Target Name										
- hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
Pilot TD (Norte State Com 702H)	0.00	359.52	11,870.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
- plan hits target center										
- Point										

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
30.00	30.00	Cenozoic Alluvium (surface)		0.0000	359.43	
1,809.00	1,809.00	Rustler		0.0000	359.43	
2,044.00	2,044.00	Salado		0.0000	359.43	
2,968.17	2,962.00	Base Salt		0.0000	359.43	
3,372.88	3,362.00	Yates		0.0000	359.43	
3,826.15	3,810.00	Seven Rivers		0.0000	359.43	
4,595.09	4,570.00	Queen		0.0000	359.43	
6,044.34	6,007.00	Cherry Canyon		0.0000	359.43	
7,500.34	7,463.00	Bone Spring Lime		0.0000	359.43	
9,070.34	9,033.00	First Bone Spring Sand		0.0000	359.43	
9,335.34	9,298.00	Second Bone Spring Carbonates		0.0000	359.43	
9,499.34	9,462.00	Second Bone Spring Sand		0.0000	359.43	
9,928.34	9,891.00	Third Bone Spring Carbonates		0.0000	359.43	
10,007.34	9,970.00	Third Bone Spring Sand		0.0000	359.43	
10,164.34	10,127.00	Wolfcamp		0.0000	359.43	
10,306.34	10,269.00	Wolfcamp B		0.0000	359.43	
10,748.34	10,711.00	Strawn		0.0000	359.43	
11,020.34	10,983.00	Mississippi Lime		0.0000	359.43	
11,663.34	11,626.00	Woodford Shale		0.0000	359.43	
11,807.34	11,770.00	Devonian		0.0000	359.43	

Franklin Mountain Energy

Lea County, NM (NAD83)

Sec 3-T19S-R35E (Eagle/Norte State)

Norte State Com 702H

OH

Plan: Plan #1

Standard Planning Report - Geographic

21 February, 2023



Total Directional

Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Project	Lea County, NM (NAD83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site						Sec 3-T19S-R35E (Eagle/Norte State)											
Site Position:						Northing:			617,968.58 usft			Latitude:			32.6957397		
From:			Map			Easting:			812,554.48 usft			Longitude:			-103.4516984		
Position Uncertainty:			0.00 usft			Slot Radius:			13-3/16 "								

Well	Norte State Com 702H					
Well Position	+N/-S	0.00 usft	Northing:	617,975.56 usft	Latitude:	32.6957280
	+E/-W	0.00 usft	Easting:	813,904.25 usft	Longitude:	-103.4473110
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,855.00 usft
Grid Convergence:	0.4787 °					

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM2023	2/17/2023	6.2167	60.5167	47,647.80000000

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	9,733.38
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	359.43

Plan Survey Tool Program	Date	2/21/2023			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	9,733.38	20,450.51 Plan #1 (OH)	MWD+HDGM		
			OWSG MWD + HDGM		

Plan Sections											
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target	
9,733.38	0.00	0.00	9,696.04	423.42	-297.85	0.00	0.00	0.00	0.0000		
10,633.38	90.00	359.43	10,269.00	996.34	-303.50	10.00	10.00	-0.06	359.4348		
20,450.51	90.00	359.43	10,269.00	10,813.00	-400.34	0.00	0.00	0.00	0.0000	PBHL (Norte State	

Total Directional Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
0.00	0.00	0.00	0.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
100.00	0.00	0.00	100.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
200.00	0.00	0.00	200.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
300.00	0.00	0.00	300.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
400.00	0.00	0.00	400.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
500.00	0.00	0.00	500.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
600.00	0.00	0.00	600.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
700.00	0.00	0.00	700.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
800.00	0.00	0.00	800.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
900.00	0.00	0.00	900.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,000.00	0.00	0.00	1,000.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,100.00	0.00	0.00	1,100.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,200.00	0.00	0.00	1,200.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,300.00	0.00	0.00	1,300.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,400.00	0.00	0.00	1,400.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,500.00	0.00	0.00	1,500.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,600.00	0.00	0.00	1,600.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,700.00	0.00	0.00	1,700.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,800.00	0.00	0.00	1,800.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
1,900.00	0.00	0.00	1,900.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
2,000.00	0.00	0.00	2,000.00	0.00	0.00	617,975.56	813,904.25	32.6957280	-103.4473110	
2,100.00	1.50	359.52	2,099.99	1.31	-0.01	617,976.87	813,904.24	32.6957316	-103.4473110	
2,200.00	3.00	359.52	2,199.91	5.23	-0.04	617,980.80	813,904.20	32.6957423	-103.4473110	
2,266.67	4.00	359.52	2,266.45	9.30	-0.08	617,984.87	813,904.17	32.6957535	-103.4473110	
2,300.00	4.28	353.75	2,299.70	11.70	-0.22	617,987.27	813,904.03	32.6957601	-103.4473114	
2,400.00	5.31	340.62	2,399.35	19.78	-2.16	617,995.34	813,902.08	32.6957824	-103.4473175	
2,500.00	6.53	332.04	2,498.82	29.16	-6.36	618,004.72	813,897.89	32.6958082	-103.4473309	
2,600.00	7.84	326.24	2,598.03	39.85	-12.82	618,015.41	813,891.43	32.6958378	-103.4473516	
2,666.44	8.75	323.36	2,663.78	47.67	-18.35	618,023.23	813,885.90	32.6958594	-103.4473694	
2,700.00	8.75	323.36	2,696.95	51.76	-21.40	618,027.33	813,882.85	32.6958707	-103.4473792	
2,800.00	8.75	323.36	2,795.78	63.96	-30.47	618,039.53	813,873.78	32.6959044	-103.4474083	
2,900.00	8.75	323.36	2,894.62	76.16	-39.55	618,051.73	813,864.70	32.6959382	-103.4474375	
3,000.00	8.75	323.36	2,993.46	88.36	-48.62	618,063.93	813,855.63	32.6959719	-103.4474666	
3,100.00	8.75	323.36	3,092.29	100.56	-57.70	618,076.13	813,846.55	32.6960057	-103.4474958	
3,200.00	8.75	323.36	3,191.13	112.76	-66.77	618,088.33	813,837.48	32.6960394	-103.4475250	
3,300.00	8.75	323.36	3,289.97	124.96	-75.85	618,100.52	813,828.40	32.6960731	-103.4475541	
3,400.00	8.75	323.36	3,388.81	137.16	-84.92	618,112.72	813,819.33	32.6961069	-103.4475833	
3,500.00	8.75	323.36	3,487.64	149.36	-94.00	618,124.92	813,810.25	32.6961406	-103.4476125	
3,600.00	8.75	323.36	3,586.48	161.56	-103.07	618,137.12	813,801.18	32.6961743	-103.4476416	
3,700.00	8.75	323.36	3,685.32	173.76	-112.15	618,149.32	813,792.10	32.6962081	-103.4476708	
3,800.00	8.75	323.36	3,784.16	185.96	-121.22	618,161.52	813,783.03	32.6962418	-103.4477000	
3,900.00	8.75	323.36	3,882.99	198.16	-130.30	618,173.72	813,773.95	32.6962756	-103.4477291	
4,000.00	8.75	323.36	3,981.83	210.36	-139.37	618,185.92	813,764.88	32.6963093	-103.4477583	
4,100.00	8.75	323.36	4,080.67	222.56	-148.44	618,198.12	813,755.80	32.6963430	-103.4477875	
4,200.00	8.75	323.36	4,179.50	234.76	-157.52	618,210.32	813,746.73	32.6963768	-103.4478166	
4,300.00	8.75	323.36	4,278.34	246.96	-166.59	618,222.52	813,737.65	32.6964105	-103.4478458	
4,400.00	8.75	323.36	4,377.18	259.16	-175.67	618,234.72	813,728.58	32.6964443	-103.4478750	
4,500.00	8.75	323.36	4,476.02	271.36	-184.74	618,246.92	813,719.50	32.6964780	-103.4479041	
4,600.00	8.75	323.36	4,574.85	283.56	-193.82	618,259.12	813,710.43	32.6965117	-103.4479333	
4,700.00	8.75	323.36	4,673.69	295.76	-202.89	618,271.32	813,701.35	32.6965455	-103.4479625	
4,800.00	8.75	323.36	4,772.53	307.96	-211.97	618,283.52	813,692.28	32.6965792	-103.4479916	
4,900.00	8.75	323.36	4,871.37	320.16	-221.04	618,295.72	813,683.20	32.6966129	-103.4480208	
5,000.00	8.75	323.36	4,970.20	332.36	-230.12	618,307.92	813,674.13	32.6966467	-103.4480500	
5,100.00	8.75	323.36	5,069.04	344.56	-239.19	618,320.12	813,665.05	32.6966804	-103.4480791	
5,200.00	8.75	323.36	5,167.88	356.76	-248.27	618,332.32	813,655.98	32.6967142	-103.4481083	

Total Directional

Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
5,300.00	8.75	323.36	5,266.71	368.96	-257.34	618,344.52	813,646.90	32.6967479	-103.4481375	
5,400.00	8.75	323.36	5,365.55	381.16	-266.42	618,356.72	813,637.83	32.6967816	-103.4481666	
5,454.29	8.75	323.36	5,419.22	387.78	-271.35	618,363.34	813,632.90	32.6967999	-103.4481825	
5,500.00	8.06	323.36	5,464.43	393.14	-275.33	618,368.70	813,628.92	32.6968148	-103.4481953	
5,600.00	6.56	323.36	5,563.61	403.35	-282.93	618,378.91	813,621.32	32.6968430	-103.4482197	
5,700.00	5.06	323.36	5,663.10	411.47	-288.97	618,387.03	813,615.28	32.6968655	-103.4482391	
5,800.00	3.56	323.36	5,762.81	417.50	-293.45	618,393.06	813,610.79	32.6968821	-103.4482535	
5,900.00	2.06	323.36	5,862.69	421.43	-296.38	618,397.00	813,607.87	32.6968930	-103.4482629	
6,000.00	0.56	323.36	5,962.66	423.27	-297.74	618,398.83	813,606.50	32.6968981	-103.4482673	
6,037.34	0.00	359.52	6,000.00	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,100.00	0.00	0.00	6,062.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,200.00	0.00	0.00	6,162.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,300.00	0.00	0.00	6,262.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,400.00	0.00	0.00	6,362.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,500.00	0.00	0.00	6,462.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,600.00	0.00	0.00	6,562.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,700.00	0.00	0.00	6,662.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,800.00	0.00	0.00	6,762.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
6,900.00	0.00	0.00	6,862.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,000.00	0.00	0.00	6,962.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,100.00	0.00	0.00	7,062.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,200.00	0.00	0.00	7,162.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,300.00	0.00	0.00	7,262.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,400.00	0.00	0.00	7,362.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,500.00	0.00	0.00	7,462.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,600.00	0.00	0.00	7,562.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,700.00	0.00	0.00	7,662.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,800.00	0.00	0.00	7,762.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
7,900.00	0.00	0.00	7,862.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,000.00	0.00	0.00	7,962.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,100.00	0.00	0.00	8,062.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,200.00	0.00	0.00	8,162.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,300.00	0.00	0.00	8,262.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,400.00	0.00	0.00	8,362.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,500.00	0.00	0.00	8,462.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,600.00	0.00	0.00	8,562.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,700.00	0.00	0.00	8,662.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,800.00	0.00	0.00	8,762.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
8,900.00	0.00	0.00	8,862.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,000.00	0.00	0.00	8,962.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,100.00	0.00	0.00	9,062.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,200.00	0.00	0.00	9,162.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,300.00	0.00	0.00	9,262.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,400.00	0.00	0.00	9,362.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,500.00	0.00	0.00	9,462.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,600.00	0.00	0.00	9,562.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,700.00	0.00	0.00	9,662.66	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
9,733.38	0.00	0.00	9,696.04	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676	
KOP (Norte State Com 702H)										
9,750.00	1.66	359.43	9,712.66	423.66	-297.86	618,399.22	813,606.39	32.6968992	-103.4482676	
9,800.00	6.66	359.43	9,762.51	427.28	-297.89	618,402.85	813,606.36	32.6969091	-103.4482677	
9,850.00	11.66	359.43	9,811.86	435.24	-297.97	618,410.81	813,606.28	32.6969310	-103.4482677	
9,900.00	16.66	359.43	9,860.32	447.47	-298.09	618,423.03	813,606.16	32.6969646	-103.4482678	

Total Directional Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
9,932.31	19.89	359.43	9,891.00	457.60	-298.19	618,433.17	813,606.06	32.6969925	-103.4482678	
Third Bone Spring Carbonates										
9,950.00	21.66	359.43	9,907.54	463.88	-298.25	618,439.44	813,606.00	32.6970097	-103.4482678	
10,000.00	26.66	359.43	9,953.14	484.34	-298.45	618,459.90	813,605.79	32.6970659	-103.4482679	
10,019.03	28.56	359.43	9,970.00	493.15	-298.54	618,468.72	813,605.71	32.6970902	-103.4482680	
Third Bone Spring Sand										
10,050.00	31.66	359.43	9,996.79	508.69	-298.69	618,484.25	813,605.55	32.6971329	-103.4482681	
10,100.00	36.66	359.43	10,038.15	536.76	-298.97	618,512.32	813,605.28	32.6972100	-103.4482682	
10,150.00	41.66	359.43	10,076.90	568.32	-299.28	618,543.88	813,604.97	32.6972968	-103.4482684	
10,200.00	46.66	359.43	10,112.76	603.14	-299.63	618,578.71	813,604.62	32.6973925	-103.4482685	
10,221.17	48.78	359.43	10,127.00	618.80	-299.78	618,594.36	813,604.47	32.6974355	-103.4482686	
Wolfcamp										
10,250.00	51.66	359.43	10,145.45	640.96	-300.00	618,616.52	813,604.25	32.6974964	-103.4482687	
10,265.70	53.23	359.43	10,155.02	653.41	-300.12	618,628.97	813,604.13	32.6975306	-103.4482688	
FTP (Norte State Com 702H)										
10,300.00	56.66	359.43	10,174.71	681.48	-300.40	618,657.04	813,603.85	32.6976078	-103.4482689	
10,350.00	61.66	359.43	10,200.34	724.39	-300.82	618,699.95	813,603.43	32.6977258	-103.4482691	
10,400.00	66.66	359.43	10,222.12	769.38	-301.27	618,744.94	813,602.98	32.6978494	-103.4482694	
10,450.00	71.66	359.43	10,239.90	816.09	-301.73	618,791.65	813,602.52	32.6979778	-103.4482696	
10,500.00	76.66	359.43	10,253.54	864.17	-302.20	618,839.74	813,602.05	32.6981100	-103.4482698	
10,550.00	81.66	359.43	10,262.94	913.26	-302.69	618,888.83	813,601.56	32.6982449	-103.4482701	
10,600.00	86.66	359.43	10,268.03	962.99	-303.18	618,938.55	813,601.07	32.6983816	-103.4482703	
10,633.38	90.00	359.43	10,269.00	996.34	-303.50	618,971.91	813,600.74	32.6984732	-103.4482705	
Wolfcamp B										
10,700.00	90.00	359.43	10,269.00	1,062.96	-304.16	619,038.53	813,600.09	32.6986563	-103.4482708	
10,800.00	90.00	359.43	10,269.00	1,162.96	-305.15	619,138.52	813,599.10	32.6989312	-103.4482713	
10,900.00	90.00	359.43	10,269.00	1,262.95	-306.13	619,238.52	813,598.11	32.6992060	-103.4482718	
11,000.00	90.00	359.43	10,269.00	1,362.95	-307.12	619,338.51	813,597.13	32.6994809	-103.4482723	
11,100.00	90.00	359.43	10,269.00	1,462.94	-308.11	619,438.51	813,596.14	32.6997557	-103.4482728	
11,200.00	90.00	359.43	10,269.00	1,562.94	-309.09	619,538.50	813,595.15	32.7000306	-103.4482733	
11,300.00	90.00	359.43	10,269.00	1,662.93	-310.08	619,638.50	813,594.17	32.7003054	-103.4482738	
11,400.00	90.00	359.43	10,269.00	1,762.93	-311.07	619,738.49	813,593.18	32.7005803	-103.4482743	
11,500.00	90.00	359.43	10,269.00	1,862.92	-312.05	619,838.49	813,592.20	32.7008551	-103.4482748	
11,600.00	90.00	359.43	10,269.00	1,962.92	-313.04	619,938.48	813,591.21	32.7011300	-103.4482752	
11,700.00	90.00	359.43	10,269.00	2,062.91	-314.03	620,038.48	813,590.22	32.7014048	-103.4482757	
11,800.00	90.00	359.43	10,269.00	2,162.91	-315.01	620,138.47	813,589.24	32.7016797	-103.4482762	
11,900.00	90.00	359.43	10,269.00	2,262.90	-316.00	620,238.47	813,588.25	32.7019545	-103.4482767	
12,000.00	90.00	359.43	10,269.00	2,362.90	-316.98	620,338.46	813,587.26	32.7022293	-103.4482772	
12,100.00	90.00	359.43	10,269.00	2,462.89	-317.97	620,438.46	813,586.28	32.7025042	-103.4482777	
12,200.00	90.00	359.43	10,269.00	2,562.89	-318.96	620,538.45	813,585.29	32.7027790	-103.4482782	
12,300.00	90.00	359.43	10,269.00	2,662.88	-319.94	620,638.45	813,584.30	32.7030539	-103.4482787	
12,400.00	90.00	359.43	10,269.00	2,762.88	-320.93	620,738.44	813,583.32	32.7033287	-103.4482792	
12,500.00	90.00	359.43	10,269.00	2,862.87	-321.92	620,838.44	813,582.33	32.7036036	-103.4482797	
12,600.00	90.00	359.43	10,269.00	2,962.87	-322.90	620,938.43	813,581.34	32.7038784	-103.4482802	
12,700.00	90.00	359.43	10,269.00	3,062.86	-323.89	621,038.43	813,580.36	32.7041533	-103.4482807	
12,800.00	90.00	359.43	10,269.00	3,162.86	-324.88	621,138.42	813,579.37	32.7044281	-103.4482812	
12,900.00	90.00	359.43	10,269.00	3,262.85	-325.86	621,238.42	813,578.39	32.7047030	-103.4482817	
13,000.00	90.00	359.43	10,269.00	3,362.85	-326.85	621,338.41	813,577.40	32.7049778	-103.4482822	
13,100.00	90.00	359.43	10,269.00	3,462.84	-327.84	621,438.41	813,576.41	32.7052527	-103.4482826	
13,200.00	90.00	359.43	10,269.00	3,562.84	-328.82	621,538.40	813,575.43	32.7055275	-103.4482831	
13,300.00	90.00	359.43	10,269.00	3,662.84	-329.81	621,638.40	813,574.44	32.7058023	-103.4482836	
13,400.00	90.00	359.43	10,269.00	3,762.83	-330.79	621,738.39	813,573.45	32.7060772	-103.4482841	
13,500.00	90.00	359.43	10,269.00	3,862.83	-331.78	621,838.39	813,572.47	32.7063520	-103.4482846	
13,600.00	90.00	359.43	10,269.00	3,962.82	-332.77	621,938.38	813,571.48	32.7066269	-103.4482851	

Total Directional

Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
13,700.00	90.00	359.43	10,269.00	4,062.82	-333.75	622,038.38	813,570.49	32.7069017	-103.4482856	
13,800.00	90.00	359.43	10,269.00	4,162.81	-334.74	622,138.37	813,569.51	32.7071766	-103.4482861	
13,900.00	90.00	359.43	10,269.00	4,262.81	-335.73	622,238.37	813,568.52	32.7074514	-103.4482866	
14,000.00	90.00	359.43	10,269.00	4,362.80	-336.71	622,338.37	813,567.54	32.7077263	-103.4482871	
14,100.00	90.00	359.43	10,269.00	4,462.80	-337.70	622,438.36	813,566.55	32.7080011	-103.4482876	
14,200.00	90.00	359.43	10,269.00	4,562.79	-338.69	622,538.36	813,565.56	32.7082760	-103.4482881	
14,300.00	90.00	359.43	10,269.00	4,662.79	-339.67	622,638.35	813,564.58	32.7085508	-103.4482886	
14,400.00	90.00	359.43	10,269.00	4,762.78	-340.66	622,738.35	813,563.59	32.7088257	-103.4482891	
14,500.00	90.00	359.43	10,269.00	4,862.78	-341.64	622,838.34	813,562.60	32.7091005	-103.4482896	
14,600.00	90.00	359.43	10,269.00	4,962.77	-342.63	622,938.34	813,561.62	32.7093753	-103.4482900	
14,700.00	90.00	359.43	10,269.00	5,062.77	-343.62	623,038.33	813,560.63	32.7096502	-103.4482905	
14,800.00	90.00	359.43	10,269.00	5,162.76	-344.60	623,138.33	813,559.64	32.7099250	-103.4482910	
14,900.00	90.00	359.43	10,269.00	5,262.76	-345.59	623,238.32	813,558.66	32.7101999	-103.4482915	
15,000.00	90.00	359.43	10,269.00	5,362.75	-346.58	623,338.32	813,557.67	32.7104747	-103.4482920	
15,100.00	90.00	359.43	10,269.00	5,462.75	-347.56	623,438.31	813,556.69	32.7107496	-103.4482925	
15,200.00	90.00	359.43	10,269.00	5,562.74	-348.55	623,538.31	813,555.70	32.7110244	-103.4482930	
15,300.00	90.00	359.43	10,269.00	5,662.74	-349.54	623,638.30	813,554.71	32.7112993	-103.4482935	
15,400.00	90.00	359.43	10,269.00	5,762.73	-350.52	623,738.30	813,553.73	32.7115741	-103.4482940	
15,500.00	90.00	359.43	10,269.00	5,862.73	-351.51	623,838.29	813,552.74	32.7118490	-103.4482945	
15,600.00	90.00	359.43	10,269.00	5,962.72	-352.49	623,938.29	813,551.75	32.7121238	-103.4482950	
15,700.00	90.00	359.43	10,269.00	6,062.72	-353.48	624,038.28	813,550.77	32.7123986	-103.4482955	
15,800.00	90.00	359.43	10,269.00	6,162.71	-354.47	624,138.28	813,549.78	32.7126735	-103.4482960	
15,900.00	90.00	359.43	10,269.00	6,262.71	-355.45	624,238.27	813,548.79	32.7129483	-103.4482965	
16,000.00	90.00	359.43	10,269.00	6,362.70	-356.44	624,338.27	813,547.81	32.7132232	-103.4482969	
16,100.00	90.00	359.43	10,269.00	6,462.70	-357.43	624,438.26	813,546.82	32.7134980	-103.4482974	
16,200.00	90.00	359.43	10,269.00	6,562.69	-358.41	624,538.26	813,545.83	32.7137729	-103.4482979	
16,300.00	90.00	359.43	10,269.00	6,662.69	-359.40	624,638.25	813,544.85	32.7140477	-103.4482984	
16,400.00	90.00	359.43	10,269.00	6,762.68	-360.39	624,738.25	813,543.86	32.7143226	-103.4482989	
16,500.00	90.00	359.43	10,269.00	6,862.68	-361.37	624,838.24	813,542.88	32.7145974	-103.4482994	
16,600.00	90.00	359.43	10,269.00	6,962.67	-362.36	624,938.24	813,541.89	32.7148723	-103.4482999	
16,700.00	90.00	359.43	10,269.00	7,062.67	-363.35	625,038.23	813,540.90	32.7151471	-103.4483004	
16,800.00	90.00	359.43	10,269.00	7,162.67	-364.33	625,138.23	813,539.92	32.7154219	-103.4483009	
16,900.00	90.00	359.43	10,269.00	7,262.66	-365.32	625,238.22	813,538.93	32.7156968	-103.4483014	
17,000.00	90.00	359.43	10,269.00	7,362.66	-366.30	625,338.22	813,537.94	32.7159716	-103.4483019	
17,100.00	90.00	359.43	10,269.00	7,462.65	-367.29	625,438.21	813,536.96	32.7162465	-103.4483024	
17,200.00	90.00	359.43	10,269.00	7,562.65	-368.28	625,538.21	813,535.97	32.7165213	-103.4483029	
17,300.00	90.00	359.43	10,269.00	7,662.64	-369.26	625,638.20	813,534.98	32.7167962	-103.4483033	
17,400.00	90.00	359.43	10,269.00	7,762.64	-370.25	625,738.20	813,534.00	32.7170710	-103.4483038	
17,500.00	90.00	359.43	10,269.00	7,862.63	-371.24	625,838.19	813,533.01	32.7173459	-103.4483043	
17,600.00	90.00	359.43	10,269.00	7,962.63	-372.22	625,938.19	813,532.03	32.7176207	-103.4483048	
17,700.00	90.00	359.43	10,269.00	8,062.62	-373.21	626,038.19	813,531.04	32.7178956	-103.4483053	
17,800.00	90.00	359.43	10,269.00	8,162.62	-374.20	626,138.18	813,530.05	32.7181704	-103.4483058	
17,900.00	90.00	359.43	10,269.00	8,262.61	-375.18	626,238.18	813,529.07	32.7184452	-103.4483063	
18,000.00	90.00	359.43	10,269.00	8,362.61	-376.17	626,338.17	813,528.08	32.7187201	-103.4483068	
18,100.00	90.00	359.43	10,269.00	8,462.60	-377.15	626,438.17	813,527.09	32.7189949	-103.4483073	
18,200.00	90.00	359.43	10,269.00	8,562.60	-378.14	626,538.16	813,526.11	32.7192698	-103.4483078	
18,300.00	90.00	359.43	10,269.00	8,662.59	-379.13	626,638.16	813,525.12	32.7195446	-103.4483083	
18,400.00	90.00	359.43	10,269.00	8,762.59	-380.11	626,738.15	813,524.13	32.7198195	-103.4483088	
18,500.00	90.00	359.43	10,269.00	8,862.58	-381.10	626,838.15	813,523.15	32.7200943	-103.4483093	
18,600.00	90.00	359.43	10,269.00	8,962.58	-382.09	626,938.14	813,522.16	32.7203692	-103.4483097	
18,700.00	90.00	359.43	10,269.00	9,062.57	-383.07	627,038.14	813,521.18	32.7206440	-103.4483102	
18,800.00	90.00	359.43	10,269.00	9,162.57	-384.06	627,138.13	813,520.19	32.7209189	-103.4483107	
18,900.00	90.00	359.43	10,269.00	9,262.56	-385.05	627,238.13	813,519.20	32.7211937	-103.4483112	
19,000.00	90.00	359.43	10,269.00	9,362.56	-386.03	627,338.12	813,518.22	32.7214685	-103.4483117	
19,100.00	90.00	359.43	10,269.00	9,462.55	-387.02	627,438.12	813,517.23	32.7217434	-103.4483122	

Total Directional

Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
19,200.00	90.00	359.43	10,269.00	9,562.55	-388.01	627,538.11	813,516.24	32.7220182	-103.4483127
19,300.00	90.00	359.43	10,269.00	9,662.54	-388.99	627,638.11	813,515.26	32.7222931	-103.4483132
19,400.00	90.00	359.43	10,269.00	9,762.54	-389.98	627,738.10	813,514.27	32.7225679	-103.4483137
19,500.00	90.00	359.43	10,269.00	9,862.53	-390.96	627,838.10	813,513.28	32.7228428	-103.4483142
19,600.00	90.00	359.43	10,269.00	9,962.53	-391.95	627,938.09	813,512.30	32.7231176	-103.4483147
19,700.00	90.00	359.43	10,269.00	10,062.52	-392.94	628,038.09	813,511.31	32.7233925	-103.4483152
19,800.00	90.00	359.43	10,269.00	10,162.52	-393.92	628,138.08	813,510.32	32.7236673	-103.4483157
19,900.00	90.00	359.43	10,269.00	10,262.51	-394.91	628,238.08	813,509.34	32.7239422	-103.4483161
20,000.00	90.00	359.43	10,269.00	10,362.51	-395.90	628,338.07	813,508.35	32.7242170	-103.4483166
20,100.00	90.00	359.43	10,269.00	10,462.50	-396.88	628,438.07	813,507.37	32.7244918	-103.4483171
20,200.00	90.00	359.43	10,269.00	10,562.50	-397.87	628,538.06	813,506.38	32.7247667	-103.4483176
20,270.48	90.00	359.43	10,269.00	10,632.98	-398.56	628,608.54	813,505.68	32.7249604	-103.4483180
LTP (Norte State Com 702H)									
20,300.00	90.00	359.43	10,269.00	10,662.49	-398.86	628,638.06	813,505.39	32.7250415	-103.4483181
20,400.00	90.00	359.43	10,269.00	10,762.49	-399.84	628,738.05	813,504.41	32.7253164	-103.4483186
20,450.51	90.00	359.43	10,269.00	10,813.00	-400.34	628,788.56	813,503.91	32.7254552	-103.4483189
PBHL (Norte State Com 702H)									

Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
KOP (Norte State Cor - plan misses target center by 0.01usft at 9733.38usft MD (9696.04 TVD, 423.41 N, -297.85 E) - Point	0.00	359.52	9,696.04	423.42	-297.85	618,398.98	813,606.40	32.6968985	-103.4482676
FTP (Norte State Cor - plan hits target center - Point	0.00	0.00	10,155.02	653.41	-300.12	618,628.97	813,604.13	32.6975306	-103.4482688
PBHL (Norte State Cc - plan hits target center - Point	0.00	359.52	10,269.00	10,813.00	-400.34	628,788.56	813,503.91	32.7254552	-103.4483189
LTP (Norte State Com - plan hits target center - Point	0.00	0.00	10,269.00	10,632.98	-398.56	628,608.54	813,505.69	32.7249604	-103.4483180

Total Directional

Planning Report - Geographic



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Norte State Com 702H
Company:	Franklin Mountain Energy	TVD Reference:	GE 3855' + KB 30' @ 3885.00usft
Project:	Lea County, NM (NAD83)	MD Reference:	GE 3855' + KB 30' @ 3885.00usft
Site:	Sec 3-T19S-R35E (Eagle/Norte State)	North Reference:	Grid
Well:	Norte State Com 702H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
30.00	30.00	Cenozoic Alluvium (surface)		0.0000	359.43	
1,809.00	1,809.00	Rustler		0.0000	359.43	
2,044.00	2,044.00	Salado		0.0000	359.43	
2,968.17	2,962.00	Base Salt		0.0000	359.43	
3,372.88	3,362.00	Yates		0.0000	359.43	
3,826.15	3,810.00	Seven Rivers		0.0000	359.43	
4,595.09	4,570.00	Queen		0.0000	359.43	
6,044.34	6,007.00	Cherry Canyon		0.0000	359.43	
7,500.34	7,463.00	Bone Spring Lime		0.0000	359.43	
9,070.34	9,033.00	First Bone Spring Sand		0.0000	359.43	
9,335.34	9,298.00	Second Bone Spring Carbonates		0.0000	359.43	
9,499.34	9,462.00	Second Bone Spring Sand		0.0000	359.43	
9,932.31	9,891.00	Third Bone Spring Carbonates		0.0000	359.43	
10,019.03	9,970.00	Third Bone Spring Sand		0.0000	359.43	
10,221.17	10,127.00	Wolfcamp		0.0000	359.43	
10,633.38	10,269.00	Wolfcamp B		0.0000	359.43	

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Electronically
Via E-permitting

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Franklin Mountain Energy 3, LLC **OGRID:** 331595 **Date:** 2/28/2023

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
See Attached Well List						

IV. Central Delivery Point Name: Eagle/Norte CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
See Attached Well List						

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☒ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices


1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: 
Printed Name: Rachael Overbey
Title: Director Operations Planning & Regulatory
E-mail Address: roverbey@fmelle.com
Date: 2/28/2023
Phone: 720-414-7868
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

NATURAL GAS MANAGEMENT PLAN

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API 14 Digit	ULSTR	Surface Location FTG	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Eagle State Com 301H	TBD	Lot 4, 3-19S-35E	325 FNL 645 FWL	800 +/-	700 +/-	2500 +/-
Eagle State Com 302H	TBD	Lot 4, 3-19S-35E	400 FNL 745 FWL	800 +/-	700 +/-	2500 +/-
Eagle State Com 303H	TBD	Lot 3, 3-19S-35E	325 FNL 1920 FWL	800 +/-	700 +/-	2500 +/-
Eagle State Com 501H	TBD	Lot 4, 3-19S-35E	325 FNL 670 FWL	800 +/-	700 +/-	2500 +/-
Eagle State Com 502H	TBD	Lot 3, 3-19S-35E	400 FNL 1945 FWL	800 +/-	700 +/-	2500 +/-
Eagle State Com 601H	TBD	Lot 4, 3-19S-35E	400 FNL 720 FWL	800 +/-	700 +/-	2500 +/-
Eagle State Com 602H	TBD	Lot 3, 3-19S-35E	400 FNL 1895 FWL	800 +/-	700 +/-	2500 +/-
Eagle State Com 701H	TBD	Lot 4, 3-19S-35E	325 FNL 695 FWL	800 +/-	700 +/-	2500 +/-
Eagle State Com 702H	TBD	Lot 3, 3-19S-35E	400 FNL 1920 FWL	800 +/-	700 +/-	2500 +/-
Eagle State Com 703H	TBD	Lot 3, 3-19S-35E	325 FNL 1945 FWL	800 +/-	700 +/-	2500 +/-
Norte State Com 601H	TBD	Lot 4, 3-19S-35E	400 FNL 670 FWL	800 +/-	700 +/-	2500 +/-
Norte State Com 602H	TBD	Lot 3, 3-19S-35E	400 FNL 1995 FWL	800 +/-	700 +/-	2500 +/-
Norte State Com 701H	TBD	Lot 4, 3-19S-35E	400 FNL 645 FWL	800 +/-	700 +/-	2500 +/-
Norte State Com 702H	TBD	Lot 3, 3-19S-35E	325 FNL 1995 FWL	800 +/-	700 +/-	2500 +/-

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API 14 Digit	Spud Date (Batch Drilling)	TD Reached Date	Completion Commencement Date	Initial Flowback Date	First Production Date
Eagle State Com 301H	TBD	5/1/2023	8/21/2023	9/5/2023	9/15/2023	9/17/2023
Eagle State Com 302H	TBD	5/1/2023	8/21/2023	9/5/2023	9/15/2023	9/17/2023
Eagle State Com 303H	TBD	6/1/2023	9/21/2023	10/6/2023	10/16/2023	10/18/2023
Eagle State Com 501H	TBD	5/1/2023	8/21/2023	9/5/2023	9/15/2023	9/17/2023
Eagle State Com 502H	TBD	6/1/2023	9/21/2023	10/6/2023	10/16/2023	10/18/2023
Eagle State Com 601H	TBD	5/1/2023	8/21/2023	9/5/2023	9/15/2023	9/17/2023
Eagle State Com 602H	TBD	6/1/2023	9/21/2023	10/6/2023	10/16/2023	10/18/2023
Eagle State Com 701H	TBD	5/1/2023	8/21/2023	9/5/2023	9/15/2023	9/17/2023
Eagle State Com 702H	TBD	6/1/2023	9/21/2023	10/6/2023	10/16/2023	10/18/2023
Eagle State Com 703H	TBD	6/1/2023	9/21/2023	10/6/2023	10/16/2023	10/18/2023
Norte State Com 601H	TBD	5/1/2023	8/21/2023	9/5/2023	9/15/2023	9/17/2023
Norte State Com 602H	TBD	6/1/2023	9/21/2023	10/6/2023	10/16/2023	10/18/2023
Norte State Com 701H	TBD	5/1/2023	8/21/2023	9/5/2023	9/15/2023	9/17/2023
Norte State Com 702H		6/1/2023	9/21/2023	10/6/2023	10/16/2023	10/18/2023



Natural Gas Management Plan

Items VI-VIII

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Data from surrounding wells is used to generate type curves which provides the basis for expected gas rates during initial production, peak production and then the natural decline.
- Separation equipment will be sized to provide adequate separation for peak production.
- Facility design includes multiple stages of separation to minimize gas waste. Wells flow through a 3-phase separator to remove gas. Gas from the 3 Phase separators are then sent through a gas scrubber before being route to treatment and/or sales.
- Industry standard sizing calculations are used for gas-liquid separation and liquid-liquid separation.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.

- Drilling, completion and production setup is designed to minimize the waste of natural gas and to flare instead of vent.
- *Drilling Operations:*
 - Natural gas encountered will be flared instead of vented unless there is an equipment malfunction and/or to avoid risking safety or the environment.
 - Flares will be properly sized and placed at least 100' from the nearest surface hole on the pad.
- *Completions/Recompletions Operations:*
 - Flowback operations will not commence until connected to a properly sized gas gathering system.
 - During initial flowback wells are routed to the separation equipment as soon as technically feasible to minimize gas waste.
 - During separation flowback wells are routed to the separation equipment to minimize gas waste.
 - Gas sales is maximized. Gas will be flared instead of vented during an emergency or malfunction to avoid posing a risk to operations or personnel safety.
 - Flares are properly sized with a continuous pilot.
- *Production Operations:*
 - Gas sales will be maximized. Gas will be flared instead of vented during an emergency or malfunction to avoid posing a risk to operations or personnel safety.
 - After a well is stabilized from liquid unloading, the well will be turned back into the collection system.
- *Performance Standards:*
 - The facility will be designed to handle peak production rates and pressures.
 - All tanks will have automatic gauging equipment.
 - Flares will be designed to ensure proper combustion and will have continuous pilots. Flares will be located 100' from nearest surface hole on the pad and storage tanks.
 - Weekly AVOs will be performed, and any leaking thief hatches will be cleaned and properly re-sealed.
- *Measurement and Calibration:*



- All volume that is flared and vented that is not measured will be estimated.
- When metering is not practical due to low pressure/rate, all vented or flared volumes will be estimated.
- Measurement will conform to industry standards. Measurement will not be bypassed except for purposes of inspection or calibration.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- Venting will be minimized during active and planned maintenance.
- Systems and equipment requiring maintenance will be isolated and blown down to sales and then flare before any remaining gas is vented in an effort to minimize waste and venting.
- Downhole maintenance will use best management practices to minimize vent.

Eagle/Norte NGMP Map
Feb 2023
- Capacities reflected are FME's understanding of 3rd party midstream system capacities

