

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☒ DRILL ☐ REENTER 1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other 1c. Type of Completion: ☐ Hydraulic Fracturing ☒ Single Zone ☐ Multiple Zone		5. Lease Serial No. NMNM108972 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. PILEDRIIVER FEDERAL COM [333937] 714H 9. API Well No. 30-025-51390
2. Name of Operator COG OPERATING LLC [229137] 3a. Address 600 West Illinois Ave, Midland, TX 79701 3b. Phone No. (include area code) (432) 683-7443		10. Field and Pool, or Exploratory [98065] WC-025 G-08 S263205N/Wolfcamp 11. Sec., T. R. M. or Blk. and Survey or Area SEC 34/T25S/R32E/NMP
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENE / 435 FNL / 1055 FEL / LAT 32.093037 / LONG -103.65765 At proposed prod. zone SWSE / 50 FSL / 1430 FEL / LAT 32.050434 / LONG -103.658756		12. County or Parish LEA 13. State NM
14. Distance in miles and direction from nearest town or post office* 23 miles		15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 50 feet 16. No of acres in lease 17. Spacing Unit dedicated to this well 960.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 30 feet 19. Proposed Depth 12216 feet / 27827 feet 20. BLM/BIA Bond No. in file FED: MB000215		21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3366 feet 22. Approximate date work will start* 04/01/2023 23. Estimated duration 30 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature (Electronic Submission) Title Regulatory Analyst	Name (Printed/Typed) MAYTE REYES / Ph: (432) 683-7443	Date 06/29/2022
Approved by (Signature) (Electronic Submission) Title Assistant Field Manager Lands & Minerals	Name (Printed/Typed) CODY LAYTON / Ph: (575) 234-5959	Date 04/17/2023
Office Carlsbad Field Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NGMP Rec 04/21/2023**SL**

(Continued on page 2)

APPROVED WITH CONDITIONS
KZ
04/25/2023

*(Instructions on page 2)

DISTRICT I
1625 N. FRENCH DR., HOBBS, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. FIRST ST., ARTESIA, NM 88210
Phone: (575) 746-1283 Fax: (575) 746-9720

DISTRICT III
1000 RIO BRAZOS RD., AZTEC, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. ST. FRANCIS DR., SANTA FE, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DR.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025- 30-025-51390		Pool Code 98065	Pool Name WC-025 G-08 S263205N; UPPER WOLFCAMP
Property Code 333937	Property Name PILEDRIIVER FEDERAL COM		Well Number 714H
OGRID No. 229137	Operator Name COG OPERATING, LLC		Elevation 3365.7'


Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	34	25-S	32-E		435	NORTH	1055	EAST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
O	10	26-S	32-E		50	SOUTH	1430	EAST	LEA
Dedicated Acres 960	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

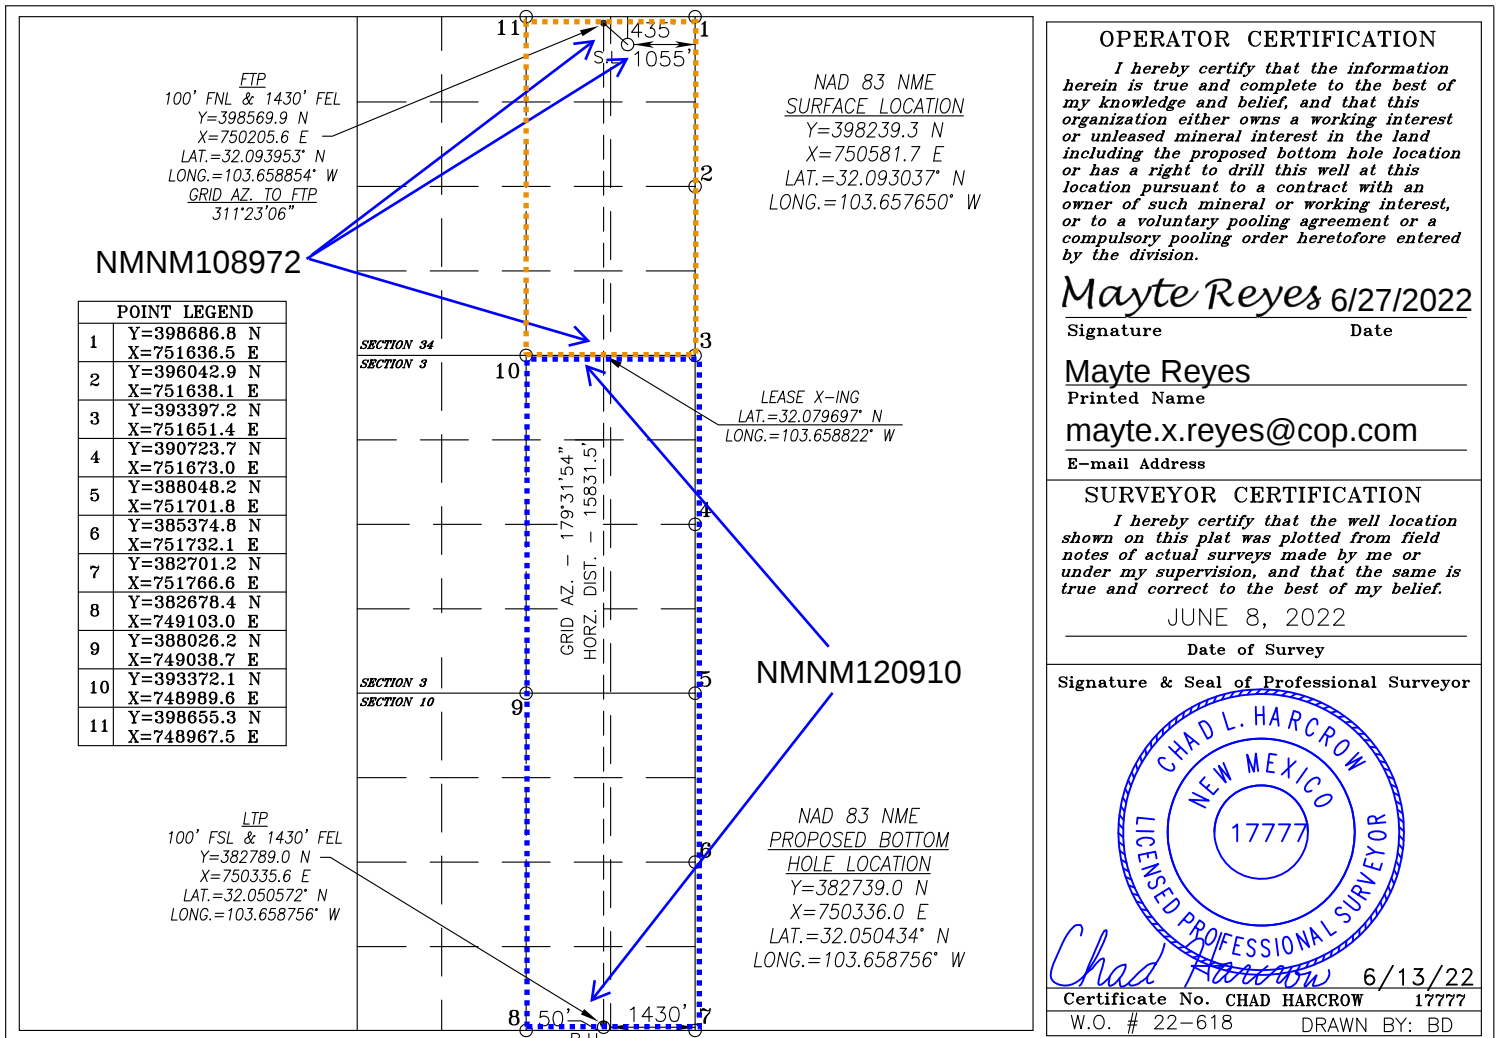

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: COG Operating LLC **OGRID:** 229137 **Date:** 6 / 27 / 22

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Piledriver Federal Com 715H	30-025-	A-34-25S-32E	435 FNL & 1085 FEL	± 2519	± 5007	± 5340
	30-025-51391					

IV. Central Delivery Point Name: _____ [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Piledriver Federal Com 715H	Pending	10/10/2023	± 25 days from spud	2/7/2024	2/17/2024	2/22/2024
	30-025-51391					

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

VI. Separation Equipment

How Operator will size separation equipment to optimize gas capture:

All ConocoPhillips production facility equipment will be sized per industry standards (API 12J) with adequate retention time to effectively separate all phases of production. Each project will take into consideration the number of wells and type curves for each formation pool to ensure adequate facility capacity. Design considerations will also include review of all piping, tanks, VRU's and associated equipment to ensure optimized gas capture minimized risk of release.

VII. Operational Practices

Actions Operator will take to comply with the requirements below:

B. Drilling Operations

- During drilling, flare stacks will be located a minimum of 100 feet from the nearest surface hole location. All gas is captured or combusted. If an emergency or malfunction occurs, gas will be flared or vented for public health, safety, and the environment and be properly reported to the NMOCD pursuant to 19.15.27.8.G.
- Measure or estimate the volume of natural gas that is vented, flared or beneficially used during drilling, completion and production operations, regardless of the reason or authorization for such venting or flaring.

C. Completion Operations

- During completion operations, operator does not produce oil or gas but maintains adequate well control through completion operations.
- Individual well test separators will be set to properly separate gas and liquids. A temporary test separator will be utilized initially to process volumes. In addition, separators will be tied into flowback tanks which will be tied into the gas processing equipment for sales down a pipeline.

D. Venting and flaring during production operations

- During each phase of well life (drilling, completion and production) of a ConocoPhillips well, COP personnel will follow all necessary procedures to ensure both the operation and the equipment are within the NMAC 19.15.27.8 Subsection D guidelines.
- During well operations that require unloading of the well to atmospheric pressure, all reasonable actions will be taken to minimize vented gas
- Through the life of the well all flaring shall be measured, and venting events quantified using the data available and industry best practice.

E. Performance standards for separation, storage tank and flare equipment

- All storage tanks and separation equipment are designed minimize risk of liquid or vapor release and optimize gas capture. This includes automation for automatic gauging and pressure monitoring.

- All flare stacks are equipped with auto ignition devices and/or continuous pilots and are designed to operate at maximum combustion efficiency pursuant NMAC 19.15.27.8 Subsection E. Flares will follow COP spacing guidelines to ensure they are a safe distance from combustibles and operations equipment.
- COP personnel will conduct routine AVO inspections on a regular basis per NMAC 19.15.27.8 Subsection E guidelines.

F. Measurement of vented and flared natural gas.

- Measurement equipment will be installed to quantify gas flared during drilling, completion and production of the well.
- All measurement devices installed will meet accuracy ratings per AGA and API standards.
- Measurement devices will be installed without manifolds that allow diversion of gas around the metering element, except for the sole purpose of inspection of servicing the measurement device.

VIII. Best Management Practices

- Operator will curtail or shut in production, within reasonable limits, during upset conditions to minimize venting and flaring.
- When feasible, Operator will use equipment to capture gas that would otherwise be vented or flared.
- During completions and production operations Operator will minimize blowdowns to atmosphere
- When feasible, Operator will use electric or air actuated equipment to reduce bleed emissions

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	<i>Mayte Reyes</i>
Printed Name:	Mayte Reyes
Title:	Sr. Regulatory Coordinator
E-mail Address:	mayte.x.reyes@conocophillips.com
Date:	6/27/2022
Phone:	575-748-6945
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)	
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

04/20/2023

APD ID: 10400086387

Submission Date: 06/29/2022

Highlighted data
reflects the most
recent changes

Operator Name: COG OPERATING LLC

Well Name: PILEDRIIVER FEDERAL COM

Well Number: 714H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
8813110	QUATERNARY	3366	0	0	ALLUVIUM	NONE	N
8813107	RUSTLER	2333	1033	1033	GYPSUM	NONE	N
8813106	TOP SALT	2001	1365	1365	SALT	NONE	N
8813089	BASE OF SALT	-1059	4425	4425	SALT	NONE	N
8813108	LAMAR	-1310	4676	4676	SALT	NONE	N
8813091	BELL CANYON	-1354	4720	4720	SALT	NONE	N
8813097	CHERRY CANYON	-2371	5737	5737	SANDSTONE	NATURAL GAS, OIL	N
8813112	BRUSHY CANYON	-3742	7108	7108	SANDSTONE	NATURAL GAS, OIL	N
8813102	BONE SPRING LIME	-5449	8815	8815	LIMESTONE	NATURAL GAS, OIL	N
8813104		-10937	9653	9653			N
8813129	BONE SPRINGS	-6658	10024	10024	SANDSTONE	NATURAL GAS, OIL	N
8813094	BONE SPRING 1ST	-7032	10398	10398	SANDSTONE	NATURAL GAS, OIL	N
8813095	BONE SPRING 2ND	-7525	10891	10891	SANDSTONE	NATURAL GAS, OIL	N
8813088	BONE SPRING 3RD	-8191	11557	11557	SANDSTONE	NATURAL GAS, OIL	N
8813126	WOLFCAMP	-8633	11999	11999	SANDSTONE	NATURAL GAS, OIL	N
8813127	WOLFCAMP	-8850	12216	12216	SANDSTONE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Operator Name: COG OPERATING LLC**Well Name:** PILEDRIIVER FEDERAL COM**Well Number:** 714H**Pressure Rating (PSI):** 10M**Rating Depth:** 12216**Equipment:** Accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold**Requesting Variance?** YES**Variance request:** Request a 5M annular variance on a 10M system. (5M variance attached in section 8). A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for specs and hydrostatic test chart.**Testing Procedure:** BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.**Choke Diagram Attachment:**

COG_PILEDRIIVER_10M_Choke_20220627154604.pdf

BOP Diagram Attachment:

COG_Piledriver_Flex_Hose_Variance_20220627154629.pdf

COG_PILEDRIIVER_10M_BOP_20220627154612.pdf

Pressure Rating (PSI): 5M**Rating Depth:** 11600**Equipment:** Annular. The BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold.**Requesting Variance?** NO**Variance request:** A variance is requested for the use of a flexible choke line from the BOP to choke manifold. See attached for specs and hydrostatic test chart.**Testing Procedure:** BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all of the components installed will be functional and tested.**Choke Diagram Attachment:**

COG_PILEDRIIVER_5M_Choke_20220627154133.pdf

BOP Diagram Attachment:

COG_Piledriver_Flex_Hose_Variance_20220627153850.pdf

COG_Piledriver_5M_BOP_20230124073613.pdf

Operator Name: COG OPERATING LLC

Well Name: PILEDRIIVER FEDERAL COM

Well Number: 714H

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	10.75	NEW	API	N	0	1315	0	1315	3366	2051	1315	J-55	45.5	OTHER - BTC	3.47	1.08	DRY	13.3	DRY	11.95
2	INTERMEDIATE	8.75	7.625	NEW	API	Y	0	11600	0	11600	-6907	-8234	11600	P-110	29.7	OTHER - W513	1.3	1.66	DRY	1.86	DRY	3.1
3	PRODUCTION	6.75	5.5	NEW	API	Y	0	27827	0	12216	-6907	-8850	27827	P-110	23	OTHER - W441	1.85	2.18	DRY	2.36	DRY	2.59

Casing Attachments

Casing ID: 1

String

SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

COG_PILEDRIIVER_714H_Casing_Prog_20220628134751.pdf

Operator Name: COG OPERATING LLC

Well Name: PILEDRIIVER FEDERAL COM

Well Number: 714H

Casing Attachments

Casing ID: 2 String INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

COG_PILEDRIIVER_714H_Casing_Prog_20220628134823.pdf

Casing Design Assumptions and Worksheet(s):

COG_PILEDRIIVER_714H_Casing_Prog_20220628134848.pdf

Casing ID: 3 String PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

COG_PILEDRIIVER_714H_Casing_Prog_20220628134916.pdf

Casing Design Assumptions and Worksheet(s):

COG_PILEDRIIVER_714H_Casing_Prog_20220628134941.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1315	627	1.75	13.5	1097	50	Lead: Class C + 4% Gel	1% CaCl2
SURFACE	Tail		0	1315	250	1.34	14.8	335	50	Tail: Class C	2% CaCl2
INTERMEDIATE	Lead		0	1160 0	780	3.5	10.5	2730	50	Lead: NeoCem	No Additives.
INTERMEDIATE	Tail		0	1160 0	250	1.08	16.4	270	50	Tail: Class H	No Additives
PRODUCTION	Lead		1221 6	2782 7	515	2	12.7	1030	35	Lead: 50:50:10 H Blend	No additives

Operator Name: COG OPERATING LLC

Well Name: PILEDRIIVER FEDERAL COM

Well Number: 714H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PRODUCTION	Tail		1221 6	2782 7	1577	1.24	14.4	1955	35	Tail: 50:50:2 Class H Blend	No additives

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
1315	1160 0	OTHER : Brine Diesel Emulsion	8.4	9.4							Brine Diesel Emulsion
1160 0	2782 7	OTHER : OBM	12	12.4							OBM
0	1315	OTHER : Fresh water gel	8.6	8.8							Fresh water gel

Operator Name: COG OPERATING LLC**Well Name:** PILEDRIIVER FEDERAL COM**Well Number:** 714H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

None planned

List of open and cased hole logs run in the well:

COMPENSATED NEUTRON LOG,GAMMA RAY LOG,

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 7880**Anticipated Surface Pressure:** 5192**Anticipated Bottom Hole Temperature(F):** 175**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations**

COG_PILEDRIIVER_H2S_SUP_20220627160824.pdf

COG_PILEDRIIVER_H2S_Schem_20220627160824.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

COG_PILEDRIIVER_714H_Directional_Plan_20220628135351.pdf

COG_PILEDRIIVER_714H_AC_RPT_20220628135352.pdf

Other proposed operations facets description:

Drilling Program.

Cement Program.

GCP.

Other proposed operations facets attachment:

TXP_BTC_Casing_Specs_20220627160942.pdf

Wedge_441__5.500_0.415_P110_CY_09212021_20220627161537.pdf

COG_PILEDRIIVER_714H_Cement_Prog_20220628135409.pdf

COG_PILEDRIIVER_714H_Drilling_Prog_20220628135410.pdf

COG_Piledriver_714H_GCP_20220628135410.pdf

Other Variance attachment:

COG_6.75_5M_Variance_WCP_20220627161206.pdf

CONFIDENTIAL

DELAWARE BASIN EAST

BULLDOG PROSPECT (NM-E)

PILEDRIVER & FIGURE FOUR FEDERAL PROJECT

PILEDRIVER FEDERAL #714H

OWB

Plan: PWP0

Standard Planning Report

22 June, 2022

ConocoPhillips

Planning Report

Database:	EDT 15 Central Prod	Local Co-ordinate Reference:	Well PILEDRIVER FEDERAL #714H
Company:	DELAWARE BASIN EAST	TVD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Project:	BULLDOG PROSPECT (NM-E)	MD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Site:	PILEDRIVER & FIGURE FOUR FEDERAL PROJECT	North Reference:	Grid
Well:	PILEDRIVER FEDERAL #714H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Project	BULLDOG PROSPECT (NM-E)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	PILEDRIVER & FIGURE FOUR FEDERAL PROJECT		
Site Position:		Northing:	387,991.37 usft
From:	Map	Easting:	710,514.75 usft
Position Uncertainty:	3.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 3' 53.574 N
		Longitude:	103° 39' 13.572 W
		Grid Convergence:	0.36 °

Well	PILEDRIVER FEDERAL #714H					
Well Position	+N/-S	10,190.2 usft	Northing:	398,181.60 usft	Latitude:	32° 5' 34.485 N
	+E/-W	-1,119.3 usft	Easting:	709,395.50 usft	Longitude:	103° 39' 25.836 W
Position Uncertainty		3.0 usft	Wellhead Elevation:		Ground Level:	3,365.7 usft

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2022	12/1/2022	6.41	59.66	47,423.33402755

Design	PWP0				
Audit Notes:					
Version:		Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	180.91	

Plan Survey Tool Program	Date	6/22/2022			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.0	1,500.0 PWP0 (OWB)	Standard Keeper 104		
			Standard Wireline Keeper ver 1		
2	1,500.0	11,668.4 PWP0 (OWB)	MWD+IFR1+MS		
			OWSG MWD + IFR1 + Multi-St		
3	11,668.4	27,826.6 PWP0 (OWB)	MWD+IFR1+MS		
			OWSG MWD + IFR1 + Multi-St		

ConocoPhillips

Planning Report

Database:	EDT 15 Central Prod	Local Co-ordinate Reference:	Well PILEDRIVER FEDERAL #714H
Company:	DELAWARE BASIN EAST	TVD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Project:	BULLDOG PROSPECT (NM-E)	MD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Site:	PILEDRIVER & FIGURE FOUR FEDERAL PROJECT	North Reference:	Grid
Well:	PILEDRIVER FEDERAL #714H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,799.9	6.00	311.38	1,799.4	10.4	-11.8	2.00	2.00	0.00	311.38	
6,134.5	6.00	311.38	6,110.2	309.9	-351.7	0.00	0.00	0.00	0.00	
6,734.4	0.00	0.00	6,709.0	330.6	-375.2	1.00	-1.00	0.00	180.00	
11,668.4	0.00	0.00	11,643.0	330.6	-375.2	0.00	0.00	0.00	0.00	
12,568.4	90.00	179.53	12,216.0	-242.3	-370.5	10.00	10.00	19.95	179.53	
27,776.6	90.00	179.53	12,216.0	-15,450.0	-246.9	0.00	0.00	0.00	0.00	
27,826.6	90.00	179.53	12,216.0	-15,500.0	-246.5	0.00	0.00	0.00	0.00	

ConocoPhillips

Planning Report

Database:	EDT 15 Central Prod	Local Co-ordinate Reference:	Well PILEDRIIVER FEDERAL #714H
Company:	DELAWARE BASIN EAST	TVD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Project:	BULLDOG PROSPECT (NM-E)	MD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Site:	PILEDRIIVER & FIGURE FOUR FEDERAL PROJECT	North Reference:	Grid
Well:	PILEDRIIVER FEDERAL #714H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00	
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00	
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00	
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00	
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00	
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00	
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00	
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00	
Start Build 2.00										
1,600.0	2.00	311.38	1,600.0	1.2	-1.3	-1.1	2.00	2.00	0.00	
1,700.0	4.00	311.38	1,699.8	4.6	-5.2	-4.5	2.00	2.00	0.00	
1,799.9	6.00	311.38	1,799.4	10.4	-11.8	-10.2	2.00	2.00	0.00	
Start 4334.5 hold at 1799.9 MD										
1,900.0	6.00	311.38	1,898.9	17.3	-19.6	-17.0	0.00	0.00	0.00	
2,000.0	6.00	311.38	1,998.4	24.2	-27.5	-23.8	0.00	0.00	0.00	
2,100.0	6.00	311.38	2,097.8	31.1	-35.3	-30.5	0.00	0.00	0.00	
2,200.0	6.00	311.38	2,197.3	38.0	-43.1	-37.3	0.00	0.00	0.00	
2,300.0	6.00	311.38	2,296.7	44.9	-51.0	-44.1	0.00	0.00	0.00	
2,400.0	6.00	311.38	2,396.2	51.8	-58.8	-50.9	0.00	0.00	0.00	
2,500.0	6.00	311.38	2,495.6	58.7	-66.7	-57.7	0.00	0.00	0.00	
2,600.0	6.00	311.38	2,595.1	65.6	-74.5	-64.5	0.00	0.00	0.00	
2,700.0	6.00	311.38	2,694.5	72.6	-82.3	-71.2	0.00	0.00	0.00	
2,800.0	6.00	311.38	2,794.0	79.5	-90.2	-78.0	0.00	0.00	0.00	
2,900.0	6.00	311.38	2,893.4	86.4	-98.0	-84.8	0.00	0.00	0.00	
3,000.0	6.00	311.38	2,992.9	93.3	-105.9	-91.6	0.00	0.00	0.00	
3,100.0	6.00	311.38	3,092.3	100.2	-113.7	-98.4	0.00	0.00	0.00	
3,200.0	6.00	311.38	3,191.8	107.1	-121.6	-105.2	0.00	0.00	0.00	
3,300.0	6.00	311.38	3,291.2	114.0	-129.4	-111.9	0.00	0.00	0.00	
3,400.0	6.00	311.38	3,390.7	120.9	-137.2	-118.7	0.00	0.00	0.00	
3,500.0	6.00	311.38	3,490.1	127.8	-145.1	-125.5	0.00	0.00	0.00	
3,600.0	6.00	311.38	3,589.6	134.7	-152.9	-132.3	0.00	0.00	0.00	
3,700.0	6.00	311.38	3,689.0	141.7	-160.8	-139.1	0.00	0.00	0.00	
3,800.0	6.00	311.38	3,788.5	148.6	-168.6	-145.9	0.00	0.00	0.00	
3,900.0	6.00	311.38	3,888.0	155.5	-176.4	-152.6	0.00	0.00	0.00	
4,000.0	6.00	311.38	3,987.4	162.4	-184.3	-159.4	0.00	0.00	0.00	
4,100.0	6.00	311.38	4,086.9	169.3	-192.1	-166.2	0.00	0.00	0.00	
4,200.0	6.00	311.38	4,186.3	176.2	-200.0	-173.0	0.00	0.00	0.00	
4,300.0	6.00	311.38	4,285.8	183.1	-207.8	-179.8	0.00	0.00	0.00	
4,400.0	6.00	311.38	4,385.2	190.0	-215.7	-186.6	0.00	0.00	0.00	
4,500.0	6.00	311.38	4,484.7	196.9	-223.5	-193.3	0.00	0.00	0.00	
4,600.0	6.00	311.38	4,584.1	203.8	-231.3	-200.1	0.00	0.00	0.00	
4,700.0	6.00	311.38	4,683.6	210.7	-239.2	-206.9	0.00	0.00	0.00	
4,800.0	6.00	311.38	4,783.0	217.7	-247.0	-213.7	0.00	0.00	0.00	
4,900.0	6.00	311.38	4,882.5	224.6	-254.9	-220.5	0.00	0.00	0.00	
5,000.0	6.00	311.38	4,981.9	231.5	-262.7	-227.3	0.00	0.00	0.00	

ConocoPhillips

Planning Report

Database:	EDT 15 Central Prod	Local Co-ordinate Reference:	Well PILEDRIVER FEDERAL #714H
Company:	DELAWARE BASIN EAST	TVD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Project:	BULLDOG PROSPECT (NM-E)	MD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Site:	PILEDRIVER & FIGURE FOUR FEDERAL PROJECT	North Reference:	Grid
Well:	PILEDRIVER FEDERAL #714H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
5,100.0	6.00	311.38	5,081.4	238.4	-270.5	-234.1	0.00	0.00	0.00	
5,200.0	6.00	311.38	5,180.8	245.3	-278.4	-240.8	0.00	0.00	0.00	
5,300.0	6.00	311.38	5,280.3	252.2	-286.2	-247.6	0.00	0.00	0.00	
5,400.0	6.00	311.38	5,379.7	259.1	-294.1	-254.4	0.00	0.00	0.00	
5,500.0	6.00	311.38	5,479.2	266.0	-301.9	-261.2	0.00	0.00	0.00	
5,600.0	6.00	311.38	5,578.6	272.9	-309.7	-268.0	0.00	0.00	0.00	
5,700.0	6.00	311.38	5,678.1	279.8	-317.6	-274.8	0.00	0.00	0.00	
5,800.0	6.00	311.38	5,777.5	286.7	-325.4	-281.5	0.00	0.00	0.00	
5,900.0	6.00	311.38	5,877.0	293.7	-333.3	-288.3	0.00	0.00	0.00	
6,000.0	6.00	311.38	5,976.5	300.6	-341.1	-295.1	0.00	0.00	0.00	
6,100.0	6.00	311.38	6,075.9	307.5	-349.0	-301.9	0.00	0.00	0.00	
6,134.5	6.00	311.38	6,110.2	309.9	-351.7	-304.2	0.00	0.00	0.00	
Start Drop -1.00										
6,200.0	5.34	311.38	6,175.4	314.1	-356.5	-308.4	1.00	-1.00	0.00	
6,300.0	4.34	311.38	6,275.0	319.7	-362.9	-313.9	1.00	-1.00	0.00	
6,400.0	3.34	311.38	6,374.8	324.2	-367.9	-318.3	1.00	-1.00	0.00	
6,500.0	2.34	311.38	6,474.7	327.4	-371.6	-321.5	1.00	-1.00	0.00	
6,600.0	1.34	311.38	6,574.6	329.6	-374.0	-323.6	1.00	-1.00	0.00	
6,700.0	0.34	311.38	6,674.6	330.5	-375.1	-324.5	1.00	-1.00	0.00	
6,734.4	0.00	0.00	6,709.0	330.6	-375.2	-324.6	1.00	-1.00	0.00	
Start 4934.0 hold at 6734.4 MD										
6,800.0	0.00	0.00	6,774.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
6,900.0	0.00	0.00	6,874.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
7,000.0	0.00	0.00	6,974.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
7,100.0	0.00	0.00	7,074.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
7,200.0	0.00	0.00	7,174.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
7,300.0	0.00	0.00	7,274.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
7,400.0	0.00	0.00	7,374.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
7,500.0	0.00	0.00	7,474.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
7,600.0	0.00	0.00	7,574.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
7,700.0	0.00	0.00	7,674.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
7,800.0	0.00	0.00	7,774.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
7,900.0	0.00	0.00	7,874.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
8,000.0	0.00	0.00	7,974.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
8,100.0	0.00	0.00	8,074.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
8,200.0	0.00	0.00	8,174.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
8,300.0	0.00	0.00	8,274.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
8,400.0	0.00	0.00	8,374.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
8,500.0	0.00	0.00	8,474.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
8,600.0	0.00	0.00	8,574.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
8,700.0	0.00	0.00	8,674.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
8,800.0	0.00	0.00	8,774.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
8,900.0	0.00	0.00	8,874.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
9,000.0	0.00	0.00	8,974.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
9,100.0	0.00	0.00	9,074.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
9,200.0	0.00	0.00	9,174.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
9,300.0	0.00	0.00	9,274.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
9,400.0	0.00	0.00	9,374.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
9,500.0	0.00	0.00	9,474.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
9,600.0	0.00	0.00	9,574.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
9,700.0	0.00	0.00	9,674.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
9,800.0	0.00	0.00	9,774.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
9,900.0	0.00	0.00	9,874.6	330.6	-375.2	-324.6	0.00	0.00	0.00	

ConocoPhillips

Planning Report

Database:	EDT 15 Central Prod	Local Co-ordinate Reference:	Well PILEDRIIVER FEDERAL #714H
Company:	DELAWARE BASIN EAST	TVD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Project:	BULLDOG PROSPECT (NM-E)	MD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Site:	PILEDRIIVER & FIGURE FOUR FEDERAL PROJECT	North Reference:	Grid
Well:	PILEDRIIVER FEDERAL #714H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
10,000.0	0.00	0.00	9,974.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
10,100.0	0.00	0.00	10,074.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
10,200.0	0.00	0.00	10,174.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
10,300.0	0.00	0.00	10,274.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
10,400.0	0.00	0.00	10,374.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
10,500.0	0.00	0.00	10,474.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
10,600.0	0.00	0.00	10,574.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
10,700.0	0.00	0.00	10,674.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
10,800.0	0.00	0.00	10,774.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
10,900.0	0.00	0.00	10,874.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
11,000.0	0.00	0.00	10,974.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
11,100.0	0.00	0.00	11,074.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
11,200.0	0.00	0.00	11,174.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
11,300.0	0.00	0.00	11,274.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
11,400.0	0.00	0.00	11,374.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
11,500.0	0.00	0.00	11,474.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
11,600.0	0.00	0.00	11,574.6	330.6	-375.2	-324.6	0.00	0.00	0.00	
11,668.4	0.00	0.00	11,643.0	330.6	-375.2	-324.6	0.00	0.00	0.00	
Start DLS 10.00 TFO 179.53										
11,700.0	3.16	179.53	11,674.6	329.7	-375.2	-323.7	10.00	10.00	0.00	
11,750.0	8.16	179.53	11,724.3	324.8	-375.2	-318.8	10.00	10.00	0.00	
11,800.0	13.16	179.53	11,773.5	315.6	-375.1	-309.6	10.00	10.00	0.00	
11,850.0	18.16	179.53	11,821.6	302.1	-375.0	-296.1	10.00	10.00	0.00	
11,900.0	23.16	179.53	11,868.4	284.4	-374.8	-278.4	10.00	10.00	0.00	
11,950.0	28.16	179.53	11,913.4	262.8	-374.6	-256.8	10.00	10.00	0.00	
12,000.0	33.16	179.53	11,956.4	237.3	-374.4	-231.3	10.00	10.00	0.00	
12,050.0	38.16	179.53	11,997.0	208.2	-374.2	-202.2	10.00	10.00	0.00	
12,100.0	43.16	179.53	12,035.0	175.6	-373.9	-169.6	10.00	10.00	0.00	
12,150.0	48.16	179.53	12,069.9	139.9	-373.6	-133.9	10.00	10.00	0.00	
12,200.0	53.16	179.53	12,101.6	101.2	-373.3	-95.3	10.00	10.00	0.00	
12,250.0	58.16	179.53	12,129.8	59.9	-373.0	-54.0	10.00	10.00	0.00	
12,300.0	63.16	179.53	12,154.3	16.4	-372.6	-10.4	10.00	10.00	0.00	
12,350.0	68.16	179.53	12,174.9	-29.2	-372.3	35.1	10.00	10.00	0.00	
12,400.0	73.16	179.53	12,191.4	-76.3	-371.9	82.2	10.00	10.00	0.00	
12,450.0	78.16	179.53	12,203.8	-124.8	-371.5	130.7	10.00	10.00	0.00	
12,500.0	83.16	179.53	12,211.9	-174.1	-371.1	180.0	10.00	10.00	0.00	
12,550.0	88.16	179.53	12,215.7	-223.9	-370.7	229.8	10.00	10.00	0.00	
12,568.4	90.00	179.53	12,216.0	-242.3	-370.5	248.2	10.00	10.00	0.00	
Start 15208.2 hold at 12568.4 MD										
12,600.0	90.00	179.53	12,216.0	-273.9	-370.3	279.8	0.00	0.00	0.00	
12,700.0	90.00	179.53	12,216.0	-373.9	-369.5	379.7	0.00	0.00	0.00	
12,800.0	90.00	179.53	12,216.0	-473.9	-368.7	479.7	0.00	0.00	0.00	
12,900.0	90.00	179.53	12,216.0	-573.9	-367.8	579.7	0.00	0.00	0.00	
13,000.0	90.00	179.53	12,216.0	-673.9	-367.0	679.7	0.00	0.00	0.00	
13,100.0	90.00	179.53	12,216.0	-773.9	-366.2	779.6	0.00	0.00	0.00	
13,200.0	90.00	179.53	12,216.0	-873.9	-365.4	879.6	0.00	0.00	0.00	
13,300.0	90.00	179.53	12,216.0	-973.9	-364.6	979.6	0.00	0.00	0.00	
13,400.0	90.00	179.53	12,216.0	-1,073.9	-363.8	1,079.5	0.00	0.00	0.00	
13,500.0	90.00	179.53	12,216.0	-1,173.9	-363.0	1,179.5	0.00	0.00	0.00	
13,600.0	90.00	179.53	12,216.0	-1,273.9	-362.2	1,279.5	0.00	0.00	0.00	
13,700.0	90.00	179.53	12,216.0	-1,373.9	-361.3	1,379.4	0.00	0.00	0.00	
13,800.0	90.00	179.53	12,216.0	-1,473.9	-360.5	1,479.4	0.00	0.00	0.00	
13,900.0	90.00	179.53	12,216.0	-1,573.9	-359.7	1,579.4	0.00	0.00	0.00	

ConocoPhillips

Planning Report

Database:	EDT 15 Central Prod	Local Co-ordinate Reference:	Well PILEDRIIVER FEDERAL #714H
Company:	DELAWARE BASIN EAST	TVD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Project:	BULLDOG PROSPECT (NM-E)	MD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Site:	PILEDRIIVER & FIGURE FOUR FEDERAL PROJECT	North Reference:	Grid
Well:	PILEDRIIVER FEDERAL #714H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,000.0	90.00	179.53	12,216.0	-1,673.9	-358.9	1,679.4	0.00	0.00	0.00
14,100.0	90.00	179.53	12,216.0	-1,773.9	-358.1	1,779.3	0.00	0.00	0.00
14,200.0	90.00	179.53	12,216.0	-1,873.9	-357.3	1,879.3	0.00	0.00	0.00
14,300.0	90.00	179.53	12,216.0	-1,973.9	-356.5	1,979.3	0.00	0.00	0.00
14,400.0	90.00	179.53	12,216.0	-2,073.9	-355.7	2,079.2	0.00	0.00	0.00
14,500.0	90.00	179.53	12,216.0	-2,173.9	-354.8	2,179.2	0.00	0.00	0.00
14,600.0	90.00	179.53	12,216.0	-2,273.8	-354.0	2,279.2	0.00	0.00	0.00
14,700.0	90.00	179.53	12,216.0	-2,373.8	-353.2	2,379.2	0.00	0.00	0.00
14,800.0	90.00	179.53	12,216.0	-2,473.8	-352.4	2,479.1	0.00	0.00	0.00
14,900.0	90.00	179.53	12,216.0	-2,573.8	-351.6	2,579.1	0.00	0.00	0.00
15,000.0	90.00	179.53	12,216.0	-2,673.8	-350.8	2,679.1	0.00	0.00	0.00
15,100.0	90.00	179.53	12,216.0	-2,773.8	-350.0	2,779.0	0.00	0.00	0.00
15,200.0	90.00	179.53	12,216.0	-2,873.8	-349.1	2,879.0	0.00	0.00	0.00
15,300.0	90.00	179.53	12,216.0	-2,973.8	-348.3	2,979.0	0.00	0.00	0.00
15,400.0	90.00	179.53	12,216.0	-3,073.8	-347.5	3,079.0	0.00	0.00	0.00
15,500.0	90.00	179.53	12,216.0	-3,173.8	-346.7	3,178.9	0.00	0.00	0.00
15,600.0	90.00	179.53	12,216.0	-3,273.8	-345.9	3,278.9	0.00	0.00	0.00
15,700.0	90.00	179.53	12,216.0	-3,373.8	-345.1	3,378.9	0.00	0.00	0.00
15,800.0	90.00	179.53	12,216.0	-3,473.8	-344.3	3,478.8	0.00	0.00	0.00
15,900.0	90.00	179.53	12,216.0	-3,573.8	-343.5	3,578.8	0.00	0.00	0.00
16,000.0	90.00	179.53	12,216.0	-3,673.8	-342.6	3,678.8	0.00	0.00	0.00
16,100.0	90.00	179.53	12,216.0	-3,773.8	-341.8	3,778.8	0.00	0.00	0.00
16,200.0	90.00	179.53	12,216.0	-3,873.8	-341.0	3,878.7	0.00	0.00	0.00
16,300.0	90.00	179.53	12,216.0	-3,973.8	-340.2	3,978.7	0.00	0.00	0.00
16,400.0	90.00	179.53	12,216.0	-4,073.8	-339.4	4,078.7	0.00	0.00	0.00
16,500.0	90.00	179.53	12,216.0	-4,173.8	-338.6	4,178.6	0.00	0.00	0.00
16,600.0	90.00	179.53	12,216.0	-4,273.8	-337.8	4,278.6	0.00	0.00	0.00
16,700.0	90.00	179.53	12,216.0	-4,373.8	-337.0	4,378.6	0.00	0.00	0.00
16,800.0	90.00	179.53	12,216.0	-4,473.8	-336.1	4,478.6	0.00	0.00	0.00
16,900.0	90.00	179.53	12,216.0	-4,573.8	-335.3	4,578.5	0.00	0.00	0.00
17,000.0	90.00	179.53	12,216.0	-4,673.8	-334.5	4,678.5	0.00	0.00	0.00
17,100.0	90.00	179.53	12,216.0	-4,773.8	-333.7	4,778.5	0.00	0.00	0.00
17,200.0	90.00	179.53	12,216.0	-4,873.8	-332.9	4,878.4	0.00	0.00	0.00
17,300.0	90.00	179.53	12,216.0	-4,973.8	-332.1	4,978.4	0.00	0.00	0.00
17,400.0	90.00	179.53	12,216.0	-5,073.8	-331.3	5,078.4	0.00	0.00	0.00
17,500.0	90.00	179.53	12,216.0	-5,173.8	-330.4	5,178.4	0.00	0.00	0.00
17,600.0	90.00	179.53	12,216.0	-5,273.8	-329.6	5,278.3	0.00	0.00	0.00
17,700.0	90.00	179.53	12,216.0	-5,373.7	-328.8	5,378.3	0.00	0.00	0.00
17,800.0	90.00	179.53	12,216.0	-5,473.7	-328.0	5,478.3	0.00	0.00	0.00
17,900.0	90.00	179.53	12,216.0	-5,573.7	-327.2	5,578.2	0.00	0.00	0.00
18,000.0	90.00	179.53	12,216.0	-5,673.7	-326.4	5,678.2	0.00	0.00	0.00
18,100.0	90.00	179.53	12,216.0	-5,773.7	-325.6	5,778.2	0.00	0.00	0.00
18,200.0	90.00	179.53	12,216.0	-5,873.7	-324.8	5,878.2	0.00	0.00	0.00
18,300.0	90.00	179.53	12,216.0	-5,973.7	-323.9	5,978.1	0.00	0.00	0.00
18,400.0	90.00	179.53	12,216.0	-6,073.7	-323.1	6,078.1	0.00	0.00	0.00
18,500.0	90.00	179.53	12,216.0	-6,173.7	-322.3	6,178.1	0.00	0.00	0.00
18,600.0	90.00	179.53	12,216.0	-6,273.7	-321.5	6,278.0	0.00	0.00	0.00
18,700.0	90.00	179.53	12,216.0	-6,373.7	-320.7	6,378.0	0.00	0.00	0.00
18,800.0	90.00	179.53	12,216.0	-6,473.7	-319.9	6,478.0	0.00	0.00	0.00
18,900.0	90.00	179.53	12,216.0	-6,573.7	-319.1	6,577.9	0.00	0.00	0.00
19,000.0	90.00	179.53	12,216.0	-6,673.7	-318.3	6,677.9	0.00	0.00	0.00
19,100.0	90.00	179.53	12,216.0	-6,773.7	-317.4	6,777.9	0.00	0.00	0.00
19,200.0	90.00	179.53	12,216.0	-6,873.7	-316.6	6,877.9	0.00	0.00	0.00

ConocoPhillips

Planning Report

Database:	EDT 15 Central Prod	Local Co-ordinate Reference:	Well PILEDRIIVER FEDERAL #714H
Company:	DELAWARE BASIN EAST	TVD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Project:	BULLDOG PROSPECT (NM-E)	MD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Site:	PILEDRIIVER & FIGURE FOUR FEDERAL PROJECT	North Reference:	Grid
Well:	PILEDRIIVER FEDERAL #714H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
19,300.0	90.00	179.53	12,216.0	-6,973.7	-315.8	6,977.8	0.00	0.00	0.00
19,400.0	90.00	179.53	12,216.0	-7,073.7	-315.0	7,077.8	0.00	0.00	0.00
19,500.0	90.00	179.53	12,216.0	-7,173.7	-314.2	7,177.8	0.00	0.00	0.00
19,600.0	90.00	179.53	12,216.0	-7,273.7	-313.4	7,277.7	0.00	0.00	0.00
19,700.0	90.00	179.53	12,216.0	-7,373.7	-312.6	7,377.7	0.00	0.00	0.00
19,800.0	90.00	179.53	12,216.0	-7,473.7	-311.7	7,477.7	0.00	0.00	0.00
19,900.0	90.00	179.53	12,216.0	-7,573.7	-310.9	7,577.7	0.00	0.00	0.00
20,000.0	90.00	179.53	12,216.0	-7,673.7	-310.1	7,677.6	0.00	0.00	0.00
20,100.0	90.00	179.53	12,216.0	-7,773.7	-309.3	7,777.6	0.00	0.00	0.00
20,200.0	90.00	179.53	12,216.0	-7,873.7	-308.5	7,877.6	0.00	0.00	0.00
20,300.0	90.00	179.53	12,216.0	-7,973.7	-307.7	7,977.5	0.00	0.00	0.00
20,400.0	90.00	179.53	12,216.0	-8,073.7	-306.9	8,077.5	0.00	0.00	0.00
20,500.0	90.00	179.53	12,216.0	-8,173.7	-306.1	8,177.5	0.00	0.00	0.00
20,600.0	90.00	179.53	12,216.0	-8,273.7	-305.2	8,277.5	0.00	0.00	0.00
20,700.0	90.00	179.53	12,216.0	-8,373.6	-304.4	8,377.4	0.00	0.00	0.00
20,800.0	90.00	179.53	12,216.0	-8,473.6	-303.6	8,477.4	0.00	0.00	0.00
20,900.0	90.00	179.53	12,216.0	-8,573.6	-302.8	8,577.4	0.00	0.00	0.00
21,000.0	90.00	179.53	12,216.0	-8,673.6	-302.0	8,677.3	0.00	0.00	0.00
21,100.0	90.00	179.53	12,216.0	-8,773.6	-301.2	8,777.3	0.00	0.00	0.00
21,200.0	90.00	179.53	12,216.0	-8,873.6	-300.4	8,877.3	0.00	0.00	0.00
21,300.0	90.00	179.53	12,216.0	-8,973.6	-299.6	8,977.3	0.00	0.00	0.00
21,400.0	90.00	179.53	12,216.0	-9,073.6	-298.7	9,077.2	0.00	0.00	0.00
21,500.0	90.00	179.53	12,216.0	-9,173.6	-297.9	9,177.2	0.00	0.00	0.00
21,600.0	90.00	179.53	12,216.0	-9,273.6	-297.1	9,277.2	0.00	0.00	0.00
21,700.0	90.00	179.53	12,216.0	-9,373.6	-296.3	9,377.1	0.00	0.00	0.00
21,800.0	90.00	179.53	12,216.0	-9,473.6	-295.5	9,477.1	0.00	0.00	0.00
21,900.0	90.00	179.53	12,216.0	-9,573.6	-294.7	9,577.1	0.00	0.00	0.00
22,000.0	90.00	179.53	12,216.0	-9,673.6	-293.9	9,677.1	0.00	0.00	0.00
22,100.0	90.00	179.53	12,216.0	-9,773.6	-293.1	9,777.0	0.00	0.00	0.00
22,200.0	90.00	179.53	12,216.0	-9,873.6	-292.2	9,877.0	0.00	0.00	0.00
22,300.0	90.00	179.53	12,216.0	-9,973.6	-291.4	9,977.0	0.00	0.00	0.00
22,400.0	90.00	179.53	12,216.0	-10,073.6	-290.6	10,076.9	0.00	0.00	0.00
22,500.0	90.00	179.53	12,216.0	-10,173.6	-289.8	10,176.9	0.00	0.00	0.00
22,600.0	90.00	179.53	12,216.0	-10,273.6	-289.0	10,276.9	0.00	0.00	0.00
22,700.0	90.00	179.53	12,216.0	-10,373.6	-288.2	10,376.9	0.00	0.00	0.00
22,800.0	90.00	179.53	12,216.0	-10,473.6	-287.4	10,476.8	0.00	0.00	0.00
22,900.0	90.00	179.53	12,216.0	-10,573.6	-286.5	10,576.8	0.00	0.00	0.00
23,000.0	90.00	179.53	12,216.0	-10,673.6	-285.7	10,676.8	0.00	0.00	0.00
23,100.0	90.00	179.53	12,216.0	-10,773.6	-284.9	10,776.7	0.00	0.00	0.00
23,200.0	90.00	179.53	12,216.0	-10,873.6	-284.1	10,876.7	0.00	0.00	0.00
23,300.0	90.00	179.53	12,216.0	-10,973.6	-283.3	10,976.7	0.00	0.00	0.00
23,400.0	90.00	179.53	12,216.0	-11,073.6	-282.5	11,076.6	0.00	0.00	0.00
23,500.0	90.00	179.53	12,216.0	-11,173.6	-281.7	11,176.6	0.00	0.00	0.00
23,600.0	90.00	179.53	12,216.0	-11,273.6	-280.9	11,276.6	0.00	0.00	0.00
23,700.0	90.00	179.53	12,216.0	-11,373.5	-280.0	11,376.6	0.00	0.00	0.00
23,800.0	90.00	179.53	12,216.0	-11,473.5	-279.2	11,476.5	0.00	0.00	0.00
23,900.0	90.00	179.53	12,216.0	-11,573.5	-278.4	11,576.5	0.00	0.00	0.00
24,000.0	90.00	179.53	12,216.0	-11,673.5	-277.6	11,676.5	0.00	0.00	0.00
24,100.0	90.00	179.53	12,216.0	-11,773.5	-276.8	11,776.4	0.00	0.00	0.00
24,200.0	90.00	179.53	12,216.0	-11,873.5	-276.0	11,876.4	0.00	0.00	0.00
24,300.0	90.00	179.53	12,216.0	-11,973.5	-275.2	11,976.4	0.00	0.00	0.00
24,400.0	90.00	179.53	12,216.0	-12,073.5	-274.4	12,076.4	0.00	0.00	0.00
24,500.0	90.00	179.53	12,216.0	-12,173.5	-273.5	12,176.3	0.00	0.00	0.00

ConocoPhillips

Planning Report

Database:	EDT 15 Central Prod	Local Co-ordinate Reference:	Well PILEDRIIVER FEDERAL #714H
Company:	DELAWARE BASIN EAST	TVD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Project:	BULLDOG PROSPECT (NM-E)	MD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Site:	PILEDRIIVER & FIGURE FOUR FEDERAL PROJECT	North Reference:	Grid
Well:	PILEDRIIVER FEDERAL #714H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWPO		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
24,600.0	90.00	179.53	12,216.0	-12,273.5	-272.7	12,276.3	0.00	0.00	0.00
24,700.0	90.00	179.53	12,216.0	-12,373.5	-271.9	12,376.3	0.00	0.00	0.00
24,800.0	90.00	179.53	12,216.0	-12,473.5	-271.1	12,476.2	0.00	0.00	0.00
24,900.0	90.00	179.53	12,216.0	-12,573.5	-270.3	12,576.2	0.00	0.00	0.00
25,000.0	90.00	179.53	12,216.0	-12,673.5	-269.5	12,676.2	0.00	0.00	0.00
25,100.0	90.00	179.53	12,216.0	-12,773.5	-268.7	12,776.2	0.00	0.00	0.00
25,200.0	90.00	179.53	12,216.0	-12,873.5	-267.8	12,876.1	0.00	0.00	0.00
25,300.0	90.00	179.53	12,216.0	-12,973.5	-267.0	12,976.1	0.00	0.00	0.00
25,400.0	90.00	179.53	12,216.0	-13,073.5	-266.2	13,076.1	0.00	0.00	0.00
25,500.0	90.00	179.53	12,216.0	-13,173.5	-265.4	13,176.0	0.00	0.00	0.00
25,600.0	90.00	179.53	12,216.0	-13,273.5	-264.6	13,276.0	0.00	0.00	0.00
25,700.0	90.00	179.53	12,216.0	-13,373.5	-263.8	13,376.0	0.00	0.00	0.00
25,800.0	90.00	179.53	12,216.0	-13,473.5	-263.0	13,476.0	0.00	0.00	0.00
25,900.0	90.00	179.53	12,216.0	-13,573.5	-262.2	13,575.9	0.00	0.00	0.00
26,000.0	90.00	179.53	12,216.0	-13,673.5	-261.3	13,675.9	0.00	0.00	0.00
26,100.0	90.00	179.53	12,216.0	-13,773.5	-260.5	13,775.9	0.00	0.00	0.00
26,200.0	90.00	179.53	12,216.0	-13,873.5	-259.7	13,875.8	0.00	0.00	0.00
26,300.0	90.00	179.53	12,216.0	-13,973.5	-258.9	13,975.8	0.00	0.00	0.00
26,400.0	90.00	179.53	12,216.0	-14,073.5	-258.1	14,075.8	0.00	0.00	0.00
26,500.0	90.00	179.53	12,216.0	-14,173.5	-257.3	14,175.8	0.00	0.00	0.00
26,600.0	90.00	179.53	12,216.0	-14,273.5	-256.5	14,275.7	0.00	0.00	0.00
26,700.0	90.00	179.53	12,216.0	-14,373.4	-255.7	14,375.7	0.00	0.00	0.00
26,800.0	90.00	179.53	12,216.0	-14,473.4	-254.8	14,475.7	0.00	0.00	0.00
26,900.0	90.00	179.53	12,216.0	-14,573.4	-254.0	14,575.6	0.00	0.00	0.00
27,000.0	90.00	179.53	12,216.0	-14,673.4	-253.2	14,675.6	0.00	0.00	0.00
27,100.0	90.00	179.53	12,216.0	-14,773.4	-252.4	14,775.6	0.00	0.00	0.00
27,200.0	90.00	179.53	12,216.0	-14,873.4	-251.6	14,875.6	0.00	0.00	0.00
27,300.0	90.00	179.53	12,216.0	-14,973.4	-250.8	14,975.5	0.00	0.00	0.00
27,400.0	90.00	179.53	12,216.0	-15,073.4	-250.0	15,075.5	0.00	0.00	0.00
27,500.0	90.00	179.53	12,216.0	-15,173.4	-249.1	15,175.5	0.00	0.00	0.00
27,600.0	90.00	179.53	12,216.0	-15,273.4	-248.3	15,275.4	0.00	0.00	0.00
27,700.0	90.00	179.53	12,216.0	-15,373.4	-247.5	15,375.4	0.00	0.00	0.00
27,776.6	90.00	179.53	12,216.0	-15,450.0	-246.9	15,452.0	0.00	0.00	0.00
Start 50.0 hold at 27776.6 MD									
27,800.0	90.00	179.53	12,216.0	-15,473.4	-246.7	15,475.4	0.00	0.00	0.00
27,826.6	90.00	179.53	12,216.0	-15,500.0	-246.5	15,502.0	0.00	0.00	0.00
TD at 27826.6									

ConocoPhillips

Planning Report

Database:	EDT 15 Central Prod	Local Co-ordinate Reference:	Well PILEDRIVER FEDERAL #714H
Company:	DELAWARE BASIN EAST	TVD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Project:	BULLDOG PROSPECT (NM-E)	MD Reference:	*RKB 32ft + GL 3365.7ft @ 3397.7usft
Site:	PILEDRIVER & FIGURE FOUR FEDERAL PROJECT	North Reference:	Grid
Well:	PILEDRIVER FEDERAL #714H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OWB		
Design:	PWP0		

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FTP (PILEDRIVER FED - plan misses target center by 237.3usft at 12115.7usft MD (12046.3 TVD, 164.7 N, -373.9 E) - Circle (radius 50.0)	0.00	0.00	12,216.0	330.6	-375.2	398,512.20	709,020.30	32° 5' 37.780 N	103° 39' 30.173 W
PBHL (PILEDRIVER FE - plan misses target center by 0.1usft at 27826.6usft MD (12216.0 TVD, -15500.0 N, -246.5 E) - Rectangle (sides W100.0 H15,833.5 D20.0)	0.00	179.53	12,216.0	-15,500.0	-246.4	382,681.60	709,149.10	32° 3' 1.113 N	103° 39' 29.827 W
LTP (PILEDRIVER FED - plan hits target center - Point	0.00	0.00	12,216.0	-15,450.0	-246.9	382,731.60	709,148.60	32° 3' 1.608 N	103° 39' 29.829 W





Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
1,500.0	1,500.0	0.0	0.0	Start Build 2.00	
1,799.9	1,799.4	10.4	-11.8	Start 4334.5 hold at 1799.9 MD	
6,134.5	6,110.2	309.9	-351.7	Start Drop -1.00	
6,734.4	6,709.0	330.6	-375.2	Start 4934.0 hold at 6734.4 MD	
11,668.4	11,643.0	330.6	-375.2	Start DLS 10.00 TFO 179.53	
12,568.4	12,216.0	-242.3	-370.5	Start 15208.2 hold at 12568.4 MD	
27,776.6	12,216.0	-15,450.0	-246.9	Start 50.0 hold at 27776.6 MD	
27,826.6	12,216.0	-15,500.0	-246.5	TD at 27826.6	





Project: BULLDOG PROSPECT (NM-E)
Site: PILEDRIVER & FIGURE FOUR FEDERAL PROJECT
Well: PILEDRIVER FEDERAL #714H
Wellbore: OWB
Design: PWP0
GL: 3365.7
*RKB 32ft + GL 3365.7ft @ 3397.7usft

WELL DETAILS: PILEDRIVER FEDERAL #714H					
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.0	0.0	398181.60	709395.50	32° 5' 34.485 N	103° 39' 25.836 W



DESIGN TARGET DETAILS					
Name	TVD	+N/-S	+E/-W	Northing	Easting
FTP (PILEDRIVER FEDERAL #714H)	12216.0	330.6	-375.2	398512.20	709020.30
LTP (PILEDRIVER FEDERAL #714H)	12216.0	-15450.0	-246.9	382731.60	709148.60
PBHL (PILEDRIVER FEDERAL #714H)	12216.0	-15500.0	-246.4	382681.60	709149.10
Shape					
Circle (Radius: 50.0)					
Point					
Rectangle (Sides: L15833.5 W100.0)					

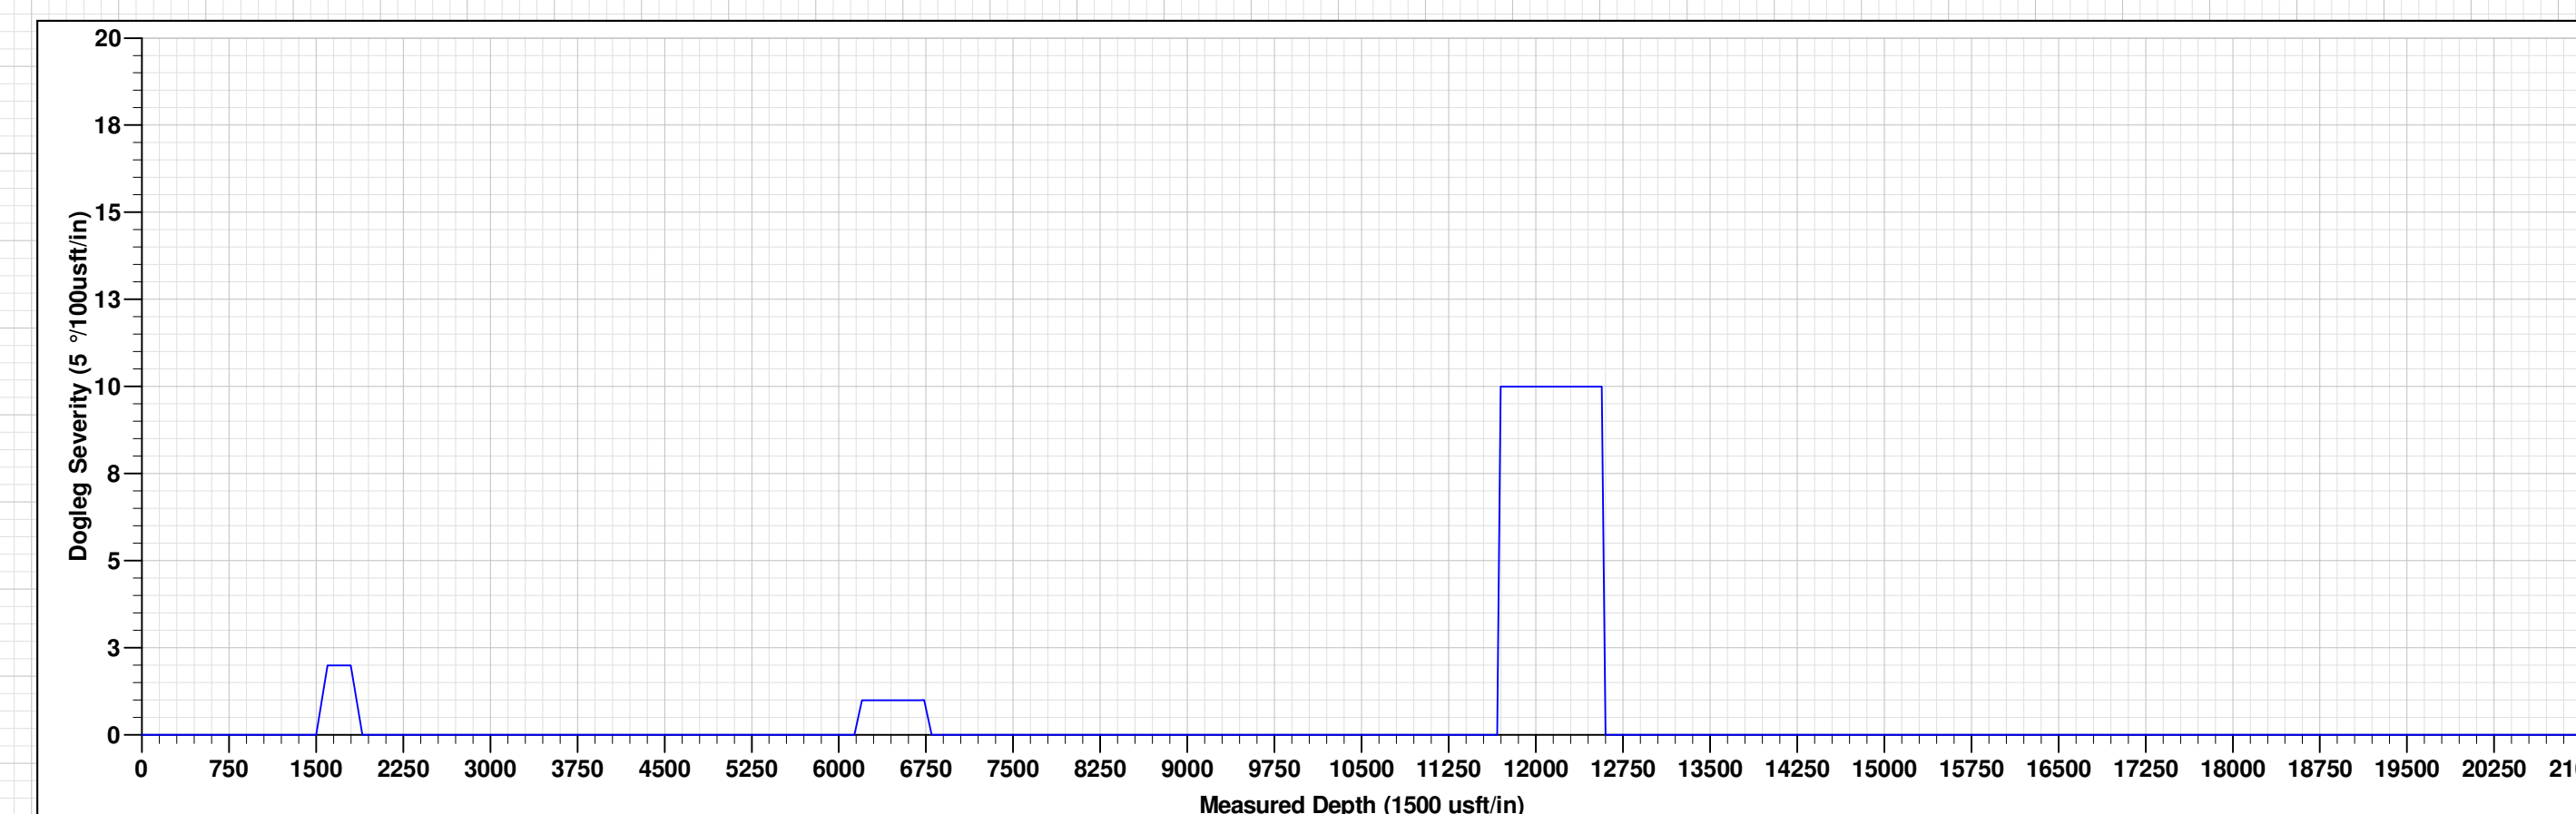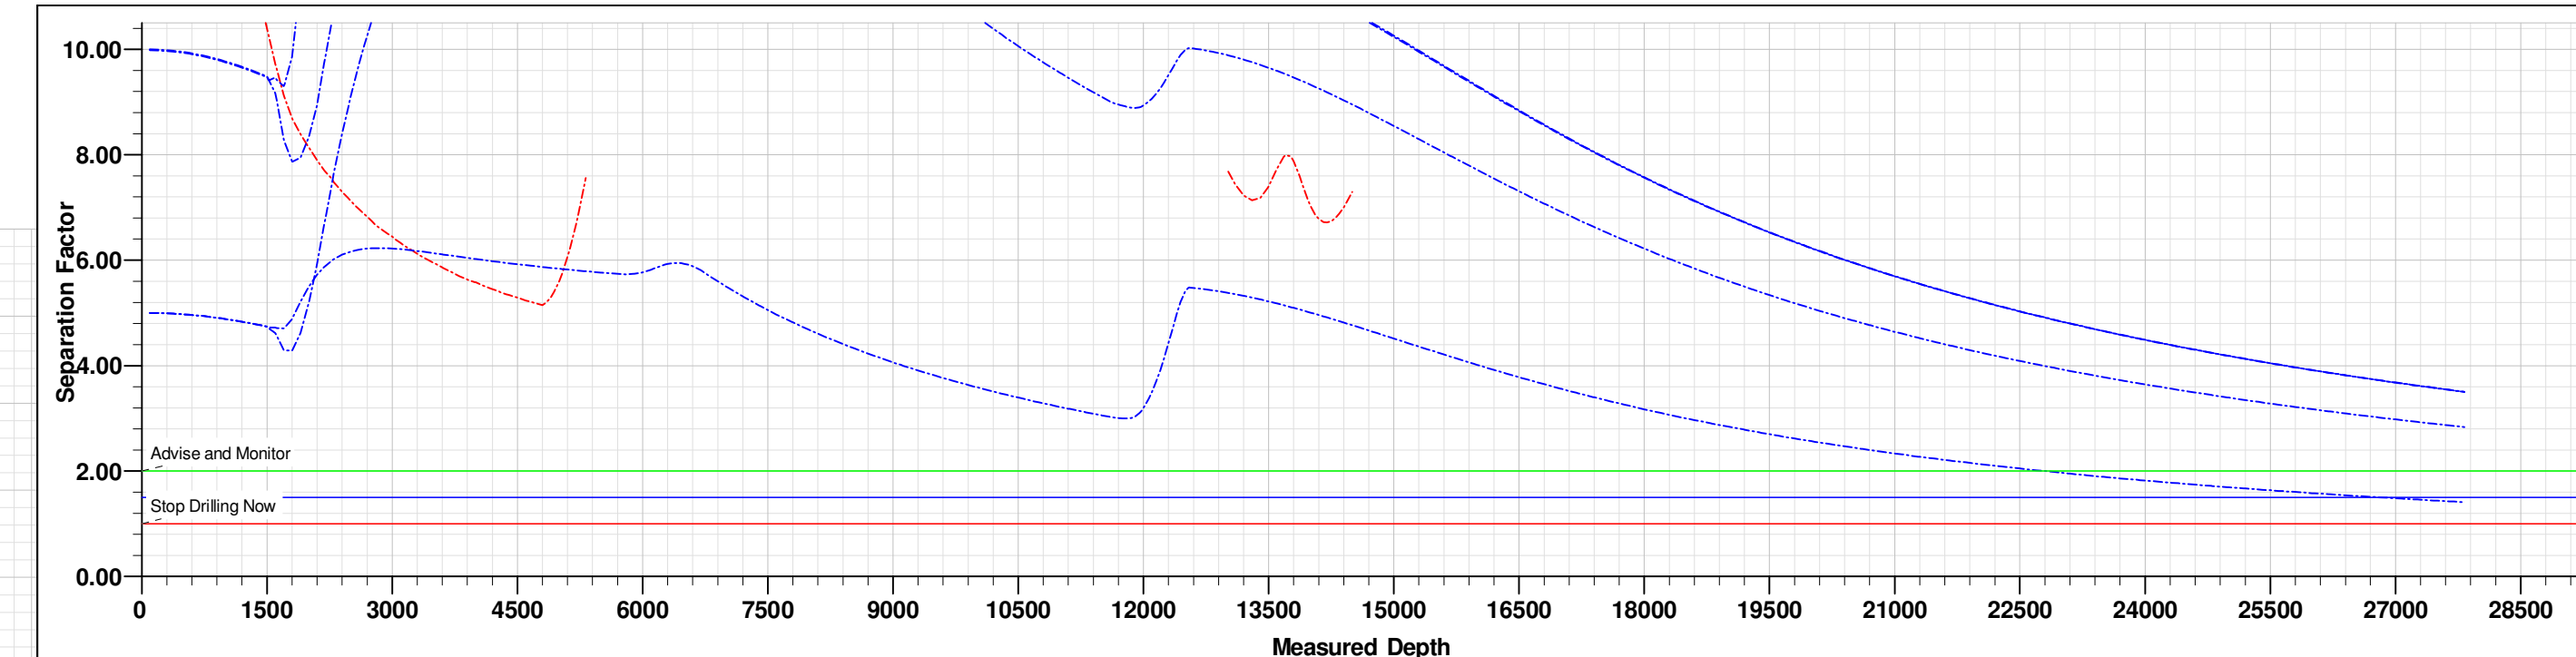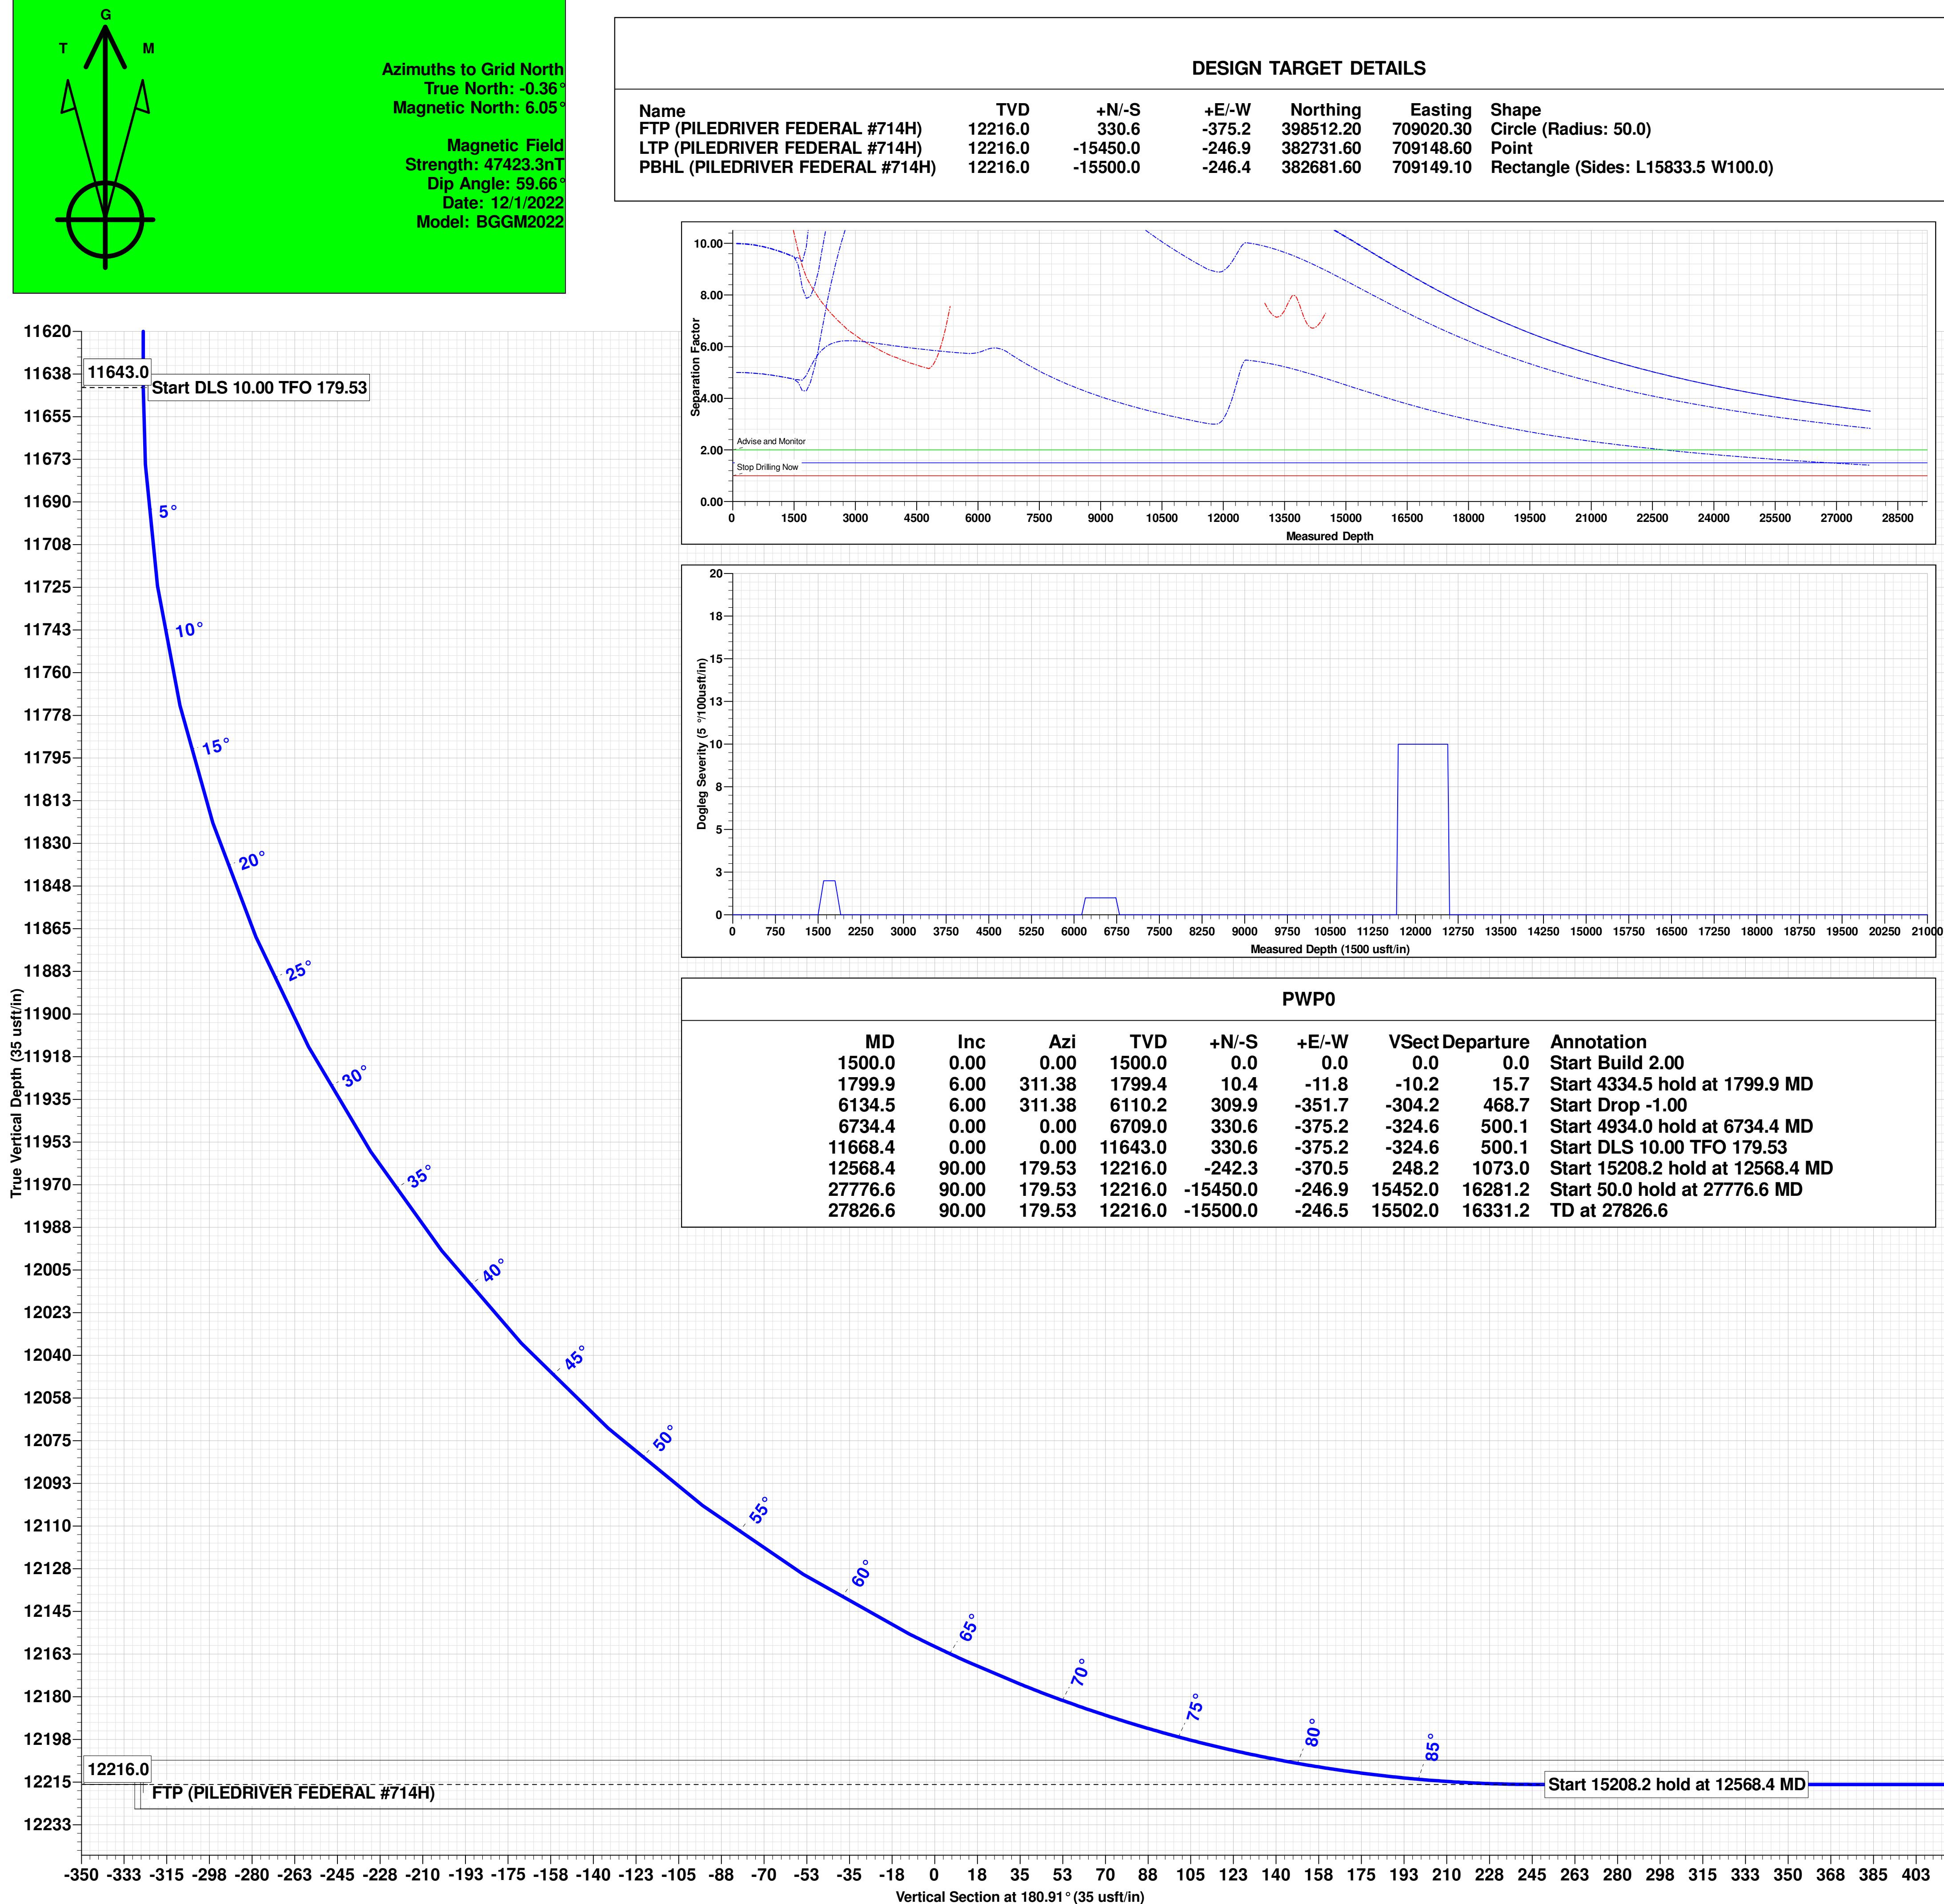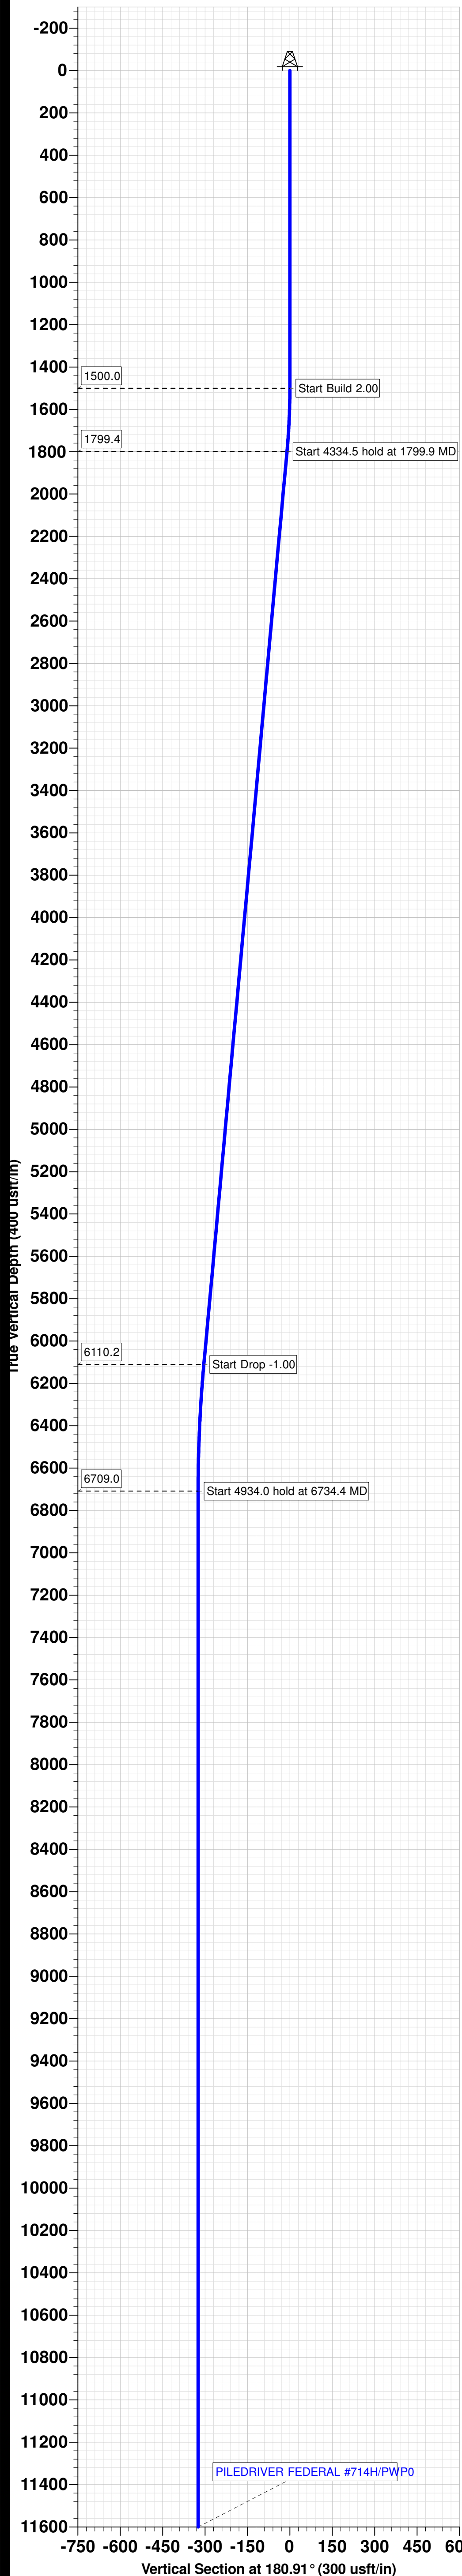

PWP0									
MD	Inc	Azi	TVD	+N/-S	+E/-W	Vsect	Departure	Annotation	
1500.0	0.00	0.00	1500.0	0.0	0.0	0.0	0.0	Start Build 2.00	
1799.9	6.00	311.38	1799.4	10.4	-11.8	-10.2	15.7	Start 4334.5 hold at 1799.9 MD	
6134.5	6.00	311.38	6110.2	309.9	-351.7	-304.2	468.7	Start Drop -1.00	
6734.4	0.00	0.00	6709.0	330.6	-375.2	-324.6	500.1	Start 4934.0 hold at 6734.4 MD	
11668.4	0.00	0.00	11643.0	330.6	-375.2	-324.6	500.1	Start DLS 10.00 TFO 179.53	
12568.4	90.00	179.53	12216.0	-242.3	-370.5	248.2	1073.0	Start 15208.2 hold at 12568.4 MD	
27776.6	90.00	179.53	12216.0	-15450.0	-246.9	15452.0	16261.2	Start 50.0 hold at 27776.6 MD	
27826.6	90.00	179.53	12216.0	-15500.0	-246.5	15502.0	16331.2	TD at 27826.6	

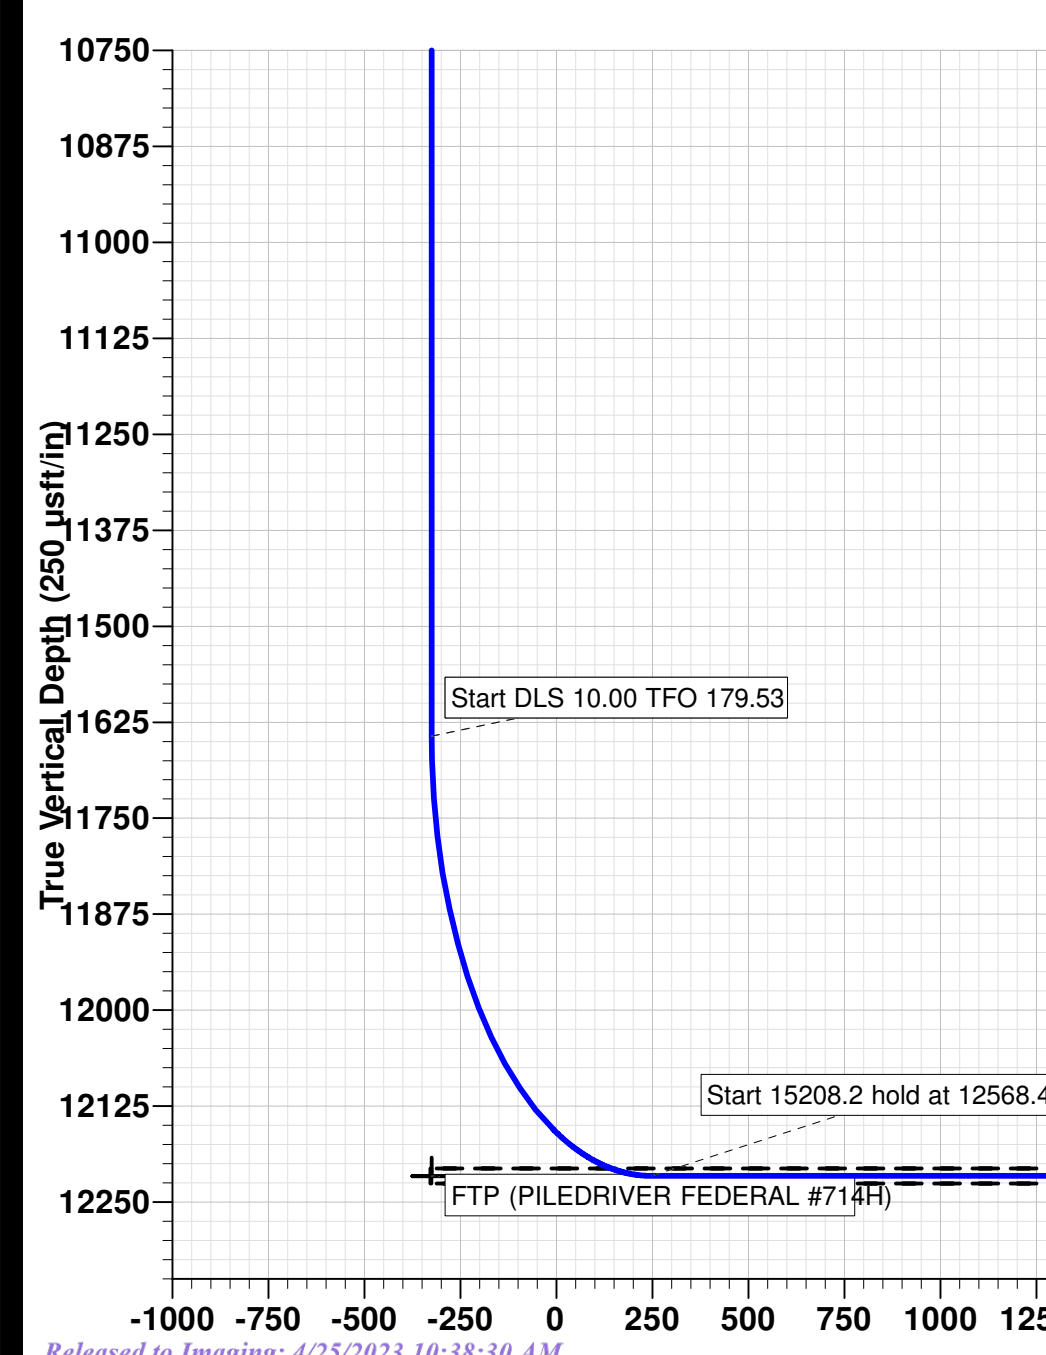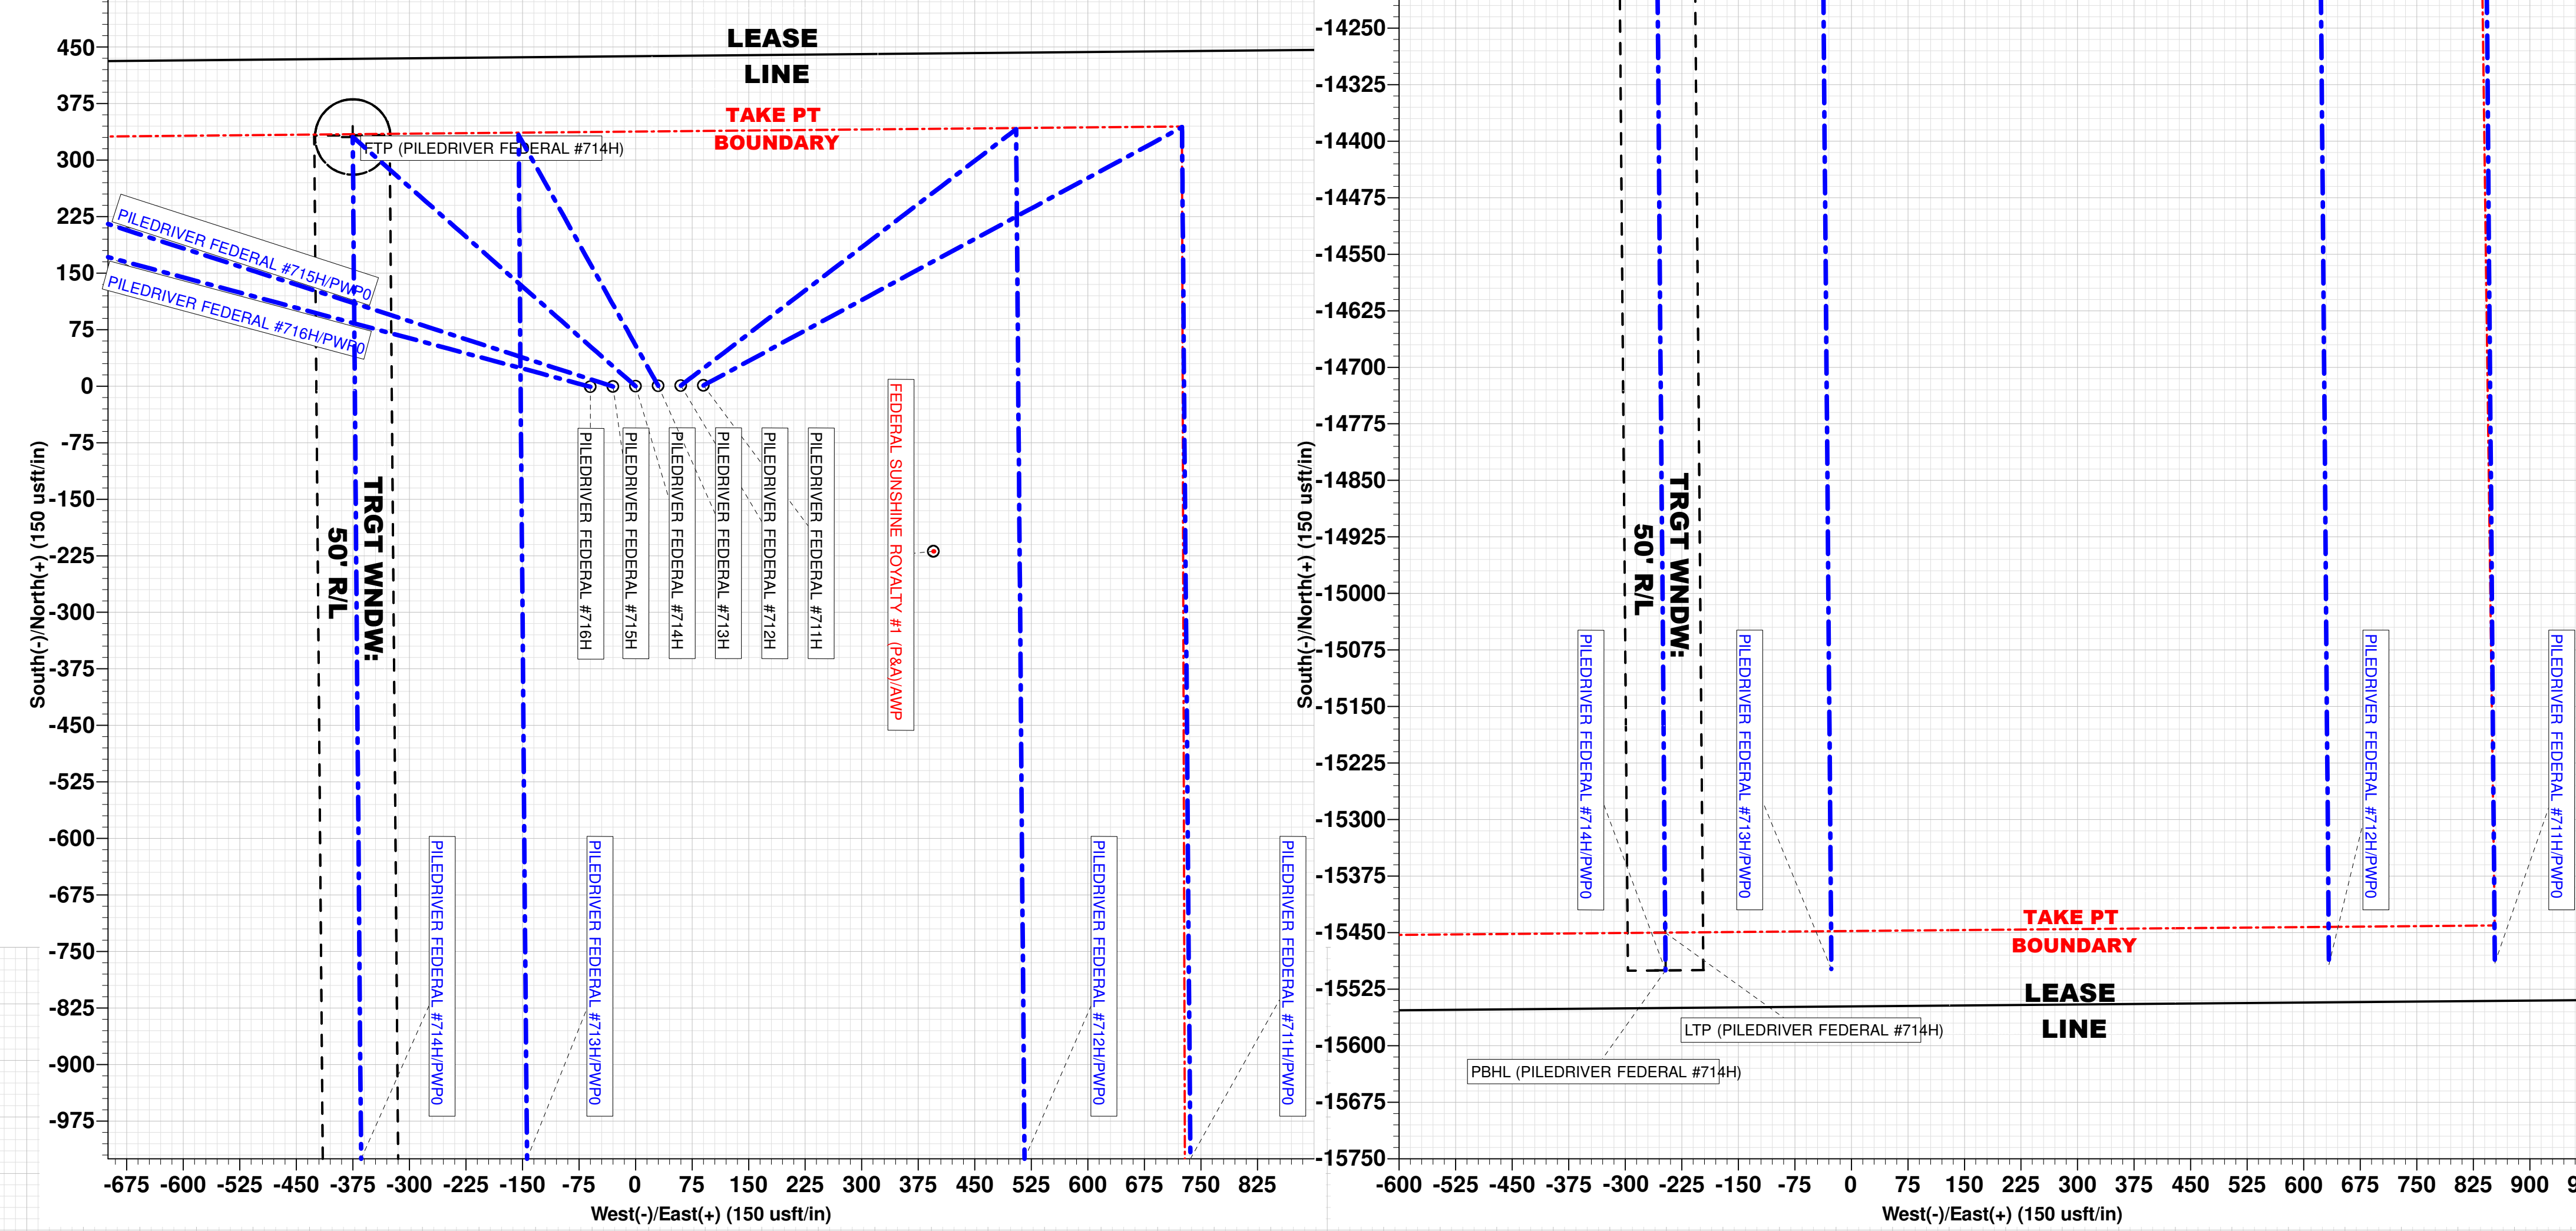

TRGT WNDW:
10' A/B

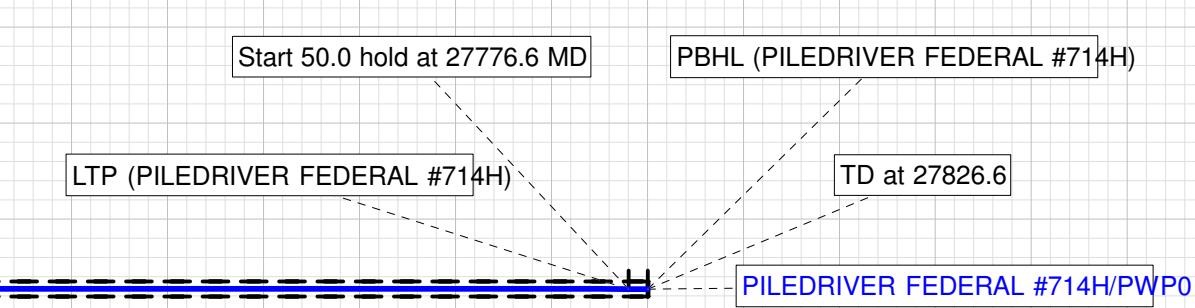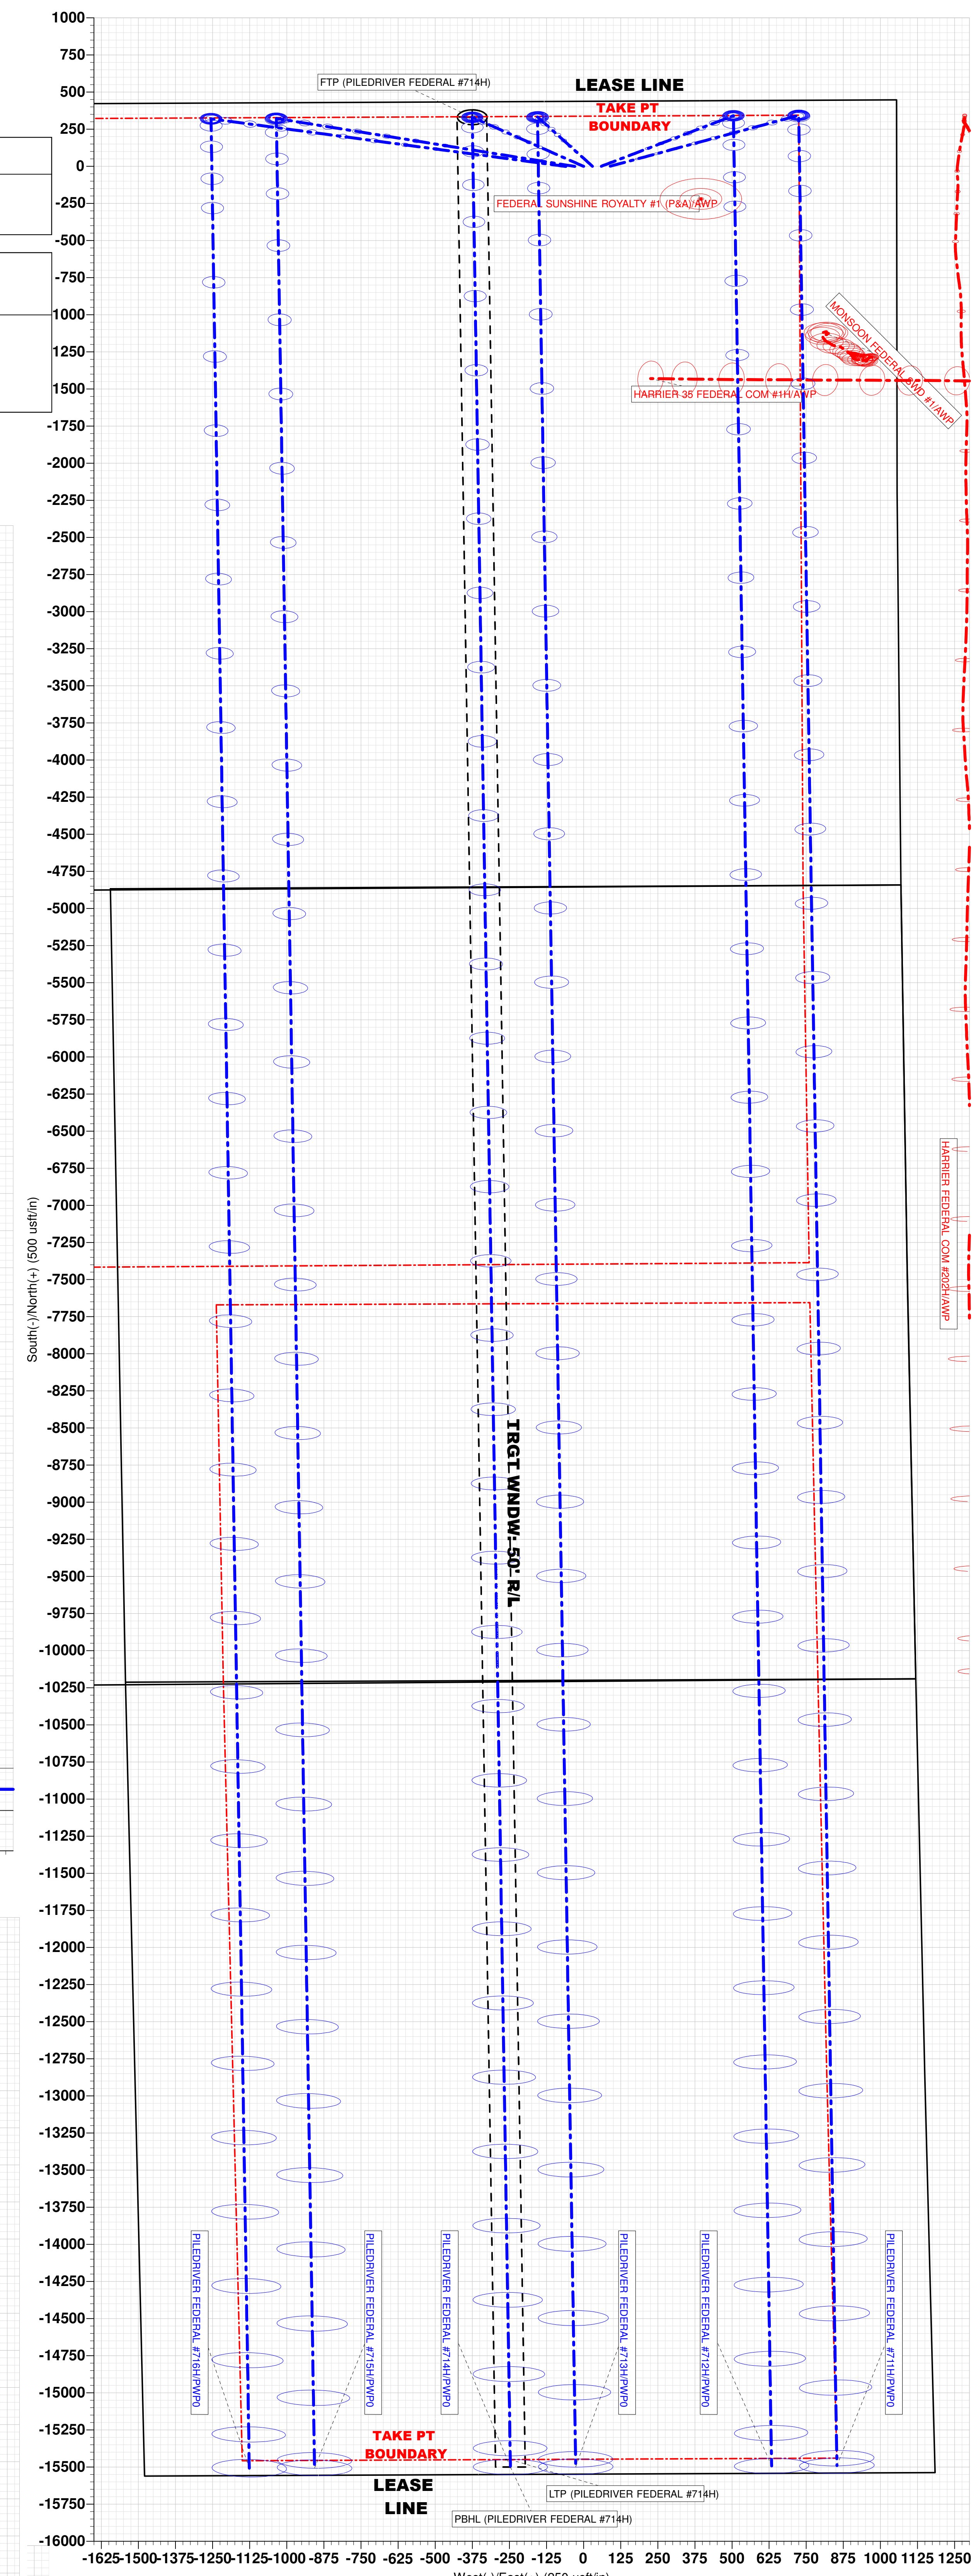

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	COG
LEASE NO.:	NMNM108972
LOCATION:	Section 34, T.25 S., R.32 E., NMPPM
COUNTY:	Lea County, New Mexico

WELL NAME & NO.:	Piledriver Fed Com 714H
SURFACE HOLE FOOTAGE:	435'/N & 1055'/E
BOTTOM HOLE FOOTAGE:	50'/S & 1430'/E

COA

H2S	☒ Yes	☐ No	
Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☐ Low	☒ Medium	☐ High
Cave/Karst Potential	☐ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☒ Multibowl	☐ Both
Other	☐ 4 String Area	☐ Capitan Reef	☐ WIPP
Other	☐ Fluid Filled	☐ Cement Squeeze	☐ Pilot Hole
Special Requirements	☐ Water Disposal	☒ COM	☐ Unit

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into the **Delaware Group** formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The **10-3/4** inch surface casing shall be set at approximately **1250** feet (a minimum of **25 feet (Lea County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8**

- hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the 7-5/8 inch intermediate casing is:
- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Excess calculates to 20%. Additional cement maybe requiried.**
- Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst.**
- ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. **Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).**
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)**Communitization Agreement**

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.

- Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.

5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall

have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.

- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

ZS022123

COG OPERATING LLC
HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream we will shut in and install H₂S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.

- b. Protective equipment for essential personnel:
Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H2S detection and monitoring equipment:
2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.

COG OPERATING LLC has conducted a review to determine if an H2S contingency plan is required for the above referenced well. We were able to conclude that any potential hazardous volume would be minimal. H2S concentrations of wells in this area from surface to TD are low enough; therefore, we do not believe that an H2S contingency plan is necessary.

W A R N I N G

**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED***
- 2. HARD HATS REQUIRED***
- 3. SMOKING IN DESIGNATED AREAS ONLY***
- 4. BE WIND CONSCIOUS AT ALL TIMES***
- 5. CK WITH COG OPERATING LLC FOREMAN AT MAIN OFFICE***

COG OPERATING LLC

1-575-748-6940

EMERGENCY CALL LIST

OFFICE

COG OPERATING LLC OFFICE	575-748-6940
DALLAS DALEY	432-818-2329

EMERGENCY RESPONSE NUMBERS

OFFICE

STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451

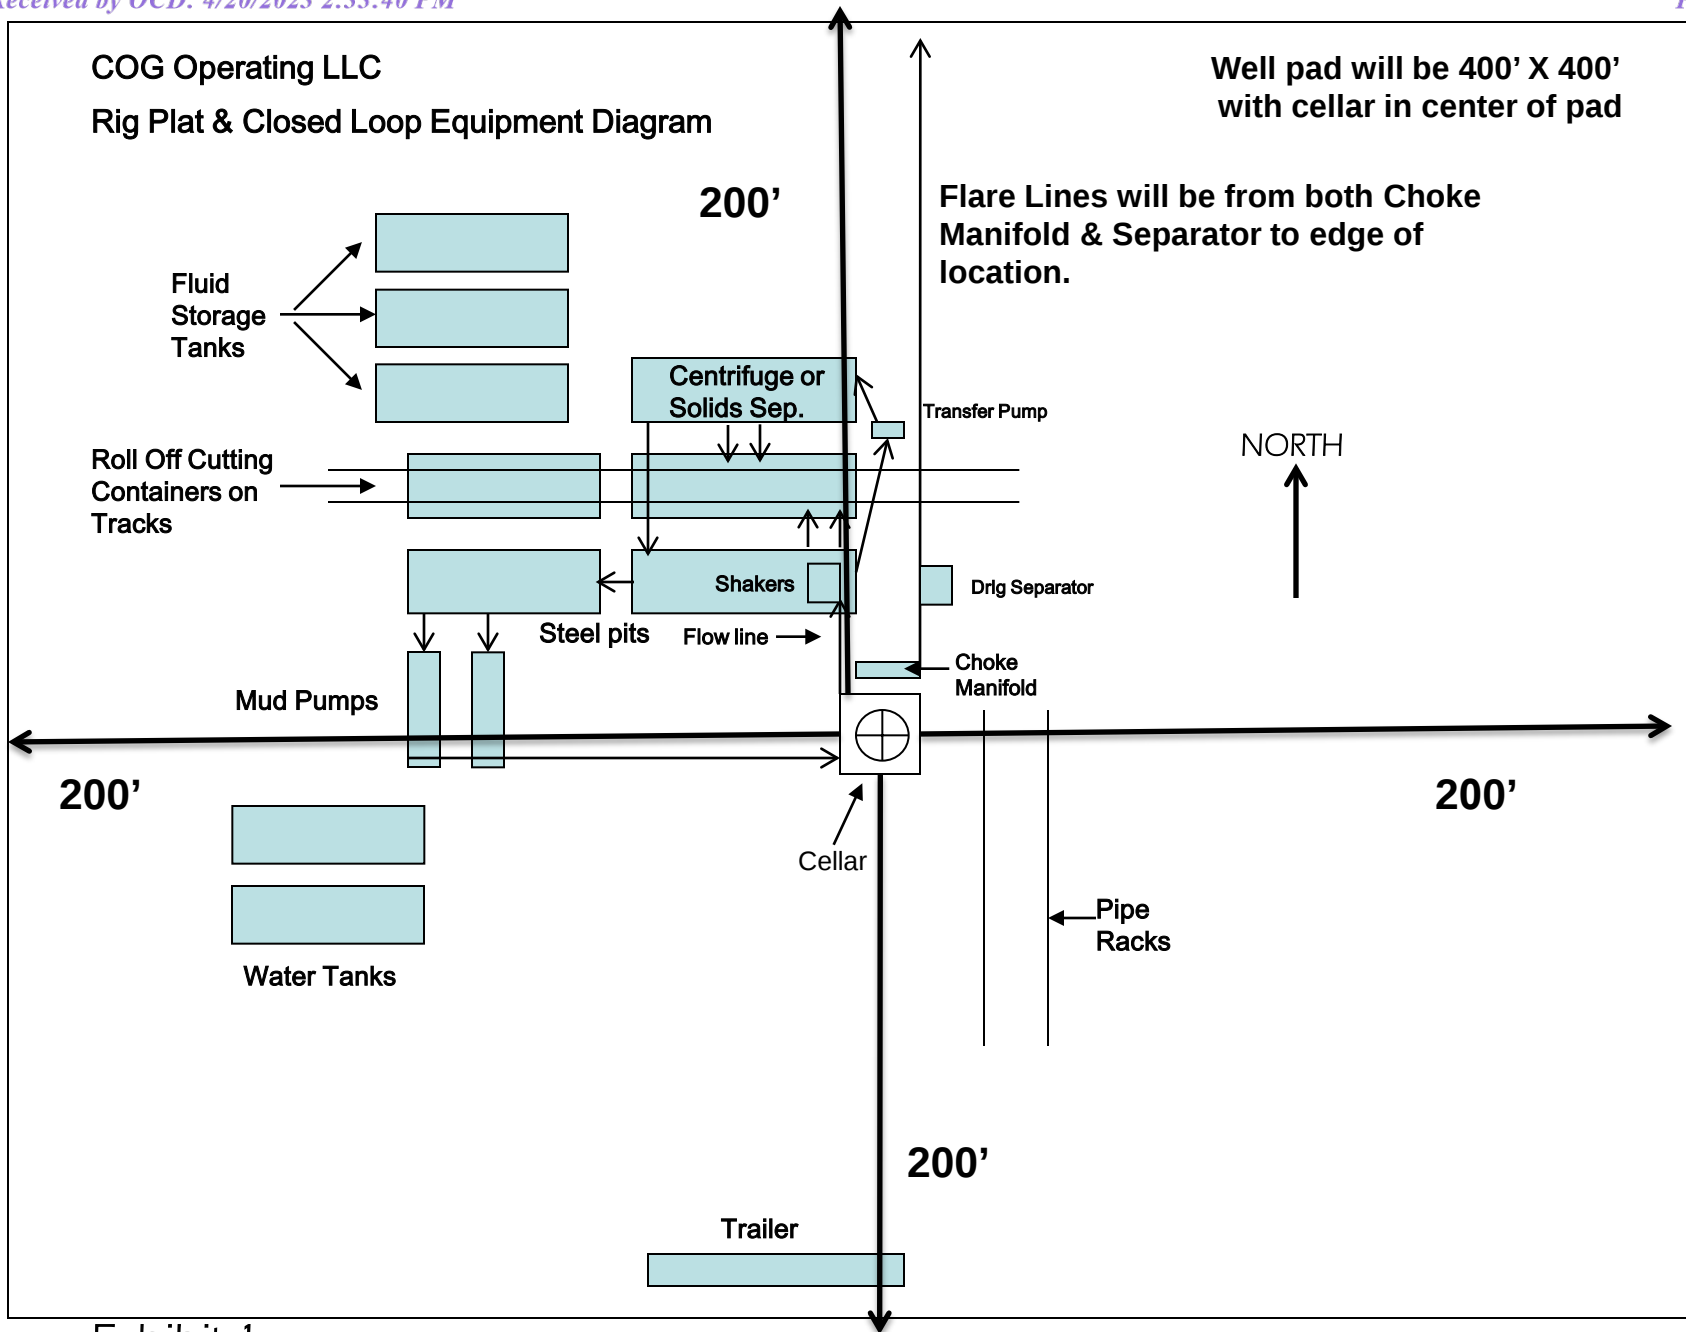


Exhibit 1

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

COG Operating, LLC - Piledriver Federal Com 714H

1. Geologic Formations

TVD of target	12,216' EOL	Pilot hole depth	NA
MD at TD:	27,827'	Deepest expected fresh water:	405'

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Quaternary Fill	Surface	Water	
Rustler	1033	Water	
Top of Salt	1365	Salt	
Base of Salt	4425	Salt	
Lamar	4676	Salt Water	
Bell Canyon	4720	Salt Water	
Cherry Canyon	5737	Oil/Gas	
Brushy Canyon	7108	Oil/Gas	
BSPG	8815	Oil/Gas	
BS1S	10024	Oil/Gas	
BS1SH	10398	Oil/Gas	
BS2S	10891	Oil/Gas	
BS3C	11557	Oil/Gas	
WFMP	11999	Oil/Gas	
Wolfcamp A Shale	12216	Target Oil/Gas	

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Body	SF Joint
	From	To								
14.75"	0	1315	10.75"	45.5	J55	BTC	3.47	1.08	11.95	13.30
9.875"	0	8500	7.625"	29.7	L80-ICY	BTC	1.42	1.10	2.88	2.88
8.750"	8500	11,600	7.625"	29.7	P110-ICY	W513	1.30	1.66	3.10	1.86
6.75"	0	11100	5.5"	23	P110-CY	TXP BTC	2.03	2.40	2.86	2.86
6.75"	11100	27,827	5.5"	23	P110-CY	W441	1.85	2.18	2.59	2.36
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Surface burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface and

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

The 5 1/2" W441 casing will be run back at least 200' into the intermediate casing to ensure the coupling OD clearance is greater than .422" for the cement bond tie in.

COG Operating, LLC - Piledriver Federal Com 714H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary?	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

COG Operating, LLC - Piledriver Federal Com 714H

3. Cementing Program

Casing	# Sk	Wt. lb/ gal	Yld ft3/ sack	H ₂ O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surf.	627	13.5	1.75	9	12	Lead: Class C + 4% Gel + 1% CaCl ₂
	250	14.8	1.34	6.34	8	Tail: Class C + 2% CaCl ₂
Inter.	780	10.5	3.5	22.3	24	NeoCem
Stage 1	250	16.4	1.08	4.52	7	Tail: Class H
Prod	515	12.7	2	10.7	72	Lead: 50:50:10 H Blend
	1577	14.4	1.24	5.7	19	Tail: 50:50:2 Class H Blend

If losses are encountered in the intermediate section a DV/ECP tool will be run ~50' above the Lamar Lime top, cement will be adjusted accordingly if this contingency is necessary.

Volumes Subject to Observed Hole Conditions and/or Fluid Caliper Results

Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Casing String	TOC	% Excess
Surface	0'	50%
1 st Intermediate	0'	50%
Production	11,100'	35% OH in Lateral (KOP to EOL)

COG Operating, LLC - Piledriver Federal Com 714H

4. Pressure Control Equipment

N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.
---	---

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	x	Tested to:
9-7/8"	13-5/8"	5M	Annular	x	2500psi
			Blind Ram	x	5000psi
			Pipe Ram	x	
			Double Ram	x	
			Other*		
6-3/4"	13-5/8"	10M	5M Annular	x	5000psi
			Blind Ram	x	10000psi
			Pipe Ram	x	
			Double Ram	x	
			Other*		

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

Y	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?
Y	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

COG Operating, LLC - Piledriver Federal Com 714H

5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	Surf. Shoe	FW Gel	8.6 - 8.8	28-34	N/C
Surf csg	7-5/8" Int shoe	Brine Diesel Emulsion	8.4 - 9.4	28-34	N/C
7-5/8" Int shoe	Lateral TD	OBM	12 - 12.4	35-45	<20

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.	
Y	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
Y	No Logs are planned based on well control or offset log information.
N	Drill stem test? If yes, explain.
N	Coring? If yes, explain.

Additional logs planned		Interval
N	Resistivity	Pilot Hole TD to ICP
N	Density	Pilot Hole TD to ICP
Y	CBL	Production casing (If cement not circulated to surface)
Y	Mud log	Intermediate shoe to TD
N	PEX	

COG Operating, LLC - Piledriver Federal Com 714H**7. Drilling Conditions**

Condition	Specify what type and where?
BH Pressure at deepest TVD	7880 psi at 12216' TVD
Abnormal Temperature	NO 175 Deg. F.

No abnormal pressure or temperature conditions are anticipated. Sufficient mud materials to maintain mud properties and weight increase requirements will be kept on location at all times.

Sufficient supplies of Paper/LCM for periodic sweeps to control seepage and losses will be maintained on location.

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N H₂S is present

Y H₂S Plan attached


8. Other Facets of Operation

Y	Is it a walking operation?
Y	Is casing pre-set?


x	H ₂ S Plan.
x	BOP & Choke Schematics.
x	Directional Plan

5M BOP Stack


10M REMOTE KILL SCHEMATIC

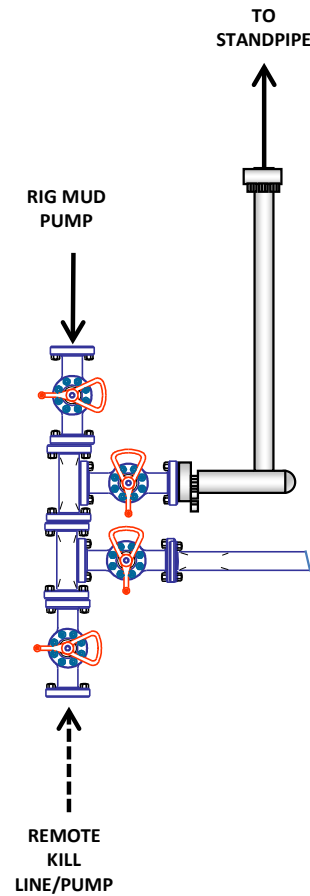


5M BOP Stack (2.5M Annular)

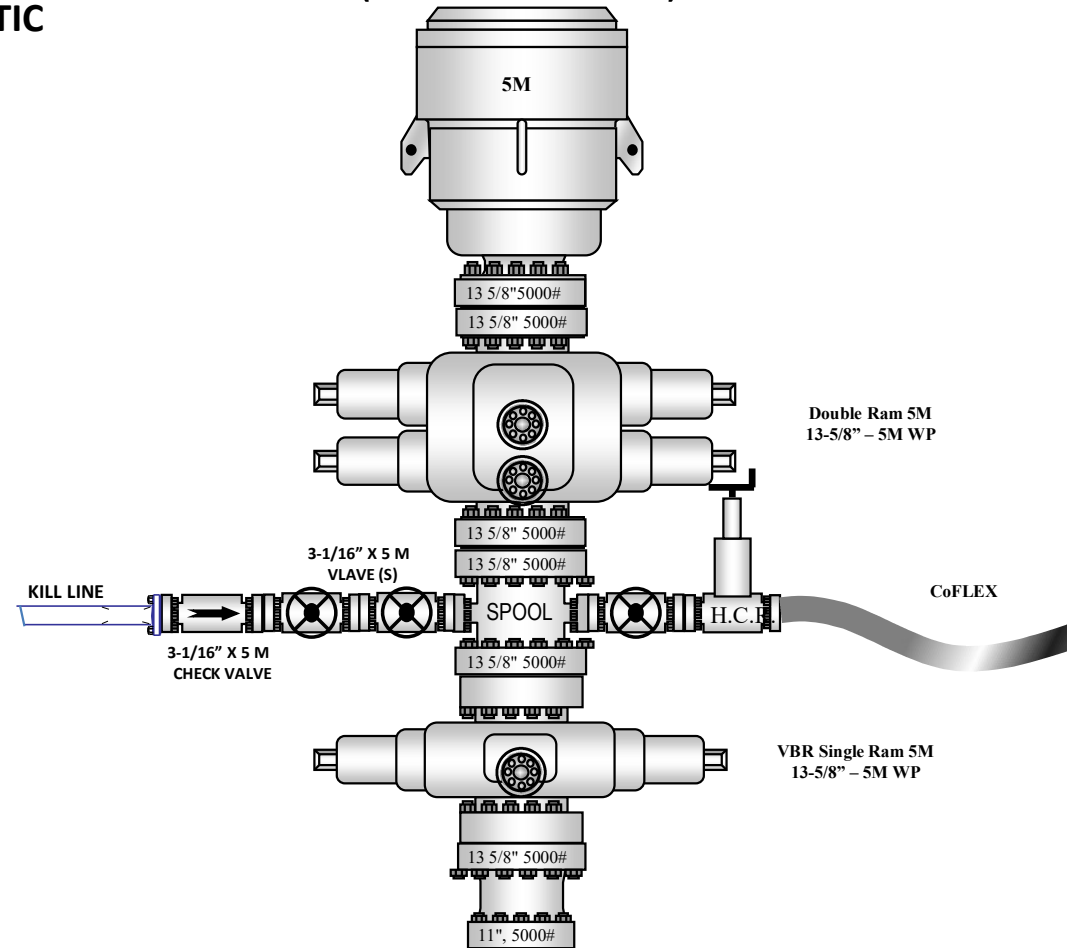


5M Choke Manifold Equipment (WITH MGS + CLOSED LOOP)

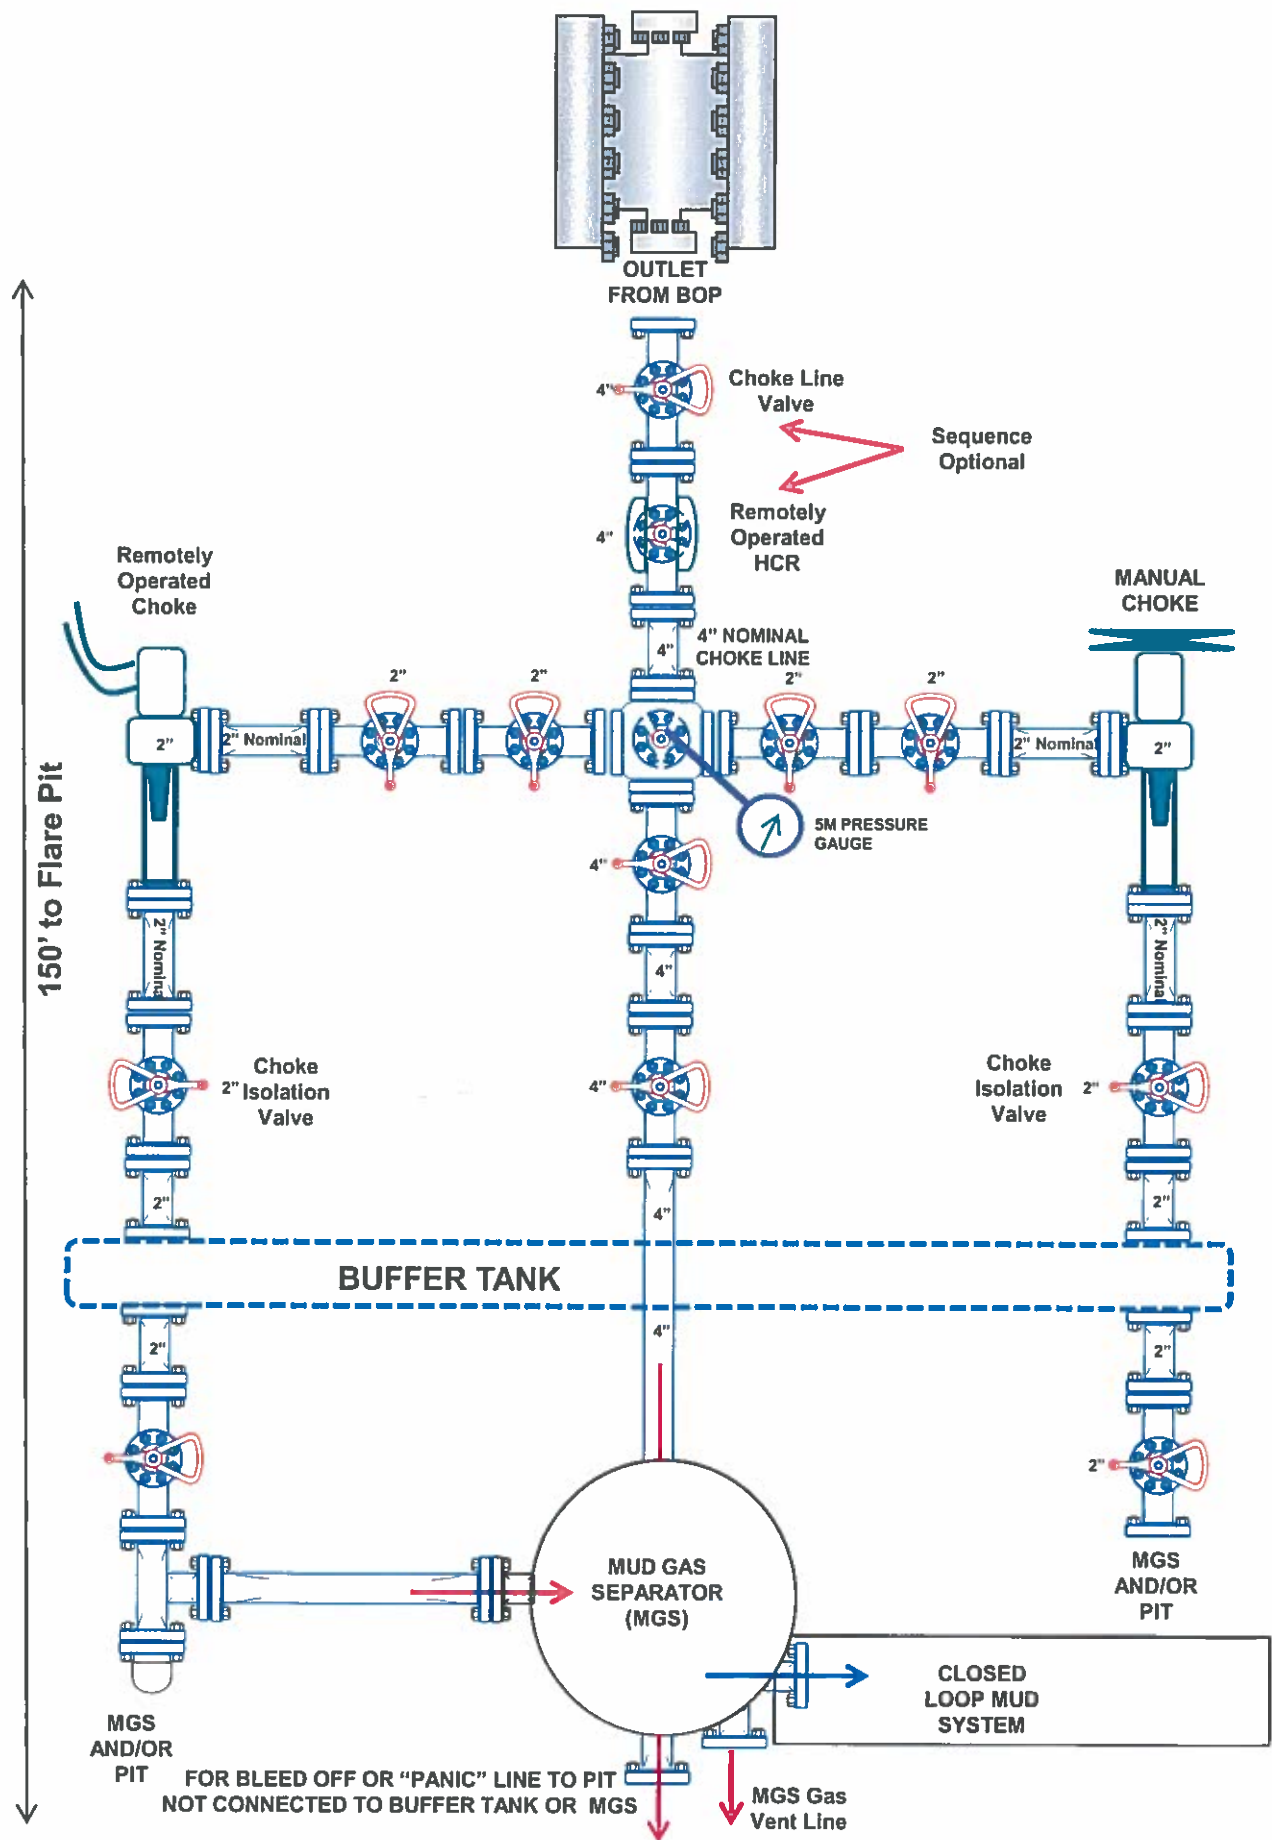

10M REMOTE KILL SCHEMATIC

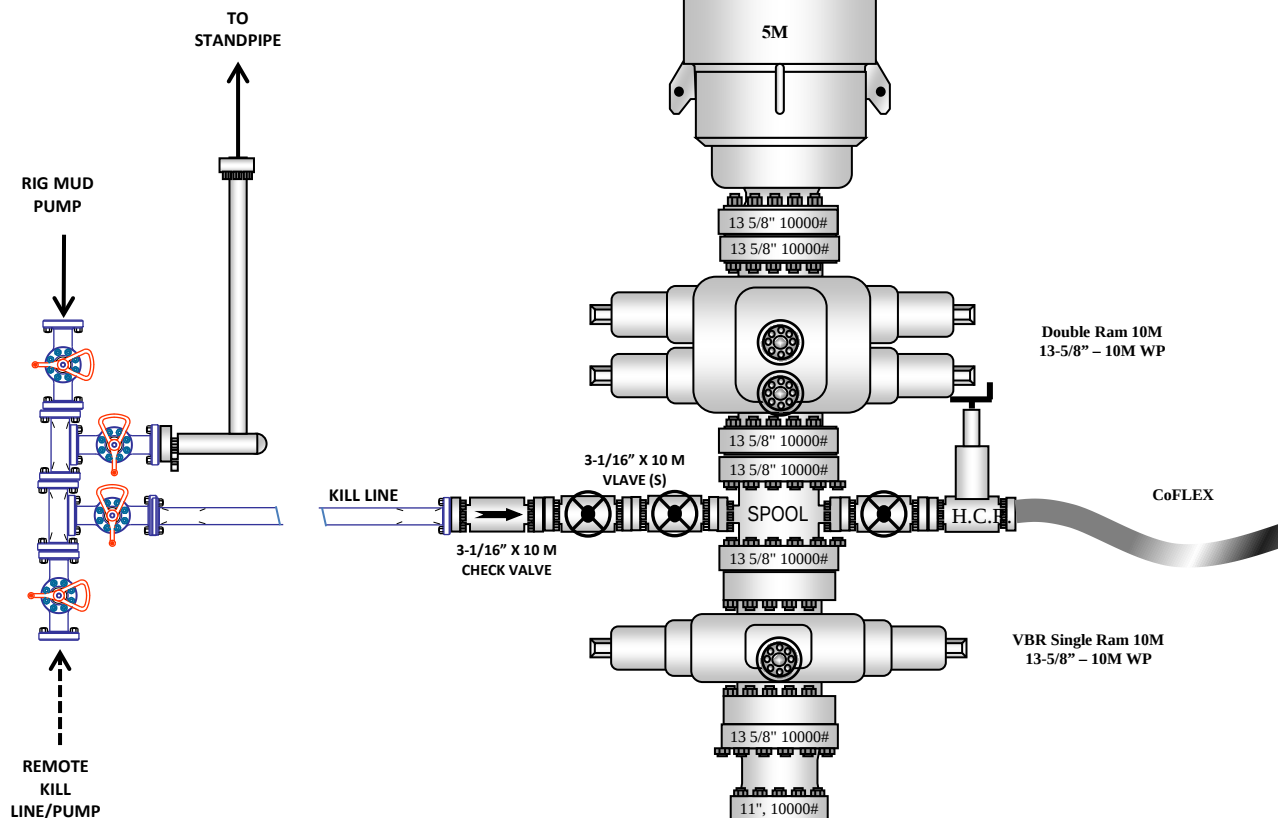

10M CHOKE MANIFOLD CONFIGURATION

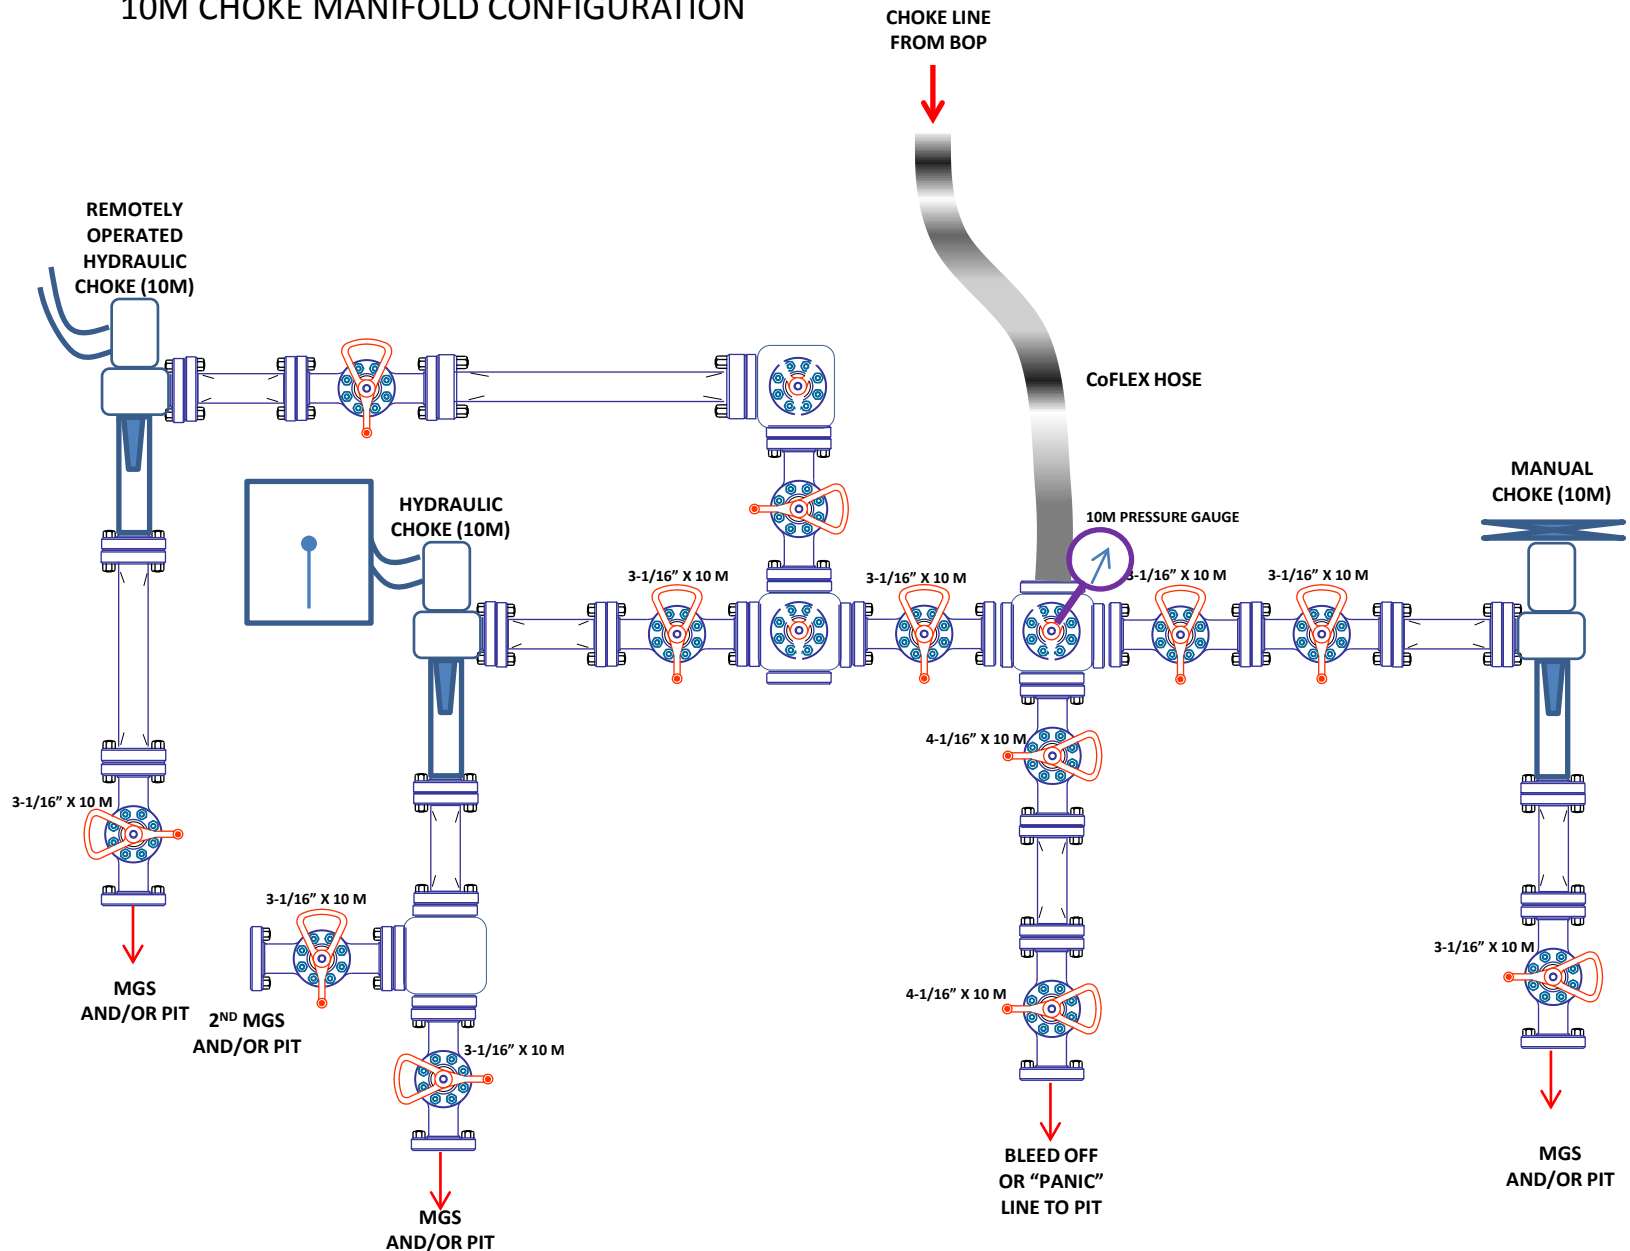

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 209479

CONDITIONS

Operator: COG OPERATING LLC 600 W Illinois Ave Midland, TX 79701	OGRID: 229137
	Action Number: 209479
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104	4/25/2023
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	4/25/2023
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system	4/25/2023
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing	4/25/2023