



U.S. Department of the Interior
Bureau of Land Management

Application for Permit to Drill

APD Package Report

Date Printed:

APD ID:	Well Status:
APD Received Date:	Well Name:
Operator:	Well Number:

APD Package Report Contents

- Form 3160-3
- Operator Certification Report
- Application Report
- Application Attachments
 - Well Plat: 1 file(s)
- Drilling Plan Report
- Drilling Plan Attachments
 - Blowout Prevention Choke Diagram Attachment: 1 file(s)
 - Blowout Prevention BOP Diagram Attachment: 1 file(s)
 - Casing Spec Documents: 2 file(s)
 - Casing Design Assumptions and Worksheet(s): 4 file(s)
 - Hydrogen sulfide drilling operations plan: 1 file(s)
 - Proposed horizontal/directional/multi-lateral plan submission: 3 file(s)
 - Other Facets: 1 file(s)
 - Other Variances: 2 file(s)
- SUPO Report
- SUPO Attachments
 - Existing Road Map: 1 file(s)
 - New Road Map: 1 file(s)
 - Attach Well map: 1 file(s)
 - Production Facilities map: 1 file(s)
 - Water source and transportation map: 1 file(s)
 - Construction Materials source location attachment: 1 file(s)
 - Well Site Layout Diagram: 1 file(s)
 - Recontouring attachment: 1 file(s)
 - Other SUPO Attachment: 2 file(s)
- PWD Report
- PWD Attachments

-- None

- Bond Report

- Bond Attachments

-- None

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☐ DRILL ☐ REENTER 1b. Type of Well: ☐ Oil Well ☐ Gas Well ☐ Other 1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☐ Multiple Zone		5. Lease Serial No. 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No.
2. Name of Operator		9. API Well No. 30-015-54157
3a. Address	3b. Phone No. (include area code)	10. Field and Pool, or Exploratory
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		11. Sec., T. R. M. or Blk. and Survey or Area
14. Distance in miles and direction from nearest town or post office*		12. County or Parish
13. State		
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No of acres in lease	17. Spacing Unit dedicated to this well
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed Depth	20. BLM/BIA Bond No. in file
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will start*	23. Estimated duration
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature	Name (Printed/Typed)	Date
Title		
Approved by (Signature)	Name (Printed/Typed)	Date
Title		
Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to an evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: NENE / 794 FNL / 482 FEL / TWSP: 20S / RANGE: 28E / SECTION: 8 / LAT: 32.5931862 / LONG: -104.1925653 (TVD: 0 feet, MD: 0 feet)

PPP: NWNW / 990 FNL / 100 FWL / TWSP: 20S / RANGE: 28E / SECTION: 9 / LAT: 32.5926511 / LONG: -104.1906854 (TVD: 8493 feet, MD: 8824 feet)

PPP: NWNW / 990 FNL / 0 FEL / TWSP: 20S / RANGE: 28E / SECTION: 10 / LAT: 32.5927353 / LONG: -104.1737074 (TVD: 8494 feet, MD: 14053 feet)

PPP: NWNW / 990 FNL / 0 FEL / TWSP: 20S / RANGE: 28E / SECTION: 9 / LAT: 32.5926922 / LONG: -104.1823591 (TVD: 8494 feet, MD: 11388 feet)

BHL: NENE / 990 FNL / 10 FEL / TWSP: 29S / RANGE: 28E / SECTION: 10 / LAT: 32.5928193 / LONG: -104.1564892 (TVD: 8494 feet, MD: 19356 feet)

BLM Point of Contact

Name: GAVIN MICKWEE

Title: Land Law Examiner

Phone: (575) 234-5972

Email: gmickwee@blm.gov

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Colgate
LEASE NO.:	NMNM137444
LOCATION:	Section 8, T.20 S, R.28 E., NMPM
COUNTY:	Eddy County, New Mexico
WELL NAME & NO.:	Koala 9 Fed Com 131H
SURFACE HOLE FOOTAGE:	794'/N & 482'/E
BOTTOM HOLE FOOTAGE:	990'/N & 10'/E

COA

H₂S	☒ Yes	☐ No		
Potash / WIPP	☒ None	☐ Secretary	☐ R-111-P	☐ WIPP
Cave / Karst	☐ Low	☐ Medium	☒ High	☐ Critical
Wellhead	☐ Conventional	☒ Multibowl	☐ Both	☐ Diverter
Cementing	☐ Primary Squeeze	☐ Cont. Squeeze	☐ EchoMeter	☐ DV Tool
Special Req	☐ Break Testing	☐ Water Disposal	☒ COM	☐ Unit
Variance	☒ Flex Hose	☐ Casing Clearance	☐ Pilot Hole	☒ Capitan Reef
Variance	☐ Four-String	☒ Offline Cementing	☐ Fluid-Filled	☐ Open Annulus
☐ Batch APD / Sundry				

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated 500 feet prior to drilling into the **Delaware Group** formation. As a result, the Hydrogen Sulfide area must meet all requirements from **43 CFR 3176**, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The **13-3/8** inch surface casing shall be set at approximately **340** feet (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface. **Excess calculates to 19%. Additional cement maybe required.**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8**

- hours or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
- Cement to surface. If cement does not circulate see B.1.a, c-d above.
- Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, Capitan Reef.**
- ❖ In High Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
 - ❖ In Capitan Reef Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
 - ❖ **Special Capitan Reef requirements.** If lost circulation (50% or greater) occurs below the Base of the Salt, the operator shall do the following:
(Use this for 3 string wells in the Capitan Reef, if 4 string well ensure FW based mud used across the capitan interval)
 - Switch to fresh water mud to protect the Capitan Reef and use fresh water mud until setting the intermediate casing. The appropriate BLM office is to be notified for a PET to witness the switch to fresh water.
 - Daily drilling reports from the Base of the Salt to the setting of the intermediate casing are to be submitted to the BLM CFO engineering staff via e-mail by 0800 hours each morning. Any lost circulation encountered is to be recorded on these drilling reports. The daily drilling report should show mud volume per shift/tour. Failure to submit these reports will result in an Incidence of Non-Compliance being issued for failure to comply with the Conditions of Approval. If not already planned, the operator shall run a caliper survey for the intermediate well bore and submit to the appropriate BLM office.
3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
- Cement should tie-back at least **200 feet** into the previous casing, whichever is greater. **Excess calculates to 5%. Additional cement may be required.**

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in 43 CFR 3171 and 3172.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Offline Cementing

Contact the BLM prior to the commencement of any offline cementing procedure. Offline Cementing will be conducted on the surface and intermediate casings.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Email or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, BLM_NM_CFO_DrillingNotifications@BLM.GOV
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
(575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as

well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172** and **API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in **43 CFR part 3170 Subpart 3172** must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been

done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test

does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

ZS 8/22/2023



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

08/31/2023

Operator

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: MIKAH THOMAS

Signed on: 06/27/2023

Title: Regulatory Manager

Street Address: 1400 WOODLOCH FOREST DR SUITE 300

City: THE WOODLANDS

State: TX

Zip: 77380

Phone: (432)661-7106

Email address: MTHOMAS@EARTHSTONEENERGY.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data

08/31/2023

APD ID: 10400085976

Submission Date: 06/09/2022

Operator Name: COLGATE OPERATING LLC

Well Name: KOALA 9 FED COM

Well Number: 131H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Section 1 - General

APD ID: 10400085976

Tie to previous NOS?

Submission Date: 06/09/2022

BLM Office: Carlsbad

User: MIKAH THOMAS

Title: Regulatory Manager

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM137444

Lease Acres:

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? N

Permitting Agent? NO

APD Operator: COLGATE OPERATING LLC

Operator letter of

Operator Info

Operator Organization Name: COLGATE OPERATING LLC

Operator Address: 300 N MARIENFELD STREET SUITE 1000

Zip: 79701

Operator PO Box:

Operator City: MIDLAND

State: TX

Operator Phone: (432)695-4272

Operator Internet Address: MTHOMAS@COLGATEENERGY.COM

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: KOALA 9 FED COM

Well Number: 131H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: THIRD BONE
SPRINGPool Name: BURTON FLAT,
MORROW (PRO GAS)

Operator Name: COLGATE OPERATING LLC**Well Name:** KOALA 9 FED COM**Well Number:** 131H**Is the proposed well in an area containing other mineral resources?** NATURAL GAS,OIL**Is the proposed well in a Helium production area?** N**Use Existing Well Pad?** N**New surface disturbance?****Type of Well Pad:** MULTIPLE WELL**Multiple Well Pad Name:**
KOALA 9 FED COM NORTH**Number:** 2**Well Class:** HORIZONTAL**Number of Legs:** 1**Well Work Type:** Drill**Well Type:** OIL WELL**Describe Well Type:****Well sub-Type:** INFILL**Describe sub-type:****Distance to town:** 12 Miles**Distance to nearest well:** 1528 FT**Distance to lease line:** 482 FT**Reservoir well spacing assigned acres Measurement:** 320 Acres**Well plat:** KOALA_9_FED_COM_131H_C102_Plat_Signed_20220609062818.pdf**Well work start Date:** 09/30/2022**Duration:** 90 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR**Describe Survey Type:****Datum:** NAD83**Vertical Datum:** NAVD88**Survey number:** 12177**Reference Datum:** KELLY BUSHING

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this
SHL Leg #1	794	FNL	482	FEL	20S	28E	8	Aliquot NENE	32.5931862	- 104.1925653	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 83584	3288	0	0	N
KOP Leg #1	864	FNL	470	FEL	20S	28E	8	Aliquot NENE	32.5929938	- 104.1925271	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 83584	- 4622	7912	7910	N
PPP Leg #1-1	990	FNL	100	FWL	20S	28E	9	Aliquot NWNW	32.5926511	- 104.1906854	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 137444	- 5205	8824	8493	Y

Operator Name: COLGATE OPERATING LLC

Well Name: KOALA 9 FED COM

Well Number: 131H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this
PPP Leg #1-2	990	FNL	0	FEL	20S	28E	9	Aliquot NWNE	32.5926922	- 104.1823591	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 13232	- 5206	11388	8494	Y
PPP Leg #1-3	990	FNL	0	FEL	20S	28E	10	Aliquot NWNW	32.5927353	- 104.1737074	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 15003	- 5206	14053	8494	Y
EXIT Leg #1	990	FNL	100	FEL	20S	28E	10	Aliquot NENE	32.5928179	- 104.1567815	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 15003	- 5206	19266	8494	Y
BHL Leg #1	990	FNL	10	FEL	29S	28E	10	Aliquot NENE	32.5928193	- 104.1564892	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 15003	- 5206	19356	8494	Y

District I1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720District II811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720District III1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170District IV1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico

Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number 30-015- 54157		2 Pool Code 73280		3 Pool Name BURTON FLAT, MORROW (PRO GAS)	
4 Property Code 334680		5 Property Name KOALA 9 FED COM			6 Well Number 131H
7 OGRID No. 371449		8 Operator Name COLGATE ENERGY LLC			9 Elevation 3288'

10 Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	8	20-S	28-E		794'	NORTH	482'	EAST	EDDY

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	10	20-S	28-E		990'	NORTH	10'	EAST	EDDY

12 Dedicated Acres 320	13 Joint or Infill	14 Consolidation Code	15 Order No.
----------------------------------	--------------------	-----------------------	--------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

16 SHL FTP LTP BHL FTP TO LTP = 10,441.87' 794' 990' 100' 482' 8 9 10 11 K J I H G CORNER DATA NEW MEXICO EAST - NAD 83 A - FOUND IRON PIPE W/ BRASS CAP N: 580356.62' E: 585185.65' B - FOUND 1" IRON PIPE N: 580373.68' E: 587849.16' C - FOUND 1" IRON PIPE N: 580391.30' E: 590513.47' D - FOUND 1" IRON PIPE N: 580412.62' E: 593168.80' E - FOUND 1" IRON PIPE N: 580433.88' E: 595824.69' F - FOUND IRON PIPE W/ BRASS CAP N: 577783.78' E: 595789.28' G - FOUND IRON PIPE W/ BRASS CAP N: 575134.28' E: 595753.43' H - FOUND IRON PIPE W/ BRASS CAP N: 575115.45' E: 593094.38' I - FOUND 2" IRON PIPE N: 575097.10' E: 590435.59' J - FOUND 1 1/4" IRON PIPE N: 575080.69' E: 587767.05' K - FOUND IRON PIPE W/ BRASS CAP N: 575063.99' E: 585099.23' L - FOUND IRON PIPE W/ BRASS CAP N: 577711.68' E: 585143.38' M - FOUND 1" IRON PIPE N: 577744.14' E: 590473.87' SURFACE HOLE LOCATION (SHL) NEW MEXICO EAST - NAD 83 X=584690.66 LAT.= 32.59318628° N Y=579560.58 LONG.= 104.19256530° W NEW MEXICO EAST - NAD 27 X=543510.52 LAT.= 32.59306913° N Y=579499.10 LONG.= 104.19205759° W 794' FNL, 482' FEL - SECTION 8 FIRST TAKE POINT (FTP) NEW MEXICO EAST - NAD 83 X=585269.85 LAT.= 32.59265245° N Y=579367.14 LONG.= 104.19068550° W NEW MEXICO EAST - NAD 27 X=544089.71 LAT.= 32.59253528° N Y=579305.66 LONG.= 104.19017786° W 990' FNL, 100' FWL - SECTION 9 LAST TAKE POINT (LTP) NEW MEXICO EAST - NAD 83 X=595711.44 LAT.= 32.59281774° N Y=579442.94 LONG.= 104.15678150° W NEW MEXICO EAST - NAD 27 X=554531.27 LAT.= 32.59270020° N Y=579381.38 LONG.= 104.15627472° W 990' FNL, 100' FEL - SECTION 10 BOTTOM HOLE LOCATION (BHL) NEW MEXICO EAST - NAD 83 X=595801.46 LAT.= 32.59281931° N Y=579443.67 LONG.= 104.15648921° W NEW MEXICO EAST - NAD 27 X=554621.29 LAT.= 32.59270177° N Y=579382.10 LONG.= 104.15598244° W 990' FNL, 10' FEL - SECTION 10	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. 06.02.2022 Signature Date Mikah Thomas Printed Name mthomas@colgateenergy.com E-mail Address 18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey Signature and Seal of Professional Surveyor 5/5/2022 Certificate Number
--	---



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

08/31/2023

APD ID: 10400085976

Submission Date: 06/09/2022

Highlighted data
reflects the most
recent changes

Operator Name: COLGATE OPERATING LLC

Well Name: KOALA 9 FED COM

Well Number: 131H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
12017438	RUSTLER	3288	241	241	ANHYDRITE, LIMESTONE, SALT	NONE	N
12017439	TOP SALT	2906	382	382	ANHYDRITE, SALT	NONE	N
12017441	TANSILL	2520	768	768	ANHYDRITE, DOLOMITE	NONE	N
12017444	YATES	2445	843	843	DOLOMITE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12017442	SEVEN RIVERS	2070	1218	1218	ANHYDRITE, DOLOMITE, SANDSTONE, SHALE	NONE	N
12017443	QUEEN	1479	1809	1809	ANHYDRITE, DOLOMITE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12017447	GRAYBURG	1270	2018	2018	ANHYDRITE, DOLOMITE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12017450	SAN ANDRES	870	2418	2418	ANHYDRITE, DOLOMITE	NATURAL GAS, OIL	N
12017452	DELAWARE SAND	295	2993	2994	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12017454	BONE SPRING	-1280	4568	4570	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12017456	BONE SPRING 1ST	-2830	6118	6120	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12017466	BONE SPRING 2ND	-3855	7143	7145	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	N
12017437	BONE SPRING 3RD	-4980	8268	8299	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Operator Name: COLGATE OPERATING LLC**Well Name:** KOALA 9 FED COM**Well Number:** 131H**Pressure Rating (PSI):** 5M**Rating Depth:** 8594

Equipment: BOPE with working pressure ratings in excess of anticipated maximum surface pressure will be utilized for well control from drill out of surface casing to TMD. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. All BOPE connections shall be flanged, welded or clamped. All choke lines shall be straight unless targeted with running tees or tee blocks are used, and choke lines shall be anchored to prevent whip and reduce vibrations. All valves in the choke line & the choke manifold shall be full opening as to not cause restrictions and to allow for straight fluid paths to minimize potential erosion. All gauges utilized in the well control system shall be of a type designed for drilling fluid service. A top drive inside BOP valve will be utilized at all times. Subs equipped with full opening valves sized to fit the drill pipe and collars will be available on the rig floor in the open position. The key to operate said valve equipped subs will be on the rig floor at all times. The accumulator system will have sufficient capacity to open the HCR and close all three sets of rams plus the annular preventer while retaining at least 300 psi above precharge on the closing manifold (accumulator system shall be capable of doing so without using the closing unit pumps). The fluid reservoir capacity will be double the usable fluid volume of the accumulator system capacity, and the fluid level will be maintained at the manufacturer's recommended level. Prior to connecting the closing unit to the BOP stack, an accumulator precharge pressure test shall be performed to ensure the precharge pressure is within 100 psi of the desired precharge pressure (only nitrogen gas will be used to precharge). Two independent power sources will be made available at all times to power the closing unit pumps so that the pumps can automatically start when the closing valve manifold pressure has decreased to the preset level. Closing unit pumps will be sized to allow opening of HCR and closing of annular preventer on 5" drill pipe achieving at least 200 psi above precharge pressure with the accumulator system isolated from service in less than two minutes. A valve shall be installed in the closing line as close to the annular preventer as possible to act as a locking device; the valve shall be maintained in the open position and shall be closed only when the power source for the accumulator system is inoperative. Remote controls capable of opening and closing all preventers & the HCR shall be readily accessible to the driller; master controls with the same capability will be operable at the accumulator. The wellhead will be a multibowl speed head allowing for hangoff of intermediate casing & isolation of the 133/8 x 95/8 annulus without breaking the connection between the BOP & wellhead to install an additional casing head. A wear bushing will be installed & inspected frequently to guard against internal wear to wellhead. VBRs (variablebore rams) will be run in upper rambody of BOP stack to provide redundancy to annular preventer while RIH w/ production casing;

Requesting Variance? YES**Variance request:** Flex hose and offline cement variances, see attachments in section 8.

Testing Procedure: The BOP test shall be performed before drilling out of the surface casing shoe and will occur at a minimum: a. when initially installed b. whenever any seal subject to test pressure is broken c. following related repairs d. at 30 day intervals e. checked daily as to mechanical operating conditions. The ram type preventer(s) will be tested using a test plug to 250 psi (low) and 5,000 psi (high) (casinghead WP) with a test plug upon its installation onto the 13 surface casing. If a test plug is not used, the ram type preventer(s) shall be tested to 70% of the minimum internal yield pressure of the casing. The annular type preventer(s) shall be tested to 3500 psi. Pressure will be maintained for at least 10 minutes or until provisions of the test are met, whichever is longer. A Sundry Notice (Form 3160 5), along with a copy of the BOP test report, shall be submitted to the local BLM office within 5 working days following the test. If the bleed line is connected into the buffer tank (header), all BOP equipment including the buffer tank and associated valves will be rated at the required BOP pressure. The BLM office will be provided with a minimum of four (4) hours notice of BOP testing to allow witnessing. The BOP Configuration, choke manifold layout, and accumulator system, will be in compliance with Onshore Order 2 for a 5,000 psi system. A remote accumulator and a multi-bowl system will be used, please see attachment in section 8 for multi-bowl procedure. Pressures, capacities, and specific placement and use of the manual and/or hydraulic controls, accumulator controls, bleed lines, etc., will be identified at the time of the BLM 'witnessed BOP test. Any remote controls will be capable of both opening and closing all preventers and shall be readily accessible.

Choke Diagram Attachment:

Choke_Diagram_Attachment_20230627142456.pdf

BOP Diagram Attachment:

BOP_Diagram_Attachment_20230627142511.pdf

Operator Name: COLGATE OPERATING LLC

Well Name: KOALA 9 FED COM

Well Number: 131H

Choke_Diagram_Attachment_20230627142456.pdf

BOP_Diagram_Attachment_20230627142511.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	266	0	266	3288	3022	266	J-55	54.5	BUTT	8.6	4.02	DRY	7.94	DRY	7.45
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	2943	0	2943	3274	345	2943	J-55	36	BUTT	2.69	1.6	DRY	3.1	DRY	2.74
3	PRODUCTION	8.75	5.5	NEW	NON API	N	0	8511	0	8406	3288	-5118	8511	P-110	17	OTHER - GEOCONN	1.69	1.77	DRY	2.23	DRY	2.23
4	PRODUCTION	7.875	5.5	NEW	NON API	N	8511	19355	8406	8494	-5118	-5206	10844	P-110	17	OTHER - GEOCONN	1.69	1.77	DRY	2.23	DRY	2.23

Casing Attachments

Casing ID: 1

String

SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Casing_Assumptions_Worksheet_20230627142651.pdf

Operator Name: COLGATE OPERATING LLC

Well Name: KOALA 9 FED COM

Well Number: 131H

Casing Attachments

Casing ID: 2StringINTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Casing_Assumptions_Worksheet_20230627142737.pdf

Casing ID: 3StringPRODUCTION

Inspection Document:

Spec Document:

Connection_Data_Sheet___GeoConn_SC___P_110RY_20230627142857.pdf

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Casing_Assumptions_Worksheet_20230627142923.pdf

Casing ID: 4StringPRODUCTION

Inspection Document:

Spec Document:

Connection_Data_Sheet___GeoConn_SC___P_110RY_20230627143010.pdf

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Casing_Assumptions_Worksheet_20230627143029.pdf

Section 4 - Cement

Operator Name: COLGATE OPERATING LLC**Well Name:** KOALA 9 FED COM**Well Number:** 131H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	0	0	0	0	0		0	0
SURFACE	Tail		0	266	210	1.34	14.8	280	50	Class C	Accelerator
INTERMEDIATE	Lead		0	2350	520	2.08	12.7	1080	50	Class C	Salt, Extender & LCM Additives
INTERMEDIATE	Tail		2350	2943	210	1.34	14.8	280	50	Class C	Accelerator
PRODUCTION	Lead		2443	7911	790	2.41	11.5	1900	40	Class H	POZ, Extender, Fluid Loss, Dispersant & Retarder
PRODUCTION	Tail		7911	19355	1470	1.73	12.5	2540	25	Class H	POZ, Extender, Fluid Loss, Dispersant & Retarder
PRODUCTION	Lead		2443	7911	790	2.41	11.5	1900	40	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder
PRODUCTION	Tail		7911	19355	1470	1.73	12.5	2540	25	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder

Section 5 - Circulating Medium

Mud System Type: Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with Onshore Order #2:****Diagram of the equipment for the circulating system in accordance with Onshore Order #2:**

Describe what will be on location to control well or mitigate other conditions: Sufficient quantities of mud materials will be on the well site at all times for the purpose of assuring well control and maintaining wellbore integrity. Surface interval will employ fresh water mud. The intermediate hole will utilize a saturated brine fluid to inhibit salt washout. The production hole will employ brine based and oil base fluid to inhibit formation reactivity and of the appropriate density to maintain well control.

Describe the mud monitoring system utilized: Centrifuge separation system. Open tank monitoring with EDR will be used for drilling fluids and return volumes. Open tank monitoring will be used for cement and cuttings return volumes. Mud properties will be monitored at least every 24 hours using industry accepted mud check practices.

Circulating Medium Table

Operator Name: COLGATE OPERATING LLC**Well Name:** KOALA 9 FED COM**Well Number:** 131H

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	266	WATER-BASED MUD	8.6	9.5							
266	2943	SALT SATURATED	10	10							
2943	8511	OTHER : Brine	9	10							
8511	1935 5	OIL-BASED MUD	9	10							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will utilize MWD/LWD (Gamma Ray logging) from intermediate hole to TD of the well.

List of open and cased hole logs run in the well:

GAMMA RAY LOG,DIRECTIONAL SURVEY,

Coring operation description for the well:

N/A

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4420

Anticipated Surface Pressure: 2551

Anticipated Bottom Hole Temperature(F): 142

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations

Colgate_H2S_Contingency_Plan_20220602142028.pdf

Operator Name: COLGATE OPERATING LLC**Well Name:** KOALA 9 FED COM**Well Number:** 131H


Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:[_A03__Koala_9_Fed_Com_131H_APD_Rev00_GEO_20230627144149.pdf](#)[_A03__Koala_9_Fed_Com_131H_APD_Rev00_AC_20230627144153.pdf](#)[_A03__Koala_9_Fed_Com_131H_APD_Rev00_WM_20230627144156.pdf](#)**Other proposed operations facets description:**

Please see attached Drilling plan including multi-bowl diagram and procedure, proposed WBD, and casing connection data sheet. We also plan to batch drill this well along with offline cementing, see details under variance request below. Permian Resources Operating, LLC requests to use a flex hose on H&P choke manifold for this well. The Flex Hose specifications are attached below.

Other proposed operations facets attachment:[Koala_9_Fed_Com_131H_drilling_packet_20230627144615.pdf](#)**Other Variance attachment:**[Flex_Hose_Specs_20230627144642.pdf](#)[Multi_Well_Pad_Batch_Drilling___Off_Line_Cement_Procedure_20230627144648.pdf](#)

5M Choke Manifold Equipment (WITH MGS + CLOSED LOOP)

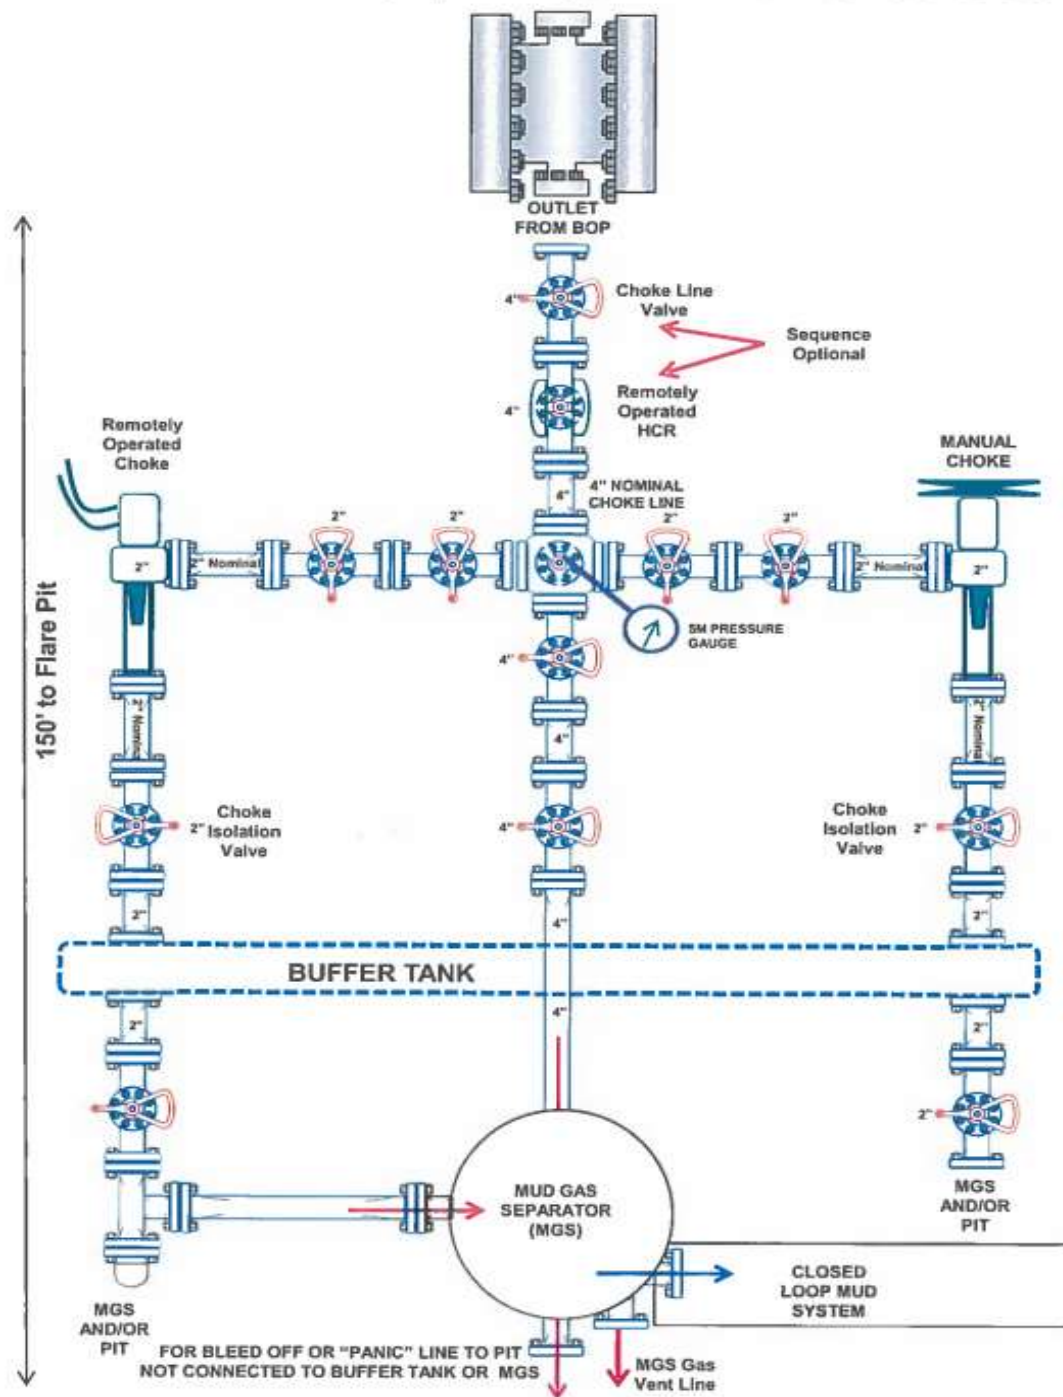



ContiTech

CONTITECH RUBBER Industrial Kft.	No:QC-DB- 210/ 2014 Page: 9 / 113
-------------------------------------	--------------------------------------

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 504	
PURCHASER: ContiTech Oil & Marine Corp.				P.O. N°: 4500409659	
CONTITECH RUBBER order N°: 538236		HOSE TYPE: 3" ID		Choke and Kill Hose	
HOSE SERIAL N°: 67255		NOMINAL / ACTUAL LENGTH:		10,67 m / 10,77 m	
W.P.: 68,9 MPa 10000 psi		T.P.: 103,4 MPa 15000 psi		Duration: 60 min	
Pressure test with water at ambient temperature					
See attachment. (1 page)					
↑ 10 mm = 10 Min. → 10 mm = 20 MPa					
COUPLINGS Type		Serial N°		Quality	
3" coupling with		9251 9254		AISI 4130	
4 1/16" 10K API b.w. Flange end				AISI 4130	
				A0578N	
				035608	
Not Designed For Well Testing				API Spec 16 C	
				Temperature rate: "B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated, inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date:		Inspector		Quality Control	
20. March 2014.				ContiTech Rubber Industrial Oil Quality Control Dept. <i>[Signature]</i>	


Centech Rubber Industrial Co., Ltd. (Incorporated in Hong Kong) H 4701 P.O. Box 102, Sengco, Hong Kong
Phone: +86 87584 737 / Fax: +86 82546 728 / e-mail: info@centechrubber.hk / Internet: www.centech-rubber.hk / www.centech.hk
The Court of Chancery County of Registry Court / Registry Court No: Cg 99-09-00050 / EU 197 No: H11153709
Harris Data Communications, Inc., (Incorporated in the United States of America) H 4701 P.O. Box 102, Sengco, Hong Kong

No. 501, 504, 505


Page: 1 / 1



2M BOP

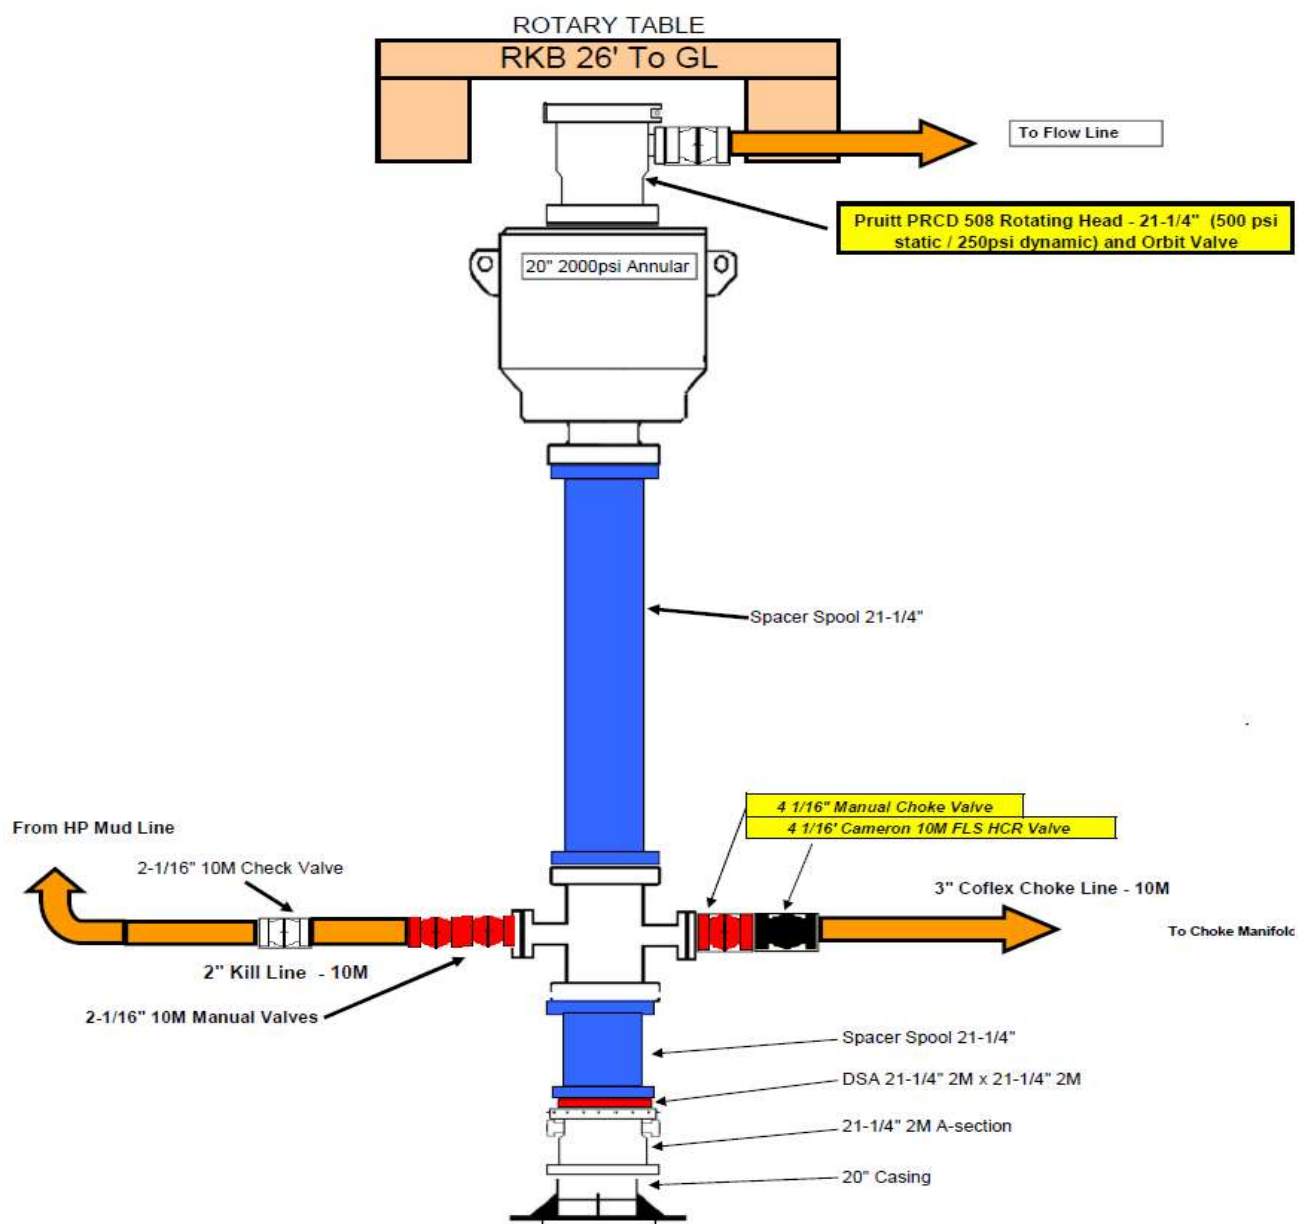


5,000 psi BOP Schematic

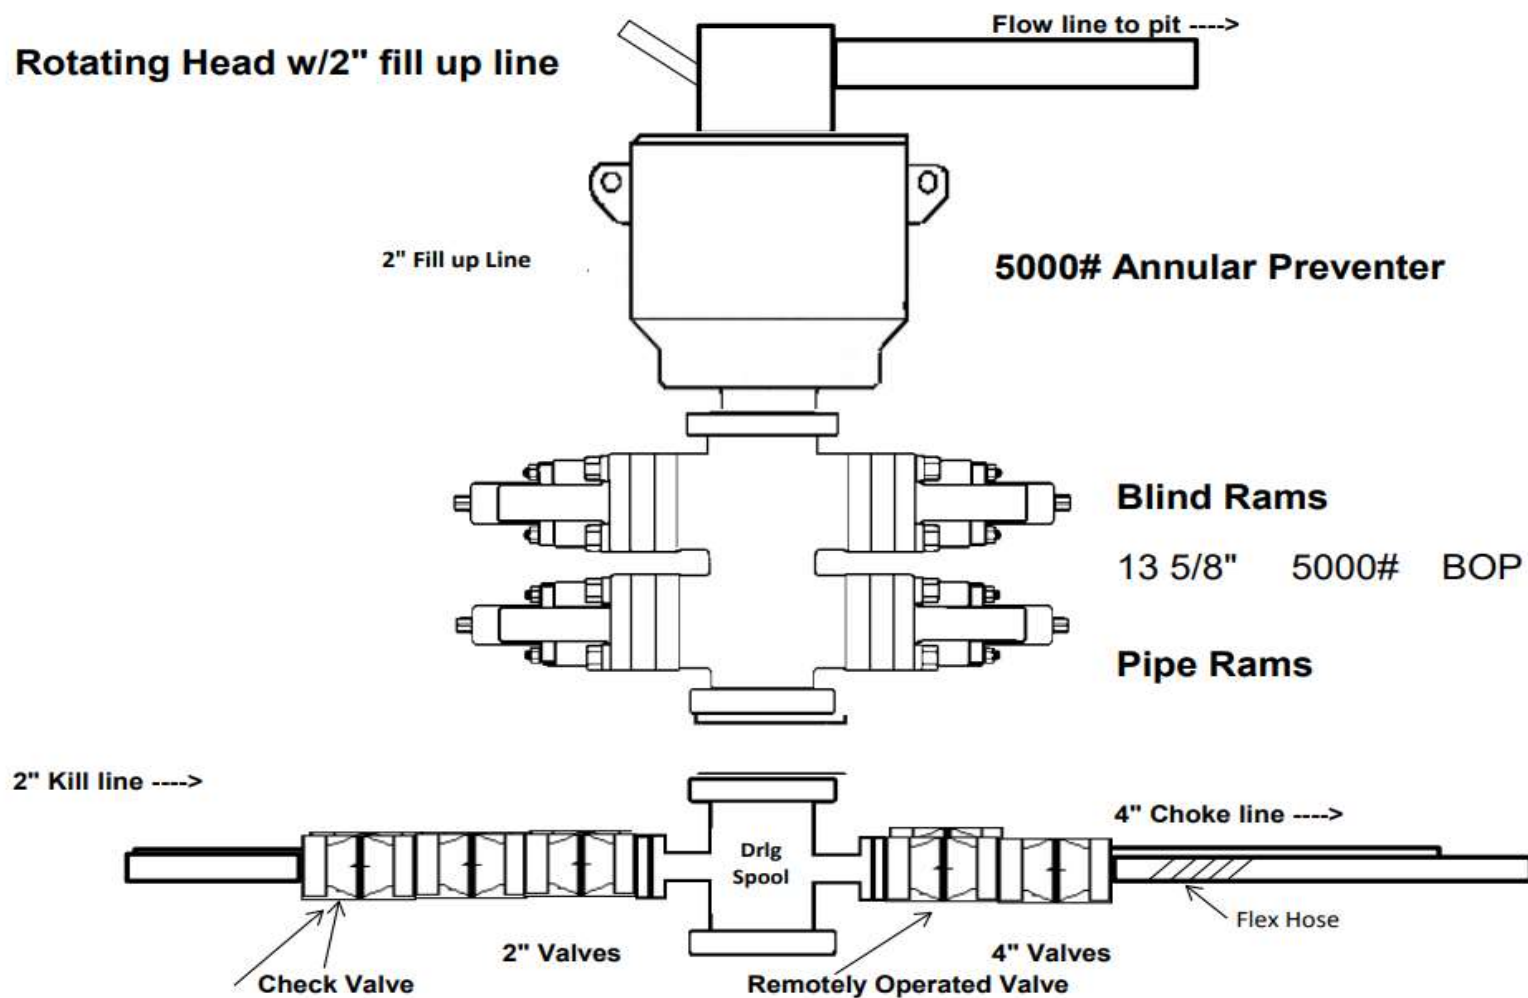

Metal One Corp. 	GEOCONN-SC Pipe: SeAH P110RY 95%PBW (SMYS110ksi) *1 Coupling: P110RY (SMYS110ksi) Connection Data Sheet	Page Date Rev.	MAI GC 5.5 17 SeAH P110RY 95%RBW+SC-Cplg6.050 P110RY 3-Feb-21 0
---	--	----------------------	--

GEOCONN-SC

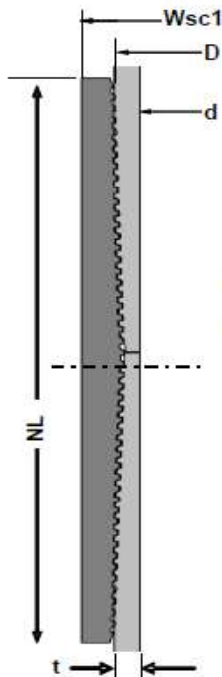

Geometry		Imperial		S.I.	
Pipe Body					
Grade *1	P110RY	-	P110RY	-	-
SMYS	110	ksi	110	ksi	
Pipe OD (D)	5.500	in	139.70	mm	
Weight	17.00	lb/ft	25.33	kg/m	
Wall Thickness (t)	0.304	in	7.72	mm	
Pipe ID (d)	4.892	in	124.26	mm	
Drift Dia.	4.767	in	121.08	mm	
Connection					
Coupling SMYS	110	ksi	110	ksi	
SC-Coupling OD (Wsc1)	6.050	in	153.67	mm	
Coupling Length (NL)	8.350	in	212.09	mm	
Make up Loss	4.125	in	104.78	mm	
Pipe Critical Area	4.96	in ²	3,202	mm ²	
Box Critical Area	6.10	in ²	3,937	mm ²	
Thread Taper	1 / 16 (3/4" per ft)				
Number of Threads	5 TPI				

Performance		Imperial		S.I.	
Performance Properties for Pipe Body					
S.M.Y.S. *1	546	kips	2,428	kN	
M.I.Y.P. *1	11,550	psi	79.66	MPa	
Collapse Strength *1	7,480	psi	51.59	MPa	
Note S.M.Y.S. = Specified Minimum YIELD Strength of Pipe body M.I.Y.P. = Minimum Internal Yield Pressure of Pipe body *1: SeAH P110RY 95%RBW: SMYS110ksi, MIYP11,550psi					
Performance Properties for Connection					
Min. Connection Joint Strength	100% of S.M.Y.S.				
Min. Compression Yield	100% of S.M.Y.S.				
Internal Pressure	100% of M.I.Y.P.				
External Pressure	100% of Collapse Strength				
Max. DLS (deg. /100ft)	>90				
Recommended Torque					
Min.	10,800	ft-lb	14,600	N-m	
Opti.	12,000	ft-lb	16,200	N-m	
Max.	13,200	ft-lb	17,800	N-m	
Operational Max.	15,600	ft-lb	21,100	N-m	
Note : Operational Max. torque can be applied for high torque application					

Legal Notice


The use of this information is at the reader/user's risk and no warranty is implied or expressed by Metal One Corporation or its parents, subsidiaries or affiliates (herein collectively referred to as "Metal One") with respect to the use of information contained herein. The information provided on this Connection Data Sheet is for informational purposes only, and was prepared by reference to engineering information that is specific to the subject products, without regard to safety-related factors, all of which are the sole responsibility of the operators and users of the subject connectors. Metal One assumes no responsibility for any errors with respect to this information.

Statements regarding the suitability of products for certain types of applications are based on Metal One's knowledge of typical requirements that are often placed on Metal One products in standard well configurations. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

The products described in this Connection Data Sheet are not recommended for use in deep water offshore applications. For more information, please refer to http://www.mto.co.jp/mto-con/images/top/WebsiteTerms_Active_20233287_1.pdf the contents of which are incorporated by reference into this Connection Data Sheet.

Metal One Corp. 	GEOCONN-SC Pipe: SeAH P110RY 95%PBW (SMYS110ksi) *1 Coupling: P110RY (SMYS110ksi) Connection Data Sheet	Page Date Rev.	MAI GC 5.5 17 SeAH P110RY 95%RBW+SC-Cplg6.050 P110RY 3-Feb-21 0
---	--	----------------------	--

GEOCONN-SC

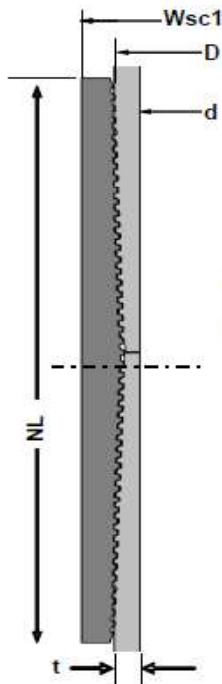

Geometry		Imperial		S.I.	
Pipe Body					
Grade *1	P110RY	-	P110RY	-	
SMYS	110	ksi	110	ksi	
Pipe OD (D)	5.500	in	139.70	mm	
Weight	17.00	lb/ft	25.33	kg/m	
Wall Thickness (t)	0.304	in	7.72	mm	
Pipe ID (d)	4.892	in	124.26	mm	
Drift Dia.	4.767	in	121.08	mm	
Connection					
Coupling SMYS	110	ksi	110	ksi	
SC-Coupling OD (Wsc1)	6.050	in	153.67	mm	
Coupling Length (NL)	8.350	in	212.09	mm	
Make up Loss	4.125	in	104.78	mm	
Pipe Critical Area	4.96	in ²	3,202	mm ²	
Box Critical Area	6.10	in ²	3,937	mm ²	
Thread Taper	1 / 16 (3/4" per ft)				
Number of Threads	5 TPI				

Performance		Imperial		S.I.	
Performance Properties for Pipe Body					
S.M.Y.S. *1	546	kips	2,428	kN	
M.I.Y.P. *1	11,550	psi	79.66	MPa	
Collapse Strength *1	7,480	psi	51.59	MPa	
Note S.M.Y.S. = Specified Minimum YIELD Strength of Pipe body M.I.Y.P. = Minimum Internal Yield Pressure of Pipe body *1: SeAH P110RY 95%RBW: SMYS110ksi, MIYP11,550psi					
Performance Properties for Connection					
Min. Connection Joint Strength	100% of S.M.Y.S.				
Min. Compression Yield	100% of S.M.Y.S.				
Internal Pressure	100% of M.I.Y.P.				
External Pressure	100% of Collapse Strength				
Max. DLS (deg. /100ft)	>90				
Recommended Torque					
Min.	10,800	ft-lb	14,600	N-m	
Opti.	12,000	ft-lb	16,200	N-m	
Max.	13,200	ft-lb	17,800	N-m	
Operational Max.	15,600	ft-lb	21,100	N-m	
Note : Operational Max. torque can be applied for high torque application					

Legal Notice

The use of this information is at the reader/user's risk and no warranty is implied or expressed by Metal One Corporation or its parents, subsidiaries or affiliates (herein collectively referred to as "Metal One") with respect to the use of information contained herein. The information provided on this Connection Data Sheet is for informational purposes only, and was prepared by reference to engineering information that is specific to the subject products, without regard to safety-related factors, all of which are the sole responsibility of the operators and users of the subject connectors. Metal One assumes no responsibility for any errors with respect to this information.

Statements regarding the suitability of products for certain types of applications are based on Metal One's knowledge of typical requirements that are often placed on Metal One products in standard well configurations. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

The products described in this Connection Data Sheet are not recommended for use in deep water offshore applications. For more information, please refer to http://www.mto.co.jp/mto-con/images/top/WebsiteTerms_Active_20233287_1.pdf the contents of which are incorporated by reference into this Connection Data Sheet.

Permian Resources Casing Design Criteria

A sundry will be requested if any lesser grade or different size casing is substituted. All casing will be centralized as specified in On Shore Order II. Casing will be tested as specified in On Shore Order II.

Casing Design Assumptions:

Surface

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate I

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.

- (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate or Intermediate II

- 1) Burst Design Loads
 - a) Gas Kick Profile
 - (1) Internal: Load profile based on influx encountered in lateral portion of wellbore with a maximum influx volume of 150 bbl and a kick intensity of 1.5 ppg using maximum anticipated MW of 9.9 ppg.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the deepest TVD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Production

- 1) Burst Design Loads
 - a) Injection Down Casing
 - (1) Internal: Surface pressure plus injection fluid gradient.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test (Drilling)
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - c) Casing Pressure Test (Production)
 - (1) Internal: The design pressure test should be the greater of the planned test pressure prior to simulation down the casing, the regulatory test pressure, and the expected gas lift system pressure. The design test fluid should be the fluid associated with the pressure test having the greatest pressure.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - d) Tubing Leak
 - (1) Internal: SITP plus a packer fluid gradient to the top of packer.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
 - b) Full Evacuation
 - (1) Internal: Full void pipe.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Permian Resources Casing Design Criteria

A sundry will be requested if any lesser grade or different size casing is substituted. All casing will be centralized as specified in On Shore Order II. Casing will be tested as specified in On Shore Order II.

Casing Design Assumptions:

Surface

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate I

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.

- (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate or Intermediate II

- 1) Burst Design Loads
 - a) Gas Kick Profile
 - (1) Internal: Load profile based on influx encountered in lateral portion of wellbore with a maximum influx volume of 150 bbl and a kick intensity of 1.5 ppg using maximum anticipated MW of 9.9 ppg.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the deepest TVD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Production

- 1) Burst Design Loads
 - a) Injection Down Casing
 - (1) Internal: Surface pressure plus injection fluid gradient.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test (Drilling)
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - c) Casing Pressure Test (Production)
 - (1) Internal: The design pressure test should be the greater of the planned test pressure prior to simulation down the casing, the regulatory test pressure, and the expected gas lift system pressure. The design test fluid should be the fluid associated with the pressure test having the greatest pressure.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - d) Tubing Leak
 - (1) Internal: SITP plus a packer fluid gradient to the top of packer.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
 - b) Full Evacuation
 - (1) Internal: Full void pipe.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Permian Resources Casing Design Criteria

A sundry will be requested if any lesser grade or different size casing is substituted. All casing will be centralized as specified in On Shore Order II. Casing will be tested as specified in On Shore Order II.

Casing Design Assumptions:

Surface

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate I

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.

- (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate or Intermediate II

- 1) Burst Design Loads
 - a) Gas Kick Profile
 - (1) Internal: Load profile based on influx encountered in lateral portion of wellbore with a maximum influx volume of 150 bbl and a kick intensity of 1.5 ppg using maximum anticipated MW of 9.9 ppg.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the deepest TVD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Production

- 1) Burst Design Loads
 - a) Injection Down Casing
 - (1) Internal: Surface pressure plus injection fluid gradient.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test (Drilling)
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - c) Casing Pressure Test (Production)
 - (1) Internal: The design pressure test should be the greater of the planned test pressure prior to simulation down the casing, the regulatory test pressure, and the expected gas lift system pressure. The design test fluid should be the fluid associated with the pressure test having the greatest pressure.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - d) Tubing Leak
 - (1) Internal: SITP plus a packer fluid gradient to the top of packer.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
 - b) Full Evacuation
 - (1) Internal: Full void pipe.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Permian Resources Casing Design Criteria

A sundry will be requested if any lesser grade or different size casing is substituted. All casing will be centralized as specified in On Shore Order II. Casing will be tested as specified in On Shore Order II.

Casing Design Assumptions:

Surface

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate I

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.

- (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate or Intermediate II

- 1) Burst Design Loads
 - a) Gas Kick Profile
 - (1) Internal: Load profile based on influx encountered in lateral portion of wellbore with a maximum influx volume of 150 bbl and a kick intensity of 1.5 ppg using maximum anticipated MW of 9.9 ppg.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the deepest TVD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Production

- 1) Burst Design Loads
 - a) Injection Down Casing
 - (1) Internal: Surface pressure plus injection fluid gradient.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test (Drilling)
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - c) Casing Pressure Test (Production)
 - (1) Internal: The design pressure test should be the greater of the planned test pressure prior to simulation down the casing, the regulatory test pressure, and the expected gas lift system pressure. The design test fluid should be the fluid associated with the pressure test having the greatest pressure.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - d) Tubing Leak
 - (1) Internal: SITP plus a packer fluid gradient to the top of packer.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
 - b) Full Evacuation
 - (1) Internal: Full void pipe.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.



H₂S Contingency Plan



Table of Contents

I. EMERGENCY ASSISTANCE TELEPHONE LIST3

II. H₂S CONTINGENCY PLAN SECTION5

III. OPERATING PROCEDURES7

IV. OPERATING CONDITIONS 10

V. EMERGENCY PROCEDURES 11

VI. POST EMERGENCY ACTIONS..... 14

VII. IGNITION PROCEDURES..... 15

VIII. TRAINING PROGRAM..... 16

IX. EMERGENCY EQUIPMENT 16

X. CHECKLISTS..... 20

XI. BRIEFING PROCEDURES..... 22

XII. EVACUATION PLAN..... 23

XIII. APPENDICES AND GENERAL INFORMATION 24

I. EMERGENCY ASSISTANCE TELEPHONE LIST**PUBLIC SAFETY****911 or****Sheriff's Department:**

Eddy County Sherriff's Office (575) 887-7551

Fire Department:

Carlsbad Fire Department (575) 885-3125

Artesia Fire Department (575) 746-5051

Ambulance:

Elite Medical Transport (Carlsbad) (915) 542-1144

Trans Aero MedEvac (Artesia) (970) 657-7449

Hospitals:

Carlsbad Medical Center (575) 887-4100

Artesia General Hospital (575) 748-3333

New Mexico Dept. of Transportation:

Highway & Transportation Department (505) 795- 1401

New Mexico Railroad Commission:

Main Line (505) 476-3441

OSHA 24 Hr. Reporting

(800) 321-6742

(8 hrs. after death or 24 hrs. after in-patient, amputation, loss of an eye)

Office Contacts**911 or**

Colgate Energy LLC.	(432) 695-4222
----------------------------	-----------------------

Vice President of Operations:

Casey McCain	(432) 664-6140
--------------	----------------

Drilling Engineering Supervisor

Rafael Madrid	(432) 556-6387
---------------	----------------

Drilling Engineering Technical Adviser

Steven Segrest	(405) 550-0277
----------------	----------------

Operations Superintendent

Rick Lawson	(432) 530- 3188
-------------	-----------------

Drilling Superintendent

Daniel Cameron	(405) 933-0435
----------------	----------------

Onsite Supervision (H&P 481 Rig Managers)

Juan Gutierrez	(970)394-4768
----------------	---------------

Jonathan Jackson	(970)394-4768
------------------	---------------

Onsite Supervision (H&P 481 Company Men)

Pierre Dupuis	(432)438-0114
---------------	---------------

Eric Rutherford	(432)438-0114
-----------------	---------------

Rolando Torres	(432)438-0114
----------------	---------------

Trevor Hein	(432)438-0114
-------------	---------------

Emergency Accommodations

Safety Solutions Office	(432) 563-0400
-------------------------	----------------

Safety Solutions Dispatch	(432) 556-2002
---------------------------	----------------

Craig Strasner	(432) 894-0341 (Cell)
----------------	-----------------------

II. H₂S CONTINGENCY PLAN SECTION

Scope:

This contingency plan provides an organized plan of action for alerting and protecting the public within an area of exposure prior to an intentional release or following the accidental release of a potentially hazardous volume of hydrogen sulfide. The plan establishes guidelines for all personnel whose work activity may involve exposure to Hydrogen Sulfide Gas (H₂S).

Objective:

Prevent any and all accidents and prevent the uncontrolled release of H₂S into the atmosphere.

Provide proper evacuation procedures to cope with emergencies.

Provide immediate and adequate medical attention should an injury occur.

Purpose, Distribution and Updating of Contingency Plan:

The Purpose of this contingency plan is to protect the general public from the harmful effects of H₂S accidentally escaping from the subject producing well. This plan is designed to accomplish its purpose by assuring the preparedness necessary to:

1. Minimize the possibility of releasing H₂S into the atmosphere during related operations.
2. Provide for the logical, efficient, and safe emergency actions required to protect the general public in the event of an accidental release of a potentially hazardous quantity of H₂S.

Supplemental information is included with this plan and is intended as reference material for anyone needing a more detailed understanding of the many factors pertinent to H₂S drilling operations safety. The release of a potentially hazardous quantity of H₂S is highly unlikely. If such a release should occur however, obviously the exact time, rate, duration, and other pertinent facts will be known in advance thus, this contingency plan must necessarily be somewhat general. The plan does review in detail, as is reasonably possible, the type of accidental release that could possibly endanger the general public, the probable extent of such danger, and the emergency actions generally appropriate. In the event of such an accidental release, the specific actions to be taken will have to be determined at the time of release by the responsible personnel at the drilling location. Complete familiarity with this plan will help such personnel make the proper decisions rapidly. Familiarity with this plan is so required all operators, operator representatives, and drilling contractor supervisory personnel who could possibly be on duty at the drilling location at the time of an H₂S emergency.

IT IS THE RESPONSIBILITY OF THE OPERATOR TO ASSURE SUCH FAMILIARITY BEFORE DRILLING WITHIN 1000' OR THREE DAYS PRIOR TO PENETRATION OF THE SHALLOWEST FORMATION KNOWN OR SUSPECTED TO CONTAIN H₂S IN POTENTIALLY HAZARDOUS QUANTITIES, AND ALSO TO ASSURE THE TIMELY ACCOMPLISHMENT OF ALL THE OTHER ACTION SPECIFIED HERE IN.

As this contingency plan was prepared considerably in advance of the anticipated H₂S operation, the plan must be kept current if it is to effectively serve its purpose. The operators will be responsible for seeing that all copies are updated. Updating the plan is required when any changes to the personnel Call List (Section) including telephone numbers occur or when any pertinent data or plans for the well are altered. The plan must also be updated when any changes in the general public likely to be within the exposure area in the event of an

accidental release from the well bore of a potentially hazardous quantity of H₂S. Two copies of this plan shall be retained at the office of Colgate Energy. Two copies shall be retained at the drilling location.

Discussion of Plan:

Suspected Problem Zones:

Implementation: This plan, with all details, is to be fully implemented 1000' before drilling into the first sour zone.

Emergency Response Procedure: This section outlines the conditions and denotes steps to be taken in the event of an emergency.

Emergency Equipment and Procedure: This section outlines the safety and emergency equipment that will be required for the drilling of this well.

Training Provisions: This section outlines the training provisions that must be adhered to 1000' before drilling into the first sour zone.

Emergency call list: Included are the telephone numbers of all persons that would need to be contacted, should an H₂S emergency occur.

Briefing: This section deals with the briefing of all persons involved with the drilling of this well.

Public Safety: Public Safety Personnel will be made aware of the drilling of this well.

Check Lists: Status check lists and procedural check lists have been included to ensure adherence to the plan.

General Information: A general information section has been included to supply support information.

III. OPERATING PROCEDURES

A. Blowout Preventer Drills

Due to the special piping and Mani folding necessary to handle poisonous gas, particular care will be taken to ensure that all rig personnel are completely familiar with their jobs during the drills. The Drilling Consultant and Tool Pusher (Rig Superintendent) are thoroughly familiar with the additional controls and piping necessary.

B. H₂S Alarm Drills

The Company Man and/ or designee will conduct frequent H₂S alarm drills for each crew by injecting a trace of H₂S where the detector will give an alarm. Under these conditions all personnel on location will put on air equipment and remain masked until all clear is announced.

C. Surface Annular Preventer/ Diverter System Testing

After installation of the surface annular preventer, Hydraulic Control Valve and diverter system, both are to be function tested. They also should be function tested frequently while drilling surface hole.

D. Blowout Preventer

After installation of the Blowout Preventer Stack, the stack will be pressure tested. The Choke manifold is also to be pressure tested at this time. This procedure will be repeated as required by the NMOCD, the BLM, or if any of the stack is nipped down. Also, at this time, the Blind and Pipe Rams are checked for correct operation.

E. Well Control Practice Drills and Safety Meeting for Crew Members

Pit drills are for the purpose of acquainting each member of the drilling crew with his duties in the event of an emergency. Drills will be held with each crew as frequently as required to thoroughly familiarize each man with his duties. Drills are to be held at least weekly from that time forward.

1. BOP Drill while on Bottom Drilling:

A. Signal will be three or more long blast given by driller on the horn.

B. Procedure will be as follows:

1. Tool Pusher: Supervises entire operation.

2. Driller

a. Gives signal.

b. Picks up Kelly.

c. Stops pumps.

d. Observes flow.

e. Signal to close (pipe rams if necessary).

f. Check that Choke Manifold is closed.

g. Record drill pipe pressure, casing pressure and determine mud volume gain.

3. Motorman

a. Go to closing unit and standby for signal to close BOP.

b. Close BOP in signal.

c. Check on BOP closing.

d. Go to floor to assist driller. (NOTE: During test drills the BOP

need not be completely closed at the discretion of the supervisor. Supervisor should make it very clear that it is a test drill only!)

4. Derrickman
 - a. Check pumps.
 - b. Go to floor for directions from the driller.
 5. Floorman
 - a. Go to manifold.
 - b. Observe and record pressure.
 - c. Check manifold and BOP for leaks.
 - d. Check with driller for additional instructions.
2. BOP Drill While Making Trip:
- A. During trip driller will fill hole every five (5) stands and check the pits to be sure hole is taking mud.
 - B. Drill Procedure is as follows:
 1. Driller
 - a. Order Safety valve installed.
 - b. Alert those not on the floor.
 - c. Go to stations as described in above drill.
3. Safety Meetings
- A. Every person involved in the operating will be informed of the characteristics of H₂S, its danger and safety procedures to be used when it is encountered, and recommended first-aid procedure for regular rig personnel. This will be done through a series of talks made before spud.
 - B. The Safety Advisor or Drilling Supervisor will conduct these training sessions and will repeat them as deemed necessary by him or as instructed by Colgate Energy. Talks may include the following subjects:
 1. Dangers of Hydrogen Sulfide (H₂S).
 2. Use and limitations of air equipment.
 3. Use of resuscitator.
 4. Organize Buddy System.
 5. First Aid procedures.
 6. Use of H₂S detection devices.
 7. Designate responsible people.
 8. Explain rig layout and policy to visitors.
 - a. Designate smoking and safety or Muster area.
 - b. Emphasize the importance of wind directions.
 9. Describe and explain operation of BOP stack, manifold, separator, and pit piping. Include maximum allowable pressure for casing procedure.
 10. Explain functions of Safety Supervisor.
 11. Explain organize H₂S Drills.
 12. Explain the overall emergency plan with emphasis given to the evacuation phase of the plans.

- Note: The above talks will be attended by every person involved in the operation. When drilling has reached a depth where H₂S is anticipated, temporary service personnel and visitors will be directed to the Drilling Consultant, who will designate the air equipment to be used by them in case of emergency, acquaint them with the dangers involved and be sure of their safety while they are in the area. He will point out the Briefing Areas, Windsocks, and Smoking Areas. He may refuse entrance to anyone, who in his opinion should not be admitted because of lack of safety equipment, special operations in progress or for other reasons involving personnel safety.

F. Outside Service Personnel

All service people such as cementing crews, logging crews, specialist, mechanics, and welders will furnish their own safety equipment. The Company Man/ or designee will be sure that the number of people on location does not exceed the number of masks on location, and they have been briefed regarding safety procedures. He will also be sure each of these people know about smoking and "Briefing Areas" and know what to do in case of an emergency alert or drill. Visitors will be restricted, except with special permission from the Drilling Consultant, when H₂S might be encountered. They will be briefed as to what to do in case of an alert or drill.

G. Onsite/ off shift workers

All workers that are staying on site must be identified as to where they are staying while off tour. If a drill/ or emergency takes place related to an H₂S release, each crew must have a designated person(s) that will wake them up and ensure that they are cleared to the appropriate muster area immediately.

H. Simultaneous Operations (SIMOPS)

If work is going on adjacent to the location is the responsibility of the Drilling Consultant or designee to communicate any applicable risks that may affect personnel working on that adjacent location. In the case of an H₂S drill or event, there should be a designated crew member that is responsible for contacting personnel on adjacent locations. This could include just communication on potential events or in case of an event, notification to evacuate location. Drilling Consultant or designee are the Point of Contact and oversee all activities at such point of an H₂S event occurrence.

I. Area Residences/ Occupied Locations/ Public Roads

Any occupied residences/ businesses that are within a reasonable perimeter of the location (attached map will identify a 3000' radius around location) should be identified as part of this contingency and a reasonable effort will be made to gain contact information for them. As part of the briefing of the contingency plan, the team reviewing should identify where these potential receptors are and plan on who will contact them in case of a release that may impact that area.

J. Drilling Fluids

Drilling Fluid Monitoring – On Any Hazardous H₂S gas well, the earlier the warning of danger the better chance to control operations. Mud Company will be in daily contact with Colgate Energy Consultant. The Mud Engineer will take samples of the mud, analyze these samples, and make necessary recommendations to prevent H₂S gas from the formation, the pH will be increased as necessary for corrosion control.

pH Control – For normal drilling, pH of 10.5 – 11.5. Would be enough for corrosion protection. If there is an influx of H₂S gas from the formation, the pH will be increased as necessary for corrosion control.

H₂S Scavengers – If necessary H₂S scavengers will be added to the drilling mud.

IV. OPERATING CONDITIONS

A. Posting Well Condition Flags

Post the green, yellow or red well condition flag, as appropriate, on the well condition sign at the location entrance, and take necessary precautions as indicated below:

1. **Green Flag:** Potential Danger- When Drilling in known H₂S zones or when H₂S has been detected in the drilling fluid atmosphere. Protective breathing equipment shall be inspected, and all personnel on duty shall be alerted to be ready to use this equipment.
2. **Yellow Flag:** Potential Danger- When the threshold limit value of H₂S (10 PPM) or of SO₂ (5 PPM) is reached. If the concentration of H₂S or SO₂ reaches 10 PPM, protective breathing equipment shall be worn by all working personnel, and non-working personnel shall go to the upwind Safe Briefing Area.
3. **Red Flag:** Extreme danger*- When the ambient concentration of H₂S or SO₂ is reasonably believed or determined to have exceeded the potentially hazardous level. All non-essential personnel shall leave the drilling location taking the route most likely to exposure to escaping gas.

B. Requiring Air Masks Conditions

1. Whenever air masks are used, the person must be clean shaven as shown in the APC Guidelines
2. When breaking out any line where H₂S can reasonably be expected.
3. When sampling air in areas to determine if toxic concentrations of H₂S exist.
4. When working in areas where 10 PPM or more of H₂S has been detected.
5. At any time, there is doubt as to the H₂S level in the area to be entered.

C. Kick Procedure

1. It is very important that the driller be continuously alert, especially when approaching a gas formation.
2. Should gas come into the well bore, it is very important to be aware of a kick at the earliest time.
3. If a kick is identified, follow appropriate diverter or shut in procedures according to the situation that is presented utilizing appropriate kick procedures.

V. EMERGENCY PROCEDURES

- I. In the event of any evidence of H₂S level above 10ppm, take the following steps immediately:
 - a. Secure breathing apparatus.
 - b. Order non-essential personnel out of the danger zone.
 - c. Take steps to determine if the H₂S level can be corrected or suppressed, and if so, proceed with normal operations.
- II. If uncontrollable conditions occur, proceed with the following:
 - a. Take steps to protect and/or remove any public downwind of the rig, including partial evacuation or isolation. Notify necessary public safety personnel.
 - b. Remove all personnel to the Safe Briefing Area.
 - c. Notify public safety personnel for help with maintaining roadblocks, thus limiting traffic and implementing evacuation.
 - d. Determine and proceed with the best possible plan to regain control of the well. Maintain tight security and safety measures.
- III. Responsibility
 - a. The Company Approved Supervisor shall be responsible for the total implementation of the plan.
 - b. The Company Approved Supervisor shall be in complete command during any emergency.
 - c. The Company Approved Supervisor shall designate a backup Supervisor if he/she is not available.
- IV. Actions to be taken
 - a. Assign specific tasks to drilling location personnel
 - b. Evacuate the general public from the exposure area
 - c. Cordon off the exposure area to prevent entry by unauthorized persons
 - d. Request assistance if and as needed and initiate emergency notifications
 - e. Stop the dispersion of H₂S
 - f. Complete emergency notifications as required
 - g. Return the situation to normal

EMERGENCY PROCEDURE IMPLEMENTATION**I. Drilling or Tripping****a. All Personnel**

- i. When alarm sounds, don escape unit and report to upwind Safe Briefing Area.
- ii. Check status of other personnel (buddy system).
- iii. Secure breathing apparatus.
- iv. Wait for orders from supervisor.

b. Drilling Consultant

- i. Report to the upwind Safe Briefing Area.
- ii. Don Breathing Apparatus and return to the point of release with the Tool Pusher or Driller (buddy system).
- iii. Determine the concentration of H₂S.
- iv. Assess the situation and take appropriate control measures.

c. Tool Pusher

- i. Report to the upwind Safe Briefing Area.
- ii. Don Breathing Apparatus and return to the point of release with the Drilling Consultant or the Driller (buddy system).
- iii. Determine the concentration of H₂S.
- iv. Assess the situation and take appropriate control measures.

d. Driller

- i. Check the status of other personnel (in a rescue attempt, always use the buddy system).
- ii. Assign the least essential person to notify the Drilling Consultant and Tool Pusher, in the event of their absence.
- iii. Assume the responsibility of the Drilling Consultant and the Tool Pusher until they arrive, in the event of their absence.

e. Derrick Man and Floor Hands

- i. Remain in the upwind Safe Briefing Area until otherwise instructed by a supervisor.

f. Mud Engineer

- i. Report to the upwind Safe Briefing Area.
- ii. When instructed, begin check of mud for pH level and H₂S level.

g. Safety Personnel

- i. Don Breathing Apparatus.
- ii. Check status of personnel.
- iii. Wait for instructions from Drilling Consultant or Tool Pusher.

II. Taking a Kick

- a.* All Personnel report to the upwind Safe Briefing Area.
- b.* Follow standard BOP/ diverter procedures.

III. Open Hole Logging

- a.* All unnecessary personnel should leave the rig floor.
- b.* Drilling Consultant and Safety Personnel should monitor the conditions and make necessary safety equipment recommendations.

IV. Running Casing or Plugging

- a.* Follow "Drilling or Tripping" procedures.
- b.* Assure that all personnel have access to protective equipment.

VI. POST EMERGENCY ACTIONS

In the event this plan is activated, the following post emergency actions shall be taken in an effort to reduce the possibility of a reoccurrence of the type of problem that required its activation, and/or assure that any future activation of a similar plan will be as effective as possible.

- A. Review the factors that caused or permitted the emergency occur, and if the need is indicated, modify operating, maintenance and/or surveillance procedures.
- B. If the need is indicated, retrain employees in blowout prevention, H₂S emergency procedures and etc.
- C. Clean up, recharge, restock, repair, and/ or replace H₂S emergency equipment as necessary, and return it to its proper place. (For whatever rental equipment is used, this will be the responsibility of Rental Company).
- D. See that future H₂S drilling contingency plans are modified accordingly, if the need is indicated.

VII. IGNITION PROCEDURES

Responsibilities:

The decision to ignite the well is the responsibility of the DRILLING CONSULTANT in concurrence with the STATE POLICE. In the event the Drilling Consultant is incapacitated, it becomes the responsibility of the RIG TOOL PUSHER. This decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope of controlling the blowout under the prevailing conditions.

If time permits, notify the main office, but do not delay if human life is in danger. Initiate the first phase of the evacuation plan.

Instructions for Igniting the Well:

1. Two people are required for the actual igniting operation. Both men must wear self-contained breathing apparatus and must use a full body harness and attach a retrievable safety line to the D-Ring in the back. One man must monitor the atmosphere for explosive gases with the LEL monitor, while the Drilling Consultant is responsible for igniting the well.
2. The primary method to ignite is a 25mm flare gun with a range of approximately 500 feet.
3. Ignite from upwind and do not approach any closer than is warranted.
4. Select the ignition site best suited for protection and which offers an easy escape route.
5. Before igniting, check for the presence of combustible gases.
6. After igniting, continue emergency actions and procedures as before.
7. All unassigned personnel will limit their actions to those directed by the Drilling Consultant.

Note: After the well is ignited, burning Hydrogen Sulfide will convert to Sulfur Dioxide, which is also highly toxic. Also, both are heavier than air. Do not assume the area is safe even after the well is ignited.

VIII. TRAINING PROGRAM

When working in an area where Hydrogen Sulfide (H₂S) might be encountered, definite training requirements must be carried out. The Company Supervisor will ensure that all personnel, at the well site, have had adequate training in the following:

1. Hazards and characteristics of Hydrogen Sulfide (H₂S).
2. Physicals effects of Hydrogen Sulfide on the human body.
3. Toxicity of Hydrogen Sulfide and Sulfur Dioxide.
4. H₂S detection, Emergency alarm and sensor location.
5. Don and Doff of SCBA and be clean shaven.
6. Emergency rescue.
7. Resuscitators.
8. First aid and artificial resuscitation.
9. The effects of Hydrogen Sulfide on metals.
10. Location safety.

Service company personnel and visiting personnel must be notified if the zone contains H₂S, and each service company must provide adequate training and equipment for their employees before they arrive at the well site.

IX. EMERGENCY EQUIPMENT

Lease Entrance Sign:

Should be located at the lease entrance with the following information:

CAUTION – POTENTIAL POISON GAS
HYDROGEN SULFIDE
NO ADMITTANCE WITHOUT AUTHORIZATION

Respiratory Equipment:

- Fresh air breathing equipment should be placed at the safe briefing areas and should include the following:
- Two SCBA's at each briefing area.
- Enough airline units to operate safely, anytime the H₂S concentration reaches the IDLH level (100 ppm).

- Cascade system with enough breathing air hose and manifolds to reach the rig floor, the derrickman and the other operation areas.

Windssocks or Wind Streamers:

- A minimum of two 10" windssocks located at strategic locations so that they may be seen from any point on location.
- Wind streamers (if preferred) should always be placed at various locations on the well site to ensure wind consciousness. (Corners of location).

Hydrogen Sulfide Detector and Alarms:

- 1 - Four channel H₂S monitor with alarms.
- Three (3) sensors located as follows: #1 – Rig Floor, #2 – Shale Shaker, #3 – Cellar.
- Gastec or Draeger pump with tubes.
- Sensor test gas.

Well Condition Sign and Flags:

The Well Condition Sign w/flags should be placed a minimum of 150' before you enter the location. It should have three (3) color coded flags (green, yellow and red) that will be used to denote the following location conditions:

GREEN – Normal Operating Conditions
YELLOW – Potential Danger
RED – Danger, H₂S Gas Present

Auxiliary Rescue Equipment:

- Stretcher
- 2 – 100' Rescue lines.
- First Aid kit properly stocked.

Mud Inspection Equipment:

Garret Gas Train or Hach Tester for inspection of Hydrogen Sulfide in the drilling mud system.

Fire Extinguishers:

Adequate fire extinguishers shall be located at strategic locations.

Blowout Preventer:

- The well shall have hydraulic BOP equipment for the anticipated bottom hole pressure (BHP).
- The BOP should be tested upon installation.
- BOP, Choke Line and Kill Line will be tested as specified by Operator.

Confined Space Monitor:

There should be a portable multi-gas monitor with at least 3 sensors (O₂, LEL H₂S), preferably 4 (O₂, LEL, H₂S, CO). This instrument should be used to test the atmosphere of any confined space before entering. It should also be used for atmospheric testing for LEL gas before beginning any type of Hot Work. Proper calibration documentation will need to be provided.

Communication Equipment:

- Proper communication equipment such as cell phones or 2-way radios should be available at the rig.
- Radio communication shall be available for communication between the company man's trailer, rig floor and the tool pusher's trailer.
- Communication equipment shall be available on the vehicles.

Special Control Equipment:

- Hydraulic BOP equipment with remote control on the ground.
- Rotating head at the surface casing point.

Evacuation Plan:

- Evacuation routes should be established prior to spudding the well.
- Should be discussed with all rig personnel.

Designated Areas:***Parking and Visitor area:***

- All vehicles are to be parked at a pre-determined safe distance from the wellhead.
- Designated smoking area.

Safe Briefing Areas:

- Two Safe Briefing Areas shall be designated on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds, or they are at a 180-degree angle if wind directions tend to shift in the area.
- Personal protective equipment should be stored at both briefing areas and if a moveable cascade trailer is used, it should be kept upwind of existing winds. When wind is from the prevailing direction, both briefing areas should be accessible.

Note:

- Additional equipment will be available at the H₂S Provider Safety office.
- Additional personal H₂S monitors are available for all employees on location.
- Automatic Flare Igniters are recommended for installation on the rig.

X. CHECKLISTS**Rig-up & Equipment Status Check List**

Note: Initial & Date each item as they are implemented. Multiple wells require additional Columns to be Dated/ Initialed

	Date & Initial 1 st Well	Date & Initial 2 nd Well	Date & Initial 3 rd Well	Date & Initial 4 th Well
Sign at location entrance.				
Two (2) windsocks (in required locations).				
Wind Streamers (if required).				
SCBA's on location (Minimum of 2 @ each Muster Area)				
Air packs (working packs and escape packs), inspected and ready for use.				
Spare bottles for each air pack (if required).				
Cascade system and hose line hook up.				
Choke manifold hooked-up and tested. (before drilling out surface casing.)				
Remote Hydraulic BOP control tested (before drilling out surface casing).				
BOP tested (before drilling out surface casing).				
Safe Briefing Areas set-up				
Well Condition sign and flags on location and ready.				
Hydrogen Sulfide detection/ alarm system hooked-up & tested.				
Stretcher on location				
2 – 100' Lifelines on location.				
1 – 20# Fire Extinguisher in safety trailer.				
Confined Space monitor on location and tested.				
All rig crews and supervisor trained (as required).				
All rig crews and supervision medically qualified and fit tested on proper respirators				
Access restricted for unauthorized personnel.				
Pre-spud meeting held reviewing Contingencies				
Drills on H ₂ S and well control procedures.				
All outside service contractors advised of potential H ₂ S on the well.				
25mm Flare Gun on location w/flares.				

Procedural Check List

Perform the following on each tour:

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that they have not been tampered with.
3. Check pressure on the supply air bottles to make sure they are capable of recharging.
4. Make sure all the Hydrogen Sulfide detection systems are operative.
5. Ensure that all BOP/ Surface Annular/ Diverter systems are functioning and operational.

Perform the following each week:

1. Check each piece of breathing equipment to make sure that they are fully charged and operational. This requires that the air cylinder be opened, and the mask assembly be put on and tested to make sure that the regulators and masks are properly working. Negative and Positive pressure should be conducted on all masks.
2. BOP skills.
3. Check supply pressure on BOP accumulator stand-by source.
4. Check all breathing air mask assemblies to see that straps are loosened and turned back, ready for use.
5. Check pressure on cascade air cylinders to make sure they are fully charged and ready to use for refill purposes if necessary.
6. Check all cascade system regulators to make sure they work properly.
7. Perform breathing drills with on-site personnel.
8. Check the following supplies for availability (may be with H₂S Techs On-call):
 - Stretcher
 - Safety Belts and Ropes
 - Spare air Bottles
 - Spare Oxygen Bottles (if resuscitator required)
 - Gas Detector Pump and Tubes
 - Emergency telephone lists
 - Test the Confined Space Monitor to verify the batteries are good.

XI. BRIEFING PROCEDURES

The following scheduled briefings will be held to ensure the effective drilling and operation of this project:

Pre-Spud Meeting

Date: Prior to spudding the well.

Attendance: Drilling Supervisor
 Drilling Engineer
 Drilling Consultant
 Rig Tool Pushers
 Rig Drillers
 Mud Engineer
 All Safety Personnel
 Key Service Company Personnel

Purpose: Review and discuss the well program, step-by-step, to insure complete understanding of assignments and responsibilities.

XII. EVACUATION PLAN

General Plan

The direct lines of action prepared by Colgate Energy to protect the public from hazardous gas situations are as follows:

1. When the company approved supervisor (Drilling Consultant, Tool Pusher or Driller) determine that Hydrogen Sulfide gas cannot be limited to the well location, and the public will be involved, he will activate the evacuation plan. Escape routes are noted on the area map.
2. Company safety personnel or designee will notify the appropriate local government agency that a hazardous condition exists, and evacuation needs to be implemented.
3. Company approved safety personnel that have been trained in the use of the proper emergency equipment will be utilized.
4. Law enforcement personnel (State Police, Local Police Department, Fire Department, and the Sheriff's Department) will be called to aid in setting up and maintaining roadblocks. Also, they will aid in evacuation of the public if necessary.

NOTE: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.

5. After the discharge of gas has been controlled, "Company" personnel will determine when the area is safe for re-entry.
6. If a major release is secured, all exposed housing, vehicles, rig buildings, and low-lying areas and other structures downwind must be tested and clear with SCBAs donned to ensure that all residual H₂S is cleared. Fans, or opening of doors is recommended to ensure that areas are cleared out as part of this process.

XIII. APPENDICES AND GENERAL INFORMATION

Radius of Exposure Affected Notification List

(within a 65' radius of exposure @100ppm)

The geologic zones that will be encountered during drilling are known to contain hazardous quantities of H₂S. The accompanying map illustrates the affected areas of the community. The residents within this radius will be notified via a hand delivered written notice describing the activities, potential hazards, conditions of evacuation, evacuation drill siren alarms and other precautionary measures.

Evacuee Description: Residents:

Notification Process:

A continuous siren audible to all residence will be activated, signaling evacuation of previously notified and informed residents.

Evacuation Plan:

All evacuees will migrate lateral to the wind direction.

The Operating Company will identify all home bound or highly susceptible individuals and make special evacuation preparations, interfacing with the local and emergency medical service as necessary.

Toxic Effects of H₂S Poisoning

Hydrogen Sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 PPM, which is .001% by volume. Hydrogen Sulfide is heavier than air (specific gravity – 1.192) and is colorless and transparent. Hydrogen Sulfide is almost as toxic as Hydrogen Cyanide and is 5-6 times more toxic than Carbon Monoxide. Occupational exposure limits for Hydrogen Sulfide and other gases are compared below in Table 1. Toxicity table for H₂S and physical effects are shown in Table 2.

Table 1
Permissible Exposure Limits of Various Gases

<u>Common Name</u>	<u>Symbol</u>	<u>Sp. Gravity</u>	<u>TLV</u>	<u>STEL</u>	<u>IDLH</u>
Hydrogen Cyanide	HCN	.94	4.7 ppm	4.7 ppm	50 ppm
Hydrogen Sulfide	H ₂ S	1.192	10 ppm	15 ppm	100 ppm
Sulfide Dioxide	SO ₂	2.21	2 ppm	5 ppm	100 ppm
Chlorine	CL	2.45	.5 ppm	1 ppm	10 ppm
Carbon Monoxide	CO	.97	25 ppm	200 ppm	1200 ppm
Carbon Dioxide	CO ₂	1.52	5000 ppm	30,000 ppm	40,000 ppm
Methane	CH ₄	.55	5% LEL	15% UEL	

Definitions

- A. TLV – Threshold Limit Value is the concentration employees may be exposed based on a TWA (time weighted average) for eight (8) hours in one day for 40 hours in one (1) week. This is set by ACGIH (American Conference of Governmental Hygienists) and regulated by OSHA.
- B. STEL – Short Term Exposure Limit is the 15-minute average concentration an employee may be exposed to providing that the highest exposure never exceeds the OEL (Occupational Exposure Limit). The OEL for H₂S is 20 PPM.
- C. IDLH – Immediately Dangerous to Life and Health is the concentration that has been determined by the ACGIH to cause serious health problems or death if exposed to this level. The IDLH for H₂S is 100 PPM.
- D. TWA – Time Weighted Average is the average concentration of any chemical or gas for an eight (8) hour period. This is the concentration that any employee may be exposed based on a TWA.

Toxicity Table of H₂S

<u>Percent %</u>	<u>PPM</u>	<u>Physical Effects</u>
.0001	1	Can smell less than 1 ppm.
.001	10	TLV for 8 hours of exposure.
.0015	15	STEL for 15 minutes of exposure.
.01	100	Immediately Dangerous to Life & Health. Kills sense of smell in 3 to 5 minutes.
.02	200	Kills sense of smell quickly, may burn eyes and throat.
.05	500	Dizziness, cessation of breathing begins in a few minutes .
.07	700	Unconscious quickly, death will result if not rescued promptly.
.10	1000	Death will result unless rescued promptly. Artificial resuscitation may be necessary.

PHYSICAL PROPERTIES OF H₂S

The properties of all gases are usually described in the context of seven major categories:

- COLOR
- ODOR
- VAPOR DENSITY
- EXPLOSIVE LIMITS
- FLAMMABILITY
- SOLUBILITY (IN WATER)
- BOILING POINT

Hydrogen Sulfide is no exception. Information from these categories should be considered in order to provide a complete picture of the properties of the gas.

COLOR – TRANSPARENT

Hydrogen Sulfide is colorless, so it is invisible. This fact simply means that you can't rely on your eyes to detect its presence. In fact, that makes this gas extremely dangerous to be around.

ODOR – ROTTEN EGGS

Hydrogen Sulfide has a distinctive offensive smell, like "rotten eggs". For this reason, it earned its common name "sour gas". However, H₂S, even in low concentrations, is so toxic that it attacks and quickly impairs a victim's sense of smell, so it could be fatal to rely on your nose as a detection device.

VAPOR DENSITY – SPECIFIC GRAVITY OF 1.192

Hydrogen Sulfide is heavier than air, so it tends to settle in low-lying areas like pits, cellars or tanks. If you find yourself in a location where H₂S is known to exist, protect yourself. Whenever possible, work in an area upwind and keep to higher ground.

EXPLOSIVE LIMITS – 4.0% TO 44%

Mixed with the right proportion of air or oxygen, H₂S will ignite and burn or explode, producing another alarming element of danger besides poisoning.

FLAMMABILITY

Hydrogen Sulfide will burn readily with a distinctive clear blue flame, producing Sulfur Dioxide (SO₂), another hazardous gas that irritates the eyes and lungs.

SOLUBILITY – 4 TO 1 RATIO WITH WATER

Hydrogen Sulfide can be dissolved in liquids, which means that it can be present in any container or vessel used to carry or hold well fluids including oil, water, emulsion and sludge. The solubility of H₂S is dependent on temperature and pressure, but if conditions are right, simply agitating a fluid containing H₂S may release the gas into the air.

BOILING POINT – (-77° Fahrenheit)

Liquefied Hydrogen Sulfide boils at a very low temperature, so it is usually found as a gas.

RESPIRATOR USE

The Occupational Safety and Health Administration (OSHA) regulate the use of respiratory protection to protect the health of employees. OSHA's requirements are written in the Code of Federal Regulations, Title 29, Part 1910, Section 134, Respiratory Protection. This regulation requires that all employees who might be required to wear respirators, shall complete an OSHA mandated medical evaluation questionnaire. The employee then should be fit tested prior to wearing any respirator while being exposed to hazardous gases.

Written procedures shall be prepared covering safe use of respirators in dangerous atmospheric situations, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available respirators.

Respirators shall be inspected prior to and after each use to make sure that the respirator has been properly cleaned, disinfected and that the respirator works properly. The unit should be fully charged prior to being used.

Anyone who may use respirators shall be properly trained in how to properly seal the face piece. They shall wear respirators in normal air and then in a test atmosphere. (Note: Such items as facial hair (beard or sideburns) and eyeglass temple pieces will not allow a proper seal.) Anyone who may be expected to wear respirators should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses. Contact lenses should not be allowed.

Respirators shall be worn during the following conditions:

- A. Any employee who works near the top or on the top of any tank unless tests reveal less than 20 ppm of H₂S.
- B. When breaking out any line where H₂S can reasonably be expected.
- C. When sampling air in areas where H₂S may be present.
- D. When working in areas where the concentration of H₂S exceeds the Threshold Limit Value for H₂S (10 ppm).
- E. At any time where there is a doubt as to the H₂S level in the area to be entered.

EMERGENCY RESCUE PROCEDURES


DO NOT PANIC!!!

Remain Calm – Think

1. Before attempting any rescue, you must first get out of the hazardous area yourself. Go to a safe briefing area.
2. Sound alarm and activate the 911 system.
3. Put on breathing apparatus. At least two persons should do this, when available use the buddy system.
4. Rescue the victim and return them to a safe briefing area.
5. Perform an initial assessment and begin proper First Aid/CPR procedures.
6. Keep victim lying down with a blanket or coat, etc., under the shoulders to keep airway open. Conserve body heat and do not leave unattended.
7. If the eyes are affected by H₂S, wash them thoroughly with potable water. For slight irritation, cold compresses are helpful.
8. In case a person has only minor exposure and does not lose consciousness totally, it's best if he doesn't return to work until the following day.
9. Any personnel overcome by H₂S should always be examined by medical personnel. They should always be transported to a hospital or doctor.

Facial Hair – Clean Shaven Examples

Purpose: To define clean shaven expectations in the field for: 1) Respirator Use, if applicable and 2) First Aid Administration, if situation occurs related to H₂S exposure, having no facial hair can greatly benefit response time and treatment ability.

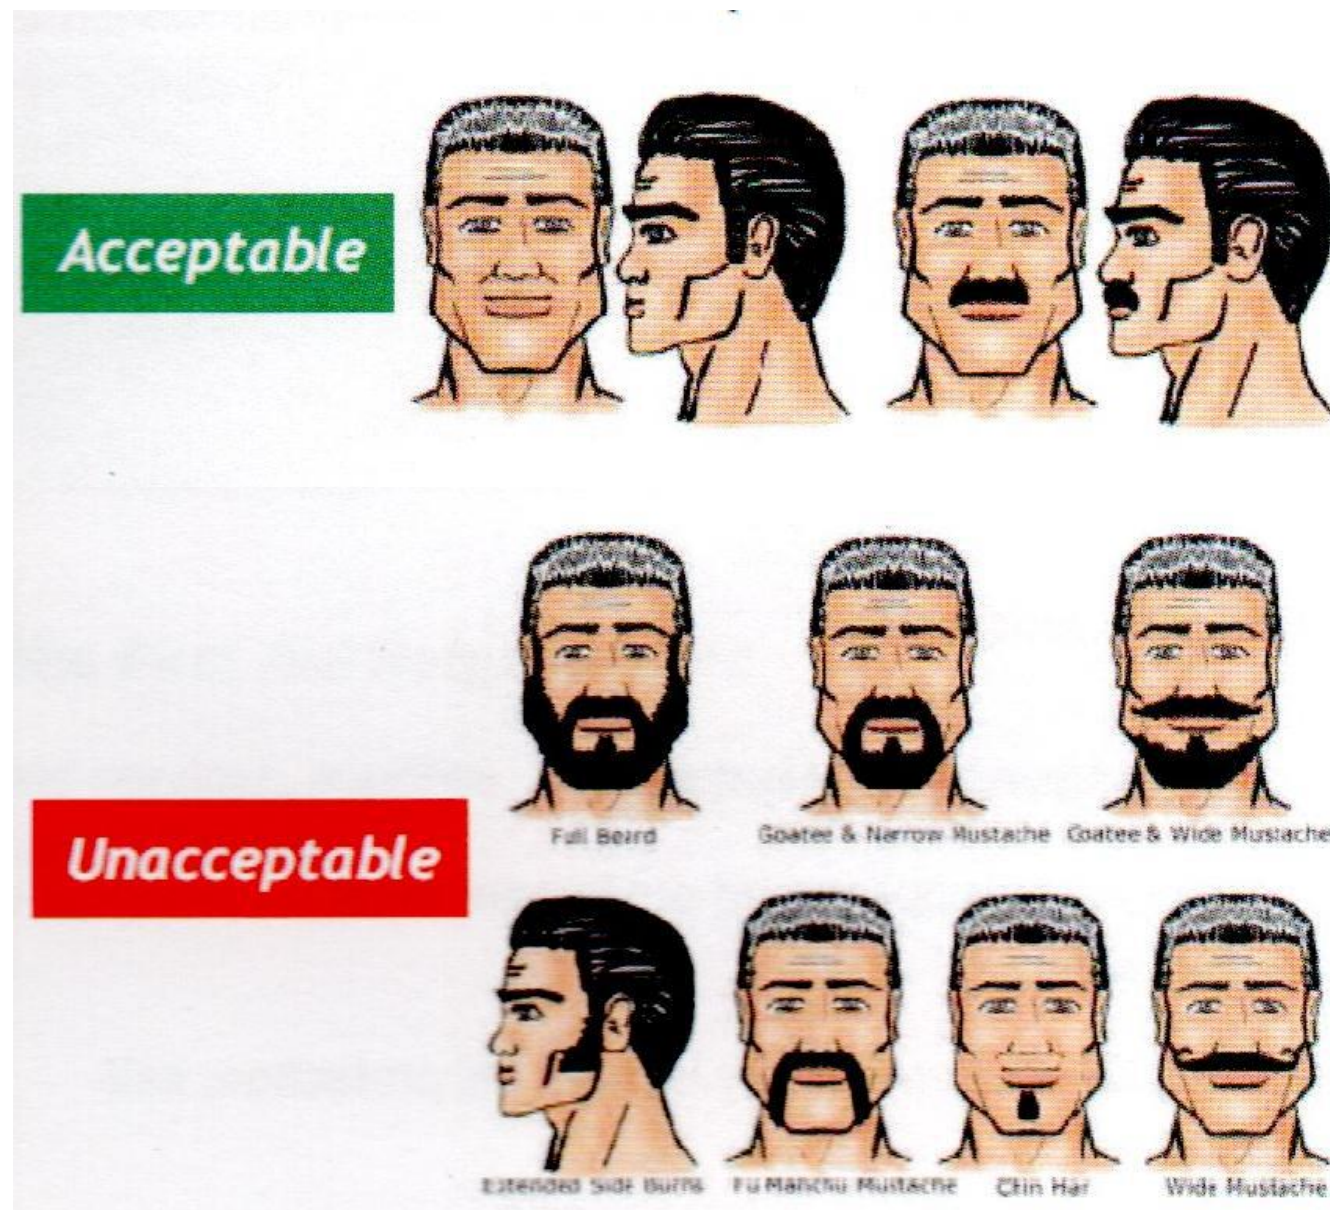



Colgate Energy

(Permit) Eddy County, NM (83-NME)

(Permit) Koala 9 Fed Com

(A03) Koala 9 Fed Com 131H

Permit

Plan: APD-Rev00

Standard Planning Report - Geographic

12 May, 2022



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Company:	Colgate Energy	TVD Reference:	3288+30 @ 3318.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3288+30 @ 3318.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Project	(Permit) Eddy County, NM (83-NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	(Permit) Koala 9 Fed Com				
Site Position:		Northing:	579,560.58 usft	Latitude:	32.59318638
From:	Map	Easting:	584,661.65 usft	Longitude:	-104.19265949
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "		

Well	(A03) Koala 9 Fed Com 131H					
Well Position	+N/-S	0.00 usft	Northing:	579,560.58 usft	Latitude:	32.59318628
	+E/-W	0.00 usft	Easting:	584,690.66 usft	Longitude:	-104.19256530
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,288.00 usft
Grid Convergence:		0.08 °				

Wellbore	Permit				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	5/6/2022	6.76	60.11	47,555.78184194

Design	APD-Rev00			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	89.58

Plan Survey Tool Program	Date	5/12/2022		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	19,355.95 APD-Rev00 (Permit)	MWD+IFR1+SAG+FDIR (SQC OWSG MWD + IFR1 + Sag + f	



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Company:	Colgate Energy	TVD Reference:	3288+30 @ 3318.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3288+30 @ 3318.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,710.01	3.15	170.40	2,709.91	-5.69	0.96	1.50	1.50	0.00	170.40	
3,791.83	3.15	170.40	3,790.09	-64.31	10.88	0.00	0.00	0.00	0.00	
4,001.85	0.00	0.00	4,000.00	-70.00	11.84	1.50	-1.50	0.00	180.00	
7,911.80	0.00	0.00	7,909.95	-70.00	11.84	0.00	0.00	0.00	0.00	
8,511.80	60.00	106.60	8,406.15	-151.84	286.38	10.00	10.00	0.00	106.60	
8,852.76	90.00	89.58	8,494.00	-194.02	607.89	10.00	8.80	-4.99	-31.48	
19,355.95	90.00	89.58	8,494.00	-116.91	11,110.80	0.00	0.00	0.00	0.00	PBHL(K9- 131H)



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Company:	Colgate Energy	TVD Reference:	3288+30 @ 3318.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3288+30 @ 3318.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.00	0.00	0.00	0.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
100.00	0.00	0.00	100.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
200.00	0.00	0.00	200.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
241.00	0.00	0.00	241.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
Rustler									
300.00	0.00	0.00	300.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
382.00	0.00	0.00	382.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
T/Salt									
400.00	0.00	0.00	400.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
500.00	0.00	0.00	500.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
600.00	0.00	0.00	600.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
700.00	0.00	0.00	700.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
768.00	0.00	0.00	768.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
Tansill									
800.00	0.00	0.00	800.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
843.00	0.00	0.00	843.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
Yates									
900.00	0.00	0.00	900.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
1,000.00	0.00	0.00	1,000.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
1,100.00	0.00	0.00	1,100.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
1,200.00	0.00	0.00	1,200.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
1,218.00	0.00	0.00	1,218.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
Seven Rivers									
1,300.00	0.00	0.00	1,300.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
1,400.00	0.00	0.00	1,400.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
1,500.00	0.00	0.00	1,500.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
1,600.00	0.00	0.00	1,600.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
1,700.00	0.00	0.00	1,700.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
1,800.00	0.00	0.00	1,800.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
1,809.00	0.00	0.00	1,809.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
Queen									
1,900.00	0.00	0.00	1,900.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
2,000.00	0.00	0.00	2,000.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
2,018.00	0.00	0.00	2,018.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
Grayburg									
2,100.00	0.00	0.00	2,100.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
2,200.00	0.00	0.00	2,200.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
2,300.00	0.00	0.00	2,300.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
2,400.00	0.00	0.00	2,400.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
2,418.00	0.00	0.00	2,418.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
San Andres									
2,500.00	0.00	0.00	2,500.00	0.00	0.00	579,560.58	584,690.66	32.59318628	-104.19256530
2,600.00	1.50	170.40	2,599.99	-1.29	0.22	579,559.29	584,690.88	32.59318273	-104.19256459
2,700.00	3.00	170.40	2,699.91	-5.16	0.87	579,555.42	584,691.54	32.59317209	-104.19256248
2,710.01	3.15	170.40	2,709.91	-5.69	0.96	579,554.89	584,691.63	32.59317063	-104.19256219
2,800.00	3.15	170.40	2,799.76	-10.57	1.79	579,550.02	584,692.45	32.59315722	-104.19255954
2,900.00	3.15	170.40	2,899.61	-15.99	2.70	579,544.60	584,693.37	32.59314233	-104.19255658
2,993.53	3.15	170.40	2,993.00	-21.05	3.56	579,539.53	584,694.22	32.59312839	-104.19255382
CYCN									
3,000.00	3.15	170.40	2,999.46	-21.40	3.62	579,539.18	584,694.28	32.59312743	-104.19255363
3,100.00	3.15	170.40	3,099.30	-26.82	4.54	579,533.76	584,695.20	32.59311253	-104.19255068
3,200.00	3.15	170.40	3,199.15	-32.24	5.45	579,528.34	584,696.12	32.59309764	-104.19254773
3,300.00	3.15	170.40	3,299.00	-37.66	6.37	579,522.92	584,697.03	32.59308274	-104.19254477



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Company:	Colgate Energy	TVD Reference:	3288+30 @ 3318.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3288+30 @ 3318.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
3,400.00	3.15	170.40	3,398.85	-43.08	7.29	579,517.51	584,697.95	32.59306784	-104.19254182	
3,500.00	3.15	170.40	3,498.70	-48.50	8.20	579,512.09	584,698.87	32.59305294	-104.19253887	
3,600.00	3.15	170.40	3,598.55	-53.91	9.12	579,506.67	584,699.78	32.59303805	-104.19253592	
3,700.00	3.15	170.40	3,698.40	-59.33	10.04	579,501.25	584,700.70	32.59302315	-104.19253296	
3,791.83	3.15	170.40	3,790.09	-64.31	10.88	579,496.27	584,701.54	32.59300947	-104.19253025	
3,800.00	3.03	170.40	3,798.25	-64.74	10.95	579,495.84	584,701.61	32.59300828	-104.19253002	
3,900.00	1.53	170.40	3,898.17	-68.66	11.61	579,491.92	584,702.28	32.59299750	-104.19252788	
4,001.85	0.00	0.00	4,000.00	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
4,100.00	0.00	0.00	4,098.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
4,200.00	0.00	0.00	4,198.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
4,300.00	0.00	0.00	4,298.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
4,400.00	0.00	0.00	4,398.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
4,500.00	0.00	0.00	4,498.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
4,569.85	0.00	0.00	4,568.00	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
BSGL										
4,600.00	0.00	0.00	4,598.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
4,700.00	0.00	0.00	4,698.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
4,800.00	0.00	0.00	4,798.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
4,900.00	0.00	0.00	4,898.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
5,000.00	0.00	0.00	4,998.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
5,100.00	0.00	0.00	5,098.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
5,200.00	0.00	0.00	5,198.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
5,300.00	0.00	0.00	5,298.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
5,400.00	0.00	0.00	5,398.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
5,500.00	0.00	0.00	5,498.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
5,600.00	0.00	0.00	5,598.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
5,700.00	0.00	0.00	5,698.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
5,800.00	0.00	0.00	5,798.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
5,900.00	0.00	0.00	5,898.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
6,000.00	0.00	0.00	5,998.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
6,100.00	0.00	0.00	6,098.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
6,119.85	0.00	0.00	6,118.00	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
FBSG										
6,200.00	0.00	0.00	6,198.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
6,300.00	0.00	0.00	6,298.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
6,400.00	0.00	0.00	6,398.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
6,500.00	0.00	0.00	6,498.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
6,501.85	0.00	0.00	6,500.00	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
EON 2 - EON 3 - EON 1										
6,600.00	0.00	0.00	6,598.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
6,700.00	0.00	0.00	6,698.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
6,800.00	0.00	0.00	6,798.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
6,900.00	0.00	0.00	6,898.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
7,000.00	0.00	0.00	6,998.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
7,100.00	0.00	0.00	7,098.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
7,144.85	0.00	0.00	7,143.00	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
SBSG										
7,200.00	0.00	0.00	7,198.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
7,300.00	0.00	0.00	7,298.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
7,400.00	0.00	0.00	7,398.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
7,500.00	0.00	0.00	7,498.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
7,600.00	0.00	0.00	7,598.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
7,700.00	0.00	0.00	7,698.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
7,800.00	0.00	0.00	7,798.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Company:	Colgate Energy	TVD Reference:	3288+30 @ 3318.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3288+30 @ 3318.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
7,900.00	0.00	0.00	7,898.15	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
7,911.80	0.00	0.00	7,909.95	-70.00	11.84	579,490.58	584,702.50	32.59299382	-104.19252715	
KOP: 7911.80' MD, 11.33' VS,7909.95' TVD										
7,950.00	3.82	106.60	7,948.13	-70.36	13.06	579,490.22	584,703.72	32.59299282	-104.19252319	
8,000.00	8.82	106.60	7,997.81	-71.94	18.33	579,488.65	584,709.00	32.59298848	-104.19250608	
8,050.00	13.82	106.60	8,046.82	-74.74	27.74	579,485.84	584,718.40	32.59298074	-104.19247556	
8,100.00	18.82	106.60	8,094.79	-78.75	41.20	579,481.83	584,731.86	32.59296966	-104.19243187	
8,150.00	23.82	106.60	8,141.35	-83.94	58.61	579,476.64	584,749.28	32.59295532	-104.19237534	
8,200.00	28.82	106.60	8,186.15	-90.28	79.85	579,470.31	584,770.51	32.59293784	-104.19230641	
8,250.00	33.82	106.60	8,228.85	-97.70	104.75	579,462.88	584,795.41	32.59291735	-104.19222559	
8,298.56	38.68	106.60	8,268.00	-105.90	132.26	579,454.69	584,822.92	32.59289471	-104.19213631	
TBSG										
8,300.00	38.82	106.60	8,269.13	-106.16	133.12	579,454.43	584,823.79	32.59289400	-104.19213350	
8,350.00	43.82	106.60	8,306.67	-115.58	164.75	579,445.00	584,855.41	32.59286796	-104.19203085	
8,400.00	48.82	106.60	8,341.19	-125.91	199.39	579,434.67	584,890.06	32.59283945	-104.19191841	
8,450.00	53.82	106.60	8,372.42	-137.06	236.79	579,423.52	584,927.45	32.59280867	-104.19179704	
8,500.00	58.82	106.60	8,400.14	-148.94	276.65	579,411.64	584,967.31	32.59277586	-104.19166766	
8,511.80	60.00	106.60	8,406.15	-151.84	286.38	579,408.74	584,977.04	32.59276785	-104.19163608	
8,550.00	63.28	104.37	8,424.29	-160.81	318.77	579,399.78	585,009.44	32.59274310	-104.19153094	
8,600.00	67.61	101.63	8,445.07	-171.02	363.07	579,389.57	585,053.74	32.59271487	-104.19138714	
8,650.00	72.00	99.06	8,462.33	-179.43	409.22	579,381.16	585,099.89	32.59269158	-104.19123733	
8,700.00	76.41	96.62	8,475.94	-185.98	456.87	579,374.60	585,147.53	32.59267340	-104.19108265	
8,750.00	80.84	94.27	8,485.80	-190.62	505.65	579,369.96	585,196.31	32.59266047	-104.19092427	
8,769.97	82.62	93.34	8,488.67	-191.93	525.37	579,368.65	585,216.03	32.59265679	-104.19086026	
20" Casing										
8,800.00	85.30	91.97	8,491.83	-193.31	555.20	579,367.27	585,245.86	32.59265288	-104.19076341	
8,824.05	87.44	90.88	8,493.35	-193.91	579.19	579,366.67	585,269.85	32.59265115	-104.19068551	
100'FWL										
8,824.06	87.44	90.88	8,493.35	-193.91	579.20	579,366.67	585,269.87	32.59265115	-104.19068547	
FTP(K9- 131H)										
8,852.76	90.00	89.58	8,494.00	-194.02	607.89	579,366.56	585,298.55	32.59265073	-104.19059232	
EOC: 8852.76' MD, 606.45' VS,8494.00' TVD										
8,900.00	90.00	89.58	8,494.00	-193.68	655.13	579,366.91	585,345.79	32.59265151	-104.19043894	
9,000.00	90.00	89.58	8,494.00	-192.94	755.13	579,367.64	585,445.79	32.59265316	-104.19011425	
9,100.00	90.00	89.58	8,494.00	-192.21	855.12	579,368.37	585,545.79	32.59265480	-104.18978956	
9,200.00	90.00	89.58	8,494.00	-191.47	955.12	579,369.11	585,645.78	32.59265645	-104.18946486	
9,300.00	90.00	89.58	8,494.00	-190.74	1,055.12	579,369.84	585,745.78	32.59265810	-104.18914017	
9,400.00	90.00	89.58	8,494.00	-190.01	1,155.11	579,370.58	585,845.78	32.59265974	-104.18881548	
9,500.00	90.00	89.58	8,494.00	-189.27	1,255.11	579,371.31	585,945.77	32.59266139	-104.18849079	
9,600.00	90.00	89.58	8,494.00	-188.54	1,355.11	579,372.05	586,045.77	32.59266303	-104.18816609	
9,700.00	90.00	89.58	8,494.00	-187.80	1,455.11	579,372.78	586,145.77	32.59266467	-104.18784140	
9,800.00	90.00	89.58	8,494.00	-187.07	1,555.10	579,373.51	586,245.77	32.59266631	-104.18751671	
9,900.00	90.00	89.58	8,494.00	-186.34	1,655.10	579,374.25	586,345.76	32.59266795	-104.18719202	
10,000.00	90.00	89.58	8,494.00	-185.60	1,755.10	579,374.98	586,445.76	32.59266959	-104.18686732	
10,100.00	90.00	89.58	8,494.00	-184.87	1,855.10	579,375.72	586,545.76	32.59267123	-104.18654263	
10,200.00	90.00	89.58	8,494.00	-184.13	1,955.09	579,376.45	586,645.76	32.59267287	-104.18621794	
10,300.00	90.00	89.58	8,494.00	-183.40	2,055.09	579,377.18	586,745.75	32.59267451	-104.18589325	
10,400.00	90.00	89.58	8,494.00	-182.66	2,155.09	579,377.92	586,845.75	32.59267615	-104.18556855	
10,500.00	90.00	89.58	8,494.00	-181.93	2,255.08	579,378.65	586,945.75	32.59267778	-104.18524386	
10,600.00	90.00	89.58	8,494.00	-181.20	2,355.08	579,379.39	587,045.75	32.59267942	-104.18491917	
10,700.00	90.00	89.58	8,494.00	-180.46	2,455.08	579,380.12	587,145.74	32.59268105	-104.18459448	
10,800.00	90.00	89.58	8,494.00	-179.73	2,555.08	579,380.86	587,245.74	32.59268268	-104.18426978	
10,900.00	90.00	89.58	8,494.00	-178.99	2,655.07	579,381.59	587,345.74	32.59268432	-104.18394509	
11,000.00	90.00	89.58	8,494.00	-178.26	2,755.07	579,382.32	587,445.73	32.59268595	-104.18362040	



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Company:	Colgate Energy	TVD Reference:	3288+30 @ 3318.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3288+30 @ 3318.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
11,100.00	90.00	89.58	8,494.00	-177.52	2,855.07	579,383.06	587,545.73	32.59268758	-104.18329571	
11,200.00	90.00	89.58	8,494.00	-176.79	2,955.07	579,383.79	587,645.73	32.59268921	-104.18297101	
11,300.00	90.00	89.58	8,494.00	-176.06	3,055.06	579,384.53	587,745.73	32.59269084	-104.18264632	
11,388.44	90.00	89.58	8,494.00	-175.41	3,143.50	579,385.18	587,834.16	32.59269228	-104.18235916	
Enter NM 013232 - Exit NM 137444										
11,400.00	90.00	89.58	8,494.00	-175.32	3,155.06	579,385.26	587,845.72	32.59269247	-104.18232163	
11,500.00	90.00	89.58	8,494.00	-174.59	3,255.06	579,385.99	587,945.72	32.59269409	-104.18199693	
11,600.00	90.00	89.58	8,494.00	-173.85	3,355.06	579,386.73	588,045.72	32.59269572	-104.18167224	
11,700.00	90.00	89.58	8,494.00	-173.12	3,455.05	579,387.46	588,145.72	32.59269735	-104.18134755	
11,800.00	90.00	89.58	8,494.00	-172.39	3,555.05	579,388.20	588,245.71	32.59269897	-104.18102286	
11,900.00	90.00	89.58	8,494.00	-171.65	3,655.05	579,388.93	588,345.71	32.59270060	-104.18069816	
12,000.00	90.00	89.58	8,494.00	-170.92	3,755.04	579,389.67	588,445.71	32.59270222	-104.18037347	
12,100.00	90.00	89.58	8,494.00	-170.18	3,855.04	579,390.40	588,545.70	32.59270384	-104.18004878	
12,200.00	90.00	89.58	8,494.00	-169.45	3,955.04	579,391.13	588,645.70	32.59270546	-104.17972409	
12,300.00	90.00	89.58	8,494.00	-168.71	4,055.04	579,391.87	588,745.70	32.59270708	-104.17939939	
12,400.00	90.00	89.58	8,494.00	-167.98	4,155.03	579,392.60	588,845.70	32.59270870	-104.17907470	
12,500.00	90.00	89.58	8,494.00	-167.25	4,255.03	579,393.34	588,945.69	32.59271032	-104.17875001	
12,600.00	90.00	89.58	8,494.00	-166.51	4,355.03	579,394.07	589,045.69	32.59271194	-104.17842532	
12,700.00	90.00	89.58	8,494.00	-165.78	4,455.03	579,394.81	589,145.69	32.59271356	-104.17810062	
12,800.00	90.00	89.58	8,494.00	-165.04	4,555.02	579,395.54	589,245.69	32.59271517	-104.17777593	
12,900.00	90.00	89.58	8,494.00	-164.31	4,655.02	579,396.27	589,345.68	32.59271679	-104.17745124	
13,000.00	90.00	89.58	8,494.00	-163.58	4,755.02	579,397.01	589,445.68	32.59271841	-104.17712654	
13,100.00	90.00	89.58	8,494.00	-162.84	4,855.01	579,397.74	589,545.68	32.59272002	-104.17680185	
13,200.00	90.00	89.58	8,494.00	-162.11	4,955.01	579,398.48	589,645.68	32.59272163	-104.17647716	
13,300.00	90.00	89.58	8,494.00	-161.37	5,055.01	579,399.21	589,745.67	32.59272324	-104.17615247	
13,400.00	90.00	89.58	8,494.00	-160.64	5,155.01	579,399.94	589,845.67	32.59272486	-104.17582777	
13,500.00	90.00	89.58	8,494.00	-159.90	5,255.00	579,400.68	589,945.67	32.59272647	-104.17550308	
13,600.00	90.00	89.58	8,494.00	-159.17	5,355.00	579,401.41	590,045.66	32.59272808	-104.17517839	
13,700.00	90.00	89.58	8,494.00	-158.44	5,455.00	579,402.15	590,145.66	32.59272969	-104.17485369	
13,800.00	90.00	89.58	8,494.00	-157.70	5,555.00	579,402.88	590,245.66	32.59273129	-104.17452900	
13,900.00	90.00	89.58	8,494.00	-156.97	5,654.99	579,403.62	590,345.66	32.59273290	-104.17420431	
14,000.00	90.00	89.58	8,494.00	-156.23	5,754.99	579,404.35	590,445.65	32.59273451	-104.17387962	
14,053.03	90.00	89.58	8,494.00	-155.84	5,808.02	579,404.74	590,498.68	32.59273536	-104.17370743	
Enter NM 015003 - Exit NM 013232										
14,100.00	90.00	89.58	8,494.00	-155.50	5,854.99	579,405.08	590,545.65	32.59273611	-104.17355492	
14,200.00	90.00	89.58	8,494.00	-154.76	5,954.99	579,405.82	590,645.65	32.59273772	-104.17323023	
14,300.00	90.00	89.58	8,494.00	-154.03	6,054.98	579,406.55	590,745.65	32.59273932	-104.17290554	
14,400.00	90.00	89.58	8,494.00	-153.30	6,154.98	579,407.29	590,845.64	32.59274093	-104.17258084	
14,500.00	90.00	89.58	8,494.00	-152.56	6,254.98	579,408.02	590,945.64	32.59274253	-104.17225615	
14,600.00	90.00	89.58	8,494.00	-151.83	6,354.97	579,408.75	591,045.64	32.59274413	-104.17193146	
14,700.00	90.00	89.58	8,494.00	-151.09	6,454.97	579,409.49	591,145.63	32.59274573	-104.17160677	
14,800.00	90.00	89.58	8,494.00	-150.36	6,554.97	579,410.22	591,245.63	32.59274733	-104.17128207	
14,900.00	90.00	89.58	8,494.00	-149.63	6,654.97	579,410.96	591,345.63	32.59274893	-104.17095738	
15,000.00	90.00	89.58	8,494.00	-148.89	6,754.96	579,411.69	591,445.63	32.59275053	-104.17063269	
15,100.00	90.00	89.58	8,494.00	-148.16	6,854.96	579,412.43	591,545.62	32.59275212	-104.17030799	
15,200.00	90.00	89.58	8,494.00	-147.42	6,954.96	579,413.16	591,645.62	32.59275372	-104.16998330	
15,300.00	90.00	89.58	8,494.00	-146.69	7,054.96	579,413.89	591,745.62	32.59275532	-104.16965861	
15,400.00	90.00	89.58	8,494.00	-145.95	7,154.95	579,414.63	591,845.62	32.59275691	-104.16933392	
15,500.00	90.00	89.58	8,494.00	-145.22	7,254.95	579,415.36	591,945.61	32.59275850	-104.16900922	
15,600.00	90.00	89.58	8,494.00	-144.49	7,354.95	579,416.10	592,045.61	32.59276010	-104.16868453	
15,700.00	90.00	89.58	8,494.00	-143.75	7,454.94	579,416.83	592,145.61	32.59276169	-104.16835984	
15,800.00	90.00	89.58	8,494.00	-143.02	7,554.94	579,417.57	592,245.61	32.59276328	-104.16803514	
15,900.00	90.00	89.58	8,494.00	-142.28	7,654.94	579,418.30	592,345.60	32.59276487	-104.16771045	
16,000.00	90.00	89.58	8,494.00	-141.55	7,754.94	579,419.03	592,445.60	32.59276646	-104.16738576	



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Company:	Colgate Energy	TVD Reference:	3288+30 @ 3318.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3288+30 @ 3318.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
16,100.00	90.00	89.58	8,494.00	-140.82	7,854.93	579,419.77	592,545.60	32.59276805	-104.16706107	
16,200.00	90.00	89.58	8,494.00	-140.08	7,954.93	579,420.50	592,645.59	32.59276964	-104.16673637	
16,300.00	90.00	89.58	8,494.00	-139.35	8,054.93	579,421.24	592,745.59	32.59277123	-104.16641168	
16,400.00	90.00	89.58	8,494.00	-138.61	8,154.93	579,421.97	592,845.59	32.59277281	-104.16608699	
16,500.00	90.00	89.58	8,494.00	-137.88	8,254.92	579,422.70	592,945.59	32.59277440	-104.16576229	
16,600.00	90.00	89.58	8,494.00	-137.14	8,354.92	579,423.44	593,045.58	32.59277598	-104.16543760	
16,700.00	90.00	89.58	8,494.00	-136.41	8,454.92	579,424.17	593,145.58	32.59277757	-104.16511291	
16,800.00	90.00	89.58	8,494.00	-135.68	8,554.92	579,424.91	593,245.58	32.59277915	-104.16478821	
16,900.00	90.00	89.58	8,494.00	-134.94	8,654.91	579,425.64	593,345.58	32.59278073	-104.16446352	
17,000.00	90.00	89.58	8,494.00	-134.21	8,754.91	579,426.38	593,445.57	32.59278231	-104.16413883	
17,100.00	90.00	89.58	8,494.00	-133.47	8,854.91	579,427.11	593,545.57	32.59278389	-104.16381413	
17,200.00	90.00	89.58	8,494.00	-132.74	8,954.90	579,427.84	593,645.57	32.59278547	-104.16348944	
17,300.00	90.00	89.58	8,494.00	-132.00	9,054.90	579,428.58	593,745.56	32.59278705	-104.16316475	
17,400.00	90.00	89.58	8,494.00	-131.27	9,154.90	579,429.31	593,845.56	32.59278863	-104.16284006	
17,500.00	90.00	89.58	8,494.00	-130.54	9,254.90	579,430.05	593,945.56	32.59279021	-104.16251536	
17,600.00	90.00	89.58	8,494.00	-129.80	9,354.89	579,430.78	594,045.56	32.59279178	-104.16219067	
17,700.00	90.00	89.58	8,494.00	-129.07	9,454.89	579,431.51	594,145.55	32.59279336	-104.16186598	
17,800.00	90.00	89.58	8,494.00	-128.33	9,554.89	579,432.25	594,245.55	32.59279493	-104.16154128	
17,900.00	90.00	89.58	8,494.00	-127.60	9,654.89	579,432.98	594,345.55	32.59279651	-104.16121659	
18,000.00	90.00	89.58	8,494.00	-126.87	9,754.88	579,433.72	594,445.55	32.59279808	-104.16089190	
18,100.00	90.00	89.58	8,494.00	-126.13	9,854.88	579,434.45	594,545.54	32.59279965	-104.16056720	
18,200.00	90.00	89.58	8,494.00	-125.40	9,954.88	579,435.19	594,645.54	32.59280122	-104.16024251	
18,300.00	90.00	89.58	8,494.00	-124.66	10,054.87	579,435.92	594,745.54	32.59280279	-104.15991782	
18,400.00	90.00	89.58	8,494.00	-123.93	10,154.87	579,436.65	594,845.54	32.59280436	-104.15959312	
18,500.00	90.00	89.58	8,494.00	-123.19	10,254.87	579,437.39	594,945.53	32.59280593	-104.15926843	
18,600.00	90.00	89.58	8,494.00	-122.46	10,354.87	579,438.12	595,045.53	32.59280750	-104.15894374	
18,700.00	90.00	89.58	8,494.00	-121.73	10,454.86	579,438.86	595,145.53	32.59280907	-104.15861904	
18,800.00	90.00	89.58	8,494.00	-120.99	10,554.86	579,439.59	595,245.52	32.59281063	-104.15829435	
18,900.00	90.00	89.58	8,494.00	-120.26	10,654.86	579,440.33	595,345.52	32.59281220	-104.15796966	
19,000.00	90.00	89.58	8,494.00	-119.52	10,754.86	579,441.06	595,445.52	32.59281376	-104.15764497	
19,100.00	90.00	89.58	8,494.00	-118.79	10,854.85	579,441.79	595,545.52	32.59281533	-104.15732027	
19,200.00	90.00	89.58	8,494.00	-118.06	10,954.85	579,442.53	595,645.51	32.59281689	-104.15699558	
19,265.93	90.00	89.58	8,494.00	-117.57	11,020.78	579,443.01	595,711.44	32.59281792	-104.15678151	
100'FEL - LTP(K9- 131H)										
19,300.00	90.00	89.58	8,494.00	-117.32	11,054.85	579,443.26	595,745.51	32.59281845	-104.15667089	
19,355.95	90.00	89.58	8,494.00	-116.91	11,110.80	579,443.67	595,801.46	32.59281932	-104.15648922	
TD: 19355.95' MD, 11109.64' VS,8494.00' TVD - PBHL(K9- 131H)										

Design Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting		
- Shape	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)	Latitude	Longitude
LTP(K9- 131H)	0.00	0.01	8,494.00	-117.64	11,020.78	579,442.94	595,711.44	32.59281773	-104.15678150
- plan misses target center by 0.07usft at 19265.93usft MD (8494.00 TVD, -117.57 N, 11020.78 E)									
- Point									
FTP(K9- 131H)	0.00	0.00	8,494.00	-193.44	579.19	579,367.14	585,269.85	32.59265244	-104.19068551
- plan misses target center by 0.80usft at 8824.06usft MD (8493.35 TVD, -193.91 N, 579.20 E)									
- Point									
PBHL(K9- 131H)	0.00	0.00	8,494.00	-116.91	11,110.80	579,443.67	595,801.46	32.59281932	-104.15648921
- plan hits target center									
- Point									



Planning Report - Geographic

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Company:	Colgate Energy	TVD Reference:	3288+30 @ 3318.00usft
Project:	(Permit) Eddy County, NM (83-NME)	MD Reference:	3288+30 @ 3318.00usft
Site:	(Permit) Koala 9 Fed Com	North Reference:	Grid
Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Permit		
Design:	APD-Rev00		

Casing Points				
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
8,769.97	8,488.67	20" Casing	20	24

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
241.00	241.00	Rustler				
382.00	382.00	T/Salt				
768.00	768.00	Tansill				
843.00	843.00	Yates				
1,218.00	1,218.00	Seven Rivers				
1,809.00	1,809.00	Queen				
2,018.00	2,018.00	Grayburg				
2,418.00	2,418.00	San Andres				
2,993.53	2,993.00	CYCN				
4,569.85	4,568.00	BSGL				
6,119.85	6,118.00	FBSG				
7,144.85	7,143.00	SBSG				
8,298.56	8,268.00	TBSG				

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
7,911.80	7,909.95	-70.00	11.84	KOP: 7911.80' MD, 11.33' VS,7909.95' TVD	
8,824.05	8,493.35	-193.91	579.19	100'FWL	
8,852.76	8,494.00	-194.02	607.89	EOC: 8852.76' MD, 606.45' VS,8494.00' TVD	
11,388.44	8,494.00	-175.41	3,143.50	Enter NM 013232	
11,388.44	8,494.00	-175.41	3,143.50	Exit NM 137444	
14,053.03	8,494.00	-155.84	5,808.02	Enter NM 015003	
14,053.03	8,494.00	-155.84	5,808.02	Exit NM 013232	
19,265.93	8,494.00	-117.57	11,020.78	100'FEL	
19,355.95	8,494.00	-116.91	11,110.80	TD: 19355.95' MD, 11109.64' VS,8494.00' TVD	



Colgate Energy

(Permit) Eddy County, NM (83-NME)

(Permit) Koala 9 Fed Com

(A03) Koala 9 Fed Com 131H

Permit

APD-Rev00

Anticollision Report

13 May, 2022



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Reference	APD-Rev00		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	Stations	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum separation factor of 25	Error Surface:	Pedal Curve
Warning Levels Evaluated at:	2.00 Sigma	Casing Method:	Not applied

Survey Tool Program	Date	5/12/2022		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.00	19,355.95	APD-Rev00 (Permit)	MWD+IFR1+SAG+FDIR	(SQ OWSG MWD + IFR1 + Sag + FDIR Correction)

Summary						
Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
(Permit) Koala 9 Fed Com						
(A01) Koala 9 Fed Com 201H - Permit - APD-Rev00	1,473.58	1,474.82	59.18	49.08	5.860	CC
(A01) Koala 9 Fed Com 201H - Permit - APD-Rev00	1,500.00	1,501.16	59.21	48.92	5.756	ES
(A01) Koala 9 Fed Com 201H - Permit - APD-Rev00	19,355.95	19,708.53	744.28	514.13	3.234	SF
(A02) Koala 9 Fed Com 202H - Permit - APD-Rev00	1,304.42	1,305.43	29.97	21.10	3.379	CC
(A02) Koala 9 Fed Com 202H - Permit - APD-Rev00	1,400.00	1,400.89	30.21	20.69	3.173	ES
(A02) Koala 9 Fed Com 202H - Permit - APD-Rev00	1,500.00	1,500.49	31.72	21.51	3.107	SF
(A04) Koala 9 Fed Com 132H - Permit - APD-Rev00	860.45	860.45	29.99	24.30	5.269	CC
(A04) Koala 9 Fed Com 132H - Permit - APD-Rev00	1,000.00	999.84	30.36	23.71	4.563	ES
(A04) Koala 9 Fed Com 132H - Permit - APD-Rev00	1,100.00	1,099.42	32.04	24.70	4.363	SF
(A05) Koala 9 Fed Com 121H - Permit - APD-Rev00	1,643.16	1,643.59	57.22	46.01	5.106	CC
(A05) Koala 9 Fed Com 121H - Permit - APD-Rev00	3,819.40	3,818.14	61.35	35.05	2.333	ES
(A05) Koala 9 Fed Com 121H - Permit - APD-Rev00	3,900.00	3,898.71	62.23	35.37	2.317	SF
(A06) Koala 9 Fed Com 122H - Permit - APD-Rev00	907.06	907.07	89.99	83.97	14.956	CC
(A06) Koala 9 Fed Com 122H - Permit - APD-Rev00	1,100.00	1,099.50	90.57	83.23	12.330	ES
(A06) Koala 9 Fed Com 122H - Permit - APD-Rev00	19,355.95	18,274.81	1,787.52	1,586.69	8.901	SF
(A07) Koala 9 Fed Com 111H - Permit - APD-Rev00	3,887.93	3,887.36	97.09	70.27	3.621	CC
(A07) Koala 9 Fed Com 111H - Permit - APD-Rev00	3,900.00	3,899.42	97.10	70.21	3.610	ES
(A07) Koala 9 Fed Com 111H - Permit - APD-Rev00	5,700.00	5,697.47	129.42	89.89	3.273	SF
(A08) Koala 9 Fed Com 112H - Permit - APD-Rev00	1,000.00	999.86	150.06	143.41	22.550	CC
(A08) Koala 9 Fed Com 112H - Permit - APD-Rev00	1,100.00	1,099.45	150.39	143.05	20.474	ES
(A08) Koala 9 Fed Com 112H - Permit - APD-Rev00	1,600.00	1,588.78	170.96	160.16	15.823	SF
(B01) Koala 9 Fed Com 203H - Permit - APD-Rev00	10,800.00	11,194.56	2,027.54	1,945.40	24.683	CC
(B01) Koala 9 Fed Com 203H - Permit - APD-Rev00	19,355.95	19,710.50	2,033.98	1,782.65	8.093	ES, SF
(B02) Koala 9 Fed Com 204H - Permit - APD-Rev00	13,700.00	13,993.36	3,335.88	3,202.18	24.951	CC
(B02) Koala 9 Fed Com 204H - Permit - APD-Rev00	19,300.00	19,583.50	3,339.87	3,088.21	13.271	ES
(B02) Koala 9 Fed Com 204H - Permit - APD-Rev00	19,355.95	19,583.50	3,340.54	3,088.29	13.243	SF
(B03) Koala 9 Fed Com 133H - Permit - APD-Rev00	12,300.00	12,007.02	2,654.43	2,547.84	24.903	CC
(B03) Koala 9 Fed Com 133H - Permit - APD-Rev00	19,355.95	19,009.61	2,659.93	2,407.09	10.520	ES, SF
(B04) Koala 9 Fed Com 134H - Permit - APD-Rev00	15,000.00	14,959.87	3,976.11	3,816.30	24.880	CC
(B04) Koala 9 Fed Com 134H - Permit - APD-Rev00	19,300.00	19,235.87	3,979.24	3,727.56	15.810	ES
(B04) Koala 9 Fed Com 134H - Permit - APD-Rev00	19,355.95	19,235.87	3,980.01	3,727.70	15.774	SF
(B05) Koala 9 Fed Com 123H - Permit - APD-Rev00	13,500.00	11,960.49	2,894.06	2,776.47	24.612	CC
(B05) Koala 9 Fed Com 123H - Permit - APD-Rev00	19,355.95	17,763.11	2,898.36	2,665.58	12.451	ES, SF
(B06) Koala 9 Fed Com 124H - Permit - APD-Rev00	15,700.00	14,417.14	4,139.88	3,972.72	24.767	CC
(B06) Koala 9 Fed Com 124H - Permit - APD-Rev00	19,300.00	17,993.15	4,142.42	3,900.48	17.122	ES
(B06) Koala 9 Fed Com 124H - Permit - APD-Rev00	19,355.95	17,993.15	4,143.16	3,900.60	17.081	SF
(B07) Koala 9 Fed Com 113H - Permit - APD-Rev00	15,700.00	13,319.16	3,434.57	3,296.21	24.822	CC

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Summary

Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
(Permit) Koala 9 Fed Com						
(B07) Koala 9 Fed Com 113H - Permit - APD-Rev00	19,355.95	16,922.61	3,436.95	3,234.80	17.002	ES, SF
(B08) Koala 9 Fed Com 114H - Permit - APD-Rev00	17,200.00	14,813.99	4,534.22	4,351.44	24.806	CC
(B08) Koala 9 Fed Com 114H - Permit - APD-Rev00	19,300.00	16,890.04	4,535.62	4,312.11	20.293	ES
(B08) Koala 9 Fed Com 114H - Permit - APD-Rev00	19,355.95	16,890.04	4,536.30	4,312.20	20.243	SF
Koala 9 Fed Com Offsets						
W01_PRE-ONGARD WELL #001_1520917 - Depth Only						Out of range
W02_GOVERNMENT AO COM #001_1524032 - Inc Only	6,751.49	6,723.67	4,787.46	4,577.29	22.780	CC
W02_GOVERNMENT AO COM #001_1524032 - Inc Only	8,000.00	7,973.83	4,791.45	4,530.07	18.331	ES
W02_GOVERNMENT AO COM #001_1524032 - Inc Only	8,350.00	8,282.76	4,849.32	4,580.15	18.016	SF
W03_PRE-ONGARD WELL #001_1525793 - Inc Only - Inc						Out of range
W04_FEDERAL V #001_1526451 - Inc Only - Inc Only	5,193.98	5,167.07	2,084.02	1,946.39	15.142	CC
W04_FEDERAL V #001_1526451 - Inc Only - Inc Only	7,950.00	7,914.59	2,085.33	1,867.66	9.580	ES
W04_FEDERAL V #001_1526451 - Inc Only - Inc Only	8,150.00	8,117.80	2,117.60	1,893.38	9.444	SF
W05_FEDERAL V #002_1526702 - Inc Only - Inc Only	2,900.00	2,876.86	1,743.20	1,671.27	24.236	CC
W05_FEDERAL V #002_1526702 - Inc Only - Inc Only	6,400.00	6,330.00	1,758.14	1,600.73	11.169	ES, SF
W06_FEDERAL V #003_1526867 - Depth Only - Depth O	6,300.00	6,275.15	4,363.16	3,944.86	10.431	CC
W06_FEDERAL V #003_1526867 - Depth Only - Depth O	6,400.00	6,300.00	4,363.95	3,943.80	10.386	ES, SF
W07_PRE-ONGARD WELL #001_1527282 - Depth Only	7,412.73	7,363.88	4,052.32	3,561.27	8.252	CC
W07_PRE-ONGARD WELL #001_1527282 - Depth Only	7,500.00	7,450.00	4,052.33	3,555.53	8.157	ES, SF
W08_FEDERAL V COM #004_1535127 - Inc Only - Inc O	6,586.92	6,539.92	4,024.30	3,844.42	22.373	CC
W08_FEDERAL V COM #004_1535127 - Inc Only - Inc O	7,911.80	7,857.93	4,024.45	3,804.75	18.318	ES
W08_FEDERAL V COM #004_1535127 - Inc Only - Inc O	8,150.00	8,094.56	4,068.00	3,842.57	18.046	SF
W09_GOVERNMENT AB #002_1521480 - Inc Only - Inc	18,643.29	8,415.05	2,328.30	2,003.52	7.169	CC, ES
W09_GOVERNMENT AB #002_1521480 - Inc Only - Inc	18,800.00	8,415.04	2,333.57	2,007.23	7.151	SF
W10_GOVERNMENT AB #003_1521774 - Inc Only - Inc	15,971.47	8,438.56	2,327.31	2,071.55	9.100	CC
W10_GOVERNMENT AB #003_1521774 - Inc Only - Inc	16,000.00	8,438.56	2,327.49	2,071.41	9.089	ES
W10_GOVERNMENT AB #003_1521774 - Inc Only - Inc	16,200.00	8,438.55	2,338.50	2,080.57	9.066	SF
W11_GOVERNMENT AB #006_1527846 - Inc Only - Inc	15,000.00	6,554.00	1,952.49	1,874.07	24.897	CC, ES
W11_GOVERNMENT AB #006_1527846 - Inc Only - Inc	16,300.00	6,554.00	2,501.98	2,353.79	16.883	SF
W12_GOVERNMENT AB #007_1527847 - Inc Only - Inc	16,029.11	6,590.00	1,890.25	1,812.48	24.304	CC, ES
W12_GOVERNMENT AB #007_1527847 - Inc Only - Inc	17,500.00	6,590.00	2,395.12	2,237.90	15.234	SF
W13_GOVERNMENT AB #008_1527863 - Inc Only - Inc	17,600.00	6,630.00	1,843.67	1,766.06	23.755	CC, ES
W13_GOVERNMENT AB #008_1527863 - Inc Only - Inc	18,800.00	6,630.00	2,319.48	2,175.55	16.116	SF
W14_GOVERNMENT AB #009_1527964 - MWD/Inc - M						Out of range
W15_GOVERNMENT AB FEDERAL #011_1540853 - MW						Out of range
W16_GOVERNMENT AB FEDERAL #014_1540854 - MW						Out of range
W17_GOVERNMENT AB FEDERAL #013_1540920 - MW	18,623.70	6,652.00	2,047.78	1,963.46	24.285	CC, ES
W17_GOVERNMENT AB FEDERAL #013_1540920 - MW	18,900.00	6,652.00	2,066.34	1,980.32	24.021	SF
W18_GOVERNMENT AB FEDERAL #012_1541049 - MW						Out of range

Offset Design:	(Permit) Koala 9 Fed Com - (A01) Koala 9 Fed Com 201H - Permit - APD-Rev00										Offset Site Error:	0.00 usft
Survey Program:	0-MWD+IFR1+SAG+FDIR (SQ2)										Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance		Minimum Separation	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)		
400.00	400.00	401.00	401.00	1.20	1.20	-89.05	1.00	-59.99	60.00	57.59	2.41	24.944
500.00	500.00	501.00	501.00	1.56	1.56	-89.05	1.00	-59.99	60.00	56.88	3.12	19.216
600.00	600.00	601.00	601.00	1.92	1.92	-89.05	1.00	-59.99	60.00	56.16	3.84	15.628
700.00	700.00	701.00	701.00	2.28	2.28	-89.05	1.00	-59.99	60.00	55.44	4.56	13.169

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A01) Koala 9 Fed Com 201H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
800.00	800.00	801.00	801.00	2.63	2.64	-89.05	1.00	-59.99	60.00	54.73	5.27	11.378	
900.00	900.00	901.00	901.00	2.99	3.00	-89.05	1.00	-59.99	60.00	54.01	5.99	10.016	
1,000.00	1,000.00	1,001.00	1,001.00	3.35	3.36	-89.05	1.00	-59.99	60.00	53.29	6.71	8.946	
1,100.00	1,100.00	1,101.00	1,101.00	3.71	3.71	-89.05	1.00	-59.99	60.00	52.57	7.42	8.082	
1,200.00	1,200.00	1,201.00	1,201.00	4.07	4.07	-89.04	1.00	-59.99	60.00	51.86	8.14	7.370	
1,300.00	1,300.00	1,301.24	1,301.23	4.43	4.43	-87.78	2.32	-59.75	59.79	50.93	8.86	6.750	
1,400.00	1,400.00	1,401.33	1,401.24	4.79	4.79	-83.99	6.22	-59.03	59.36	49.78	9.57	6.200	
1,473.58	1,473.58	1,474.82	1,474.58	5.05	5.05	-79.56	10.72	-58.20	59.18	49.08	10.10	5.860 CC	
1,500.00	1,500.00	1,501.16	1,500.84	5.14	5.15	-77.65	12.67	-57.84	59.21	48.92	10.29	5.756 ES	
1,600.00	1,600.00	1,600.57	1,599.83	5.50	5.50	-68.94	21.64	-56.19	60.22	49.22	11.00	5.475	
1,700.00	1,700.00	1,699.43	1,698.01	5.86	5.86	-58.56	33.07	-54.08	63.46	51.76	11.70	5.423	
1,800.00	1,800.00	1,798.55	1,796.27	6.22	6.21	-48.44	45.86	-51.73	69.29	56.89	12.40	5.586	
1,900.00	1,900.00	1,897.68	1,894.54	6.58	6.56	-40.08	58.66	-49.37	76.95	63.84	13.11	5.871	
2,000.00	2,000.00	1,996.81	1,992.82	6.94	6.91	-33.34	71.47	-47.01	85.93	72.12	13.81	6.223	
2,100.00	2,100.00	2,095.95	2,091.09	7.29	7.27	-27.92	84.27	-44.65	95.88	81.37	14.51	6.606	
2,200.00	2,200.00	2,195.08	2,189.37	7.65	7.62	-23.54	97.07	-42.30	106.52	91.30	15.22	6.999	
2,300.00	2,300.00	2,294.22	2,287.65	8.01	7.98	-19.98	109.87	-39.94	117.66	101.74	15.93	7.388	
2,400.00	2,400.00	2,393.35	2,385.92	8.37	8.34	-17.03	122.67	-37.58	129.18	112.55	16.64	7.765	
2,500.00	2,500.00	2,492.49	2,484.20	8.73	8.69	-14.57	135.47	-35.22	140.98	123.64	17.34	8.128	
2,600.00	2,599.99	2,591.45	2,582.30	9.07	9.05	-17.11	148.25	-32.87	154.30	136.26	18.04	8.555	
2,700.00	2,699.91	2,690.02	2,680.02	9.39	9.41	-17.89	160.98	-30.53	170.37	151.66	18.71	9.106	
2,710.01	2,709.91	2,699.87	2,689.78	9.43	9.44	-17.05	162.25	-30.29	172.13	153.35	18.78	9.166	
2,800.00	2,799.76	2,788.33	2,777.48	9.72	9.76	-17.64	173.68	-28.19	188.11	168.73	19.39	9.704	
2,900.00	2,899.61	2,886.63	2,874.93	10.05	10.12	-17.42	186.37	-25.85	205.97	185.91	20.06	10.267	
3,000.00	2,999.46	2,984.94	2,972.39	10.38	10.47	-17.39	199.07	-23.51	223.90	203.16	20.74	10.796	
3,100.00	3,099.30	3,083.25	3,069.84	10.71	10.83	-17.62	211.76	-21.17	241.89	220.47	21.42	11.293	
3,200.00	3,199.15	3,181.55	3,167.30	11.04	11.19	-17.57	224.46	-18.84	259.93	237.83	22.10	11.761	
3,300.00	3,299.00	3,279.86	3,264.75	11.38	11.54	-17.51	237.15	-16.50	278.00	255.22	22.78	12.202	
3,400.00	3,398.85	3,378.17	3,362.21	11.72	11.90	-17.45	249.85	-14.16	296.11	272.64	23.47	12.617	
3,500.00	3,498.70	3,476.47	3,459.66	12.05	12.26	-17.40	262.54	-11.82	314.24	290.09	24.16	13.009	
3,600.00	3,598.55	3,574.78	3,557.12	12.39	12.61	-17.35	275.24	-9.48	332.39	307.55	24.84	13.380	
3,700.00	3,698.40	3,673.08	3,654.58	12.74	12.97	-17.31	287.93	-7.15	350.57	325.03	25.53	13.730	
3,791.83	3,790.09	3,763.36	3,744.07	13.05	13.30	-17.24	299.59	-5.00	367.27	341.10	26.17	14.036	
3,800.00	3,798.25	3,771.39	3,752.03	13.08	13.33	-17.21	300.63	-4.81	368.74	342.52	26.22	14.062	
3,900.00	3,898.17	3,869.96	3,849.74	13.42	13.69	-17.24	313.35	-2.46	385.46	358.54	26.91	14.322	
4,001.85	4,000.00	3,970.74	3,949.65	13.78	14.05	-1.72	326.37	-0.07	399.86	372.23	27.63	14.474	
4,100.00	4,098.15	4,068.04	4,046.12	14.12	14.41	-1.34	338.93	2.25	412.47	384.15	28.32	14.564	
4,200.00	4,198.15	4,167.18	4,144.39	14.48	14.77	-0.98	351.74	4.61	425.34	396.31	29.03	14.652	
4,300.00	4,298.15	4,266.31	4,242.67	14.83	15.13	-0.64	364.54	6.96	438.22	408.48	29.74	14.736	
4,400.00	4,398.15	4,365.45	4,340.94	15.18	15.49	-0.32	377.34	9.32	451.12	420.67	30.45	14.817	
4,500.00	4,498.15	4,464.58	4,439.22	15.54	15.85	-0.02	390.14	11.68	464.03	432.87	31.16	14.894	
4,600.00	4,598.15	4,569.23	4,543.00	15.89	16.23	0.28	403.40	14.12	476.72	444.81	31.91	14.939	
4,700.00	4,698.15	4,662.80	4,635.93	16.25	16.64	0.52	415.11	16.28	487.05	454.33	32.73	14.883	
4,800.00	4,798.15	4,766.97	4,739.78	16.60	17.05	0.70	423.55	17.83	494.46	460.94	33.52	14.752	
4,900.00	4,898.15	4,911.56	4,884.25	16.96	17.46	0.80	428.65	18.77	498.93	464.64	34.29	14.550	
5,000.00	4,998.15	5,026.36	4,999.03	17.31	17.87	0.83	430.38	19.09	500.43	465.40	35.03	14.284	
5,100.00	5,098.15	5,126.49	5,099.15	17.67	18.22	0.83	430.38	19.09	500.43	464.69	35.75	14.000	
5,200.00	5,198.15	5,226.49	5,199.15	18.02	18.57	0.83	430.38	19.09	500.43	463.98	36.46	13.727	
5,300.00	5,298.15	5,326.49	5,299.15	18.38	18.92	0.83	430.38	19.09	500.43	463.26	37.17	13.464	
5,400.00	5,398.15	5,426.49	5,399.15	18.73	19.28	0.83	430.38	19.09	500.43	462.55	37.88	13.211	
5,500.00	5,498.15	5,526.49	5,499.15	19.09	19.63	0.83	430.38	19.09	500.43	461.84	38.59	12.967	
5,600.00	5,598.15	5,626.49	5,599.15	19.45	19.98	0.83	430.38	19.09	500.43	461.13	39.30	12.732	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A01) Koala 9 Fed Com 201H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,700.00	5,698.15	5,726.49	5,699.15	19.80	20.34	0.83	430.38	19.09	500.43	460.42	40.02	12.506	
5,800.00	5,798.15	5,826.49	5,799.15	20.16	20.69	0.83	430.38	19.09	500.43	459.70	40.73	12.287	
5,900.00	5,898.15	5,926.49	5,899.15	20.51	21.04	0.83	430.38	19.09	500.43	458.99	41.44	12.076	
6,000.00	5,998.15	6,026.49	5,999.15	20.87	21.40	0.83	430.38	19.09	500.43	458.28	42.15	11.871	
6,100.00	6,098.15	6,126.49	6,099.15	21.23	21.75	0.83	430.38	19.09	500.43	457.56	42.87	11.674	
6,200.00	6,198.15	6,226.49	6,199.15	21.58	22.11	0.83	430.38	19.09	500.43	456.85	43.58	11.483	
6,300.00	6,298.15	6,326.49	6,299.15	21.94	22.46	0.83	430.38	19.09	500.43	456.14	44.29	11.298	
6,400.00	6,398.15	6,426.49	6,399.15	22.30	22.81	0.83	430.38	19.09	500.43	455.43	45.01	11.119	
6,500.00	6,498.15	6,526.49	6,499.15	22.65	23.17	0.83	430.38	19.09	500.43	454.71	45.72	10.945	
6,600.00	6,598.15	6,626.49	6,599.15	23.01	23.52	0.83	430.38	19.09	500.43	454.00	46.43	10.777	
6,700.00	6,698.15	6,726.49	6,699.15	23.37	23.88	0.83	430.38	19.09	500.43	453.28	47.15	10.614	
6,800.00	6,798.15	6,826.49	6,799.15	23.72	24.23	0.83	430.38	19.09	500.43	452.57	47.86	10.456	
6,900.00	6,898.15	6,926.49	6,899.15	24.08	24.59	0.83	430.38	19.09	500.43	451.86	48.58	10.302	
7,000.00	6,998.15	7,026.49	6,999.15	24.44	24.94	0.83	430.38	19.09	500.43	451.14	49.29	10.153	
7,100.00	7,098.15	7,126.49	7,099.15	24.79	25.30	0.83	430.38	19.09	500.43	450.43	50.00	10.008	
7,200.00	7,198.15	7,226.49	7,199.15	25.15	25.65	0.83	430.38	19.09	500.43	449.72	50.72	9.867	
7,300.00	7,298.15	7,326.49	7,299.15	25.51	26.01	0.83	430.38	19.09	500.43	449.00	51.43	9.730	
7,400.00	7,398.15	7,426.49	7,399.15	25.87	26.36	0.83	430.38	19.09	500.43	448.29	52.15	9.597	
7,500.00	7,498.15	7,526.49	7,499.15	26.22	26.72	0.83	430.38	19.09	500.43	447.57	52.86	9.467	
7,600.00	7,598.15	7,626.49	7,599.15	26.58	27.08	0.83	430.38	19.09	500.43	446.86	53.57	9.341	
7,700.00	7,698.15	7,726.49	7,699.15	26.94	27.43	0.83	430.38	19.09	500.43	446.14	54.29	9.218	
7,800.00	7,798.15	7,826.49	7,799.15	27.29	27.79	0.83	430.38	19.09	500.43	445.43	55.00	9.098	
7,900.00	7,898.15	7,926.49	7,899.15	27.65	28.14	0.83	430.38	19.09	500.43	444.71	55.72	8.981	
7,911.80	7,909.95	7,938.28	7,910.95	27.69	28.18	0.83	430.38	19.09	500.43	444.63	55.80	8.968	
7,950.00	7,948.13	7,976.46	7,949.13	27.83	28.32	-105.88	430.38	19.09	500.78	444.71	56.07	8.931	
8,000.00	7,997.81	8,026.14	7,998.81	28.00	28.50	-106.33	430.38	19.09	502.32	445.89	56.42	8.903	
8,050.00	8,046.82	8,075.15	8,047.82	28.17	28.67	-107.10	430.38	19.09	505.19	448.42	56.77	8.899	
8,100.00	8,094.79	8,123.12	8,095.79	28.34	28.84	-108.13	430.38	19.09	509.61	452.50	57.11	8.923	
8,150.00	8,141.35	8,169.68	8,142.35	28.50	29.01	-109.34	430.38	19.09	515.84	458.40	57.44	8.980	
8,200.00	8,186.15	8,214.49	8,187.15	28.67	29.17	-110.63	430.38	19.09	524.19	466.43	57.76	9.075	
8,250.00	8,228.85	8,257.19	8,229.85	28.82	29.32	-111.89	430.38	19.09	534.98	476.91	58.07	9.213	
8,300.00	8,269.13	8,298.16	8,270.83	28.98	29.47	-113.06	430.38	19.11	548.52	490.15	58.36	9.398	
8,350.00	8,306.67	8,345.30	8,317.90	29.13	29.63	-114.39	430.51	21.44	564.68	506.04	58.64	9.629	
8,400.00	8,341.19	8,395.19	8,367.32	29.28	29.80	-115.55	430.88	28.10	583.09	524.20	58.89	9.902	
8,450.00	8,372.42	8,448.35	8,419.13	29.42	29.98	-116.55	431.54	39.89	603.46	544.39	59.08	10.215	
8,500.00	8,400.14	8,505.47	8,473.33	29.56	30.16	-117.39	432.55	57.84	625.47	566.29	59.18	10.569	
8,511.80	8,406.15	8,519.61	8,486.45	29.59	30.21	-117.56	432.84	63.11	630.87	571.68	59.19	10.658	
8,550.00	8,424.29	8,567.74	8,530.05	29.69	30.36	-116.88	433.98	83.44	648.17	589.00	59.17	10.955	
8,600.00	8,445.07	8,637.21	8,589.61	29.82	30.58	-116.37	435.97	119.05	669.76	610.76	59.00	11.352	
8,650.00	8,462.33	8,715.51	8,651.01	29.96	30.81	-116.26	438.68	167.46	689.73	631.08	58.65	11.760	
8,700.00	8,475.94	8,804.22	8,711.85	30.08	31.08	-116.48	442.27	231.80	707.49	649.38	58.11	12.176	
8,750.00	8,485.80	8,904.46	8,767.69	30.21	31.37	-116.89	446.91	314.76	722.34	664.90	57.44	12.575	
8,800.00	8,491.83	9,016.09	8,811.79	30.33	31.67	-117.32	452.62	416.96	733.54	676.71	56.83	12.907	
8,852.76	8,494.00	9,143.63	8,836.84	30.44	31.99	-117.59	459.59	541.55	740.59	684.03	56.56	13.094	
8,900.00	8,494.00	9,228.76	8,839.00	30.55	32.18	-117.60	464.12	626.50	742.87	686.10	56.77	13.086	
9,000.00	8,494.00	9,352.57	8,839.00	30.81	32.49	-117.53	466.90	750.27	744.15	686.88	57.27	12.994	
9,100.00	8,494.00	9,452.57	8,839.00	31.10	32.78	-117.53	467.64	850.27	744.15	686.36	57.79	12.877	
9,200.00	8,494.00	9,552.57	8,839.00	31.43	33.11	-117.53	468.37	950.27	744.15	685.78	58.37	12.749	
9,300.00	8,494.00	9,652.57	8,839.00	31.80	33.47	-117.53	469.11	1,050.26	744.15	685.14	59.01	12.610	
9,400.00	8,494.00	9,752.57	8,839.00	32.21	33.86	-117.53	469.84	1,150.26	744.15	684.43	59.72	12.460	
9,500.00	8,494.00	9,852.57	8,839.00	32.64	34.28	-117.53	470.58	1,250.26	744.15	683.67	60.49	12.302	
9,600.00	8,494.00	9,952.57	8,839.00	33.11	34.74	-117.53	471.32	1,350.26	744.16	682.84	61.31	12.137	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A01) Koala 9 Fed Com 201H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
9,700.00	8,494.00	10,052.57	8,839.00	33.61	35.23	-117.53	472.05	1,450.25	744.16	681.96	62.19	11.965	
9,800.00	8,494.00	10,152.57	8,839.00	34.14	35.74	-117.53	472.79	1,550.25	744.16	681.03	63.12	11.789	
9,900.00	8,494.00	10,252.57	8,839.00	34.70	36.28	-117.53	473.52	1,650.25	744.16	680.05	64.11	11.608	
10,000.00	8,494.00	10,352.57	8,839.00	35.28	36.85	-117.53	474.26	1,750.24	744.16	679.02	65.14	11.425	
10,100.00	8,494.00	10,452.57	8,839.00	35.89	37.44	-117.53	474.99	1,850.24	744.16	677.95	66.21	11.239	
10,200.00	8,494.00	10,552.57	8,839.00	36.53	38.06	-117.53	475.73	1,950.24	744.16	676.83	67.33	11.052	
10,300.00	8,494.00	10,652.57	8,839.00	37.19	38.70	-117.53	476.46	2,050.24	744.16	675.67	68.49	10.865	
10,400.00	8,494.00	10,752.57	8,839.00	37.87	39.36	-117.53	477.20	2,150.23	744.17	674.47	69.70	10.677	
10,500.00	8,494.00	10,852.57	8,839.00	38.57	40.04	-117.53	477.94	2,250.23	744.17	673.23	70.93	10.491	
10,600.00	8,494.00	10,952.57	8,839.00	39.29	40.74	-117.53	478.67	2,350.23	744.17	671.96	72.21	10.306	
10,700.00	8,494.00	11,052.57	8,839.00	40.02	41.46	-117.53	479.41	2,450.23	744.17	670.65	73.52	10.123	
10,800.00	8,494.00	11,152.57	8,839.00	40.78	42.19	-117.53	480.14	2,550.22	744.17	669.31	74.86	9.941	
10,900.00	8,494.00	11,252.57	8,839.00	41.55	42.95	-117.53	480.88	2,650.22	744.17	667.95	76.23	9.763	
11,000.00	8,494.00	11,352.57	8,839.00	42.34	43.72	-117.53	481.61	2,750.22	744.17	666.55	77.62	9.587	
11,100.00	8,494.00	11,452.57	8,839.00	43.14	44.50	-117.53	482.35	2,850.21	744.17	665.12	79.05	9.414	
11,200.00	8,494.00	11,552.57	8,839.00	43.96	45.30	-117.53	483.08	2,950.21	744.18	663.67	80.50	9.244	
11,300.00	8,494.00	11,652.57	8,839.00	44.79	46.11	-117.53	483.82	3,050.21	744.18	662.20	81.98	9.078	
11,400.00	8,494.00	11,752.57	8,839.00	45.64	46.94	-117.53	484.56	3,150.21	744.18	660.70	83.47	8.915	
11,500.00	8,494.00	11,852.57	8,839.00	46.49	47.77	-117.53	485.29	3,250.20	744.18	659.18	85.00	8.756	
11,600.00	8,494.00	11,952.57	8,839.00	47.36	48.62	-117.53	486.03	3,350.20	744.18	657.64	86.54	8.600	
11,700.00	8,494.00	12,052.57	8,839.00	48.23	49.48	-117.53	486.76	3,450.20	744.18	656.08	88.10	8.447	
11,800.00	8,494.00	12,152.57	8,839.00	49.12	50.35	-117.53	487.50	3,550.20	744.18	654.51	89.68	8.299	
11,900.00	8,494.00	12,252.57	8,839.00	50.01	51.23	-117.53	488.23	3,650.19	744.18	652.91	91.27	8.153	
12,000.00	8,494.00	12,352.57	8,839.00	50.92	52.12	-117.53	488.97	3,750.19	744.18	651.30	92.89	8.012	
12,100.00	8,494.00	12,452.57	8,839.00	51.83	53.02	-117.53	489.71	3,850.19	744.19	649.67	94.52	7.874	
12,200.00	8,494.00	12,552.57	8,839.00	52.75	53.92	-117.53	490.44	3,950.18	744.19	648.03	96.16	7.739	
12,300.00	8,494.00	12,652.57	8,839.00	53.68	54.84	-117.53	491.18	4,050.18	744.19	646.37	97.82	7.608	
12,400.00	8,494.00	12,752.57	8,839.00	54.62	55.76	-117.53	491.91	4,150.18	744.19	644.70	99.49	7.480	
12,500.00	8,494.00	12,852.57	8,839.00	55.56	56.69	-117.53	492.65	4,250.18	744.19	643.02	101.18	7.355	
12,600.00	8,494.00	12,952.57	8,839.00	56.51	57.62	-117.53	493.38	4,350.17	744.19	641.32	102.87	7.234	
12,700.00	8,494.00	13,052.57	8,839.00	57.47	58.56	-117.53	494.12	4,450.17	744.19	639.61	104.58	7.116	
12,800.00	8,494.00	13,152.57	8,839.00	58.43	59.51	-117.53	494.85	4,550.17	744.19	637.89	106.30	7.001	
12,900.00	8,494.00	13,252.57	8,839.00	59.40	60.47	-117.53	495.59	4,650.17	744.20	636.16	108.03	6.889	
13,000.00	8,494.00	13,352.57	8,839.00	60.37	61.43	-117.53	496.33	4,750.16	744.20	634.42	109.77	6.779	
13,100.00	8,494.00	13,452.57	8,839.00	61.35	62.39	-117.53	497.06	4,850.16	744.20	632.68	111.52	6.673	
13,200.00	8,494.00	13,552.57	8,839.00	62.33	63.36	-117.53	497.80	4,950.16	744.20	630.92	113.28	6.569	
13,300.00	8,494.00	13,652.57	8,839.00	63.32	64.34	-117.53	498.53	5,050.16	744.20	629.15	115.05	6.469	
13,400.00	8,494.00	13,752.57	8,839.00	64.31	65.32	-117.53	499.27	5,150.15	744.20	627.38	116.83	6.370	
13,500.00	8,494.00	13,852.57	8,839.00	65.31	66.30	-117.53	500.00	5,250.15	744.20	625.59	118.61	6.274	
13,600.00	8,494.00	13,952.57	8,839.00	66.31	67.29	-117.53	500.74	5,350.15	744.20	623.80	120.40	6.181	
13,700.00	8,494.00	14,052.57	8,839.00	67.31	68.29	-117.53	501.47	5,450.14	744.21	622.00	122.20	6.090	
13,800.00	8,494.00	14,152.57	8,839.00	68.32	69.28	-117.53	502.21	5,550.14	744.21	620.20	124.01	6.001	
13,900.00	8,494.00	14,252.57	8,839.00	69.33	70.28	-117.53	502.95	5,650.14	744.21	618.39	125.82	5.915	
14,000.00	8,494.00	14,352.57	8,839.00	70.34	71.29	-117.53	503.68	5,750.14	744.21	616.57	127.64	5.831	
14,100.00	8,494.00	14,452.57	8,839.00	71.36	72.30	-117.53	504.42	5,850.13	744.21	614.75	129.47	5.748	
14,200.00	8,494.00	14,552.57	8,839.00	72.38	73.31	-117.53	505.15	5,950.13	744.21	612.92	131.30	5.668	
14,300.00	8,494.00	14,652.57	8,839.00	73.41	74.32	-117.53	505.89	6,050.13	744.21	611.08	133.13	5.590	
14,400.00	8,494.00	14,752.57	8,839.00	74.43	75.34	-117.53	506.62	6,150.13	744.21	609.24	134.98	5.514	
14,500.00	8,494.00	14,852.57	8,839.00	75.46	76.36	-117.53	507.36	6,250.12	744.22	607.39	136.82	5.439	
14,600.00	8,494.00	14,952.57	8,839.00	76.49	77.38	-117.53	508.10	6,350.12	744.22	605.54	138.67	5.367	
14,700.00	8,494.00	15,052.57	8,839.00	77.53	78.41	-117.53	508.83	6,450.12	744.22	603.69	140.53	5.296	
14,800.00	8,494.00	15,152.57	8,839.00	78.56	79.44	-117.53	509.57	6,550.11	744.22	601.83	142.39	5.227	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A01) Koala 9 Fed Com 201H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
14,900.00	8,494.00	15,252.57	8,839.00	79.60	80.47	-117.53	510.30	6,650.11	744.22	599.96	144.26	5.159	
15,000.00	8,494.00	15,352.57	8,839.00	80.64	81.50	-117.53	511.04	6,750.11	744.22	598.09	146.13	5.093	
15,100.00	8,494.00	15,452.57	8,839.00	81.69	82.54	-117.53	511.77	6,850.11	744.22	596.22	148.00	5.028	
15,200.00	8,494.00	15,552.57	8,839.00	82.73	83.58	-117.53	512.51	6,950.10	744.22	594.34	149.88	4.965	
15,300.00	8,494.00	15,652.57	8,839.00	83.78	84.62	-117.53	513.24	7,050.10	744.23	592.46	151.76	4.904	
15,400.00	8,494.00	15,752.57	8,839.00	84.83	85.66	-117.53	513.98	7,150.10	744.23	590.58	153.65	4.844	
15,500.00	8,494.00	15,852.57	8,839.00	85.88	86.70	-117.53	514.72	7,250.10	744.23	588.69	155.54	4.785	
15,600.00	8,494.00	15,952.57	8,839.00	86.94	87.75	-117.53	515.45	7,350.09	744.23	586.80	157.43	4.727	
15,700.00	8,494.00	16,052.57	8,839.00	87.99	88.80	-117.53	516.19	7,450.09	744.23	584.90	159.33	4.671	
15,800.00	8,494.00	16,152.57	8,839.00	89.05	89.85	-117.53	516.92	7,550.09	744.23	583.01	161.23	4.616	
15,900.00	8,494.00	16,252.57	8,839.00	90.10	90.90	-117.53	517.66	7,650.08	744.23	581.11	163.13	4.562	
16,000.00	8,494.00	16,352.57	8,839.00	91.16	91.95	-117.53	518.39	7,750.08	744.23	579.20	165.03	4.510	
16,100.00	8,494.00	16,452.57	8,839.00	92.22	93.01	-117.53	519.13	7,850.08	744.24	577.30	166.94	4.458	
16,200.00	8,494.00	16,552.57	8,839.00	93.29	94.06	-117.53	519.86	7,950.08	744.24	575.39	168.85	4.408	
16,300.00	8,494.00	16,652.57	8,839.00	94.35	95.12	-117.53	520.60	8,050.07	744.24	573.48	170.76	4.358	
16,400.00	8,494.00	16,752.57	8,839.00	95.42	96.18	-117.53	521.34	8,150.07	744.24	571.56	172.68	4.310	
16,500.00	8,494.00	16,852.57	8,839.00	96.48	97.24	-117.53	522.07	8,250.07	744.24	569.64	174.60	4.263	
16,600.00	8,494.00	16,952.57	8,839.00	97.55	98.30	-117.53	522.81	8,350.07	744.24	567.72	176.52	4.216	
16,700.00	8,494.00	17,052.57	8,839.00	98.62	99.37	-117.53	523.54	8,450.06	744.24	565.80	178.44	4.171	
16,800.00	8,494.00	17,152.57	8,839.00	99.69	100.43	-117.53	524.28	8,550.06	744.24	563.88	180.36	4.126	
16,900.00	8,494.00	17,252.57	8,839.00	100.76	101.50	-117.53	525.01	8,650.06	744.25	561.95	182.29	4.083	
17,000.00	8,494.00	17,352.57	8,839.00	101.83	102.56	-117.53	525.75	8,750.06	744.25	560.03	184.22	4.040	
17,100.00	8,494.00	17,452.57	8,839.00	102.91	103.63	-117.53	526.48	8,850.05	744.25	558.10	186.15	3.998	
17,200.00	8,494.00	17,552.57	8,839.00	103.98	104.70	-117.53	527.22	8,950.05	744.25	556.16	188.08	3.957	
17,300.00	8,494.00	17,652.57	8,839.00	105.06	105.77	-117.53	527.96	9,050.05	744.25	554.23	190.02	3.917	
17,400.00	8,494.00	17,752.57	8,839.00	106.13	106.84	-117.53	528.69	9,150.04	744.25	552.29	191.96	3.877	
17,500.00	8,494.00	17,852.57	8,839.00	107.21	107.92	-117.53	529.43	9,250.04	744.25	550.36	193.90	3.838	
17,600.00	8,494.00	17,952.57	8,839.00	108.29	108.99	-117.53	530.16	9,350.04	744.25	548.42	195.84	3.800	
17,700.00	8,494.00	18,052.57	8,839.00	109.37	110.06	-117.53	530.90	9,450.04	744.25	546.48	197.78	3.763	
17,800.00	8,494.00	18,152.57	8,839.00	110.45	111.14	-117.53	531.63	9,550.03	744.26	544.53	199.72	3.726	
17,900.00	8,494.00	18,252.57	8,839.00	111.53	112.22	-117.53	532.37	9,650.03	744.26	542.59	201.67	3.691	
18,000.00	8,494.00	18,352.57	8,839.00	112.61	113.29	-117.53	533.11	9,750.03	744.26	540.64	203.61	3.655	
18,100.00	8,494.00	18,452.57	8,839.00	113.69	114.37	-117.53	533.84	9,850.03	744.26	538.70	205.56	3.621	
18,200.00	8,494.00	18,552.57	8,839.00	114.77	115.45	-117.53	534.58	9,950.02	744.26	536.75	207.51	3.587	
18,300.00	8,494.00	18,652.57	8,839.00	115.86	116.53	-117.53	535.31	10,050.02	744.26	534.80	209.46	3.553	
18,400.00	8,494.00	18,752.57	8,839.00	116.94	117.61	-117.53	536.05	10,150.02	744.26	532.85	211.42	3.520	
18,500.00	8,494.00	18,852.57	8,839.00	118.03	118.69	-117.53	536.78	10,250.01	744.26	530.89	213.37	3.488	
18,600.00	8,494.00	18,952.57	8,839.00	119.11	119.77	-117.53	537.52	10,350.01	744.27	528.94	215.33	3.456	
18,700.00	8,494.00	19,052.57	8,839.00	120.20	120.86	-117.53	538.25	10,450.01	744.27	526.99	217.28	3.425	
18,800.00	8,494.00	19,152.57	8,839.00	121.29	121.94	-117.53	538.99	10,550.01	744.27	525.03	219.24	3.395	
18,900.00	8,494.00	19,252.57	8,839.00	122.38	123.03	-117.53	539.73	10,650.00	744.27	523.07	221.20	3.365	
19,000.00	8,494.00	19,352.57	8,839.00	123.46	124.11	-117.53	540.46	10,750.00	744.27	521.11	223.16	3.335	
19,100.00	8,494.00	19,452.57	8,839.00	124.55	125.20	-117.53	541.20	10,850.00	744.27	519.15	225.12	3.306	
19,200.00	8,494.00	19,552.57	8,839.00	125.64	126.28	-117.53	541.93	10,950.00	744.27	517.19	227.08	3.278	
19,300.00	8,494.00	19,652.57	8,839.00	126.73	127.37	-117.53	542.67	11,049.99	744.27	515.23	229.05	3.249	
19,355.95	8,494.00	19,708.53	8,839.00	127.34	127.98	-117.53	543.08	11,105.95	744.28	514.13	230.15	3.234 SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A02) Koala 9 Fed Com 202H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Distance		Rule Assigned:		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
300.00	300.00	301.00	301.00	0.84	0.85	-89.05	0.50	-30.00	30.00	28.32	1.69	17.771	
400.00	400.00	401.00	401.00	1.20	1.20	-89.05	0.50	-30.00	30.00	27.60	2.41	12.474	
500.00	500.00	501.00	501.00	1.56	1.56	-89.05	0.50	-30.00	30.00	26.88	3.12	9.610	
600.00	600.00	601.00	601.00	1.92	1.92	-89.05	0.50	-30.00	30.00	26.16	3.84	7.815	
700.00	700.00	701.00	701.00	2.28	2.28	-89.05	0.50	-30.00	30.00	25.45	4.56	6.585	
800.00	800.00	801.00	801.00	2.63	2.64	-89.05	0.50	-30.00	30.00	24.73	5.27	5.690	
900.00	900.00	901.00	901.00	2.99	3.00	-89.05	0.50	-30.00	30.00	24.01	5.99	5.009	
1,000.00	1,000.00	1,001.00	1,001.00	3.35	3.36	-89.05	0.50	-30.00	30.00	23.30	6.71	4.474	
1,100.00	1,100.00	1,101.00	1,101.00	3.71	3.71	-89.05	0.50	-30.00	30.00	22.58	7.42	4.042	
1,200.00	1,200.00	1,201.00	1,201.00	4.07	4.07	-89.05	0.50	-30.00	30.00	21.86	8.14	3.686	
1,300.00	1,300.00	1,301.01	1,301.00	4.43	4.41	-91.60	-0.83	-29.96	29.97	21.13	8.84	3.390	
1,304.42	1,304.42	1,305.43	1,305.42	4.44	4.43	-91.82	-0.95	-29.95	29.97	21.10	8.87	3.379 CC	
1,400.00	1,400.00	1,400.89	1,400.80	4.79	4.74	-99.10	-4.78	-29.83	30.21	20.69	9.52	3.173 ES	
1,500.00	1,500.00	1,500.49	1,500.18	5.14	5.07	-110.89	-11.31	-29.62	31.72	21.51	10.21	3.107 SF	
1,600.00	1,600.00	1,599.69	1,598.96	5.50	5.40	-124.79	-20.38	-29.33	35.78	24.89	10.89	3.286	
1,700.00	1,700.00	1,698.34	1,696.93	5.86	5.73	-137.80	-31.95	-28.97	43.31	31.76	11.56	3.749	
1,800.00	1,800.00	1,797.43	1,795.16	6.22	6.07	-147.58	-44.96	-28.55	53.58	41.34	12.23	4.379	
1,900.00	1,900.00	1,896.57	1,893.43	6.58	6.41	-154.11	-57.98	-28.14	64.89	51.97	12.92	5.022	
2,000.00	2,000.00	1,995.70	1,991.71	6.94	6.76	-158.67	-71.01	-27.72	76.79	63.18	13.61	5.641	
2,100.00	2,100.00	2,094.83	2,089.98	7.29	7.10	-162.00	-84.03	-27.31	89.04	74.73	14.31	6.223	
2,200.00	2,200.00	2,193.96	2,188.25	7.65	7.45	-164.51	-97.05	-26.89	101.51	86.51	15.00	6.766	
2,300.00	2,300.00	2,293.10	2,286.52	8.01	7.81	-166.48	-110.08	-26.48	114.14	98.43	15.70	7.269	
2,400.00	2,400.00	2,392.23	2,384.80	8.37	8.16	-168.05	-123.10	-26.06	126.87	110.46	16.40	7.735	
2,500.00	2,500.00	2,491.36	2,483.07	8.73	8.52	-169.33	-136.12	-25.65	139.67	122.57	17.10	8.166	
2,600.00	2,599.99	2,590.65	2,581.50	9.07	8.87	19.31	-149.17	-25.23	151.31	133.52	17.79	8.506	
2,700.00	2,699.91	2,690.22	2,680.20	9.39	9.23	18.79	-162.25	-24.82	160.51	142.05	18.46	8.695	
2,710.01	2,709.91	2,700.20	2,690.10	9.43	9.27	18.75	-163.56	-24.77	161.30	142.77	18.53	8.706	
2,800.00	2,799.76	2,789.91	2,779.03	9.72	9.59	18.53	-175.34	-24.40	168.25	149.12	19.14	8.793	
2,900.00	2,899.61	2,889.61	2,877.87	10.05	9.96	18.29	-188.44	-23.98	175.98	156.17	19.81	8.882	
3,000.00	2,999.46	2,989.31	2,976.70	10.38	10.32	18.08	-201.54	-23.56	183.72	163.22	20.50	8.963	
3,100.00	3,099.30	3,089.01	3,075.53	10.71	10.68	17.88	-214.64	-23.15	191.45	170.27	21.18	9.039	
3,200.00	3,199.15	3,188.71	3,174.37	11.04	11.05	17.70	-227.73	-22.73	199.19	177.32	21.87	9.109	
3,300.00	3,299.00	3,288.41	3,273.20	11.38	11.41	17.54	-240.83	-22.31	206.93	184.37	22.56	9.174	
3,400.00	3,398.85	3,388.10	3,372.03	11.72	11.78	17.38	-253.93	-21.90	214.67	191.42	23.25	9.235	
3,500.00	3,498.70	3,487.80	3,470.87	12.05	12.14	17.24	-267.03	-21.48	222.41	198.48	23.94	9.292	
3,600.00	3,598.55	3,587.50	3,569.70	12.39	12.51	17.10	-280.12	-21.06	230.16	205.53	24.63	9.344	
3,700.00	3,698.40	3,687.20	3,668.53	12.74	12.87	16.98	-293.22	-20.64	237.90	212.58	25.33	9.394	
3,791.83	3,790.09	3,778.75	3,759.29	13.05	13.21	16.87	-305.25	-20.26	245.01	219.05	25.96	9.437	
3,800.00	3,798.25	3,786.90	3,767.37	13.08	13.24	16.86	-306.32	-20.23	245.66	219.64	26.02	9.441	
3,900.00	3,898.17	3,886.47	3,866.07	13.42	13.61	16.69	-319.40	-19.81	254.86	228.14	26.72	9.539	
4,001.85	4,000.00	3,987.59	3,966.32	13.78	13.98	-173.22	-332.68	-19.39	266.80	239.36	27.43	9.726	
4,100.00	4,098.15	4,084.90	4,062.78	14.12	14.34	-173.62	-345.47	-18.98	279.56	251.44	28.12	9.940	
4,200.00	4,198.15	4,184.03	4,161.05	14.48	14.71	-173.98	-358.49	-18.56	292.58	263.75	28.83	10.149	
4,300.00	4,298.15	4,283.16	4,259.32	14.83	15.07	-174.32	-371.51	-18.15	305.61	276.07	29.53	10.348	
4,400.00	4,398.15	4,382.29	4,357.60	15.18	15.44	-174.63	-384.54	-17.73	318.64	288.40	30.24	10.537	
4,500.00	4,498.15	4,481.43	4,455.87	15.54	15.81	-174.91	-397.56	-17.32	331.69	300.74	30.95	10.718	
4,600.00	4,598.15	4,580.56	4,554.14	15.89	16.17	-175.18	-410.58	-16.90	344.74	313.09	31.65	10.891	
4,700.00	4,698.15	4,679.69	4,652.41	16.25	16.54	-175.42	-423.60	-16.49	357.80	325.44	32.36	11.057	
4,800.00	4,798.15	4,778.82	4,750.69	16.60	16.91	-175.65	-436.63	-16.07	370.87	337.80	33.07	11.216	
4,900.00	4,898.15	4,877.96	4,848.96	16.96	17.28	-175.86	-449.65	-15.66	383.94	350.17	33.77	11.368	
5,000.00	4,998.15	4,977.09	4,947.23	17.31	17.64	-176.05	-462.67	-15.25	397.02	362.53	34.48	11.514	
5,100.00	5,098.15	5,076.22	5,045.50	17.67	18.01	-176.24	-475.70	-14.83	410.10	374.91	35.19	11.654	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A02) Koala 9 Fed Com 202H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,200.00	5,198.15	5,175.35	5,143.78	18.02	18.38	-176.41	-488.72	-14.42	423.18	387.28	35.90	11.788	
5,300.00	5,298.15	5,274.48	5,242.05	18.38	18.75	-176.57	-501.74	-14.00	436.27	399.66	36.61	11.918	
5,400.00	5,398.15	5,373.62	5,340.32	18.73	19.12	-176.73	-514.77	-13.59	449.36	412.05	37.32	12.042	
5,500.00	5,498.15	5,472.75	5,438.59	19.09	19.49	-176.87	-527.79	-13.17	462.46	424.43	38.02	12.162	
5,600.00	5,598.15	5,571.88	5,536.87	19.45	19.85	-177.01	-540.81	-12.76	475.55	436.82	38.73	12.277	
5,700.00	5,698.15	5,671.01	5,635.14	19.80	20.22	-177.14	-553.84	-12.34	488.65	449.21	39.44	12.389	
5,800.00	5,798.15	5,770.15	5,733.41	20.16	20.59	-177.26	-566.86	-11.93	501.75	461.60	40.15	12.496	
5,900.00	5,898.15	5,869.28	5,831.68	20.51	20.96	-177.38	-579.88	-11.51	514.86	473.99	40.86	12.600	
6,000.00	5,998.15	5,968.41	5,929.95	20.87	21.33	-177.49	-592.91	-11.10	527.96	486.39	41.57	12.700	
6,100.00	6,098.15	6,067.54	6,028.23	21.23	21.70	-177.59	-605.93	-10.68	541.07	498.79	42.28	12.797	
6,200.00	6,198.15	6,166.68	6,126.50	21.58	22.07	-177.69	-618.95	-10.27	554.18	511.19	42.99	12.890	
6,300.00	6,298.15	6,265.81	6,224.77	21.94	22.44	-177.79	-631.97	-9.85	567.29	523.59	43.70	12.981	
6,400.00	6,398.15	6,364.94	6,323.04	22.30	22.81	-177.88	-645.00	-9.44	580.40	535.99	44.41	13.068	
6,500.00	6,498.15	6,464.07	6,421.32	22.65	23.18	-177.97	-658.02	-9.02	593.52	548.39	45.12	13.153	
6,600.00	6,598.15	6,563.21	6,519.59	23.01	23.55	-178.05	-671.04	-8.61	606.63	560.80	45.83	13.235	
6,700.00	6,698.15	6,662.34	6,617.86	23.37	23.91	-178.13	-684.07	-8.19	619.75	573.20	46.55	13.315	
6,800.00	6,798.15	6,761.47	6,716.13	23.72	24.28	-178.21	-697.09	-7.78	632.87	585.61	47.26	13.392	
6,900.00	6,898.15	6,860.60	6,814.41	24.08	24.65	-178.28	-710.11	-7.36	645.98	598.02	47.97	13.467	
7,000.00	6,998.15	6,959.74	6,912.68	24.44	25.02	-178.35	-723.14	-6.95	659.10	610.43	48.68	13.540	
7,100.00	7,098.15	7,058.87	7,010.95	24.79	25.39	-178.42	-736.16	-6.53	672.22	622.83	49.39	13.611	
7,200.00	7,198.15	7,158.00	7,109.22	25.15	25.76	-178.49	-749.18	-6.12	685.35	635.24	50.10	13.679	
7,300.00	7,298.15	7,257.13	7,207.50	25.51	26.13	-178.55	-762.21	-5.70	698.47	647.66	50.81	13.746	
7,400.00	7,398.15	7,356.27	7,305.77	25.87	26.50	-178.61	-775.23	-5.29	711.59	660.07	51.52	13.811	
7,500.00	7,498.15	7,455.40	7,404.04	26.22	26.87	-178.67	-788.25	-4.87	724.72	672.48	52.24	13.874	
7,600.00	7,598.15	7,554.53	7,502.31	26.58	27.24	-178.72	-801.28	-4.46	737.84	684.89	52.95	13.935	
7,700.00	7,698.15	7,654.31	7,601.23	26.94	27.62	-178.78	-814.38	-4.04	750.96	697.30	53.66	13.994	
7,800.00	7,798.15	7,778.16	7,724.26	27.29	28.07	-178.83	-828.55	-3.59	762.40	707.86	54.54	13.978	
7,900.00	7,898.15	7,902.81	7,848.48	27.65	28.53	-178.87	-838.78	-3.26	770.60	715.22	55.38	13.915	
7,911.80	7,909.95	7,917.55	7,863.19	27.69	28.58	-178.88	-839.73	-3.23	771.35	715.88	55.47	13.905	
7,950.00	7,948.13	7,965.34	7,910.90	27.83	28.75	74.45	-842.39	-3.15	773.14	717.36	55.78	13.861	
8,000.00	7,997.81	8,027.65	7,973.16	28.00	28.98	74.87	-844.96	-3.07	773.75	717.59	56.16	13.778	
8,050.00	8,046.82	8,089.14	8,034.63	28.17	29.19	75.85	-846.51	-3.02	772.50	715.97	56.53	13.666	
8,100.00	8,094.79	8,149.24	8,094.73	28.34	29.40	77.36	-847.07	-3.00	769.59	712.71	56.87	13.532	
8,150.00	8,141.35	8,196.86	8,142.35	28.50	29.55	79.01	-847.07	-3.00	765.61	708.42	57.19	13.386	
8,200.00	8,186.15	8,241.66	8,187.15	28.67	29.69	80.91	-847.07	-3.00	761.32	703.81	57.51	13.238	
8,250.00	8,228.85	8,284.36	8,229.85	28.82	29.83	82.99	-847.07	-3.00	757.08	699.26	57.82	13.095	
8,300.00	8,269.13	8,325.82	8,271.31	28.98	29.96	85.23	-847.07	-2.98	753.31	695.20	58.11	12.962	
8,350.00	8,306.67	8,378.12	8,323.51	29.13	30.13	88.02	-847.10	-0.11	750.03	691.63	58.40	12.843	
8,400.00	8,341.19	8,434.41	8,379.15	29.28	30.32	90.98	-847.19	8.28	747.08	688.44	58.64	12.740	
8,450.00	8,372.42	8,495.53	8,438.31	29.42	30.52	94.11	-847.35	23.51	744.45	685.65	58.80	12.660	
8,500.00	8,400.14	8,562.54	8,500.90	29.56	30.72	97.42	-847.60	47.34	742.06	683.23	58.83	12.614	
8,511.80	8,406.15	8,579.34	8,516.12	29.59	30.77	98.24	-847.67	54.45	741.51	682.70	58.81	12.609	
8,550.00	8,424.29	8,637.02	8,566.66	29.69	30.93	101.90	-847.96	82.19	740.36	681.70	58.66	12.622	
8,572.05	8,433.88	8,672.88	8,596.58	29.75	31.02	103.93	-848.17	101.95	740.20	681.70	58.50	12.652	
8,600.00	8,445.07	8,721.30	8,634.90	29.82	31.14	106.39	-848.48	131.52	740.43	682.20	58.23	12.716	
8,650.00	8,462.33	8,816.82	8,702.54	29.96	31.33	110.46	-849.18	198.80	741.67	684.15	57.52	12.894	
8,700.00	8,475.94	8,924.08	8,763.99	30.08	31.50	113.88	-850.10	286.53	743.29	686.67	56.62	13.128	
8,750.00	8,485.80	9,041.77	8,811.33	30.21	31.64	116.34	-851.23	394.05	744.43	688.67	55.77	13.349	
8,800.00	8,491.83	9,166.05	8,836.41	30.33	31.79	117.51	-852.50	515.51	744.41	689.08	55.33	13.453	
8,849.53	8,493.99	9,256.70	8,839.00	30.44	31.93	117.56	-853.22	606.08	743.54	688.07	55.48	13.403	
8,852.76	8,494.00	9,260.90	8,839.00	30.44	31.94	117.56	-853.21	610.27	743.55	688.06	55.49	13.400	
8,900.00	8,494.00	9,310.54	8,839.00	30.55	32.03	117.56	-852.87	659.92	743.57	687.90	55.67	13.357	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A02) Koala 9 Fed Com 202H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
9,000.00	8,494.00	9,410.54	8,839.00	30.81	32.25	117.56	-852.14	759.91	743.57	687.46	56.12	13.251	
9,100.00	8,494.00	9,510.54	8,839.00	31.10	32.52	117.56	-851.41	859.91	743.58	686.95	56.63	13.130	
9,200.00	8,494.00	9,610.54	8,839.00	31.43	32.83	117.56	-850.69	959.91	743.59	686.37	57.22	12.996	
9,300.00	8,494.00	9,710.54	8,839.00	31.80	33.18	117.56	-849.96	1,059.91	743.59	685.73	57.87	12.850	
9,400.00	8,494.00	9,810.54	8,839.00	32.21	33.57	117.56	-849.23	1,159.90	743.60	685.02	58.58	12.693	
9,500.00	8,494.00	9,910.54	8,839.00	32.64	33.99	117.56	-848.51	1,259.90	743.61	684.25	59.36	12.528	
9,600.00	8,494.00	10,010.54	8,839.00	33.11	34.44	117.56	-847.78	1,359.90	743.61	683.42	60.19	12.354	
9,700.00	8,494.00	10,110.54	8,839.00	33.61	34.93	117.56	-847.06	1,459.90	743.62	682.54	61.09	12.173	
9,800.00	8,494.00	10,210.54	8,839.00	34.14	35.44	117.55	-846.33	1,559.89	743.63	681.60	62.03	11.988	
9,900.00	8,494.00	10,310.54	8,839.00	34.70	35.99	117.55	-845.60	1,659.89	743.64	680.60	63.03	11.798	
10,000.00	8,494.00	10,410.54	8,839.00	35.28	36.56	117.55	-844.88	1,759.89	743.64	679.56	64.08	11.605	
10,100.00	8,494.00	10,510.54	8,839.00	35.89	37.15	117.55	-844.15	1,859.89	743.65	678.47	65.18	11.410	
10,200.00	8,494.00	10,610.54	8,839.00	36.53	37.77	117.55	-843.42	1,959.88	743.66	677.34	66.32	11.214	
10,300.00	8,494.00	10,710.54	8,839.00	37.19	38.41	117.55	-842.70	2,059.88	743.66	676.16	67.50	11.017	
10,400.00	8,494.00	10,810.54	8,839.00	37.87	39.08	117.55	-841.97	2,159.88	743.67	674.95	68.72	10.821	
10,500.00	8,494.00	10,910.54	8,839.00	38.57	39.76	117.55	-841.24	2,259.87	743.68	673.69	69.99	10.626	
10,600.00	8,494.00	11,010.54	8,839.00	39.29	40.47	117.55	-840.52	2,359.87	743.68	672.40	71.28	10.433	
10,700.00	8,494.00	11,110.54	8,839.00	40.02	41.19	117.55	-839.79	2,459.87	743.69	671.07	72.62	10.241	
10,800.00	8,494.00	11,210.54	8,839.00	40.78	41.93	117.55	-839.06	2,559.87	743.70	669.72	73.98	10.053	
10,900.00	8,494.00	11,310.54	8,839.00	41.55	42.69	117.55	-838.34	2,659.86	743.70	668.33	75.38	9.867	
11,000.00	8,494.00	11,410.54	8,839.00	42.34	43.46	117.55	-837.61	2,759.86	743.71	666.91	76.80	9.684	
11,100.00	8,494.00	11,510.54	8,839.00	43.14	44.25	117.55	-836.89	2,859.86	743.72	665.47	78.25	9.504	
11,200.00	8,494.00	11,610.54	8,839.00	43.96	45.05	117.55	-836.16	2,959.86	743.72	663.99	79.73	9.328	
11,300.00	8,494.00	11,710.54	8,839.00	44.79	45.87	117.55	-835.43	3,059.85	743.73	662.50	81.23	9.156	
11,400.00	8,494.00	11,810.54	8,839.00	45.64	46.70	117.55	-834.71	3,159.85	743.74	660.98	82.76	8.987	
11,500.00	8,494.00	11,910.54	8,839.00	46.49	47.54	117.55	-833.98	3,259.85	743.75	659.44	84.30	8.822	
11,600.00	8,494.00	12,010.54	8,839.00	47.36	48.39	117.55	-833.25	3,359.85	743.75	657.88	85.87	8.661	
11,700.00	8,494.00	12,110.54	8,839.00	48.23	49.25	117.55	-832.53	3,459.84	743.76	656.30	87.46	8.504	
11,800.00	8,494.00	12,210.54	8,839.00	49.12	50.13	117.55	-831.80	3,559.84	743.77	654.70	89.07	8.351	
11,900.00	8,494.00	12,310.54	8,839.00	50.01	51.01	117.55	-831.07	3,659.84	743.77	653.08	90.69	8.201	
12,000.00	8,494.00	12,410.54	8,839.00	50.92	51.90	117.55	-830.35	3,759.83	743.78	651.45	92.33	8.056	
12,100.00	8,494.00	12,510.54	8,839.00	51.83	52.80	117.55	-829.62	3,859.83	743.79	649.80	93.99	7.914	
12,200.00	8,494.00	12,610.54	8,839.00	52.75	53.71	117.55	-828.89	3,959.83	743.79	648.13	95.66	7.775	
12,300.00	8,494.00	12,710.54	8,839.00	53.68	54.63	117.55	-828.17	4,059.83	743.80	646.46	97.34	7.641	
12,400.00	8,494.00	12,810.54	8,839.00	54.62	55.55	117.55	-827.44	4,159.82	743.81	644.76	99.04	7.510	
12,500.00	8,494.00	12,910.54	8,839.00	55.56	56.49	117.55	-826.72	4,259.82	743.81	643.06	100.75	7.382	
12,600.00	8,494.00	13,010.54	8,839.00	56.51	57.43	117.55	-825.99	4,359.82	743.82	641.34	102.48	7.258	
12,700.00	8,494.00	13,110.54	8,839.00	57.47	58.37	117.55	-825.26	4,459.82	743.83	639.61	104.21	7.137	
12,800.00	8,494.00	13,210.54	8,839.00	58.43	59.32	117.55	-824.54	4,559.81	743.83	637.87	105.96	7.020	
12,900.00	8,494.00	13,310.54	8,839.00	59.40	60.28	117.55	-823.81	4,659.81	743.84	636.12	107.72	6.906	
13,000.00	8,494.00	13,410.54	8,839.00	60.37	61.24	117.55	-823.08	4,759.81	743.85	634.36	109.48	6.794	
13,100.00	8,494.00	13,510.54	8,839.00	61.35	62.21	117.55	-822.36	4,859.81	743.86	632.59	111.26	6.686	
13,200.00	8,494.00	13,610.54	8,839.00	62.33	63.18	117.55	-821.63	4,959.80	743.86	630.82	113.05	6.580	
13,300.00	8,494.00	13,710.54	8,839.00	63.32	64.16	117.55	-820.90	5,059.80	743.87	629.03	114.84	6.477	
13,400.00	8,494.00	13,810.54	8,839.00	64.31	65.14	117.54	-820.18	5,159.80	743.88	627.23	116.64	6.377	
13,500.00	8,494.00	13,910.54	8,839.00	65.31	66.13	117.54	-819.45	5,259.80	743.88	625.43	118.45	6.280	
13,600.00	8,494.00	14,010.54	8,839.00	66.31	67.12	117.54	-818.72	5,359.79	743.89	623.62	120.27	6.185	
13,700.00	8,494.00	14,110.54	8,839.00	67.31	68.12	117.54	-818.00	5,459.79	743.90	621.80	122.09	6.093	
13,800.00	8,494.00	14,210.54	8,839.00	68.32	69.12	117.54	-817.27	5,559.79	743.90	619.98	123.92	6.003	
13,900.00	8,494.00	14,310.54	8,839.00	69.33	70.12	117.54	-816.55	5,659.78	743.91	618.15	125.76	5.915	
14,000.00	8,494.00	14,410.54	8,839.00	70.34	71.13	117.54	-815.82	5,759.78	743.92	616.31	127.61	5.830	
14,100.00	8,494.00	14,510.54	8,839.00	71.36	72.14	117.54	-815.09	5,859.78	743.92	614.47	129.46	5.747	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A02) Koala 9 Fed Com 202H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQ2)													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Distance		Rule Assigned:		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
14,200.00	8,494.00	14,610.54	8,839.00	72.38	73.15	117.54	-814.37	5,959.78	743.93	612.62	131.31	5.665	
14,300.00	8,494.00	14,710.54	8,839.00	73.41	74.17	117.54	-813.64	6,059.77	743.94	610.76	133.17	5.586	
14,400.00	8,494.00	14,810.54	8,839.00	74.43	75.19	117.54	-812.91	6,159.77	743.94	608.90	135.04	5.509	
14,500.00	8,494.00	14,910.54	8,839.00	75.46	76.21	117.54	-812.19	6,259.77	743.95	607.04	136.91	5.434	
14,600.00	8,494.00	15,010.54	8,839.00	76.49	77.23	117.54	-811.46	6,359.77	743.96	605.17	138.79	5.360	
14,700.00	8,494.00	15,110.54	8,839.00	77.53	78.26	117.54	-810.73	6,459.76	743.97	603.30	140.67	5.289	
14,800.00	8,494.00	15,210.54	8,839.00	78.56	79.29	117.54	-810.01	6,559.76	743.97	601.42	142.56	5.219	
14,900.00	8,494.00	15,310.54	8,839.00	79.60	80.33	117.54	-809.28	6,659.76	743.98	599.53	144.45	5.151	
15,000.00	8,494.00	15,410.54	8,839.00	80.64	81.36	117.54	-808.55	6,759.76	743.99	597.65	146.34	5.084	
15,100.00	8,494.00	15,510.54	8,839.00	81.69	82.40	117.54	-807.83	6,859.75	743.99	595.76	148.24	5.019	
15,200.00	8,494.00	15,610.54	8,839.00	82.73	83.44	117.54	-807.10	6,959.75	744.00	593.86	150.14	4.955	
15,300.00	8,494.00	15,710.54	8,839.00	83.78	84.48	117.54	-806.37	7,059.75	744.01	591.96	152.04	4.893	
15,400.00	8,494.00	15,810.54	8,839.00	84.83	85.52	117.54	-805.65	7,159.75	744.01	590.06	153.95	4.833	
15,500.00	8,494.00	15,910.54	8,839.00	85.88	86.57	117.54	-804.92	7,259.74	744.02	588.15	155.87	4.773	
15,600.00	8,494.00	16,010.54	8,839.00	86.94	87.62	117.54	-804.20	7,359.74	744.03	586.25	157.78	4.716	
15,700.00	8,494.00	16,110.54	8,839.00	87.99	88.67	117.54	-803.47	7,459.74	744.03	584.33	159.70	4.659	
15,800.00	8,494.00	16,210.54	8,839.00	89.05	89.72	117.54	-802.74	7,559.73	744.04	582.42	161.62	4.604	
15,900.00	8,494.00	16,310.54	8,839.00	90.10	90.77	117.54	-802.02	7,659.73	744.05	580.50	163.55	4.549	
16,000.00	8,494.00	16,410.54	8,839.00	91.16	91.83	117.54	-801.29	7,759.73	744.05	578.58	165.48	4.496	
16,100.00	8,494.00	16,510.54	8,839.00	92.22	92.88	117.54	-800.56	7,859.73	744.06	576.66	167.41	4.445	
16,200.00	8,494.00	16,610.54	8,839.00	93.29	93.94	117.54	-799.84	7,959.72	744.07	574.73	169.34	4.394	
16,300.00	8,494.00	16,710.54	8,839.00	94.35	95.00	117.54	-799.11	8,059.72	744.08	572.80	171.27	4.344	
16,400.00	8,494.00	16,810.54	8,839.00	95.42	96.06	117.54	-798.38	8,159.72	744.08	570.87	173.21	4.296	
16,500.00	8,494.00	16,910.54	8,839.00	96.48	97.12	117.54	-797.66	8,259.72	744.09	568.94	175.15	4.248	
16,600.00	8,494.00	17,010.54	8,839.00	97.55	98.18	117.54	-796.93	8,359.71	744.10	567.00	177.10	4.202	
16,700.00	8,494.00	17,110.54	8,839.00	98.62	99.25	117.54	-796.20	8,459.71	744.10	565.06	179.04	4.156	
16,800.00	8,494.00	17,210.54	8,839.00	99.69	100.31	117.54	-795.48	8,559.71	744.11	563.12	180.99	4.111	
16,900.00	8,494.00	17,310.54	8,839.00	100.76	101.38	117.54	-794.75	8,659.71	744.12	561.18	182.94	4.068	
17,000.00	8,494.00	17,410.54	8,839.00	101.83	102.45	117.53	-794.03	8,759.70	744.12	559.23	184.89	4.025	
17,100.00	8,494.00	17,510.54	8,839.00	102.91	103.52	117.53	-793.30	8,859.70	744.13	557.29	186.84	3.983	
17,200.00	8,494.00	17,610.54	8,839.00	103.98	104.59	117.53	-792.57	8,959.70	744.14	555.34	188.80	3.941	
17,300.00	8,494.00	17,710.54	8,839.00	105.06	105.66	117.53	-791.85	9,059.70	744.14	553.39	190.76	3.901	
17,400.00	8,494.00	17,810.54	8,839.00	106.13	106.73	117.53	-791.12	9,159.69	744.15	551.44	192.72	3.861	
17,500.00	8,494.00	17,910.54	8,839.00	107.21	107.81	117.53	-790.39	9,259.69	744.16	549.48	194.68	3.823	
17,600.00	8,494.00	18,010.54	8,839.00	108.29	108.88	117.53	-789.67	9,359.69	744.16	547.53	196.64	3.784	
17,700.00	8,494.00	18,110.54	8,839.00	109.37	109.96	117.53	-788.94	9,459.68	744.17	545.57	198.60	3.747	
17,800.00	8,494.00	18,210.54	8,839.00	110.45	111.03	117.53	-788.21	9,559.68	744.18	543.61	200.57	3.710	
17,900.00	8,494.00	18,310.54	8,839.00	111.53	112.11	117.53	-787.49	9,659.68	744.19	541.65	202.54	3.674	
18,000.00	8,494.00	18,410.54	8,839.00	112.61	113.19	117.53	-786.76	9,759.68	744.19	539.69	204.50	3.639	
18,100.00	8,494.00	18,510.54	8,839.00	113.69	114.27	117.53	-786.03	9,859.67	744.20	537.72	206.47	3.604	
18,200.00	8,494.00	18,610.54	8,839.00	114.77	115.35	117.53	-785.31	9,959.67	744.21	535.76	208.45	3.570	
18,300.00	8,494.00	18,710.54	8,839.00	115.86	116.43	117.53	-784.58	10,059.67	744.21	533.79	210.42	3.537	
18,400.00	8,494.00	18,810.54	8,839.00	116.94	117.51	117.53	-783.86	10,159.67	744.22	531.83	212.39	3.504	
18,500.00	8,494.00	18,910.54	8,839.00	118.03	118.59	117.53	-783.13	10,259.66	744.23	529.86	214.37	3.472	
18,600.00	8,494.00	19,010.54	8,839.00	119.11	119.68	117.53	-782.40	10,359.66	744.23	527.89	216.35	3.440	
18,700.00	8,494.00	19,110.54	8,839.00	120.20	120.76	117.53	-781.68	10,459.66	744.24	525.92	218.32	3.409	
18,800.00	8,494.00	19,210.54	8,839.00	121.29	121.84	117.53	-780.95	10,559.66	744.25	523.94	220.30	3.378	
18,900.00	8,494.00	19,310.54	8,839.00	122.38	122.93	117.53	-780.22	10,659.65	744.25	521.97	222.28	3.348	
19,000.00	8,494.00	19,410.54	8,839.00	123.46	124.01	117.53	-779.50	10,759.65	744.26	519.99	224.27	3.319	
19,100.00	8,494.00	19,510.54	8,839.00	124.55	125.10	117.53	-778.77	10,859.65	744.27	518.02	226.25	3.290	
19,200.00	8,494.00	19,610.54	8,839.00	125.64	126.19	117.53	-778.04	10,959.65	744.27	516.04	228.23	3.261	
19,300.00	8,494.00	19,710.54	8,839.00	126.73	127.27	117.53	-777.32	11,059.64	744.28	514.06	230.22	3.233	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A02) Koala 9 Fed Com 202H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Rule Assigned:				Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
19,300.08	8,494.00	19,710.63	8,839.00	126.73	127.28	117.53	-777.32	11,059.73	744.28	514.06	230.22	3.233	
19,355.95	8,494.00	19,752.88	8,839.00	127.34	127.74	117.53	-777.01	11,101.98	744.41	513.20	231.21	3.220	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A04) Koala 9 Fed Com 132H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
300.00	300.00	300.00	300.00	0.84	0.84	90.96	-0.50	29.99	29.99	28.31	1.68	17.803	
400.00	400.00	400.00	400.00	1.20	1.20	90.96	-0.50	29.99	29.99	27.59	2.40	12.488	
500.00	500.00	500.00	500.00	1.56	1.56	90.96	-0.50	29.99	29.99	26.88	3.12	9.618	
600.00	600.00	600.00	600.00	1.92	1.92	90.96	-0.50	29.99	29.99	26.16	3.84	7.820	
700.00	700.00	700.00	700.00	2.28	2.28	90.96	-0.50	29.99	29.99	25.44	4.55	6.588	
800.00	800.00	800.00	800.00	2.63	2.63	90.96	-0.50	29.99	29.99	24.72	5.27	5.692	
860.45	860.45	860.45	860.45	2.85	2.84	91.87	-0.98	29.97	29.99	24.30	5.69	5.269 CC	
900.00	900.00	900.00	899.99	2.99	2.98	93.46	-1.81	29.95	30.00	24.03	5.97	5.027	
1,000.00	1,000.00	999.84	999.75	3.35	3.31	100.87	-5.72	29.82	30.36	23.71	6.65	4.563 ES	
1,100.00	1,100.00	1,099.42	1,099.12	3.71	3.64	112.43	-12.22	29.61	32.04	24.70	7.34	4.363 SF	
1,200.00	1,200.00	1,198.60	1,197.87	4.07	3.98	125.96	-21.27	29.31	36.28	28.24	8.03	4.516	
1,300.00	1,300.00	1,297.23	1,295.83	4.43	4.31	138.58	-32.80	28.94	43.94	35.23	8.71	5.043	
1,400.00	1,400.00	1,395.21	1,392.80	4.79	4.65	148.65	-46.76	28.48	55.22	45.84	9.38	5.886	
1,500.00	1,500.00	1,492.40	1,488.62	5.14	5.00	156.09	-63.05	27.95	69.90	59.86	10.04	6.962	
1,600.00	1,600.00	1,588.82	1,583.22	5.50	5.34	161.48	-81.61	27.34	87.69	77.00	10.69	8.202	
1,700.00	1,700.00	1,686.72	1,679.08	5.86	5.70	165.27	-101.53	26.69	107.05	95.67	11.38	9.409	
1,800.00	1,800.00	1,784.63	1,774.94	6.22	6.06	167.90	-121.45	26.04	126.72	114.65	12.07	10.501	
1,900.00	1,900.00	1,882.54	1,870.79	6.58	6.42	169.82	-141.38	25.39	146.58	133.82	12.76	11.487	
2,000.00	2,000.00	1,980.44	1,966.65	6.94	6.78	171.28	-161.30	24.74	166.56	153.10	13.46	12.378	
2,100.00	2,100.00	2,078.35	2,062.50	7.29	7.15	172.43	-181.22	24.09	186.62	172.47	14.15	13.187	
2,200.00	2,200.00	2,176.25	2,158.36	7.65	7.52	173.35	-201.14	23.44	206.74	191.89	14.85	13.922	
2,300.00	2,300.00	2,274.16	2,254.22	8.01	7.89	174.11	-221.06	22.79	226.90	211.35	15.55	14.593	
2,400.00	2,400.00	2,372.07	2,350.07	8.37	8.26	174.75	-240.98	22.14	247.09	230.84	16.25	15.208	
2,500.00	2,500.00	2,469.97	2,445.93	8.73	8.64	175.29	-260.90	21.49	267.31	250.36	16.95	15.772	
2,600.00	2,599.99	2,568.13	2,542.03	9.07	9.01	5.35	-280.87	20.84	286.27	268.64	17.63	16.236	
2,700.00	2,699.91	2,666.74	2,638.57	9.39	9.39	5.81	-300.93	20.19	302.68	284.38	18.30	16.538	
2,710.01	2,709.91	2,676.64	2,648.26	9.43	9.43	5.86	-302.95	20.12	304.19	285.82	18.37	16.560	
2,800.00	2,799.76	2,765.59	2,735.36	9.72	9.77	6.27	-321.05	19.53	317.59	298.61	18.98	16.735	
2,900.00	2,899.61	2,864.45	2,832.14	10.05	10.15	6.69	-341.16	18.87	332.49	312.84	19.66	16.915	
3,000.00	2,999.46	2,963.30	2,928.92	10.38	10.53	7.07	-361.27	18.22	347.42	327.08	20.34	17.081	
3,100.00	3,099.30	3,062.15	3,025.71	10.71	10.91	7.42	-381.39	17.56	362.36	341.33	21.02	17.236	
3,200.00	3,199.15	3,161.01	3,122.49	11.04	11.30	7.75	-401.50	16.90	377.31	355.60	21.71	17.380	
3,300.00	3,299.00	3,259.86	3,219.28	11.38	11.68	8.05	-421.61	16.25	392.27	369.87	22.40	17.514	
3,400.00	3,398.85	3,358.72	3,316.06	11.72	12.06	8.32	-441.73	15.59	407.24	384.15	23.09	17.639	
3,500.00	3,498.70	3,457.57	3,412.85	12.05	12.45	8.58	-461.84	14.94	422.22	398.44	23.78	17.757	
3,600.00	3,598.55	3,556.43	3,509.63	12.39	12.83	8.82	-481.95	14.28	437.21	412.74	24.47	17.867	
3,700.00	3,698.40	3,655.28	3,606.41	12.74	13.21	9.05	-502.07	13.62	452.20	427.04	25.16	17.970	
3,791.83	3,790.09	3,746.06	3,695.29	13.05	13.57	9.24	-520.54	13.02	465.98	440.18	25.80	18.059	
3,800.00	3,798.25	3,754.13	3,703.20	13.08	13.60	9.26	-522.18	12.97	467.21	441.35	25.86	18.067	
3,900.00	3,898.17	3,852.75	3,799.75	13.42	13.98	9.47	-542.25	12.31	483.70	457.15	26.56	18.215	
4,001.85	4,000.00	3,952.73	3,897.63	13.78	14.37	-179.98	-562.59	11.65	503.11	475.85	27.27	18.451	
4,100.00	4,098.15	4,048.82	3,991.72	14.12	14.75	-179.91	-582.14	11.01	523.08	495.13	27.96	18.710	
4,200.00	4,198.15	4,146.73	4,087.57	14.48	15.13	-179.84	-602.06	10.36	543.43	514.77	28.66	18.962	
4,300.00	4,298.15	4,244.64	4,183.43	14.83	15.51	-179.78	-621.98	9.71	563.78	534.42	29.36	19.202	
4,400.00	4,398.15	4,342.54	4,279.28	15.18	15.89	-179.72	-641.90	9.06	584.13	554.07	30.06	19.430	
4,500.00	4,498.15	4,440.45	4,375.14	15.54	16.27	-179.67	-661.82	8.41	604.48	573.72	30.77	19.647	
4,600.00	4,598.15	4,538.35	4,471.00	15.89	16.66	-179.62	-681.74	7.76	624.83	593.36	31.47	19.855	
4,700.00	4,698.15	4,636.26	4,566.85	16.25	17.04	-179.57	-701.66	7.11	645.18	613.01	32.17	20.054	
4,800.00	4,798.15	4,734.17	4,662.71	16.60	17.42	-179.53	-721.58	6.46	665.54	632.66	32.88	20.243	
4,900.00	4,898.15	4,832.07	4,758.56	16.96	17.81	-179.49	-741.50	5.81	685.89	652.31	33.58	20.425	
5,000.00	4,998.15	4,929.98	4,854.42	17.31	18.19	-179.45	-761.43	5.16	706.24	671.95	34.28	20.599	
5,100.00	5,098.15	5,027.88	4,950.27	17.67	18.57	-179.41	-781.35	4.51	726.59	691.60	34.99	20.766	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A04) Koala 9 Fed Com 132H - Permit - APD-Rev00													Offset Site Error:	0.00 usft
Survey Program:		0-MWD+IFR1+SAG+FDIR (SQC2)					Rule Assigned:				Offset Well Error:	0.00 usft		
Reference		Offset		Semi Major Axis		Offset Wellbore Centre			Distance		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
5,200.00	5,198.15	5,125.79	5,046.13	18.02	18.95	-179.37	-801.27	3.86	746.94	711.25	35.69	20.926		
5,300.00	5,298.15	5,223.70	5,141.99	18.38	19.34	-179.34	-821.19	3.21	767.30	730.90	36.40	21.080		
5,400.00	5,398.15	5,321.60	5,237.84	18.73	19.72	-179.31	-841.11	2.56	787.65	750.55	37.10	21.228		
5,500.00	5,498.15	5,419.51	5,333.70	19.09	20.11	-179.28	-861.03	1.91	808.00	770.19	37.81	21.371		
5,600.00	5,598.15	5,517.41	5,429.55	19.45	20.49	-179.25	-880.95	1.26	828.36	789.84	38.51	21.508		
5,700.00	5,698.15	5,615.32	5,525.41	19.80	20.87	-179.23	-900.87	0.61	848.71	809.49	39.22	21.640		
5,800.00	5,798.15	5,713.23	5,621.26	20.16	21.26	-179.20	-920.79	-0.04	869.06	829.14	39.93	21.767		
5,900.00	5,898.15	5,811.13	5,717.12	20.51	21.64	-179.18	-940.71	-0.69	889.42	848.79	40.63	21.890		
6,000.00	5,998.15	5,909.04	5,812.98	20.87	22.02	-179.15	-960.63	-1.34	909.77	868.43	41.34	22.008		
6,100.00	6,098.15	6,006.94	5,908.83	21.23	22.41	-179.13	-980.55	-1.99	930.13	888.08	42.04	22.122		
6,200.00	6,198.15	6,104.85	6,004.69	21.58	22.79	-179.11	-1,000.47	-2.64	950.48	907.73	42.75	22.233		
6,300.00	6,298.15	6,202.75	6,100.54	21.94	23.18	-179.09	-1,020.39	-3.29	970.84	927.38	43.46	22.340		
6,400.00	6,398.15	6,300.66	6,196.40	22.30	23.56	-179.07	-1,040.31	-3.94	991.19	947.03	44.16	22.443		
6,500.00	6,498.15	6,398.57	6,292.25	22.65	23.94	-179.05	-1,060.23	-4.59	1,011.55	966.68	44.87	22.543		
6,600.00	6,598.15	6,496.47	6,388.11	23.01	24.33	-179.03	-1,080.15	-5.24	1,031.90	986.32	45.58	22.640		
6,700.00	6,698.15	6,594.38	6,483.97	23.37	24.71	-179.01	-1,100.07	-5.89	1,052.26	1,005.97	46.29	22.734		
6,800.00	6,798.15	6,692.28	6,579.82	23.72	25.10	-179.00	-1,119.99	-6.54	1,072.61	1,025.62	46.99	22.825		
6,900.00	6,898.15	6,790.19	6,675.68	24.08	25.48	-178.98	-1,139.91	-7.19	1,092.97	1,045.27	47.70	22.913		
7,000.00	6,998.15	6,888.10	6,771.53	24.44	25.87	-178.97	-1,159.84	-7.84	1,113.32	1,064.91	48.41	22.999		
7,100.00	7,098.15	6,986.00	6,867.39	24.79	26.25	-178.95	-1,179.76	-8.49	1,133.68	1,084.56	49.12	23.082		
7,200.00	7,198.15	7,083.91	6,963.24	25.15	26.64	-178.94	-1,199.68	-9.14	1,154.03	1,104.21	49.82	23.163		
7,300.00	7,298.15	7,181.81	7,059.10	25.51	27.02	-178.92	-1,219.60	-9.79	1,174.39	1,123.86	50.53	23.241		
7,400.00	7,398.15	7,279.72	7,154.96	25.87	27.40	-178.91	-1,239.52	-10.44	1,194.74	1,143.50	51.24	23.317		
7,500.00	7,498.15	7,377.63	7,250.81	26.22	27.79	-178.90	-1,259.44	-11.09	1,215.10	1,163.15	51.95	23.391		
7,600.00	7,598.15	7,475.53	7,346.67	26.58	28.17	-178.88	-1,279.36	-11.74	1,235.46	1,182.80	52.66	23.463		
7,700.00	7,698.15	7,573.44	7,442.52	26.94	28.56	-178.87	-1,299.28	-12.39	1,255.81	1,202.45	53.36	23.533		
7,800.00	7,798.15	7,671.34	7,538.38	27.29	28.94	-178.86	-1,319.20	-13.04	1,276.17	1,222.09	54.07	23.601		
7,900.00	7,898.15	7,769.25	7,634.24	27.65	29.33	-178.85	-1,339.12	-13.69	1,296.52	1,241.74	54.78	23.667		
7,911.80	7,909.95	7,780.80	7,645.54	27.69	29.37	-178.85	-1,341.47	-13.77	1,298.92	1,244.06	54.86	23.675		
7,950.00	7,948.13	7,818.24	7,682.20	27.83	29.52	73.88	-1,349.09	-14.02	1,306.36	1,251.23	55.13	23.695		
8,000.00	7,997.81	7,867.17	7,730.10	28.00	29.71	73.27	-1,359.04	-14.34	1,315.06	1,259.58	55.48	23.703		
8,050.00	8,046.82	7,915.66	7,777.58	28.17	29.90	72.96	-1,368.91	-14.66	1,322.56	1,266.74	55.82	23.692		
8,100.00	8,094.79	7,963.35	7,824.27	28.34	30.09	72.91	-1,378.61	-14.98	1,328.90	1,272.74	56.16	23.661		
8,150.00	8,141.35	8,009.88	7,869.83	28.50	30.27	73.12	-1,388.08	-15.29	1,334.15	1,277.65	56.50	23.614		
8,200.00	8,186.15	8,054.89	7,913.90	28.67	30.45	73.53	-1,397.24	-15.59	1,338.43	1,281.60	56.82	23.554		
8,250.00	8,228.85	8,106.30	7,964.21	28.82	30.65	74.28	-1,407.69	-14.77	1,341.79	1,284.59	57.20	23.458		
8,300.00	8,269.13	8,164.67	8,021.01	28.98	30.88	75.24	-1,419.44	-8.47	1,344.00	1,286.38	57.62	23.325		
8,350.00	8,306.67	8,227.09	8,080.73	29.13	31.10	76.36	-1,431.75	4.74	1,344.97	1,286.92	58.05	23.168		
8,400.00	8,341.19	8,293.98	8,142.77	29.28	31.34	77.63	-1,444.49	26.17	1,344.63	1,286.14	58.49	22.990		
8,450.00	8,372.42	8,365.67	8,206.06	29.42	31.56	79.02	-1,457.41	57.15	1,342.86	1,283.95	58.91	22.795		
8,500.00	8,400.14	8,442.33	8,268.99	29.56	31.78	80.54	-1,470.18	98.92	1,339.58	1,280.28	59.30	22.591		
8,511.80	8,406.15	8,461.14	8,283.55	29.59	31.83	80.91	-1,473.13	110.45	1,338.57	1,279.18	59.38	22.541		
8,550.00	8,424.29	8,524.04	8,329.43	29.69	31.97	83.11	-1,482.35	152.44	1,335.35	1,275.70	59.65	22.387		
8,600.00	8,445.07	8,610.84	8,384.79	29.82	32.14	85.54	-1,493.38	218.26	1,331.63	1,271.68	59.95	22.211		
8,650.00	8,462.33	8,702.03	8,431.79	29.96	32.28	87.46	-1,502.58	295.75	1,328.36	1,268.13	60.23	22.056		
8,700.00	8,475.94	8,796.33	8,467.12	30.08	32.39	88.82	-1,509.29	382.81	1,325.41	1,264.93	60.48	21.915		
8,750.00	8,485.80	8,892.02	8,488.21	30.21	32.47	89.63	-1,512.99	475.96	1,322.71	1,261.98	60.73	21.780		
8,800.00	8,491.83	8,981.12	8,494.00	30.33	32.54	89.90	-1,513.55	564.78	1,320.27	1,259.29	60.98	21.650		
8,852.66	8,494.00	9,033.71	8,494.00	30.44	32.58	90.00	-1,513.17	617.37	1,319.18	1,257.96	61.22	21.547		
8,852.76	8,494.00	9,033.81	8,494.00	30.44	32.58	90.00	-1,513.17	617.47	1,319.18	1,257.96	61.22	21.547		
8,900.00	8,494.00	9,081.05	8,494.00	30.55	32.62	90.00	-1,512.83	664.71	1,319.18	1,257.75	61.44	21.472		
9,000.00	8,494.00	9,181.05	8,494.00	30.81	32.74	90.00	-1,512.10	764.70	1,319.19	1,257.24	61.95	21.294		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A04) Koala 9 Fed Com 132H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Rule Assigned:													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
9,100.00	8,494.00	9,281.05	8,494.00	31.10	32.89	90.00	-1,511.37	864.70	1,319.20	1,256.66	62.54	21.093	
9,200.00	8,494.00	9,381.05	8,494.00	31.43	33.08	90.00	-1,510.65	964.70	1,319.21	1,256.00	63.21	20.871	
9,300.00	8,494.00	9,481.05	8,494.00	31.80	33.32	90.00	-1,509.92	1,064.70	1,319.22	1,255.27	63.95	20.630	
9,400.00	8,494.00	9,581.05	8,494.00	32.21	33.61	90.00	-1,509.20	1,164.69	1,319.22	1,254.47	64.75	20.374	
9,500.00	8,494.00	9,681.05	8,494.00	32.64	33.96	90.00	-1,508.47	1,264.69	1,319.23	1,253.61	65.63	20.102	
9,600.00	8,494.00	9,781.05	8,494.00	33.11	34.35	90.00	-1,507.74	1,364.69	1,319.24	1,252.68	66.56	19.819	
9,700.00	8,494.00	9,881.05	8,494.00	33.61	34.78	90.00	-1,507.02	1,464.69	1,319.25	1,251.69	67.56	19.526	
9,800.00	8,494.00	9,981.05	8,494.00	34.14	35.26	90.00	-1,506.29	1,564.68	1,319.26	1,250.64	68.62	19.225	
9,900.00	8,494.00	10,081.05	8,494.00	34.70	35.77	90.00	-1,505.56	1,664.68	1,319.26	1,249.53	69.74	18.918	
10,000.00	8,494.00	10,181.05	8,494.00	35.28	36.32	90.00	-1,504.84	1,764.68	1,319.27	1,248.37	70.90	18.607	
10,100.00	8,494.00	10,281.05	8,494.00	35.89	36.89	90.00	-1,504.11	1,864.68	1,319.28	1,247.16	72.12	18.292	
10,200.00	8,494.00	10,381.05	8,494.00	36.53	37.50	90.00	-1,503.39	1,964.67	1,319.29	1,245.90	73.39	17.977	
10,300.00	8,494.00	10,481.05	8,494.00	37.19	38.13	90.00	-1,502.66	2,064.67	1,319.30	1,244.59	74.70	17.661	
10,400.00	8,494.00	10,581.05	8,494.00	37.87	38.78	90.00	-1,501.93	2,164.67	1,319.30	1,243.25	76.06	17.346	
10,500.00	8,494.00	10,681.05	8,494.00	38.57	39.46	90.00	-1,501.21	2,264.66	1,319.31	1,241.86	77.46	17.033	
10,600.00	8,494.00	10,781.05	8,494.00	39.29	40.16	90.00	-1,500.48	2,364.66	1,319.32	1,240.43	78.89	16.723	
10,700.00	8,494.00	10,881.05	8,494.00	40.02	40.88	90.00	-1,499.76	2,464.66	1,319.33	1,238.96	80.37	16.416	
10,800.00	8,494.00	10,981.05	8,494.00	40.78	41.61	90.00	-1,499.03	2,564.66	1,319.34	1,237.46	81.88	16.114	
10,900.00	8,494.00	11,081.05	8,494.00	41.55	42.37	90.00	-1,498.30	2,664.65	1,319.34	1,235.93	83.42	15.816	
11,000.00	8,494.00	11,181.05	8,494.00	42.34	43.14	90.00	-1,497.58	2,764.65	1,319.35	1,234.36	84.99	15.523	
11,100.00	8,494.00	11,281.05	8,494.00	43.14	43.92	90.00	-1,496.85	2,864.65	1,319.36	1,232.77	86.60	15.236	
11,200.00	8,494.00	11,381.05	8,494.00	43.96	44.73	90.00	-1,496.12	2,964.65	1,319.37	1,231.14	88.23	14.954	
11,300.00	8,494.00	11,481.05	8,494.00	44.79	45.54	90.00	-1,495.40	3,064.64	1,319.38	1,229.49	89.88	14.679	
11,400.00	8,494.00	11,581.05	8,494.00	45.64	46.37	90.00	-1,494.67	3,164.64	1,319.39	1,227.82	91.57	14.409	
11,500.00	8,494.00	11,681.05	8,494.00	46.49	47.21	90.00	-1,493.95	3,264.64	1,319.39	1,226.12	93.27	14.146	
11,600.00	8,494.00	11,781.05	8,494.00	47.36	48.06	90.00	-1,493.22	3,364.64	1,319.40	1,224.40	95.00	13.888	
11,700.00	8,494.00	11,881.05	8,494.00	48.23	48.93	90.00	-1,492.49	3,464.63	1,319.41	1,222.66	96.75	13.637	
11,800.00	8,494.00	11,981.05	8,494.00	49.12	49.80	90.00	-1,491.77	3,564.63	1,319.42	1,220.90	98.52	13.392	
11,900.00	8,494.00	12,081.05	8,494.00	50.01	50.69	90.00	-1,491.04	3,664.63	1,319.43	1,219.12	100.31	13.154	
12,000.00	8,494.00	12,181.05	8,494.00	50.92	51.58	90.00	-1,490.32	3,764.63	1,319.43	1,217.32	102.12	12.921	
12,100.00	8,494.00	12,281.05	8,494.00	51.83	52.48	90.00	-1,489.59	3,864.62	1,319.44	1,215.50	103.94	12.694	
12,200.00	8,494.00	12,381.05	8,494.00	52.75	53.39	90.00	-1,488.86	3,964.62	1,319.45	1,213.67	105.78	12.474	
12,300.00	8,494.00	12,481.05	8,494.00	53.68	54.31	90.00	-1,488.14	4,064.62	1,319.46	1,211.82	107.63	12.259	
12,400.00	8,494.00	12,581.05	8,494.00	54.62	55.24	90.00	-1,487.41	4,164.61	1,319.47	1,209.96	109.50	12.049	
12,500.00	8,494.00	12,681.05	8,494.00	55.56	56.17	90.00	-1,486.69	4,264.61	1,319.47	1,208.09	111.39	11.846	
12,600.00	8,494.00	12,781.05	8,494.00	56.51	57.11	90.00	-1,485.96	4,364.61	1,319.48	1,206.20	113.28	11.648	
12,700.00	8,494.00	12,881.05	8,494.00	57.47	58.06	90.00	-1,485.23	4,464.61	1,319.49	1,204.30	115.19	11.455	
12,800.00	8,494.00	12,981.05	8,494.00	58.43	59.01	90.00	-1,484.51	4,564.60	1,319.50	1,202.38	117.11	11.267	
12,900.00	8,494.00	13,081.05	8,494.00	59.40	59.97	90.00	-1,483.78	4,664.60	1,319.51	1,200.46	119.05	11.084	
13,000.00	8,494.00	13,181.05	8,494.00	60.37	60.93	90.00	-1,483.05	4,764.60	1,319.51	1,198.52	120.99	10.906	
13,100.00	8,494.00	13,281.05	8,494.00	61.35	61.90	90.00	-1,482.33	4,864.60	1,319.52	1,196.58	122.94	10.733	
13,200.00	8,494.00	13,381.05	8,494.00	62.33	62.88	90.00	-1,481.60	4,964.59	1,319.53	1,194.62	124.91	10.564	
13,300.00	8,494.00	13,481.05	8,494.00	63.32	63.86	90.00	-1,480.88	5,064.59	1,319.54	1,192.66	126.88	10.400	
13,400.00	8,494.00	13,581.05	8,494.00	64.31	64.84	90.00	-1,480.15	5,164.59	1,319.55	1,190.69	128.86	10.240	
13,500.00	8,494.00	13,681.05	8,494.00	65.31	65.83	90.00	-1,479.42	5,264.59	1,319.55	1,188.70	130.85	10.084	
13,600.00	8,494.00	13,781.05	8,494.00	66.31	66.83	90.00	-1,478.70	5,364.58	1,319.56	1,186.71	132.85	9.933	
13,700.00	8,494.00	13,881.05	8,494.00	67.31	67.82	90.00	-1,477.97	5,464.58	1,319.57	1,184.72	134.85	9.785	
13,800.00	8,494.00	13,981.05	8,494.00	68.32	68.82	90.00	-1,477.25	5,564.58	1,319.58	1,182.71	136.87	9.641	
13,900.00	8,494.00	14,081.05	8,494.00	69.33	69.83	90.00	-1,476.52	5,664.58	1,319.59	1,180.70	138.89	9.501	
14,000.00	8,494.00	14,181.05	8,494.00	70.34	70.84	90.00	-1,475.79	5,764.57	1,319.59	1,178.68	140.91	9.365	
14,100.00	8,494.00	14,281.05	8,494.00	71.36	71.85	90.00	-1,475.07	5,864.57	1,319.60	1,176.66	142.95	9.231	
14,200.00	8,494.00	14,381.05	8,494.00	72.38	72.86	90.00	-1,474.34	5,964.57	1,319.61	1,174.62	144.99	9.102	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A04) Koala 9 Fed Com 132H - Permit - APD-Rev00												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)												Offset Well Error:	0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
14,300.00	8,494.00	14,481.05	8,494.00	73.41	73.88	90.00	-1,473.61	6,064.56	1,319.62	1,172.59	147.03	8.975	
14,400.00	8,494.00	14,581.05	8,494.00	74.43	74.90	90.00	-1,472.89	6,164.56	1,319.63	1,170.54	149.08	8.852	
14,500.00	8,494.00	14,681.05	8,494.00	75.46	75.93	90.00	-1,472.16	6,264.56	1,319.64	1,168.49	151.14	8.731	
14,600.00	8,494.00	14,781.05	8,494.00	76.49	76.95	90.00	-1,471.44	6,364.56	1,319.64	1,166.44	153.20	8.614	
14,700.00	8,494.00	14,881.05	8,494.00	77.53	77.98	90.00	-1,470.71	6,464.55	1,319.65	1,164.38	155.27	8.499	
14,800.00	8,494.00	14,981.05	8,494.00	78.56	79.02	90.00	-1,469.98	6,564.55	1,319.66	1,162.32	157.34	8.387	
14,900.00	8,494.00	15,081.05	8,494.00	79.60	80.05	90.00	-1,469.26	6,664.55	1,319.67	1,160.25	159.42	8.278	
15,000.00	8,494.00	15,181.05	8,494.00	80.64	81.09	90.00	-1,468.53	6,764.55	1,319.68	1,158.18	161.50	8.171	
15,100.00	8,494.00	15,281.05	8,494.00	81.69	82.12	90.00	-1,467.81	6,864.54	1,319.68	1,156.10	163.59	8.067	
15,200.00	8,494.00	15,381.05	8,494.00	82.73	83.17	90.00	-1,467.08	6,964.54	1,319.69	1,154.02	165.68	7.966	
15,300.00	8,494.00	15,481.05	8,494.00	83.78	84.21	90.00	-1,466.35	7,064.54	1,319.70	1,151.93	167.77	7.866	
15,400.00	8,494.00	15,581.05	8,494.00	84.83	85.25	90.00	-1,465.63	7,164.54	1,319.71	1,149.84	169.87	7.769	
15,500.00	8,494.00	15,681.05	8,494.00	85.88	86.30	90.00	-1,464.90	7,264.53	1,319.72	1,147.75	171.97	7.674	
15,600.00	8,494.00	15,781.05	8,494.00	86.94	87.35	90.00	-1,464.18	7,364.53	1,319.72	1,145.65	174.07	7.581	
15,700.00	8,494.00	15,881.05	8,494.00	87.99	88.40	90.00	-1,463.45	7,464.53	1,319.73	1,143.55	176.18	7.491	
15,800.00	8,494.00	15,981.05	8,494.00	89.05	89.45	90.00	-1,462.72	7,564.53	1,319.74	1,141.45	178.29	7.402	
15,900.00	8,494.00	16,081.05	8,494.00	90.10	90.51	90.00	-1,462.00	7,664.52	1,319.75	1,139.34	180.41	7.315	
16,000.00	8,494.00	16,181.05	8,494.00	91.16	91.56	90.00	-1,461.27	7,764.52	1,319.76	1,137.23	182.52	7.231	
16,100.00	8,494.00	16,281.05	8,494.00	92.22	92.62	90.00	-1,460.54	7,864.52	1,319.76	1,135.12	184.65	7.148	
16,200.00	8,494.00	16,381.05	8,494.00	93.29	93.68	90.00	-1,459.82	7,964.51	1,319.77	1,133.00	186.77	7.066	
16,300.00	8,494.00	16,481.05	8,494.00	94.35	94.74	90.00	-1,459.09	8,064.51	1,319.78	1,130.89	188.90	6.987	
16,400.00	8,494.00	16,581.05	8,494.00	95.42	95.80	90.00	-1,458.37	8,164.51	1,319.79	1,128.76	191.02	6.909	
16,500.00	8,494.00	16,681.05	8,494.00	96.48	96.86	90.00	-1,457.64	8,264.51	1,319.80	1,126.64	193.16	6.833	
16,600.00	8,494.00	16,781.05	8,494.00	97.55	97.93	90.00	-1,456.91	8,364.50	1,319.80	1,124.51	195.29	6.758	
16,700.00	8,494.00	16,881.05	8,494.00	98.62	98.99	90.00	-1,456.19	8,464.50	1,319.81	1,122.39	197.43	6.685	
16,800.00	8,494.00	16,981.05	8,494.00	99.69	100.06	90.00	-1,455.46	8,564.50	1,319.82	1,120.26	199.57	6.613	
16,900.00	8,494.00	17,081.05	8,494.00	100.76	101.13	90.00	-1,454.74	8,664.50	1,319.83	1,118.12	201.71	6.543	
17,000.00	8,494.00	17,181.05	8,494.00	101.83	102.20	90.00	-1,454.01	8,764.49	1,319.84	1,115.99	203.85	6.475	
17,100.00	8,494.00	17,281.05	8,494.00	102.91	103.27	90.00	-1,453.28	8,864.49	1,319.85	1,113.85	206.00	6.407	
17,200.00	8,494.00	17,381.05	8,494.00	103.98	104.34	90.00	-1,452.56	8,964.49	1,319.85	1,111.71	208.14	6.341	
17,300.00	8,494.00	17,481.05	8,494.00	105.06	105.41	90.00	-1,451.83	9,064.49	1,319.86	1,109.57	210.29	6.276	
17,400.00	8,494.00	17,581.05	8,494.00	106.13	106.49	90.00	-1,451.11	9,164.48	1,319.87	1,107.42	212.45	6.213	
17,500.00	8,494.00	17,681.05	8,494.00	107.21	107.56	90.00	-1,450.38	9,264.48	1,319.88	1,105.28	214.60	6.150	
17,600.00	8,494.00	17,781.05	8,494.00	108.29	108.64	90.00	-1,449.65	9,364.48	1,319.89	1,103.13	216.75	6.089	
17,700.00	8,494.00	17,881.05	8,494.00	109.37	109.71	90.00	-1,448.93	9,464.48	1,319.89	1,100.98	218.91	6.029	
17,800.00	8,494.00	17,981.05	8,494.00	110.45	110.79	90.00	-1,448.20	9,564.47	1,319.90	1,098.83	221.07	5.970	
17,900.00	8,494.00	18,081.05	8,494.00	111.53	111.87	90.00	-1,447.47	9,664.47	1,319.91	1,096.68	223.23	5.913	
18,000.00	8,494.00	18,181.05	8,494.00	112.61	112.95	90.00	-1,446.75	9,764.47	1,319.92	1,094.52	225.39	5.856	
18,100.00	8,494.00	18,281.05	8,494.00	113.69	114.03	90.00	-1,446.02	9,864.46	1,319.93	1,092.37	227.56	5.800	
18,200.00	8,494.00	18,381.05	8,494.00	114.77	115.11	90.00	-1,445.30	9,964.46	1,319.93	1,090.21	229.72	5.746	
18,300.00	8,494.00	18,481.05	8,494.00	115.86	116.19	90.00	-1,444.57	10,064.46	1,319.94	1,088.05	231.89	5.692	
18,400.00	8,494.00	18,581.05	8,494.00	116.94	117.27	90.00	-1,443.84	10,164.46	1,319.95	1,085.89	234.06	5.639	
18,500.00	8,494.00	18,681.05	8,494.00	118.03	118.35	90.00	-1,443.12	10,264.45	1,319.96	1,083.73	236.23	5.588	
18,600.00	8,494.00	18,781.05	8,494.00	119.11	119.44	90.00	-1,442.39	10,364.45	1,319.97	1,081.57	238.40	5.537	
18,700.00	8,494.00	18,881.05	8,494.00	120.20	120.52	90.00	-1,441.67	10,464.45	1,319.97	1,079.40	240.57	5.487	
18,800.00	8,494.00	18,981.05	8,494.00	121.29	121.61	90.00	-1,440.94	10,564.45	1,319.98	1,077.24	242.75	5.438	
18,900.00	8,494.00	19,081.05	8,494.00	122.38	122.69	90.00	-1,440.21	10,664.44	1,319.99	1,075.07	244.92	5.389	
19,000.00	8,494.00	19,181.05	8,494.00	123.46	123.78	90.00	-1,439.49	10,764.44	1,320.00	1,072.90	247.10	5.342	
19,100.00	8,494.00	19,281.05	8,494.00	124.55	124.87	90.00	-1,438.76	10,864.44	1,320.01	1,070.73	249.27	5.295	
19,200.00	8,494.00	19,381.05	8,494.00	125.64	125.95	90.00	-1,438.03	10,964.44	1,320.01	1,068.56	251.45	5.250	
19,300.00	8,494.00	19,481.05	8,494.00	126.73	127.04	90.00	-1,437.31	11,064.43	1,320.02	1,066.39	253.63	5.204	
19,300.02	8,494.00	19,481.07	8,494.00	126.73	127.04	90.00	-1,437.31	11,064.45	1,320.02	1,066.39	253.63	5.204	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A04) Koala 9 Fed Com 132H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Rule Assigned:				Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
19,355.95	8,494.00	19,509.78	8,494.00	127.34	127.36	90.00	-1,437.10	11,093.16	1,320.31	1,065.66	254.65	5.185	



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A05) Koala 9 Fed Com 121H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Distance		Rule Assigned:		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
400.00	400.00	400.00	400.00	1.20	1.20	90.96	-1.00	59.99	60.00	57.60	2.40	24.981	
500.00	500.00	500.00	500.00	1.56	1.56	90.96	-1.00	59.99	60.00	56.88	3.12	19.238	
600.00	600.00	600.00	600.00	1.92	1.92	90.96	-1.00	59.99	60.00	56.16	3.84	15.642	
700.00	700.00	700.00	700.00	2.28	2.28	90.96	-1.00	59.99	60.00	55.45	4.55	13.179	
800.00	800.00	800.00	800.00	2.63	2.63	90.96	-1.00	59.99	60.00	54.73	5.27	11.386	
900.00	900.00	900.00	900.00	2.99	2.99	90.96	-1.00	59.99	60.00	54.01	5.99	10.022	
1,000.00	1,000.00	1,000.00	1,000.00	3.35	3.35	90.96	-1.00	59.99	60.00	53.29	6.70	8.950	
1,100.00	1,100.00	1,100.00	1,100.00	3.71	3.71	90.96	-1.00	59.99	60.00	52.58	7.42	8.086	
1,200.00	1,200.00	1,200.00	1,200.00	4.07	4.07	90.96	-1.00	59.99	60.00	51.86	8.14	7.373	
1,300.00	1,300.00	1,300.45	1,300.44	4.43	4.41	92.17	-2.25	59.57	59.62	50.78	8.84	6.746	
1,400.00	1,400.00	1,400.76	1,400.67	4.79	4.74	95.88	-6.00	58.32	58.63	49.11	9.52	6.157	
1,500.00	1,500.00	1,500.63	1,500.40	5.14	5.07	100.97	-10.98	56.66	57.71	47.50	10.21	5.651	
1,600.00	1,600.00	1,600.49	1,600.12	5.50	5.41	106.19	-15.97	54.99	57.27	46.36	10.91	5.251	
1,643.16	1,643.16	1,643.59	1,643.16	5.66	5.55	108.46	-18.12	54.28	57.22	46.01	11.21	5.106 CC	
1,700.00	1,700.00	1,700.35	1,699.84	5.86	5.74	111.44	-20.95	53.33	57.30	45.70	11.60	4.938	
1,800.00	1,800.00	1,800.21	1,799.57	6.22	6.08	116.65	-25.93	51.67	57.81	45.51	12.30	4.700	
1,900.00	1,900.00	1,900.07	1,899.29	6.58	6.43	121.72	-30.91	50.01	58.79	45.79	13.00	4.522	
2,000.00	2,000.00	1,999.93	1,999.01	6.94	6.77	126.59	-35.89	48.34	60.22	46.51	13.71	4.394	
2,100.00	2,100.00	2,099.80	2,098.74	7.29	7.12	131.20	-40.87	46.68	62.06	47.65	14.41	4.307	
2,200.00	2,200.00	2,199.66	2,198.46	7.65	7.46	135.53	-45.85	45.02	64.28	49.16	15.11	4.253	
2,300.00	2,300.00	2,299.52	2,298.18	8.01	7.81	139.54	-50.83	43.36	66.84	51.02	15.82	4.225	
2,400.00	2,400.00	2,399.38	2,397.91	8.37	8.16	143.24	-55.82	41.69	69.70	53.17	16.53	4.217	
2,500.00	2,500.00	2,499.24	2,497.63	8.73	8.51	146.64	-60.80	40.03	72.83	55.60	17.23	4.226	
2,600.00	2,599.99	2,599.15	2,597.40	9.07	8.87	-21.00	-65.78	38.37	74.97	57.05	17.92	4.183	
2,700.00	2,699.91	2,699.12	2,697.23	9.39	9.22	-19.03	-70.77	36.70	74.80	56.20	18.60	4.022	
2,710.01	2,709.91	2,709.13	2,707.23	9.43	9.26	-18.87	-71.27	36.54	74.65	55.98	18.67	3.999	
2,800.00	2,799.76	2,799.08	2,797.06	9.72	9.57	-17.42	-75.75	35.04	73.23	53.95	19.28	3.799	
2,900.00	2,899.61	2,899.05	2,896.88	10.05	9.93	-15.74	-80.74	33.38	71.70	51.75	19.96	3.593	
3,000.00	2,999.46	2,999.02	2,996.71	10.38	10.28	-13.98	-85.73	31.71	70.24	49.60	20.64	3.403	
3,100.00	3,099.30	3,098.98	3,096.54	10.71	10.64	-12.16	-90.71	30.05	68.85	47.53	21.32	3.229	
3,200.00	3,199.15	3,198.95	3,196.37	11.04	10.99	-10.26	-95.70	28.38	67.53	45.52	22.01	3.068	
3,300.00	3,299.00	3,298.91	3,296.19	11.38	11.35	-8.29	-100.68	26.72	66.29	43.59	22.70	2.920	
3,400.00	3,398.85	3,398.88	3,396.02	11.72	11.71	-6.24	-105.67	25.05	65.13	41.74	23.39	2.784	
3,500.00	3,498.70	3,498.84	3,495.85	12.05	12.06	-4.13	-110.66	23.39	64.05	39.97	24.08	2.660	
3,600.00	3,598.55	3,598.81	3,595.68	12.39	12.42	-1.94	-115.64	21.73	63.07	38.30	24.77	2.546	
3,700.00	3,698.40	3,698.78	3,695.50	12.74	12.78	0.31	-120.63	20.06	62.18	36.71	25.47	2.442	
3,791.83	3,790.09	3,790.58	3,787.18	13.05	13.11	2.43	-125.21	18.53	61.45	35.34	26.11	2.354	
3,800.00	3,798.25	3,798.74	3,795.33	13.08	13.14	2.62	-125.62	18.40	61.40	35.23	26.16	2.347	
3,819.40	3,817.62	3,818.14	3,814.70	13.14	13.20	3.07	-126.58	18.08	61.35	35.05	26.30	2.333 ES	
3,900.00	3,898.17	3,898.71	3,895.16	13.42	13.49	4.87	-130.60	16.73	62.23	35.37	26.86	2.317 SF	
4,001.85	4,000.00	4,000.46	3,996.77	13.78	13.86	177.21	-135.68	15.04	65.84	38.26	27.57	2.388	
4,100.00	4,098.15	4,098.48	4,094.65	14.12	14.21	178.73	-140.57	13.41	70.67	42.40	28.27	2.500	
4,200.00	4,198.15	4,198.34	4,194.38	14.48	14.57	-179.93	-145.55	11.75	75.64	46.67	28.98	2.610	
4,300.00	4,298.15	4,298.20	4,294.10	14.83	14.93	-178.75	-150.53	10.08	80.65	50.97	29.69	2.717	
4,400.00	4,398.15	4,398.06	4,393.83	15.18	15.28	-177.71	-155.51	8.42	85.69	55.29	30.40	2.819	
4,500.00	4,498.15	4,497.93	4,493.55	15.54	15.64	-176.79	-160.49	6.76	90.75	59.65	31.10	2.918	
4,600.00	4,598.15	4,597.79	4,593.27	15.89	16.00	-175.96	-165.47	5.10	95.84	64.02	31.81	3.012	
4,700.00	4,698.15	4,697.65	4,693.00	16.25	16.36	-175.22	-170.46	3.43	100.94	68.41	32.52	3.103	
4,800.00	4,798.15	4,797.51	4,792.72	16.60	16.72	-174.54	-175.44	1.77	106.06	72.82	33.23	3.191	
4,900.00	4,898.15	4,900.09	4,895.21	16.96	17.09	-174.05	-179.41	0.45	110.04	76.07	33.96	3.240	
5,000.00	4,998.15	5,002.99	4,998.10	17.31	17.44	-173.89	-180.77	-0.01	111.40	76.73	34.67	3.213	
5,100.00	5,098.15	5,103.05	5,098.15	17.67	17.78	-173.89	-180.77	-0.01	111.40	76.04	35.36	3.150	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A05) Koala 9 Fed Com 121H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,200.00	5,198.15	5,203.05	5,198.15	18.02	18.11	-173.89	-180.77	-0.01	111.40	75.35	36.05	3.090	
5,300.00	5,298.15	5,303.05	5,298.15	18.38	18.45	-173.89	-180.77	-0.01	111.40	74.65	36.75	3.031	
5,400.00	5,398.15	5,403.05	5,398.15	18.73	18.79	-173.89	-180.77	-0.01	111.40	73.96	37.45	2.975	
5,500.00	5,498.15	5,503.05	5,498.15	19.09	19.13	-173.89	-180.77	-0.01	111.40	73.26	38.14	2.921	
5,600.00	5,598.15	5,603.05	5,598.15	19.45	19.47	-173.89	-180.77	-0.01	111.40	72.56	38.84	2.868	
5,700.00	5,698.15	5,703.05	5,698.15	19.80	19.81	-173.89	-180.77	-0.01	111.40	71.86	39.54	2.818	
5,800.00	5,798.15	5,803.05	5,798.15	20.16	20.15	-173.89	-180.77	-0.01	111.40	71.17	40.24	2.769	
5,900.00	5,898.15	5,903.05	5,898.15	20.51	20.49	-173.89	-180.77	-0.01	111.40	70.47	40.94	2.721	
6,000.00	5,998.15	6,003.05	5,998.15	20.87	20.83	-173.89	-180.77	-0.01	111.40	69.77	41.64	2.676	
6,100.00	6,098.15	6,103.05	6,098.15	21.23	21.17	-173.89	-180.77	-0.01	111.40	69.07	42.34	2.631	
6,200.00	6,198.15	6,203.05	6,198.15	21.58	21.52	-173.89	-180.77	-0.01	111.40	68.36	43.04	2.588	
6,300.00	6,298.15	6,303.05	6,298.15	21.94	21.86	-173.89	-180.77	-0.01	111.40	67.66	43.74	2.547	
6,400.00	6,398.15	6,403.05	6,398.15	22.30	22.20	-173.89	-180.77	-0.01	111.40	66.96	44.44	2.507	
6,500.00	6,498.15	6,503.05	6,498.15	22.65	22.55	-173.89	-180.77	-0.01	111.40	66.26	45.14	2.468	
6,600.00	6,598.15	6,603.05	6,598.15	23.01	22.89	-173.89	-180.77	-0.01	111.40	65.56	45.85	2.430	
6,700.00	6,698.15	6,703.05	6,698.15	23.37	23.24	-173.89	-180.77	-0.01	111.40	64.85	46.55	2.393	
6,800.00	6,798.15	6,803.85	6,798.67	23.72	23.58	-176.97	-180.90	5.98	111.05	63.80	47.25	2.350	
6,821.94	6,820.10	6,825.57	6,820.10	23.80	23.66	-178.80	-180.97	9.52	110.99	63.59	47.41	2.341	
6,900.00	6,898.15	6,900.00	6,892.21	24.08	23.90	171.87	-181.35	27.74	112.64	64.72	47.92	2.350	
7,000.00	6,998.15	6,986.91	6,972.56	24.44	24.17	156.48	-182.04	60.61	124.85	76.96	47.89	2.607	
7,100.00	7,098.15	7,062.38	7,037.63	24.79	24.38	142.40	-182.84	98.73	154.74	108.44	46.30	3.342	
7,200.00	7,198.15	7,126.46	7,088.55	25.15	24.55	132.11	-183.65	137.58	201.84	158.08	43.77	4.612	
7,300.00	7,298.15	7,180.28	7,127.74	25.51	24.70	125.14	-184.42	174.43	261.86	220.64	41.22	6.353	
7,400.00	7,398.15	7,225.36	7,157.79	25.87	24.83	120.41	-185.13	208.02	330.93	291.93	39.00	8.486	
7,500.00	7,498.15	7,263.25	7,180.93	26.22	24.93	117.11	-185.76	237.99	406.42	369.26	37.16	10.938	
7,600.00	7,598.15	7,300.00	7,201.44	26.58	25.03	114.40	-186.39	268.48	486.61	450.70	35.91	13.549	
7,700.00	7,698.15	7,322.51	7,213.02	26.94	25.09	112.94	-186.80	287.77	570.20	535.76	34.44	16.556	
7,800.00	7,798.15	7,350.00	7,226.12	27.29	25.17	111.35	-187.30	311.93	656.53	622.90	33.63	19.519	
7,900.00	7,898.15	7,366.10	7,233.25	27.65	25.21	110.50	-187.61	326.36	744.88	712.19	32.68	22.790	
7,911.80	7,909.95	7,368.30	7,234.20	27.69	25.21	110.39	-187.65	328.35	755.42	722.82	32.60	23.170	
7,950.00	7,948.13	7,375.66	7,237.30	27.83	25.23	3.03	-187.79	335.02	789.13	756.80	32.33	24.408	
12,900.00	8,494.00	11,703.24	7,289.00	59.40	57.17	-0.01	-164.08	4,655.02	1,205.00	1,156.19	48.81	24.687	
13,000.00	8,494.00	11,803.24	7,289.00	60.37	58.18	-0.01	-163.35	4,755.02	1,205.00	1,155.42	49.58	24.303	
13,100.00	8,494.00	11,903.24	7,289.00	61.35	59.19	-0.01	-162.62	4,855.01	1,205.00	1,154.64	50.36	23.928	
13,200.00	8,494.00	12,003.24	7,289.00	62.33	60.21	-0.01	-161.89	4,955.01	1,205.00	1,153.86	51.14	23.563	
13,300.00	8,494.00	12,103.24	7,289.00	63.32	61.23	-0.01	-161.16	5,055.01	1,205.00	1,153.08	51.92	23.207	
13,400.00	8,494.00	12,203.24	7,289.00	64.31	62.25	-0.01	-160.43	5,155.01	1,205.00	1,152.29	52.71	22.860	
13,500.00	8,494.00	12,303.24	7,289.00	65.31	63.28	-0.01	-159.70	5,255.00	1,205.00	1,151.49	53.50	22.522	
13,600.00	8,494.00	12,403.24	7,289.00	66.31	64.31	-0.01	-158.97	5,355.00	1,205.00	1,150.70	54.30	22.192	
13,700.00	8,494.00	12,503.24	7,289.00	67.31	65.34	-0.01	-158.24	5,455.00	1,205.00	1,149.90	55.10	21.870	
13,800.00	8,494.00	12,603.24	7,289.00	68.32	66.38	-0.01	-157.51	5,554.99	1,205.00	1,149.10	55.90	21.556	
13,900.00	8,494.00	12,703.24	7,289.00	69.33	67.41	-0.01	-156.78	5,654.99	1,205.00	1,148.29	56.71	21.249	
14,000.00	8,494.00	12,803.24	7,289.00	70.34	68.46	-0.01	-156.05	5,754.99	1,205.00	1,147.48	57.52	20.950	
14,100.00	8,494.00	12,903.24	7,289.00	71.36	69.50	-0.01	-155.31	5,854.99	1,205.00	1,146.67	58.33	20.659	
14,200.00	8,494.00	13,003.24	7,289.00	72.38	70.55	-0.01	-154.58	5,954.98	1,205.00	1,145.86	59.14	20.374	
14,300.00	8,494.00	13,103.24	7,289.00	73.41	71.60	-0.01	-153.85	6,054.98	1,205.00	1,145.04	59.96	20.097	
14,400.00	8,494.00	13,203.24	7,289.00	74.43	72.65	-0.01	-153.12	6,154.98	1,205.00	1,144.22	60.78	19.826	
14,500.00	8,494.00	13,303.24	7,289.00	75.46	73.70	-0.01	-152.39	6,254.98	1,205.00	1,143.40	61.60	19.561	
14,600.00	8,494.00	13,403.24	7,289.00	76.49	74.75	-0.01	-151.66	6,354.97	1,205.00	1,142.57	62.43	19.302	
14,700.00	8,494.00	13,503.24	7,289.00	77.53	75.81	-0.01	-150.93	6,454.97	1,205.00	1,141.74	63.25	19.050	
14,800.00	8,494.00	13,603.24	7,289.00	78.56	76.87	-0.01	-150.20	6,554.97	1,205.00	1,140.92	64.08	18.804	
14,900.00	8,494.00	13,703.24	7,289.00	79.60	77.93	-0.01	-149.47	6,654.97	1,205.00	1,140.08	64.92	18.563	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A05) Koala 9 Fed Com 121H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
15,000.00	8,494.00	13,803.24	7,289.00	80.64	78.99	-0.01	-148.74	6,754.96	1,205.00	1,139.25	65.75	18.327	
15,100.00	8,494.00	13,903.24	7,289.00	81.69	80.06	-0.01	-148.01	6,854.96	1,205.00	1,138.42	66.58	18.097	
15,200.00	8,494.00	14,003.24	7,289.00	82.73	81.12	-0.01	-147.28	6,954.96	1,205.00	1,137.58	67.42	17.873	
15,300.00	8,494.00	14,103.24	7,289.00	83.78	82.19	-0.01	-146.55	7,054.95	1,205.00	1,136.74	68.26	17.653	
15,400.00	8,494.00	14,203.24	7,289.00	84.83	83.26	-0.01	-145.82	7,154.95	1,205.00	1,135.90	69.10	17.438	
15,500.00	8,494.00	14,303.24	7,289.00	85.88	84.33	-0.01	-145.09	7,254.95	1,205.00	1,135.06	69.94	17.228	
15,600.00	8,494.00	14,403.24	7,289.00	86.94	85.40	-0.01	-144.35	7,354.95	1,205.00	1,134.21	70.79	17.023	
15,700.00	8,494.00	14,503.24	7,289.00	87.99	86.47	-0.01	-143.62	7,454.94	1,205.00	1,133.37	71.63	16.822	
15,800.00	8,494.00	14,603.24	7,289.00	89.05	87.54	-0.01	-142.89	7,554.94	1,205.00	1,132.52	72.48	16.625	
15,900.00	8,494.00	14,703.24	7,289.00	90.10	88.62	-0.01	-142.16	7,654.94	1,205.00	1,131.67	73.33	16.433	
16,000.00	8,494.00	14,803.24	7,289.00	91.16	89.70	-0.01	-141.43	7,754.94	1,205.00	1,130.82	74.18	16.244	
16,100.00	8,494.00	14,903.24	7,289.00	92.22	90.77	-0.01	-140.70	7,854.93	1,205.00	1,129.97	75.03	16.060	
16,200.00	8,494.00	15,003.24	7,289.00	93.29	91.85	-0.01	-139.97	7,954.93	1,205.00	1,129.12	75.88	15.879	
16,300.00	8,494.00	15,103.24	7,289.00	94.35	92.93	-0.01	-139.24	8,054.93	1,205.00	1,128.26	76.74	15.703	
16,400.00	8,494.00	15,203.24	7,289.00	95.42	94.01	0.00	-138.51	8,154.93	1,205.00	1,127.41	77.59	15.530	
16,500.00	8,494.00	15,303.24	7,289.00	96.48	95.09	0.00	-137.78	8,254.92	1,205.00	1,126.55	78.45	15.360	
16,600.00	8,494.00	15,403.24	7,289.00	97.55	96.17	0.00	-137.05	8,354.92	1,205.00	1,125.69	79.31	15.194	
16,700.00	8,494.00	15,503.24	7,289.00	98.62	97.26	0.00	-136.32	8,454.92	1,205.00	1,124.83	80.17	15.031	
16,800.00	8,494.00	15,603.24	7,289.00	99.69	98.34	0.00	-135.59	8,554.91	1,205.00	1,123.97	81.03	14.872	
16,900.00	8,494.00	15,703.24	7,289.00	100.76	99.43	0.00	-134.86	8,654.91	1,205.00	1,123.11	81.89	14.715	
17,000.00	8,494.00	15,803.24	7,289.00	101.83	100.51	0.00	-134.12	8,754.91	1,205.00	1,122.25	82.75	14.562	
17,100.00	8,494.00	15,903.24	7,289.00	102.91	101.60	0.00	-133.39	8,854.91	1,205.00	1,121.39	83.61	14.412	
17,200.00	8,494.00	16,003.24	7,289.00	103.98	102.68	0.00	-132.66	8,954.90	1,205.00	1,120.52	84.48	14.264	
17,300.00	8,494.00	16,103.24	7,289.00	105.06	103.77	0.00	-131.93	9,054.90	1,205.00	1,119.66	85.34	14.120	
17,400.00	8,494.00	16,203.24	7,289.00	106.13	104.86	0.00	-131.20	9,154.90	1,205.00	1,118.79	86.21	13.978	
17,500.00	8,494.00	16,303.24	7,289.00	107.21	105.95	0.00	-130.47	9,254.90	1,205.00	1,117.93	87.07	13.839	
17,600.00	8,494.00	16,403.24	7,289.00	108.29	107.04	0.00	-129.74	9,354.89	1,205.00	1,117.06	87.94	13.702	
17,700.00	8,494.00	16,503.24	7,289.00	109.37	108.13	0.00	-129.01	9,454.89	1,205.00	1,116.19	88.81	13.568	
17,800.00	8,494.00	16,603.24	7,289.00	110.45	109.22	0.00	-128.28	9,554.89	1,205.00	1,115.32	89.68	13.437	
17,900.00	8,494.00	16,703.24	7,289.00	111.53	110.31	0.00	-127.55	9,654.89	1,205.00	1,114.45	90.55	13.308	
18,000.00	8,494.00	16,803.24	7,289.00	112.61	111.41	0.00	-126.82	9,754.88	1,205.00	1,113.58	91.42	13.181	
18,100.00	8,494.00	16,903.24	7,289.00	113.69	112.50	0.00	-126.09	9,854.88	1,205.00	1,112.71	92.29	13.057	
18,200.00	8,494.00	17,003.24	7,289.00	114.77	113.59	0.00	-125.36	9,954.88	1,205.00	1,111.84	93.16	12.934	
18,300.00	8,494.00	17,103.24	7,289.00	115.86	114.69	0.00	-124.63	10,054.87	1,205.00	1,110.96	94.04	12.814	
18,400.00	8,494.00	17,203.24	7,289.00	116.94	115.78	0.00	-123.90	10,154.87	1,205.00	1,110.09	94.91	12.696	
18,500.00	8,494.00	17,303.24	7,289.00	118.03	116.88	0.00	-123.16	10,254.87	1,205.00	1,109.22	95.78	12.581	
18,600.00	8,494.00	17,403.24	7,289.00	119.11	117.97	0.00	-122.43	10,354.87	1,205.00	1,108.34	96.66	12.467	
18,700.00	8,494.00	17,503.24	7,289.00	120.20	119.07	0.00	-121.70	10,454.86	1,205.00	1,107.47	97.53	12.355	
18,800.00	8,494.00	17,603.24	7,289.00	121.29	120.17	0.00	-120.97	10,554.86	1,205.00	1,106.59	98.41	12.245	
18,900.00	8,494.00	17,703.24	7,289.00	122.38	121.26	0.00	-120.24	10,654.86	1,205.00	1,105.71	99.29	12.137	
19,000.00	8,494.00	17,803.24	7,289.00	123.46	122.36	0.00	-119.51	10,754.86	1,205.00	1,104.84	100.16	12.030	
19,100.00	8,494.00	17,903.24	7,289.00	124.55	123.46	0.00	-118.78	10,854.85	1,205.00	1,103.96	101.04	11.926	
19,200.00	8,494.00	18,003.24	7,289.00	125.64	124.56	0.00	-118.05	10,954.85	1,205.00	1,103.08	101.92	11.823	
19,300.00	8,494.00	18,103.24	7,289.00	126.73	125.66	0.00	-117.32	11,054.85	1,205.00	1,102.20	102.80	11.722	
19,355.95	8,494.00	18,159.20	7,289.00	127.34	126.27	0.00	-116.91	11,110.80	1,205.00	1,101.71	103.29	11.666	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A06) Koala 9 Fed Com 122H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
600.00	600.00	600.00	600.00	1.92	1.92	90.95	-1.50	89.99	90.00	86.17	3.84	23.465	
700.00	700.00	700.00	700.00	2.28	2.28	90.95	-1.50	89.99	90.00	85.45	4.55	19.770	
800.00	800.00	800.00	800.00	2.63	2.63	90.95	-1.50	89.99	90.00	84.73	5.27	17.080	
900.00	900.00	900.02	900.01	2.99	2.98	91.79	-2.81	89.95	89.99	84.02	5.97	15.077	
907.06	907.06	907.07	907.06	3.02	3.00	91.91	-3.00	89.94	89.99	83.97	6.02	14.956 CC	
1,000.00	1,000.00	999.90	999.80	3.35	3.31	94.28	-6.73	89.82	90.07	83.41	6.65	13.534	
1,100.00	1,100.00	1,099.50	1,099.20	3.71	3.64	98.40	-13.23	89.60	90.57	83.23	7.35	12.330 ES	
1,200.00	1,200.00	1,198.70	1,197.98	4.07	3.98	104.01	-22.28	89.30	92.06	84.02	8.04	11.450	
1,300.00	1,300.00	1,297.37	1,295.96	4.43	4.31	110.82	-33.82	88.91	95.21	86.48	8.73	10.902	
1,400.00	1,400.00	1,395.37	1,392.96	4.79	4.65	118.38	-47.78	88.45	100.77	91.35	9.42	10.695	
1,500.00	1,500.00	1,492.58	1,488.80	5.14	5.00	126.09	-64.08	87.90	109.36	99.26	10.10	10.826	
1,600.00	1,600.00	1,588.90	1,583.31	5.50	5.34	133.43	-82.63	87.28	121.35	110.58	10.77	11.271	
1,700.00	1,700.00	1,684.21	1,676.34	5.86	5.69	140.04	-103.33	86.59	136.88	125.46	11.41	11.992	
1,800.00	1,800.00	1,779.58	1,768.92	6.22	6.04	145.78	-126.19	85.83	155.74	143.68	12.06	12.913	
1,900.00	1,900.00	1,876.54	1,862.94	6.58	6.41	150.43	-149.88	85.04	176.27	163.53	12.73	13.841	
2,000.00	2,000.00	1,973.51	1,956.96	6.94	6.77	154.11	-173.58	84.25	197.69	184.27	13.41	14.738	
2,100.00	2,100.00	2,070.47	2,050.98	7.29	7.14	157.07	-197.27	83.46	219.74	205.64	14.10	15.590	
2,200.00	2,200.00	2,167.44	2,145.01	7.65	7.51	159.49	-220.97	82.67	242.25	227.47	14.78	16.390	
2,300.00	2,300.00	2,264.40	2,239.03	8.01	7.89	161.50	-244.66	81.88	265.11	249.64	15.47	17.140	
2,400.00	2,400.00	2,361.37	2,333.05	8.37	8.27	163.19	-268.36	81.09	288.23	272.07	16.16	17.840	
2,500.00	2,500.00	2,458.33	2,427.07	8.73	8.64	164.63	-292.05	80.30	311.55	294.70	16.85	18.492	
2,600.00	2,599.99	2,555.60	2,521.39	9.07	9.03	-4.52	-315.82	79.51	333.76	316.24	17.52	19.048	
2,700.00	2,699.91	2,653.43	2,616.24	9.39	9.41	-3.46	-339.73	78.71	353.55	335.36	18.19	19.442	
2,710.01	2,709.91	2,663.25	2,625.77	9.43	9.45	-3.36	-342.13	78.63	355.39	337.14	18.25	19.473	
2,800.00	2,799.76	2,751.56	2,711.40	9.72	9.80	-2.53	-363.71	77.91	371.90	353.05	18.85	19.725	
2,900.00	2,899.61	2,849.70	2,806.55	10.05	10.19	-1.70	-387.69	77.11	390.33	370.81	19.53	19.988	
3,000.00	2,999.46	2,947.83	2,901.71	10.38	10.57	-0.94	-411.67	76.31	408.84	388.63	20.20	20.235	
3,100.00	3,099.30	3,045.97	2,996.87	10.71	10.96	-0.25	-435.66	75.51	427.41	406.52	20.88	20.466	
3,200.00	3,199.15	3,144.10	3,092.02	11.04	11.36	0.39	-459.64	74.71	446.03	424.46	21.56	20.683	
3,300.00	3,299.00	3,242.24	3,187.18	11.38	11.75	0.98	-483.62	73.91	464.70	442.45	22.25	20.887	
3,400.00	3,398.85	3,340.37	3,282.34	11.72	12.14	1.52	-507.60	73.11	483.41	460.48	22.93	21.079	
3,500.00	3,498.70	3,438.50	3,377.49	12.05	12.53	2.02	-531.58	72.31	502.17	478.55	23.62	21.260	
3,600.00	3,598.55	3,536.64	3,472.65	12.39	12.92	2.48	-555.56	71.51	520.95	496.65	24.31	21.431	
3,700.00	3,698.40	3,634.77	3,567.80	12.74	13.32	2.91	-579.54	70.71	539.77	514.78	25.00	21.593	
3,791.83	3,790.09	3,724.89	3,655.19	13.05	13.68	3.28	-601.57	69.98	557.08	531.45	25.63	21.734	
3,800.00	3,798.25	3,732.91	3,662.96	13.08	13.71	3.32	-603.52	69.91	558.63	532.94	25.69	21.746	
3,900.00	3,898.17	3,830.75	3,757.83	13.42	14.10	3.70	-627.43	69.11	578.99	552.61	26.38	21.948	
4,001.85	4,000.00	3,929.81	3,853.89	13.78	14.50	174.46	-651.64	68.31	602.37	575.28	27.09	22.238	
4,100.00	4,098.15	4,024.99	3,946.17	14.12	14.88	174.74	-674.90	67.53	626.18	598.41	27.77	22.547	
4,200.00	4,198.15	4,121.95	4,040.20	14.48	15.28	175.01	-698.60	66.74	650.46	621.99	28.47	22.848	
4,300.00	4,298.15	4,218.92	4,134.22	14.83	15.67	175.26	-722.29	65.95	674.75	645.58	29.17	23.135	
4,400.00	4,398.15	4,315.88	4,228.24	15.18	16.06	175.49	-745.99	65.16	699.05	669.19	29.86	23.408	
4,500.00	4,498.15	4,412.85	4,322.26	15.54	16.45	175.71	-769.68	64.37	723.36	692.80	30.56	23.669	
4,600.00	4,598.15	4,509.81	4,416.28	15.89	16.84	175.91	-793.38	63.58	747.68	716.42	31.26	23.919	
4,700.00	4,698.15	4,606.78	4,510.30	16.25	17.23	176.10	-817.07	62.79	772.01	740.05	31.96	24.157	
4,800.00	4,798.15	4,703.74	4,604.33	16.60	17.62	176.28	-840.77	62.00	796.35	763.69	32.66	24.385	
4,900.00	4,898.15	4,800.71	4,698.35	16.96	18.01	176.44	-864.46	61.21	820.69	787.33	33.36	24.604	
5,000.00	4,998.15	4,897.67	4,792.37	17.31	18.41	176.60	-888.16	60.42	845.04	810.98	34.06	24.813	
11,300.00	8,494.00	10,246.08	7,289.00	44.79	42.33	47.59	-1,495.40	3,064.64	1,786.83	1,714.90	71.94	24.839	
11,400.00	8,494.00	10,346.08	7,289.00	45.64	43.20	47.59	-1,494.67	3,164.64	1,786.84	1,713.58	73.26	24.391	
11,500.00	8,494.00	10,446.08	7,289.00	46.49	44.09	47.59	-1,493.94	3,264.64	1,786.84	1,712.24	74.60	23.952	
11,600.00	8,494.00	10,546.08	7,289.00	47.36	44.98	47.59	-1,493.22	3,364.64	1,786.85	1,710.89	75.96	23.524	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A06) Koala 9 Fed Com 122H - Permit - APD-Rev00											Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQ2)											Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance		Minimum	Separation	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)		
									Ellipses (usft)		
11,700.00	8,494.00	10,646.08	7,289.00	48.23	45.89	47.59	-1,492.49	3,464.63	1,786.85	1,709.52	77.33 23.106
11,800.00	8,494.00	10,746.08	7,289.00	49.12	46.80	47.60	-1,491.77	3,564.63	1,786.86	1,708.14	78.72 22.699
11,900.00	8,494.00	10,846.08	7,289.00	50.01	47.73	47.60	-1,491.04	3,664.63	1,786.87	1,706.74	80.12 22.301
12,000.00	8,494.00	10,946.08	7,289.00	50.92	48.66	47.60	-1,490.31	3,764.62	1,786.87	1,705.33	81.54 21.914
12,100.00	8,494.00	11,046.08	7,289.00	51.83	49.60	47.60	-1,489.59	3,864.62	1,786.88	1,703.91	82.97 21.536
12,200.00	8,494.00	11,146.08	7,289.00	52.75	50.55	47.60	-1,488.86	3,964.62	1,786.88	1,702.47	84.41 21.168
12,300.00	8,494.00	11,246.08	7,289.00	53.68	51.50	47.60	-1,488.13	4,064.62	1,786.89	1,701.02	85.87 20.810
12,400.00	8,494.00	11,346.08	7,289.00	54.62	52.46	47.60	-1,487.41	4,164.61	1,786.90	1,699.56	87.33 20.461
12,500.00	8,494.00	11,446.08	7,289.00	55.56	53.43	47.60	-1,486.68	4,264.61	1,786.90	1,698.10	88.81 20.121
12,600.00	8,494.00	11,546.08	7,289.00	56.51	54.40	47.60	-1,485.96	4,364.61	1,786.91	1,696.62	90.29 19.790
12,700.00	8,494.00	11,646.08	7,289.00	57.47	55.38	47.60	-1,485.23	4,464.61	1,786.92	1,695.13	91.79 19.468
12,800.00	8,494.00	11,746.08	7,289.00	58.43	56.37	47.60	-1,484.50	4,564.60	1,786.92	1,693.63	93.29 19.154
12,900.00	8,494.00	11,846.08	7,289.00	59.40	57.36	47.60	-1,483.78	4,664.60	1,786.93	1,692.12	94.80 18.849
13,000.00	8,494.00	11,946.08	7,289.00	60.37	58.35	47.60	-1,483.05	4,764.60	1,786.93	1,690.61	96.32 18.551
13,100.00	8,494.00	12,046.08	7,289.00	61.35	59.35	47.60	-1,482.33	4,864.60	1,786.94	1,689.09	97.85 18.262
13,200.00	8,494.00	12,146.08	7,289.00	62.33	60.36	47.60	-1,481.60	4,964.59	1,786.95	1,687.56	99.39 17.979
13,300.00	8,494.00	12,246.08	7,289.00	63.32	61.36	47.60	-1,480.87	5,064.59	1,786.95	1,686.02	100.93 17.705
13,400.00	8,494.00	12,346.08	7,289.00	64.31	62.38	47.60	-1,480.15	5,164.59	1,786.96	1,684.48	102.48 17.437
13,500.00	8,494.00	12,446.08	7,289.00	65.31	63.39	47.60	-1,479.42	5,264.59	1,786.96	1,682.93	104.04 17.176
13,600.00	8,494.00	12,546.08	7,289.00	66.31	64.41	47.60	-1,478.70	5,364.58	1,786.97	1,681.37	105.60 16.922
13,700.00	8,494.00	12,646.08	7,289.00	67.31	65.43	47.60	-1,477.97	5,464.58	1,786.98	1,679.81	107.17 16.675
13,800.00	8,494.00	12,746.08	7,289.00	68.32	66.46	47.60	-1,477.24	5,564.58	1,786.98	1,678.24	108.74 16.433
13,900.00	8,494.00	12,846.08	7,289.00	69.33	67.49	47.60	-1,476.52	5,664.57	1,786.99	1,676.67	110.32 16.198
14,000.00	8,494.00	12,946.08	7,289.00	70.34	68.52	47.60	-1,475.79	5,764.57	1,786.99	1,675.09	111.91 15.969
14,100.00	8,494.00	13,046.08	7,289.00	71.36	69.55	47.60	-1,475.07	5,864.57	1,787.00	1,673.50	113.50 15.745
14,200.00	8,494.00	13,146.08	7,289.00	72.38	70.59	47.60	-1,474.34	5,964.57	1,787.01	1,671.91	115.09 15.527
14,300.00	8,494.00	13,246.08	7,289.00	73.41	71.63	47.60	-1,473.61	6,064.56	1,787.01	1,670.32	116.69 15.314
14,400.00	8,494.00	13,346.08	7,289.00	74.43	72.67	47.60	-1,472.89	6,164.56	1,787.02	1,668.72	118.29 15.107
14,500.00	8,494.00	13,446.08	7,289.00	75.46	73.72	47.60	-1,472.16	6,264.56	1,787.02	1,667.12	119.90 14.904
14,600.00	8,494.00	13,546.08	7,289.00	76.49	74.76	47.60	-1,471.43	6,364.56	1,787.03	1,665.52	121.51 14.707
14,700.00	8,494.00	13,646.08	7,289.00	77.53	75.81	47.60	-1,470.71	6,464.55	1,787.04	1,663.91	123.13 14.514
14,800.00	8,494.00	13,746.08	7,289.00	78.56	76.86	47.60	-1,469.98	6,564.55	1,787.04	1,662.29	124.75 14.325
14,900.00	8,494.00	13,846.08	7,289.00	79.60	77.92	47.60	-1,469.26	6,664.55	1,787.05	1,660.68	126.37 14.141
15,000.00	8,494.00	13,946.08	7,289.00	80.64	78.97	47.60	-1,468.53	6,764.55	1,787.05	1,659.06	128.00 13.962
15,100.00	8,494.00	14,046.08	7,289.00	81.69	80.03	47.60	-1,467.80	6,864.54	1,787.06	1,657.43	129.63 13.786
15,200.00	8,494.00	14,146.08	7,289.00	82.73	81.09	47.60	-1,467.08	6,964.54	1,787.07	1,655.81	131.26 13.615
15,300.00	8,494.00	14,246.08	7,289.00	83.78	82.15	47.60	-1,466.35	7,064.54	1,787.07	1,654.18	132.90 13.447
15,400.00	8,494.00	14,346.08	7,289.00	84.83	83.21	47.60	-1,465.63	7,164.54	1,787.08	1,652.54	134.54 13.283
15,500.00	8,494.00	14,446.08	7,289.00	85.88	84.27	47.60	-1,464.90	7,264.53	1,787.08	1,650.91	136.18 13.123
15,600.00	8,494.00	14,546.08	7,289.00	86.94	85.34	47.60	-1,464.17	7,364.53	1,787.09	1,649.27	137.82 12.967
15,700.00	8,494.00	14,646.08	7,289.00	87.99	86.41	47.60	-1,463.45	7,464.53	1,787.10	1,647.63	139.47 12.814
15,800.00	8,494.00	14,746.08	7,289.00	89.05	87.47	47.60	-1,462.72	7,564.52	1,787.10	1,645.98	141.12 12.664
15,900.00	8,494.00	14,846.08	7,289.00	90.10	88.54	47.60	-1,462.00	7,664.52	1,787.11	1,644.34	142.77 12.517
16,000.00	8,494.00	14,946.08	7,289.00	91.16	89.61	47.60	-1,461.27	7,764.52	1,787.11	1,642.69	144.43 12.374
16,100.00	8,494.00	15,046.08	7,289.00	92.22	90.69	47.60	-1,460.54	7,864.52	1,787.12	1,641.04	146.08 12.233
16,200.00	8,494.00	15,146.08	7,289.00	93.29	91.76	47.60	-1,459.82	7,964.51	1,787.13	1,639.38	147.74 12.096
16,300.00	8,494.00	15,246.08	7,289.00	94.35	92.83	47.60	-1,459.09	8,064.51	1,787.13	1,637.73	149.41 11.962
16,400.00	8,494.00	15,346.08	7,289.00	95.42	93.91	47.60	-1,458.37	8,164.51	1,787.14	1,636.07	151.07 11.830
16,500.00	8,494.00	15,446.08	7,289.00	96.48	94.98	47.60	-1,457.64	8,264.51	1,787.14	1,634.41	152.73 11.701
16,600.00	8,494.00	15,546.08	7,289.00	97.55	96.06	47.60	-1,456.91	8,364.50	1,787.15	1,632.75	154.40 11.575
16,700.00	8,494.00	15,646.08	7,289.00	98.62	97.14	47.60	-1,456.19	8,464.50	1,787.16	1,631.08	156.07 11.451
16,800.00	8,494.00	15,746.08	7,289.00	99.69	98.22	47.60	-1,455.46	8,564.50	1,787.16	1,629.42	157.74 11.330

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A06) Koala 9 Fed Com 122H - Permit - APD-Rev00												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
16,900.00	8,494.00	15,846.08	7,289.00	100.76	99.30	47.60	-1,454.73	8,664.50	1,787.17	1,627.75	159.42	11.211	
17,000.00	8,494.00	15,946.08	7,289.00	101.83	100.38	47.60	-1,454.01	8,764.49	1,787.17	1,626.08	161.09	11.094	
17,100.00	8,494.00	16,046.08	7,289.00	102.91	101.46	47.60	-1,453.28	8,864.49	1,787.18	1,624.41	162.77	10.980	
17,200.00	8,494.00	16,146.08	7,289.00	103.98	102.55	47.60	-1,452.56	8,964.49	1,787.19	1,622.74	164.45	10.868	
17,300.00	8,494.00	16,246.08	7,289.00	105.06	103.63	47.60	-1,451.83	9,064.49	1,787.19	1,621.06	166.13	10.758	
17,400.00	8,494.00	16,346.08	7,289.00	106.13	104.71	47.60	-1,451.10	9,164.48	1,787.20	1,619.39	167.81	10.650	
17,500.00	8,494.00	16,446.08	7,289.00	107.21	105.80	47.61	-1,450.38	9,264.48	1,787.20	1,617.71	169.49	10.545	
17,600.00	8,494.00	16,546.08	7,289.00	108.29	106.89	47.61	-1,449.65	9,364.48	1,787.21	1,616.03	171.18	10.441	
17,700.00	8,494.00	16,646.08	7,289.00	109.37	107.97	47.61	-1,448.93	9,464.47	1,787.22	1,614.35	172.86	10.339	
17,800.00	8,494.00	16,746.08	7,289.00	110.45	109.06	47.61	-1,448.20	9,564.47	1,787.22	1,612.67	174.55	10.239	
17,900.00	8,494.00	16,846.08	7,289.00	111.53	110.15	47.61	-1,447.47	9,664.47	1,787.23	1,610.99	176.24	10.141	
18,000.00	8,494.00	16,946.08	7,289.00	112.61	111.24	47.61	-1,446.75	9,764.47	1,787.23	1,609.31	177.93	10.045	
18,100.00	8,494.00	17,046.08	7,289.00	113.69	112.33	47.61	-1,446.02	9,864.46	1,787.24	1,607.62	179.62	9.950	
18,200.00	8,494.00	17,146.08	7,289.00	114.77	113.42	47.61	-1,445.30	9,964.46	1,787.25	1,605.94	181.31	9.857	
18,300.00	8,494.00	17,246.08	7,289.00	115.86	114.51	47.61	-1,444.57	10,064.46	1,787.25	1,604.25	183.00	9.766	
18,400.00	8,494.00	17,346.08	7,289.00	116.94	115.60	47.61	-1,443.84	10,164.46	1,787.26	1,602.56	184.70	9.677	
18,500.00	8,494.00	17,446.08	7,289.00	118.03	116.69	47.61	-1,443.12	10,264.45	1,787.26	1,600.87	186.39	9.589	
18,600.00	8,494.00	17,546.08	7,289.00	119.11	117.78	47.61	-1,442.39	10,364.45	1,787.27	1,599.18	188.09	9.502	
18,700.00	8,494.00	17,646.08	7,289.00	120.20	118.88	47.61	-1,441.67	10,464.45	1,787.28	1,597.49	189.79	9.417	
18,800.00	8,494.00	17,746.08	7,289.00	121.29	119.97	47.61	-1,440.94	10,564.45	1,787.28	1,595.80	191.49	9.334	
18,900.00	8,494.00	17,846.08	7,289.00	122.38	121.07	47.61	-1,440.21	10,664.44	1,787.29	1,594.10	193.19	9.252	
19,000.00	8,494.00	17,946.08	7,289.00	123.46	122.16	47.61	-1,439.49	10,764.44	1,787.29	1,592.41	194.89	9.171	
19,100.00	8,494.00	18,046.08	7,289.00	124.55	123.26	47.61	-1,438.76	10,864.44	1,787.30	1,590.71	196.59	9.092	
19,200.00	8,494.00	18,146.08	7,289.00	125.64	124.35	47.61	-1,438.03	10,964.44	1,787.31	1,589.01	198.29	9.014	
19,300.00	8,494.00	18,246.08	7,289.00	126.73	125.45	47.61	-1,437.31	11,064.43	1,787.31	1,587.32	199.99	8.937	
19,300.02	8,494.00	18,246.10	7,289.00	126.73	125.45	47.61	-1,437.31	11,064.45	1,787.31	1,587.32	200.00	8.937	
19,355.95	8,494.00	18,274.81	7,289.00	127.34	125.76	47.61	-1,437.10	11,093.16	1,787.52	1,586.69	200.83	8.901 SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A07) Koala 9 Fed Com 111H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
800.00	800.00	800.00	800.00	2.63	2.63	90.96	-2.00	119.98	120.00	114.73	5.27	22.772	
900.00	900.00	900.00	900.00	2.99	2.99	90.96	-2.00	119.98	120.00	114.01	5.99	20.045	
1,000.00	1,000.00	1,000.00	1,000.00	3.35	3.35	90.96	-2.00	119.98	120.00	113.29	6.70	17.901	
1,100.00	1,100.00	1,100.00	1,100.00	3.71	3.71	90.96	-2.00	119.98	120.00	112.58	7.42	16.171	
1,200.00	1,200.00	1,200.00	1,200.00	4.07	4.07	90.96	-2.00	119.98	120.00	111.86	8.14	14.746	
1,300.00	1,300.00	1,300.76	1,300.75	4.43	4.41	91.57	-3.28	119.63	119.68	110.84	8.84	13.540	
1,400.00	1,400.00	1,401.38	1,401.29	4.79	4.74	93.44	-7.12	118.58	118.80	109.27	9.53	12.472	
1,500.00	1,500.00	1,501.24	1,501.01	5.14	5.07	95.93	-12.17	117.19	117.83	107.61	10.21	11.536	
1,600.00	1,600.00	1,601.10	1,600.74	5.50	5.41	98.46	-17.22	115.81	117.08	106.17	10.91	10.734	
1,700.00	1,700.00	1,700.97	1,700.46	5.86	5.74	101.01	-22.27	114.42	116.57	104.96	11.60	10.046	
1,800.00	1,800.00	1,800.83	1,800.19	6.22	6.08	103.59	-27.32	113.04	116.29	103.99	12.30	9.453	
1,868.03	1,868.03	1,868.77	1,868.03	6.46	6.32	105.34	-30.75	112.09	116.23	103.45	12.78	9.096	
1,900.00	1,900.00	1,900.69	1,899.91	6.58	6.43	106.17	-32.37	111.65	116.25	103.24	13.00	8.940	
2,000.00	2,000.00	2,000.55	1,999.64	6.94	6.77	108.74	-37.41	110.26	116.44	102.73	13.71	8.495	
2,100.00	2,100.00	2,100.42	2,099.36	7.29	7.12	111.31	-42.46	108.88	116.87	102.46	14.41	8.109	
2,200.00	2,200.00	2,200.28	2,199.09	7.65	7.46	113.85	-47.51	107.49	117.53	102.41	15.12	7.774	
2,300.00	2,300.00	2,300.14	2,298.81	8.01	7.81	116.35	-52.56	106.11	118.42	102.60	15.82	7.483	
2,400.00	2,400.00	2,400.00	2,398.54	8.37	8.16	118.82	-57.61	104.72	119.53	103.00	16.53	7.230	
2,500.00	2,500.00	2,499.87	2,498.26	8.73	8.51	121.23	-62.66	103.34	120.87	103.62	17.24	7.010	
2,600.00	2,599.99	2,599.78	2,598.04	9.07	8.87	-47.25	-67.71	101.95	121.51	103.58	17.93	6.776	
2,700.00	2,699.91	2,699.75	2,697.87	9.39	9.22	-46.26	-72.77	100.57	120.47	101.86	18.61	6.474	
2,710.01	2,709.91	2,709.76	2,707.87	9.43	9.25	-46.21	-73.27	100.43	120.27	101.59	18.68	6.439	
2,800.00	2,799.76	2,799.72	2,797.71	9.72	9.57	-45.78	-77.82	99.18	118.38	99.09	19.29	6.137	
2,900.00	2,899.61	2,899.70	2,897.54	10.05	9.93	-45.28	-82.88	97.79	116.28	96.31	19.97	5.823	
3,000.00	2,999.46	2,999.67	2,997.38	10.38	10.28	-44.76	-87.93	96.41	114.19	93.54	20.65	5.529	
3,100.00	3,099.30	3,099.64	3,097.21	10.71	10.64	-44.23	-92.99	95.02	112.11	90.77	21.34	5.254	
3,200.00	3,199.15	3,199.61	3,197.05	11.04	10.99	-43.67	-98.04	93.63	110.05	88.02	22.03	4.995	
3,300.00	3,299.00	3,299.59	3,296.88	11.38	11.35	-43.09	-103.10	92.25	107.99	85.27	22.72	4.753	
3,400.00	3,398.85	3,399.56	3,396.72	11.72	11.71	-42.49	-108.15	90.86	105.94	82.53	23.41	4.525	
3,500.00	3,498.70	3,499.53	3,496.55	12.05	12.06	-41.87	-113.21	89.47	103.91	79.80	24.11	4.310	
3,600.00	3,598.55	3,599.50	3,596.39	12.39	12.42	-41.22	-118.26	88.08	101.89	77.08	24.80	4.108	
3,700.00	3,698.40	3,699.48	3,696.22	12.74	12.78	-40.55	-123.32	86.70	99.88	74.38	25.50	3.917	
3,791.83	3,790.09	3,791.28	3,787.90	13.05	13.11	-39.90	-127.96	85.42	98.05	71.91	26.14	3.751	
3,800.00	3,798.25	3,799.45	3,796.06	13.08	13.13	-39.84	-128.37	85.31	97.89	71.70	26.20	3.737	
3,887.93	3,886.10	3,887.36	3,883.84	13.38	13.45	-38.75	-132.82	84.09	97.09	70.27	26.81	3.621 CC	
3,900.00	3,898.17	3,899.42	3,895.89	13.42	13.49	-38.54	-133.43	83.92	97.10	70.21	26.90	3.610 ES	
4,001.85	4,000.00	4,001.18	3,997.51	13.78	13.86	134.14	-138.57	82.51	98.51	70.89	27.61	3.567	
4,100.00	4,098.15	4,099.20	4,095.39	14.12	14.21	136.69	-143.53	81.15	101.09	72.78	28.31	3.571	
4,200.00	4,198.15	4,199.06	4,195.12	14.48	14.57	139.16	-148.58	79.77	103.91	74.90	29.02	3.581	
4,300.00	4,298.15	4,298.92	4,294.84	14.83	14.92	141.49	-153.63	78.38	106.92	77.20	29.73	3.597	
4,400.00	4,398.15	4,398.78	4,394.57	15.18	15.28	143.69	-158.68	77.00	110.10	79.67	30.43	3.618	
4,500.00	4,498.15	4,498.65	4,494.29	15.54	15.64	145.77	-163.73	75.61	113.43	82.29	31.14	3.642	
4,600.00	4,498.15	4,498.51	4,494.02	15.89	16.00	147.72	-168.78	74.23	116.90	85.05	31.85	3.670	
4,700.00	4,498.15	4,498.37	4,493.74	16.25	16.36	149.56	-173.83	72.84	120.50	87.94	32.56	3.701	
4,800.00	4,498.15	4,498.23	4,493.47	16.60	16.72	151.30	-178.88	71.46	124.22	90.95	33.27	3.734	
4,900.00	4,498.15	4,900.45	4,895.60	16.96	17.08	152.60	-182.88	70.36	127.18	93.18	33.99	3.741	
5,000.00	4,998.15	5,002.97	4,998.11	17.31	17.44	153.03	-184.26	69.98	128.20	93.50	34.70	3.695	
5,100.00	5,098.15	5,103.02	5,098.15	17.67	17.77	153.03	-184.26	69.98	128.20	92.81	35.39	3.623	
5,200.00	5,198.15	5,203.02	5,198.15	18.02	18.11	153.03	-184.26	69.98	128.20	92.12	36.08	3.553	
5,300.00	5,298.15	5,303.02	5,298.15	18.38	18.45	153.03	-184.26	69.98	128.20	91.42	36.78	3.486	
5,400.00	5,398.15	5,403.02	5,398.15	18.73	18.79	153.03	-184.26	69.98	128.20	90.73	37.47	3.421	
5,500.00	5,498.15	5,503.02	5,498.15	19.09	19.12	153.03	-184.26	69.98	128.20	90.03	38.17	3.359	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A07) Koala 9 Fed Com 111H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,600.00	5,598.15	5,603.02	5,598.15	19.45	19.46	153.03	-184.26	69.98	128.20	89.34	38.86	3.299	
5,603.72	5,601.88	5,606.74	5,601.88	19.46	19.48	153.03	-184.26	69.98	128.20	89.31	38.89	3.297	
5,700.00	5,698.15	5,697.47	5,692.54	19.80	19.78	152.12	-184.30	72.30	129.42	89.89	39.54	3.273 SF	
5,800.00	5,798.15	5,785.32	5,779.09	20.16	20.08	146.77	-184.53	86.86	138.23	89.27	39.96	3.459	
5,900.00	5,898.15	5,867.00	5,856.69	20.51	20.34	138.90	-184.92	112.11	158.05	118.26	39.79	3.972	
6,000.00	5,998.15	5,940.25	5,922.61	20.87	20.56	131.15	-185.42	143.93	190.99	152.14	38.85	4.916	
6,100.00	6,098.15	6,000.00	5,973.02	21.23	20.72	125.24	-185.92	175.95	236.70	199.62	37.08	6.384	
6,200.00	6,198.15	6,059.47	6,019.62	21.58	20.86	120.10	-186.50	212.85	293.01	257.30	35.71	8.206	
6,300.00	6,298.15	6,100.00	6,049.07	21.94	20.97	117.07	-186.94	240.68	357.89	324.21	33.68	10.625	
6,400.00	6,398.15	6,150.00	6,082.57	22.30	21.12	113.84	-187.52	277.77	429.09	396.32	32.78	13.092	
6,500.00	6,498.15	6,181.49	6,101.96	22.65	21.21	112.08	-187.91	302.57	505.37	474.04	31.33	16.131	
6,600.00	6,598.15	6,200.00	6,112.72	23.01	21.26	111.13	-188.15	317.63	585.76	556.00	29.76	19.680	
6,700.00	6,698.15	6,250.00	6,139.27	23.37	21.40	108.84	-188.82	359.98	669.08	639.27	29.81	22.447	
18,100.00	8,494.00	15,758.17	6,214.00	113.69	110.98	0.00	-126.16	9,854.88	2,280.00	2,188.55	91.45	24.932	
18,200.00	8,494.00	15,858.17	6,214.00	114.77	112.08	0.00	-125.43	9,954.88	2,280.00	2,187.67	92.32	24.695	
18,300.00	8,494.00	15,958.17	6,214.00	115.86	113.19	0.00	-124.69	10,054.88	2,280.00	2,186.80	93.20	24.463	
18,400.00	8,494.00	16,058.17	6,214.00	116.94	114.29	0.00	-123.95	10,154.87	2,280.00	2,185.92	94.08	24.234	
18,500.00	8,494.00	16,158.17	6,214.00	118.03	115.39	0.00	-123.22	10,254.87	2,280.00	2,185.04	94.96	24.010	
18,600.00	8,494.00	16,258.17	6,214.00	119.11	116.49	0.00	-122.48	10,354.87	2,280.00	2,184.16	95.84	23.790	
18,700.00	8,494.00	16,358.17	6,214.00	120.20	117.60	0.00	-121.74	10,454.86	2,280.00	2,183.28	96.72	23.573	
18,800.00	8,494.00	16,458.17	6,214.00	121.29	118.70	0.00	-121.01	10,554.86	2,280.00	2,182.40	97.60	23.361	
18,900.00	8,494.00	16,558.17	6,214.00	122.38	119.80	0.00	-120.27	10,654.86	2,280.00	2,181.52	98.48	23.152	
19,000.00	8,494.00	16,658.17	6,214.00	123.46	120.91	0.00	-119.53	10,754.86	2,280.00	2,180.64	99.36	22.946	
19,100.00	8,494.00	16,758.17	6,214.00	124.55	122.01	0.00	-118.80	10,854.85	2,280.00	2,179.76	100.24	22.745	
19,200.00	8,494.00	16,858.17	6,214.00	125.64	123.11	0.00	-118.06	10,954.85	2,280.00	2,178.87	101.13	22.546	
19,300.00	8,494.00	16,958.17	6,214.00	126.73	124.22	0.00	-117.32	11,054.85	2,280.00	2,177.99	102.01	22.351	
19,355.95	8,494.00	17,014.12	6,214.00	127.34	124.84	0.00	-116.91	11,110.80	2,280.00	2,177.50	102.50	22.243	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A08) Koala 9 Fed Com 112H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
1,000.00	1,000.00	999.86	999.77	3.35	3.31	92.95	-7.73	149.86	150.06	143.41	6.65	22.550	CC
1,100.00	1,100.00	1,099.45	1,099.15	3.71	3.64	95.43	-14.23	149.72	150.39	143.05	7.35	20.474	ES
1,200.00	1,200.00	1,198.64	1,197.91	4.07	3.98	98.85	-23.28	149.51	151.33	143.29	8.04	18.822	
1,300.00	1,300.00	1,297.29	1,295.88	4.43	4.31	103.13	-34.82	149.25	153.32	144.58	8.74	17.549	
1,400.00	1,400.00	1,395.27	1,392.86	4.79	4.65	108.13	-48.78	148.94	156.89	147.46	9.43	16.634	
1,500.00	1,500.00	1,492.47	1,488.69	5.14	5.00	113.66	-65.08	148.57	162.60	152.47	10.12	16.063	
1,600.00	1,600.00	1,588.78	1,583.18	5.50	5.34	119.44	-83.63	148.16	170.96	160.16	10.80	15.823	SF
1,700.00	1,700.00	1,684.07	1,676.20	5.86	5.69	125.24	-104.33	147.69	182.38	170.91	11.47	15.897	
1,800.00	1,800.00	1,778.26	1,767.60	6.22	6.04	130.80	-127.06	147.18	197.12	184.99	12.12	16.260	
1,900.00	1,900.00	1,871.25	1,857.26	6.58	6.39	135.97	-151.70	146.63	215.26	202.51	12.75	16.878	
2,000.00	2,000.00	1,963.01	1,945.12	6.94	6.74	140.66	-178.15	146.03	236.80	223.43	13.36	17.718	
2,100.00	2,100.00	2,058.42	2,036.15	7.29	7.11	144.88	-206.71	145.39	260.66	246.64	14.02	18.588	
2,200.00	2,200.00	2,153.83	2,127.18	7.65	7.48	148.40	-235.28	144.75	285.68	270.99	14.69	19.453	
2,300.00	2,300.00	2,249.24	2,218.21	8.01	7.86	151.36	-263.85	144.11	311.57	296.21	15.35	20.294	
2,400.00	2,400.00	2,344.65	2,309.24	8.37	8.24	153.87	-292.42	143.47	338.12	322.10	16.02	21.103	
2,500.00	2,500.00	2,440.06	2,400.27	8.73	8.63	156.01	-320.99	142.83	365.21	348.51	16.70	21.874	
2,600.00	2,599.99	2,535.84	2,491.66	9.07	9.02	-12.48	-349.67	142.18	391.48	374.12	17.35	22.558	
2,700.00	2,699.91	2,632.33	2,583.72	9.39	9.41	-10.89	-378.56	141.53	415.58	397.58	18.00	23.083	
2,710.01	2,709.91	2,642.03	2,592.97	9.43	9.45	-10.75	-381.46	141.47	417.88	399.81	18.07	23.128	
2,800.00	2,799.76	2,729.21	2,676.15	9.72	9.81	-9.57	-407.57	140.88	438.45	419.78	18.66	23.496	
2,900.00	2,899.61	2,826.09	2,768.58	10.05	10.21	-8.38	-436.57	140.23	461.49	442.17	19.32	23.882	
3,000.00	2,999.46	2,922.97	2,861.02	10.38	10.61	-7.31	-465.58	139.58	484.71	464.72	19.99	24.248	
3,100.00	3,099.30	3,019.85	2,953.45	10.71	11.01	-6.33	-494.59	138.93	508.08	487.42	20.66	24.594	
3,200.00	3,199.15	3,116.73	3,045.88	11.04	11.41	-5.44	-523.60	138.27	531.57	510.24	21.33	24.921	
15,500.00	8,494.00	13,335.12	6,214.00	85.88	82.44	30.07	-1,465.27	7,264.66	2,634.58	2,528.59	105.99	24.857	
15,600.00	8,494.00	13,435.12	6,214.00	86.94	83.52	30.07	-1,464.53	7,364.66	2,634.58	2,527.31	107.27	24.561	
15,700.00	8,494.00	13,535.12	6,214.00	87.99	84.60	30.07	-1,463.80	7,464.66	2,634.58	2,526.04	108.54	24.272	
15,800.00	8,494.00	13,635.12	6,214.00	89.05	85.68	30.07	-1,463.06	7,564.65	2,634.58	2,524.76	109.82	23.990	
15,900.00	8,494.00	13,735.12	6,214.00	90.10	86.76	30.07	-1,462.32	7,664.65	2,634.58	2,523.48	111.10	23.713	
16,000.00	8,494.00	13,835.12	6,214.00	91.16	87.84	30.07	-1,461.59	7,764.65	2,634.58	2,522.19	112.38	23.443	
16,100.00	8,494.00	13,935.12	6,214.00	92.22	88.93	30.07	-1,460.85	7,864.65	2,634.58	2,520.91	113.67	23.178	
16,200.00	8,494.00	14,035.12	6,214.00	93.29	90.01	30.07	-1,460.12	7,964.64	2,634.58	2,519.62	114.95	22.919	
16,300.00	8,494.00	14,135.12	6,214.00	94.35	91.10	30.07	-1,459.38	8,064.64	2,634.57	2,518.33	116.24	22.665	
16,400.00	8,494.00	14,235.12	6,214.00	95.42	92.18	30.07	-1,458.65	8,164.64	2,634.57	2,517.04	117.53	22.416	
16,500.00	8,494.00	14,335.12	6,214.00	96.48	93.27	30.07	-1,457.91	8,264.64	2,634.57	2,515.75	118.82	22.173	
16,600.00	8,494.00	14,435.12	6,214.00	97.55	94.36	30.07	-1,457.17	8,364.63	2,634.57	2,514.46	120.11	21.934	
16,700.00	8,494.00	14,535.12	6,214.00	98.62	95.45	30.07	-1,456.44	8,464.63	2,634.57	2,513.17	121.41	21.700	
16,800.00	8,494.00	14,635.12	6,214.00	99.69	96.53	30.07	-1,455.70	8,564.63	2,634.57	2,511.87	122.70	21.471	
16,900.00	8,494.00	14,735.12	6,214.00	100.76	97.62	30.07	-1,454.97	8,664.62	2,634.57	2,510.57	124.00	21.247	
17,000.00	8,494.00	14,835.12	6,214.00	101.83	98.71	30.07	-1,454.23	8,764.62	2,634.57	2,509.27	125.29	21.027	
17,100.00	8,494.00	14,935.12	6,214.00	102.91	99.81	30.07	-1,453.50	8,864.62	2,634.57	2,507.98	126.59	20.811	
17,200.00	8,494.00	15,035.12	6,214.00	103.98	100.90	30.07	-1,452.76	8,964.62	2,634.57	2,506.67	127.89	20.600	
17,300.00	8,494.00	15,135.12	6,214.00	105.06	101.99	30.07	-1,452.02	9,064.61	2,634.57	2,505.37	129.19	20.392	
17,400.00	8,494.00	15,235.12	6,214.00	106.13	103.08	30.07	-1,451.29	9,164.61	2,634.57	2,504.07	130.50	20.189	
17,500.00	8,494.00	15,335.12	6,214.00	107.21	104.18	30.07	-1,450.55	9,264.61	2,634.57	2,502.77	131.80	19.989	
17,600.00	8,494.00	15,435.12	6,214.00	108.29	105.27	30.07	-1,449.82	9,364.61	2,634.56	2,501.46	133.10	19.793	
17,700.00	8,494.00	15,535.12	6,214.00	109.37	106.37	30.07	-1,449.08	9,464.60	2,634.56	2,500.15	134.41	19.601	
17,800.00	8,494.00	15,635.12	6,214.00	110.45	107.46	30.07	-1,448.35	9,564.60	2,634.56	2,498.85	135.72	19.412	
17,900.00	8,494.00	15,735.12	6,214.00	111.53	108.56	30.07	-1,447.61	9,664.60	2,634.56	2,497.54	137.02	19.227	
18,000.00	8,494.00	15,835.12	6,214.00	112.61	109.66	30.07	-1,446.87	9,764.59	2,634.56	2,496.23	138.33	19.045	
18,100.00	8,494.00	15,935.12	6,214.00	113.69	110.75	30.07	-1,446.14	9,864.59	2,634.56	2,494.92	139.64	18.867	
18,200.00	8,494.00	16,035.12	6,214.00	114.77	111.85	30.07	-1,445.40	9,964.59	2,634.56	2,493.61	140.95	18.691	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (A08) Koala 9 Fed Com 112H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Rule Assigned:		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
18,300.00	8,494.00	16,135.12	6,214.00	115.86	112.95	30.07	-1,444.67	10,064.59	2,634.56	2,492.30	142.26	18.519	
18,400.00	8,494.00	16,235.12	6,214.00	116.94	114.05	30.07	-1,443.93	10,164.58	2,634.56	2,490.98	143.58	18.350	
18,500.00	8,494.00	16,335.12	6,214.00	118.03	115.15	30.07	-1,443.20	10,264.58	2,634.56	2,489.67	144.89	18.183	
18,600.00	8,494.00	16,435.12	6,214.00	119.11	116.25	30.07	-1,442.46	10,364.58	2,634.56	2,488.36	146.20	18.020	
18,700.00	8,494.00	16,535.12	6,214.00	120.20	117.35	30.07	-1,441.72	10,464.58	2,634.56	2,487.04	147.52	17.859	
18,800.00	8,494.00	16,635.12	6,214.00	121.29	118.45	30.07	-1,440.99	10,564.57	2,634.56	2,485.72	148.83	17.702	
18,900.00	8,494.00	16,735.12	6,214.00	122.38	119.55	30.07	-1,440.25	10,664.57	2,634.56	2,484.41	150.15	17.546	
19,000.00	8,494.00	16,835.12	6,214.00	123.46	120.65	30.07	-1,439.52	10,764.57	2,634.55	2,483.09	151.46	17.394	
19,100.00	8,494.00	16,935.12	6,214.00	124.55	121.75	30.07	-1,438.78	10,864.57	2,634.55	2,481.77	152.78	17.244	
19,200.00	8,494.00	17,035.12	6,214.00	125.64	122.85	30.07	-1,438.05	10,964.56	2,634.55	2,480.45	154.10	17.096	
19,300.00	8,494.00	17,135.12	6,214.00	126.73	123.96	30.07	-1,437.31	11,064.56	2,634.55	2,479.13	155.42	16.951	
19,327.93	8,494.00	17,163.05	6,214.00	127.04	124.26	30.07	-1,437.10	11,092.49	2,634.55	2,478.76	155.79	16.911	
19,355.95	8,494.00	17,163.72	6,214.00	127.34	124.27	30.07	-1,437.10	11,093.16	2,634.69	2,478.63	156.06	16.882	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B01) Koala 9 Fed Com 203H - Permit - APD-Rev00												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)												Offset Well Error:	0.00 usft
Rule Assigned:												Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
10,800.00	8,494.00	11,194.56	8,853.00	40.78	41.99	100.60	-2,172.62	2,568.28	2,027.54	1,945.40	82.14	24.683	CC
10,900.00	8,494.00	11,294.56	8,853.00	41.55	42.73	100.60	-2,171.95	2,668.27	2,027.61	1,943.97	83.63	24.244	
11,000.00	8,494.00	11,394.56	8,853.00	42.34	43.48	100.60	-2,171.29	2,768.27	2,027.68	1,942.52	85.16	23.811	
11,100.00	8,494.00	11,494.56	8,853.00	43.14	44.25	100.60	-2,170.63	2,868.27	2,027.75	1,941.04	86.71	23.385	
11,200.00	8,494.00	11,594.56	8,853.00	43.96	45.03	100.60	-2,169.97	2,968.27	2,027.82	1,939.53	88.29	22.967	
11,300.00	8,494.00	11,694.56	8,853.00	44.79	45.83	100.60	-2,169.31	3,068.26	2,027.89	1,937.99	89.90	22.557	
11,400.00	8,494.00	11,794.56	8,853.00	45.64	46.64	100.60	-2,168.64	3,168.26	2,027.96	1,936.43	91.54	22.155	
11,500.00	8,494.00	11,894.56	8,853.00	46.49	47.47	100.60	-2,167.98	3,268.26	2,028.03	1,934.84	93.19	21.762	
11,600.00	8,494.00	11,994.56	8,853.00	47.36	48.30	100.60	-2,167.32	3,368.26	2,028.10	1,933.23	94.87	21.377	
11,700.00	8,494.00	12,094.56	8,853.00	48.23	49.15	100.60	-2,166.66	3,468.26	2,028.17	1,931.60	96.58	21.001	
11,800.00	8,494.00	12,194.56	8,853.00	49.12	50.01	100.60	-2,165.99	3,568.25	2,028.25	1,929.95	98.30	20.634	
11,900.00	8,494.00	12,294.56	8,853.00	50.01	50.87	100.60	-2,165.33	3,668.25	2,028.32	1,928.28	100.04	20.275	
12,000.00	8,494.00	12,394.56	8,853.00	50.92	51.75	100.60	-2,164.67	3,768.25	2,028.39	1,926.59	101.80	19.925	
12,100.00	8,494.00	12,494.56	8,853.00	51.83	52.64	100.60	-2,164.01	3,868.25	2,028.46	1,924.88	103.58	19.584	
12,200.00	8,494.00	12,594.56	8,853.00	52.75	53.53	100.60	-2,163.35	3,968.24	2,028.53	1,923.15	105.37	19.251	
12,300.00	8,494.00	12,694.56	8,853.00	53.68	54.44	100.60	-2,162.68	4,068.24	2,028.60	1,921.42	107.18	18.926	
12,400.00	8,494.00	12,794.56	8,853.00	54.62	55.35	100.59	-2,162.02	4,168.24	2,028.67	1,919.66	109.01	18.610	
12,500.00	8,494.00	12,894.56	8,853.00	55.56	56.27	100.59	-2,161.36	4,268.24	2,028.74	1,917.89	110.85	18.302	
12,600.00	8,494.00	12,994.56	8,853.00	56.51	57.20	100.59	-2,160.70	4,368.24	2,028.81	1,916.11	112.70	18.002	
12,700.00	8,494.00	13,094.56	8,853.00	57.47	58.13	100.59	-2,160.03	4,468.23	2,028.88	1,914.31	114.57	17.709	
12,800.00	8,494.00	13,194.56	8,853.00	58.43	59.07	100.59	-2,159.37	4,568.23	2,028.95	1,912.51	116.45	17.424	
12,900.00	8,494.00	13,294.56	8,853.00	59.40	60.02	100.59	-2,158.71	4,668.23	2,029.02	1,910.69	118.34	17.146	
13,000.00	8,494.00	13,394.56	8,853.00	60.37	60.97	100.59	-2,158.05	4,768.23	2,029.09	1,908.86	120.24	16.876	
13,100.00	8,494.00	13,494.56	8,853.00	61.35	61.93	100.59	-2,157.39	4,868.22	2,029.17	1,907.02	122.15	16.612	
13,200.00	8,494.00	13,594.56	8,853.00	62.33	62.89	100.59	-2,156.72	4,968.22	2,029.24	1,905.17	124.07	16.356	
13,300.00	8,494.00	13,694.56	8,853.00	63.32	63.86	100.59	-2,156.06	5,068.22	2,029.31	1,903.31	126.00	16.105	
13,400.00	8,494.00	13,794.56	8,853.00	64.31	64.84	100.59	-2,155.40	5,168.22	2,029.38	1,901.44	127.94	15.862	
13,500.00	8,494.00	13,894.56	8,853.00	65.31	65.81	100.59	-2,154.74	5,268.22	2,029.45	1,899.56	129.89	15.624	
13,600.00	8,494.00	13,994.56	8,853.00	66.31	66.80	100.59	-2,154.07	5,368.21	2,029.52	1,897.67	131.85	15.393	
13,700.00	8,494.00	14,094.56	8,853.00	67.31	67.78	100.59	-2,153.41	5,468.21	2,029.59	1,895.77	133.81	15.167	
13,800.00	8,494.00	14,194.56	8,853.00	68.32	68.78	100.59	-2,152.75	5,568.21	2,029.66	1,893.87	135.79	14.947	
13,900.00	8,494.00	14,294.56	8,853.00	69.33	69.77	100.59	-2,152.09	5,668.21	2,029.73	1,891.96	137.77	14.733	
14,000.00	8,494.00	14,394.56	8,853.00	70.34	70.77	100.59	-2,151.42	5,768.20	2,029.80	1,890.04	139.76	14.524	
14,100.00	8,494.00	14,494.56	8,853.00	71.36	71.77	100.59	-2,150.76	5,868.20	2,029.87	1,888.12	141.75	14.320	
14,200.00	8,494.00	14,594.56	8,853.00	72.38	72.78	100.59	-2,150.10	5,968.20	2,029.94	1,886.19	143.75	14.121	
14,300.00	8,494.00	14,694.56	8,853.00	73.41	73.79	100.59	-2,149.44	6,068.20	2,030.01	1,884.25	145.76	13.927	
14,400.00	8,494.00	14,794.56	8,853.00	74.43	74.80	100.59	-2,148.78	6,168.20	2,030.08	1,882.31	147.77	13.738	
14,500.00	8,494.00	14,894.56	8,853.00	75.46	75.82	100.59	-2,148.11	6,268.19	2,030.16	1,880.36	149.79	13.553	
14,600.00	8,494.00	14,994.56	8,853.00	76.49	76.84	100.59	-2,147.45	6,368.19	2,030.23	1,878.41	151.82	13.373	
14,700.00	8,494.00	15,094.56	8,853.00	77.53	77.86	100.59	-2,146.79	6,468.19	2,030.30	1,876.45	153.85	13.197	
14,800.00	8,494.00	15,194.56	8,853.00	78.56	78.88	100.59	-2,146.13	6,568.19	2,030.37	1,874.48	155.88	13.025	
14,900.00	8,494.00	15,294.56	8,853.00	79.60	79.91	100.59	-2,145.46	6,668.18	2,030.44	1,872.52	157.92	12.857	
15,000.00	8,494.00	15,394.56	8,853.00	80.64	80.94	100.59	-2,144.80	6,768.18	2,030.51	1,870.54	159.97	12.693	
15,100.00	8,494.00	15,494.56	8,853.00	81.69	81.97	100.58	-2,144.14	6,868.18	2,030.58	1,868.56	162.02	12.533	
15,200.00	8,494.00	15,594.56	8,853.00	82.73	83.00	100.58	-2,143.48	6,968.18	2,030.65	1,866.58	164.07	12.377	
15,300.00	8,494.00	15,694.56	8,853.00	83.78	84.04	100.58	-2,142.82	7,068.18	2,030.72	1,864.59	166.13	12.224	
15,400.00	8,494.00	15,794.56	8,853.00	84.83	85.08	100.58	-2,142.15	7,168.17	2,030.79	1,862.60	168.19	12.074	
15,500.00	8,494.00	15,894.56	8,853.00	85.88	86.12	100.58	-2,141.49	7,268.17	2,030.86	1,860.61	170.25	11.928	
15,600.00	8,494.00	15,994.56	8,853.00	86.94	87.16	100.58	-2,140.83	7,368.17	2,030.93	1,858.61	172.32	11.786	
15,700.00	8,494.00	16,094.56	8,853.00	87.99	88.21	100.58	-2,140.17	7,468.17	2,031.00	1,856.61	174.40	11.646	
15,800.00	8,494.00	16,194.56	8,853.00	89.05	89.25	100.58	-2,139.50	7,568.16	2,031.07	1,854.60	176.47	11.509	
15,900.00	8,494.00	16,294.56	8,853.00	90.10	90.30	100.58	-2,138.84	7,668.16	2,031.15	1,852.59	178.55	11.376	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B01) Koala 9 Fed Com 203H - Permit - APD-Rev00													Offset Site Error: 0.00 usft			
Survey Program: Reference		0-MWD+IFR1+SAG+FDIR (SQC2) Offset					Semi Major Axis		Offset Wellbore Centre		Rule Assigned: Distance				Offset Well Error: 0.00 usft	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning			
16,000.00	8,494.00	16,394.56	8,853.00	91.16	91.35	100.58	-2,138.18	7,768.16	2,031.22	1,850.58	180.64	11.245				
16,100.00	8,494.00	16,494.56	8,853.00	92.22	92.40	100.58	-2,137.52	7,868.16	2,031.29	1,848.57	182.72	11.117				
16,200.00	8,494.00	16,594.56	8,853.00	93.29	93.46	100.58	-2,136.86	7,968.16	2,031.36	1,846.55	184.81	10.992				
16,300.00	8,494.00	16,694.56	8,853.00	94.35	94.51	100.58	-2,136.19	8,068.15	2,031.43	1,844.53	186.90	10.869				
16,400.00	8,494.00	16,794.56	8,853.00	95.42	95.57	100.58	-2,135.53	8,168.15	2,031.50	1,842.50	189.00	10.749				
16,500.00	8,494.00	16,894.56	8,853.00	96.48	96.63	100.58	-2,134.87	8,268.15	2,031.57	1,840.47	191.10	10.631				
16,600.00	8,494.00	16,994.56	8,853.00	97.55	97.69	100.58	-2,134.21	8,368.15	2,031.64	1,838.44	193.20	10.516				
16,700.00	8,494.00	17,094.56	8,853.00	98.62	98.75	100.58	-2,133.54	8,468.14	2,031.71	1,836.41	195.30	10.403				
16,800.00	8,494.00	17,194.56	8,853.00	99.69	99.81	100.58	-2,132.88	8,568.14	2,031.78	1,834.38	197.40	10.293				
16,900.00	8,494.00	17,294.56	8,853.00	100.76	100.87	100.58	-2,132.22	8,668.14	2,031.85	1,832.34	199.51	10.184				
17,000.00	8,494.00	17,394.56	8,853.00	101.83	101.94	100.58	-2,131.56	8,768.14	2,031.92	1,830.30	201.62	10.078				
17,100.00	8,494.00	17,494.56	8,853.00	102.91	103.00	100.58	-2,130.90	8,868.14	2,031.99	1,828.26	203.73	9.974				
17,200.00	8,494.00	17,594.56	8,853.00	103.98	104.07	100.58	-2,130.23	8,968.13	2,032.06	1,826.22	205.85	9.872				
17,300.00	8,494.00	17,694.56	8,853.00	105.06	105.14	100.58	-2,129.57	9,068.13	2,032.14	1,824.17	207.96	9.772				
17,400.00	8,494.00	17,794.56	8,853.00	106.13	106.21	100.58	-2,128.91	9,168.13	2,032.21	1,822.12	210.08	9.673				
17,500.00	8,494.00	17,894.56	8,853.00	107.21	107.28	100.58	-2,128.25	9,268.13	2,032.28	1,820.07	212.20	9.577				
17,600.00	8,494.00	17,994.56	8,853.00	108.29	108.35	100.58	-2,127.58	9,368.12	2,032.35	1,818.02	214.33	9.482				
17,700.00	8,494.00	18,094.56	8,853.00	109.37	109.42	100.58	-2,126.92	9,468.12	2,032.42	1,815.97	216.45	9.390				
17,800.00	8,494.00	18,194.56	8,853.00	110.45	110.50	100.57	-2,126.26	9,568.12	2,032.49	1,813.91	218.58	9.299				
17,900.00	8,494.00	18,294.56	8,853.00	111.53	111.57	100.57	-2,125.60	9,668.12	2,032.56	1,811.85	220.71	9.209				
18,000.00	8,494.00	18,394.56	8,853.00	112.61	112.65	100.57	-2,124.93	9,768.12	2,032.63	1,809.80	222.83	9.122				
18,100.00	8,494.00	18,494.56	8,853.00	113.69	113.72	100.57	-2,124.27	9,868.11	2,032.70	1,807.73	224.97	9.036				
18,200.00	8,494.00	18,594.56	8,853.00	114.77	114.80	100.57	-2,123.61	9,968.11	2,032.77	1,805.67	227.10	8.951				
18,300.00	8,494.00	18,694.56	8,853.00	115.86	115.88	100.57	-2,122.95	10,068.11	2,032.84	1,803.61	229.23	8.868				
18,400.00	8,494.00	18,794.56	8,853.00	116.94	116.96	100.57	-2,122.29	10,168.11	2,032.91	1,801.54	231.37	8.786				
18,500.00	8,494.00	18,894.56	8,853.00	118.03	118.04	100.57	-2,121.62	10,268.10	2,032.98	1,799.48	233.51	8.706				
18,600.00	8,494.00	18,994.56	8,853.00	119.11	119.12	100.57	-2,120.96	10,368.10	2,033.05	1,797.41	235.65	8.628				
18,700.00	8,494.00	19,094.56	8,853.00	120.20	120.20	100.57	-2,120.30	10,468.10	2,033.13	1,795.34	237.79	8.550				
18,800.00	8,494.00	19,194.56	8,853.00	121.29	121.28	100.57	-2,119.64	10,568.10	2,033.20	1,793.27	239.93	8.474				
18,900.00	8,494.00	19,294.56	8,853.00	122.38	122.36	100.57	-2,118.97	10,668.10	2,033.27	1,791.19	242.07	8.399				
19,000.00	8,494.00	19,394.56	8,853.00	123.46	123.45	100.57	-2,118.31	10,768.09	2,033.34	1,789.12	244.22	8.326				
19,100.00	8,494.00	19,494.56	8,853.00	124.55	124.53	100.57	-2,117.65	10,868.09	2,033.41	1,787.04	246.36	8.254				
19,200.00	8,494.00	19,594.56	8,853.00	125.64	125.61	100.57	-2,116.99	10,968.09	2,033.48	1,784.97	248.51	8.183				
19,300.00	8,494.00	19,694.56	8,853.00	126.73	126.70	100.57	-2,116.33	11,068.09	2,033.55	1,782.89	250.66	8.113				
19,355.95	8,494.00	19,710.50	8,853.00	127.34	126.87	100.57	-2,116.22	11,084.03	2,033.98	1,782.65	251.33	8.093 ES, SF				

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B02) Koala 9 Fed Com 204H - Permit - APD-Revv00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
13,700.00	8,494.00	13,993.36	8,853.00	67.31	67.08	96.42	-3,473.32	5,476.97	3,335.88	3,202.18	133.70	24.951	CC
13,800.00	8,494.00	14,093.36	8,853.00	68.32	68.08	96.42	-3,472.66	5,576.97	3,335.95	3,200.26	135.69	24.584	
13,900.00	8,494.00	14,193.36	8,853.00	69.33	69.08	96.42	-3,472.00	5,676.96	3,336.02	3,198.32	137.70	24.227	
14,000.00	8,494.00	14,293.36	8,853.00	70.34	70.08	96.42	-3,471.33	5,776.96	3,336.09	3,196.38	139.71	23.879	
14,100.00	8,494.00	14,393.36	8,853.00	71.36	71.09	96.42	-3,470.67	5,876.96	3,336.16	3,194.44	141.73	23.539	
14,200.00	8,494.00	14,493.36	8,853.00	72.38	72.10	96.42	-3,470.01	5,976.96	3,336.23	3,192.48	143.75	23.208	
14,300.00	8,494.00	14,593.36	8,853.00	73.41	73.12	96.42	-3,469.35	6,076.96	3,336.30	3,190.52	145.78	22.885	
14,400.00	8,494.00	14,693.36	8,853.00	74.43	74.14	96.42	-3,468.68	6,176.95	3,336.38	3,188.56	147.82	22.571	
14,500.00	8,494.00	14,793.36	8,853.00	75.46	75.16	96.42	-3,468.02	6,276.95	3,336.45	3,186.58	149.86	22.263	
14,600.00	8,494.00	14,893.36	8,853.00	76.49	76.18	96.42	-3,467.36	6,376.95	3,336.52	3,184.61	151.91	21.964	
14,700.00	8,494.00	14,993.36	8,853.00	77.53	77.21	96.42	-3,466.70	6,476.95	3,336.59	3,182.63	153.96	21.671	
14,800.00	8,494.00	15,093.36	8,853.00	78.56	78.24	96.42	-3,466.03	6,576.94	3,336.66	3,180.64	156.02	21.386	
14,900.00	8,494.00	15,193.36	8,853.00	79.60	79.27	96.42	-3,465.37	6,676.94	3,336.73	3,178.65	158.08	21.107	
15,000.00	8,494.00	15,293.36	8,853.00	80.64	80.30	96.42	-3,464.71	6,776.94	3,336.80	3,176.65	160.15	20.835	
15,100.00	8,494.00	15,393.36	8,853.00	81.69	81.34	96.42	-3,464.04	6,876.94	3,336.87	3,174.65	162.22	20.570	
15,200.00	8,494.00	15,493.36	8,853.00	82.73	82.38	96.42	-3,463.38	6,976.94	3,336.94	3,172.65	164.30	20.310	
15,300.00	8,494.00	15,593.36	8,853.00	83.78	83.42	96.42	-3,462.72	7,076.93	3,337.01	3,170.64	166.38	20.057	
15,400.00	8,494.00	15,693.36	8,853.00	84.83	84.46	96.42	-3,462.06	7,176.93	3,337.09	3,168.62	168.46	19.809	
15,500.00	8,494.00	15,793.36	8,853.00	85.88	85.51	96.42	-3,461.39	7,276.93	3,337.16	3,166.61	170.55	19.567	
15,600.00	8,494.00	15,893.36	8,853.00	86.94	86.55	96.42	-3,460.73	7,376.93	3,337.23	3,164.59	172.64	19.330	
15,700.00	8,494.00	15,993.36	8,853.00	87.99	87.60	96.42	-3,460.07	7,476.92	3,337.30	3,162.56	174.74	19.099	
15,800.00	8,494.00	16,093.36	8,853.00	89.05	88.65	96.42	-3,459.41	7,576.92	3,337.37	3,160.53	176.84	18.873	
15,900.00	8,494.00	16,193.36	8,853.00	90.10	89.70	96.42	-3,458.74	7,676.92	3,337.44	3,158.50	178.94	18.651	
16,000.00	8,494.00	16,293.36	8,853.00	91.16	90.76	96.42	-3,458.08	7,776.92	3,337.51	3,156.47	181.04	18.435	
16,100.00	8,494.00	16,393.36	8,853.00	92.22	91.81	96.42	-3,457.42	7,876.92	3,337.58	3,154.43	183.15	18.223	
16,200.00	8,494.00	16,493.36	8,853.00	93.29	92.87	96.42	-3,456.75	7,976.91	3,337.65	3,152.39	185.26	18.016	
16,300.00	8,494.00	16,593.36	8,853.00	94.35	93.93	96.42	-3,456.09	8,076.91	3,337.73	3,150.35	187.38	17.813	
16,400.00	8,494.00	16,693.36	8,853.00	95.42	94.99	96.42	-3,455.43	8,176.91	3,337.80	3,148.30	189.49	17.614	
16,500.00	8,494.00	16,793.36	8,853.00	96.48	96.05	96.42	-3,454.77	8,276.91	3,337.87	3,146.26	191.61	17.420	
16,600.00	8,494.00	16,893.36	8,853.00	97.55	97.11	96.42	-3,454.10	8,376.90	3,337.94	3,144.20	193.73	17.230	
16,700.00	8,494.00	16,993.36	8,853.00	98.62	98.18	96.42	-3,453.44	8,476.90	3,338.01	3,142.15	195.86	17.043	
16,800.00	8,494.00	17,093.36	8,853.00	99.69	99.24	96.42	-3,452.78	8,576.90	3,338.08	3,140.10	197.98	16.860	
16,900.00	8,494.00	17,193.36	8,853.00	100.76	100.31	96.42	-3,452.12	8,676.90	3,338.15	3,138.04	200.11	16.681	
17,000.00	8,494.00	17,293.36	8,853.00	101.83	101.38	96.42	-3,451.45	8,776.90	3,338.22	3,135.98	202.25	16.506	
17,100.00	8,494.00	17,393.36	8,853.00	102.91	102.45	96.42	-3,450.79	8,876.89	3,338.29	3,133.91	204.38	16.334	
17,200.00	8,494.00	17,493.36	8,853.00	103.98	103.52	96.42	-3,450.13	8,976.89	3,338.36	3,131.85	206.52	16.165	
17,300.00	8,494.00	17,593.36	8,853.00	105.06	104.59	96.42	-3,449.46	9,076.89	3,338.44	3,129.78	208.65	16.000	
17,400.00	8,494.00	17,693.36	8,853.00	106.13	105.66	96.41	-3,448.80	9,176.89	3,338.51	3,127.71	210.79	15.838	
17,500.00	8,494.00	17,793.36	8,853.00	107.21	106.73	96.41	-3,448.14	9,276.88	3,338.58	3,125.64	212.94	15.679	
17,600.00	8,494.00	17,893.36	8,853.00	108.29	107.81	96.41	-3,447.48	9,376.88	3,338.65	3,123.57	215.08	15.523	
17,700.00	8,494.00	17,993.36	8,853.00	109.37	108.88	96.41	-3,446.81	9,476.88	3,338.72	3,121.49	217.22	15.370	
17,800.00	8,494.00	18,093.36	8,853.00	110.45	109.96	96.41	-3,446.15	9,576.88	3,338.79	3,119.42	219.37	15.220	
17,900.00	8,494.00	18,193.36	8,853.00	111.53	111.03	96.41	-3,445.49	9,676.88	3,338.86	3,117.34	221.52	15.072	
18,000.00	8,494.00	18,293.36	8,853.00	112.61	112.11	96.41	-3,444.82	9,776.87	3,338.93	3,115.26	223.67	14.928	
18,100.00	8,494.00	18,393.36	8,853.00	113.69	113.19	96.41	-3,444.16	9,876.87	3,339.00	3,113.18	225.82	14.786	
18,200.00	8,494.00	18,493.36	8,853.00	114.77	114.27	96.41	-3,443.50	9,976.87	3,339.07	3,111.10	227.98	14.646	
18,300.00	8,494.00	18,593.36	8,853.00	115.86	115.35	96.41	-3,442.84	10,076.87	3,339.15	3,109.01	230.13	14.510	
18,400.00	8,494.00	18,693.36	8,853.00	116.94	116.43	96.41	-3,442.17	10,176.86	3,339.22	3,106.93	232.29	14.375	
18,500.00	8,494.00	18,793.36	8,853.00	118.03	117.51	96.41	-3,441.51	10,276.86	3,339.29	3,104.84	234.45	14.243	
18,600.00	8,494.00	18,893.36	8,853.00	119.11	118.60	96.41	-3,440.85	10,376.86	3,339.36	3,102.75	236.61	14.113	
18,700.00	8,494.00	18,993.36	8,853.00	120.20	119.68	96.41	-3,440.19	10,476.86	3,339.43	3,100.66	238.77	13.986	
18,800.00	8,494.00	19,093.36	8,853.00	121.29	120.76	96.41	-3,439.52	10,576.86	3,339.50	3,098.57	240.93	13.861	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B02) Koala 9 Fed Com 204H - Permit - APD-Revv00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance				Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
18,900.00	8,494.00	19,193.36	8,853.00	122.38	121.85	96.41	-3,438.86	10,676.85	3,339.57	3,096.47	243.10	13.738	
19,000.00	8,494.00	19,293.36	8,853.00	123.46	122.93	96.41	-3,438.20	10,776.85	3,339.64	3,094.38	245.26	13.617	
19,100.00	8,494.00	19,393.36	8,853.00	124.55	124.02	96.41	-3,437.53	10,876.85	3,339.71	3,092.28	247.43	13.498	
19,200.00	8,494.00	19,493.36	8,853.00	125.64	125.11	96.41	-3,436.87	10,976.85	3,339.78	3,090.19	249.60	13.381	
19,300.00	8,494.00	19,583.50	8,853.00	126.73	126.08	96.41	-3,436.27	11,066.99	3,339.87	3,088.21	251.66	13.271 ES	
19,355.95	8,494.00	19,583.50	8,853.00	127.34	126.08	96.41	-3,436.27	11,066.99	3,340.54	3,088.29	252.25	13.243 SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B03) Koala 9 Fed Com 133H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance		Rule Assigned:		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
12,300.00	8,494.00	12,007.02	8,523.00	53.68	52.92	90.93	-2,822.74	4,072.66	2,654.43	2,547.84	106.59	24.903	CC
12,400.00	8,494.00	12,107.02	8,523.00	54.62	53.84	90.93	-2,822.08	4,172.66	2,654.50	2,546.06	108.45	24.477	
12,500.00	8,494.00	12,207.02	8,523.00	55.56	54.76	90.93	-2,821.41	4,272.65	2,654.57	2,544.26	110.32	24.063	
12,600.00	8,494.00	12,307.02	8,523.00	56.51	55.70	90.93	-2,820.75	4,372.65	2,654.64	2,542.44	112.20	23.659	
12,700.00	8,494.00	12,407.02	8,523.00	57.47	56.64	90.93	-2,820.09	4,472.65	2,654.71	2,540.62	114.10	23.267	
12,800.00	8,494.00	12,507.02	8,523.00	58.43	57.59	90.93	-2,819.42	4,572.65	2,654.78	2,538.78	116.01	22.884	
12,900.00	8,494.00	12,607.02	8,523.00	59.40	58.54	90.93	-2,818.76	4,672.64	2,654.86	2,536.92	117.93	22.512	
13,000.00	8,494.00	12,707.02	8,523.00	60.37	59.50	90.93	-2,818.09	4,772.64	2,654.93	2,535.06	119.86	22.150	
13,100.00	8,494.00	12,807.02	8,523.00	61.35	60.46	90.93	-2,817.43	4,872.64	2,655.00	2,533.19	121.81	21.797	
13,200.00	8,494.00	12,907.02	8,523.00	62.33	61.43	90.93	-2,816.77	4,972.64	2,655.07	2,531.31	123.76	21.453	
13,300.00	8,494.00	13,007.02	8,523.00	63.32	62.41	90.93	-2,816.10	5,072.64	2,655.14	2,529.41	125.72	21.119	
13,400.00	8,494.00	13,107.02	8,523.00	64.31	63.39	90.93	-2,815.44	5,172.63	2,655.21	2,527.51	127.69	20.793	
13,500.00	8,494.00	13,207.02	8,523.00	65.31	64.37	90.93	-2,814.77	5,272.63	2,655.28	2,525.60	129.68	20.476	
13,600.00	8,494.00	13,307.02	8,523.00	66.31	65.36	90.93	-2,814.11	5,372.63	2,655.35	2,523.68	131.67	20.167	
13,700.00	8,494.00	13,407.02	8,523.00	67.31	66.36	90.93	-2,813.45	5,472.63	2,655.42	2,521.75	133.66	19.866	
13,800.00	8,494.00	13,507.02	8,523.00	68.32	67.35	90.93	-2,812.78	5,572.62	2,655.49	2,519.82	135.67	19.573	
13,900.00	8,494.00	13,607.02	8,523.00	69.33	68.35	90.93	-2,812.12	5,672.62	2,655.56	2,517.88	137.68	19.288	
14,000.00	8,494.00	13,707.02	8,523.00	70.34	69.36	90.93	-2,811.45	5,772.62	2,655.63	2,515.93	139.70	19.009	
14,100.00	8,494.00	13,807.02	8,523.00	71.36	70.37	90.93	-2,810.79	5,872.62	2,655.70	2,513.97	141.73	18.738	
14,200.00	8,494.00	13,907.02	8,523.00	72.38	71.38	90.93	-2,810.13	5,972.61	2,655.77	2,512.01	143.76	18.474	
14,300.00	8,494.00	14,007.02	8,523.00	73.41	72.39	90.93	-2,809.46	6,072.61	2,655.84	2,510.04	145.80	18.216	
14,400.00	8,494.00	14,107.02	8,523.00	74.43	73.41	90.93	-2,808.80	6,172.61	2,655.91	2,508.06	147.85	17.964	
14,500.00	8,494.00	14,207.02	8,523.00	75.46	74.43	90.93	-2,808.14	6,272.61	2,655.98	2,506.08	149.90	17.719	
14,600.00	8,494.00	14,307.02	8,523.00	76.49	75.46	90.93	-2,807.47	6,372.61	2,656.05	2,504.10	151.95	17.479	
14,700.00	8,494.00	14,407.02	8,523.00	77.53	76.49	90.93	-2,806.81	6,472.60	2,656.12	2,502.11	154.01	17.246	
14,800.00	8,494.00	14,507.02	8,523.00	78.56	77.51	90.93	-2,806.14	6,572.60	2,656.19	2,500.11	156.08	17.018	
14,900.00	8,494.00	14,607.02	8,523.00	79.60	78.55	90.93	-2,805.48	6,672.60	2,656.26	2,498.11	158.15	16.796	
15,000.00	8,494.00	14,707.02	8,523.00	80.64	79.58	90.93	-2,804.82	6,772.60	2,656.33	2,496.10	160.23	16.578	
15,100.00	8,494.00	14,807.02	8,523.00	81.69	80.62	90.93	-2,804.15	6,872.59	2,656.40	2,494.09	162.31	16.366	
15,200.00	8,494.00	14,907.02	8,523.00	82.73	81.66	90.93	-2,803.49	6,972.59	2,656.47	2,492.08	164.39	16.159	
15,300.00	8,494.00	15,007.02	8,523.00	83.78	82.70	90.93	-2,802.82	7,072.59	2,656.54	2,490.06	166.48	15.957	
15,400.00	8,494.00	15,107.02	8,523.00	84.83	83.74	90.93	-2,802.16	7,172.59	2,656.61	2,488.04	168.58	15.759	
15,500.00	8,494.00	15,207.02	8,523.00	85.88	84.79	90.93	-2,801.50	7,272.59	2,656.68	2,486.01	170.67	15.566	
15,600.00	8,494.00	15,307.02	8,523.00	86.94	85.83	90.93	-2,800.83	7,372.58	2,656.75	2,483.98	172.77	15.377	
15,700.00	8,494.00	15,407.02	8,523.00	87.99	86.88	90.93	-2,800.17	7,472.58	2,656.82	2,481.95	174.88	15.193	
15,800.00	8,494.00	15,507.02	8,523.00	89.05	87.93	90.93	-2,799.50	7,572.58	2,656.89	2,479.91	176.98	15.012	
15,900.00	8,494.00	15,607.02	8,523.00	90.10	88.99	90.93	-2,798.84	7,672.58	2,656.96	2,477.87	179.10	14.835	
16,000.00	8,494.00	15,707.02	8,523.00	91.16	90.04	90.93	-2,798.18	7,772.57	2,657.03	2,475.82	181.21	14.663	
16,100.00	8,494.00	15,807.01	8,523.00	92.22	91.10	90.93	-2,797.51	7,872.57	2,657.10	2,473.78	183.33	14.494	
16,200.00	8,494.00	15,907.01	8,523.00	93.29	92.15	90.93	-2,796.85	7,972.57	2,657.17	2,471.73	185.45	14.328	
16,300.00	8,494.00	16,007.01	8,523.00	94.35	93.21	90.93	-2,796.18	8,072.57	2,657.24	2,469.67	187.57	14.167	
16,400.00	8,494.00	16,107.01	8,523.00	95.42	94.27	90.93	-2,795.52	8,172.57	2,657.31	2,467.62	189.70	14.008	
16,500.00	8,494.00	16,207.01	8,523.00	96.48	95.34	90.93	-2,794.86	8,272.56	2,657.39	2,465.56	191.82	13.853	
16,600.00	8,494.00	16,307.01	8,523.00	97.55	96.40	90.93	-2,794.19	8,372.56	2,657.46	2,463.50	193.96	13.701	
16,700.00	8,494.00	16,407.01	8,523.00	98.62	97.46	90.93	-2,793.53	8,472.56	2,657.53	2,461.44	196.09	13.553	
16,800.00	8,494.00	16,507.01	8,523.00	99.69	98.53	90.93	-2,792.87	8,572.56	2,657.60	2,459.37	198.23	13.407	
16,900.00	8,494.00	16,607.01	8,523.00	100.76	99.60	90.93	-2,792.20	8,672.55	2,657.67	2,457.30	200.36	13.264	
17,000.00	8,494.00	16,707.01	8,523.00	101.83	100.66	90.93	-2,791.54	8,772.55	2,657.74	2,455.23	202.50	13.124	
17,100.00	8,494.00	16,807.01	8,523.00	102.91	101.73	90.93	-2,790.87	8,872.55	2,657.81	2,453.16	204.65	12.987	
17,200.00	8,494.00	16,907.01	8,523.00	103.98	102.80	90.93	-2,790.21	8,972.55	2,657.88	2,451.08	206.79	12.853	
17,300.00	8,494.00	17,007.01	8,523.00	105.06	103.88	90.93	-2,789.55	9,072.55	2,657.95	2,449.01	208.94	12.721	
17,400.00	8,494.00	17,107.01	8,523.00	106.13	104.95	90.93	-2,788.88	9,172.54	2,658.02	2,446.93	211.09	12.592	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B03) Koala 9 Fed Com 133H - Permit - APD-Rev00												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
17,500.00	8,494.00	17,207.01	8,523.00	107.21	106.02	90.93	-2,788.22	9,272.54	2,658.09	2,444.85	213.24	12.465	
17,600.00	8,494.00	17,307.01	8,523.00	108.29	107.10	90.93	-2,787.55	9,372.54	2,658.16	2,442.76	215.39	12.341	
17,700.00	8,494.00	17,407.01	8,523.00	109.37	108.17	90.93	-2,786.89	9,472.54	2,658.23	2,440.68	217.55	12.219	
17,800.00	8,494.00	17,507.01	8,523.00	110.45	109.25	90.93	-2,786.23	9,572.53	2,658.30	2,438.59	219.70	12.099	
17,900.00	8,494.00	17,607.01	8,523.00	111.53	110.33	90.93	-2,785.56	9,672.53	2,658.37	2,436.51	221.86	11.982	
18,000.00	8,494.00	17,707.01	8,523.00	112.61	111.40	90.93	-2,784.90	9,772.53	2,658.44	2,434.42	224.02	11.867	
18,100.00	8,494.00	17,807.01	8,523.00	113.69	112.48	90.93	-2,784.23	9,872.53	2,658.51	2,432.32	226.19	11.754	
18,200.00	8,494.00	17,907.01	8,523.00	114.77	113.56	90.93	-2,783.57	9,972.53	2,658.58	2,430.23	228.35	11.643	
18,300.00	8,494.00	18,007.01	8,523.00	115.86	114.65	90.93	-2,782.91	10,072.52	2,658.65	2,428.14	230.51	11.534	
18,400.00	8,494.00	18,107.01	8,523.00	116.94	115.73	90.93	-2,782.24	10,172.52	2,658.72	2,426.04	232.68	11.427	
18,500.00	8,494.00	18,207.01	8,523.00	118.03	116.81	90.93	-2,781.58	10,272.52	2,658.79	2,423.94	234.85	11.321	
18,600.00	8,494.00	18,307.01	8,523.00	119.11	117.89	90.93	-2,780.91	10,372.52	2,658.86	2,421.84	237.02	11.218	
18,700.00	8,494.00	18,407.01	8,523.00	120.20	118.98	90.93	-2,780.25	10,472.51	2,658.93	2,419.74	239.19	11.117	
18,800.00	8,494.00	18,507.01	8,523.00	121.29	120.06	90.93	-2,779.59	10,572.51	2,659.00	2,417.64	241.36	11.017	
18,900.00	8,494.00	18,607.01	8,523.00	122.38	121.15	90.93	-2,778.92	10,672.51	2,659.07	2,415.54	243.53	10.919	
19,000.00	8,494.00	18,707.01	8,523.00	123.46	122.23	90.93	-2,778.26	10,772.51	2,659.14	2,413.43	245.71	10.822	
19,100.00	8,494.00	18,807.01	8,523.00	124.55	123.32	90.93	-2,777.60	10,872.51	2,659.21	2,411.33	247.88	10.728	
19,200.00	8,494.00	18,907.01	8,523.00	125.64	124.41	90.93	-2,776.93	10,972.50	2,659.28	2,409.22	250.06	10.635	
19,300.00	8,494.00	19,007.01	8,523.00	126.73	125.49	90.93	-2,776.27	11,072.50	2,659.35	2,407.11	252.24	10.543	
19,355.95	8,494.00	19,009.61	8,523.00	127.34	125.52	90.93	-2,776.25	11,075.10	2,659.93	2,407.09	252.84	10.520 ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B04) Koala 9 Fed Com 134H - Permit - APD-Rev00													Offset Site Error:	0.00 usft
Survey Program:		0-MWD+IFR1+SAG+FDIR (SQC2)						Rule Assigned:				Offset Well Error:	0.00 usft	
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
15,000.00	8,494.00	14,959.87	8,523.00	80.64	79.25	90.62	-4,124.68	6,781.33	3,976.11	3,816.30	159.81	24.880	CC	
15,100.00	8,494.00	15,059.87	8,523.00	81.69	80.29	90.62	-4,124.02	6,881.33	3,976.18	3,814.29	161.90	24.560		
15,200.00	8,494.00	15,159.87	8,523.00	82.73	81.33	90.62	-4,123.36	6,981.32	3,976.26	3,812.27	163.99	24.247		
15,300.00	8,494.00	15,259.87	8,523.00	83.78	82.38	90.62	-4,122.70	7,081.32	3,976.33	3,810.25	166.08	23.942		
15,400.00	8,494.00	15,359.87	8,523.00	84.83	83.42	90.62	-4,122.03	7,181.32	3,976.40	3,808.22	168.18	23.644		
15,500.00	8,494.00	15,459.87	8,523.00	85.88	84.47	90.62	-4,121.37	7,281.32	3,976.47	3,806.19	170.28	23.353		
15,600.00	8,494.00	15,559.87	8,523.00	86.94	85.52	90.62	-4,120.71	7,381.32	3,976.54	3,804.16	172.38	23.069		
15,700.00	8,494.00	15,659.87	8,523.00	87.99	86.57	90.62	-4,120.04	7,481.31	3,976.61	3,802.12	174.49	22.790		
15,800.00	8,494.00	15,759.87	8,523.00	89.05	87.63	90.62	-4,119.38	7,581.31	3,976.68	3,800.08	176.60	22.518		
15,900.00	8,494.00	15,859.87	8,523.00	90.10	88.68	90.62	-4,118.72	7,681.31	3,976.75	3,798.04	178.71	22.252		
16,000.00	8,494.00	15,959.87	8,523.00	91.16	89.74	90.62	-4,118.05	7,781.31	3,976.82	3,796.00	180.83	21.992		
16,100.00	8,494.00	16,059.87	8,523.00	92.22	90.80	90.62	-4,117.39	7,881.30	3,976.90	3,793.95	182.95	21.738		
16,200.00	8,494.00	16,159.87	8,523.00	93.29	91.86	90.62	-4,116.73	7,981.30	3,976.97	3,791.90	185.07	21.489		
16,300.00	8,494.00	16,259.87	8,523.00	94.35	92.92	90.62	-4,116.06	8,081.30	3,977.04	3,789.84	187.20	21.245		
16,400.00	8,494.00	16,359.87	8,523.00	95.42	93.98	90.62	-4,115.40	8,181.30	3,977.11	3,787.78	189.33	21.007		
16,500.00	8,494.00	16,459.87	8,523.00	96.48	95.04	90.62	-4,114.74	8,281.30	3,977.18	3,785.72	191.46	20.773		
16,600.00	8,494.00	16,559.87	8,523.00	97.55	96.11	90.62	-4,114.07	8,381.29	3,977.25	3,783.66	193.59	20.545		
16,700.00	8,494.00	16,659.87	8,523.00	98.62	97.18	90.62	-4,113.41	8,481.29	3,977.32	3,781.60	195.73	20.321		
16,800.00	8,494.00	16,759.87	8,523.00	99.69	98.24	90.62	-4,112.75	8,581.29	3,977.39	3,779.53	197.87	20.102		
16,900.00	8,494.00	16,859.87	8,523.00	100.76	99.31	90.62	-4,112.09	8,681.29	3,977.46	3,777.46	200.01	19.887		
17,000.00	8,494.00	16,959.87	8,523.00	101.83	100.38	90.62	-4,111.42	8,781.28	3,977.54	3,775.39	202.15	19.676		
17,100.00	8,494.00	17,059.87	8,523.00	102.91	101.45	90.62	-4,110.76	8,881.28	3,977.61	3,773.31	204.29	19.470		
17,200.00	8,494.00	17,159.87	8,523.00	103.98	102.53	90.62	-4,110.10	8,981.28	3,977.68	3,771.24	206.44	19.268		
17,300.00	8,494.00	17,259.87	8,523.00	105.06	103.60	90.62	-4,109.43	9,081.28	3,977.75	3,769.16	208.59	19.070		
17,400.00	8,494.00	17,359.87	8,523.00	106.13	104.67	90.62	-4,108.77	9,181.28	3,977.82	3,767.08	210.74	18.875		
17,500.00	8,494.00	17,459.87	8,523.00	107.21	105.75	90.62	-4,108.11	9,281.27	3,977.89	3,764.99	212.90	18.685		
17,600.00	8,494.00	17,559.87	8,523.00	108.29	106.83	90.62	-4,107.44	9,381.27	3,977.96	3,762.91	215.05	18.498		
17,700.00	8,494.00	17,659.87	8,523.00	109.37	107.90	90.62	-4,106.78	9,481.27	3,978.03	3,760.82	217.21	18.314		
17,800.00	8,494.00	17,759.87	8,523.00	110.45	108.98	90.62	-4,106.12	9,581.27	3,978.10	3,758.74	219.37	18.134		
17,900.00	8,494.00	17,859.87	8,523.00	111.53	110.06	90.62	-4,105.45	9,681.26	3,978.17	3,756.65	221.53	17.958		
18,000.00	8,494.00	17,959.87	8,523.00	112.61	111.14	90.62	-4,104.79	9,781.26	3,978.25	3,754.56	223.69	17.785		
18,100.00	8,494.00	18,059.87	8,523.00	113.69	112.22	90.62	-4,104.13	9,881.26	3,978.32	3,752.46	225.85	17.615		
18,200.00	8,494.00	18,159.87	8,523.00	114.77	113.30	90.62	-4,103.47	9,981.26	3,978.39	3,750.37	228.02	17.448		
18,300.00	8,494.00	18,259.87	8,523.00	115.86	114.39	90.62	-4,102.80	10,081.26	3,978.46	3,748.27	230.19	17.284		
18,400.00	8,494.00	18,359.87	8,523.00	116.94	115.47	90.62	-4,102.14	10,181.25	3,978.53	3,746.18	232.35	17.123		
18,500.00	8,494.00	18,459.87	8,523.00	118.03	116.55	90.62	-4,101.48	10,281.25	3,978.60	3,744.08	234.52	16.965		
18,600.00	8,494.00	18,559.87	8,523.00	119.11	117.64	90.62	-4,100.81	10,381.25	3,978.67	3,741.98	236.69	16.809		
18,700.00	8,494.00	18,659.87	8,523.00	120.20	118.72	90.62	-4,100.15	10,481.25	3,978.74	3,739.88	238.87	16.657		
18,800.00	8,494.00	18,759.87	8,523.00	121.29	119.81	90.62	-4,099.49	10,581.24	3,978.81	3,737.77	241.04	16.507		
18,900.00	8,494.00	18,859.87	8,523.00	122.38	120.89	90.62	-4,098.82	10,681.24	3,978.89	3,735.67	243.22	16.359		
19,000.00	8,494.00	18,959.87	8,523.00	123.46	121.98	90.62	-4,098.16	10,781.24	3,978.96	3,733.56	245.39	16.215		
19,100.00	8,494.00	19,059.87	8,523.00	124.55	123.07	90.62	-4,097.50	10,881.24	3,979.03	3,731.46	247.57	16.072		
19,200.00	8,494.00	19,159.87	8,523.00	125.64	124.16	90.62	-4,096.83	10,981.24	3,979.10	3,729.35	249.75	15.932		
19,300.00	8,494.00	19,259.87	8,523.00	126.73	124.99	90.62	-4,096.17	11,081.24	3,979.17	3,727.25	251.93	15.792		
19,400.00	8,494.00	19,359.87	8,523.00	127.82	125.64	90.62	-4,095.50	11,181.24	3,979.24	3,725.15	254.11	15.652		
19,500.00	8,494.00	19,459.87	8,523.00	128.91	126.34	90.62	-4,094.84	11,281.24	3,979.31	3,723.05	256.29	15.512		
19,600.00	8,494.00	19,559.87	8,523.00	130.00	127.04	90.62	-4,094.18	11,381.24	3,979.38	3,720.95	258.47	15.372		
19,700.00	8,494.00	19,659.87	8,523.00	131.09	127.74	90.62	-4,093.51	11,481.24	3,979.45	3,718.85	260.65	15.232		
19,800.00	8,494.00	19,759.87	8,523.00	132.18	128.44	90.62	-4,092.85	11,581.24	3,979.52	3,716.75	262.83	15.092		
19,900.00	8,494.00	19,859.87	8,523.00	133.27	129.14	90.62	-4,092.19	11,681.24	3,979.59	3,714.65	265.01	14.952		
20,000.00	8,494.00	19,959.87	8,523.00	134.36	130.00	90.62	-4,091.52	11,781.24	3,979.66	3,712.55	267.19	14.812		
20,100.00	8,494.00	20,059.87	8,523.00	135.45	130.75	90.62	-4,090.86	11,881.24	3,979.73	3,710.45	269.37	14.672		
20,200.00	8,494.00	20,159.87	8,523.00	136.54	131.50	90.62	-4,090.19	11,981.24	3,979.80	3,708.35	271.55	14.532		
20,300.00	8,494.00	20,259.87	8,523.00	137.63	132.25	90.62	-4,089.53	12,081.24	3,979.87	3,706.25	273.73	14.392		
20,400.00	8,494.00	20,359.87	8,523.00	138.72	133.00	90.62	-4,088.86	12,181.24	3,979.94	3,704.15	275.91	14.252		
20,500.00	8,494.00	20,459.87	8,523.00	139.81	133.75	90.62	-4,088.20	12,281.24	3,980.01	3,702.05	278.09	14.112		
20,600.00	8,494.00	20,559.87	8,523.00	140.90	134.50	90.62	-4,087.53	12,381.24	3,980.08	3,700.00	280.27	13.972		
20,700.00	8,494.00	20,659.87	8,523.00	141.99	135.25	90.62	-4,086.87	12,481.24	3,980.15	3,697.90	282.45	13.832		
20,800.00	8,494.00	20,759.87	8,523.00	143.08	136.00	90.62	-4,086.20	12,581.24	3,980.22	3,695.80	284.63	13.692		
20,900.00	8,494.00	20,859.87	8,523.00	144.17	136.75	90.62	-4,085.54	12,681.24	3,980.29	3,693.70	286.81	13.552		
21,000.00	8,494.00	20,959.87	8,523.00	145.26	137.50	90.62	-4,084.87	12,781.24	3,980.36	3,691.60	288.99	13.412		
21,100.00	8,494.00	21,059.87	8,523.00	146.35	138.25	90.62	-4,084.21	12,881.24	3,980.43	3,689.50	291.17	13.272		
21,200.00	8,494.00	21,159.87	8,523.00	147.44	139.00	90.62	-4,083.54	12,981.24	3,980.50	3,687.40	293.35	13.132		
21,300.00	8,494.00	21,259.87	8,523.00	148.53	139.75	90.62	-4,082.88	13,081.24	3,980.57	3,685.30	295.53	12.992		
21,400.00	8,494.00	21,359.87	8,523.00	149.62	140.50									



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B05) Koala 9 Fed Com 123H - Permit - APD-Rev00												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)												Offset Well Error:	0.00 usft
Rule Assigned:												Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
13,500.00	8,494.00	11,960.49	7,328.00	65.31	61.83	66.54	-2,814.74	5,272.61	2,894.06	2,776.47	117.58	24.612	CC
13,600.00	8,494.00	12,060.49	7,328.00	66.31	62.85	66.54	-2,814.08	5,372.61	2,894.12	2,774.66	119.46	24.227	
13,700.00	8,494.00	12,160.49	7,328.00	67.31	63.87	66.54	-2,813.41	5,472.61	2,894.19	2,772.85	121.34	23.853	
13,800.00	8,494.00	12,260.49	7,328.00	68.32	64.89	66.54	-2,812.75	5,572.61	2,894.25	2,771.03	123.22	23.488	
13,900.00	8,494.00	12,360.49	7,328.00	69.33	65.92	66.55	-2,812.09	5,672.61	2,894.32	2,769.20	125.11	23.133	
14,000.00	8,494.00	12,460.49	7,328.00	70.34	66.95	66.55	-2,811.42	5,772.60	2,894.38	2,767.37	127.01	22.788	
14,100.00	8,494.00	12,560.49	7,328.00	71.36	67.98	66.55	-2,810.76	5,872.60	2,894.45	2,765.53	128.92	22.452	
14,200.00	8,494.00	12,660.49	7,328.00	72.38	69.02	66.55	-2,810.10	5,972.60	2,894.51	2,763.69	130.83	22.125	
14,300.00	8,494.00	12,760.49	7,328.00	73.41	70.06	66.55	-2,809.43	6,072.60	2,894.58	2,761.84	132.74	21.806	
14,400.00	8,494.00	12,860.49	7,328.00	74.43	71.10	66.55	-2,808.77	6,172.59	2,894.64	2,759.98	134.66	21.496	
14,500.00	8,494.00	12,960.49	7,328.00	75.46	72.14	66.55	-2,808.11	6,272.59	2,894.71	2,758.12	136.58	21.194	
14,600.00	8,494.00	13,060.49	7,328.00	76.49	73.19	66.55	-2,807.44	6,372.59	2,894.77	2,756.26	138.51	20.899	
14,700.00	8,494.00	13,160.49	7,328.00	77.53	74.24	66.55	-2,806.78	6,472.59	2,894.84	2,754.39	140.45	20.612	
14,800.00	8,494.00	13,260.49	7,328.00	78.56	75.29	66.55	-2,806.12	6,572.59	2,894.90	2,752.52	142.38	20.332	
14,900.00	8,494.00	13,360.49	7,328.00	79.60	76.34	66.55	-2,805.45	6,672.58	2,894.97	2,750.64	144.32	20.059	
15,000.00	8,494.00	13,460.49	7,328.00	80.64	77.39	66.55	-2,804.79	6,772.58	2,895.03	2,748.76	146.27	19.792	
15,100.00	8,494.00	13,560.49	7,328.00	81.69	78.45	66.55	-2,804.13	6,872.58	2,895.10	2,746.88	148.22	19.533	
15,200.00	8,494.00	13,660.49	7,328.00	82.73	79.50	66.55	-2,803.46	6,972.58	2,895.16	2,744.99	150.17	19.279	
15,300.00	8,494.00	13,760.49	7,328.00	83.78	80.56	66.55	-2,802.80	7,072.57	2,895.23	2,743.10	152.13	19.032	
15,400.00	8,494.00	13,860.49	7,328.00	84.83	81.63	66.55	-2,802.14	7,172.57	2,895.29	2,741.20	154.09	18.790	
15,500.00	8,494.00	13,960.49	7,328.00	85.88	82.69	66.55	-2,801.47	7,272.57	2,895.36	2,739.31	156.05	18.554	
15,600.00	8,494.00	14,060.49	7,328.00	86.94	83.75	66.55	-2,800.81	7,372.57	2,895.42	2,737.41	158.02	18.324	
15,700.00	8,494.00	14,160.49	7,328.00	87.99	84.82	66.56	-2,800.15	7,472.57	2,895.49	2,735.50	159.98	18.099	
15,800.00	8,494.00	14,260.49	7,328.00	89.05	85.88	66.56	-2,799.48	7,572.56	2,895.55	2,733.60	161.96	17.879	
15,900.00	8,494.00	14,360.49	7,328.00	90.10	86.95	66.56	-2,798.82	7,672.56	2,895.62	2,731.69	163.93	17.664	
16,000.00	8,494.00	14,460.49	7,328.00	91.16	88.02	66.56	-2,798.16	7,772.56	2,895.68	2,729.78	165.91	17.454	
16,100.00	8,494.00	14,560.49	7,328.00	92.22	89.09	66.56	-2,797.49	7,872.56	2,895.75	2,727.86	167.89	17.248	
16,200.00	8,494.00	14,660.49	7,328.00	93.29	90.17	66.56	-2,796.83	7,972.55	2,895.81	2,725.94	169.87	17.047	
16,300.00	8,494.00	14,760.49	7,328.00	94.35	91.24	66.56	-2,796.17	8,072.55	2,895.88	2,724.02	171.85	16.851	
16,400.00	8,494.00	14,860.49	7,328.00	95.42	92.31	66.56	-2,795.50	8,172.55	2,895.94	2,722.10	173.84	16.659	
16,500.00	8,494.00	14,960.49	7,328.00	96.48	93.39	66.56	-2,794.84	8,272.55	2,896.01	2,720.18	175.83	16.471	
16,600.00	8,494.00	15,060.49	7,328.00	97.55	94.47	66.56	-2,794.18	8,372.55	2,896.07	2,718.25	177.82	16.287	
16,700.00	8,494.00	15,160.49	7,328.00	98.62	95.55	66.56	-2,793.51	8,472.54	2,896.14	2,716.32	179.81	16.106	
16,800.00	8,494.00	15,260.49	7,328.00	99.69	96.62	66.56	-2,792.85	8,572.54	2,896.20	2,714.39	181.81	15.930	
16,900.00	8,494.00	15,360.49	7,328.00	100.76	97.70	66.56	-2,792.19	8,672.54	2,896.27	2,712.46	183.81	15.757	
17,000.00	8,494.00	15,460.49	7,328.00	101.83	98.79	66.56	-2,791.52	8,772.54	2,896.33	2,710.53	185.80	15.588	
17,100.00	8,494.00	15,560.49	7,328.00	102.91	99.87	66.56	-2,790.86	8,872.53	2,896.40	2,708.59	187.80	15.422	
17,200.00	8,494.00	15,660.49	7,328.00	103.98	100.95	66.56	-2,790.20	8,972.53	2,896.46	2,706.65	189.81	15.260	
17,300.00	8,494.00	15,760.49	7,328.00	105.06	102.03	66.56	-2,789.53	9,072.53	2,896.53	2,704.72	191.81	15.101	
17,400.00	8,494.00	15,860.49	7,328.00	106.13	103.12	66.57	-2,788.87	9,172.53	2,896.59	2,702.77	193.82	14.945	
17,500.00	8,494.00	15,960.49	7,328.00	107.21	104.20	66.57	-2,788.21	9,272.53	2,896.66	2,700.83	195.83	14.792	
17,600.00	8,494.00	16,060.49	7,328.00	108.29	105.29	66.57	-2,787.54	9,372.52	2,896.72	2,698.89	197.84	14.642	
17,700.00	8,494.00	16,160.49	7,328.00	109.37	106.37	66.57	-2,786.88	9,472.52	2,896.79	2,696.94	199.85	14.495	
17,800.00	8,494.00	16,260.49	7,328.00	110.45	107.46	66.57	-2,786.22	9,572.52	2,896.85	2,694.99	201.86	14.351	
17,900.00	8,494.00	16,360.49	7,328.00	111.53	108.55	66.57	-2,785.55	9,672.52	2,896.92	2,693.05	203.87	14.210	
18,000.00	8,494.00	16,460.49	7,328.00	112.61	109.64	66.57	-2,784.89	9,772.51	2,896.98	2,691.10	205.89	14.071	
18,100.00	8,494.00	16,560.49	7,328.00	113.69	110.73	66.57	-2,784.23	9,872.51	2,897.05	2,689.14	207.90	13.935	
18,200.00	8,494.00	16,660.49	7,328.00	114.77	111.82	66.57	-2,783.56	9,972.51	2,897.11	2,687.19	209.92	13.801	
18,300.00	8,494.00	16,760.49	7,328.00	115.86	112.91	66.57	-2,782.90	10,072.51	2,897.18	2,685.24	211.94	13.670	
18,400.00	8,494.00	16,860.49	7,328.00	116.94	114.00	66.57	-2,782.24	10,172.51	2,897.24	2,683.28	213.96	13.541	
18,500.00	8,494.00	16,960.49	7,328.00	118.03	115.09	66.57	-2,781.57	10,272.50	2,897.31	2,681.33	215.98	13.415	
18,600.00	8,494.00	17,060.49	7,328.00	119.11	116.18	66.57	-2,780.91	10,372.50	2,897.37	2,679.37	218.00	13.290	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B05) Koala 9 Fed Com 123H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Rule Assigned:		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
18,700.00	8,494.00	17,160.49	7,328.00	120.20	117.28	66.57	-2,780.25	10,472.50	2,897.44	2,677.41	220.03	13.168	
18,800.00	8,494.00	17,260.49	7,328.00	121.29	118.37	66.57	-2,779.58	10,572.50	2,897.50	2,675.45	222.05	13.049	
18,900.00	8,494.00	17,360.49	7,328.00	122.38	119.47	66.57	-2,778.92	10,672.49	2,897.57	2,673.49	224.08	12.931	
19,000.00	8,494.00	17,460.49	7,328.00	123.46	120.56	66.57	-2,778.26	10,772.49	2,897.63	2,671.53	226.11	12.815	
19,100.00	8,494.00	17,560.49	7,328.00	124.55	121.65	66.57	-2,777.59	10,872.49	2,897.70	2,669.56	228.13	12.702	
19,200.00	8,494.00	17,660.49	7,328.00	125.64	122.75	66.58	-2,776.93	10,972.49	2,897.76	2,667.60	230.16	12.590	
19,300.00	8,494.00	17,760.49	7,328.00	126.73	123.85	66.58	-2,776.27	11,072.49	2,897.83	2,665.64	232.19	12.480	
19,355.95	8,494.00	17,763.11	7,328.00	127.34	123.87	66.58	-2,776.25	11,075.10	2,898.36	2,665.58	232.78	12.451 ES, SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B06) Koala 9 Fed Com 124H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis		Distance		Rule Assigned:		Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
15,700.00	8,494.00	14,417.14	7,328.00	87.99	84.56	73.84	-4,120.03	7,481.30	4,139.88	3,972.72	167.16	24.767	CC
15,800.00	8,494.00	14,517.14	7,328.00	89.05	85.63	73.84	-4,119.37	7,581.30	4,139.95	3,970.74	169.20	24.467	
15,900.00	8,494.00	14,617.14	7,328.00	90.10	86.70	73.84	-4,118.71	7,681.30	4,140.02	3,968.76	171.26	24.175	
16,000.00	8,494.00	14,717.14	7,328.00	91.16	87.77	73.84	-4,118.04	7,781.29	4,140.09	3,966.78	173.31	23.888	
16,100.00	8,494.00	14,817.14	7,328.00	92.22	88.85	73.84	-4,117.38	7,881.29	4,140.15	3,964.79	175.37	23.609	
16,200.00	8,494.00	14,917.14	7,328.00	93.29	89.92	73.84	-4,116.72	7,981.29	4,140.22	3,962.80	177.42	23.335	
16,300.00	8,494.00	15,017.14	7,328.00	94.35	91.00	73.84	-4,116.06	8,081.29	4,140.29	3,960.81	179.49	23.067	
16,400.00	8,494.00	15,117.14	7,328.00	95.42	92.07	73.85	-4,115.39	8,181.29	4,140.36	3,958.81	181.55	22.806	
16,500.00	8,494.00	15,217.14	7,328.00	96.48	93.15	73.85	-4,114.73	8,281.28	4,140.43	3,956.81	183.62	22.549	
16,600.00	8,494.00	15,317.14	7,328.00	97.55	94.23	73.85	-4,114.07	8,381.28	4,140.50	3,954.81	185.68	22.299	
16,700.00	8,494.00	15,417.14	7,328.00	98.62	95.31	73.85	-4,113.40	8,481.28	4,140.57	3,952.81	187.76	22.053	
16,800.00	8,494.00	15,517.14	7,328.00	99.69	96.39	73.85	-4,112.74	8,581.28	4,140.63	3,950.81	189.83	21.813	
16,900.00	8,494.00	15,617.14	7,328.00	100.76	97.47	73.85	-4,112.08	8,681.27	4,140.70	3,948.80	191.90	21.577	
17,000.00	8,494.00	15,717.14	7,328.00	101.83	98.55	73.85	-4,111.42	8,781.27	4,140.77	3,946.79	193.98	21.346	
17,100.00	8,494.00	15,817.14	7,328.00	102.91	99.64	73.85	-4,110.75	8,881.27	4,140.84	3,944.78	196.06	21.120	
17,200.00	8,494.00	15,917.14	7,328.00	103.98	100.72	73.85	-4,110.09	8,981.27	4,140.91	3,942.77	198.14	20.899	
17,300.00	8,494.00	16,017.14	7,328.00	105.06	101.81	73.85	-4,109.43	9,081.27	4,140.98	3,940.76	200.22	20.682	
17,400.00	8,494.00	16,117.14	7,328.00	106.13	102.89	73.85	-4,108.76	9,181.26	4,141.05	3,938.74	202.31	20.469	
17,500.00	8,494.00	16,217.14	7,328.00	107.21	103.98	73.85	-4,108.10	9,281.26	4,141.11	3,936.72	204.39	20.261	
17,600.00	8,494.00	16,317.14	7,328.00	108.29	105.07	73.85	-4,107.44	9,381.26	4,141.18	3,934.70	206.48	20.056	
17,700.00	8,494.00	16,417.14	7,328.00	109.37	106.15	73.85	-4,106.78	9,481.26	4,141.25	3,932.68	208.57	19.856	
17,800.00	8,494.00	16,517.14	7,328.00	110.45	107.24	73.85	-4,106.11	9,581.25	4,141.32	3,930.66	210.66	19.659	
17,900.00	8,494.00	16,617.14	7,328.00	111.53	108.33	73.85	-4,105.45	9,681.25	4,141.39	3,928.64	212.75	19.466	
18,000.00	8,494.00	16,717.14	7,328.00	112.61	109.42	73.85	-4,104.79	9,781.25	4,141.46	3,926.61	214.84	19.277	
18,100.00	8,494.00	16,817.14	7,328.00	113.69	110.51	73.85	-4,104.12	9,881.25	4,141.53	3,924.59	216.94	19.091	
18,200.00	8,494.00	16,917.14	7,328.00	114.77	111.60	73.85	-4,103.46	9,981.25	4,141.59	3,922.56	219.03	18.908	
18,300.00	8,494.00	17,017.14	7,328.00	115.86	112.70	73.85	-4,102.80	10,081.24	4,141.66	3,920.53	221.13	18.729	
18,400.00	8,494.00	17,117.14	7,328.00	116.94	113.79	73.85	-4,102.14	10,181.24	4,141.73	3,918.50	223.23	18.554	
18,500.00	8,494.00	17,217.14	7,328.00	118.03	114.88	73.85	-4,101.47	10,281.24	4,141.80	3,916.47	225.33	18.381	
18,600.00	8,494.00	17,317.14	7,328.00	119.11	115.98	73.85	-4,100.81	10,381.24	4,141.87	3,914.44	227.43	18.211	
18,700.00	8,494.00	17,417.14	7,328.00	120.20	117.07	73.85	-4,100.15	10,481.23	4,141.94	3,912.40	229.53	18.045	
18,800.00	8,494.00	17,517.14	7,328.00	121.29	118.16	73.85	-4,099.49	10,581.23	4,142.01	3,910.37	231.64	17.881	
18,900.00	8,494.00	17,617.14	7,328.00	122.38	119.26	73.85	-4,098.82	10,681.23	4,142.07	3,908.33	233.74	17.721	
19,000.00	8,494.00	17,717.14	7,328.00	123.46	120.36	73.85	-4,098.16	10,781.23	4,142.14	3,906.29	235.85	17.563	
19,100.00	8,494.00	17,817.14	7,328.00	124.55	121.45	73.85	-4,097.50	10,881.23	4,142.21	3,904.26	237.96	17.408	
19,200.00	8,494.00	17,917.14	7,328.00	125.64	122.55	73.85	-4,096.83	10,981.22	4,142.28	3,902.22	240.06	17.255	
19,200.02	8,494.00	17,917.16	7,328.00	125.64	122.55	73.85	-4,096.83	10,981.24	4,142.28	3,902.22	240.06	17.255	
19,300.00	8,494.00	17,993.15	7,328.00	126.73	123.38	73.85	-4,096.33	11,057.23	4,142.42	3,900.48	241.94	17.122	ES
19,355.95	8,494.00	17,993.15	7,328.00	127.34	123.38	73.85	-4,096.33	11,057.23	4,143.16	3,900.60	242.56	17.081	SF

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B07) Koala 9 Fed Com 113H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
15,700.00	8,494.00	13,319.16	6,303.00	87.99	83.36	50.67	-2,800.19	7,472.60	3,434.57	3,296.21	138.37	24.822	CC
15,800.00	8,494.00	13,419.16	6,303.00	89.05	84.44	50.67	-2,799.52	7,572.59	3,434.63	3,294.53	140.10	24.516	
15,900.00	8,494.00	13,519.16	6,303.00	90.10	85.53	50.67	-2,798.86	7,672.59	3,434.68	3,292.85	141.83	24.217	
16,000.00	8,494.00	13,619.16	6,303.00	91.16	86.61	50.67	-2,798.19	7,772.59	3,434.73	3,291.17	143.56	23.925	
16,100.00	8,494.00	13,719.16	6,303.00	92.22	87.69	50.67	-2,797.53	7,872.59	3,434.79	3,289.49	145.30	23.639	
16,200.00	8,494.00	13,819.16	6,303.00	93.29	88.78	50.67	-2,796.87	7,972.59	3,434.84	3,287.80	147.04	23.360	
16,300.00	8,494.00	13,919.16	6,303.00	94.35	89.86	50.67	-2,796.20	8,072.58	3,434.90	3,286.12	148.78	23.087	
16,400.00	8,494.00	14,019.16	6,303.00	95.42	90.95	50.67	-2,795.54	8,172.58	3,434.95	3,284.43	150.52	22.820	
16,500.00	8,494.00	14,119.16	6,303.00	96.48	92.04	50.67	-2,794.87	8,272.58	3,435.00	3,282.74	152.27	22.559	
16,600.00	8,494.00	14,219.16	6,303.00	97.55	93.13	50.67	-2,794.21	8,372.58	3,435.06	3,281.05	154.01	22.304	
16,700.00	8,494.00	14,319.16	6,303.00	98.62	94.22	50.67	-2,793.54	8,472.57	3,435.11	3,279.35	155.76	22.054	
16,800.00	8,494.00	14,419.16	6,303.00	99.69	95.31	50.67	-2,792.88	8,572.57	3,435.17	3,277.66	157.51	21.809	
16,900.00	8,494.00	14,519.16	6,303.00	100.76	96.40	50.67	-2,792.21	8,672.57	3,435.22	3,275.96	159.26	21.570	
17,000.00	8,494.00	14,619.16	6,303.00	101.83	97.49	50.67	-2,791.55	8,772.57	3,435.27	3,274.26	161.01	21.336	
17,100.00	8,494.00	14,719.16	6,303.00	102.91	98.58	50.68	-2,790.89	8,872.57	3,435.33	3,272.56	162.76	21.106	
17,200.00	8,494.00	14,819.16	6,303.00	103.98	99.67	50.68	-2,790.22	8,972.56	3,435.38	3,270.86	164.52	20.881	
17,300.00	8,494.00	14,919.16	6,303.00	105.06	100.77	50.68	-2,789.56	9,072.56	3,435.44	3,269.16	166.28	20.661	
17,400.00	8,494.00	15,019.16	6,303.00	106.13	101.86	50.68	-2,788.89	9,172.56	3,435.49	3,267.46	168.03	20.445	
17,500.00	8,494.00	15,119.16	6,303.00	107.21	102.95	50.68	-2,788.23	9,272.56	3,435.54	3,265.75	169.79	20.234	
17,600.00	8,494.00	15,219.16	6,303.00	108.29	104.05	50.68	-2,787.56	9,372.55	3,435.60	3,264.05	171.55	20.027	
17,700.00	8,494.00	15,319.16	6,303.00	109.37	105.14	50.68	-2,786.90	9,472.55	3,435.65	3,262.34	173.31	19.823	
17,800.00	8,494.00	15,419.16	6,303.00	110.45	106.24	50.68	-2,786.23	9,572.55	3,435.71	3,260.63	175.08	19.624	
17,900.00	8,494.00	15,519.16	6,303.00	111.53	107.34	50.68	-2,785.57	9,672.55	3,435.76	3,258.92	176.84	19.429	
18,000.00	8,494.00	15,619.16	6,303.00	112.61	108.44	50.68	-2,784.91	9,772.55	3,435.81	3,257.21	178.61	19.237	
18,100.00	8,494.00	15,719.16	6,303.00	113.69	109.53	50.68	-2,784.24	9,872.54	3,435.87	3,255.50	180.37	19.049	
18,200.00	8,494.00	15,819.16	6,303.00	114.77	110.63	50.68	-2,783.58	9,972.54	3,435.92	3,253.78	182.14	18.864	
18,300.00	8,494.00	15,919.16	6,303.00	115.86	111.73	50.68	-2,782.91	10,072.54	3,435.98	3,252.07	183.91	18.683	
18,400.00	8,494.00	16,019.16	6,303.00	116.94	112.83	50.69	-2,782.25	10,172.54	3,436.03	3,250.35	185.68	18.506	
18,500.00	8,494.00	16,119.16	6,303.00	118.03	113.93	50.69	-2,781.58	10,272.53	3,436.08	3,248.64	187.45	18.331	
18,600.00	8,494.00	16,219.16	6,303.00	119.11	115.03	50.69	-2,780.92	10,372.53	3,436.14	3,246.92	189.22	18.160	
18,700.00	8,494.00	16,319.16	6,303.00	120.20	116.13	50.69	-2,780.25	10,472.53	3,436.19	3,245.20	190.99	17.992	
18,800.00	8,494.00	16,419.16	6,303.00	121.29	117.23	50.69	-2,779.59	10,572.53	3,436.25	3,243.48	192.76	17.826	
18,900.00	8,494.00	16,519.16	6,303.00	122.38	118.33	50.69	-2,778.93	10,672.53	3,436.30	3,241.77	194.53	17.664	
19,000.00	8,494.00	16,619.16	6,303.00	123.46	119.43	50.69	-2,778.26	10,772.52	3,436.35	3,240.04	196.31	17.505	
19,100.00	8,494.00	16,719.16	6,303.00	124.55	120.54	50.69	-2,777.60	10,872.52	3,436.41	3,238.32	198.08	17.348	
19,200.00	8,494.00	16,819.16	6,303.00	125.64	121.64	50.69	-2,776.93	10,972.52	3,436.46	3,236.60	199.86	17.194	
19,300.00	8,494.00	16,919.16	6,303.00	126.73	122.74	50.69	-2,776.27	11,072.52	3,436.52	3,234.88	201.64	17.043	
19,355.95	8,494.00	16,922.61	6,303.00	127.34	122.78	50.69	-2,776.24	11,075.97	3,436.95	3,234.80	202.14	17.002	ES, SF

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: (Permit) Koala 9 Fed Com - (B08) Koala 9 Fed Com 114H - Permit - APD-Rev00													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+IFR1+SAG+FDIR (SQC2)													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
17,200.00	8,494.00	14,813.99	6,303.00	103.98	99.13	61.31	-4,110.07	8,981.23	4,534.22	4,351.44	182.79	24.806	CC
17,300.00	8,494.00	14,913.99	6,303.00	105.06	100.22	61.31	-4,109.41	9,081.22	4,534.29	4,349.56	184.72	24.547	
17,400.00	8,494.00	15,013.99	6,303.00	106.13	101.32	61.31	-4,108.75	9,181.22	4,534.35	4,347.69	186.66	24.292	
17,500.00	8,494.00	15,113.99	6,303.00	107.21	102.41	61.31	-4,108.08	9,281.22	4,534.41	4,345.81	188.60	24.043	
17,600.00	8,494.00	15,213.99	6,303.00	108.29	103.51	61.31	-4,107.42	9,381.22	4,534.48	4,343.94	190.54	23.798	
17,700.00	8,494.00	15,313.99	6,303.00	109.37	104.60	61.31	-4,106.76	9,481.21	4,534.54	4,342.06	192.48	23.558	
17,800.00	8,494.00	15,413.99	6,303.00	110.45	105.70	61.31	-4,106.10	9,581.21	4,534.60	4,340.18	194.43	23.323	
17,900.00	8,494.00	15,513.99	6,303.00	111.53	106.80	61.31	-4,105.44	9,681.21	4,534.67	4,338.30	196.37	23.092	
18,000.00	8,494.00	15,613.99	6,303.00	112.61	107.89	61.31	-4,104.77	9,781.21	4,534.73	4,336.41	198.32	22.866	
18,100.00	8,494.00	15,713.99	6,303.00	113.69	108.99	61.31	-4,104.11	9,881.21	4,534.79	4,334.53	200.27	22.644	
18,200.00	8,494.00	15,813.99	6,303.00	114.77	110.09	61.31	-4,103.45	9,981.20	4,534.86	4,332.64	202.21	22.426	
18,300.00	8,494.00	15,913.99	6,303.00	115.86	111.19	61.31	-4,102.79	10,081.20	4,534.92	4,330.76	204.16	22.212	
18,400.00	8,494.00	16,013.99	6,303.00	116.94	112.29	61.31	-4,102.13	10,181.20	4,534.98	4,328.87	206.11	22.002	
18,500.00	8,494.00	16,113.99	6,303.00	118.03	113.39	61.31	-4,101.47	10,281.20	4,535.05	4,326.98	208.07	21.796	
18,600.00	8,494.00	16,213.99	6,303.00	119.11	114.49	61.31	-4,100.80	10,381.19	4,535.11	4,325.09	210.02	21.594	
18,700.00	8,494.00	16,313.99	6,303.00	120.20	115.59	61.31	-4,100.14	10,481.19	4,535.18	4,323.20	211.97	21.395	
18,800.00	8,494.00	16,413.99	6,303.00	121.29	116.69	61.31	-4,099.48	10,581.19	4,535.24	4,321.31	213.93	21.200	
18,900.00	8,494.00	16,513.99	6,303.00	122.38	117.79	61.31	-4,098.82	10,681.19	4,535.30	4,319.42	215.88	21.008	
19,000.00	8,494.00	16,613.99	6,303.00	123.46	118.89	61.31	-4,098.16	10,781.19	4,535.37	4,317.52	217.84	20.820	
19,100.00	8,494.00	16,713.99	6,303.00	124.55	119.99	61.31	-4,097.50	10,881.18	4,535.43	4,315.63	219.80	20.634	
19,200.00	8,494.00	16,813.99	6,303.00	125.64	121.10	61.32	-4,096.83	10,981.18	4,535.49	4,313.74	221.76	20.452	
19,200.00	8,494.00	16,813.99	6,303.00	125.64	121.10	61.32	-4,096.83	10,981.18	4,535.49	4,313.74	221.76	20.452	
19,300.00	8,494.00	16,890.04	6,303.00	126.73	121.94	61.32	-4,096.33	11,057.23	4,535.62	4,312.11	223.51	20.293	ES
19,355.95	8,494.00	16,890.04	6,303.00	127.34	121.94	61.32	-4,096.33	11,057.23	4,536.30	4,312.20	224.10	20.243	SF

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W02_GOVERNMENT AO COM #001_1524032 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 121-INC-ONLY													Offset Well Error: 0.00 usft
Rule Assigned:													
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
6,500.00	6,498.15	6,470.93	6,465.15	22.65	169.29	-142.06	-3,846.88	-2,932.55	4,788.98	4,597.04	191.94	24.950	
6,566.51	6,564.86	6,537.75	6,531.59	22.89	174.16	-142.05	-3,845.77	-2,932.55	4,788.10	4,591.05	197.05	24.298	
6,600.00	6,598.15	6,542.63	6,536.47	23.01	174.52	-142.05	-3,845.79	-2,932.55	4,788.20	4,590.68	197.52	24.241	
6,700.00	6,698.15	6,672.19	6,665.15	23.37	183.43	-142.06	-3,846.88	-2,932.55	4,788.98	4,582.18	206.80	23.158	
6,751.49	6,749.64	6,723.67	6,716.54	23.55	186.61	-142.05	-3,844.96	-2,932.55	4,787.46	4,577.29	210.16	22.780 CC	
6,800.00	6,798.15	6,736.90	6,729.75	23.72	187.43	-142.05	-3,845.02	-2,932.55	4,787.64	4,576.49	211.15	22.674	
6,900.00	6,898.15	6,861.99	6,854.24	24.08	194.58	-142.05	-3,845.65	-2,932.55	4,788.02	4,569.36	218.66	21.897	
7,000.00	6,998.15	6,973.19	6,965.15	24.44	199.98	-142.06	-3,846.88	-2,932.55	4,788.98	4,564.56	224.42	21.339	
7,100.00	7,098.15	7,073.43	7,065.15	24.79	204.29	-142.06	-3,846.88	-2,932.55	4,788.98	4,559.90	229.08	20.905	
7,200.00	7,198.15	7,173.55	7,165.15	25.15	208.17	-142.06	-3,846.88	-2,932.55	4,788.98	4,555.66	233.32	20.526	
7,286.92	7,285.07	7,260.42	7,251.98	25.46	211.40	-142.05	-3,845.26	-2,932.55	4,787.69	4,550.83	236.87	20.213	
7,300.00	7,298.15	7,267.72	7,259.27	25.51	211.68	-142.05	-3,845.26	-2,932.55	4,787.70	4,550.52	237.18	20.186	
7,400.00	7,398.15	7,323.52	7,315.05	25.87	213.76	-142.05	-3,845.68	-2,932.55	4,788.29	4,548.68	239.61	19.984	
7,500.00	7,498.15	7,467.69	7,458.98	26.22	218.73	-142.05	-3,846.05	-2,932.55	4,788.32	4,543.37	244.95	19.548	
7,600.00	7,598.15	7,573.96	7,565.15	26.58	222.04	-142.06	-3,846.88	-2,932.55	4,788.98	4,540.36	248.62	19.262	
7,700.00	7,698.15	7,673.96	7,665.15	26.94	224.92	-142.06	-3,846.88	-2,932.55	4,788.98	4,537.13	251.85	19.015	
7,766.94	7,765.09	7,740.90	7,732.06	27.18	226.84	-142.05	-3,845.12	-2,932.55	4,787.59	4,533.57	254.01	18.848	
7,800.00	7,798.15	7,765.84	7,756.99	27.29	227.56	-142.05	-3,845.15	-2,932.55	4,787.62	4,532.77	254.85	18.786	
7,900.00	7,898.15	7,841.29	7,832.43	27.65	229.72	-142.05	-3,845.56	-2,932.55	4,788.04	4,530.67	257.37	18.604	
7,911.80	7,909.95	7,850.19	7,841.33	27.69	229.98	-142.05	-3,845.64	-2,932.55	4,788.13	4,530.46	257.67	18.583	
7,950.00	7,948.13	7,879.00	7,870.13	27.83	230.81	111.28	-3,845.95	-2,932.55	4,788.91	4,530.29	258.62	18.517	
8,000.00	7,997.81	7,973.83	7,964.81	28.00	233.38	111.18	-3,846.88	-2,932.55	4,791.45	4,530.07	261.38	18.331 ES	
8,050.00	8,046.82	8,022.84	8,013.82	28.17	234.55	110.96	-3,846.88	-2,932.55	4,795.04	4,532.32	262.72	18.252	
8,100.00	8,094.79	8,065.62	8,056.58	28.34	235.57	110.61	-3,846.03	-2,932.55	4,799.54	4,535.64	263.91	18.186	
8,150.00	8,141.35	8,096.46	8,087.42	28.50	236.31	110.08	-3,846.14	-2,932.55	4,806.41	4,541.61	264.81	18.151	
8,200.00	8,186.15	8,126.17	8,117.13	28.67	237.02	109.41	-3,846.36	-2,932.55	4,814.99	4,549.32	265.67	18.124	
8,250.00	8,228.85	8,204.94	8,195.85	28.82	238.67	108.91	-3,846.88	-2,932.55	4,825.10	4,557.61	267.49	18.039	
8,300.00	8,269.13	8,245.22	8,236.13	28.98	239.39	108.08	-3,846.88	-2,932.55	4,836.47	4,568.11	268.35	18.023	
8,350.00	8,306.67	8,282.76	8,273.67	29.13	240.06	107.10	-3,846.88	-2,932.55	4,849.32	4,580.15	269.17	18.016 SF	
8,400.00	8,341.19	8,317.28	8,308.19	29.28	240.67	105.97	-3,846.88	-2,932.55	4,863.61	4,593.69	269.92	18.019	
8,450.00	8,372.42	8,345.97	8,336.87	29.42	241.18	104.64	-3,846.17	-2,932.55	4,878.75	4,608.19	270.56	18.032	
8,500.00	8,400.14	8,369.16	8,360.07	29.56	241.60	103.12	-3,846.20	-2,932.55	4,895.79	4,624.69	271.10	18.059	
8,511.80	8,406.15	8,374.19	8,365.09	29.59	241.69	102.73	-3,846.21	-2,932.55	4,899.99	4,628.77	271.22	18.067	
8,550.00	8,424.29	8,389.40	8,380.30	29.69	241.96	102.81	-3,846.25	-2,932.55	4,914.64	4,643.06	271.58	18.097	
8,600.00	8,445.07	8,406.82	8,397.72	29.82	242.27	102.35	-3,846.31	-2,932.55	4,936.51	4,664.51	272.00	18.149	
8,650.00	8,462.33	8,421.31	8,412.21	29.96	242.53	101.25	-3,846.37	-2,932.55	4,961.27	4,688.91	272.37	18.215	
8,700.00	8,475.94	8,432.74	8,423.64	30.08	242.73	99.49	-3,846.43	-2,932.55	4,988.73	4,716.06	272.67	18.296	
8,750.00	8,485.80	8,441.02	8,431.92	30.21	242.88	97.04	-3,846.47	-2,932.55	5,018.66	4,745.75	272.91	18.390	
8,800.00	8,491.83	8,446.09	8,436.99	30.33	242.97	93.85	-3,846.50	-2,932.55	5,050.81	4,777.73	273.08	18.496	
8,852.76	8,494.00	8,447.91	8,438.81	30.44	243.00	89.65	-3,846.51	-2,932.55	5,086.84	4,813.65	273.19	18.620	
8,900.00	8,494.00	8,447.91	8,438.81	30.55	243.00	89.65	-3,846.51	-2,932.55	5,120.07	4,846.82	273.25	18.737	
9,000.00	8,494.00	8,447.91	8,438.80	30.81	243.00	89.65	-3,846.51	-2,932.55	5,191.15	4,917.75	273.40	18.988	
9,100.00	8,494.00	8,447.90	8,438.80	31.10	243.00	89.65	-3,846.51	-2,932.55	5,263.17	4,989.61	273.56	19.240	
9,200.00	8,494.00	8,447.90	8,438.80	31.43	243.00	89.65	-3,846.51	-2,932.55	5,336.08	5,062.36	273.73	19.494	
9,300.00	8,494.00	8,447.89	8,438.79	31.80	243.00	89.65	-3,846.51	-2,932.55	5,409.87	5,135.96	273.90	19.751	
9,400.00	8,494.00	8,447.89	8,438.79	32.21	243.00	89.65	-3,846.51	-2,932.55	5,484.48	5,210.39	274.09	20.010	
9,500.00	8,494.00	8,447.89	8,438.78	32.64	243.00	89.65	-3,846.51	-2,932.55	5,559.90	5,285.61	274.29	20.270	
9,600.00	8,494.00	8,447.88	8,438.78	33.11	243.00	89.65	-3,846.51	-2,932.55	5,636.07	5,361.58	274.49	20.533	
9,700.00	8,494.00	8,447.88	8,438.78	33.61	243.00	89.65	-3,846.51	-2,932.55	5,712.99	5,438.29	274.70	20.797	
9,800.00	8,494.00	8,447.88	8,438.77	34.14	243.00	89.65	-3,846.51	-2,932.55	5,790.60	5,515.69	274.91	21.064	
9,900.00	8,494.00	8,447.87	8,438.77	34.70	243.00	89.65	-3,846.51	-2,932.55	5,868.90	5,593.77	275.13	21.332	
10,000.00	8,494.00	8,447.87	8,438.77	35.28	243.00	89.65	-3,846.51	-2,932.55	5,947.84	5,672.50	275.34	21.601	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W02_GOVERNMENT AO COM #001_1524032 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 121-INC-ONLY													Offset Well Error: 0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
		Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
10,100.00	8,494.00	8,447.87	8,438.76	35.89	243.00	89.65	-3,846.51	-2,932.55	6,027.41	5,751.85	275.57	21.873	
10,200.00	8,494.00	8,447.86	8,438.76	36.53	243.00	89.65	-3,846.51	-2,932.55	6,107.59	5,831.80	275.79	22.146	
10,300.00	8,494.00	8,447.86	8,438.75	37.19	243.00	89.65	-3,846.51	-2,932.55	6,188.33	5,912.32	276.01	22.421	
10,400.00	8,494.00	8,447.85	8,438.75	37.87	243.00	89.65	-3,846.51	-2,932.55	6,269.64	5,993.40	276.24	22.697	
10,500.00	8,494.00	8,447.85	8,438.75	38.57	243.00	89.65	-3,846.51	-2,932.55	6,351.48	6,075.01	276.46	22.974	
10,600.00	8,494.00	8,447.85	8,438.74	39.29	243.00	89.65	-3,846.51	-2,932.55	6,433.83	6,157.14	276.69	23.253	
10,700.00	8,494.00	8,447.84	8,438.74	40.02	243.00	89.65	-3,846.51	-2,932.55	6,516.67	6,239.76	276.91	23.533	
10,800.00	8,494.00	8,447.84	8,438.74	40.78	243.00	89.65	-3,846.51	-2,932.55	6,599.99	6,322.86	277.14	23.815	
10,900.00	8,494.00	8,447.84	8,438.73	41.55	243.00	89.65	-3,846.51	-2,932.55	6,683.77	6,406.41	277.36	24.098	
11,000.00	8,494.00	8,447.83	8,438.73	42.34	243.00	89.65	-3,846.51	-2,932.55	6,767.99	6,490.41	277.58	24.382	
11,100.00	8,494.00	8,447.83	8,438.73	43.14	243.00	89.65	-3,846.51	-2,932.55	6,852.63	6,574.83	277.80	24.667	
11,200.00	8,494.00	8,447.82	8,438.72	43.96	243.00	89.65	-3,846.51	-2,932.55	6,937.68	6,659.66	278.02	24.954	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W04_FEDERAL V #001_1526451 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 456-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
3,400.00	3,398.85	3,368.80	3,368.25	11.72	73.67	66.48	-1,188.75	-1,746.84	2,095.13	2,009.74	85.39	24.537	
3,500.00	3,498.70	3,462.29	3,461.72	12.05	75.74	66.59	-1,189.39	-1,746.84	2,093.31	2,005.51	87.80	23.842	
3,600.00	3,598.55	3,573.18	3,572.55	12.39	78.19	66.72	-1,190.55	-1,746.84	2,091.73	2,001.15	90.58	23.092	
3,700.00	3,698.40	3,673.03	3,672.40	12.74	80.31	66.86	-1,190.55	-1,746.84	2,089.56	1,996.51	93.05	22.457	
3,791.83	3,790.09	3,764.72	3,764.09	13.05	82.26	66.98	-1,190.55	-1,746.84	2,087.58	1,992.27	95.31	21.903	
3,800.00	3,798.25	3,772.88	3,772.25	13.08	82.44	66.99	-1,190.55	-1,746.84	2,087.41	1,991.90	95.51	21.855	
3,900.00	3,898.17	3,871.02	3,870.39	13.42	84.52	67.08	-1,190.11	-1,746.84	2,085.62	1,987.68	97.94	21.294	
3,985.23	3,983.38	3,954.49	3,953.86	13.72	86.30	67.10	-1,190.31	-1,746.84	2,085.22	1,985.20	100.02	20.849	
4,001.85	4,000.00	3,970.76	3,970.13	13.78	86.64	-122.50	-1,190.36	-1,746.84	2,085.23	1,984.81	100.42	20.765	
4,100.00	4,098.15	4,072.86	4,072.15	14.12	89.01	-122.50	-1,190.55	-1,746.84	2,085.33	1,982.19	103.14	20.219	
4,200.00	4,198.15	4,172.86	4,172.15	14.48	91.51	-122.50	-1,190.55	-1,746.84	2,085.33	1,979.34	105.99	19.675	
4,294.08	4,292.23	4,266.88	4,266.15	14.81	93.86	-122.47	-1,188.93	-1,746.84	2,084.46	1,975.79	108.67	19.182	
4,300.00	4,298.15	4,272.47	4,271.74	14.83	94.00	-122.47	-1,188.93	-1,746.84	2,084.46	1,975.63	108.83	19.154	
4,400.00	4,398.15	4,366.91	4,366.17	15.18	96.36	-122.47	-1,189.20	-1,746.84	2,084.61	1,973.07	111.54	18.689	
4,500.00	4,498.15	4,461.36	4,460.61	15.54	98.71	-122.49	-1,189.94	-1,746.84	2,085.04	1,970.78	114.25	18.250	
4,600.00	4,598.15	4,573.03	4,572.15	15.89	101.73	-122.50	-1,190.55	-1,746.84	2,085.33	1,967.70	117.63	17.729	
4,627.92	4,626.07	4,600.95	4,600.06	15.99	102.54	-122.49	-1,189.97	-1,746.84	2,085.02	1,966.49	118.53	17.591	
4,700.00	4,698.15	4,662.75	4,661.87	16.25	104.32	-122.50	-1,190.26	-1,746.84	2,085.20	1,964.63	120.56	17.295	
4,800.00	4,798.15	4,773.14	4,772.15	16.60	107.75	-122.50	-1,190.55	-1,746.84	2,085.33	1,960.97	124.36	16.769	
4,831.34	4,829.50	4,804.20	4,803.19	16.71	108.74	-122.47	-1,189.31	-1,746.84	2,084.66	1,959.20	125.46	16.616	
4,900.00	4,898.15	4,860.80	4,859.77	16.96	110.55	-122.48	-1,189.63	-1,746.84	2,084.87	1,957.37	127.50	16.351	
5,000.00	4,998.15	4,973.33	4,972.15	17.31	113.98	-122.50	-1,190.55	-1,746.84	2,085.33	1,954.03	131.29	15.883	
5,100.00	5,098.15	5,073.33	5,072.15	17.67	116.90	-122.50	-1,190.55	-1,746.84	2,085.33	1,950.76	134.56	15.497	
5,193.98	5,192.13	5,167.07	5,165.85	18.00	119.63	-122.45	-1,188.12	-1,746.84	2,084.02	1,946.39	137.63	15.142 CC	
5,200.00	5,198.15	5,172.61	5,171.38	18.02	119.79	-122.45	-1,188.12	-1,746.84	2,084.03	1,946.21	137.81	15.122	
5,300.00	5,298.15	5,264.53	5,263.28	18.38	122.47	-122.46	-1,188.52	-1,746.84	2,084.26	1,943.41	140.85	14.798	
5,400.00	5,398.15	5,356.49	5,355.21	18.73	125.15	-122.48	-1,189.58	-1,746.84	2,084.88	1,941.00	143.88	14.490	
5,500.00	5,498.15	5,473.64	5,472.15	19.09	128.32	-122.50	-1,190.55	-1,746.84	2,085.33	1,937.91	147.41	14.146	
5,600.00	5,598.15	5,573.64	5,572.15	19.45	130.84	-122.50	-1,190.55	-1,746.84	2,085.33	1,935.04	150.29	13.875	
5,686.78	5,684.94	5,660.42	5,658.91	19.76	133.03	-122.46	-1,188.65	-1,746.84	2,084.31	1,931.52	152.78	13.642	
5,700.00	5,698.15	5,672.79	5,671.28	19.80	133.34	-122.46	-1,188.66	-1,746.84	2,084.31	1,931.17	153.14	13.610	
5,800.00	5,798.15	5,766.40	5,764.88	20.16	135.70	-122.47	-1,189.00	-1,746.84	2,084.51	1,928.65	155.86	13.374	
5,900.00	5,898.15	5,860.04	5,858.49	20.51	138.06	-122.49	-1,189.88	-1,746.84	2,085.01	1,926.44	158.57	13.149	
6,000.00	5,998.15	5,973.81	5,972.15	20.87	140.73	-122.50	-1,190.55	-1,746.84	2,085.33	1,923.73	161.60	12.904	
6,100.00	6,098.15	6,073.81	6,072.15	21.23	142.94	-122.50	-1,190.55	-1,746.84	2,085.33	1,921.16	164.17	12.702	
6,183.56	6,181.71	6,157.32	6,155.65	21.52	144.79	-122.47	-1,189.20	-1,746.84	2,084.60	1,918.29	166.31	12.534	
6,200.00	6,198.15	6,173.00	6,171.33	21.58	145.14	-122.47	-1,189.20	-1,746.84	2,084.61	1,917.89	166.72	12.504	
6,300.00	6,298.15	6,268.32	6,266.64	21.94	147.25	-122.48	-1,189.47	-1,746.84	2,084.76	1,915.57	169.19	12.322	
6,400.00	6,398.15	6,363.65	6,361.97	22.30	149.36	-122.49	-1,190.14	-1,746.84	2,085.14	1,913.48	171.65	12.147	
6,500.00	6,498.15	6,473.90	6,472.15	22.65	151.87	-122.50	-1,190.55	-1,746.84	2,085.33	1,910.81	174.52	11.949	
6,600.00	6,598.15	6,573.90	6,572.15	23.01	154.19	-122.50	-1,190.55	-1,746.84	2,085.33	1,908.13	177.19	11.769	
6,675.58	6,673.73	6,649.48	6,647.72	23.28	155.94	-122.48	-1,189.48	-1,746.84	2,084.75	1,905.54	179.21	11.633	
6,700.00	6,698.15	6,672.97	6,671.21	23.37	156.48	-122.48	-1,189.49	-1,746.84	2,084.76	1,904.91	179.84	11.592	
6,800.00	6,798.15	6,769.16	6,767.39	23.72	158.71	-122.48	-1,189.73	-1,746.84	2,084.90	1,902.47	182.43	11.429	
6,900.00	6,898.15	6,865.36	6,863.58	24.08	160.94	-122.50	-1,190.31	-1,746.84	2,085.22	1,900.20	185.01	11.271	
7,000.00	6,998.15	6,974.02	6,972.15	24.44	163.69	-122.50	-1,190.55	-1,746.84	2,085.33	1,897.20	188.13	11.085	
7,100.00	7,098.15	7,074.02	7,072.15	24.79	166.32	-122.50	-1,190.55	-1,746.84	2,085.33	1,894.22	191.11	10.912	
7,168.38	7,166.54	7,142.41	7,140.52	25.04	168.11	-122.47	-1,188.93	-1,746.84	2,084.46	1,891.31	193.14	10.792	
7,200.00	7,198.15	7,172.26	7,170.37	25.15	168.89	-122.47	-1,188.95	-1,746.84	2,084.47	1,890.43	194.04	10.742	
7,300.00	7,298.15	7,266.71	7,264.81	25.51	171.37	-122.48	-1,189.34	-1,746.84	2,084.69	1,887.82	196.87	10.589	
7,400.00	7,398.15	7,361.18	7,359.26	25.87	173.84	-122.50	-1,190.19	-1,746.84	2,085.18	1,885.47	199.70	10.441	
7,494.37	7,492.52	7,468.57	7,466.49	26.20	176.82	-122.49	-1,189.95	-1,746.84	2,085.01	1,881.98	203.02	10.270	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W04_FEDERAL V #001_1526451 - Inc Only - Inc Only												Offset Site Error:	0.00 usft
Survey Program:		456-INC-ONLY				Rule Assigned:				Offset Well Error:	0.00 usft		
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
7,500.00	7,498.15	7,473.19	7,471.11	26.22	176.95	-122.49	-1,189.95	-1,746.84	2,085.01	1,881.83	203.17	10.262	
7,600.00	7,598.15	7,574.31	7,572.15	26.58	179.85	-122.50	-1,190.55	-1,746.84	2,085.33	1,878.91	206.42	10.102	
7,700.00	7,698.15	7,674.31	7,672.15	26.94	182.78	-122.50	-1,190.55	-1,746.84	2,085.33	1,875.61	209.72	9.944	
7,800.00	7,798.15	7,774.31	7,772.15	27.29	185.72	-122.50	-1,190.55	-1,746.84	2,085.33	1,872.31	213.01	9.790	
7,840.30	7,838.45	7,812.93	7,810.74	27.44	186.86	-122.45	-1,188.43	-1,746.84	2,084.19	1,869.90	214.29	9.726	
7,900.00	7,898.15	7,868.26	7,866.06	27.65	188.48	-122.46	-1,188.62	-1,746.84	2,084.30	1,868.17	216.13	9.644	
7,911.80	7,909.95	7,879.20	7,876.99	27.69	188.80	-122.46	-1,188.68	-1,746.84	2,084.34	1,867.84	216.49	9.628	
7,950.00	7,948.13	7,914.59	7,912.37	27.83	189.84	130.88	-1,188.95	-1,746.84	2,085.33	1,867.66	217.67	9.580	ES
8,000.00	7,997.81	7,960.66	7,958.44	28.00	191.20	130.68	-1,189.43	-1,746.84	2,089.21	1,870.02	219.19	9.532	
8,050.00	8,046.82	8,006.15	8,003.91	28.17	192.53	130.33	-1,190.05	-1,746.84	2,096.03	1,875.33	220.69	9.497	
8,100.00	8,094.79	8,071.24	8,068.79	28.34	194.41	129.97	-1,190.55	-1,746.84	2,105.51	1,882.77	222.74	9.453	
8,150.00	8,141.35	8,117.80	8,115.35	28.50	195.74	129.37	-1,190.55	-1,746.84	2,117.60	1,893.38	224.23	9.444	SF
8,200.00	8,186.15	8,162.60	8,160.15	28.67	197.01	128.60	-1,190.55	-1,746.84	2,132.47	1,906.81	225.66	9.450	
8,250.00	8,228.85	8,205.30	8,202.85	28.82	198.22	127.62	-1,190.55	-1,746.84	2,150.05	1,923.04	227.02	9.471	
8,300.00	8,269.13	8,245.58	8,243.13	28.98	199.37	126.40	-1,190.55	-1,746.84	2,170.29	1,942.00	228.30	9.506	
8,350.00	8,306.67	8,282.78	8,280.29	29.13	200.42	124.95	-1,188.44	-1,746.84	2,192.08	1,962.60	229.48	9.552	
8,400.00	8,341.19	8,314.85	8,312.36	29.28	201.33	123.09	-1,188.49	-1,746.84	2,217.41	1,986.90	230.51	9.619	
8,450.00	8,372.42	8,343.93	8,341.43	29.42	202.16	120.86	-1,188.60	-1,746.84	2,245.12	2,013.67	231.45	9.700	
8,500.00	8,400.14	8,369.78	8,367.28	29.56	202.89	118.20	-1,188.74	-1,746.84	2,275.03	2,042.75	232.28	9.794	
8,511.80	8,406.15	8,375.39	8,372.89	29.59	203.05	117.50	-1,188.78	-1,746.84	2,282.39	2,049.92	232.46	9.818	
8,550.00	8,424.29	8,392.36	8,389.85	29.69	203.53	117.27	-1,188.91	-1,746.84	2,307.34	2,074.33	233.01	9.902	
8,600.00	8,445.07	8,411.80	8,409.29	29.82	204.09	116.19	-1,189.09	-1,746.84	2,342.71	2,109.07	233.64	10.027	
8,650.00	8,462.33	8,427.98	8,425.46	29.96	204.55	114.12	-1,189.25	-1,746.84	2,380.86	2,146.69	234.17	10.167	
8,700.00	8,475.94	8,440.75	8,438.23	30.08	204.91	110.83	-1,189.39	-1,746.84	2,421.43	2,186.85	234.58	10.322	
8,750.00	8,485.80	8,450.01	8,447.48	30.21	205.17	105.99	-1,189.51	-1,746.84	2,464.07	2,229.18	234.89	10.490	
8,800.00	8,491.83	8,455.67	8,453.14	30.33	205.33	99.16	-1,189.58	-1,746.84	2,508.40	2,273.32	235.09	10.670	
8,852.76	8,494.00	8,457.70	8,455.17	30.44	205.39	89.25	-1,189.60	-1,746.84	2,556.58	2,321.41	235.18	10.871	
8,900.00	8,494.00	8,457.70	8,455.17	30.55	205.39	89.25	-1,189.60	-1,746.84	2,600.29	2,365.09	235.20	11.056	
9,000.00	8,494.00	8,457.69	8,455.16	30.81	205.39	89.25	-1,189.60	-1,746.84	2,693.20	2,457.96	235.24	11.449	
9,100.00	8,494.00	8,457.68	8,455.15	31.10	205.39	89.25	-1,189.60	-1,746.84	2,786.61	2,551.32	235.29	11.843	
9,200.00	8,494.00	8,457.67	8,455.14	31.43	205.39	89.25	-1,189.60	-1,746.84	2,880.46	2,645.12	235.34	12.239	
9,300.00	8,494.00	8,457.66	8,455.13	31.80	205.39	89.25	-1,189.60	-1,746.84	2,974.71	2,739.31	235.39	12.637	
9,400.00	8,494.00	8,457.65	8,455.13	32.21	205.39	89.25	-1,189.60	-1,746.84	3,069.32	2,833.88	235.44	13.036	
9,500.00	8,494.00	8,457.64	8,455.12	32.64	205.39	89.25	-1,189.60	-1,746.84	3,164.26	2,928.77	235.49	13.437	
9,600.00	8,494.00	8,457.63	8,455.11	33.11	205.39	89.25	-1,189.60	-1,746.84	3,259.51	3,023.97	235.54	13.838	
9,700.00	8,494.00	8,457.63	8,455.10	33.61	205.39	89.24	-1,189.60	-1,746.84	3,355.03	3,119.44	235.59	14.241	
9,800.00	8,494.00	8,457.62	8,455.09	34.14	205.39	89.24	-1,189.60	-1,746.84	3,450.81	3,215.16	235.65	14.644	
9,900.00	8,494.00	8,457.61	8,455.08	34.70	205.39	89.24	-1,189.60	-1,746.84	3,546.82	3,311.12	235.70	15.048	
10,000.00	8,494.00	8,457.60	8,455.07	35.28	205.39	89.24	-1,189.60	-1,746.84	3,643.05	3,407.30	235.75	15.453	
10,100.00	8,494.00	8,457.59	8,455.06	35.89	205.39	89.24	-1,189.60	-1,746.84	3,739.47	3,503.67	235.80	15.859	
10,200.00	8,494.00	8,457.58	8,455.05	36.53	205.39	89.24	-1,189.60	-1,746.84	3,836.07	3,600.22	235.85	16.265	
10,300.00	8,494.00	8,457.57	8,455.05	37.19	205.39	89.24	-1,189.60	-1,746.84	3,932.85	3,696.95	235.90	16.672	
10,400.00	8,494.00	8,457.56	8,455.04	37.87	205.39	89.24	-1,189.60	-1,746.84	4,029.78	3,793.83	235.95	17.079	
10,500.00	8,494.00	8,457.55	8,455.03	38.57	205.39	89.24	-1,189.60	-1,746.84	4,126.86	3,890.86	236.01	17.486	
10,600.00	8,494.00	8,457.55	8,455.02	39.29	205.39	89.24	-1,189.60	-1,746.84	4,224.08	3,988.02	236.06	17.894	
10,700.00	8,494.00	8,457.54	8,455.01	40.02	205.39	89.24	-1,189.60	-1,746.84	4,321.42	4,085.31	236.11	18.303	
10,800.00	8,494.00	8,457.53	8,455.00	40.78	205.39	89.24	-1,189.60	-1,746.84	4,418.88	4,182.72	236.16	18.711	
10,900.00	8,494.00	8,457.52	8,454.99	41.55	205.39	89.24	-1,189.60	-1,746.84	4,516.46	4,280.24	236.21	19.120	
11,000.00	8,494.00	8,457.51	8,454.98	42.34	205.39	89.24	-1,189.60	-1,746.84	4,614.13	4,377.87	236.26	19.530	
11,100.00	8,494.00	8,457.50	8,454.97	43.14	205.38	89.24	-1,189.60	-1,746.84	4,711.91	4,475.59	236.32	19.939	
11,200.00	8,494.00	8,457.49	8,454.97	43.96	205.38	89.24	-1,189.60	-1,746.84	4,809.77	4,573.40	236.37	20.349	
11,300.00	8,494.00	8,457.48	8,454.96	44.79	205.38	89.24	-1,189.60	-1,746.84	4,907.72	4,671.30	236.42	20.759	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W04_FEDERAL V #001_1526451 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 456-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
11,400.00	8,494.00	8,457.47	8,454.95	45.64	205.38	89.24	-1,189.60	-1,746.84	5,005.76	4,769.28	236.47	21.168	
11,500.00	8,494.00	8,457.47	8,454.94	46.49	205.38	89.24	-1,189.60	-1,746.84	5,103.86	4,867.34	236.52	21.579	
11,600.00	8,494.00	8,457.46	8,454.93	47.36	205.38	89.23	-1,189.60	-1,746.84	5,202.05	4,965.47	236.58	21.989	
11,700.00	8,494.00	8,457.45	8,454.92	48.23	205.38	89.23	-1,189.60	-1,746.84	5,300.29	5,063.66	236.63	22.399	
11,800.00	8,494.00	8,457.44	8,454.91	49.12	205.38	89.23	-1,189.60	-1,746.84	5,398.61	5,161.92	236.68	22.809	
11,900.00	8,494.00	8,457.43	8,454.90	50.01	205.38	89.23	-1,189.60	-1,746.84	5,496.98	5,260.24	236.74	23.220	
12,000.00	8,494.00	8,457.42	8,454.90	50.92	205.38	89.23	-1,189.60	-1,746.84	5,595.41	5,358.62	236.79	23.630	
12,100.00	8,494.00	8,457.41	8,454.89	51.83	205.38	89.23	-1,189.60	-1,746.84	5,693.90	5,457.05	236.85	24.040	
12,200.00	8,494.00	8,457.40	8,454.88	52.75	205.38	89.23	-1,189.60	-1,746.84	5,792.44	5,555.54	236.90	24.451	
12,300.00	8,494.00	8,457.40	8,454.87	53.68	205.38	89.23	-1,189.60	-1,746.84	5,891.03	5,654.07	236.96	24.861	



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W05_FEDERAL V #002_1526702 - Inc Only - Inc Only													Offset Site Error:	0.00 usft
Survey Program:		400-INC-ONLY					Rule Assigned:				Offset Well Error:	0.00 usft		
Reference	Offset	Semi Major Axis			Offset Wellbore Centre		Distance				Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
2,900.00	2,899.61	2,876.86	2,876.47	10.05	61.88	104.37	129.49	-1,734.41	1,743.20	1,671.27	71.93	24.236	CC	
3,000.00	2,999.46	2,974.98	2,974.46	10.38	64.10	104.53	129.27	-1,734.41	1,744.55	1,670.08	74.47	23.425		
3,100.00	3,099.30	3,074.83	3,074.30	10.71	66.31	104.71	129.27	-1,734.41	1,745.94	1,668.92	77.02	22.668		
3,200.00	3,199.15	3,174.98	3,174.43	11.04	68.53	104.93	130.86	-1,734.41	1,747.50	1,667.92	79.58	21.960		
3,300.00	3,299.00	3,275.78	3,275.22	11.38	70.77	105.10	130.42	-1,734.41	1,748.88	1,666.73	82.15	21.290		
3,400.00	3,398.85	3,376.65	3,376.07	11.72	73.01	105.24	129.43	-1,734.41	1,750.22	1,665.50	84.72	20.659		
3,500.00	3,498.70	3,474.32	3,473.70	12.05	74.94	105.40	129.27	-1,734.41	1,751.66	1,664.66	87.00	20.135		
3,600.00	3,598.55	3,574.17	3,573.55	12.39	76.89	105.58	129.27	-1,734.41	1,753.13	1,663.85	89.28	19.635		
3,700.00	3,698.40	3,674.33	3,673.70	12.74	78.85	105.77	129.98	-1,734.41	1,754.69	1,663.11	91.58	19.160		
3,791.83	3,790.09	3,766.55	3,765.92	13.05	80.64	105.92	129.71	-1,734.41	1,756.04	1,662.35	93.69	18.743		
3,800.00	3,798.25	3,774.76	3,774.13	13.08	80.80	105.94	129.67	-1,734.41	1,756.16	1,662.28	93.88	18.706		
3,900.00	3,898.17	3,873.83	3,873.17	13.42	82.74	106.06	129.27	-1,734.41	1,757.21	1,661.05	96.16	18.274		
4,001.85	4,000.00	3,975.66	3,975.00	13.78	84.73	-83.49	129.27	-1,734.41	1,757.59	1,659.09	98.50	17.843		
4,100.00	4,098.15	4,073.81	4,073.15	14.12	86.65	-83.49	129.27	-1,734.41	1,757.59	1,656.82	100.77	17.442		
4,200.00	4,198.15	4,174.16	4,173.49	14.48	88.61	-83.46	130.07	-1,734.41	1,757.68	1,654.60	103.08	17.051		
4,300.00	4,298.15	4,274.68	4,274.01	14.83	90.57	-83.47	129.77	-1,734.41	1,757.64	1,652.24	105.40	16.676		
4,400.00	4,398.15	4,373.86	4,373.15	15.18	92.52	-83.49	129.27	-1,734.41	1,757.59	1,649.88	107.70	16.319		
4,500.00	4,498.15	4,473.86	4,473.15	15.54	94.65	-83.49	129.27	-1,734.41	1,757.59	1,647.40	110.19	15.951		
4,600.00	4,498.15	4,473.86	4,473.15	15.89	96.78	-83.49	129.27	-1,734.41	1,757.59	1,644.92	112.67	15.599		
4,700.00	4,498.15	4,474.20	4,473.48	16.25	98.91	-83.47	130.02	-1,734.41	1,757.67	1,642.51	115.16	15.263		
4,800.00	4,798.15	4,774.75	4,774.03	16.60	101.05	-83.48	129.72	-1,734.41	1,757.64	1,639.98	117.65	14.939		
4,900.00	4,898.15	4,873.93	4,873.15	16.96	103.18	-83.49	129.27	-1,734.41	1,757.59	1,637.45	120.13	14.630		
5,000.00	4,998.15	4,973.93	4,973.15	17.31	105.39	-83.49	129.27	-1,734.41	1,757.59	1,634.88	122.70	14.324		
5,100.00	5,098.15	5,073.96	5,073.17	17.67	107.61	-83.45	130.44	-1,734.41	1,757.72	1,632.45	125.27	14.031		
5,200.00	5,198.15	5,175.02	5,174.22	18.02	109.85	-83.46	130.17	-1,734.41	1,757.69	1,629.82	127.87	13.746		
5,300.00	5,298.15	5,276.09	5,275.27	18.38	112.09	-83.49	129.38	-1,734.41	1,757.60	1,627.14	130.46	13.472		
5,322.43	5,320.58	5,296.44	5,295.58	18.46	112.53	-83.49	129.27	-1,734.41	1,757.59	1,626.60	130.98	13.418		
5,400.00	5,398.15	5,374.14	5,373.27	18.73	114.18	-83.48	129.63	-1,734.41	1,757.63	1,624.71	132.91	13.224		
5,500.00	5,498.15	5,474.04	5,473.15	19.09	116.31	-83.49	129.27	-1,734.41	1,757.59	1,622.19	135.40	12.981		
5,600.00	5,598.15	5,574.04	5,573.15	19.45	118.44	-83.49	129.27	-1,734.41	1,757.59	1,619.71	137.88	12.747		
5,700.00	5,698.15	5,674.04	5,673.15	19.80	120.57	-83.49	129.27	-1,734.41	1,757.59	1,617.22	140.36	12.522		
5,800.00	5,798.15	5,774.52	5,773.62	20.16	122.70	-83.46	130.31	-1,734.41	1,757.70	1,614.85	142.86	12.304		
5,900.00	5,898.15	5,875.24	5,874.33	20.51	124.85	-83.47	129.90	-1,734.41	1,757.66	1,612.30	145.36	12.092		
6,000.00	5,998.15	5,974.12	5,973.15	20.87	126.97	-83.49	129.27	-1,734.41	1,757.59	1,609.75	147.84	11.888		
6,100.00	6,098.15	6,074.12	6,073.15	21.23	129.28	-83.49	129.27	-1,734.41	1,757.59	1,607.09	150.50	11.678		
6,200.00	6,198.15	6,174.12	6,173.15	21.58	131.58	-83.49	129.27	-1,734.41	1,757.59	1,604.43	153.16	11.476		
6,300.00	6,298.15	6,274.12	6,273.15	21.94	133.88	-83.49	129.27	-1,734.41	1,757.59	1,601.77	155.82	11.280		
6,300.25	6,298.40	6,274.37	6,273.40	21.94	133.89	-83.49	129.27	-1,734.41	1,757.59	1,601.76	155.82	11.279		
6,400.00	6,398.15	6,330.00	6,328.94	22.30	135.17	-83.49	129.27	-1,734.41	1,758.14	1,600.73	157.41	11.169	ES, SF	
6,500.00	6,498.15	6,330.00	6,328.94	22.65	135.17	-83.49	129.27	-1,734.41	1,763.49	1,606.18	157.31	11.210		
6,600.00	6,598.15	6,330.00	6,328.94	23.01	135.17	-83.49	129.27	-1,734.41	1,774.47	1,617.74	156.73	11.322		
6,700.00	6,698.15	6,330.00	6,328.94	23.37	135.17	-83.49	129.27	-1,734.41	1,790.98	1,635.27	155.71	11.502		
6,800.00	6,798.15	6,330.00	6,328.94	23.72	135.17	-83.49	129.27	-1,734.41	1,812.85	1,658.58	154.27	11.751		
6,900.00	6,898.15	6,330.00	6,328.94	24.08	135.17	-83.49	129.27	-1,734.41	1,839.91	1,687.45	152.46	12.068		
7,000.00	6,998.15	6,330.00	6,328.94	24.44	135.17	-83.49	129.27	-1,734.41	1,871.93	1,721.59	150.34	12.452		
7,100.00	7,098.15	6,330.00	6,328.94	24.79	135.17	-83.49	129.27	-1,734.41	1,908.65	1,760.71	147.94	12.901		
7,200.00	7,198.15	6,330.00	6,328.94	25.15	135.17	-83.49	129.27	-1,734.41	1,949.82	1,804.48	145.34	13.416		
7,300.00	7,298.15	6,330.00	6,328.94	25.51	135.17	-83.49	129.27	-1,734.41	1,995.16	1,852.58	142.57	13.994		
7,400.00	7,398.15	6,330.00	6,328.94	25.87	135.17	-83.49	129.27	-1,734.41	2,044.38	1,904.69	139.69	14.635		
7,500.00	7,498.15	6,330.00	6,328.94	26.22	135.17	-83.49	129.27	-1,734.41	2,097.22	1,960.48	136.74	15.337		
7,600.00	7,598.15	6,330.00	6,328.94	26.58	135.17	-83.49	129.27	-1,734.41	2,153.41	2,019.65	133.75	16.100		
7,700.00	7,698.15	6,330.00	6,328.94	26.94	135.17	-83.49	129.27	-1,734.41	2,212.69	2,081.93	130.77	16.921		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W05_FEDERAL V #002_1526702 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 400-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
7,800.00	7,798.15	6,330.00	6,328.94	27.29	135.17	-83.49	129.27	-1,734.41	2,274.83	2,147.02	127.81	17.799	
7,900.00	7,898.15	6,330.00	6,328.94	27.65	135.17	-83.49	129.27	-1,734.41	2,339.59	2,214.70	124.89	18.733	
7,911.80	7,909.95	6,330.00	6,328.94	27.69	135.17	-83.49	129.27	-1,734.41	2,347.40	2,222.84	124.55	18.847	
7,950.00	7,948.13	6,330.00	6,328.94	27.83	135.17	169.25	129.27	-1,734.41	2,373.80	2,250.31	123.49	19.222	
8,000.00	7,997.81	6,330.00	6,328.94	28.00	135.17	168.13	129.27	-1,734.41	2,411.41	2,289.17	122.24	19.727	
8,050.00	8,046.82	6,330.00	6,328.94	28.17	135.17	166.60	129.27	-1,734.41	2,452.06	2,330.92	121.15	20.240	
8,100.00	8,094.79	6,330.00	6,328.94	28.34	135.17	164.43	129.27	-1,734.41	2,495.32	2,375.09	120.22	20.756	
8,150.00	8,141.35	6,330.00	6,328.94	28.50	135.17	161.22	129.27	-1,734.41	2,540.71	2,421.24	119.48	21.266	
8,200.00	8,186.15	6,330.00	6,328.94	28.67	135.17	156.10	129.27	-1,734.41	2,587.81	2,468.91	118.90	21.764	
8,250.00	8,228.85	6,330.00	6,328.94	28.82	135.17	147.02	129.27	-1,734.41	2,636.16	2,517.65	118.51	22.245	
8,300.00	8,269.13	6,330.00	6,328.94	28.98	135.17	128.64	129.27	-1,734.41	2,685.34	2,567.06	118.28	22.703	
8,350.00	8,306.67	6,330.00	6,328.94	29.13	135.17	92.15	129.27	-1,734.41	2,734.94	2,616.72	118.22	23.134	
8,400.00	8,341.19	6,330.00	6,328.94	29.28	135.17	53.54	129.27	-1,734.41	2,784.58	2,666.25	118.33	23.533	
8,450.00	8,372.42	6,330.00	6,328.94	29.42	135.17	33.28	129.27	-1,734.41	2,833.87	2,715.29	118.58	23.898	
8,500.00	8,400.14	6,330.00	6,328.94	29.56	135.17	23.40	129.27	-1,734.41	2,882.48	2,763.51	118.98	24.227	
8,511.80	8,406.15	6,330.00	6,328.94	29.59	135.17	21.83	129.27	-1,734.41	2,893.81	2,774.73	119.09	24.300	
8,550.00	8,424.29	6,330.00	6,328.94	29.69	135.17	13.91	129.27	-1,734.41	2,930.20	2,810.70	119.50	24.520	
8,600.00	8,445.07	6,330.00	6,328.94	29.82	135.17	6.51	129.27	-1,734.41	2,976.98	2,856.84	120.14	24.779	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W06_FEDERAL V #003_1526867 - Depth Only - Depth Only													Offset Site Error:	0.00 usft
Survey Program:		6300-INC-ONLY				Rule Assigned:			Offset Well Error:				0.00 usft	
Reference		Offset		Semi Major Axis		Offset Wellbore Centre		Distance		Warning				
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
2,700.00	2,699.91	2,676.91	2,676.91	9.39	169.09	83.73	-1,200.49	-4,202.32	4,369.86	4,191.38	178.48	24.484		
2,710.01	2,709.91	2,686.91	2,686.91	9.43	169.72	83.74	-1,200.49	-4,202.32	4,369.80	4,190.66	179.14	24.393		
2,800.00	2,799.76	2,776.76	2,776.76	9.72	175.39	83.81	-1,200.49	-4,202.32	4,369.26	4,184.15	185.11	23.603		
2,900.00	2,899.61	2,876.61	2,876.61	10.05	181.70	83.88	-1,200.49	-4,202.32	4,368.67	4,176.93	191.75	22.784		
3,000.00	2,999.46	2,976.46	2,976.46	10.38	188.01	83.95	-1,200.49	-4,202.32	4,368.09	4,169.71	198.38	22.018		
3,100.00	3,099.30	3,076.30	3,076.30	10.71	194.31	84.02	-1,200.49	-4,202.32	4,367.51	4,162.49	205.02	21.303		
3,200.00	3,199.15	3,176.15	3,176.15	11.04	200.62	84.09	-1,200.49	-4,202.32	4,366.94	4,155.28	211.66	20.632		
3,300.00	3,299.00	3,276.00	3,276.00	11.38	206.93	84.16	-1,200.49	-4,202.32	4,366.38	4,148.07	218.31	20.001		
3,400.00	3,398.85	3,375.85	3,375.85	11.72	213.24	84.24	-1,200.49	-4,202.32	4,365.82	4,140.87	224.95	19.408		
3,500.00	3,498.70	3,475.70	3,475.70	12.05	219.54	84.31	-1,200.49	-4,202.32	4,365.27	4,133.68	231.60	18.849		
3,600.00	3,598.55	3,575.55	3,575.55	12.39	225.85	84.38	-1,200.49	-4,202.32	4,364.73	4,126.49	238.24	18.320		
3,700.00	3,698.40	3,675.40	3,675.40	12.74	232.16	84.45	-1,200.49	-4,202.32	4,364.20	4,119.30	244.89	17.821		
3,791.83	3,790.09	3,767.09	3,767.09	13.05	237.95	84.52	-1,200.49	-4,202.32	4,363.71	4,112.71	251.00	17.385		
3,800.00	3,798.25	3,775.25	3,775.25	13.08	238.46	84.52	-1,200.49	-4,202.32	4,363.67	4,112.13	251.54	17.348		
3,900.00	3,898.17	3,875.17	3,875.17	13.42	244.77	84.57	-1,200.49	-4,202.32	4,363.29	4,105.09	258.20	16.899		
4,001.85	4,000.00	3,977.00	3,977.00	13.78	251.21	-105.02	-1,200.49	-4,202.32	4,363.16	4,098.18	264.98	16.466		
4,100.00	4,098.15	4,075.15	4,075.15	14.12	257.41	-105.02	-1,200.49	-4,202.32	4,363.16	4,091.63	271.53	16.069		
4,200.00	4,198.15	4,175.15	4,175.15	14.48	263.72	-105.02	-1,200.49	-4,202.32	4,363.16	4,084.96	278.20	15.684		
4,300.00	4,298.15	4,275.15	4,275.15	14.83	270.04	-105.02	-1,200.49	-4,202.32	4,363.16	4,078.29	284.87	15.316		
4,400.00	4,398.15	4,375.15	4,375.15	15.18	276.36	-105.02	-1,200.49	-4,202.32	4,363.16	4,071.62	291.54	14.966		
4,500.00	4,498.15	4,475.15	4,475.15	15.54	282.67	-105.02	-1,200.49	-4,202.32	4,363.16	4,064.95	298.21	14.631		
4,600.00	4,598.15	4,575.15	4,575.15	15.89	288.99	-105.02	-1,200.49	-4,202.32	4,363.16	4,058.28	304.88	14.311		
4,700.00	4,698.15	4,675.15	4,675.15	16.25	295.31	-105.02	-1,200.49	-4,202.32	4,363.16	4,051.61	311.55	14.005		
4,800.00	4,798.15	4,775.15	4,775.15	16.60	301.62	-105.02	-1,200.49	-4,202.32	4,363.16	4,044.94	318.22	13.711		
4,900.00	4,898.15	4,875.15	4,875.15	16.96	307.94	-105.02	-1,200.49	-4,202.32	4,363.16	4,038.27	324.90	13.429		
5,000.00	4,998.15	4,975.15	4,975.15	17.31	314.26	-105.02	-1,200.49	-4,202.32	4,363.16	4,031.60	331.57	13.159		
5,100.00	5,098.15	5,075.15	5,075.15	17.67	320.57	-105.02	-1,200.49	-4,202.32	4,363.16	4,024.92	338.24	12.900		
5,200.00	5,198.15	5,175.15	5,175.15	18.02	326.89	-105.02	-1,200.49	-4,202.32	4,363.16	4,018.25	344.91	12.650		
5,300.00	5,298.15	5,275.15	5,275.15	18.38	333.20	-105.02	-1,200.49	-4,202.32	4,363.16	4,011.58	351.58	12.410		
5,400.00	5,398.15	5,375.15	5,375.15	18.73	339.52	-105.02	-1,200.49	-4,202.32	4,363.16	4,004.91	358.25	12.179		
5,500.00	5,498.15	5,475.15	5,475.15	19.09	345.84	-105.02	-1,200.49	-4,202.32	4,363.16	3,998.24	364.93	11.956		
5,600.00	5,598.15	5,575.15	5,575.15	19.45	352.15	-105.02	-1,200.49	-4,202.32	4,363.16	3,991.56	371.60	11.742		
5,700.00	5,698.15	5,675.15	5,675.15	19.80	358.47	-105.02	-1,200.49	-4,202.32	4,363.16	3,984.89	378.27	11.534		
5,800.00	5,798.15	5,775.15	5,775.15	20.16	364.79	-105.02	-1,200.49	-4,202.32	4,363.16	3,978.22	384.94	11.335		
5,900.00	5,898.15	5,875.15	5,875.15	20.51	371.10	-105.02	-1,200.49	-4,202.32	4,363.16	3,971.55	391.62	11.141		
6,000.00	5,998.15	5,975.15	5,975.15	20.87	377.42	-105.02	-1,200.49	-4,202.32	4,363.16	3,964.87	398.29	10.955		
6,100.00	6,098.15	6,075.15	6,075.15	21.23	383.74	-105.02	-1,200.49	-4,202.32	4,363.16	3,958.20	404.96	10.774		
6,200.00	6,198.15	6,175.15	6,175.15	21.58	390.05	-105.02	-1,200.49	-4,202.32	4,363.16	3,951.53	411.63	10.600		
6,300.00	6,298.15	6,275.15	6,275.15	21.94	396.37	-105.02	-1,200.49	-4,202.32	4,363.16	3,944.86	418.31	10.431 CC		
6,400.00	6,398.15	6,300.00	6,292.04	22.30	397.94	-105.02	-1,200.49	-4,202.32	4,363.95	3,943.80	420.16	10.386 ES, SF		
6,500.00	6,498.15	6,300.00	6,292.04	22.65	397.94	-105.02	-1,200.49	-4,202.32	4,367.00	3,946.78	420.22	10.392		
6,600.00	6,598.15	6,300.00	6,292.04	23.01	397.94	-105.02	-1,200.49	-4,202.32	4,372.34	3,952.26	420.08	10.408		
6,700.00	6,698.15	6,300.00	6,292.04	23.37	397.94	-105.02	-1,200.49	-4,202.32	4,379.95	3,960.24	419.71	10.436		
6,800.00	6,798.15	6,300.00	6,292.04	23.72	397.94	-105.02	-1,200.49	-4,202.32	4,389.83	3,970.69	419.13	10.474		
6,900.00	6,898.15	6,300.00	6,292.04	24.08	397.94	-105.02	-1,200.49	-4,202.32	4,401.95	3,983.60	418.35	10.522		
7,000.00	6,998.15	6,300.00	6,292.04	24.44	397.94	-105.02	-1,200.49	-4,202.32	4,416.31	3,998.95	417.36	10.581		
7,100.00	7,098.15	6,300.00	6,292.04	24.79	397.94	-105.02	-1,200.49	-4,202.32	4,432.88	4,016.70	416.18	10.651		
7,200.00	7,198.15	6,300.00	6,292.04	25.15	397.94	-105.02	-1,200.49	-4,202.32	4,451.64	4,036.83	414.81	10.732		
7,300.00	7,298.15	6,300.00	6,292.04	25.51	397.94	-105.02	-1,200.49	-4,202.32	4,472.55	4,059.30	413.25	10.823		
7,400.00	7,398.15	6,300.00	6,292.04	25.87	397.94	-105.02	-1,200.49	-4,202.32	4,495.59	4,084.07	411.52	10.924		
7,500.00	7,498.15	6,300.00	6,292.04	26.22	397.94	-105.02	-1,200.49	-4,202.32	4,520.72	4,111.11	409.61	11.037		
7,600.00	7,598.15	6,300.00	6,292.04	26.58	397.94	-105.02	-1,200.49	-4,202.32	4,547.92	4,140.36	407.56	11.159		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W06_FEDERAL V #003_1526867 - Depth Only - Depth Only													Offset Site Error: 0.00 usft
Survey Program: 6300-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
7,700.00	7,698.15	6,300.00	6,292.04	26.94	397.94	-105.02	-1,200.49	-4,202.32	4,577.14	4,171.79	405.35	11.292	
7,800.00	7,798.15	6,300.00	6,292.04	27.29	397.94	-105.02	-1,200.49	-4,202.32	4,608.34	4,205.34	403.00	11.435	
7,900.00	7,898.15	6,300.00	6,292.04	27.65	397.94	-105.02	-1,200.49	-4,202.32	4,641.49	4,240.97	400.52	11.589	
7,911.80	7,909.95	6,300.00	6,292.04	27.69	397.94	-105.02	-1,200.49	-4,202.32	4,645.53	4,245.31	400.22	11.607	
7,950.00	7,948.13	6,300.00	6,292.04	27.83	397.94	147.57	-1,200.49	-4,202.32	4,659.79	4,260.54	399.24	11.672	
8,000.00	7,997.81	6,300.00	6,292.04	28.00	397.94	146.23	-1,200.49	-4,202.32	4,681.80	4,283.82	397.99	11.764	
8,050.00	8,046.82	6,300.00	6,292.04	28.17	397.94	144.53	-1,200.49	-4,202.32	4,707.42	4,310.65	396.77	11.864	
8,100.00	8,094.79	6,300.00	6,292.04	28.34	397.94	142.42	-1,200.49	-4,202.32	4,736.38	4,340.78	395.60	11.973	
8,150.00	8,141.35	6,300.00	6,292.04	28.50	397.94	139.79	-1,200.49	-4,202.32	4,768.40	4,373.90	394.50	12.087	
8,200.00	8,186.15	6,300.00	6,292.04	28.67	397.94	136.56	-1,200.49	-4,202.32	4,803.19	4,409.71	393.49	12.207	
8,250.00	8,228.85	6,300.00	6,292.04	28.82	397.94	132.58	-1,200.49	-4,202.32	4,840.43	4,447.86	392.57	12.330	
8,300.00	8,269.13	6,300.00	6,292.04	28.98	397.94	127.71	-1,200.49	-4,202.32	4,879.77	4,488.01	391.76	12.456	
8,350.00	8,306.67	6,300.00	6,292.04	29.13	397.94	121.78	-1,200.49	-4,202.32	4,920.87	4,529.80	391.06	12.583	
8,400.00	8,341.19	6,300.00	6,292.04	29.28	397.94	114.66	-1,200.49	-4,202.32	4,963.38	4,572.88	390.50	12.710	
8,450.00	8,372.42	6,300.00	6,292.04	29.42	397.94	106.36	-1,200.49	-4,202.32	5,006.94	4,616.87	390.07	12.836	
8,500.00	8,400.14	6,300.00	6,292.04	29.56	397.94	97.05	-1,200.49	-4,202.32	5,051.20	4,661.43	389.77	12.959	
8,511.80	8,406.15	6,300.00	6,292.04	29.59	397.94	94.75	-1,200.49	-4,202.32	5,061.70	4,671.98	389.72	12.988	
8,550.00	8,424.29	6,300.00	6,292.04	29.69	397.94	89.18	-1,200.49	-4,202.32	5,096.10	4,706.48	389.62	13.080	
8,600.00	8,445.07	6,300.00	6,292.04	29.82	397.94	79.84	-1,200.49	-4,202.32	5,141.95	4,752.36	389.60	13.198	
8,650.00	8,462.33	6,300.00	6,292.04	29.96	397.94	68.47	-1,200.49	-4,202.32	5,188.43	4,798.72	389.71	13.314	
8,700.00	8,475.94	6,300.00	6,292.04	30.08	397.94	56.04	-1,200.49	-4,202.32	5,235.15	4,845.20	389.95	13.425	
8,750.00	8,485.80	6,300.00	6,292.04	30.21	397.94	43.95	-1,200.49	-4,202.32	5,281.77	4,891.46	390.31	13.532	
8,800.00	8,491.83	6,300.00	6,292.04	30.33	397.94	33.29	-1,200.49	-4,202.32	5,327.93	4,937.14	390.79	13.634	
8,852.76	8,494.00	6,300.00	6,292.04	30.44	397.94	24.02	-1,200.49	-4,202.32	5,375.78	4,984.36	391.42	13.734	
8,900.00	8,494.00	6,300.00	6,292.04	30.55	397.94	24.02	-1,200.49	-4,202.32	5,418.15	5,026.12	392.03	13.821	
9,000.00	8,494.00	6,300.00	6,292.04	30.81	397.94	24.02	-1,200.49	-4,202.32	5,508.11	5,114.83	393.28	14.006	
9,100.00	8,494.00	6,300.00	6,292.04	31.10	397.94	24.02	-1,200.49	-4,202.32	5,598.42	5,203.94	394.48	14.192	
9,200.00	8,494.00	6,300.00	6,292.04	31.43	397.94	24.02	-1,200.49	-4,202.32	5,689.04	5,293.42	395.62	14.380	
9,300.00	8,494.00	6,300.00	6,292.04	31.80	397.94	24.02	-1,200.49	-4,202.32	5,779.98	5,383.26	396.72	14.569	
9,400.00	8,494.00	6,300.00	6,292.04	32.21	397.94	24.02	-1,200.49	-4,202.32	5,871.21	5,473.44	397.77	14.760	
9,500.00	8,494.00	6,300.00	6,292.04	32.64	397.94	24.02	-1,200.49	-4,202.32	5,962.72	5,563.95	398.77	14.953	
9,600.00	8,494.00	6,300.00	6,292.04	33.11	397.94	24.02	-1,200.49	-4,202.32	6,054.50	5,654.76	399.74	15.146	
9,700.00	8,494.00	6,300.00	6,292.04	33.61	397.94	24.02	-1,200.49	-4,202.32	6,146.54	5,745.87	400.66	15.341	
9,800.00	8,494.00	6,300.00	6,292.04	34.14	397.94	24.02	-1,200.49	-4,202.32	6,238.82	5,837.27	401.55	15.537	
9,900.00	8,494.00	6,300.00	6,292.04	34.70	397.94	24.02	-1,200.49	-4,202.32	6,331.33	5,928.93	402.40	15.734	
10,000.00	8,494.00	6,300.00	6,292.04	35.28	397.94	24.02	-1,200.49	-4,202.32	6,424.07	6,020.85	403.23	15.932	
10,100.00	8,494.00	6,300.00	6,292.04	35.89	397.94	24.02	-1,200.49	-4,202.32	6,517.03	6,113.02	404.01	16.131	
10,200.00	8,494.00	6,300.00	6,292.04	36.53	397.94	24.02	-1,200.49	-4,202.32	6,610.19	6,205.42	404.77	16.331	
10,300.00	8,494.00	6,300.00	6,292.04	37.19	397.94	24.02	-1,200.49	-4,202.32	6,703.55	6,298.04	405.50	16.531	
10,400.00	8,494.00	6,300.00	6,292.04	37.87	397.94	24.02	-1,200.49	-4,202.32	6,797.10	6,390.89	406.21	16.733	
10,500.00	8,494.00	6,300.00	6,292.04	38.57	397.94	24.02	-1,200.49	-4,202.32	6,890.82	6,483.94	406.89	16.935	
10,600.00	8,494.00	6,300.00	6,292.04	39.29	397.94	24.02	-1,200.49	-4,202.32	6,984.73	6,577.18	407.54	17.139	
10,700.00	8,494.00	6,300.00	6,292.04	40.02	397.94	24.02	-1,200.49	-4,202.32	7,078.80	6,670.62	408.18	17.342	
10,800.00	8,494.00	6,300.00	6,292.04	40.78	397.94	24.02	-1,200.49	-4,202.32	7,173.02	6,764.24	408.79	17.547	
10,900.00	8,494.00	6,300.00	6,292.04	41.55	397.94	24.02	-1,200.49	-4,202.32	7,267.41	6,858.03	409.38	17.752	
11,000.00	8,494.00	6,300.00	6,292.04	42.34	397.94	24.02	-1,200.49	-4,202.32	7,361.94	6,951.99	409.95	17.958	
11,100.00	8,494.00	6,300.00	6,292.04	43.14	397.94	24.02	-1,200.49	-4,202.32	7,456.62	7,046.11	410.50	18.165	
11,200.00	8,494.00	6,300.00	6,292.04	43.96	397.94	24.02	-1,200.49	-4,202.32	7,551.43	7,140.39	411.03	18.372	
11,300.00	8,494.00	6,300.00	6,292.04	44.79	397.94	24.02	-1,200.49	-4,202.32	7,646.37	7,234.82	411.55	18.579	
11,400.00	8,494.00	6,300.00	6,292.04	45.64	397.94	24.02	-1,200.49	-4,202.32	7,741.44	7,329.39	412.05	18.787	
11,500.00	8,494.00	6,300.00	6,292.04	46.49	397.94	24.02	-1,200.49	-4,202.32	7,836.64	7,424.10	412.54	18.996	
11,600.00	8,494.00	6,300.00	6,292.04	47.36	397.94	24.02	-1,200.49	-4,202.32	7,931.95	7,518.94	413.01	19.205	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W06_FEDERAL V #003_1526867 - Depth Only - Depth Only												Offset Site Error:	0.00 usft		
Survey Program:		6300-INC-ONLY		Offset		Semi Major Axis		Offset Wellbore Centre		Rule Assigned:				Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
11,700.00	8,494.00	6,300.00	6,292.04	48.23	397.94	24.02	-1,200.49	-4,202.32	8,027.38	7,613.91	413.47	19.415			
11,800.00	8,494.00	6,300.00	6,292.04	49.12	397.94	24.02	-1,200.49	-4,202.32	8,122.91	7,709.00	413.91	19.625			
11,900.00	8,494.00	6,300.00	6,292.04	50.01	397.94	24.02	-1,200.49	-4,202.32	8,218.56	7,804.21	414.34	19.835			
12,000.00	8,494.00	6,300.00	6,292.04	50.92	397.94	24.02	-1,200.49	-4,202.32	8,314.30	7,899.54	414.76	20.046			
12,100.00	8,494.00	6,300.00	6,292.04	51.83	397.94	24.02	-1,200.49	-4,202.32	8,410.15	7,994.97	415.17	20.257			
12,200.00	8,494.00	6,300.00	6,292.04	52.75	397.94	24.02	-1,200.49	-4,202.32	8,506.09	8,090.52	415.57	20.468			
12,300.00	8,494.00	6,300.00	6,292.04	53.68	397.94	24.02	-1,200.49	-4,202.32	8,602.12	8,186.16	415.96	20.680			
12,400.00	8,494.00	6,300.00	6,292.04	54.62	397.94	24.02	-1,200.49	-4,202.32	8,698.24	8,281.91	416.33	20.893			
12,500.00	8,494.00	6,300.00	6,292.04	55.56	397.94	24.02	-1,200.49	-4,202.32	8,794.45	8,377.75	416.70	21.105			
12,600.00	8,494.00	6,300.00	6,292.04	56.51	397.94	24.02	-1,200.49	-4,202.32	8,890.74	8,473.68	417.06	21.318			
12,700.00	8,494.00	6,300.00	6,292.04	57.47	397.94	24.02	-1,200.49	-4,202.32	8,987.11	8,569.71	417.41	21.531			
12,800.00	8,494.00	6,300.00	6,292.04	58.43	397.94	24.02	-1,200.49	-4,202.32	9,083.56	8,665.82	417.75	21.744			
12,900.00	8,494.00	6,300.00	6,292.04	59.40	397.94	24.02	-1,200.49	-4,202.32	9,180.09	8,762.01	418.08	21.958			
13,000.00	8,494.00	6,300.00	6,292.04	60.37	397.94	24.02	-1,200.49	-4,202.32	9,276.69	8,858.29	418.40	22.172			
13,100.00	8,494.00	6,300.00	6,292.04	61.35	397.94	24.02	-1,200.49	-4,202.32	9,373.36	8,954.64	418.72	22.386			
13,200.00	8,494.00	6,300.00	6,292.04	62.33	397.94	24.02	-1,200.49	-4,202.32	9,470.11	9,051.08	419.03	22.600			
13,300.00	8,494.00	6,300.00	6,292.04	63.32	397.94	24.02	-1,200.49	-4,202.32	9,566.91	9,147.58	419.33	22.815			
13,400.00	8,494.00	6,300.00	6,292.04	64.31	397.94	24.02	-1,200.49	-4,202.32	9,663.79	9,244.16	419.63	23.029			
13,500.00	8,494.00	6,300.00	6,292.04	65.31	397.94	24.02	-1,200.49	-4,202.32	9,760.72	9,340.80	419.92	23.244			
13,600.00	8,494.00	6,300.00	6,292.04	66.31	397.94	24.02	-1,200.49	-4,202.32	9,857.72	9,437.52	420.21	23.459			
13,700.00	8,494.00	6,300.00	6,292.04	67.31	397.94	24.02	-1,200.49	-4,202.32	9,954.78	9,534.29	420.49	23.674			
13,800.00	8,494.00	6,300.00	6,292.04	68.32	397.94	24.02	-1,200.49	-4,202.32	10,051.89	9,631.13	420.76	23.890			
13,900.00	8,494.00	6,300.00	6,292.04	69.33	397.94	24.02	-1,200.49	-4,202.32	10,149.06	9,728.04	421.03	24.105			
14,000.00	8,494.00	6,300.00	6,292.04	70.34	397.94	24.02	-1,200.49	-4,202.32	10,246.29	9,825.00	421.29	24.321			
14,100.00	8,494.00	6,300.00	6,292.04	71.36	397.94	24.02	-1,200.49	-4,202.32	10,343.57	9,922.02	421.55	24.537			
14,200.00	8,494.00	6,300.00	6,292.04	72.38	397.94	24.02	-1,200.49	-4,202.32	10,440.90	10,019.10	421.80	24.753			
14,300.00	8,494.00	6,300.00	6,292.04	73.41	397.94	24.02	-1,200.49	-4,202.32	10,538.28	10,116.23	422.05	24.969			



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W07_PRE-ONGARD WELL #001_1527282 - Depth Only - Depth Only													Offset Site Error: 0.00 usft
Survey Program: 7450-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
2,600.00	2,599.99	2,552.99	2,552.99	9.07	161.26	30.54	-3,842.24	-1,468.51	4,112.19	3,941.86	170.33	24.143	
2,700.00	2,699.91	2,652.91	2,652.91	9.39	167.57	30.59	-3,842.24	-1,468.51	4,108.81	3,931.84	176.96	23.218	
2,710.01	2,709.91	2,662.91	2,662.91	9.43	168.20	30.60	-3,842.24	-1,468.51	4,108.34	3,930.72	177.63	23.129	
2,800.00	2,799.76	2,752.76	2,752.76	9.72	173.88	30.63	-3,842.24	-1,468.51	4,104.09	3,920.49	183.60	22.354	
2,900.00	2,899.61	2,852.61	2,852.61	10.05	180.18	30.67	-3,842.24	-1,468.51	4,099.36	3,909.12	190.23	21.549	
3,000.00	2,999.46	2,952.46	2,952.46	10.38	186.49	30.71	-3,842.24	-1,468.51	4,094.63	3,897.76	196.87	20.799	
3,100.00	3,099.30	3,052.30	3,052.30	10.71	192.80	30.75	-3,842.24	-1,468.51	4,089.90	3,886.40	203.51	20.097	
3,200.00	3,199.15	3,152.15	3,152.15	11.04	199.11	30.79	-3,842.24	-1,468.51	4,085.18	3,875.03	210.15	19.439	
3,300.00	3,299.00	3,252.00	3,252.00	11.38	205.41	30.83	-3,842.24	-1,468.51	4,080.46	3,863.67	216.79	18.822	
3,400.00	3,398.85	3,351.85	3,351.85	11.72	211.72	30.87	-3,842.24	-1,468.51	4,075.74	3,852.30	223.44	18.241	
3,500.00	3,498.70	3,451.70	3,451.70	12.05	218.03	30.91	-3,842.24	-1,468.51	4,071.02	3,840.94	230.08	17.694	
3,600.00	3,598.55	3,551.55	3,551.55	12.39	224.33	30.95	-3,842.24	-1,468.51	4,066.30	3,829.58	236.73	17.177	
3,700.00	3,698.40	3,651.40	3,651.40	12.74	230.64	30.99	-3,842.24	-1,468.51	4,061.59	3,818.22	243.37	16.689	
3,791.83	3,790.09	3,743.09	3,743.09	13.05	236.43	31.02	-3,842.24	-1,468.51	4,057.26	3,807.78	249.48	16.263	
3,800.00	3,798.25	3,751.25	3,751.25	13.08	236.95	31.02	-3,842.24	-1,468.51	4,056.89	3,806.86	250.02	16.226	
3,900.00	3,898.17	3,851.17	3,851.17	13.42	243.26	31.03	-3,842.24	-1,468.51	4,053.48	3,796.80	256.68	15.792	
4,001.85	4,000.00	3,953.00	3,953.00	13.78	249.69	-158.57	-3,842.24	-1,468.51	4,052.32	3,788.85	263.46	15.381	
4,100.00	4,098.15	4,051.15	4,051.15	14.12	255.89	-158.57	-3,842.24	-1,468.51	4,052.32	3,782.31	270.01	15.008	
4,200.00	4,198.15	4,151.15	4,151.15	14.48	262.21	-158.57	-3,842.24	-1,468.51	4,052.32	3,775.64	276.68	14.646	
4,300.00	4,298.15	4,251.15	4,251.15	14.83	268.52	-158.57	-3,842.24	-1,468.51	4,052.32	3,768.97	283.35	14.301	
4,400.00	4,398.15	4,351.15	4,351.15	15.18	274.84	-158.57	-3,842.24	-1,468.51	4,052.32	3,762.29	290.02	13.972	
4,500.00	4,498.15	4,451.15	4,451.15	15.54	281.16	-158.57	-3,842.24	-1,468.51	4,052.32	3,755.62	296.69	13.658	
4,600.00	4,598.15	4,551.15	4,551.15	15.89	287.47	-158.57	-3,842.24	-1,468.51	4,052.32	3,748.95	303.36	13.358	
4,700.00	4,698.15	4,651.15	4,651.15	16.25	293.79	-158.57	-3,842.24	-1,468.51	4,052.32	3,742.28	310.04	13.070	
4,800.00	4,798.15	4,751.15	4,751.15	16.60	300.11	-158.57	-3,842.24	-1,468.51	4,052.32	3,735.61	316.71	12.795	
4,900.00	4,898.15	4,851.15	4,851.15	16.96	306.42	-158.57	-3,842.24	-1,468.51	4,052.32	3,728.94	323.38	12.531	
5,000.00	4,998.15	4,951.15	4,951.15	17.31	312.74	-158.57	-3,842.24	-1,468.51	4,052.32	3,722.27	330.05	12.278	
5,100.00	5,098.15	5,051.15	5,051.15	17.67	319.06	-158.57	-3,842.24	-1,468.51	4,052.32	3,715.59	336.72	12.035	
5,200.00	5,198.15	5,151.15	5,151.15	18.02	325.37	-158.57	-3,842.24	-1,468.51	4,052.32	3,708.92	343.39	11.801	
5,300.00	5,298.15	5,251.15	5,251.15	18.38	331.69	-158.57	-3,842.24	-1,468.51	4,052.32	3,702.25	350.07	11.576	
5,400.00	5,398.15	5,351.15	5,351.15	18.73	338.01	-158.57	-3,842.24	-1,468.51	4,052.32	3,695.58	356.74	11.359	
5,500.00	5,498.15	5,451.15	5,451.15	19.09	344.32	-158.57	-3,842.24	-1,468.51	4,052.32	3,688.90	363.41	11.151	
5,600.00	5,598.15	5,551.15	5,551.15	19.45	350.64	-158.57	-3,842.24	-1,468.51	4,052.32	3,682.23	370.08	10.950	
5,700.00	5,698.15	5,651.15	5,651.15	19.80	356.96	-158.57	-3,842.24	-1,468.51	4,052.32	3,675.56	376.76	10.756	
5,800.00	5,798.15	5,751.15	5,751.15	20.16	363.27	-158.57	-3,842.24	-1,468.51	4,052.32	3,668.89	383.43	10.569	
5,900.00	5,898.15	5,851.15	5,851.15	20.51	369.59	-158.57	-3,842.24	-1,468.51	4,052.32	3,662.21	390.10	10.388	
6,000.00	5,998.15	5,951.15	5,951.15	20.87	375.90	-158.57	-3,842.24	-1,468.51	4,052.32	3,655.54	396.77	10.213	
6,100.00	6,098.15	6,051.15	6,051.15	21.23	382.22	-158.57	-3,842.24	-1,468.51	4,052.32	3,648.87	403.45	10.044	
6,200.00	6,198.15	6,151.15	6,151.15	21.58	388.54	-158.57	-3,842.24	-1,468.51	4,052.32	3,642.20	410.12	9.881	
6,300.00	6,298.15	6,251.15	6,251.15	21.94	394.85	-158.57	-3,842.24	-1,468.51	4,052.32	3,635.52	416.79	9.723	
6,400.00	6,398.15	6,351.15	6,351.15	22.30	401.17	-158.57	-3,842.24	-1,468.51	4,052.32	3,628.85	423.47	9.569	
6,500.00	6,498.15	6,451.15	6,451.15	22.65	407.49	-158.57	-3,842.24	-1,468.51	4,052.32	3,622.18	430.14	9.421	
6,600.00	6,598.15	6,551.15	6,551.15	23.01	413.80	-158.57	-3,842.24	-1,468.51	4,052.32	3,615.50	436.81	9.277	
6,700.00	6,698.15	6,651.15	6,651.15	23.37	420.12	-158.57	-3,842.24	-1,468.51	4,052.32	3,608.83	443.49	9.137	
6,800.00	6,798.15	6,751.15	6,751.15	23.72	426.44	-158.57	-3,842.24	-1,468.51	4,052.32	3,602.16	450.16	9.002	
6,900.00	6,898.15	6,851.15	6,851.15	24.08	432.75	-158.57	-3,842.24	-1,468.51	4,052.32	3,595.48	456.83	8.870	
7,000.00	6,998.15	6,951.15	6,951.15	24.44	439.07	-158.57	-3,842.24	-1,468.51	4,052.32	3,588.81	463.51	8.743	
7,100.00	7,098.15	7,051.15	7,051.15	24.79	445.39	-158.57	-3,842.24	-1,468.51	4,052.32	3,582.14	470.18	8.619	
7,200.00	7,198.15	7,151.15	7,151.15	25.15	451.70	-158.57	-3,842.24	-1,468.51	4,052.32	3,575.46	476.85	8.498	
7,300.00	7,298.15	7,251.15	7,251.15	25.51	458.02	-158.57	-3,842.24	-1,468.51	4,052.32	3,568.79	483.53	8.381	
7,400.00	7,398.15	7,351.15	7,351.15	25.87	464.34	-158.57	-3,842.24	-1,468.51	4,052.32	3,562.12	490.20	8.267	
7,412.73	7,410.88	7,363.88	7,363.88	25.91	465.14	-158.57	-3,842.24	-1,468.51	4,052.32	3,561.27	491.05	8.252 CC	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W07_PRE-ONGARD WELL #001_1527282 - Depth Only - Depth Only													Offset Site Error: 0.00 usft
Survey Program: 7450-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
7,500.00	7,498.15	7,450.00	7,440.59	26.22	470.58	-158.57	-3,842.24	-1,468.51	4,052.33	3,555.53	496.80	8.157 ES, SF	
7,600.00	7,598.15	7,450.00	7,440.59	26.58	470.58	-158.57	-3,842.24	-1,468.51	4,053.82	3,556.84	496.98	8.157	
7,700.00	7,698.15	7,450.00	7,440.59	26.94	470.58	-158.57	-3,842.24	-1,468.51	4,057.78	3,560.92	496.86	8.167	
7,800.00	7,798.15	7,450.00	7,440.59	27.29	470.58	-158.57	-3,842.24	-1,468.51	4,064.20	3,567.75	496.45	8.187	
7,900.00	7,898.15	7,450.00	7,440.59	27.65	470.58	-158.57	-3,842.24	-1,468.51	4,073.06	3,577.32	495.75	8.216	
7,911.80	7,909.95	7,450.00	7,440.59	27.69	470.58	-158.57	-3,842.24	-1,468.51	4,074.27	3,578.62	495.64	8.220	
7,950.00	7,948.13	7,450.00	7,440.59	27.83	470.58	94.40	-3,842.24	-1,468.51	4,078.51	3,583.22	495.29	8.235	
8,000.00	7,997.81	7,450.00	7,440.59	28.00	470.58	93.76	-3,842.24	-1,468.51	4,084.88	3,590.13	494.75	8.256	
8,050.00	8,046.82	7,450.00	7,440.59	28.17	470.58	93.03	-3,842.24	-1,468.51	4,092.14	3,597.98	494.16	8.281	
8,100.00	8,094.79	7,450.00	7,440.59	28.34	470.58	92.21	-3,842.24	-1,468.51	4,100.22	3,606.69	493.52	8.308	
8,150.00	8,141.35	7,450.00	7,440.59	28.50	470.58	91.31	-3,842.24	-1,468.51	4,109.06	3,616.21	492.85	8.337	
8,200.00	8,186.15	7,450.00	7,440.59	28.67	470.58	90.34	-3,842.24	-1,468.51	4,118.58	3,626.43	492.15	8.369	
8,250.00	8,228.85	7,450.00	7,440.59	28.82	470.58	89.31	-3,842.24	-1,468.51	4,128.71	3,637.27	491.44	8.401	
8,300.00	8,269.13	7,450.00	7,440.59	28.98	470.58	88.22	-3,842.24	-1,468.51	4,139.37	3,648.63	490.74	8.435	
8,350.00	8,306.67	7,450.00	7,440.59	29.13	470.58	87.08	-3,842.24	-1,468.51	4,150.47	3,660.41	490.06	8.469	
8,400.00	8,341.19	7,450.00	7,440.59	29.28	470.58	85.90	-3,842.24	-1,468.51	4,161.93	3,672.51	489.42	8.504	
8,450.00	8,372.42	7,450.00	7,440.59	29.42	470.58	84.70	-3,842.24	-1,468.51	4,173.65	3,684.82	488.83	8.538	
8,500.00	8,400.14	7,450.00	7,440.59	29.56	470.58	83.48	-3,842.24	-1,468.51	4,185.55	3,697.24	488.31	8.571	
8,511.80	8,406.15	7,450.00	7,440.59	29.59	470.58	83.20	-3,842.24	-1,468.51	4,188.37	3,700.17	488.20	8.579	
8,550.00	8,424.29	7,450.00	7,440.59	29.69	470.58	83.33	-3,842.24	-1,468.51	4,198.19	3,710.32	487.87	8.605	
8,600.00	8,445.07	7,450.00	7,440.59	29.82	470.58	83.04	-3,842.24	-1,468.51	4,213.00	3,725.48	487.53	8.642	
8,650.00	8,462.33	7,450.00	7,440.59	29.96	470.58	82.25	-3,842.24	-1,468.51	4,229.92	3,742.64	487.28	8.681	
8,700.00	8,475.94	7,450.00	7,440.59	30.08	470.58	81.00	-3,842.24	-1,468.51	4,248.79	3,761.65	487.14	8.722	
8,750.00	8,485.80	7,450.00	7,440.59	30.21	470.58	79.31	-3,842.24	-1,468.51	4,269.44	3,782.34	487.10	8.765	
8,800.00	8,491.83	7,450.00	7,440.59	30.33	470.58	77.19	-3,842.24	-1,468.51	4,291.69	3,804.51	487.18	8.809	
8,852.76	8,494.00	7,450.00	7,440.59	30.44	470.58	74.52	-3,842.24	-1,468.51	4,316.69	3,829.31	487.38	8.857	
8,900.00	8,494.00	7,450.00	7,440.59	30.55	470.58	74.52	-3,842.24	-1,468.51	4,339.90	3,852.29	487.62	8.900	
9,000.00	8,494.00	7,450.00	7,440.59	30.81	470.58	74.52	-3,842.24	-1,468.51	4,390.31	3,902.18	488.13	8.994	
9,100.00	8,494.00	7,450.00	7,440.59	31.10	470.58	74.52	-3,842.24	-1,468.51	4,442.40	3,953.74	488.66	9.091	
9,200.00	8,494.00	7,450.00	7,440.59	31.43	470.58	74.52	-3,842.24	-1,468.51	4,496.11	4,006.90	489.21	9.191	
9,300.00	8,494.00	7,450.00	7,440.59	31.80	470.58	74.52	-3,842.24	-1,468.51	4,551.38	4,061.61	489.77	9.293	
9,400.00	8,494.00	7,450.00	7,440.59	32.21	470.58	74.52	-3,842.24	-1,468.51	4,608.16	4,117.82	490.33	9.398	
9,500.00	8,494.00	7,450.00	7,440.59	32.64	470.58	74.52	-3,842.24	-1,468.51	4,666.39	4,175.48	490.91	9.506	
9,600.00	8,494.00	7,450.00	7,440.59	33.11	470.58	74.52	-3,842.24	-1,468.51	4,726.02	4,234.53	491.49	9.616	
9,700.00	8,494.00	7,450.00	7,440.59	33.61	470.58	74.52	-3,842.24	-1,468.51	4,787.00	4,294.93	492.07	9.728	
9,800.00	8,494.00	7,450.00	7,440.59	34.14	470.58	74.52	-3,842.24	-1,468.51	4,849.27	4,356.62	492.65	9.843	
9,900.00	8,494.00	7,450.00	7,440.59	34.70	470.58	74.52	-3,842.24	-1,468.51	4,912.79	4,419.56	493.23	9.960	
10,000.00	8,494.00	7,450.00	7,440.59	35.28	470.58	74.52	-3,842.24	-1,468.51	4,977.51	4,483.70	493.81	10.080	
10,100.00	8,494.00	7,450.00	7,440.59	35.89	470.58	74.52	-3,842.24	-1,468.51	5,043.38	4,549.00	494.38	10.201	
10,200.00	8,494.00	7,450.00	7,440.59	36.53	470.58	74.52	-3,842.24	-1,468.51	5,110.35	4,615.41	494.95	10.325	
10,300.00	8,494.00	7,450.00	7,440.59	37.19	470.58	74.52	-3,842.24	-1,468.51	5,178.40	4,682.89	495.51	10.451	
10,400.00	8,494.00	7,450.00	7,440.59	37.87	470.58	74.52	-3,842.24	-1,468.51	5,247.46	4,751.40	496.06	10.578	
10,500.00	8,494.00	7,450.00	7,440.59	38.57	470.58	74.52	-3,842.24	-1,468.51	5,317.51	4,820.90	496.61	10.708	
10,600.00	8,494.00	7,450.00	7,440.59	39.29	470.58	74.52	-3,842.24	-1,468.51	5,388.51	4,891.36	497.15	10.839	
10,700.00	8,494.00	7,450.00	7,440.59	40.02	470.58	74.52	-3,842.24	-1,468.51	5,460.41	4,962.74	497.67	10.972	
10,800.00	8,494.00	7,450.00	7,440.59	40.78	470.58	74.52	-3,842.24	-1,468.51	5,533.19	5,034.99	498.19	11.107	
10,900.00	8,494.00	7,450.00	7,440.59	41.55	470.58	74.52	-3,842.24	-1,468.51	5,606.80	5,108.10	498.70	11.243	
11,000.00	8,494.00	7,450.00	7,440.59	42.34	470.58	74.52	-3,842.24	-1,468.51	5,681.22	5,182.02	499.20	11.381	
11,100.00	8,494.00	7,450.00	7,440.59	43.14	470.58	74.52	-3,842.24	-1,468.51	5,756.42	5,256.73	499.69	11.520	
11,200.00	8,494.00	7,450.00	7,440.59	43.96	470.58	74.52	-3,842.24	-1,468.51	5,832.36	5,332.19	500.17	11.661	
11,300.00	8,494.00	7,450.00	7,440.59	44.79	470.58	74.52	-3,842.24	-1,468.51	5,909.02	5,408.38	500.64	11.803	
11,400.00	8,494.00	7,450.00	7,440.59	45.64	470.58	74.52	-3,842.24	-1,468.51	5,986.37	5,485.27	501.10	11.946	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W07_PRE-ONGARD WELL #001_1527282 - Depth Only - Depth Only												Offset Site Error:	0.00 usft
Survey Program: 7450-INC-ONLY												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
11,500.00	8,494.00	7,450.00	7,440.59	46.49	470.58	74.52	-3,842.24	-1,468.51	6,064.38	5,562.83	501.55	12.091	
11,600.00	8,494.00	7,450.00	7,440.59	47.36	470.58	74.52	-3,842.24	-1,468.51	6,143.03	5,641.04	501.99	12.237	
11,700.00	8,494.00	7,450.00	7,440.59	48.23	470.58	74.52	-3,842.24	-1,468.51	6,222.29	5,719.87	502.42	12.385	
11,800.00	8,494.00	7,450.00	7,440.59	49.12	470.58	74.52	-3,842.24	-1,468.51	6,302.14	5,799.30	502.84	12.533	
11,900.00	8,494.00	7,450.00	7,440.59	50.01	470.58	74.52	-3,842.24	-1,468.51	6,382.55	5,879.31	503.25	12.683	
12,000.00	8,494.00	7,450.00	7,440.59	50.92	470.58	74.52	-3,842.24	-1,468.51	6,463.52	5,959.87	503.65	12.833	
12,100.00	8,494.00	7,450.00	7,440.59	51.83	470.58	74.52	-3,842.24	-1,468.51	6,545.01	6,040.97	504.04	12.985	
12,200.00	8,494.00	7,450.00	7,440.59	52.75	470.58	74.52	-3,842.24	-1,468.51	6,627.01	6,122.58	504.42	13.138	
12,300.00	8,494.00	7,450.00	7,440.59	53.68	470.58	74.52	-3,842.24	-1,468.51	6,709.49	6,204.70	504.79	13.292	
12,400.00	8,494.00	7,450.00	7,440.59	54.62	470.58	74.52	-3,842.24	-1,468.51	6,792.45	6,287.29	505.16	13.446	
12,500.00	8,494.00	7,450.00	7,440.59	55.56	470.58	74.52	-3,842.24	-1,468.51	6,875.86	6,370.34	505.52	13.602	
12,600.00	8,494.00	7,450.00	7,440.59	56.51	470.58	74.52	-3,842.24	-1,468.51	6,959.71	6,453.84	505.87	13.758	
12,700.00	8,494.00	7,450.00	7,440.59	57.47	470.58	74.52	-3,842.24	-1,468.51	7,043.97	6,537.77	506.21	13.915	
12,800.00	8,494.00	7,450.00	7,440.59	58.43	470.58	74.52	-3,842.24	-1,468.51	7,128.65	6,622.11	506.54	14.073	
12,900.00	8,494.00	7,450.00	7,440.59	59.40	470.58	74.52	-3,842.24	-1,468.51	7,213.72	6,706.85	506.86	14.232	
13,000.00	8,494.00	7,450.00	7,440.59	60.37	470.58	74.52	-3,842.24	-1,468.51	7,299.16	6,791.98	507.18	14.392	
13,100.00	8,494.00	7,450.00	7,440.59	61.35	470.58	74.52	-3,842.24	-1,468.51	7,384.98	6,877.48	507.49	14.552	
13,200.00	8,494.00	7,450.00	7,440.59	62.33	470.58	74.52	-3,842.24	-1,468.51	7,471.14	6,963.34	507.80	14.713	
13,300.00	8,494.00	7,450.00	7,440.59	63.32	470.58	74.52	-3,842.24	-1,468.51	7,557.65	7,049.55	508.10	14.874	
13,400.00	8,494.00	7,450.00	7,440.59	64.31	470.58	74.52	-3,842.24	-1,468.51	7,644.48	7,136.09	508.39	15.037	
13,500.00	8,494.00	7,450.00	7,440.59	65.31	470.58	74.52	-3,842.24	-1,468.51	7,731.63	7,222.96	508.67	15.200	
13,600.00	8,494.00	7,450.00	7,440.59	66.31	470.58	74.52	-3,842.24	-1,468.51	7,819.09	7,310.14	508.95	15.363	
13,700.00	8,494.00	7,450.00	7,440.59	67.31	470.58	74.52	-3,842.24	-1,468.51	7,906.85	7,397.63	509.22	15.527	
13,800.00	8,494.00	7,450.00	7,440.59	68.32	470.58	74.52	-3,842.24	-1,468.51	7,994.90	7,485.41	509.49	15.692	
13,900.00	8,494.00	7,450.00	7,440.59	69.33	470.58	74.52	-3,842.24	-1,468.51	8,083.22	7,573.47	509.75	15.857	
14,000.00	8,494.00	7,450.00	7,440.59	70.34	470.58	74.52	-3,842.24	-1,468.51	8,171.81	7,661.80	510.01	16.023	
14,100.00	8,494.00	7,450.00	7,440.59	71.36	470.58	74.52	-3,842.24	-1,468.51	8,260.67	7,750.41	510.26	16.189	
14,200.00	8,494.00	7,450.00	7,440.59	72.38	470.58	74.52	-3,842.24	-1,468.51	8,349.77	7,839.26	510.51	16.356	
14,300.00	8,494.00	7,450.00	7,440.59	73.41	470.58	74.52	-3,842.24	-1,468.51	8,439.12	7,928.37	510.75	16.523	
14,400.00	8,494.00	7,450.00	7,440.59	74.43	470.58	74.52	-3,842.24	-1,468.51	8,528.71	8,017.72	510.99	16.691	
14,500.00	8,494.00	7,450.00	7,440.59	75.46	470.58	74.52	-3,842.24	-1,468.51	8,618.52	8,107.30	511.22	16.859	
14,600.00	8,494.00	7,450.00	7,440.59	76.49	470.58	74.52	-3,842.24	-1,468.51	8,708.56	8,197.11	511.45	17.027	
14,700.00	8,494.00	7,450.00	7,440.59	77.53	470.58	74.52	-3,842.24	-1,468.51	8,798.81	8,287.14	511.67	17.196	
14,800.00	8,494.00	7,450.00	7,440.59	78.56	470.58	74.52	-3,842.24	-1,468.51	8,889.27	8,377.38	511.89	17.365	
14,900.00	8,494.00	7,450.00	7,440.59	79.60	470.58	74.52	-3,842.24	-1,468.51	8,979.93	8,467.82	512.11	17.535	
15,000.00	8,494.00	7,450.00	7,440.59	80.64	470.58	74.52	-3,842.24	-1,468.51	9,070.79	8,558.47	512.32	17.705	
15,100.00	8,494.00	7,450.00	7,440.59	81.69	470.58	74.52	-3,842.24	-1,468.51	9,161.84	8,649.31	512.53	17.876	
15,200.00	8,494.00	7,450.00	7,440.59	82.73	470.58	74.52	-3,842.24	-1,468.51	9,253.08	8,740.34	512.74	18.046	
15,300.00	8,494.00	7,450.00	7,440.59	83.78	470.58	74.52	-3,842.24	-1,468.51	9,344.49	8,831.55	512.94	18.217	
15,400.00	8,494.00	7,450.00	7,440.59	84.83	470.58	74.52	-3,842.24	-1,468.51	9,436.08	8,922.94	513.14	18.389	
15,500.00	8,494.00	7,450.00	7,440.59	85.88	470.58	74.52	-3,842.24	-1,468.51	9,527.84	9,014.50	513.34	18.561	
15,600.00	8,494.00	7,450.00	7,440.59	86.94	470.58	74.52	-3,842.24	-1,468.51	9,619.76	9,106.23	513.53	18.733	
15,700.00	8,494.00	7,450.00	7,440.59	87.99	470.58	74.52	-3,842.24	-1,468.51	9,711.84	9,198.12	513.72	18.905	
15,800.00	8,494.00	7,450.00	7,440.59	89.05	470.58	74.52	-3,842.24	-1,468.51	9,804.07	9,290.17	513.91	19.078	
15,900.00	8,494.00	7,450.00	7,440.59	90.10	470.58	74.52	-3,842.24	-1,468.51	9,896.46	9,382.37	514.09	19.250	
16,000.00	8,494.00	7,450.00	7,440.59	91.16	470.58	74.52	-3,842.24	-1,468.51	9,989.00	9,474.72	514.27	19.424	
16,100.00	8,494.00	7,450.00	7,440.59	92.22	470.58	74.52	-3,842.24	-1,468.51	10,081.67	9,567.22	514.45	19.597	
16,200.00	8,494.00	7,450.00	7,440.59	93.29	470.58	74.52	-3,842.24	-1,468.51	10,174.49	9,659.86	514.63	19.771	
16,300.00	8,494.00	7,450.00	7,440.59	94.35	470.58	74.52	-3,842.24	-1,468.51	10,267.44	9,752.63	514.80	19.944	
16,400.00	8,494.00	7,450.00	7,440.59	95.42	470.58	74.52	-3,842.24	-1,468.51	10,360.52	9,845.54	514.97	20.119	
16,500.00	8,494.00	7,450.00	7,440.59	96.48	470.58	74.52	-3,842.24	-1,468.51	10,453.73	9,938.58	515.14	20.293	
16,600.00	8,494.00	7,450.00	7,440.59	97.55	470.58	74.52	-3,842.24	-1,468.51	10,547.06	10,031.75	515.31	20.467	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W07_PRE-ONGARD WELL #001_1527282 - Depth Only - Depth Only											Offset Site Error: 0.00 usft				
Survey Program: 7450-INC-ONLY		Reference		Offset		Semi Major Axis		Highside		Offset Wellbore Centre		Rule Assigned: Distance		Offset Well Error: 0.00 usft	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning		
16,700.00	8,494.00	7,450.00	7,440.59	98.62	470.58	74.52	-3,842.24	-1,468.51	10,640.51	10,125.04	515.48	20.642			
16,800.00	8,494.00	7,450.00	7,440.59	99.69	470.58	74.52	-3,842.24	-1,468.51	10,734.09	10,218.45	515.64	20.817			
16,900.00	8,494.00	7,450.00	7,440.59	100.76	470.58	74.52	-3,842.24	-1,468.51	10,827.77	10,311.97	515.80	20.992			
17,000.00	8,494.00	7,450.00	7,440.59	101.83	470.58	74.52	-3,842.24	-1,468.51	10,921.57	10,405.61	515.96	21.167			
17,100.00	8,494.00	7,450.00	7,440.59	102.91	470.58	74.52	-3,842.24	-1,468.51	11,015.48	10,499.36	516.12	21.343			
17,200.00	8,494.00	7,450.00	7,440.59	103.98	470.58	74.52	-3,842.24	-1,468.51	11,109.50	10,593.22	516.28	21.519			
17,300.00	8,494.00	7,450.00	7,440.59	105.06	470.58	74.52	-3,842.24	-1,468.51	11,203.62	10,687.19	516.43	21.694			
17,400.00	8,494.00	7,450.00	7,440.59	106.13	470.58	74.52	-3,842.24	-1,468.51	11,297.83	10,781.25	516.58	21.870			
17,500.00	8,494.00	7,450.00	7,440.59	107.21	470.58	74.52	-3,842.24	-1,468.51	11,392.15	10,875.42	516.73	22.046			
17,600.00	8,494.00	7,450.00	7,440.59	108.29	470.58	74.52	-3,842.24	-1,468.51	11,486.57	10,969.68	516.88	22.223			
17,700.00	8,494.00	7,450.00	7,440.59	109.37	470.58	74.52	-3,842.24	-1,468.51	11,581.07	11,064.04	517.03	22.399			
17,800.00	8,494.00	7,450.00	7,440.59	110.45	470.58	74.52	-3,842.24	-1,468.51	11,675.67	11,158.49	517.18	22.576			
17,900.00	8,494.00	7,450.00	7,440.59	111.53	470.58	74.52	-3,842.24	-1,468.51	11,770.36	11,253.04	517.33	22.752			
18,000.00	8,494.00	7,450.00	7,440.59	112.61	470.58	74.52	-3,842.24	-1,468.51	11,865.14	11,347.67	517.47	22.929			
18,100.00	8,494.00	7,450.00	7,440.59	113.69	470.58	74.52	-3,842.24	-1,468.51	11,960.00	11,442.39	517.61	23.106			
18,200.00	8,494.00	7,450.00	7,440.59	114.77	470.58	74.52	-3,842.24	-1,468.51	12,054.94	11,537.19	517.75	23.283			
18,300.00	8,494.00	7,450.00	7,440.59	115.86	470.58	74.52	-3,842.24	-1,468.51	12,149.97	11,632.07	517.90	23.460			
18,400.00	8,494.00	7,450.00	7,440.59	116.94	470.58	74.52	-3,842.24	-1,468.51	12,245.07	11,727.04	518.03	23.638			
18,500.00	8,494.00	7,450.00	7,440.59	118.03	470.58	74.52	-3,842.24	-1,468.51	12,340.25	11,822.08	518.17	23.815			
18,600.00	8,494.00	7,450.00	7,440.59	119.11	470.58	74.52	-3,842.24	-1,468.51	12,435.51	11,917.20	518.31	23.992			
18,700.00	8,494.00	7,450.00	7,440.59	120.20	470.58	74.52	-3,842.24	-1,468.51	12,530.84	12,012.40	518.45	24.170			
18,800.00	8,494.00	7,450.00	7,440.59	121.29	470.58	74.52	-3,842.24	-1,468.51	12,626.25	12,107.66	518.58	24.348			
18,900.00	8,494.00	7,450.00	7,440.59	122.38	470.58	74.52	-3,842.24	-1,468.51	12,721.72	12,203.00	518.72	24.525			
19,000.00	8,494.00	7,450.00	7,440.59	123.46	470.58	74.52	-3,842.24	-1,468.51	12,817.26	12,298.41	518.85	24.703			
19,100.00	8,494.00	7,450.00	7,440.59	124.55	470.58	74.52	-3,842.24	-1,468.51	12,912.87	12,393.89	518.98	24.881			



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W08_FEDERAL V COM #004_1535127 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 262-INC-NOLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
5,900.00	5,998.15	5,852.89	5,851.15	20.51	140.50	-100.58	-808.83	-3,944.33	4,024.57	3,863.56	161.01	24.996	
5,998.08	5,996.23	5,950.97	5,949.22	20.86	142.87	-100.57	-808.01	-3,944.33	4,024.42	3,860.69	163.73	24.580	
6,000.00	5,998.15	5,952.75	5,951.01	20.87	142.91	-100.57	-808.01	-3,944.33	4,024.42	3,860.64	163.78	24.572	
6,100.00	6,098.15	6,045.67	6,043.91	21.23	145.16	-100.57	-808.48	-3,944.33	4,024.51	3,858.13	166.38	24.188	
6,200.00	6,198.15	6,152.96	6,151.15	21.58	147.67	-100.58	-808.83	-3,944.33	4,024.57	3,855.32	169.25	23.778	
6,220.63	6,218.78	6,173.46	6,171.65	21.66	148.15	-100.57	-808.32	-3,944.33	4,024.48	3,854.67	169.80	23.701	
6,300.00	6,298.15	6,246.65	6,244.83	21.94	149.84	-100.58	-808.64	-3,944.33	4,024.54	3,852.76	171.78	23.429	
6,400.00	6,398.15	6,353.00	6,351.15	22.30	152.39	-100.58	-808.83	-3,944.33	4,024.57	3,849.89	174.69	23.039	
6,500.00	6,498.15	6,453.00	6,451.15	22.65	154.81	-100.58	-808.83	-3,944.33	4,024.57	3,847.11	177.46	22.679	
6,586.92	6,585.07	6,539.92	6,538.06	22.96	156.91	-100.56	-807.35	-3,944.33	4,024.30	3,844.42	179.87	22.373 CC	
6,600.00	6,598.15	6,552.63	6,550.76	23.01	157.22	-100.56	-807.35	-3,944.33	4,024.30	3,844.07	180.23	22.329	
6,700.00	6,698.15	6,649.79	6,647.92	23.37	159.57	-100.56	-807.59	-3,944.33	4,024.34	3,841.41	182.93	21.999	
6,800.00	6,798.15	6,746.97	6,745.08	23.72	161.92	-100.57	-808.20	-3,944.33	4,024.46	3,838.82	185.64	21.679	
6,900.00	6,898.15	6,853.16	6,851.15	24.08	164.62	-100.58	-808.83	-3,944.33	4,024.57	3,835.88	188.69	21.329	
7,000.00	6,998.15	6,953.16	6,951.15	24.44	167.35	-100.58	-808.83	-3,944.33	4,024.57	3,832.79	191.78	20.985	
7,037.55	7,035.71	6,990.38	6,988.36	24.57	168.37	-100.56	-807.71	-3,944.33	4,024.37	3,831.43	192.93	20.859	
7,100.00	7,098.15	7,049.52	7,047.49	24.79	169.98	-100.56	-807.87	-3,944.33	4,024.40	3,829.62	194.77	20.662	
7,200.00	7,198.15	7,144.24	7,142.19	25.15	172.57	-100.58	-808.69	-3,944.33	4,024.55	3,826.84	197.72	20.355	
7,300.00	7,298.15	7,253.32	7,251.15	25.51	175.66	-100.58	-808.83	-3,944.33	4,024.57	3,823.41	201.16	20.006	
7,332.10	7,330.25	7,285.05	7,282.86	25.62	176.56	-100.56	-807.74	-3,944.33	4,024.37	3,822.19	202.18	19.905	
7,400.00	7,398.15	7,346.67	7,344.47	25.87	178.31	-100.57	-808.04	-3,944.33	4,024.43	3,820.26	204.17	19.711	
7,500.00	7,498.15	7,453.46	7,451.15	26.22	181.35	-100.58	-808.83	-3,944.33	4,024.57	3,817.01	207.56	19.389	
7,580.92	7,579.08	7,534.30	7,531.98	26.51	183.65	-100.56	-807.87	-3,944.33	4,024.39	3,814.24	210.15	19.150	
7,600.00	7,598.15	7,551.83	7,549.51	26.58	184.14	-100.57	-807.89	-3,944.33	4,024.40	3,813.68	210.72	19.098	
7,700.00	7,698.15	7,643.70	7,641.37	26.94	186.76	-100.58	-808.60	-3,944.33	4,024.54	3,810.85	213.69	18.834	
7,800.00	7,798.15	7,753.59	7,751.15	27.29	189.48	-100.58	-808.83	-3,944.33	4,024.57	3,807.80	216.77	18.566	
7,832.66	7,830.82	7,786.14	7,783.68	27.41	190.27	-100.56	-807.74	-3,944.33	4,024.37	3,806.70	217.68	18.488	
7,900.00	7,898.15	7,847.22	7,844.75	27.65	191.75	-100.57	-808.01	-3,944.33	4,024.43	3,805.03	219.39	18.343	
7,911.80	7,909.95	7,857.93	7,855.46	27.69	192.01	-100.57	-808.12	-3,944.33	4,024.45	3,804.75	219.70	18.318 ES	
7,950.00	7,948.13	7,892.58	7,890.09	27.83	192.85	152.78	-808.55	-3,944.33	4,025.67	3,805.00	220.67	18.243	
8,000.00	7,997.81	7,953.32	7,950.81	28.00	194.13	152.59	-808.83	-3,944.33	4,030.60	3,808.48	222.12	18.146	
8,050.00	8,046.82	8,002.33	7,999.82	28.17	195.11	152.24	-808.83	-3,944.33	4,039.33	3,816.07	223.27	18.092	
8,100.00	8,094.79	8,049.70	8,047.18	28.34	196.05	151.73	-808.44	-3,944.33	4,051.77	3,827.40	224.38	18.058	
8,150.00	8,141.35	8,094.56	8,092.04	28.50	196.95	151.02	-808.53	-3,944.33	4,068.00	3,842.57	225.43	18.046 SF	
8,200.00	8,186.15	8,137.75	8,135.23	28.67	197.81	150.10	-808.71	-3,944.33	4,087.81	3,861.37	226.44	18.053	
8,250.00	8,228.85	8,184.40	8,181.85	28.82	198.74	148.96	-808.83	-3,944.33	4,111.06	3,883.55	227.51	18.070	
8,300.00	8,269.13	8,224.67	8,222.13	28.98	199.54	147.52	-808.83	-3,944.33	4,137.56	3,909.12	228.44	18.112	
8,350.00	8,306.67	8,262.21	8,259.67	29.13	200.29	145.73	-808.83	-3,944.33	4,167.15	3,937.84	229.31	18.173	
8,400.00	8,341.19	8,296.73	8,294.19	29.28	200.98	143.52	-808.83	-3,944.33	4,199.62	3,969.52	230.10	18.251	
8,450.00	8,372.42	8,327.47	8,324.91	29.42	201.60	140.78	-808.16	-3,944.33	4,234.64	4,003.83	230.81	18.347	
8,500.00	8,400.14	8,354.21	8,351.66	29.56	202.13	137.36	-808.20	-3,944.33	4,272.15	4,040.73	231.42	18.460	
8,511.80	8,406.15	8,360.01	8,357.46	29.59	202.25	136.43	-808.21	-3,944.33	4,281.33	4,049.77	231.56	18.489	
8,550.00	8,424.29	8,377.55	8,374.99	29.69	202.60	136.61	-808.27	-3,944.33	4,311.99	4,080.04	231.96	18.590	
8,600.00	8,445.07	8,397.65	8,395.09	29.82	203.00	136.17	-808.35	-3,944.33	4,354.30	4,121.89	232.41	18.735	
8,650.00	8,462.33	8,414.36	8,411.81	29.96	203.33	134.73	-808.44	-3,944.33	4,398.76	4,165.97	232.79	18.896	
8,700.00	8,475.94	8,427.55	8,425.00	30.08	203.59	131.80	-808.51	-3,944.33	4,445.01	4,211.92	233.09	19.070	
8,750.00	8,485.80	8,437.12	8,434.56	30.21	203.79	126.25	-808.58	-3,944.33	4,492.69	4,259.38	233.31	19.256	
8,800.00	8,491.83	8,442.97	8,440.41	30.33	203.90	115.23	-808.62	-3,944.33	4,541.41	4,307.96	233.44	19.454	
8,852.76	8,494.00	8,445.07	8,442.51	30.44	203.94	89.56	-808.63	-3,944.33	4,593.53	4,360.03	233.50	19.673	
8,900.00	8,494.00	8,445.06	8,442.50	30.55	203.94	89.56	-808.63	-3,944.33	4,640.39	4,406.88	233.51	19.873	
9,000.00	8,494.00	8,445.06	8,442.50	30.81	203.94	89.56	-808.63	-3,944.33	4,739.62	4,506.10	233.52	20.296	
9,100.00	8,494.00	8,445.05	8,442.49	31.10	203.94	89.56	-808.63	-3,944.33	4,838.88	4,605.34	233.54	20.720	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W08_FEDERAL V COM #004_1535127 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 262-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
9,200.00	8,494.00	8,445.05	8,442.49	31.43	203.94	89.56	-808.63	-3,944.33	4,938.17	4,704.61	233.56	21.143	
9,300.00	8,494.00	8,445.04	8,442.48	31.80	203.94	89.56	-808.63	-3,944.33	5,037.49	4,803.91	233.58	21.566	
9,400.00	8,494.00	8,445.04	8,442.48	32.21	203.94	89.55	-808.63	-3,944.33	5,136.84	4,903.23	233.60	21.990	
9,500.00	8,494.00	8,445.03	8,442.47	32.64	203.94	89.55	-808.63	-3,944.33	5,236.21	5,002.58	233.62	22.413	
9,600.00	8,494.00	8,445.03	8,442.47	33.11	203.94	89.55	-808.63	-3,944.33	5,335.60	5,101.95	233.65	22.836	
9,700.00	8,494.00	8,445.02	8,442.46	33.61	203.94	89.55	-808.63	-3,944.33	5,435.02	5,201.34	233.67	23.259	
9,800.00	8,494.00	8,445.02	8,442.46	34.14	203.94	89.55	-808.63	-3,944.33	5,534.45	5,300.76	233.70	23.682	
9,900.00	8,494.00	8,445.01	8,442.45	34.70	203.94	89.55	-808.63	-3,944.33	5,633.91	5,400.19	233.72	24.105	
10,000.00	8,494.00	8,445.01	8,442.45	35.28	203.94	89.55	-808.63	-3,944.33	5,733.38	5,499.64	233.75	24.528	
10,100.00	8,494.00	8,445.00	8,442.44	35.89	203.94	89.55	-808.63	-3,944.33	5,832.88	5,599.10	233.78	24.951	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W09_GOVERNMENT AB #002_1521480 - Inc Only - Inc Only													Offset Site Error:	0.00 usft
Survey Program:		300-INC-ONLY					Rule Assigned:				Offset Well Error:	0.00 usft		
Reference	Offset	Reference	Offset	Semi Major Axis	Highside	Offset Wellbore Centre		Distance			Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
13,100.00	8,494.00	8,415.47	8,412.65	61.35	205.26	89.30	-2,450.21	10,415.25	6,012.41	5,771.07	241.33	24.913		
13,200.00	8,494.00	8,415.46	8,412.65	62.33	205.25	89.30	-2,450.21	10,415.25	5,920.33	5,678.55	241.78	24.486		
13,300.00	8,494.00	8,415.45	8,412.64	63.32	205.25	89.30	-2,450.21	10,415.25	5,828.53	5,586.27	242.25	24.060		
13,400.00	8,494.00	8,415.45	8,412.63	64.31	205.25	89.30	-2,450.21	10,415.25	5,736.99	5,494.24	242.75	23.633		
13,500.00	8,494.00	8,415.44	8,412.62	65.31	205.25	89.30	-2,450.21	10,415.25	5,645.74	5,402.47	243.27	23.208		
13,600.00	8,494.00	8,415.43	8,412.62	66.31	205.25	89.30	-2,450.21	10,415.25	5,554.79	5,310.97	243.82	22.782		
13,700.00	8,494.00	8,415.42	8,412.61	67.31	205.25	89.30	-2,450.21	10,415.25	5,464.16	5,219.76	244.40	22.357		
13,800.00	8,494.00	8,415.42	8,412.60	68.32	205.25	89.30	-2,450.21	10,415.25	5,373.86	5,128.86	245.01	21.933		
13,900.00	8,494.00	8,415.41	8,412.59	69.33	205.25	89.30	-2,450.21	10,415.25	5,283.92	5,038.27	245.65	21.510		
14,000.00	8,494.00	8,415.40	8,412.59	70.34	205.25	89.30	-2,450.21	10,415.25	5,194.33	4,948.01	246.32	21.088		
14,100.00	8,494.00	8,415.39	8,412.58	71.36	205.25	89.30	-2,450.21	10,415.25	5,105.14	4,858.11	247.02	20.667		
14,200.00	8,494.00	8,415.39	8,412.57	72.38	205.25	89.30	-2,450.21	10,415.25	5,016.35	4,768.59	247.77	20.246		
14,300.00	8,494.00	8,415.38	8,412.56	73.41	205.25	89.30	-2,450.21	10,415.25	4,927.99	4,679.45	248.54	19.827		
14,400.00	8,494.00	8,415.37	8,412.56	74.43	205.25	89.30	-2,450.21	10,415.25	4,840.09	4,590.73	249.36	19.410		
14,500.00	8,494.00	8,415.36	8,412.55	75.46	205.25	89.30	-2,450.21	10,415.25	4,752.66	4,502.45	250.22	18.994		
14,600.00	8,494.00	8,415.36	8,412.54	76.49	205.25	89.30	-2,450.21	10,415.25	4,665.74	4,414.63	251.12	18.580		
14,700.00	8,494.00	8,415.35	8,412.53	77.53	205.25	89.30	-2,450.21	10,415.25	4,579.36	4,327.30	252.06	18.168		
14,800.00	8,494.00	8,415.34	8,412.53	78.56	205.25	89.30	-2,450.21	10,415.25	4,493.53	4,240.49	253.05	17.758		
14,900.00	8,494.00	8,415.33	8,412.52	79.60	205.25	89.30	-2,450.21	10,415.25	4,408.31	4,154.23	254.08	17.350		
15,000.00	8,494.00	8,415.33	8,412.51	80.64	205.25	89.30	-2,450.21	10,415.25	4,323.72	4,068.55	255.17	16.945		
15,100.00	8,494.00	8,415.32	8,412.50	81.69	205.25	89.30	-2,450.21	10,415.25	4,239.80	3,983.49	256.31	16.542		
15,200.00	8,494.00	8,415.31	8,412.50	82.73	205.25	89.30	-2,450.21	10,415.25	4,156.59	3,899.09	257.50	16.142		
15,300.00	8,494.00	8,415.30	8,412.49	83.78	205.25	89.30	-2,450.21	10,415.25	4,074.13	3,815.39	258.74	15.746		
15,400.00	8,494.00	8,415.30	8,412.48	84.83	205.25	89.30	-2,450.21	10,415.25	3,992.48	3,732.44	260.04	15.353		
15,500.00	8,494.00	8,415.29	8,412.47	85.88	205.25	89.30	-2,450.21	10,415.25	3,911.68	3,650.27	261.41	14.964		
15,600.00	8,494.00	8,415.28	8,412.47	86.94	205.25	89.30	-2,450.21	10,415.25	3,831.79	3,568.96	262.83	14.579		
15,700.00	8,494.00	8,415.27	8,412.46	87.99	205.25	89.30	-2,450.21	10,415.25	3,752.86	3,488.54	264.31	14.198		
15,800.00	8,494.00	8,415.27	8,412.45	89.05	205.25	89.30	-2,450.21	10,415.25	3,674.95	3,409.09	265.86	13.823		
15,900.00	8,494.00	8,415.26	8,412.44	90.10	205.25	89.30	-2,450.21	10,415.25	3,598.14	3,330.66	267.48	13.452		
16,000.00	8,494.00	8,415.25	8,412.44	91.16	205.25	89.30	-2,450.21	10,415.25	3,522.49	3,253.33	269.17	13.087		
16,100.00	8,494.00	8,415.24	8,412.43	92.22	205.25	89.30	-2,450.21	10,415.25	3,448.09	3,177.17	270.92	12.727		
16,200.00	8,494.00	8,415.24	8,412.42	93.29	205.25	89.30	-2,450.20	10,415.25	3,375.00	3,102.26	272.74	12.374		
16,300.00	8,494.00	8,415.23	8,412.41	94.35	205.25	89.30	-2,450.20	10,415.25	3,303.33	3,028.69	274.63	12.028		
16,400.00	8,494.00	8,415.22	8,412.41	95.42	205.25	89.30	-2,450.20	10,415.25	3,233.16	2,956.56	276.60	11.689		
16,500.00	8,494.00	8,415.21	8,412.40	96.48	205.25	89.30	-2,450.20	10,415.25	3,164.60	2,885.97	278.63	11.358		
16,600.00	8,494.00	8,415.21	8,412.39	97.55	205.25	89.30	-2,450.20	10,415.25	3,097.74	2,817.01	280.73	11.035		
16,700.00	8,494.00	8,415.20	8,412.38	98.62	205.25	89.30	-2,450.20	10,415.25	3,032.71	2,749.82	282.89	10.720		
16,800.00	8,494.00	8,415.19	8,412.38	99.69	205.25	89.30	-2,450.20	10,415.25	2,969.63	2,684.51	285.12	10.415		
16,900.00	8,494.00	8,415.18	8,412.37	100.76	205.25	89.30	-2,450.20	10,415.25	2,908.61	2,621.21	287.40	10.120		
17,000.00	8,494.00	8,415.18	8,412.36	101.83	205.25	89.30	-2,450.20	10,415.25	2,849.80	2,560.06	289.74	9.836		
17,100.00	8,494.00	8,415.17	8,412.35	102.91	205.25	89.30	-2,450.20	10,415.25	2,793.34	2,501.21	292.12	9.562		
17,200.00	8,494.00	8,415.16	8,412.35	103.98	205.25	89.29	-2,450.20	10,415.25	2,739.35	2,444.81	294.54	9.300		
17,300.00	8,494.00	8,415.15	8,412.34	105.06	205.25	89.29	-2,450.20	10,415.25	2,688.01	2,391.02	296.99	9.051		
17,400.00	8,494.00	8,415.15	8,412.33	106.13	205.25	89.29	-2,450.20	10,415.25	2,639.46	2,340.01	299.45	8.814		
17,500.00	8,494.00	8,415.14	8,412.32	107.21	205.24	89.29	-2,450.20	10,415.25	2,593.86	2,291.94	301.92	8.591		
17,600.00	8,494.00	8,415.13	8,412.32	108.29	205.24	89.29	-2,450.20	10,415.25	2,551.36	2,246.98	304.37	8.382		
17,700.00	8,494.00	8,415.12	8,412.31	109.37	205.24	89.29	-2,450.20	10,415.25	2,512.13	2,205.33	306.80	8.188		
17,800.00	8,494.00	8,415.12	8,412.30	110.45	205.24	89.29	-2,450.20	10,415.25	2,476.31	2,167.13	309.18	8.009		
17,900.00	8,494.00	8,415.11	8,412.29	111.53	205.24	89.29	-2,450.20	10,415.25	2,444.07	2,132.57	311.50	7.846		
18,000.00	8,494.00	8,415.10	8,412.29	112.61	205.24	89.29	-2,450.20	10,415.25	2,415.53	2,101.81	313.73	7.700		
18,100.00	8,494.00	8,415.09	8,412.28	113.69	205.24	89.29	-2,450.20	10,415.25	2,390.85	2,074.99	315.85	7.570		
18,200.00	8,494.00	8,415.09	8,412.27	114.77	205.24	89.29	-2,450.20	10,415.25	2,370.12	2,052.27	317.85	7.457		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W09_GOVERNMENT AB #002_1521480 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 300-INC-ONLY													Offset Well Error: 0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
		Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
18,300.00	8,494.00	8,415.08	8,412.26	115.86	205.24	89.29	-2,450.20	10,415.25	2,353.47	2,033.76	319.71	7.361	
18,400.00	8,494.00	8,415.07	8,412.26	116.94	205.24	89.29	-2,450.20	10,415.25	2,340.98	2,019.57	321.41	7.283	
18,500.00	8,494.00	8,415.06	8,412.25	118.03	205.24	89.29	-2,450.20	10,415.25	2,332.71	2,009.77	322.93	7.223	
18,600.00	8,494.00	8,415.06	8,412.24	119.11	205.24	89.29	-2,450.20	10,415.25	2,328.70	2,004.43	324.27	7.181	
18,643.29	8,494.00	8,415.05	8,412.24	119.58	205.24	89.29	-2,450.20	10,415.25	2,328.30	2,003.52	324.79	7.169 CC, ES	
18,700.00	8,494.00	8,415.05	8,412.23	120.20	205.24	89.29	-2,450.20	10,415.25	2,328.99	2,003.59	325.41	7.157	
18,800.00	8,494.00	8,415.04	8,412.23	121.29	205.24	89.29	-2,450.20	10,415.25	2,333.57	2,007.23	326.34	7.151 SF	
18,900.00	8,494.00	8,415.03	8,412.22	122.38	205.24	89.29	-2,450.20	10,415.25	2,342.41	2,015.35	327.06	7.162	
19,000.00	8,494.00	8,415.03	8,412.21	123.46	205.24	89.29	-2,450.20	10,415.25	2,355.47	2,027.89	327.58	7.190	
19,100.00	8,494.00	8,415.02	8,412.20	124.55	205.24	89.29	-2,450.20	10,415.25	2,372.67	2,044.77	327.90	7.236	
19,200.00	8,494.00	8,415.01	8,412.20	125.64	205.24	89.29	-2,450.20	10,415.25	2,393.93	2,065.91	328.02	7.298	
19,300.00	8,494.00	8,415.00	8,412.19	126.73	205.24	89.29	-2,450.20	10,415.25	2,419.14	2,091.19	327.95	7.376	
19,355.95	8,494.00	8,415.00	8,412.18	127.34	205.24	89.29	-2,450.20	10,415.25	2,434.93	2,107.09	327.84	7.427	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W10_GOVERNMENT AB #003_1521774 - Inc Only - Inc Only												Offset Site Error:	0.00 usft
Survey Program: 350-INC-ONLY				Rule Assigned:								Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance			Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)		Separation Factor
11,600.00	8,494.00	8,438.72	8,438.03	47.36	164.92	89.68	-2,468.97	7,743.50	4,952.39	4,753.59	198.80	24.912	
11,700.00	8,494.00	8,438.71	8,438.02	48.23	164.92	89.68	-2,468.97	7,743.50	4,864.34	4,665.11	199.23	24.416	
11,800.00	8,494.00	8,438.71	8,438.02	49.12	164.92	89.68	-2,468.97	7,743.50	4,776.77	4,577.08	199.69	23.921	
11,900.00	8,494.00	8,438.70	8,438.02	50.01	164.92	89.68	-2,468.97	7,743.50	4,689.70	4,489.51	200.19	23.426	
12,000.00	8,494.00	8,438.70	8,438.01	50.92	164.92	89.68	-2,468.97	7,743.50	4,603.15	4,402.43	200.72	22.933	
12,100.00	8,494.00	8,438.70	8,438.01	51.83	164.92	89.68	-2,468.97	7,743.50	4,517.15	4,315.87	201.29	22.441	
12,200.00	8,494.00	8,438.69	8,438.01	52.75	164.92	89.68	-2,468.97	7,743.50	4,431.75	4,229.85	201.89	21.951	
12,300.00	8,494.00	8,438.69	8,438.00	53.68	164.92	89.68	-2,468.97	7,743.50	4,346.96	4,144.43	202.54	21.463	
12,400.00	8,494.00	8,438.69	8,438.00	54.62	164.92	89.68	-2,468.97	7,743.50	4,262.84	4,059.62	203.22	20.976	
12,500.00	8,494.00	8,438.68	8,438.00	55.56	164.92	89.68	-2,468.97	7,743.50	4,179.41	3,975.46	203.95	20.492	
12,600.00	8,494.00	8,438.68	8,437.99	56.51	164.92	89.68	-2,468.97	7,743.50	4,096.73	3,892.00	204.73	20.011	
12,700.00	8,494.00	8,438.68	8,437.99	57.47	164.92	89.68	-2,468.97	7,743.50	4,014.83	3,809.29	205.55	19.532	
12,800.00	8,494.00	8,438.67	8,437.98	58.43	164.92	89.68	-2,468.97	7,743.50	3,933.78	3,727.36	206.42	19.057	
12,900.00	8,494.00	8,438.67	8,437.98	59.40	164.92	89.68	-2,468.97	7,743.50	3,853.61	3,646.27	207.34	18.586	
13,000.00	8,494.00	8,438.67	8,437.98	60.37	164.92	89.68	-2,468.97	7,743.50	3,774.39	3,566.07	208.32	18.118	
13,100.00	8,494.00	8,438.66	8,437.97	61.35	164.92	89.68	-2,468.97	7,743.50	3,696.18	3,486.82	209.35	17.655	
13,200.00	8,494.00	8,438.66	8,437.97	62.33	164.92	89.68	-2,468.97	7,743.50	3,619.04	3,408.60	210.44	17.197	
13,300.00	8,494.00	8,438.65	8,437.97	63.32	164.92	89.68	-2,468.97	7,743.50	3,543.04	3,331.45	211.59	16.745	
13,400.00	8,494.00	8,438.65	8,437.96	64.31	164.92	89.68	-2,468.97	7,743.50	3,468.26	3,255.47	212.80	16.299	
13,500.00	8,494.00	8,438.65	8,437.96	65.31	164.92	89.68	-2,468.97	7,743.50	3,394.78	3,180.72	214.06	15.859	
13,600.00	8,494.00	8,438.64	8,437.96	66.31	164.92	89.68	-2,468.97	7,743.50	3,322.69	3,107.29	215.40	15.426	
13,700.00	8,494.00	8,438.64	8,437.95	67.31	164.92	89.68	-2,468.97	7,743.50	3,252.07	3,035.28	216.79	15.001	
13,800.00	8,494.00	8,438.64	8,437.95	68.32	164.92	89.68	-2,468.97	7,743.50	3,183.03	2,964.78	218.25	14.585	
13,900.00	8,494.00	8,438.63	8,437.95	69.33	164.92	89.68	-2,468.97	7,743.50	3,115.67	2,895.90	219.77	14.177	
14,000.00	8,494.00	8,438.63	8,437.94	70.34	164.92	89.68	-2,468.97	7,743.50	3,050.09	2,828.75	221.35	13.780	
14,100.00	8,494.00	8,438.63	8,437.94	71.36	164.92	89.68	-2,468.97	7,743.50	2,986.43	2,763.44	222.99	13.393	
14,200.00	8,494.00	8,438.62	8,437.93	72.38	164.92	89.68	-2,468.97	7,743.50	2,924.81	2,700.12	224.69	13.017	
14,300.00	8,494.00	8,438.62	8,437.93	73.41	164.92	89.68	-2,468.97	7,743.50	2,865.34	2,638.90	226.44	12.654	
14,400.00	8,494.00	8,438.62	8,437.93	74.43	164.92	89.68	-2,468.97	7,743.50	2,808.18	2,579.93	228.25	12.303	
14,500.00	8,494.00	8,438.61	8,437.92	75.46	164.92	89.68	-2,468.97	7,743.50	2,753.47	2,523.37	230.10	11.966	
14,600.00	8,494.00	8,438.61	8,437.92	76.49	164.92	89.68	-2,468.97	7,743.50	2,701.35	2,469.36	231.99	11.644	
14,700.00	8,494.00	8,438.60	8,437.92	77.53	164.92	89.68	-2,468.97	7,743.50	2,651.98	2,418.07	233.91	11.338	
14,800.00	8,494.00	8,438.60	8,437.91	78.56	164.92	89.68	-2,468.97	7,743.50	2,605.52	2,369.66	235.85	11.047	
14,900.00	8,494.00	8,438.60	8,437.91	79.60	164.92	89.68	-2,468.97	7,743.50	2,562.11	2,324.31	237.81	10.774	
15,000.00	8,494.00	8,438.59	8,437.91	80.64	164.92	89.68	-2,468.97	7,743.50	2,521.93	2,282.17	239.76	10.519	
15,100.00	8,494.00	8,438.59	8,437.90	81.69	164.92	89.68	-2,468.97	7,743.50	2,485.12	2,243.43	241.70	10.282	
15,200.00	8,494.00	8,438.59	8,437.90	82.73	164.92	89.68	-2,468.97	7,743.50	2,451.85	2,208.24	243.61	10.065	
15,300.00	8,494.00	8,438.58	8,437.90	83.78	164.92	89.68	-2,468.97	7,743.50	2,422.24	2,176.77	245.47	9.868	
15,400.00	8,494.00	8,438.58	8,437.89	84.83	164.92	89.68	-2,468.97	7,743.50	2,396.45	2,149.16	247.28	9.691	
15,500.00	8,494.00	8,438.58	8,437.89	85.88	164.92	89.68	-2,468.97	7,743.50	2,374.59	2,125.57	249.02	9.536	
15,600.00	8,494.00	8,438.57	8,437.88	86.94	164.92	89.68	-2,468.97	7,743.50	2,356.77	2,106.11	250.66	9.402	
15,700.00	8,494.00	8,438.57	8,437.88	87.99	164.92	89.68	-2,468.97	7,743.50	2,343.09	2,090.89	252.20	9.291	
15,800.00	8,494.00	8,438.57	8,437.88	89.05	164.92	89.68	-2,468.97	7,743.50	2,333.62	2,079.99	253.62	9.201	
15,900.00	8,494.00	8,438.56	8,437.87	90.10	164.92	89.68	-2,468.97	7,743.50	2,328.41	2,073.49	254.92	9.134	
15,971.47	8,494.00	8,438.56	8,437.87	90.86	164.92	89.68	-2,468.97	7,743.50	2,327.31	2,071.55	255.76	9.100 CC	
16,000.00	8,494.00	8,438.56	8,437.87	91.16	164.92	89.68	-2,468.97	7,743.50	2,327.49	2,071.41	256.07	9.089 ES	
16,100.00	8,494.00	8,438.55	8,437.87	92.22	164.92	89.68	-2,468.97	7,743.50	2,330.86	2,073.78	257.08	9.067	
16,200.00	8,494.00	8,438.55	8,437.86	93.29	164.92	89.68	-2,468.97	7,743.50	2,338.50	2,080.57	257.94	9.066 SF	
16,300.00	8,494.00	8,438.55	8,437.86	94.35	164.92	89.68	-2,468.97	7,743.50	2,350.39	2,091.75	258.64	9.088	
16,400.00	8,494.00	8,438.54	8,437.86	95.42	164.91	89.68	-2,468.97	7,743.50	2,366.44	2,107.25	259.19	9.130	
16,500.00	8,494.00	8,438.54	8,437.85	96.48	164.91	89.68	-2,468.97	7,743.50	2,386.57	2,126.98	259.59	9.194	
16,600.00	8,494.00	8,438.54	8,437.85	97.55	164.91	89.68	-2,468.97	7,743.50	2,410.69	2,150.84	259.85	9.277	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W10_GOVERNMENT AB #003_1521774 - Inc Only - Inc Only											Offset Site Error: 0.00 usft
Survey Program: 350-INC-ONLY											Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	
16,700.00	8,494.00	8,438.53	8,437.85	98.62	164.91	89.68	-2,468.97	7,743.50	2,438.67	2,178.71	9.381
16,800.00	8,494.00	8,438.53	8,437.84	99.69	164.91	89.68	-2,468.97	7,743.50	2,470.39	2,210.44	9.503
16,900.00	8,494.00	8,438.53	8,437.84	100.76	164.91	89.68	-2,468.97	7,743.50	2,505.70	2,245.87	9.644
17,000.00	8,494.00	8,438.52	8,437.83	101.83	164.91	89.68	-2,468.97	7,743.50	2,544.45	2,284.86	9.802
17,100.00	8,494.00	8,438.52	8,437.83	102.91	164.91	89.68	-2,468.97	7,743.50	2,586.50	2,327.24	9.976
17,200.00	8,494.00	8,438.52	8,437.83	103.98	164.91	89.68	-2,468.97	7,743.50	2,631.67	2,372.82	10.167
17,300.00	8,494.00	8,438.51	8,437.82	105.06	164.91	89.68	-2,468.97	7,743.50	2,679.81	2,421.46	10.373
17,400.00	8,494.00	8,438.51	8,437.82	106.13	164.91	89.68	-2,468.97	7,743.50	2,730.76	2,472.97	10.593
17,500.00	8,494.00	8,438.50	8,437.82	107.21	164.91	89.68	-2,468.97	7,743.50	2,784.38	2,527.20	10.827
17,600.00	8,494.00	8,438.50	8,437.81	108.29	164.91	89.68	-2,468.97	7,743.50	2,840.51	2,583.98	11.073
17,700.00	8,494.00	8,438.50	8,437.81	109.37	164.91	89.68	-2,468.97	7,743.50	2,899.00	2,643.16	11.332
17,800.00	8,494.00	8,438.49	8,437.81	110.45	164.91	89.68	-2,468.97	7,743.50	2,959.71	2,704.60	11.601
17,900.00	8,494.00	8,438.49	8,437.80	111.53	164.91	89.68	-2,468.97	7,743.50	3,022.52	2,768.14	11.882
18,000.00	8,494.00	8,438.49	8,437.80	112.61	164.91	89.68	-2,468.97	7,743.50	3,087.28	2,833.66	12.173
18,100.00	8,494.00	8,438.48	8,437.80	113.69	164.91	89.67	-2,468.97	7,743.50	3,153.89	2,901.03	12.473
18,200.00	8,494.00	8,438.48	8,437.79	114.77	164.91	89.67	-2,468.97	7,743.50	3,222.22	2,970.14	12.782
18,300.00	8,494.00	8,438.48	8,437.79	115.86	164.91	89.67	-2,468.97	7,743.50	3,292.18	3,040.86	13.100
18,400.00	8,494.00	8,438.47	8,437.78	116.94	164.91	89.67	-2,468.97	7,743.50	3,363.65	3,113.10	13.425
18,500.00	8,494.00	8,438.47	8,437.78	118.03	164.91	89.67	-2,468.97	7,743.50	3,436.54	3,186.75	13.758
18,600.00	8,494.00	8,438.47	8,437.78	119.11	164.91	89.67	-2,468.97	7,743.50	3,510.78	3,261.74	14.097
18,700.00	8,494.00	8,438.46	8,437.77	120.20	164.91	89.67	-2,468.97	7,743.50	3,586.26	3,337.96	14.443
18,800.00	8,494.00	8,438.46	8,437.77	121.29	164.91	89.67	-2,468.97	7,743.50	3,662.92	3,415.35	14.795
18,900.00	8,494.00	8,438.45	8,437.77	122.38	164.91	89.67	-2,468.97	7,743.50	3,740.68	3,493.82	15.153
19,000.00	8,494.00	8,438.45	8,437.76	123.46	164.91	89.67	-2,468.97	7,743.50	3,819.47	3,573.31	15.516
19,100.00	8,494.00	8,438.45	8,437.76	124.55	164.91	89.67	-2,468.97	7,743.50	3,899.24	3,653.77	15.884
19,200.00	8,494.00	8,438.44	8,437.76	125.64	164.91	89.67	-2,468.97	7,743.50	3,979.92	3,735.11	16.257
19,300.00	8,494.00	8,438.44	8,437.75	126.73	164.91	89.67	-2,468.97	7,743.50	4,061.46	3,817.30	16.634
19,355.95	8,494.00	8,438.44	8,437.75	127.34	164.91	89.67	-2,468.97	7,743.50	4,107.45	3,863.64	16.847



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W11_GOVERNMENT AB #006_1527846 - Inc Only - Inc Only											Offset Site Error: 0.00 usft			
Survey Program: 156-INC-ONLY		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Rule Assigned:				Offset Well Error: 0.00 usft	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
10,800.00	8,494.00	6,554.00	6,551.42	40.78	165.57	-9.78	176.80	6,461.15	4,359.39	4,182.28	177.11	24.614		
10,900.00	8,494.00	6,554.00	6,551.42	41.55	165.57	-9.78	176.80	6,461.15	4,269.96	4,093.62	176.34	24.214		
11,000.00	8,494.00	6,554.00	6,551.42	42.34	165.57	-9.78	176.80	6,461.15	4,181.01	4,005.48	175.53	23.819		
11,100.00	8,494.00	6,554.00	6,551.42	43.14	165.57	-9.78	176.80	6,461.15	4,092.57	3,917.90	174.67	23.431		
11,200.00	8,494.00	6,554.00	6,551.42	43.96	165.57	-9.78	176.80	6,461.15	4,004.67	3,830.92	173.75	23.048		
11,300.00	8,494.00	6,554.00	6,551.42	44.79	165.57	-9.78	176.80	6,461.15	3,917.36	3,744.58	172.78	22.673		
11,400.00	8,494.00	6,554.00	6,551.42	45.64	165.57	-9.78	176.80	6,461.15	3,830.66	3,658.93	171.74	22.305		
11,500.00	8,494.00	6,554.00	6,551.42	46.49	165.57	-9.78	176.80	6,461.15	3,744.63	3,574.00	170.63	21.946		
11,600.00	8,494.00	6,554.00	6,551.42	47.36	165.57	-9.78	176.80	6,461.15	3,659.31	3,489.86	169.45	21.595		
11,700.00	8,494.00	6,554.00	6,551.42	48.23	165.57	-9.78	176.80	6,461.15	3,574.75	3,406.56	168.19	21.254		
11,800.00	8,494.00	6,554.00	6,551.42	49.12	165.57	-9.78	176.80	6,461.15	3,491.01	3,324.16	166.84	20.924		
11,900.00	8,494.00	6,554.00	6,551.42	50.01	165.57	-9.78	176.80	6,461.15	3,408.14	3,242.73	165.40	20.605		
12,000.00	8,494.00	6,554.00	6,551.42	50.92	165.57	-9.78	176.80	6,461.15	3,326.21	3,162.35	163.86	20.299		
12,100.00	8,494.00	6,554.00	6,551.42	51.83	165.57	-9.78	176.80	6,461.15	3,245.30	3,083.09	162.21	20.006		
12,200.00	8,494.00	6,554.00	6,551.42	52.75	165.57	-9.78	176.80	6,461.15	3,165.48	3,005.04	160.44	19.730		
12,300.00	8,494.00	6,554.00	6,551.42	53.68	165.57	-9.78	176.80	6,461.15	3,086.83	2,928.29	158.55	19.470		
12,400.00	8,494.00	6,554.00	6,551.42	54.62	165.57	-9.78	176.80	6,461.15	3,009.46	2,852.95	156.51	19.228		
12,500.00	8,494.00	6,554.00	6,551.42	55.56	165.57	-9.78	176.80	6,461.15	2,933.45	2,779.12	154.33	19.008		
12,600.00	8,494.00	6,554.00	6,551.42	56.51	165.57	-9.78	176.80	6,461.15	2,858.92	2,706.94	151.98	18.811		
12,700.00	8,494.00	6,554.00	6,551.42	57.47	165.57	-9.78	176.80	6,461.15	2,785.98	2,636.52	149.46	18.640		
12,800.00	8,494.00	6,554.00	6,551.42	58.43	165.57	-9.78	176.80	6,461.15	2,714.77	2,568.01	146.75	18.499		
12,900.00	8,494.00	6,554.00	6,551.42	59.40	165.57	-9.78	176.80	6,461.15	2,645.42	2,501.57	143.85	18.390		
13,000.00	8,494.00	6,554.00	6,551.42	60.37	165.57	-9.78	176.80	6,461.15	2,578.09	2,437.35	140.73	18.319		
13,100.00	8,494.00	6,554.00	6,551.42	61.35	165.57	-9.78	176.80	6,461.15	2,512.93	2,375.54	137.39	18.290		
13,200.00	8,494.00	6,554.00	6,551.42	62.33	165.57	-9.78	176.80	6,461.15	2,450.12	2,316.31	133.82	18.309		
13,300.00	8,494.00	6,554.00	6,551.42	63.32	165.57	-9.78	176.80	6,461.15	2,389.85	2,259.85	130.00	18.384		
13,400.00	8,494.00	6,554.00	6,551.42	64.31	165.57	-9.78	176.80	6,461.15	2,332.31	2,206.39	125.92	18.522		
13,500.00	8,494.00	6,554.00	6,551.42	65.31	165.57	-9.78	176.80	6,461.15	2,277.71	2,156.11	121.59	18.732		
13,600.00	8,494.00	6,554.00	6,551.42	66.31	165.57	-9.78	176.80	6,461.15	2,226.26	2,109.25	117.01	19.026		
13,700.00	8,494.00	6,554.00	6,551.42	67.31	165.57	-9.78	176.80	6,461.15	2,178.19	2,066.01	112.18	19.417		
13,800.00	8,494.00	6,554.00	6,551.42	68.32	165.57	-9.78	176.80	6,461.15	2,133.73	2,026.61	107.12	19.918		
13,900.00	8,494.00	6,554.00	6,551.42	69.33	165.57	-9.78	176.80	6,461.15	2,093.11	1,991.23	101.88	20.545		
14,000.00	8,494.00	6,554.00	6,551.42	70.34	165.57	-9.78	176.80	6,461.15	2,056.54	1,960.05	96.49	21.313		
14,100.00	8,494.00	6,554.00	6,551.42	71.36	165.57	-9.78	176.80	6,461.15	2,024.27	1,933.21	91.06	22.231		
14,200.00	8,494.00	6,554.00	6,551.42	72.38	165.57	-9.78	176.80	6,461.15	1,996.48	1,910.79	85.69	23.298		
14,300.00	8,494.00	6,554.00	6,551.42	73.41	165.57	-9.78	176.80	6,461.15	1,973.38	1,892.80	80.58	24.490		
15,000.00	8,494.00	6,554.00	6,551.42	80.64	165.57	-9.78	176.80	6,461.15	1,952.49	1,874.07	78.42	24.897	CC, ES	
15,100.00	8,494.00	6,554.00	6,551.42	81.69	165.57	-9.78	176.80	6,461.15	1,969.90	1,885.98	83.91	23.475		
15,200.00	8,494.00	6,554.00	6,551.42	82.73	165.57	-9.78	176.80	6,461.15	1,992.18	1,902.25	89.93	22.153		
15,300.00	8,494.00	6,554.00	6,551.42	83.78	165.57	-9.78	176.80	6,461.15	2,019.17	1,923.00	96.17	20.995		
15,400.00	8,494.00	6,554.00	6,551.42	84.83	165.57	-9.78	176.80	6,461.15	2,050.69	1,948.24	102.45	20.017		
15,500.00	8,494.00	6,554.00	6,551.42	85.88	165.57	-9.78	176.80	6,461.15	2,086.54	1,977.92	108.62	19.209		
15,600.00	8,494.00	6,554.00	6,551.42	86.94	165.57	-9.78	176.80	6,461.15	2,126.48	2,011.89	114.59	18.557		
15,700.00	8,494.00	6,554.00	6,551.42	87.99	165.57	-9.78	176.80	6,461.15	2,170.30	2,049.99	120.31	18.039		
15,800.00	8,494.00	6,554.00	6,551.42	89.05	165.57	-9.78	176.80	6,461.15	2,217.77	2,092.03	125.74	17.638		
15,900.00	8,494.00	6,554.00	6,551.42	90.10	165.57	-9.78	176.80	6,461.15	2,268.65	2,137.80	130.85	17.337		
16,000.00	8,494.00	6,554.00	6,551.42	91.16	165.57	-9.78	176.80	6,461.15	2,322.73	2,187.07	135.65	17.123		
16,100.00	8,494.00	6,554.00	6,551.42	92.22	165.57	-9.78	176.80	6,461.15	2,379.78	2,239.64	140.14	16.982		
16,200.00	8,494.00	6,554.00	6,551.42	93.29	165.57	-9.78	176.80	6,461.15	2,439.59	2,295.28	144.31	16.905		
16,300.00	8,494.00	6,554.00	6,551.42	94.35	165.57	-9.78	176.80	6,461.15	2,501.98	2,353.79	148.19	16.883	SF	
16,400.00	8,494.00	6,554.00	6,551.42	95.42	165.57	-9.78	176.80	6,461.15	2,566.75	2,414.96	151.79	16.910		
16,500.00	8,494.00	6,554.00	6,551.42	96.48	165.57	-9.78	176.80	6,461.15	2,633.72	2,478.59	155.12	16.978		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W11_GOVERNMENT AB #006_1527846 - Inc Only - Inc Only												Offset Site Error:	0.00 usft
Survey Program: 156-INC-ONLY												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
16,600.00	8,494.00	6,554.00	6,551.42	97.55	165.57	-9.78	176.80	6,461.15	2,702.73	2,544.52	158.21	17.083	
16,700.00	8,494.00	6,554.00	6,551.42	98.62	165.57	-9.78	176.80	6,461.15	2,773.63	2,612.56	161.07	17.220	
16,800.00	8,494.00	6,554.00	6,551.42	99.69	165.57	-9.78	176.80	6,461.15	2,846.28	2,682.57	163.71	17.386	
16,900.00	8,494.00	6,554.00	6,551.42	100.76	165.57	-9.78	176.80	6,461.15	2,920.55	2,754.39	166.16	17.577	
17,000.00	8,494.00	6,554.00	6,551.42	101.83	165.57	-9.78	176.80	6,461.15	2,996.31	2,827.89	168.42	17.790	
17,100.00	8,494.00	6,554.00	6,551.42	102.91	165.57	-9.78	176.80	6,461.15	3,073.46	2,902.94	170.52	18.024	
17,200.00	8,494.00	6,554.00	6,551.42	103.98	165.57	-9.78	176.80	6,461.15	3,151.90	2,979.43	172.47	18.276	
17,300.00	8,494.00	6,554.00	6,551.42	105.06	165.57	-9.78	176.80	6,461.15	3,231.52	3,057.25	174.27	18.543	
17,400.00	8,494.00	6,554.00	6,551.42	106.13	165.57	-9.78	176.80	6,461.15	3,312.25	3,136.31	175.95	18.825	
17,500.00	8,494.00	6,554.00	6,551.42	107.21	165.57	-9.78	176.80	6,461.15	3,394.01	3,216.51	177.50	19.121	
17,600.00	8,494.00	6,554.00	6,551.42	108.29	165.57	-9.78	176.80	6,461.15	3,476.72	3,297.77	178.95	19.428	
17,700.00	8,494.00	6,554.00	6,551.42	109.37	165.57	-9.78	176.80	6,461.15	3,560.32	3,380.02	180.30	19.746	
17,800.00	8,494.00	6,554.00	6,551.42	110.45	165.57	-9.78	176.80	6,461.15	3,644.75	3,463.18	181.56	20.074	
17,900.00	8,494.00	6,554.00	6,551.42	111.53	165.57	-9.78	176.80	6,461.15	3,729.94	3,547.20	182.74	20.411	
18,000.00	8,494.00	6,554.00	6,551.42	112.61	165.57	-9.78	176.80	6,461.15	3,815.85	3,632.01	183.84	20.756	
18,100.00	8,494.00	6,554.00	6,551.42	113.69	165.57	-9.78	176.80	6,461.15	3,902.44	3,717.57	184.87	21.109	
18,200.00	8,494.00	6,554.00	6,551.42	114.77	165.57	-9.78	176.80	6,461.15	3,989.65	3,803.81	185.84	21.469	
18,300.00	8,494.00	6,554.00	6,551.42	115.86	165.57	-9.78	176.80	6,461.15	4,077.45	3,890.71	186.74	21.834	
18,400.00	8,494.00	6,554.00	6,551.42	116.94	165.57	-9.78	176.80	6,461.15	4,165.80	3,978.20	187.60	22.206	
18,500.00	8,494.00	6,554.00	6,551.42	118.03	165.57	-9.78	176.80	6,461.15	4,254.66	4,066.26	188.40	22.583	
18,600.00	8,494.00	6,554.00	6,551.42	119.11	165.57	-9.78	176.80	6,461.15	4,344.01	4,154.85	189.16	22.965	
18,700.00	8,494.00	6,554.00	6,551.42	120.20	165.57	-9.78	176.80	6,461.15	4,433.82	4,243.94	189.87	23.351	
18,800.00	8,494.00	6,554.00	6,551.42	121.29	165.57	-9.78	176.80	6,461.15	4,524.05	4,333.50	190.55	23.742	
18,900.00	8,494.00	6,554.00	6,551.42	122.38	165.57	-9.78	176.80	6,461.15	4,614.68	4,423.49	191.19	24.137	
19,000.00	8,494.00	6,554.00	6,551.42	123.46	165.57	-9.78	176.80	6,461.15	4,705.70	4,513.90	191.80	24.535	
19,100.00	8,494.00	6,554.00	6,551.42	124.55	165.57	-9.78	176.80	6,461.15	4,797.07	4,604.70	192.37	24.936	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W12_GOVERNMENT AB #007_1527847 - Inc Only - Inc Only													Offset Site Error:	0.00 usft
Survey Program:		155-INC-ONLY					Rule Assigned:				Offset Well Error:	0.00 usft		
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance			Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
11,600.00	8,494.00	6,590.00	6,586.51	47.36	178.10	-10.01	187.17	7,781.64	4,815.61	4,622.52	193.09	24.939		
11,700.00	8,494.00	6,590.00	6,586.51	48.23	178.10	-10.01	187.17	7,781.64	4,723.80	4,531.26	192.54	24.534		
11,800.00	8,494.00	6,590.00	6,586.51	49.12	178.10	-10.01	187.17	7,781.64	4,632.32	4,440.37	191.95	24.132		
11,900.00	8,494.00	6,590.00	6,586.51	50.01	178.10	-10.01	187.17	7,781.64	4,541.21	4,349.88	191.34	23.734		
12,000.00	8,494.00	6,590.00	6,586.51	50.92	178.10	-10.01	187.17	7,781.64	4,450.48	4,259.80	190.68	23.340		
12,100.00	8,494.00	6,590.00	6,586.51	51.83	178.10	-10.01	187.17	7,781.64	4,360.16	4,170.17	189.99	22.950		
12,200.00	8,494.00	6,590.00	6,586.51	52.75	178.10	-10.01	187.17	7,781.64	4,270.26	4,081.01	189.25	22.564		
12,300.00	8,494.00	6,590.00	6,586.51	53.68	178.10	-10.01	187.17	7,781.64	4,180.83	3,992.35	188.47	22.183		
12,400.00	8,494.00	6,590.00	6,586.51	54.62	178.10	-10.01	187.17	7,781.64	4,091.88	3,904.24	187.64	21.807		
12,500.00	8,494.00	6,590.00	6,586.51	55.56	178.10	-10.01	187.17	7,781.64	4,003.46	3,816.70	186.76	21.436		
12,600.00	8,494.00	6,590.00	6,586.51	56.51	178.10	-10.01	187.17	7,781.64	3,915.59	3,729.77	185.82	21.072		
12,700.00	8,494.00	6,590.00	6,586.51	57.47	178.10	-10.01	187.17	7,781.64	3,828.32	3,643.50	184.82	20.714		
12,800.00	8,494.00	6,590.00	6,586.51	58.43	178.10	-10.01	187.17	7,781.64	3,741.69	3,557.93	183.75	20.362		
12,900.00	8,494.00	6,590.00	6,586.51	59.40	178.10	-10.01	187.17	7,781.64	3,655.73	3,473.12	182.61	20.019		
13,000.00	8,494.00	6,590.00	6,586.51	60.37	178.10	-10.01	187.17	7,781.64	3,570.51	3,389.12	181.40	19.684		
13,100.00	8,494.00	6,590.00	6,586.51	61.35	178.10	-10.01	187.17	7,781.64	3,486.08	3,305.99	180.09	19.357		
13,200.00	8,494.00	6,590.00	6,586.51	62.33	178.10	-10.01	187.17	7,781.64	3,402.49	3,223.79	178.69	19.041		
13,300.00	8,494.00	6,590.00	6,586.51	63.32	178.10	-10.01	187.17	7,781.64	3,319.80	3,142.61	177.20	18.735		
13,400.00	8,494.00	6,590.00	6,586.51	64.31	178.10	-10.01	187.17	7,781.64	3,238.10	3,062.51	175.59	18.441		
13,500.00	8,494.00	6,590.00	6,586.51	65.31	178.10	-10.01	187.17	7,781.64	3,157.45	2,983.58	173.87	18.160		
13,600.00	8,494.00	6,590.00	6,586.51	66.31	178.10	-10.01	187.17	7,781.64	3,077.93	2,905.91	172.01	17.894		
13,700.00	8,494.00	6,590.00	6,586.51	67.31	178.10	-10.01	187.17	7,781.64	2,999.64	2,829.62	170.02	17.643		
13,800.00	8,494.00	6,590.00	6,586.51	68.32	178.10	-10.01	187.17	7,781.64	2,922.67	2,754.79	167.88	17.410		
13,900.00	8,494.00	6,590.00	6,586.51	69.33	178.10	-10.01	187.17	7,781.64	2,847.13	2,681.57	165.57	17.196		
14,000.00	8,494.00	6,590.00	6,586.51	70.34	178.10	-10.01	187.17	7,781.64	2,773.15	2,610.07	163.08	17.005		
14,100.00	8,494.00	6,590.00	6,586.51	71.36	178.10	-10.01	187.17	7,781.64	2,700.84	2,540.44	160.40	16.838		
14,200.00	8,494.00	6,590.00	6,586.51	72.38	178.10	-10.01	187.17	7,781.64	2,630.34	2,472.83	157.51	16.699		
14,300.00	8,494.00	6,590.00	6,586.51	73.41	178.10	-10.01	187.17	7,781.64	2,561.81	2,407.41	154.40	16.592		
14,400.00	8,494.00	6,590.00	6,586.51	74.43	178.10	-10.01	187.17	7,781.64	2,495.41	2,344.35	151.06	16.520		
14,500.00	8,494.00	6,590.00	6,586.51	75.46	178.10	-10.01	187.17	7,781.64	2,431.30	2,283.85	147.46	16.488		
14,600.00	8,494.00	6,590.00	6,586.51	76.49	178.10	-10.01	187.17	7,781.64	2,369.69	2,226.10	143.59	16.503		
14,700.00	8,494.00	6,590.00	6,586.51	77.53	178.10	-10.01	187.17	7,781.64	2,310.76	2,171.31	139.45	16.571		
14,800.00	8,494.00	6,590.00	6,586.51	78.56	178.10	-10.01	187.17	7,781.64	2,254.72	2,119.71	135.01	16.700		
14,900.00	8,494.00	6,590.00	6,586.51	79.60	178.10	-10.01	187.17	7,781.64	2,201.81	2,071.51	130.29	16.899		
15,000.00	8,494.00	6,590.00	6,586.51	80.64	178.10	-10.01	187.17	7,781.64	2,152.24	2,026.95	125.28	17.179		
15,100.00	8,494.00	6,590.00	6,586.51	81.69	178.10	-10.01	187.17	7,781.64	2,106.25	1,986.25	120.00	17.552		
15,200.00	8,494.00	6,590.00	6,586.51	82.73	178.10	-10.01	187.17	7,781.64	2,064.09	1,949.62	114.47	18.031		
15,300.00	8,494.00	6,590.00	6,586.51	83.78	178.10	-10.01	187.17	7,781.64	2,026.00	1,917.25	108.75	18.630		
15,400.00	8,494.00	6,590.00	6,586.51	84.83	178.10	-10.01	187.17	7,781.64	1,992.19	1,889.29	102.91	19.359		
15,500.00	8,494.00	6,590.00	6,586.51	85.88	178.10	-10.01	187.17	7,781.64	1,962.91	1,865.84	97.07	20.221		
15,600.00	8,494.00	6,590.00	6,586.51	86.94	178.10	-10.01	187.17	7,781.64	1,938.35	1,846.93	91.42	21.203		
15,700.00	8,494.00	6,590.00	6,586.51	87.99	178.10	-10.01	187.17	7,781.64	1,918.69	1,832.47	86.22	22.254		
15,800.00	8,494.00	6,590.00	6,586.51	89.05	178.10	-10.01	187.17	7,781.64	1,904.09	1,822.23	81.86	23.260		
15,900.00	8,494.00	6,590.00	6,586.51	90.10	178.10	-10.01	187.17	7,781.64	1,894.66	1,815.81	78.85	24.030		
16,000.00	8,494.00	6,590.00	6,586.51	91.16	178.10	-10.01	187.17	7,781.64	1,890.48	1,812.78	77.70	24.330		
16,029.11	8,494.00	6,590.00	6,586.51	91.47	178.10	-10.01	187.17	7,781.64	1,890.25	1,812.48	77.78	24.304	CC, ES	
16,100.00	8,494.00	6,590.00	6,586.51	92.22	178.10	-10.01	187.17	7,781.64	1,891.58	1,812.84	78.74	24.022		
16,200.00	8,494.00	6,590.00	6,586.51	93.29	178.10	-10.01	187.17	7,781.64	1,897.96	1,816.09	81.87	23.183		
16,300.00	8,494.00	6,590.00	6,586.51	94.35	178.10	-10.01	187.17	7,781.64	1,909.57	1,822.93	86.63	22.042		
16,400.00	8,494.00	6,590.00	6,586.51	95.42	178.10	-10.01	187.17	7,781.64	1,926.30	1,833.82	92.48	20.829		
16,500.00	8,494.00	6,590.00	6,586.51	96.48	178.10	-10.01	187.17	7,781.64	1,948.02	1,849.08	98.95	19.688		
16,600.00	8,494.00	6,590.00	6,586.51	97.55	178.10	-10.01	187.17	7,781.64	1,974.58	1,868.90	105.69	18.683		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W12_GOVERNMENT AB #007_1527847 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 155-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Offset Wellbore Centre		Distance			Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)		
16,700.00	8,494.00	6,590.00	6,586.51	98.62	178.10	-10.01	187.17	7,781.64	2,005.78	1,893.32	112.46	17.835	
16,800.00	8,494.00	6,590.00	6,586.51	99.69	178.10	-10.01	187.17	7,781.64	2,041.40	1,922.29	119.12	17.138	
16,900.00	8,494.00	6,590.00	6,586.51	100.76	178.10	-10.01	187.17	7,781.64	2,081.23	1,955.68	125.54	16.578	
17,000.00	8,494.00	6,590.00	6,586.51	101.83	178.10	-10.01	187.17	7,781.64	2,125.01	1,993.33	131.68	16.137	
17,100.00	8,494.00	6,590.00	6,586.51	102.91	178.10	-10.01	187.17	7,781.64	2,172.53	2,035.03	137.49	15.801	
17,200.00	8,494.00	6,590.00	6,586.51	103.98	178.10	-10.01	187.17	7,781.64	2,223.52	2,080.57	142.95	15.555	
17,300.00	8,494.00	6,590.00	6,586.51	105.06	178.10	-10.01	187.17	7,781.64	2,277.77	2,129.71	148.05	15.385	
17,400.00	8,494.00	6,590.00	6,586.51	106.13	178.10	-10.01	187.17	7,781.64	2,335.04	2,182.23	152.81	15.281	
17,500.00	8,494.00	6,590.00	6,586.51	107.21	178.10	-10.01	187.17	7,781.64	2,395.12	2,237.90	157.22	15.234 SF	
17,600.00	8,494.00	6,590.00	6,586.51	108.29	178.10	-10.01	187.17	7,781.64	2,457.79	2,296.49	161.31	15.237	
17,700.00	8,494.00	6,590.00	6,586.51	109.37	178.10	-10.01	187.17	7,781.64	2,522.88	2,357.80	165.09	15.282	
17,800.00	8,494.00	6,590.00	6,586.51	110.45	178.10	-10.01	187.17	7,781.64	2,590.20	2,421.62	168.58	15.365	
17,900.00	8,494.00	6,590.00	6,586.51	111.53	178.10	-10.01	187.17	7,781.64	2,659.57	2,487.77	171.80	15.481	
18,000.00	8,494.00	6,590.00	6,586.51	112.61	178.10	-10.01	187.17	7,781.64	2,730.84	2,556.07	174.77	15.625	
18,100.00	8,494.00	6,590.00	6,586.51	113.69	178.10	-10.01	187.17	7,781.64	2,803.86	2,626.35	177.51	15.795	
18,200.00	8,494.00	6,590.00	6,586.51	114.77	178.10	-10.01	187.17	7,781.64	2,878.51	2,698.47	180.04	15.988	
18,300.00	8,494.00	6,590.00	6,586.51	115.86	178.10	-10.01	187.17	7,781.64	2,954.66	2,772.28	182.38	16.201	
18,400.00	8,494.00	6,590.00	6,586.51	116.94	178.10	-10.01	187.17	7,781.64	3,032.19	2,847.66	184.54	16.432	
18,500.00	8,494.00	6,590.00	6,586.51	118.03	178.10	-10.01	187.17	7,781.64	3,111.01	2,924.47	186.53	16.678	
18,600.00	8,494.00	6,590.00	6,586.51	119.11	178.10	-10.01	187.17	7,781.64	3,191.01	3,002.63	188.38	16.939	
18,700.00	8,494.00	6,590.00	6,586.51	120.20	178.10	-10.01	187.17	7,781.64	3,272.11	3,082.02	190.09	17.214	
18,800.00	8,494.00	6,590.00	6,586.51	121.29	178.10	-10.01	187.17	7,781.64	3,354.23	3,162.56	191.68	17.499	
18,900.00	8,494.00	6,590.00	6,586.51	122.38	178.10	-10.01	187.17	7,781.64	3,437.31	3,244.15	193.15	17.796	
19,000.00	8,494.00	6,590.00	6,586.51	123.46	178.10	-10.01	187.17	7,781.64	3,521.26	3,326.73	194.52	18.102	
19,100.00	8,494.00	6,590.00	6,586.51	124.55	178.10	-10.01	187.17	7,781.64	3,606.03	3,410.23	195.80	18.417	
19,200.00	8,494.00	6,590.00	6,586.51	125.64	178.10	-10.01	187.17	7,781.64	3,691.56	3,494.57	196.99	18.740	
19,300.00	8,494.00	6,590.00	6,586.51	126.73	178.10	-10.01	187.17	7,781.64	3,777.80	3,579.70	198.10	19.070	
19,355.95	8,494.00	6,590.00	6,586.51	127.34	178.10	-10.01	187.17	7,781.64	3,826.35	3,627.66	198.69	19.258	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W13_GOVERNMENT AB #008_1527863 - Inc Only - Inc Only													Offset Site Error:	0.00 usft
Survey Program:		150-INC-ONLY					Rule Assigned:				Offset Well Error:	0.00 usft		
Reference	Offset	Semi Major Axis		Offset Wellbore Centre		Distance			Warning					
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
13,600.00	8,494.00	6,630.00	6,627.95	66.31	154.10	-5.62	47.74	9,128.23	4,194.80	4,026.03	168.77	24.855		
13,700.00	8,494.00	6,630.00	6,627.95	67.31	154.10	-5.62	47.74	9,128.23	4,105.05	3,936.91	168.13	24.415		
13,800.00	8,494.00	6,630.00	6,627.95	68.32	154.10	-5.62	47.74	9,128.23	4,015.78	3,848.32	167.46	23.981		
13,900.00	8,494.00	6,630.00	6,627.95	69.33	154.10	-5.62	47.74	9,128.23	3,927.03	3,760.29	166.74	23.552		
14,000.00	8,494.00	6,630.00	6,627.95	70.34	154.10	-5.62	47.74	9,128.23	3,838.83	3,672.86	165.97	23.130		
14,100.00	8,494.00	6,630.00	6,627.95	71.36	154.10	-5.62	47.74	9,128.23	3,751.22	3,586.08	165.15	22.714		
14,200.00	8,494.00	6,630.00	6,627.95	72.38	154.10	-5.62	47.74	9,128.23	3,664.25	3,499.98	164.27	22.307		
14,300.00	8,494.00	6,630.00	6,627.95	73.41	154.10	-5.62	47.74	9,128.23	3,577.96	3,414.63	163.33	21.907		
14,400.00	8,494.00	6,630.00	6,627.95	74.43	154.10	-5.62	47.74	9,128.23	3,492.40	3,330.08	162.32	21.516		
14,500.00	8,494.00	6,630.00	6,627.95	75.46	154.10	-5.62	47.74	9,128.23	3,407.63	3,246.39	161.24	21.134		
14,600.00	8,494.00	6,630.00	6,627.95	76.49	154.10	-5.62	47.74	9,128.23	3,323.71	3,163.63	160.08	20.763		
14,700.00	8,494.00	6,630.00	6,627.95	77.53	154.10	-5.62	47.74	9,128.23	3,240.69	3,081.87	158.83	20.404		
14,800.00	8,494.00	6,630.00	6,627.95	78.56	154.10	-5.62	47.74	9,128.23	3,158.67	3,001.18	157.49	20.057		
14,900.00	8,494.00	6,630.00	6,627.95	79.60	154.10	-5.62	47.74	9,128.23	3,077.70	2,921.66	156.04	19.724		
15,000.00	8,494.00	6,630.00	6,627.95	80.64	154.10	-5.62	47.74	9,128.23	2,997.88	2,843.41	154.48	19.407		
15,100.00	8,494.00	6,630.00	6,627.95	81.69	154.10	-5.62	47.74	9,128.23	2,919.31	2,766.52	152.79	19.106		
15,200.00	8,494.00	6,630.00	6,627.95	82.73	154.10	-5.62	47.74	9,128.23	2,842.08	2,691.11	150.97	18.825		
15,300.00	8,494.00	6,630.00	6,627.95	83.78	154.10	-5.62	47.74	9,128.23	2,766.32	2,617.31	149.01	18.565		
15,400.00	8,494.00	6,630.00	6,627.95	84.83	154.10	-5.62	47.74	9,128.23	2,692.13	2,545.25	146.88	18.329		
15,500.00	8,494.00	6,630.00	6,627.95	85.88	154.10	-5.62	47.74	9,128.23	2,619.67	2,475.09	144.58	18.119		
15,600.00	8,494.00	6,630.00	6,627.95	86.94	154.10	-5.62	47.74	9,128.23	2,549.06	2,406.97	142.09	17.940		
15,700.00	8,494.00	6,630.00	6,627.95	87.99	154.10	-5.62	47.74	9,128.23	2,480.48	2,341.09	139.39	17.795		
15,800.00	8,494.00	6,630.00	6,627.95	89.05	154.10	-5.62	47.74	9,128.23	2,414.10	2,277.62	136.48	17.689		
15,900.00	8,494.00	6,630.00	6,627.95	90.10	154.10	-5.62	47.74	9,128.23	2,350.09	2,216.77	133.32	17.627		
16,000.00	8,494.00	6,630.00	6,627.95	91.16	154.10	-5.62	47.74	9,128.23	2,288.67	2,158.75	129.91	17.617		
16,100.00	8,494.00	6,630.00	6,627.95	92.22	154.10	-5.62	47.74	9,128.23	2,230.04	2,103.80	126.24	17.665		
16,200.00	8,494.00	6,630.00	6,627.95	93.29	154.10	-5.62	47.74	9,128.23	2,174.43	2,052.15	122.28	17.782		
16,300.00	8,494.00	6,630.00	6,627.95	94.35	154.10	-5.62	47.74	9,128.23	2,122.08	2,004.04	118.04	17.977		
16,400.00	8,494.00	6,630.00	6,627.95	95.42	154.10	-5.62	47.74	9,128.23	2,073.23	1,959.72	113.51	18.265		
16,500.00	8,494.00	6,630.00	6,627.95	96.48	154.10	-5.62	47.74	9,128.23	2,028.14	1,919.45	108.69	18.659		
16,600.00	8,494.00	6,630.00	6,627.95	97.55	154.10	-5.62	47.74	9,128.23	1,987.06	1,883.45	103.62	19.177		
16,700.00	8,494.00	6,630.00	6,627.95	98.62	154.10	-5.62	47.74	9,128.23	1,950.26	1,851.94	98.31	19.837		
16,800.00	8,494.00	6,630.00	6,627.95	99.69	154.10	-5.62	47.74	9,128.23	1,917.96	1,825.10	92.86	20.655		
16,900.00	8,494.00	6,630.00	6,627.95	100.76	154.10	-5.62	47.74	9,128.23	1,890.41	1,803.05	87.35	21.641		
17,000.00	8,494.00	6,630.00	6,627.95	101.83	154.10	-5.62	47.74	9,128.23	1,867.81	1,785.82	81.99	22.780		
17,100.00	8,494.00	6,630.00	6,627.95	102.91	154.10	-5.62	47.74	9,128.23	1,850.34	1,773.27	77.07	24.008		
17,600.00	8,494.00	6,630.00	6,627.95	108.29	154.10	-5.62	47.74	9,128.23	1,843.67	1,766.06	77.61	23.755 CC, ES		
17,700.00	8,494.00	6,630.00	6,627.95	109.37	154.10	-5.62	47.74	9,128.23	1,858.55	1,775.26	83.29	22.315		
17,800.00	8,494.00	6,630.00	6,627.95	110.45	154.10	-5.62	47.74	9,128.23	1,878.63	1,789.06	89.58	20.973		
17,900.00	8,494.00	6,630.00	6,627.95	111.53	154.10	-5.62	47.74	9,128.23	1,903.77	1,807.69	96.08	19.815		
18,000.00	8,494.00	6,630.00	6,627.95	112.61	154.10	-5.62	47.74	9,128.23	1,933.75	1,831.20	102.56	18.856		
18,100.00	8,494.00	6,630.00	6,627.95	113.69	154.10	-5.62	47.74	9,128.23	1,968.37	1,859.51	108.86	18.082		
18,200.00	8,494.00	6,630.00	6,627.95	114.77	154.10	-5.62	47.74	9,128.23	2,007.37	1,892.48	114.89	17.472		
18,300.00	8,494.00	6,630.00	6,627.95	115.86	154.10	-5.62	47.74	9,128.23	2,050.52	1,929.91	120.61	17.001		
18,400.00	8,494.00	6,630.00	6,627.95	116.94	154.10	-5.62	47.74	9,128.23	2,097.54	1,971.56	125.98	16.650		
18,500.00	8,494.00	6,630.00	6,627.95	118.03	154.10	-5.62	47.74	9,128.23	2,148.20	2,017.21	130.99	16.400		
18,600.00	8,494.00	6,630.00	6,627.95	119.11	154.10	-5.62	47.74	9,128.23	2,202.23	2,066.59	135.64	16.235		
18,700.00	8,494.00	6,630.00	6,627.95	120.20	154.10	-5.62	47.74	9,128.23	2,259.40	2,119.45	139.95	16.144		
18,800.00	8,494.00	6,630.00	6,627.95	121.29	154.10	-5.62	47.74	9,128.23	2,319.48	2,175.55	143.92	16.116 SF		
18,900.00	8,494.00	6,630.00	6,627.95	122.38	154.10	-5.62	47.74	9,128.23	2,382.23	2,234.65	147.58	16.142		
19,000.00	8,494.00	6,630.00	6,627.95	123.46	154.10	-5.62	47.74	9,128.23	2,447.47	2,296.53	150.94	16.215		
19,100.00	8,494.00	6,630.00	6,627.95	124.55	154.10	-5.62	47.74	9,128.23	2,514.99	2,360.96	154.03	16.328		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W13_GOVERNMENT AB #008_1527863 - Inc Only - Inc Only													Offset Site Error: 0.00 usft
Survey Program: 150-INC-ONLY													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Rule Assigned:				Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
19,200.00	8,494.00	6,630.00	6,627.95	125.64	154.10	-5.62	47.74	9,128.23	2,584.62	2,427.75	156.87	16.477	
19,300.00	8,494.00	6,630.00	6,627.95	126.73	154.10	-5.62	47.74	9,128.23	2,656.18	2,496.72	159.47	16.656	
19,355.95	8,494.00	6,630.00	6,627.95	127.34	154.10	-5.62	47.74	9,128.23	2,697.02	2,536.19	160.83	16.769	



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Offset Design: Koala 9 Fed Com Offsets - W17_GOVERNMENT AB FEDERAL #013_1540920 - MWD - MWD													Offset Site Error: 0.00 usft
Survey Program: 267-OWSG MWD Rev 5													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Rule Assigned:		Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
18,400.00	8,494.00	6,652.00	6,649.47	116.94	25.17	27.79	-1,077.13	10,385.58	2,059.96	1,977.45	82.51	24.966	
18,500.00	8,494.00	6,652.00	6,649.47	118.03	25.17	27.79	-1,077.13	10,385.58	2,051.52	1,968.15	83.37	24.609	
18,600.00	8,494.00	6,652.00	6,649.47	119.11	25.17	27.79	-1,077.13	10,385.58	2,047.92	1,963.77	84.15	24.337	
18,623.70	8,494.00	6,652.00	6,649.47	119.37	25.17	27.79	-1,077.13	10,385.58	2,047.78	1,963.46	84.32	24.285 CC, ES	
18,700.00	8,494.00	6,652.00	6,649.47	120.20	25.17	27.79	-1,077.13	10,385.58	2,049.20	1,964.35	84.86	24.149	
18,800.00	8,494.00	6,652.00	6,649.47	121.29	25.17	27.79	-1,077.13	10,385.58	2,055.36	1,969.88	85.48	24.044	
18,900.00	8,494.00	6,652.00	6,649.47	122.38	25.17	27.79	-1,077.13	10,385.58	2,066.34	1,980.32	86.02	24.021 SF	
19,000.00	8,494.00	6,652.00	6,649.47	123.46	25.17	27.79	-1,077.13	10,385.58	2,082.07	1,995.59	86.48	24.077	
19,100.00	8,494.00	6,652.00	6,649.47	124.55	25.17	27.79	-1,077.13	10,385.58	2,102.45	2,015.60	86.84	24.210	
19,200.00	8,494.00	6,652.00	6,649.47	125.64	25.17	27.79	-1,077.13	10,385.58	2,127.33	2,040.21	87.12	24.418	
19,300.00	8,494.00	6,652.00	6,649.47	126.73	25.17	27.79	-1,077.13	10,385.58	2,156.57	2,069.25	87.32	24.698	
19,355.95	8,494.00	6,652.00	6,649.47	127.34	25.17	27.79	-1,077.13	10,385.58	2,174.77	2,087.38	87.39	24.886	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation




Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Reference Depths are relative to 3288+30 @ 3318.00usft
 Offset Depths are relative to Offset Datum
 Central Meridian is -104.33333334

Coordinates are relative to: (A03) Koala 9 Fed Com 131H
 Coordinate System is US State Plane 1983, New Mexico Eastern Zone
 Grid Convergence at Surface is: 0.08°

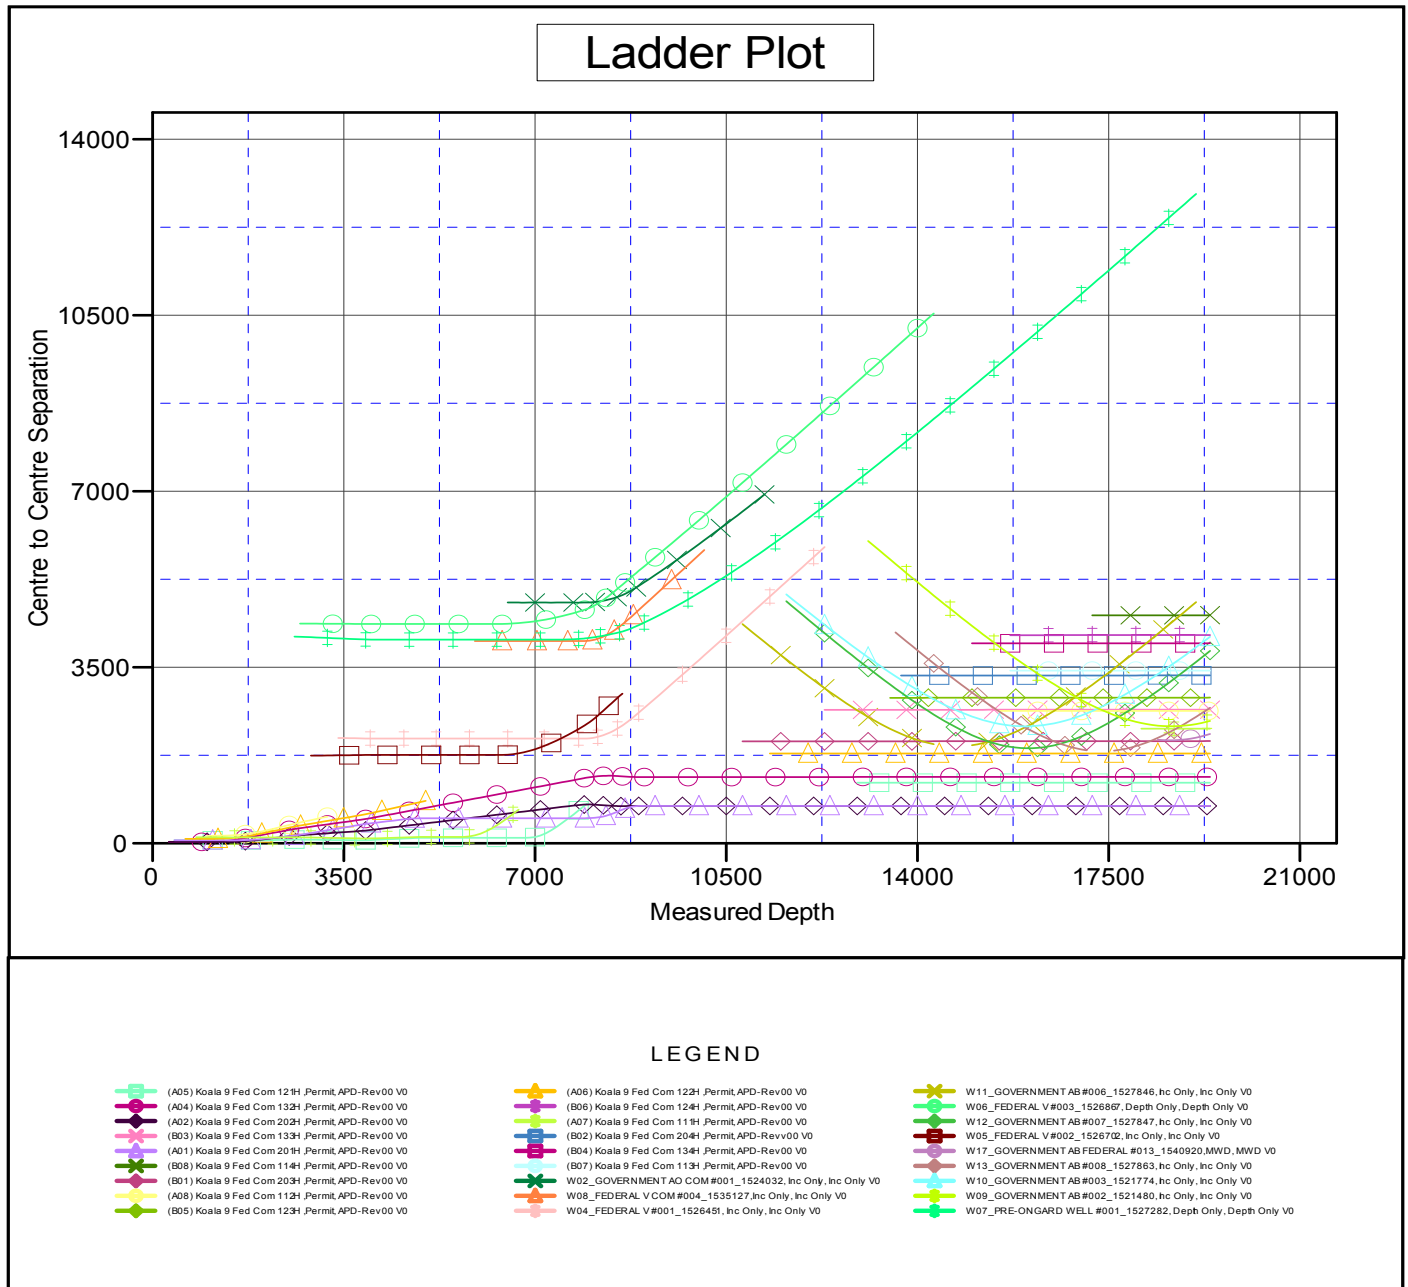

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Colgate Energy	Local Co-ordinate Reference:	Well (A03) Koala 9 Fed Com 131H
Project:	(Permit) Eddy County, NM (83-NME)	TVD Reference:	3288+30 @ 3318.00usft
Reference Site:	(Permit) Koala 9 Fed Com	MD Reference:	3288+30 @ 3318.00usft
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	(A03) Koala 9 Fed Com 131H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	Permit	Database:	EDM 5000.14 Single User Db
Reference Design:	APD-Rev00	Offset TVD Reference:	Offset Datum

Reference Depths are relative to 3288+30 @ 3318.00usft

Offset Depths are relative to Offset Datum


Central Meridian is -104.33333334

Coordinates are relative to: (A03) Koala 9 Fed Com 131H

Coordinate System is US State Plane 1983, New Mexico Eastern Zone

Grid Convergence at Surface is: 0.08°

Separation Factor Plot

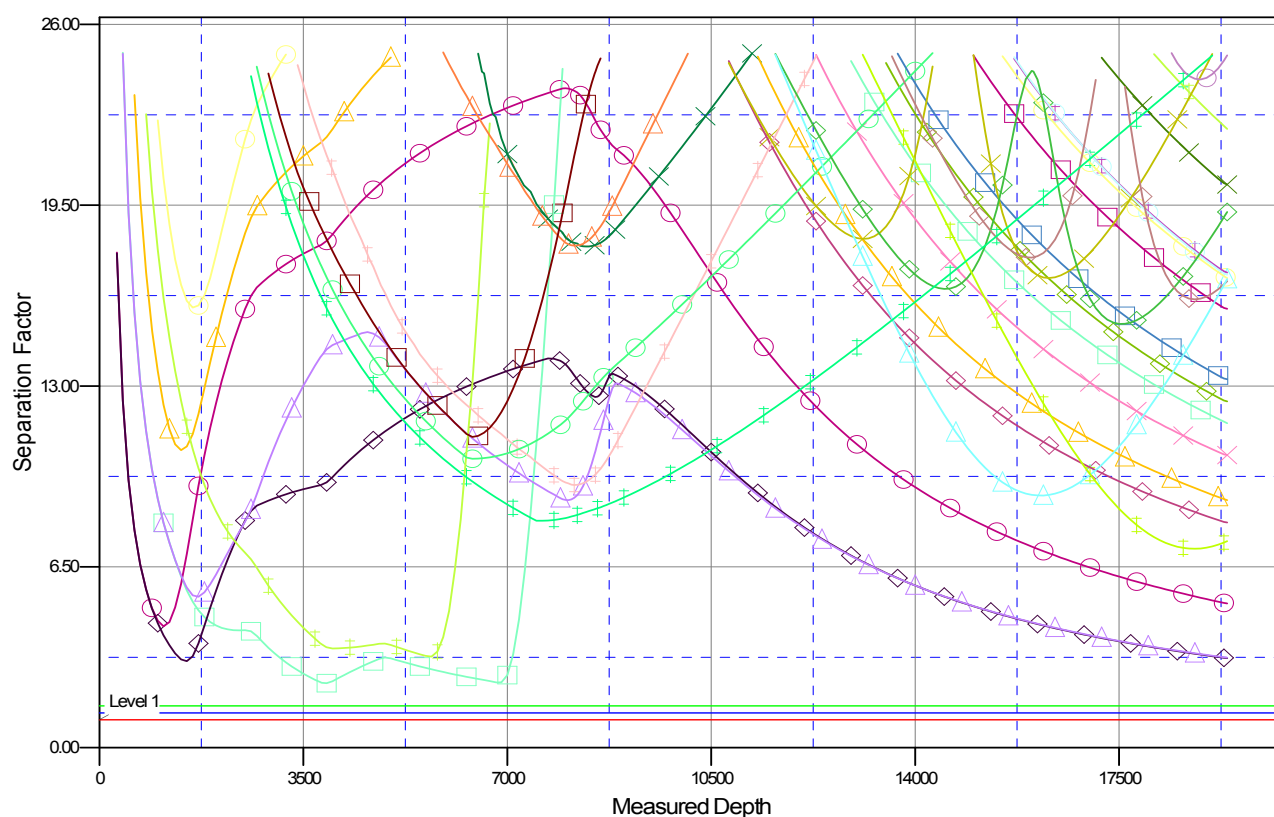

LEGEND

(A05) Koala 9 Fed Com 121H_Permit,APD-Rev00 V0	(A06) Koala 9 Fed Com 122H_Permit,APD-Rev00 V0	W11_GOVERNMENT AB #006_1527846, Inc Only, Inc Only V0
(A04) Koala 9 Fed Com 132H_Permit,APD-Rev00 V0	(B06) Koala 9 Fed Com 124H_Permit,APD-Rev00 V0	W06_FEDERAL V #003_1526807, Depth Only, Depth Only V0
(A02) Koala 9 Fed Com 202H_Permit,APD-Rev00 V0	(A07) Koala 9 Fed Com 111H_Permit,APD-Rev00 V0	W12_GOVERNMENT AB #007_1527847, Inc Only, Inc Only V0
(B03) Koala 9 Fed Com 133H_Permit,APD-Rev00 V0	(B02) Koala 9 Fed Com 204H_Permit,APD-Rev00 V0	W05_FEDERAL V #002_1526702, Inc Only, Inc Only V0
(A01) Koala 9 Fed Com 201H_Permit,APD-Rev00 V0	(B04) Koala 9 Fed Com 134H_Permit,APD-Rev00 V0	W17_GOVERNMENT AB FEDERAL #013_1540920,MWD, MWD V0
(B08) Koala 9 Fed Com 114H_Permit,APD-Rev00 V0	(B07) Koala 9 Fed Com 113H_Permit,APD-Rev00 V0	W13_GOVERNMENT AB #008_1527863, Inc Only, Inc Only V0
(B01) Koala 9 Fed Com 203H_Permit,APD-Rev00 V0	W02_GOVERNMENT AO COM #001_1524032, Inc Only, Inc Only V0	W10_GOVERNMENT AB #003_1521774, Inc Only, Inc Only V0
(A08) Koala 9 Fed Com 112H_Permit,APD-Rev00 V0	W08_FEDERAL V COM #004_1535127, Inc Only, Inc Only V0	W09_GOVERNMENT AB #002_1521480, Inc Only, Inc Only V0
(B05) Koala 9 Fed Com 123H_Permit,APD-Rev00 V0	W04_FEDERAL V #001_1526491, Inc Only, Inc Only V0	W07_PRE-ONGARD WELL #001_1527282, Depth Only, Depth Only V0

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



WELL DETAILS: (A03) Koala 9 Fed Com 131H

Northing 579560.58 Easting 584690.66 Latitude 32.59318628 Longitude -104.19256529


Section Details

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	2500.00	0.00	0.00	2500.00	0.00	0.00	0.00	0.00	0.00
3	2710.01	3.15	170.40	2709.91	-5.69	0.96	1.50	170.40	0.92
4	3791.83	3.15	170.40	3790.09	-64.31	10.88	0.00	0.00	10.41
5	4001.85	0.00	0.00	4000.00	-70.00	11.84	1.50	180.00	11.33
6	7911.80	0.00	0.00	7909.95	-70.00	11.84	0.00	0.00	11.33
7	8511.80	60.00	106.60	8406.15	-151.84	286.38	10.00	106.60	285.26
8	8852.76	90.00	89.58	8494.00	-194.02	607.89	10.00	-31.48	606.45
9	19355.95	90.00	89.58	8494.00	-116.91	11110.80	0.00	0.00	11109.64

Site: (Permit) Koala 9 Fed Com
Well: (A03) Koala 9 Fed Com 131H
Wellbore: Permit
Plan: APD-Rev00

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
241.00	241.00	Rustler
382.00	382.00	T/Salt
768.00	768.00	Tansill
843.00	843.00	Yates
1218.00	1218.00	Seven Rivers
1809.00	1809.00	Queen
2018.00	2018.00	Grayburg
2418.00	2418.00	San Andres
2993.00	2993.53	CYCN
4568.00	4569.85	BSGL
6118.00	6119.85	FBSG
7143.00	7144.85	SBSG
8268.00	8298.56	TBSG

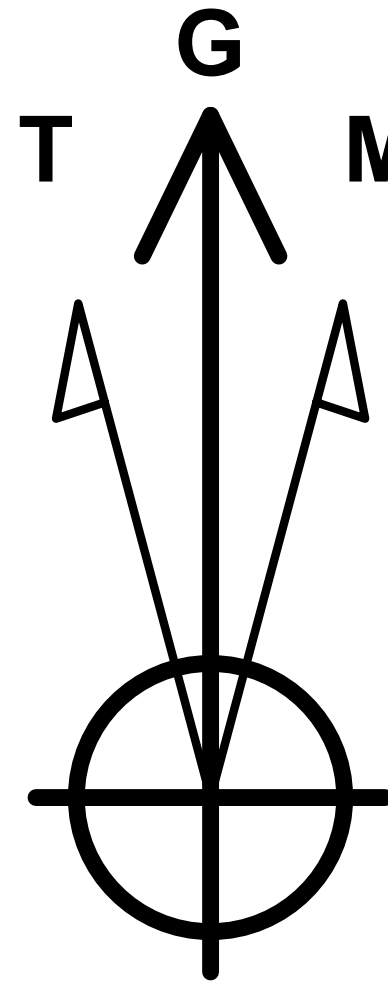

Azimuths to Grid North
True North: -0.08°
Magnetic North: 6.68°


Magnetic Field
Strength: 47555.8nT
Dip Angle: 60.11°
Date: 5/6/2022
Model: IGRF2020

PROJECT DETAILS: (Permit) Eddy County, NM (83-NME)
Well Name: (A03) Koala 9 Fed Com 131H
Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level
Local North: Grid
KB Elevation: 3288+30 @ 3318.00usft
Elevation: 3288.00

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
FTP(K9- 131H)	8494.00	-193.44	579.19	579367.14	585269.85	32.59265244	-104.19068551
LTP(K9- 131H)	8494.00	-117.64	11020.78	579442.94	595711.44	32.59281773	-104.15678150
PBHL(K9- 131H)	8494.00	-116.91	11110.80	579443.67	595801.46	32.59281933	-104.15648920

West(-)/East(+) (400 usft/in)

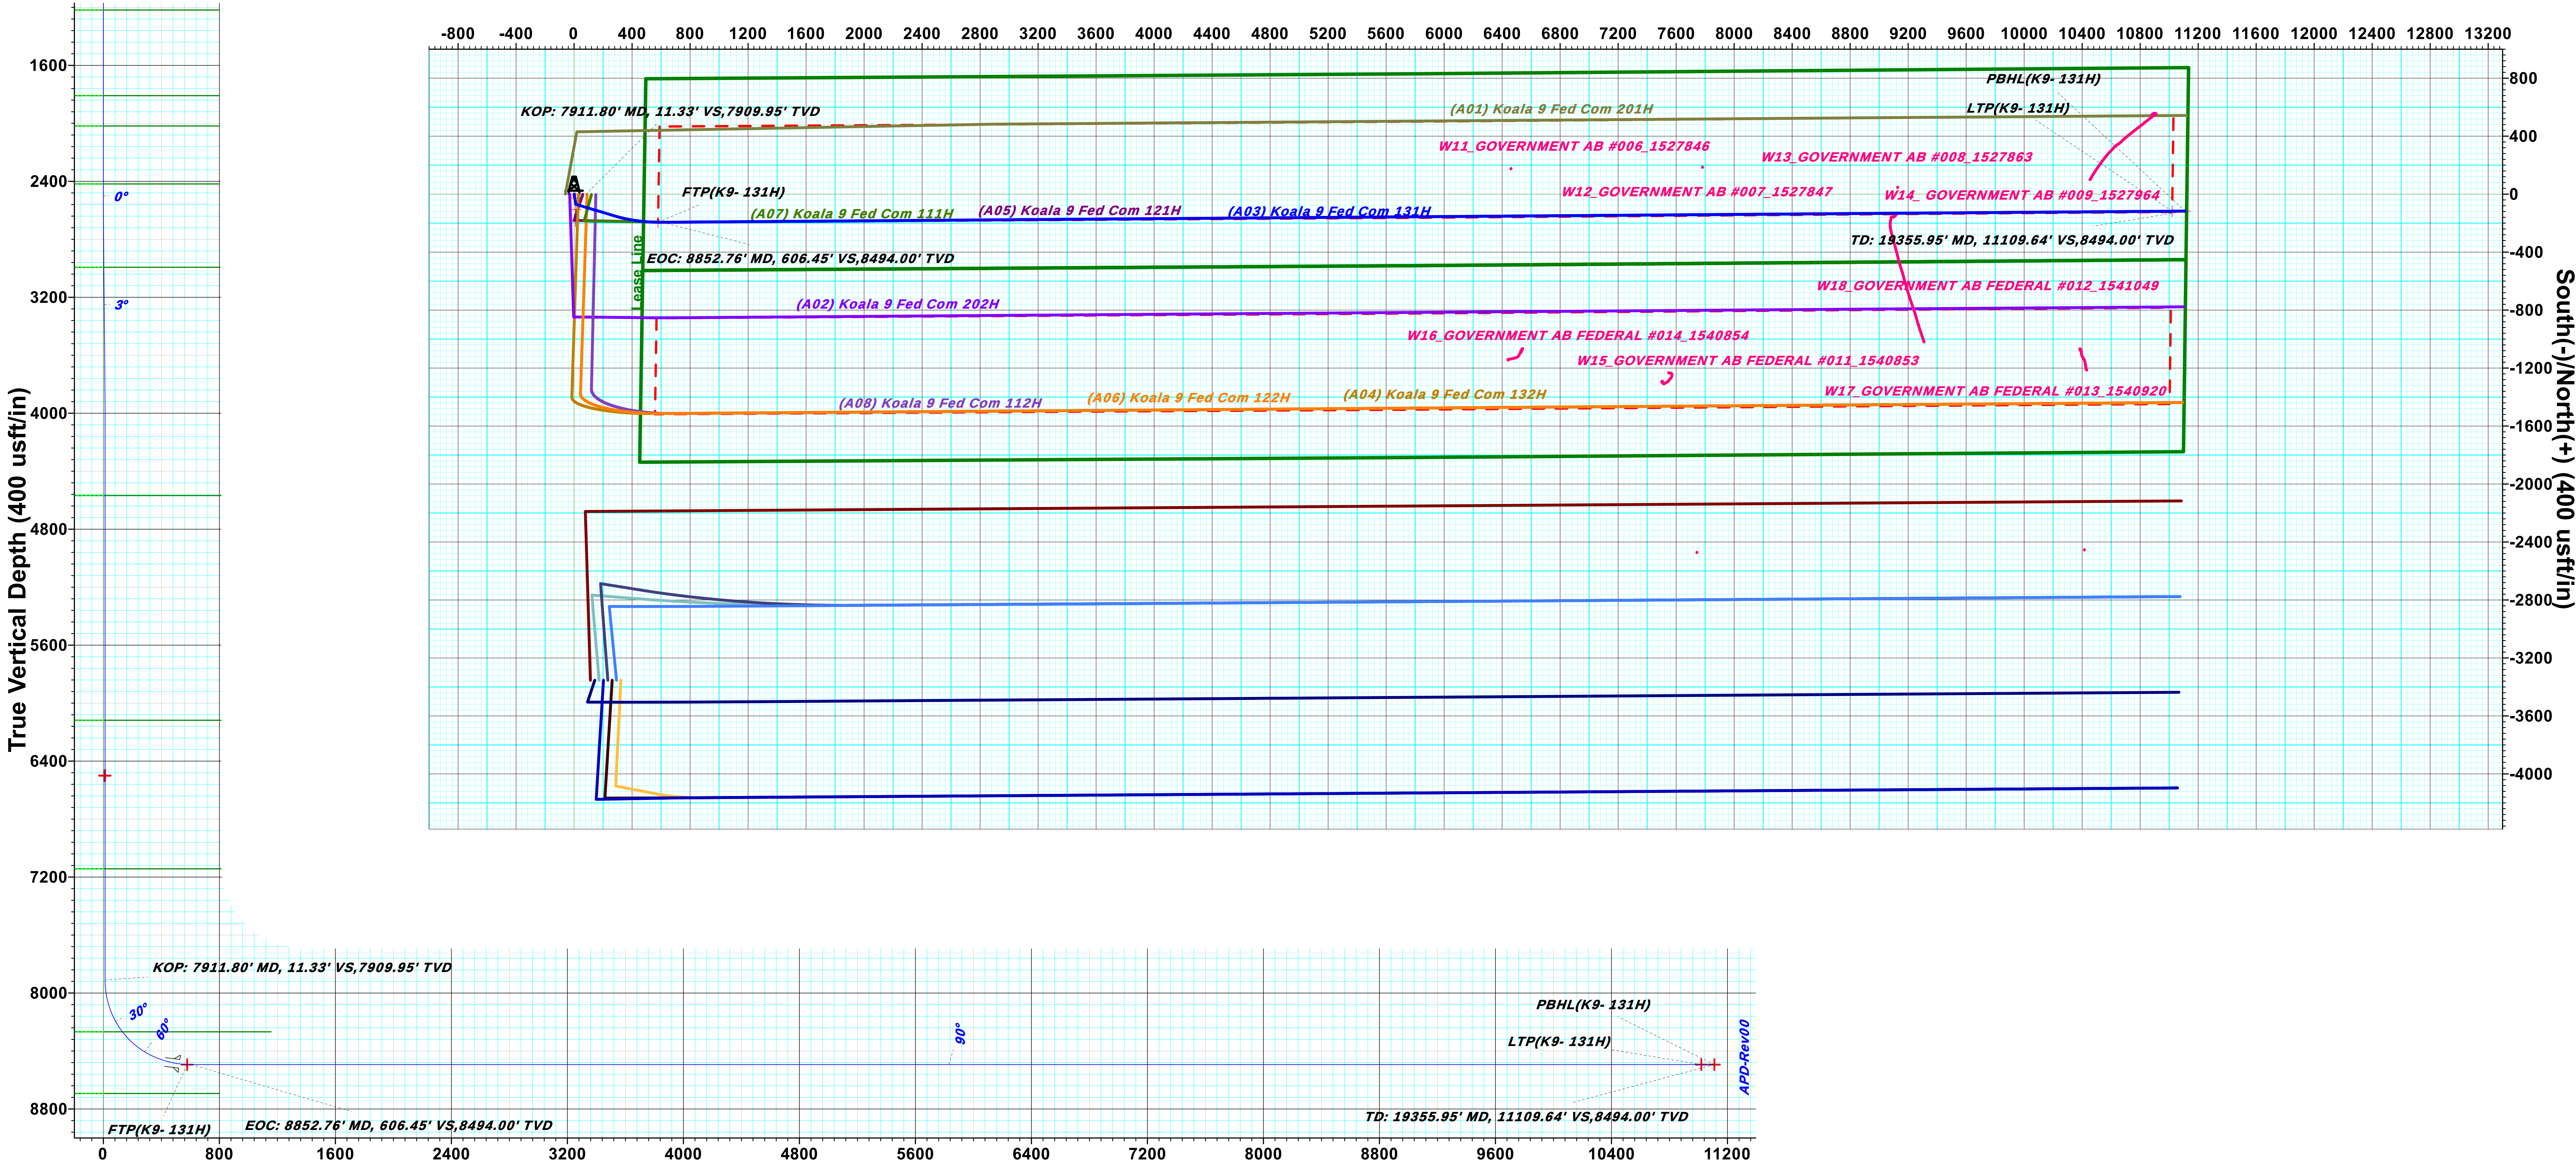

Vertical Section at 89.58° (400 usft/in)



Plan: APD-Rev00 ((A03) Koala 9 Fed Com 131H/Permit)
Created By: Adrian Castro Date: 6:12, May 13 2022

Permian Resources - Koala 9 Fed Com 131H

1. Geologic Formations

Formation	Elevation	TVD	Target
Rustler	-3077	241	No
Top of Salt	-2936	382	No
Capitan	NP	NP	No
Tansill	-2550	768	No
Yates	-2475	843	No
Seven Rivers	-2100	1218	No
Queen	-1509	1809	No
Grayburg	-1300	2018	No
San Andres	-900	2418	No
Delaware Mountain Group	-325	2993	No
Bone Spring Lime	1250	4568	No
1st Bone Spring Sand	2800	6118	No
2nd Bone Spring Sand	3825	7143	No
3rd Bone Spring Sand	4950	8268	Yes

2. Blowout Prevention

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	x	Tested to:
12.25	13-5/8"	5M	Annular	x	2500 psi
			Blind Ram	x	5000 psi
			Pipe Ram	x	
			Double Ram		
			Other*		
8.75	13-5/8"	5M	Annular	x	2500 psi
			Blind Ram	x	5000 psi
			Pipe Ram	x	
			Double Ram		
			Other*		

Equipment: BOPE with working pressure ratings in excess of anticipated maximum surface pressure will be utilized for well control from drill out of surface casing to TMD. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. All BOPE connections shall be flanged, welded or clamped. All choke lines shall be straight unless targeted with running tees or tee blocks are used, and choke lines shall be anchored to prevent whip and reduce vibrations. All valves in the choke line & the choke manifold shall be full opening as to not cause restrictions and to allow for straight fluid paths to minimize potential erosion. All gauges utilized in the well control system shall be of a type designed for drilling fluid service. A top drive inside BOP valve will be utilized at all times. Subs equipped with full opening valves sized to fit the drill pipe and collars will be available on the rig floor in the open position. The key to operate said valve equipped subs will be on the rig floor at all times. The accumulator system will have sufficient capacity to open the HCR and close all three sets of rams plus the annular preventer while retaining at least 300 psi above precharge on the closing manifold (accumulator system shall be capable of doing so without using the closing unit pumps). The fluid reservoir capacity will be double the usable fluid volume of the accumulator system capacity, and the fluid level will be maintained at the manufacturer's recommended level. Prior to connecting the closing unit to the BOP stack, an accumulator precharge pressure test shall be performed to ensure the precharge pressure is within 100 psi of the desired precharge pressure (only nitrogen gas will be used to precharge). Two independent power sources will be made available at all times to power the closing unit pumps so that the pumps can automatically start when the closing valve manifold pressure has decreased to the preset level. Closing unit pumps will be sized to allow opening of HCR and closing of annular preventer on 5" drill pipe achieving at least 200 psi above precharge pressure with the accumulator system isolated from service in less than two minutes. A valve shall be installed in the closing line as close to the annular preventer as possible to act as a locking device; the valve shall be maintained in the open position and shall be closed only when the power source for the accumulator system is inoperative. Remote controls capable of opening and closing all preventers & the HCR shall be readily accessible to the driller; master controls with the same capability will be operable at the accumulator. The wellhead will be a multibowl speed head allowing for hangoff of intermediate casing & isolation of the 133/8 x 95/8 annulus without breaking the connection between the BOP & wellhead to install an additional casing head. A wear bushing will be installed & inspected frequently to guard against internal wear to wellhead. VBRs (variablebore rams) will be run in upper rambody of BOP stack to provide redundancy to annular preventer while RIH w/ production casing;

Requesting Variance? YES

Variance request: Flex hose and offline cement variances, see attachments in section 8.

Testing Procedure: The BOP test shall be performed before drilling out of the surface casing shoe and will occur at a minimum: a. when initially installed b. whenever any seal subject to test pressure is broken c. following related repairs d. at 30 day intervals e. checked daily as to mechanical operating conditions. The ram type preventer(s) will be tested using a test plug to 250 psi (low) and 5,000 psi (high) (casinghead WP) with a test plug upon its installation onto the 13 surface casing. If a test plug is not used, the ram type preventer(s) shall be tested to 70% of the minimum internal yield pressure of the casing. The annular type preventer(s) shall be tested to 3500 psi. Pressure will be maintained for at least 10 minutes or until provisions of the test are met, whichever is longer. A Sundry Notice (Form 3160 5), along with a copy of the BOP test report, shall be submitted to the local BLM office within 5 working days following the test. If the bleed line is connected into the buffer tank (header), all BOP equipment including the buffer tank and associated valves will be rated at the required BOP pressure. The BLM office will be provided with a minimum of four (4) hours notice of BOP testing to allow witnessing. The BOP Configuration, choke manifold layout, and accumulator system, will be in compliance with Onshore Order 2 for a 5,000 psi system. A remote accumulator and a multi-bowl system will be used, please see attachment in section 8 for multi-bowl procedure. Pressures, capacities, and specific placement and use of the manual and/or hydraulic controls, accumulator controls, bleed lines, etc., will be identified at the time of the BLM 'witnessed BOP test. Any remote controls will be capable of both opening and closing all preventers and shall be readily accessible.

Choke Diagram Attachemnt: 5 M Choe Manifold

BOP Diagram Attachment: BOP Schematic

3. Casing

String	Hole Size	Casing Size	Top	Bottom	Top TVD	Bottom TVD	Length	Grade	Weight	Connection	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
Surface	17.5	13.375	0	266	0	266	266	J55	54.5	BTC	8.60	4.02	Dry	7.94	Dry	7.45
Intermediate	12.25	9.625	0	2943	0	2943	2943	J55	36	BTC	2.69	1.60	Dry	3.10	Dry	2.74
Production	8.75	5.5	0	8511	0	8406	8511	P110RY	17	GeoConn	1.69	1.77	Dry	2.23	Dry	2.23
Production	7.875	5.5	8511	19355	8406	8494	10844	P110RY	17	GeoConn	1.69	1.77	Dry	2.23	Dry	2.23
BLM Min Safety Factor											1.125	1		1.6		1.6

Non API casing spec sheets and casing design assumptions attached.

4. Cement

String	Lead/Tail	Top MD	Bottom MD	Quantity (sx)	Yield	Density	Cu Ft	Excess %	Cement Type	Additives
Surface	Tail	0	266	210	1.34	14.8	280	50%	Class C	Accelerator
Intermediate	Lead	0	2350	520	2.08	12.7	1080	50%	Class C	Salt, Extender, and LCM
Intermediate	Tail	2350	2943	210	1.34	14.8	280	50%	Class C	Accelerator
Production	Lead	2443	7911	790	2.41	11.5	1900	40%	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder
Production	Tail	7911	19355	1470	1.73	12.5	2540	25%	Class H	POZ, Extender, Fluid Loss, Dispersant, Retarder

5. Circulating Medium

Mud System Type: Closed

Will an air or gas system be used: No

Describe what will be on location to control well or mitigate other conditions: Sufficient quantities of mud materials will be on the well site at all times for the purpose of assuring well control and maintaining wellbore integrity. Surface interval will employ fresh water mud. The intermediate hole will utilize a saturated brine fluid to inhibit salt washout. The production hole will employ brine based and oil base fluid to inhibit formation reactivity and of the appropriate density to maintain well control.

Describe the mud monitoring system utilized: Centrifuge separation system. Open tank monitoring with EDR will be used for drilling fluids and return volumes. Open tank monitoring will be used for cement and cuttings return volumes. Mud properties will be monitored at least every 24 hours using industry accepted mud check practices.

Cuttings Volume: 8630 Cu Ft

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight	Max Weight
0	266	Water Based Mud	8.6	9.5
266	2943	Salt Saturated	10	10
2943	8511	Brine	9	10
8511	19355	OBM	9	10

6. Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Will utilize MWD/LWD (Gamma Ray logging) from intermediate hole to TD of the well.

List of open and cased hole logs run in the well:

DIRECTIONAL SURVEY, GAMMA RAY LOG,

Coring operation description for the well:

N/A

7. Pressure

Anticipated Bottom Hole Pressure	4420	psi
Anticipated Surface Pressure	2548.2	psi
Anticipated Bottom Hole Temperature	142	°F
Anticipated Abnormal pressure, temp, or geo hazards	No	

8. Other Information


Well Plan and AC Report: attached

Batching Drilling Procedure: attached


WBD: attached

Flex Hose Specs: attached

Offline Cementing Procedure Attached:

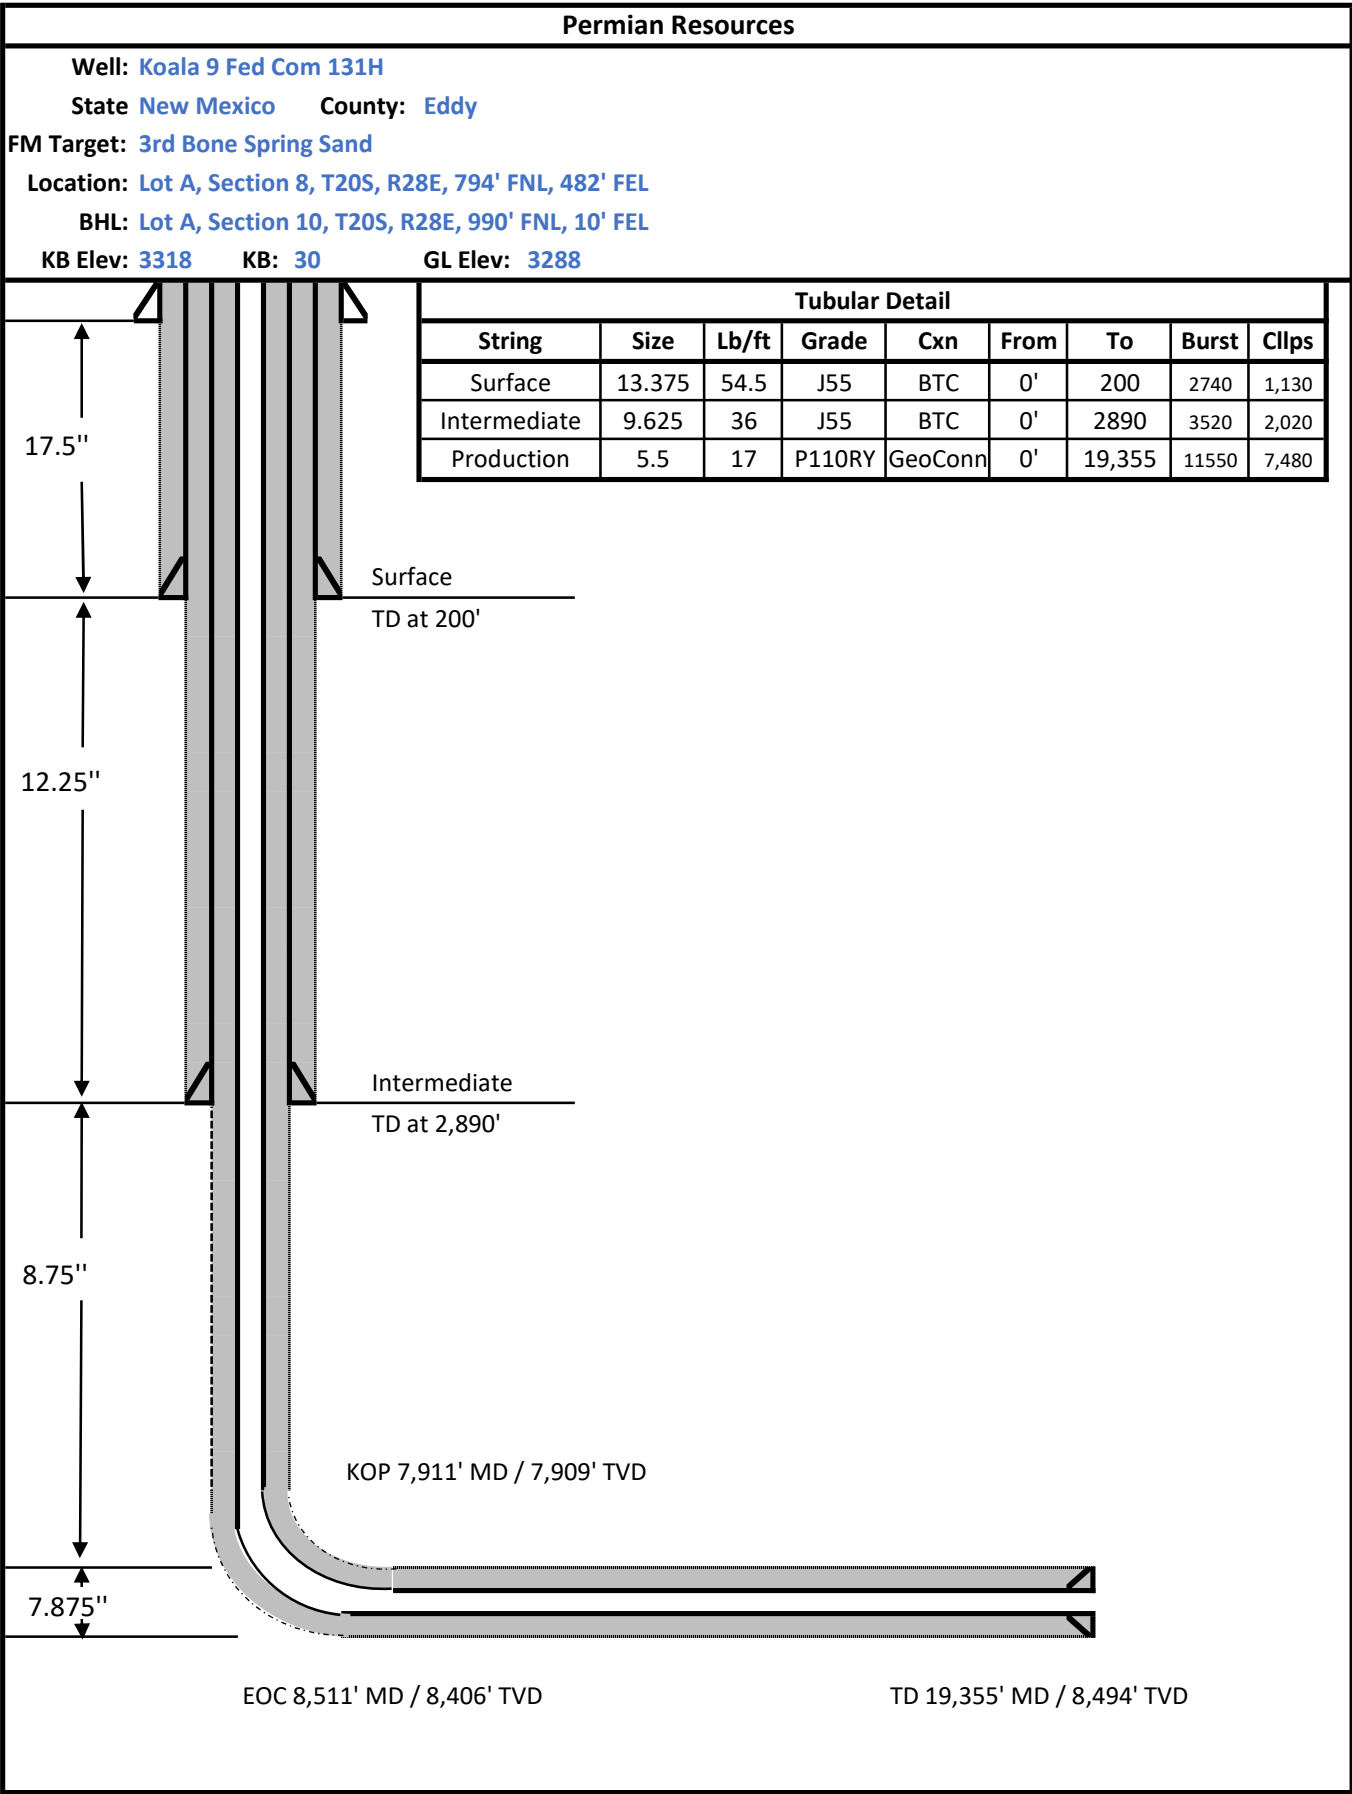

5,000 psi BOP Schematic

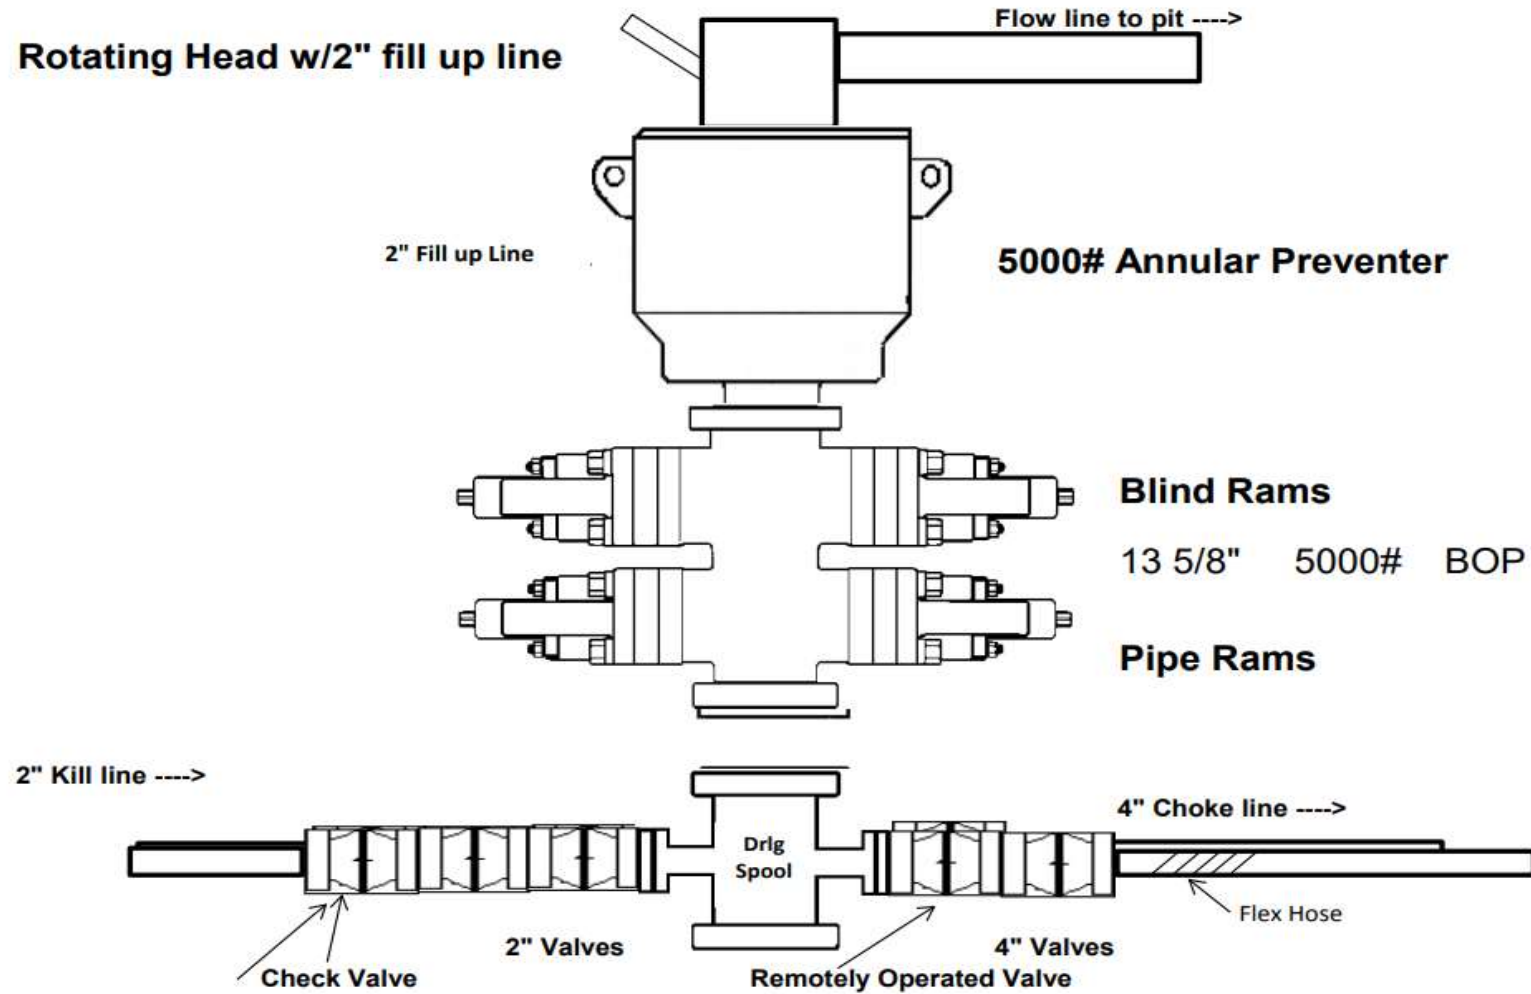



ContiTech

CONTITECH RUBBER Industrial Kft.	No:QC-DB- 210/ 2014 Page: 9 / 113
-------------------------------------	--------------------------------------

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 504	
PURCHASER: ContiTech Oil & Marine Corp.				P.O. N°: 4500409659	
CONTITECH RUBBER order N°: 538236		HOSE TYPE: 3" ID		Choke and Kill Hose	
HOSE SERIAL N°: 67255		NOMINAL / ACTUAL LENGTH:		10,67 m / 10,77 m	
W.P.: 68,9 MPa 10000 psi		T.P.: 103,4 MPa 15000 psi		Duration: 60 min	
Pressure test with water at ambient temperature					
See attachment. (1 page)					
↑ 10 mm = 10 Min. → 10 mm = 20 MPa					
COUPLINGS Type		Serial N°		Quality	
3" coupling with		9251 9254		AISI 4130	
4 1/16" 10K API b.w. Flange end				AISI 4130	
				A0578N	
				035608	
Not Designed For Well Testing				API Spec 16 C	
				Temperature rate: "B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated, inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date:		Inspector		Quality Control	
20. March 2014.				ContiTech Rubber Industrial Oil Quality Control Dept.  	

Centech Rubber Industrial Co., Ltd. (Subsidiary of 10, H-8728 Sangdo) H-6701 P.O. Box 102 Sangdo, Gangneung
Phone: +82 33 948 737 / Fax: +82 33 948 738 / e-mail: info@centechrubber.co.kr / Internet: www.centech-rubber.co.kr / www.centech.co.kr
The Court of Gangneung County is Registry Court / Registry Court No: Cg-99-09-00050 / Tel: 347 No: H-111537208
Hans Data Communication Co., Ltd. (Subsidiary of 142-20106-2083000)

ATTACHMENT OF QUALITY CONTROL INSPECTION AND TEST CERTIFICATE No: 501, 504, 505

Page: 1 / 1






CONTITECH RUBBER Industrial Kft.	No:QC-DB- 210/ 2014
	Page: 15 / 113
	ContiTech

Hose Data Sheet

CRI Order No.	538236
Customer	ContiTech Oil & Marine Corp.
Customer Order No.	4500409659
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16 C
Inside dia in inches	3
Length	35 ft
Type of coupling one end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 R.GR.SOUR
Type of coupling other end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 R.GR.SOUR
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	USUAL PHOENIX
Cover	NOT FIRE RESISTANT
Outside protection	St. steel outer wrap
Internal stripwound tube	No
Lining	OIL + GAS RESISTANT SOUR
Safety clamp	No
Lifting collar	No
Element C	No
Safety chain	No
Safety wire rope	No
Max. design temperature [°C]	100
Min. design temperature [°C]	-20
Min. Bend Radius operating [m]	0,90
Min. Bend Radius storage [m]	0,90
Electrical continuity	The Hose is electrically continuous
Type of packing	WOODEN CRATE ISPM-15

Printed: TIRETECHZICsontosG - 2014.03.10 15:22:17

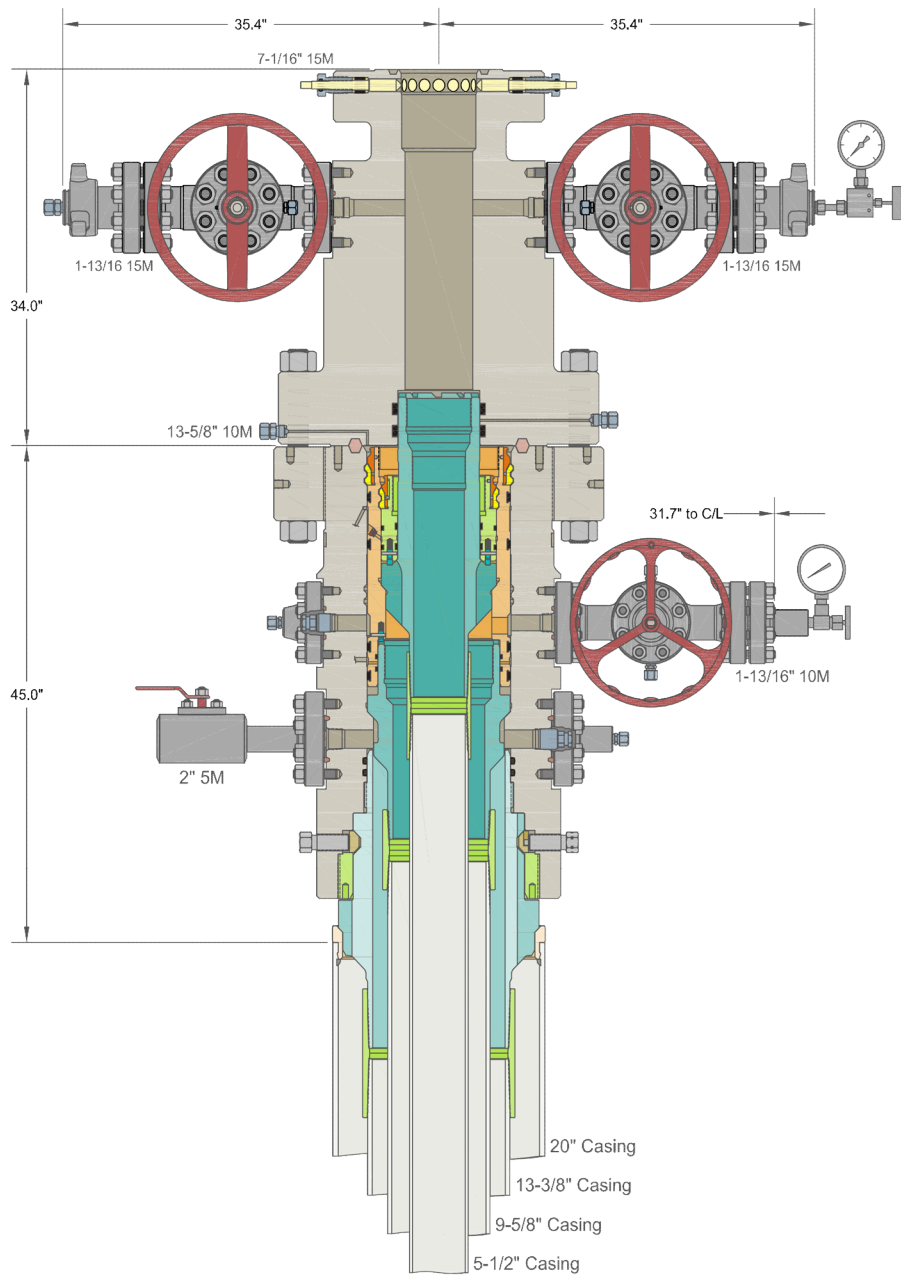

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

ALL DIMENSIONS APPROXIMATE

CACTUS WELLHEAD LLC		CENTENNIAL RESOURCE DEVELOPMENT LEE CO, NM	
20" x 13-3/8" x 9-5/8" x 5-1/2" 10M MBU-3T-CFL-R-DBLO System With 13-5/8" 10M x 7-1/16" 15M CTH-DBLHPS Tubing Head, 20" Landing Ring & Pin Down Mandrel Casing Hangers	DRAWN	DLE	10JUN20
	APPRV		
DRAWING NO.		HBE0000338	

Permian Resources Casing Design Criteria

A sundry will be requested if any lesser grade or different size casing is substituted. All casing will be centralized as specified in On Shore Order II. Casing will be tested as specified in On Shore Order II.

Casing Design Assumptions:

Surface

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate I

- 1) Burst Design Loads
 - a) Displacement to Gas
 - (1) Internal: Assumes a full column of gas in the casing with a gas gradient of 0.7 psi/ft in the absence of better information. It is limited to the controlling pressure based on the maximum expected pore pressure within the next drilling interval.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.

- (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the TD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Intermediate or Intermediate II

- 1) Burst Design Loads
 - a) Gas Kick Profile
 - (1) Internal: Load profile based on influx encountered in lateral portion of wellbore with a maximum influx volume of 150 bbl and a kick intensity of 1.5 ppg using maximum anticipated MW of 9.9 ppg.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight from TOC to surface and cement slurry weight from TOC to shoe.
 - b) Lost Returns with Mud Drop
 - (1) Internal: Lost circulation at the deepest TVD of the next hole section and the fluid level falls to a depth where the hydrostatic pressure of the mud column equals pore pressure at the depth of the lost circulation zone.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 - 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 - 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Production

- 1) Burst Design Loads
 - a) Injection Down Casing
 - (1) Internal: Surface pressure plus injection fluid gradient.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - b) Casing Pressure Test (Drilling)
 - (1) Internal: Displacement fluid plus surface pressure required to comply with regulatory casing test pressure requirements of Onshore Oil and Gas Order No. 2 and NM NMAC 19.15.16 of NMOCD regulations.
 - (2) External: Mud weight to TOC and cement mix water gradient (8.4 ppg) below TOC.
 - c) Casing Pressure Test (Production)
 - (1) Internal: The design pressure test should be the greater of the planned test pressure prior to simulation down the casing, the regulatory test pressure, and the expected gas lift system pressure. The design test fluid should be the fluid associated with the pressure test having the greatest pressure.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
 - d) Tubing Leak
 - (1) Internal: SITP plus a packer fluid gradient to the top of packer.
 - (2) External: Mud base-fluid density to top of cement and cement mix water gradient (8.4 ppg) below TOC.
- 2) Collapse Loads
 - a) Cementing
 - (1) Internal: Displacement fluid density.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
 - b) Full Evacuation
 - (1) Internal: Full void pipe.
 - (2) External: Mud weight to TOC and cement slurry(s) density below TOC.
- 3) Tension Loads
 - a) Overpull Force
 1. Axial: Buoyant weight of the string plus planned 100,000 lbs applied in stuck pipe situation.
 - b) Green Cement Casing Test
 1. Axial: Buoyant weight of the string plus cement plug bump pressure load.

Permian Resources

Multi-Well Pad Batch Drilling Procedure

Surface Casing - PR intends to Batch set all 13-3/8" casing to a depth approved in the APD. 17-1/2" Surface Holes will be batch drilled by a rig. Appropriate notifications will be made prior to spudding the well, running and cementing casing and prior to skidding to the rig to the next well on pad.

1. Drill 17-1/2" Surface hole to Approved Depth with Rig and perform wellbore cleanup cycles. Trip out and rack back drilling BHA.
2. Run and land 13-3/8" 54.5# J55 BTC casing see Illustration 1-1 Below to depth approved in APD.
3. Set packoff and test to 5k psi
4. Offline Cement
5. Install wellhead with pressure gauge and nightcap. Nightcap is shown on final wellhead Stack up Illustration #2-2.
6. Skid Rig to adjacent well to drill Surface hole.
7. Surface casing test will be performed by the rig in order to allow ample time for Cement to develop 500psi compressive strength. Casing test to 0.22 psi/ft or 1500 psi whichever is

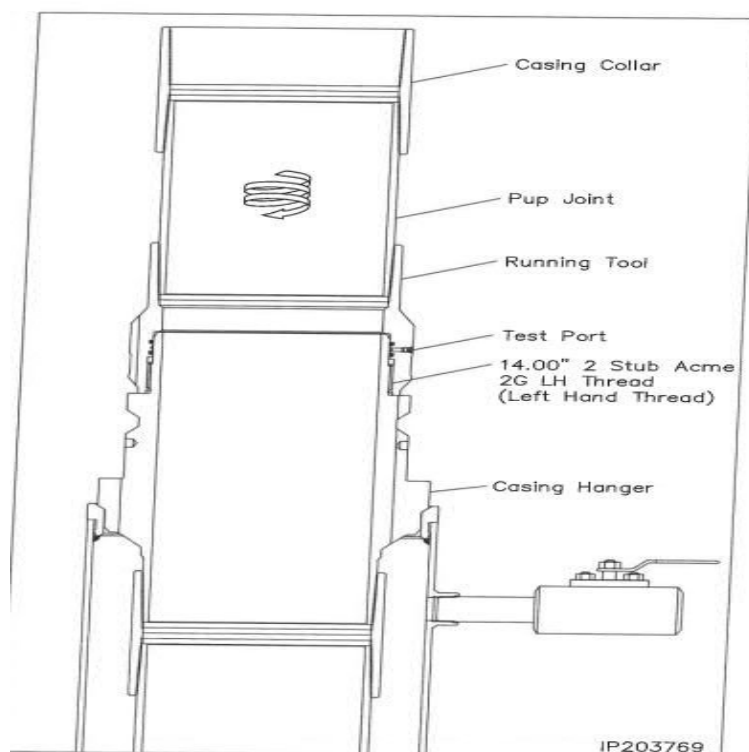


Illustration 1-1

Intermediate Casing – PR intends to Batch set all intermediate casing strings to a depth approved in the APD, typically set into Lamar. 12-1/4" Intermediate Holes will be batch drilled by the rig. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.

1. Rig will remove the nightcap and install and test BOPE.
2. Test Surface casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
3. Install wear bushing then drill out 13-3/8" shoe-track plus 20' and conduct FIT to minimum of the MW equivalent anticipated to control the formation pressure to the next casing point.
4. Drill Intermediate hole to approved casing point. Trip out of hole with BHA to run Casing.
5. Remove wear bushing then run and land Intermediate Casing with mandrel hanger in wellhead.
6. Cement casing to surface with floats holding.
7. Washout stack then run wash tool in wellhead and wash hanger and pack-off setting area.
8. Install pack-off and test void to 5,000 psi for 15 minutes. Nightcap shown on final wellhead stack up illustration 2-2 on page 3.
9. Test casing per COA WOC timing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst. Cement must have achieved 500psi compressive strength prior to test.
10. Install nightcap – skid rig to adjacent well to drill Intermediate hole.

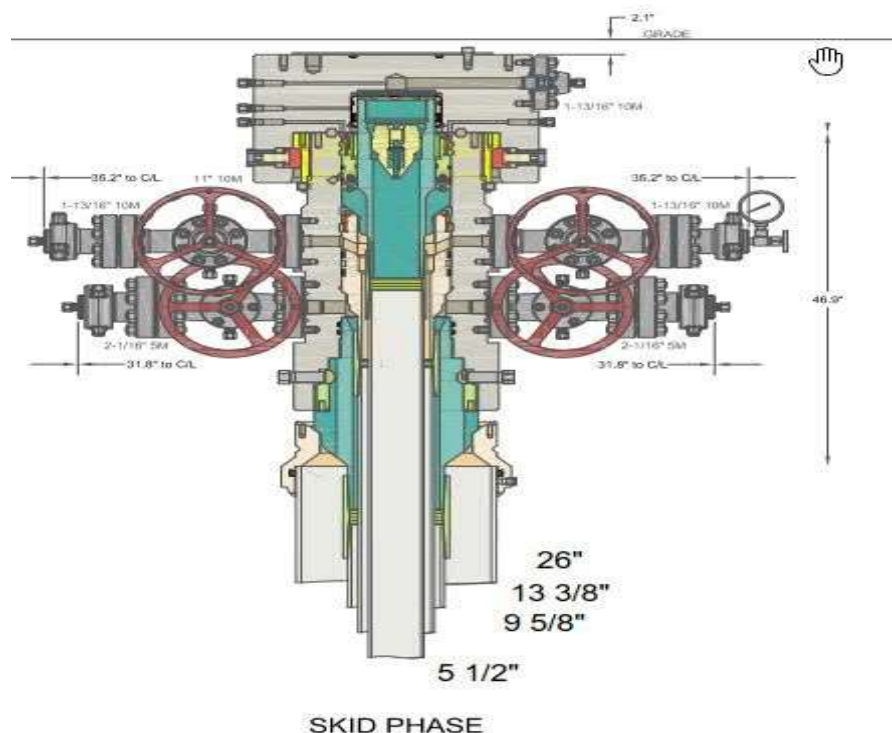



Illustration 2-2

Production Casing – PR intends to Batch set all Production casings with Rig. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.


1. Big Rig will remove the nightcap and install and test BOPE.
2. Install wear bushing then drill Intermediate shoe-track plus 20' and conduct FIT to minimum MW equivalent to control the formation pressure to TD of well.
3. Drill Vertical hole to KOP – Trip out for Curve BHA.
4. Drill Curve, landing in production interval – Trip for Lateral BHA.
5. Drill Lateral / Production hole to Permitted BHL, perform cleanup cycles and trip out to run 5 1/2" Production Casing.
6. Remove wear bushing then run 5-1/2" production casing to TD landing casing mandrel in wellhead.
7. Cement 5-1/2" Production string with floats holding.
8. Run in with wash tool and wash wellhead area – install pack-off and test void to 5,000psi for 15 minutes.
9. Install BPV in 5-1/2" mandrel hanger – Nipple down BOPE and install nightcap.
10. Test nightcap void to 5,000psi for 30 minutes per illustration 2-2
11. Skid rig to adjacent well on pad to drill production hole.

Permian Resources Offline Cementing Procedure 13-3/8" & 9-5/8" Casing


1. Drill hole to Total Depth with Rig and perform wellbore cleanup cycles.
2. Run and casing to Depth.
3. Land casing with mandrel.
4. Circulate 1.5 csg capacity.
5. Flow test – Confirm well is static and floats are holding.
6. Set Annular packoff and pressure test. Test to 5k.
7. Nipple down BOP and install cap flange.
8. Skid rig to next well on pad
9. Remove cap flange (confirm well is static before removal)
 - a) If well is not static use the casing outlet valves to kill well
 - b) Drillers method will be used in well control event
 - c) High pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - d) Kill mud will be circulated once influx is circulated out of hole
 - e) Confirm well is static and remove cap flange to start offline cement operations
10. Install offline cement tool.
11. Rig up cementers.
12. Circulate bottoms up with cement truck
13. Commence planned cement job, take returns through the annulus wellhead valve
14. After plug is bumped confirm floats hold and well is static
15. Rig down cementers and equipment
16. Install night cap with pressure gauge to monitor.

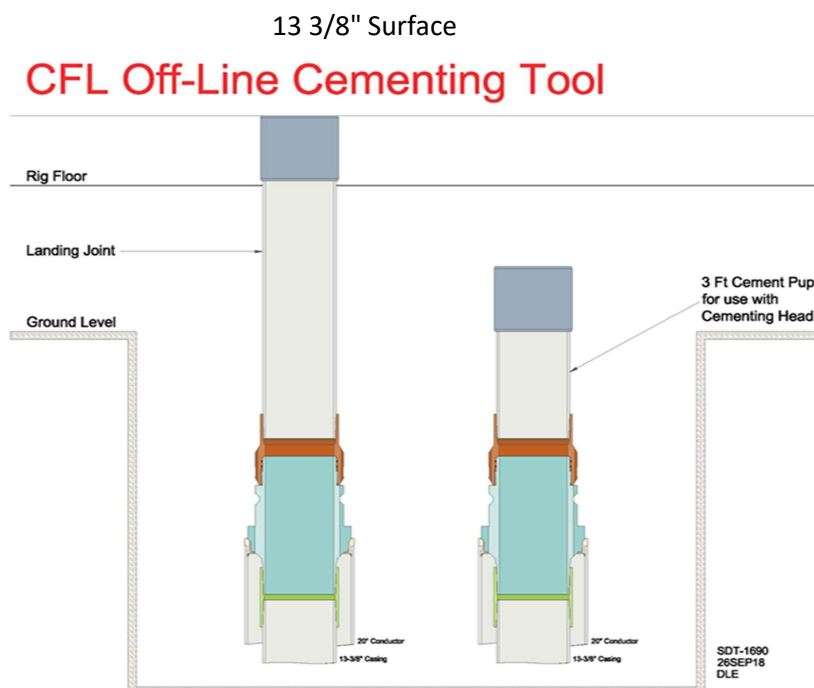


9 5/8" Intermediate

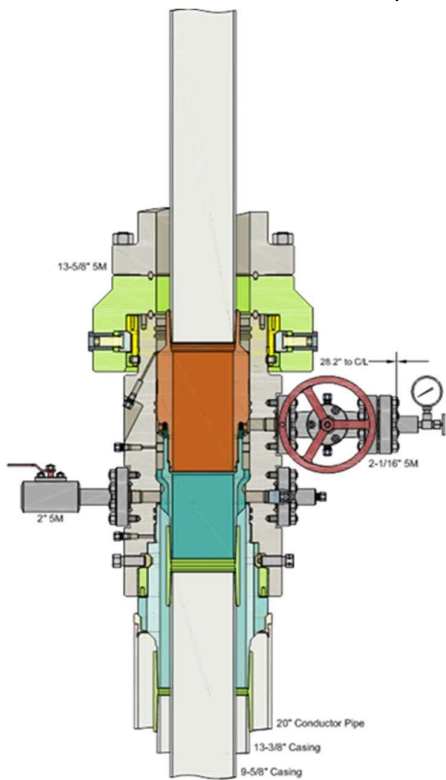

Run 9-5/8" Casing
Land Casing on 9-5/8" Mandrel Hanger
Cement 9-5/8" Casing
Retrieve Running Tool

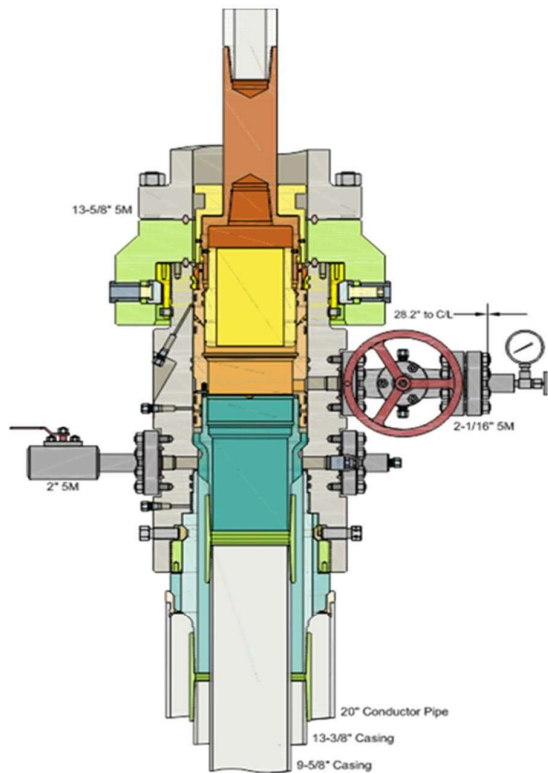


Run 13-5/8" Packoff
Test Upper and Lower Seals
Engage Lockring
Retrieve Running Tool

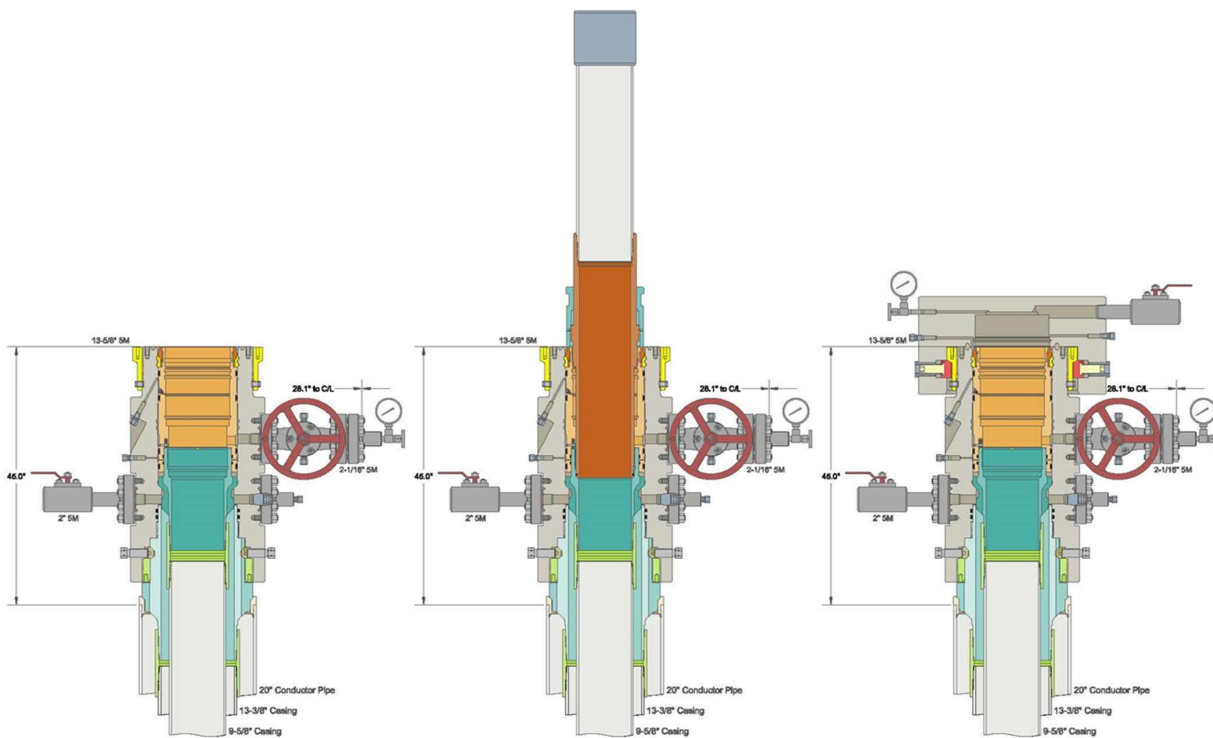

Metal One Corp. 	GEOCONN-SC Pipe: SeAH P110RY 95%PBW (SMYS110ksi) *1 Coupling: P110RY (SMYS110ksi) Connection Data Sheet	Page Date Rev.	MAI GC 5.5 17 SeAH P110RY 95%RBW+SC-Cplg6.050 P110RY 3-Feb-21 0
---	--	----------------------	--

GEOCONN-SC

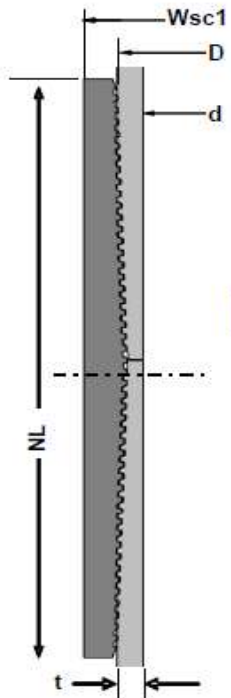

Geometry	Imperial		S.I.	
Pipe Body				
Grade *1	P110RY	-	P110RY	-
SMYS	110	ksi	110	ksi
Pipe OD (D)	5.500	in	139.70	mm
Weight	17.00	lb/ft	25.33	kg/m
Wall Thickness (t)	0.304	in	7.72	mm
Pipe ID (d)	4.892	in	124.26	mm
Drift Dia.	4.767	in	121.08	mm
Connection				
Coupling SMYS	110	ksi	110	ksi
SC-Coupling OD (Wsc1)	6.050	in	153.67	mm
Coupling Length (NL)	8.350	in	212.09	mm
Make up Loss	4.125	in	104.78	mm
Pipe Critical Area	4.96	in ²	3,202	mm ²
Box Critical Area	6.10	in ²	3,937	mm ²
Thread Taper	1 / 16 (3/4" per ft)			
Number of Threads	5 TPI			

Performance	Imperial		S.I.	
Performance Properties for Pipe Body				
S.M.Y.S. *1	546	kips	2,428	kN
M.I.Y.P. *1	11,550	psi	79.66	MPa
Collapse Strength *1	7,480	psi	51.59	MPa
Note S.M.Y.S.= Specified Minimum YIELD Strength of Pipe body M.I.Y.P. = Minimum Internal Yield Pressure of Pipe body *1: SeAH P110RY 95%RBW: SMYS110ksi, MIYP11,550psi				
Performance Properties for Connection				
Min. Connection Joint Strength	100%		of S.M.Y.S.	
Min. Compression Yield	100%		of S.M.Y.S.	
Internal Pressure	100%		of M.I.Y.P.	
External Pressure	100%		of Collapse Strength	
Max. DLS (deg. /100ft)			>90	
Recommended Torque				
Min.	10,800	ft-lb	14,600	N-m
Opti.	12,000	ft-lb	16,200	N-m
Max.	13,200	ft-lb	17,800	N-m
Operational Max.	15,600	ft-lb	21,100	N-m
Note : Operational Max. torque can be applied for high torque application				

Legal Notice

The use of this information is at the reader/user's risk and no warranty is implied or expressed by Metal One Corporation or its parents, subsidiaries or affiliates (herein collectively referred to as "Metal One") with respect to the use of information contained herein. The information provided on this Connection Data Sheet is for informational purposes only, and was prepared by reference to engineering information that is specific to the subject products, without regard to safety-related factors, all of which are the sole responsibility of the operators and users of the subject connectors. Metal One assumes no responsibility for any errors with respect to this information.

Statements regarding the suitability of products for certain types of applications are based on Metal One's knowledge of typical requirements that are often placed on Metal One products in standard well configurations. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

The products described in this Connection Data Sheet are not recommended for use in deep water offshore applications. For more information, please refer to http://www.mto.co.jp/mto-con/ Images/top/WebsiteTerms_Active_20333287_1.pdf the contents of which are incorporated by reference into this Connection Data Sheet.



CONTITECH RUBBER
Industrial Kft.

No:QC-DB- 210/ 2014

Page: 15 / 113

ContiTech

Hose Data Sheet

CRI Order No.	538236
Customer	ContiTech Oil & Marine Corp.
Customer Order No.	4500409659
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16 C
Inside dia in inches	3
Length	35 ft
Type of coupling one end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 R.GR.SOUR
Type of coupling other end	FLANGE 4.1/16" 10K API SPEC 6A TYPE 6BX FLANGE C/W BX155 R.GR.SOUR
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	USUAL PHOENIX
Cover	NOT FIRE RESISTANT
Outside protection	St. steel outer wrap
Internal stripwound tube	No
Lining	OIL + GAS RESISTANT SOUR
Safety clamp	No
Lifting collar	No
Element C	No
Safety chain	No
Safety wire rope	No
Max. design temperature [°C]	100
Min. design temperature [°C]	-20
Min. Bend Radius operating [m]	0,90
Min. Bend Radius storage [m]	0,90
Electrical continuity	The Hose is electrically continuous
Type of packing	WOODEN CRATE ISPM-15


Printed: TIRETECHZICsontosG - 2014.03.10 15:22:17

Permian Resources

Multi-Well Pad Batch Drilling & Off Line Cement Procedure

20" Surface Casing - PR intends to Batch set and offline cement all 20" casing to a depth approved in the APD. 24" Surface Holes will be batch drilled by a big rig. Appropriate notifications will be made prior to spudding the well, running, and cementing casing and prior to skidding to the rig to the next well on pad.

1. Drill 24" Surface hole to Approved Depth with Surface Preset Rig and perform wellbore cleanup cycles. Trip out and rack back drilling BHA.
2. Run casing with Cactus Multibowl system, with 32" baseplate supported by both 30" Conductor.
3. Circulate 1.5 csg capacity.
4. Flow test – Confirm well is static.
5. Install cap flange.
6. Skid rig to next well on pad
7. Remove cap flange (confirm well is static before removal)
 - a) If well is not static use the casing outlet valves to kill well
 - b) Drillers method will be used in well control event
 - c) High pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - d) Kill mud will be circulated once influx is circulated out of hole
 - e) Confirm well is static and remove cap flange to start offline cement operations
8. Install offline cement tool.
9. Rig up cementers.
10. Circulate bottoms up with cement truck
11. Commence planned cement job, take returns through the annulus wellhead valve
12. After plug is bumped confirm floats hold and well is static
13. Perform green cement casing test.
 - a) Test Surface casing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst.
14. Rig down cementers and equipment
15. Install night cap with pressure gauge to monitor.


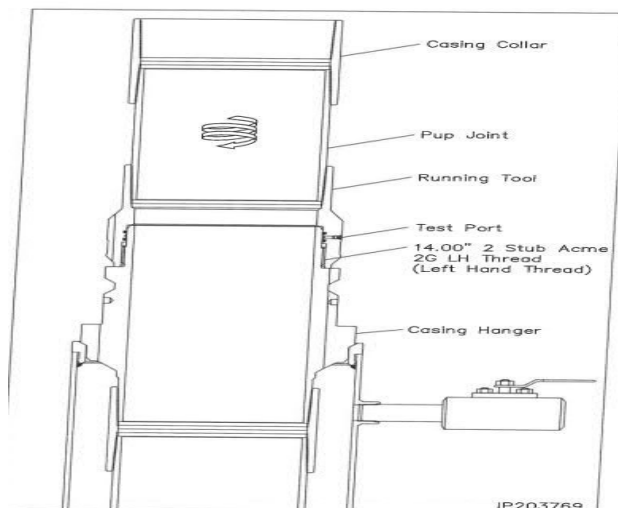


Intermediate 1 Casing – PR intends to Batch set all intermediate 1 casing strings to a depth approved in the APD, typically set into end of salts. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.

Rig will remove the nightcap and install and test BOPE (testing will be performed on the first intermediate 1 as per requested break testing variance).

Install wear bushing then drill out 20" shoe-track.

1. Drill 17.5" Intermediate 1 hole to approved casing point. Trip out of hole with BHA to run Casing.
2. Remove wear bushing then run and land Intermediate 13 3/8" 54.5# J-55 BTC casing with mandrel hanger in wellhead.
3. Flow test – Confirm well is static.
4. Set Annular packoff and pressure test. Test to 5k.
5. Install BPV, Nipple down BOP and install cap flange.
6. Skid rig to next well on pad
7. Remove cap flange (confirm well is static before removal)
 - a) If well is not static use the casing outlet valves to kill well
 - b) Drillers method will be used in well control event
 - c) High pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - d) Kill mud will be circulated once influx is circulated out of hole
 - e) Confirm well is static and remove cap flange to start offline cement operations
8. Install offline cement tool.
9. Rig up cementers.
10. Circulate bottoms up with cement truck
11. Commence planned cement job, take returns through the annulus wellhead valve
12. After plug is bumped confirm floats hold and well is static
13. Perform green cement casing test.
 - a) Test casing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst.
14. Rig down cementers and equipment
15. Install night cap with pressure gauge to monitor.

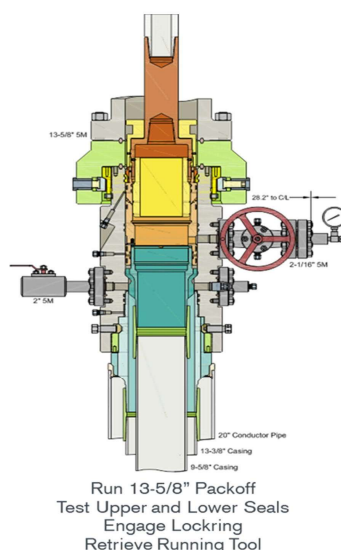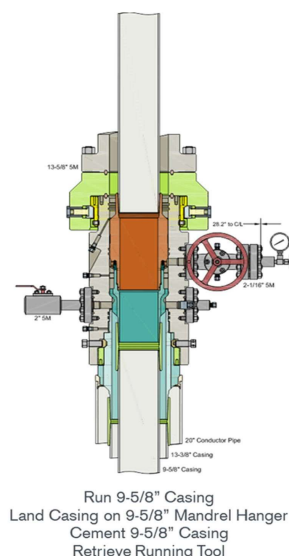

Intermediate 2 Casing – PR intends to Batch set all intermediate 2 casing strings to a depth approved in the APD, typically set into Captain past losses. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.

1. Rig will remove the nightcap and install and test BOPE (testing will be performed on the first intermediate 2 as per requested break testing variance).
2. Install wear bushing then drill out 13-3/8" shoe-track.
3. Drill Intermediate 12.25" hole to approved casing point. Trip out of hole with BHA to run Casing.
4. Remove wear bushing then run and land Intermediate 9.625" 40# J-55 BTC casing with mandrel hanger in wellhead.
5. Flow test – Confirm well is static.
6. Set Annular packoff and pressure test. Test to 5k.
7. Install BPV, Nipple down BOP and install cap flange.
8. Skid rig to next well on pad
9. Remove cap flange (confirm well is static before removal)
 - a) If well is not static use the casing outlet valves to kill well
 - b) Drillers method will be used in well control event
 - c) High pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - d) Kill mud will be circulated once influx is circulated out of hole
 - e) Confirm well is static and remove cap flange to start offline cement operations
10. Install offline cement tool.
11. Rig up cementers.
12. Circulate bottoms up with cement truck
13. Commence planned cement job, take returns through the annulus wellhead valve
14. After plug is bumped confirm floats hold and well is static
15. Perform green cement casing test.
 - a) Test casing (.22 psi/ft or 1500 psi whichever is greater) - not to exceed 70% casing burst.
16. Rig down cementers and equipment
17. Install night cap with pressure gauge to monitor.

Production Casing – PR intends to Batch set all Production casings. Appropriate notifications will be made prior Testing BOPE, and prior to running/cementing all casing strings.

1. Rig will remove the nightcap and install and test BOPE.
2. Install wear bushing then drill Intermediate shoe-track.
3. 3. Drill Vertical hole to KOP – Trip out for Curve BHA.
4. Drill Curve, landing in production interval – Trip for Lateral BHA.
5. Drill Lateral / Production hole to Permitted BHL, perform cleanup cycles and trip out to run 5-1/2" Production Casing.
6. Remove wear bushing then run 5-1/2" production casing to TD landing casing mandrel in wellhead.
7. Cement 5-1/2" Production string to surface with floats holding.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data

08/31/2023

APD ID: 10400085976

Submission Date: 06/09/2022

Operator Name: COLGATE OPERATING LLC

Well Name: KOALA 9 FED COM

Well Number: 131H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Bond

Federal/Indian APD: FED

BLM Bond number: NMB001382

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 260781

CONDITIONS

Operator: Permian Resources Operating, LLC 1001 17th Street, Suite 1800 Denver, CO 80202	OGRID: 372165
	Action Number: 260781
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Notify OCD 24 hours prior to casing & cement	9/5/2023
ward.rikala	Will require a File As Drilled C-102 and a Directional Survey with the C-104	9/5/2023
ward.rikala	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	9/5/2023
ward.rikala	Cement is required to circulate on both surface and intermediate1 strings of casing	9/5/2023
ward.rikala	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system	9/5/2023