

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 356057

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address MEWBOURNE OIL CO P.O. Box 5270 Hobbs, NM 88241		2. OGRID Number 14744
		3. API Number 30-025-52345
4. Property Code 333989	5. Property Name DOLLY VARDEN 36 24 STATE COM	6. Well No. 626H

7. Surface Location

UL - Lot J	Section 36	Township 21S	Range 34E	Lot Idn J	Feet From 2435	N/S Line S	Feet From 1610	E/W Line E	County Lea
---------------	---------------	-----------------	--------------	--------------	-------------------	---------------	-------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot B	Section 24	Township 21S	Range 34E	Lot Idn B	Feet From 100	N/S Line N	Feet From 1980	E/W Line E	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

9. Pool Information

GRAMA RIDGE;BONE SPRING, NE	28435
-----------------------------	-------

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3672
16. Multiple N	17. Proposed Depth 24520	18. Formation 1st Bone Spring Sand	19. Contractor	20. Spud Date 1/14/2024
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1800	1255	0
Int1	12.25	9.625	36	3453	0	0
Int2	12.25	9.62	40	4393	0	0
Int3	12	9	40	5282	0	0
Int1	12	9	40	5700	1155	0
Prod	8.75	7	26	11350	700	5500
Liner1	6.125	4.5	13.5	24520	560	10600

Casing/Cement Program: Additional Comments

MOC proposed to drill & test the Bone Springs formation. H2S rule 118 does not apply because MOC has researched the area & no high concentrations were found. Will have on location & working all H2S safety equipment before Yates formation for safety & insurance purposes. Will stimulate as needed for production.

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Annular	5000	2500	Schaffer
Double Ram	5000	5000	Schaffer
Annular	5000	2500	Schaffer

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.
I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.

OIL CONSERVATION DIVISION

Signature:			
Printed Name:	Electronically filed by Monty Whetstone	Approved By:	Paul F Kautz
Title:	Vice President Operations	Title:	Geologist
Email Address:	fking@mewbourne.com	Approved Date:	12/20/2023
Date:	12/18/2023	Phone:	903-561-2900
		Expiration Date:	12/20/2025
		Conditions of Approval Attached	

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number		2 Pool Code 28435		3 Pool Name GRAMA RIDGE; BONE SPRING, NE					
4 Property Code		5 Property Name DOLLY VARDEN 36/24 STATE COM						6 Well Number 626H	
7 OGRID NO. 14744		8 Operator Name MEWBOURNE OIL COMPANY						9 Elevation 3672'	
10 Surface Location									
UL or lot no. J	Section 36	Township 21S	Range 34E	Lot Idn	Feet from the 2435	North/South line SOUTH	Feet From the 1610	East/West line EAST	County LEA
11 Bottom Hole Location If Different From Surface									
UL or lot no. B	Section 24	Township 21S	Range 34E	Lot Idn	Feet from the 100	North/South line NORTH	Feet from the 1980	East/West line EAST	County LEA
12 Dedicated Acres 400		13 Joint or Infill		14 Consolidation Code		15 Order No.			

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

16 GEODETIC DATA NAD 83 GRID - NM EAST SURFACE LOCATION N: 523157.2 - E: 823066.3 LAT: 32.4349146° N LONG: 103.4201756° W CORNER DATA NAD 83 GRID - NM EAST A: FOUND BRASS CAP "1913" N: 520684.4 - E: 819415.5 B: FOUND BRASS CAP "1913" N: 523328.3 - E: 819389.5 C: FOUND BRASS CAP "1913" N: 525969.8 - E: 819368.3 D: FOUND BRASS CAP "1913" N: 528609.3 - E: 819345.4 E: FOUND BRASS CAP "1913" N: 531252.0 - E: 819322.8 F: FOUND BRASS CAP "1913" N: 533891.2 - E: 819301.8 G: FOUND BRASS CAP "1913" N: 536533.2 - E: 819279.7 H: FOUND BRASS CAP "1913" N: 536559.0 - E: 821927.8 I: FOUND 3/4" REBAR N: 536581.8 - E: 824574.8		GEODETIC DATA NAD 83 GRID - NM EAST BOTTOM HOLE N: 536464.8 - E: 822596.0 LAT: 32.4715009° N LONG: 103.4213313° W J: FOUND 9"x3"x5" LIMESTONE ROCK N: 533945.5 - E: 824594.9 K: CALCULATED CORNER N: 531305.0 - E: 824614.8 L: FOUND 8"x6"x4" LIMESTONE ROCK N: 528664.5 - E: 824634.8 M: FOUND 3/4" REBAR N: 526024.0 - E: 824654.4 N: FOUND 1/2" REBAR N: 520737.8 - E: 824694.4 O: FOUND BRASS CAP "1913" N: 520713.0 - E: 822054.7 P: FOUND BRASS CAP "1913" N: 531278.0 - E: 821970.1		17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>Andrew W Taylor</i> 12/14/23 Signature Date ANDY TYALOR Printed Name ATYALOR@MEWBOURNE.COM E-mail Address 18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. 04/07/2023 Date of Survey Signature and Seal of Professional Surveyor 19680 Certificate Number	
---	--	--	--	---	--

JOB No: LS23040371

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 356057

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: MEWBOURNE OIL CO [14744] P.O. Box 5270 Hobbs, NM 88241	API Number: 30-025-52345
	Well: DOLLY VARDEN 36 24 STATE COM #626H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	If cement does not circulate on any string, a CBL is required for that string of casing
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud



Mewbourne Oil Company

Lea Co., NM (NAD 83)

Dolly Varden 36-24 Pad

Dolly Varden 36-24 State Com #626H

OH

Plan #1

Anticollision Report

16 October, 2023



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Reference	Plan #1
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria
Interpolation Method:	Stations
Depth Range:	Unlimited
Results Limited by:	Maximum centre distance of 1,000.00usft
Warning Levels Evaluated at:	2.00 Sigma
Error Model:	ISCWSA
Scan Method:	Closest Approach 3D
Error Surface:	Pedal Curve
Casing Method:	Not applied

Survey Tool Program	Date	10/16/2023
From (usft)	To (usft)	Survey (Wellbore)
0.00	24,519.34	Plan #1 (OH)
		Tool Name
		MWD + HDGM
		Description
		MWD + HDGM - Standard

Summary						
Site Name Offset Well - Wellbore - Design	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Dolly Varden 36-24 Offsets						
Bruce Keplinger 13 State Com #123H - OH - OH						Out of range
Chorizo 12 State Com #501H - OH - OH						Out of range
Chorizo 12 State Com #502H - OH - OH						Out of range
Chorizo 12 State Com #503H - OH - OH						Out of range
Chorizo 12 State Com #602H - OH - OH						Out of range
Chorizo 12 State Com #603H (P&A) - OH - OH						Out of range
Chorizo 12 State Com #603Y - OH - OH						Out of range
Dolly Varden 25-24 B1ED State Com #2H - OH - OH						Out of range
Dolly Varden 25-24 B2ED State Com #1H - OH - OH						Out of range
Dolly Varden 25-24 B2FC State Com #1H - OH - OH						Out of range
Dolly Varden 25-24 B2GB State Com #1H - OH - OH	23,828.31	17,137.23	753.73	588.30	4.556	CC
Dolly Varden 25-24 B2GB State Com #1H - OH - OH	24,100.00	17,391.35	755.41	585.46	4.445	ES
Dolly Varden 25-24 B2GB State Com #1H - OH - OH	24,519.34	17,817.17	765.75	588.77	4.327	SF
Getty 25 State #1 - OH - OH						Out of range
Getty 36 State Com #1 - OH - OH						Out of range
Getty 36 State Com #1 - ST01 - ST01						Out of range
Getty 36 State Com #2 (P&A) - OH - OH	10,533.51	10,496.35	174.95	-163.85	0.516	Level 3, CC
Getty 36 State Com #2 (P&A) - OH - OH	10,600.00	10,562.56	175.36	-165.57	0.514	Level 3, ES, SF
Leonard State Comm #1 (P&A) - OH - OH	23,959.72	10,813.05	0.31	-457.17	0.001	Level 3, CC, ES, SF
Merchant 8700 JV P #1 - OH - OH						Out of range
Ohio - Wilson State A-24 #1 (P&A) - OH - OH						Out of range
State B-10792 #32 - OH - OH						Out of range
State Btry 2 #33 (P&A) - OH - OH						Out of range
State H #1 (P&A) - OH - OH						Out of range
State J-24 #1 (P&A) - OH - OH						Out of range
State L Com #2 (P&A) - Inc - Only - Inc - Only						Out of range
State P #1 (P&A) - OH - OH						Out of range
State P #2 (P&A) - OH - OH						Out of range
State P #3 (P&A) - OH - OH						Out of range
State P #4 (P&A) - OH - OH						Out of range
State P #5 (P&A) - OH - OH						Out of range
State P #6 (P&A) - OH - OH						Out of range

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Summary

Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
Dolly Varden 36-24 Offsets						
Wilson State #24 (P&A) - OH - OH						Out of range
Wilson State #29 (P&A) - OH - OH						Out of range
Wilson State #30 - OH - OH						Out of range
Wilson State #31 - OH - OH						Out of range
Wilson State C #1 - OH - OH						Out of range
Dolly Varden 36-24 Pad						
Dolly Varden 36-24 State Com #318H - OH - Plan #1	800.00	800.00	60.00	54.47	10.841	CC, ES
Dolly Varden 36-24 State Com #318H - OH - Plan #1	1,000.00	996.87	64.95	58.02	9.381	SF
Dolly Varden 36-24 State Com #528H - OH - Plan #1	1,000.00	1,000.00	40.00	33.03	5.740	CC, ES
Dolly Varden 36-24 State Com #528H - OH - Plan #1	1,100.00	1,098.95	42.29	34.64	5.524	SF
Dolly Varden 36-24 State Com #623H - OH - Plan #2	800.00	800.00	20.00	14.47	3.614	CC, ES
Dolly Varden 36-24 State Com #623H - OH - Plan #2	900.00	899.46	21.29	15.05	3.412	SF
Dolly Varden 36-24 State Com #628H - OH - Plan #1	1,000.00	1,000.00	20.00	13.03	2.870	CC, ES
Dolly Varden 36-24 State Com #628H - OH - Plan #1	1,100.00	1,099.99	21.06	13.39	2.746	SF

Offset Design: Dolly Varden 36-24 Offsets - Dolly Varden 25-24 B2GB State Com #1H - OH - OH

Survey Program: 159-MWD, 1840-MWD										Offset Site Error:	0.00 usft		
Reference										Offset Well Error:	0.00 usft		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
16,500.00	11,044.19	10,257.13	10,153.57	88.27	30.96	1.26	5,730.19	-394.71	964.71	897.85	66.86	14.429	
16,600.00	11,041.87	10,270.00	10,159.18	89.57	30.97	1.28	5,741.77	-394.57	920.46	853.01	67.44	13.648	
16,700.00	11,039.55	10,328.00	10,179.28	90.87	30.98	1.31	5,796.11	-395.05	882.98	814.82	68.16	12.955	
16,800.00	11,037.22	10,328.00	10,179.28	92.18	30.98	1.31	5,796.11	-395.05	851.32	782.29	69.03	12.333	
16,900.00	11,034.90	10,376.00	10,190.22	93.50	31.00	1.22	5,842.79	-396.91	826.97	757.03	69.95	11.823	
17,000.00	11,032.58	10,423.00	10,197.33	94.82	31.05	1.09	5,889.18	-399.30	809.42	738.46	70.95	11.408	
17,100.00	11,030.26	10,488.38	10,204.00	96.14	31.21	0.97	5,954.17	-401.60	796.91	724.97	71.94	11.077	
17,200.00	11,027.94	10,548.55	10,207.35	97.46	31.41	0.97	6,014.24	-402.14	789.06	716.04	73.02	10.806	
17,300.00	11,025.61	10,613.40	10,207.75	98.79	31.66	1.03	6,079.08	-401.81	786.07	711.96	74.11	10.606	
17,320.91	11,025.13	10,627.50	10,207.49	99.07	31.72	1.05	6,093.18	-401.67	785.98	711.64	74.34	10.572	
17,400.00	11,023.29	10,710.87	10,204.84	100.13	32.10	1.18	6,176.50	-400.46	786.75	711.72	75.03	10.486	
17,500.00	11,020.97	10,832.92	10,205.34	101.46	32.75	1.39	6,298.52	-398.61	783.90	708.07	75.83	10.338	
17,600.00	11,018.65	10,920.14	10,205.85	102.80	33.28	1.52	6,385.74	-397.54	781.09	704.22	76.87	10.161	
17,700.00	11,016.33	11,007.75	10,204.47	104.15	33.86	1.63	6,473.33	-396.79	780.36	702.42	77.94	10.012	
17,713.95	11,016.00	11,020.71	10,204.19	104.33	33.95	1.64	6,486.29	-396.66	780.35	702.26	78.09	9.993	
17,800.00	11,014.01	11,102.24	10,202.07	105.49	34.54	1.75	6,567.78	-395.74	780.63	701.64	78.99	9.882	
17,900.00	11,011.68	11,201.34	10,199.09	106.84	35.32	1.88	6,666.84	-394.71	781.37	701.33	80.04	9.762	
18,000.00	11,009.36	11,302.08	10,196.18	108.19	36.17	1.99	6,767.53	-394.03	781.99	700.88	81.11	9.641	
18,100.00	11,007.04	11,406.23	10,193.40	109.54	37.10	2.18	6,871.63	-392.16	782.43	700.24	82.19	9.520	
18,200.00	11,004.72	11,502.93	10,191.16	110.90	38.01	2.40	6,968.27	-389.84	782.56	699.21	83.35	9.389	
18,300.00	11,002.40	11,604.88	10,188.35	112.26	39.02	2.59	7,070.17	-388.07	783.11	698.61	84.50	9.268	
18,400.00	11,000.08	11,704.33	10,185.79	113.62	40.05	2.54	7,169.57	-389.38	783.33	697.68	85.65	9.146	
18,500.00	10,997.75	11,811.19	10,183.21	114.98	41.19	2.34	7,276.34	-393.03	783.32	696.57	86.75	9.030	
18,600.00	10,995.43	11,907.19	10,181.14	116.35	42.25	2.06	7,372.21	-397.58	783.00	695.07	87.93	8.905	
18,604.94	10,995.32	11,912.00	10,181.03	116.42	42.31	2.04	7,377.01	-397.84	783.00	695.01	87.99	8.899	
18,700.00	10,993.11	12,006.89	10,178.71	117.72	43.39	1.83	7,471.80	-401.37	783.02	693.91	89.11	8.787	
18,800.00	10,990.79	12,104.90	10,176.28	119.09	44.54	1.84	7,569.78	-401.96	783.17	692.83	90.35	8.668	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Offsets - Dolly Varden 25-24 B2GB State Com #1H - OH - OH													Offset Site Error:
Survey Program: 159-MWD, 1840-MWD													Offset Well Error:
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Rule Assigned: Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
18,900.00	10,988.47	12,203.48	10,173.67	120.46	45.73	1.95	7,668.32	-401.20	783.55	691.94	91.61	8.553	
19,000.00	10,986.15	12,303.51	10,170.99	121.83	46.97	2.09	7,768.30	-400.04	783.98	691.10	92.88	8.440	
19,100.00	10,983.82	12,400.64	10,168.06	123.21	48.19	2.28	7,865.37	-398.13	784.77	690.57	94.20	8.331	
19,200.00	10,981.50	12,512.15	10,165.87	124.59	49.62	2.51	7,976.83	-395.82	784.50	689.04	95.46	8.218	
19,262.82	10,980.04	12,570.07	10,164.79	125.45	50.37	2.65	8,034.73	-394.40	784.30	687.97	96.33	8.142	
19,300.00	10,979.18	12,606.60	10,163.97	125.97	50.85	2.74	8,071.23	-393.42	784.33	687.50	96.83	8.100	
19,400.00	10,976.86	12,709.41	10,161.72	127.35	52.20	2.95	8,174.00	-391.37	784.35	686.17	98.17	7.989	
19,500.00	10,974.54	12,814.57	10,160.14	128.73	53.61	3.15	8,279.13	-389.42	783.66	684.14	99.52	7.875	
19,600.00	10,972.21	12,915.14	10,158.96	130.11	54.97	3.36	8,379.67	-387.43	782.66	681.77	100.90	7.757	
19,700.00	10,969.89	13,017.13	10,157.85	131.50	56.37	3.60	8,481.62	-385.00	781.63	679.33	102.30	7.641	
19,800.00	10,967.57	13,116.62	10,157.00	132.89	57.75	3.77	8,581.10	-383.46	780.31	676.60	103.71	7.524	
19,900.00	10,965.25	13,212.74	10,155.81	134.27	59.09	3.93	8,677.20	-382.06	779.38	674.23	105.15	7.412	
20,000.00	10,962.93	13,310.10	10,154.18	135.66	60.47	4.12	8,774.53	-380.21	778.92	672.32	106.60	7.307	
20,100.00	10,960.61	13,409.17	10,152.33	137.05	61.88	4.33	8,873.56	-378.12	778.67	670.61	108.06	7.206	
20,200.00	10,958.28	13,511.54	10,150.50	138.45	63.35	4.56	8,975.89	-375.89	778.38	668.85	109.52	7.107	
20,300.00	10,955.96	13,616.42	10,149.11	139.84	64.86	4.75	9,080.74	-374.08	777.58	666.61	110.97	7.007	
20,400.00	10,953.64	13,714.83	10,148.06	141.24	66.29	4.91	9,179.14	-372.75	776.51	664.05	112.46	6.905	
20,500.00	10,951.32	13,824.14	10,147.31	142.63	67.89	5.09	9,288.44	-371.37	775.07	661.17	113.89	6.805	
20,600.00	10,949.00	13,915.00	10,146.36	144.03	69.23	5.23	9,379.28	-370.22	773.94	658.50	115.44	6.704	
20,621.82	10,948.49	13,929.60	10,146.06	144.33	69.44	5.25	9,393.88	-370.04	773.89	658.09	115.80	6.683	
20,700.00	10,946.68	14,000.33	10,144.26	145.43	70.49	5.40	9,464.57	-368.60	774.27	657.24	117.02	6.616	
20,800.00	10,944.35	14,108.08	10,141.45	146.83	72.09	5.65	9,572.25	-365.99	774.87	656.32	118.55	6.536	
20,900.00	10,942.03	14,208.47	10,139.30	148.23	73.59	5.75	9,672.62	-365.34	774.82	654.78	120.05	6.454	
21,000.00	10,939.71	14,309.02	10,137.04	149.63	75.11	5.78	9,773.14	-365.68	774.79	653.28	121.51	6.376	
21,100.00	10,937.39	14,421.04	10,135.63	151.03	76.79	5.89	9,885.15	-365.24	773.85	650.90	122.95	6.294	
21,200.00	10,935.07	14,527.06	10,135.83	152.44	78.40	6.08	9,991.15	-363.68	771.58	647.10	124.48	6.198	
21,300.00	10,932.74	14,622.72	10,136.13	153.84	79.85	6.31	10,086.79	-361.59	769.27	643.16	126.12	6.100	
21,400.00	10,930.42	14,714.40	10,135.68	155.25	81.24	6.59	10,178.42	-358.61	767.91	640.08	127.82	6.008	
21,500.00	10,928.10	14,808.67	10,134.35	156.65	82.68	6.95	10,272.60	-354.62	767.58	638.01	129.57	5.924	
21,600.00	10,925.78	14,911.36	10,132.81	158.06	84.25	7.39	10,375.15	-349.53	767.49	636.13	131.36	5.843	
21,681.03	10,923.90	14,989.48	10,131.68	159.20	85.44	7.56	10,453.24	-347.93	767.09	634.38	132.71	5.780	
21,700.00	10,923.46	15,005.48	10,131.31	159.47	85.69	7.58	10,469.24	-347.78	767.13	634.11	133.02	5.767	
21,800.00	10,921.14	15,097.74	10,128.15	160.88	87.11	7.63	10,561.44	-347.71	768.31	633.72	134.59	5.709	
21,900.00	10,918.81	15,209.23	10,124.49	162.29	88.84	7.59	10,672.86	-348.94	769.25	633.24	136.01	5.656	
22,000.00	10,916.49	15,314.53	10,122.57	163.70	90.47	7.47	10,778.11	-351.40	768.53	631.14	137.39	5.594	
22,061.63	10,915.06	15,370.13	10,121.41	164.57	91.34	7.37	10,833.68	-353.19	768.20	629.92	138.27	5.556	
22,100.00	10,914.17	15,402.39	10,120.41	165.11	91.84	7.30	10,865.90	-354.37	768.35	629.52	138.83	5.535	
22,200.00	10,911.85	15,504.83	10,116.54	166.52	93.44	7.06	10,968.19	-358.08	769.46	629.31	140.15	5.490	
22,300.00	10,909.53	15,599.37	10,113.64	167.93	94.92	6.94	11,062.66	-360.34	770.01	628.42	141.58	5.439	
22,400.00	10,907.21	15,700.96	10,109.79	169.35	96.51	6.85	11,164.16	-362.16	771.35	628.34	143.02	5.393	
22,500.00	10,904.88	15,837.05	10,108.53	170.76	98.64	6.90	11,300.23	-362.72	770.00	625.68	144.32	5.335	
22,600.00	10,902.56	15,937.33	10,110.24	172.17	100.22	6.96	11,400.48	-363.25	766.03	620.15	145.88	5.251	
22,700.00	10,900.24	16,026.30	10,110.79	173.59	101.61	7.02	11,489.46	-363.39	763.17	615.62	147.55	5.172	
22,800.00	10,897.92	16,124.64	10,110.93	175.01	103.16	7.08	11,587.80	-363.57	760.79	611.66	149.13	5.101	
22,900.00	10,895.60	16,213.32	10,110.07	176.42	104.56	7.16	11,676.47	-363.38	759.56	608.76	150.80	5.037	
23,000.00	10,893.28	16,313.18	10,108.53	177.84	106.14	7.27	11,776.32	-362.78	758.96	606.54	152.42	4.979	
23,100.00	10,890.95	16,411.86	10,106.79	179.26	107.70	7.32	11,874.98	-362.86	758.49	604.48	154.00	4.925	
23,200.00	10,888.63	16,512.06	10,104.90	180.68	109.28	7.36	11,975.16	-363.23	758.10	602.54	155.56	4.873	
23,300.00	10,886.31	16,614.03	10,103.12	182.10	110.90	7.37	12,077.12	-363.91	757.54	600.45	157.09	4.822	
23,400.00	10,883.99	16,714.07	10,101.54	183.52	112.49	7.35	12,177.13	-364.92	756.78	598.16	158.62	4.771	
23,476.79	10,882.21	16,785.63	10,100.25	184.61	113.63	7.36	12,248.68	-365.44	756.40	596.56	159.83	4.732	
23,500.00	10,881.67	16,803.94	10,099.77	184.94	113.92	7.37	12,266.99	-365.50	756.47	596.25	160.22	4.722	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Offsets - Dolly Varden 25-24 B2GB State Com #1H - OH - OH													Offset Site Error: 0.00 usft
Survey Program:	159-MWD, 1840-MWD												Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis	Highside	Offset Wellbore Centre	Rule Assigned:								Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
23,600.00	10,879.34	16,906.12	10,095.75	186.36	115.55	7.42	12,369.09	-365.27	758.22	596.42	161.80	4.686	
23,700.00	10,877.02	17,028.66	10,095.94	187.78	117.50	7.52	12,491.62	-365.30	755.58	592.31	163.28	4.628	
23,800.00	10,874.70	17,113.86	10,095.51	189.20	118.86	7.55	12,576.81	-365.76	753.83	588.87	164.96	4.570	
23,828.31	10,874.04	17,137.23	10,095.06	189.60	119.23	7.56	12,600.18	-365.80	753.73	588.30	165.44	4.556 CC	
23,900.00	10,872.38	17,207.95	10,093.31	190.62	120.36	7.61	12,670.87	-365.68	753.94	587.34	166.60	4.525	
24,000.00	10,870.06	17,304.51	10,091.11	192.04	121.90	7.71	12,767.41	-365.11	754.08	585.82	168.26	4.482	
24,100.00	10,867.74	17,391.35	10,088.15	193.47	123.29	7.81	12,854.19	-364.29	755.41	585.46	169.94	4.445 ES	
24,200.00	10,865.41	17,478.23	10,083.51	194.89	124.68	7.95	12,940.94	-362.66	758.74	587.10	171.64	4.421	
24,300.00	10,863.09	17,589.41	10,076.83	196.31	126.46	8.14	13,051.89	-360.40	762.86	589.46	173.40	4.399	
24,400.00	10,860.77	17,700.02	10,072.97	197.74	128.23	8.22	13,162.43	-360.00	764.11	589.09	175.02	4.366	
24,500.00	10,858.45	17,797.94	10,069.52	199.16	129.80	8.29	13,260.29	-359.65	765.46	588.80	176.66	4.333	
24,519.34	10,858.00	17,817.17	10,068.82	199.44	130.11	8.30	13,279.51	-359.59	765.75	588.77	176.98	4.327 SF	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Offsets - Getty 36 State Com #2 (P&A) - OH - OH													Offset Site Error:	
Survey Program: 250-INC-ONLY													Offset Well Error:	
Reference	Offset	Semi Major Axis		Highside		Offset Wellbore Centre		Rule Assigned:		Distance		Minimum	Separation	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Separation (usft)	Factor		
0.00	0.00	0.00	0.00	0.00	0.00	-141.31	-458.05	-366.80	587.63					
100.00	100.00	69.00	69.00	0.26	1.71	-141.31	-458.05	-366.80	586.82	584.85	1.97	298.184		
200.00	200.00	169.00	169.00	0.62	4.19	-141.31	-458.05	-366.80	586.82	582.01	4.80	122.146		
300.00	300.00	269.01	269.00	0.98	6.57	-141.31	-458.05	-366.80	586.82	579.27	7.55	77.728		
400.00	400.00	369.01	369.00	1.33	8.57	-141.31	-458.05	-366.80	586.82	576.91	9.91	59.233		
425.55	425.55	394.10	394.09	1.43	9.07	-141.29	-457.65	-366.80	586.50	576.00	10.50	55.857		
500.00	500.00	466.82	466.80	1.69	10.53	-141.30	-457.86	-366.80	586.67	574.45	12.22	48.008		
600.00	600.00	569.03	569.00	2.05	12.89	-141.31	-458.05	-366.80	586.82	571.87	14.94	39.265		
700.00	700.00	669.03	669.00	2.41	15.36	-141.31	-458.05	-366.80	586.82	569.05	17.77	33.023		
793.99	793.99	762.99	762.95	2.75	17.68	-141.26	-457.20	-366.80	586.15	565.73	20.42	28.699		
800.00	800.00	768.93	768.89	2.77	17.82	-141.26	-457.20	-366.80	586.15	565.56	20.59	28.465		
900.00	900.00	867.80	867.76	3.13	20.26	-141.27	-457.35	-366.80	586.27	562.88	23.39	25.065		
1,000.00	1,000.00	966.67	966.63	3.48	22.70	-141.29	-457.74	-366.80	586.58	560.39	26.19	22.400		
1,100.00	1,099.99	1,069.06	1,068.99	3.83	25.32	-13.87	-458.05	-366.80	585.54	556.39	29.15	20.085		
1,188.38	1,188.30	1,157.37	1,157.30	4.12	27.68	-13.96	-458.05	-366.80	582.31	550.51	31.80	18.311		
1,200.00	1,199.91	1,168.98	1,168.91	4.16	27.99	-13.98	-458.05	-366.80	581.75	549.60	32.15	18.095		
1,300.00	1,299.79	1,268.86	1,268.79	4.50	30.65	-14.09	-458.05	-366.80	576.97	541.82	35.15	16.416		
1,400.00	1,399.67	1,368.14	1,368.06	4.85	33.29	-14.16	-457.15	-366.80	571.48	533.35	38.13	14.987		
1,500.00	1,499.54	1,467.03	1,466.95	5.19	35.92	-14.29	-457.39	-366.80	566.89	525.79	41.11	13.790		
1,600.00	1,599.42	1,565.94	1,565.86	5.54	38.56	-14.45	-457.86	-366.80	562.49	518.40	44.09	12.758		
1,700.00	1,699.30	1,668.44	1,668.30	5.89	40.94	-14.59	-458.05	-366.80	557.86	511.05	46.82	11.916		
1,800.00	1,799.18	1,768.32	1,768.18	6.24	43.11	-14.72	-458.05	-366.80	553.09	503.76	49.34	11.211		
1,900.00	1,899.06	1,867.47	1,867.32	6.60	45.27	-14.79	-457.10	-366.80	547.57	495.73	51.84	10.563		
2,000.00	1,998.94	1,965.75	1,965.59	6.95	47.40	-14.94	-457.45	-366.80	543.09	488.76	54.33	9.997		
2,100.00	2,098.82	2,068.01	2,067.82	7.31	49.63	-15.12	-458.05	-366.80	538.80	481.90	56.90	9.469		
2,200.00	2,198.69	2,167.89	2,167.69	7.66	51.80	-15.25	-458.05	-366.80	534.04	474.61	59.43	8.986		
2,300.00	2,298.57	2,267.77	2,267.57	8.02	53.97	-15.39	-458.05	-366.80	529.29	467.33	61.96	8.543		
2,400.00	2,298.45	2,266.92	2,266.72	8.38	56.13	-15.49	-457.29	-366.80	523.93	459.46	64.47	8.127		
2,500.00	2,498.33	2,465.74	2,465.53	8.74	58.28	-15.65	-457.59	-366.80	519.42	452.45	66.97	7.756		
2,600.00	2,598.21	2,567.48	2,567.21	9.10	60.59	-15.83	-458.05	-366.80	515.04	445.40	69.64	7.396		
2,700.00	2,698.09	2,667.36	2,667.09	9.46	63.31	-15.98	-458.05	-366.80	510.30	437.59	72.71	7.018		
2,800.00	2,797.96	2,767.24	2,766.96	9.82	66.03	-16.14	-458.05	-366.80	505.56	429.78	75.79	6.671		
2,900.00	2,897.84	2,866.08	2,865.79	10.18	68.72	-16.20	-456.74	-366.80	499.77	420.94	78.84	6.339		
3,000.00	2,997.72	2,964.33	2,964.03	10.54	71.40	-16.39	-457.20	-366.80	495.42	413.55	81.87	6.052		
3,100.00	3,097.60	3,067.15	3,066.60	10.90	74.19	-16.61	-458.05	-366.80	491.37	406.36	85.02	5.780		
3,200.00	3,197.48	3,167.03	3,166.48	11.27	76.82	-16.78	-458.05	-366.80	486.65	398.65	88.00	5.530		
3,300.00	3,297.36	3,261.78	3,261.17	11.63	79.32	-16.88	-457.20	-366.80	481.27	390.42	90.85	5.297		
3,400.00	3,397.23	3,366.95	3,366.23	11.99	82.24	-17.12	-458.05	-366.80	477.22	383.08	94.14	5.069		
3,500.00	3,497.11	3,466.82	3,466.11	12.35	85.15	-17.30	-458.05	-366.80	472.51	375.10	97.40	4.851		
3,600.00	3,596.99	3,565.64	3,564.91	12.72	88.03	-17.38	-456.74	-366.80	466.73	366.09	100.64	4.638		
3,700.00	3,696.87	3,663.27	3,662.53	13.08	90.87	-17.60	-457.31	-366.80	462.51	358.67	103.84	4.454		
3,800.00	3,796.75	3,766.80	3,765.75	13.44	94.42	-17.85	-458.05	-366.80	458.41	350.67	107.74	4.255		
3,900.00	3,896.63	3,866.67	3,865.63	13.81	98.81	-18.04	-458.05	-366.80	453.72	341.22	112.50	4.033		
4,000.00	3,996.51	3,966.55	3,965.51	14.17	103.21	-18.23	-458.05	-366.80	449.03	331.78	117.25	3.830		
4,100.00	4,096.38	4,063.11	4,061.94	14.53	107.46	-18.22	-455.27	-366.80	442.07	320.21	121.86	3.628		
4,200.00	4,196.26	4,159.48	4,158.26	14.90	111.70	-18.52	-456.68	-366.80	438.60	312.15	126.45	3.468		
4,300.00	4,296.14	4,267.44	4,265.14	15.26	116.87	-18.84	-458.05	-366.80	435.01	303.02	131.99	3.296		
4,400.00	4,396.02	4,360.33	4,357.75	15.62	121.88	-19.00	-457.52	-366.80	429.97	292.62	137.35	3.131		
4,500.00	4,495.90	4,467.91	4,464.90	15.99	127.69	-19.27	-458.05	-366.80	425.69	282.17	143.52	2.966		
4,600.00	4,595.78	4,568.10	4,564.78	16.35	132.92	-19.49	-458.05	-366.80	421.04	271.92	149.11	2.824		
4,700.00	4,695.65	4,668.31	4,664.65	16.72	138.31	-19.72	-458.05	-366.80	416.39	261.53	154.86	2.689		
4,800.00	4,795.53	4,768.51	4,764.53	17.08	144.01	-19.95	-458.05	-366.80	411.76	250.84	160.92	2.559		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Offsets - Getty 36 State Com #2 (P&A) - OH - OH

Offset Site Error: 0.00 usft

Offset Well Error: 0.00 usft

Survey Program: 250-INC-ONLY		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Rule Assigned:		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
4,900.00	4,895.41	4,858.74	4,854.62	17.44	149.17	-20.09	-457.04	-366.80	406.39	239.99	166.40	2.442	
5,000.00	4,995.29	4,960.79	4,956.11	17.81	154.00	-20.36	-457.34	-366.80	401.98	230.38	171.60	2.343	
5,100.00	5,095.17	5,068.96	5,064.17	18.17	158.01	-20.68	-458.05	-366.80	397.88	221.90	175.98	2.261	
5,200.00	5,195.05	5,164.94	5,160.11	18.54	161.41	-20.88	-457.54	-366.80	392.86	213.12	179.74	2.186	
5,300.00	5,294.92	5,268.95	5,263.92	18.90	165.02	-21.19	-458.05	-366.80	388.67	204.97	183.70	2.116	
5,400.00	5,394.80	5,367.59	5,362.49	19.27	168.39	-21.29	-456.00	-366.80	382.33	194.89	187.44	2.040	
5,500.00	5,494.68	5,461.83	5,456.67	19.63	171.61	-21.64	-457.22	-366.80	378.85	187.85	191.00	1.983	
5,600.00	5,594.56	5,567.05	5,561.72	19.99	174.94	-21.98	-457.71	-366.80	374.63	179.92	194.71	1.924	
5,700.00	5,694.44	5,667.28	5,661.87	20.36	178.16	-22.24	-457.48	-366.80	369.87	171.57	198.29	1.865	
5,800.00	5,794.32	5,768.80	5,763.32	20.72	181.37	-22.59	-458.05	-366.80	365.80	163.94	201.86	1.812	
5,900.00	5,894.20	5,868.68	5,863.20	21.09	184.44	-22.89	-458.05	-366.80	361.25	155.96	205.29	1.760	
6,000.00	5,994.07	5,965.84	5,960.31	21.45	187.42	-23.08	-456.69	-366.80	355.54	146.91	208.63	1.704	
6,100.00	6,093.95	6,068.68	6,062.95	21.82	190.57	-23.51	-458.05	-366.80	352.19	140.05	212.14	1.660	
6,200.00	6,193.83	6,168.56	6,162.83	22.18	193.54	-23.83	-458.05	-366.80	347.67	132.19	215.48	1.613	
6,300.00	6,293.71	6,267.97	6,262.21	22.55	196.51	-24.03	-456.41	-366.80	341.72	122.92	218.80	1.562	
6,400.00	6,393.59	6,365.27	6,359.49	22.91	199.41	-24.41	-456.99	-366.80	337.75	115.69	222.06	1.521	
6,500.00	6,493.47	6,468.42	6,462.47	23.28	202.43	-24.86	-458.05	-366.80	334.19	108.75	225.44	1.482 Level 3	
6,600.00	6,593.34	6,568.30	6,562.34	23.64	205.20	-25.22	-458.05	-366.80	329.72	101.14	228.58	1.442 Level 3	
6,700.00	6,693.22	6,668.18	6,662.22	24.01	207.98	-25.59	-458.05	-366.80	325.27	93.55	231.72	1.404 Level 3	
6,800.00	6,793.10	6,766.71	6,760.70	24.37	210.72	-25.80	-456.00	-366.80	319.01	84.19	234.82	1.359 Level 3	
6,900.00	6,892.98	6,864.79	6,858.76	24.74	213.44	-26.25	-456.81	-366.80	315.31	77.41	237.90	1.325 Level 3	
7,000.00	6,992.86	6,968.06	6,961.86	25.10	216.25	-26.76	-458.05	-366.80	311.99	70.92	241.08	1.294 Level 3	
7,100.00	7,092.74	7,067.93	7,061.74	25.47	218.68	-27.17	-458.05	-366.80	307.60	63.73	243.87	1.261 Level 3	
7,200.00	7,192.61	7,167.81	7,161.61	25.83	221.11	-27.60	-458.05	-366.80	303.22	56.56	246.66	1.229 Level 3	
7,300.00	7,292.49	7,266.77	7,260.54	26.20	223.51	-27.91	-456.53	-366.80	297.48	48.05	249.43	1.193 Level 3	
7,400.00	7,392.37	7,365.32	7,359.09	26.56	225.91	-28.40	-457.13	-366.80	293.69	41.50	252.18	1.165 Level 3	
7,500.00	7,492.25	7,467.59	7,461.25	26.93	228.38	-28.95	-458.05	-366.80	290.19	35.18	255.02	1.138 Level 3	
7,600.00	7,592.13	7,567.47	7,561.13	27.29	230.68	-29.43	-458.05	-366.80	285.89	28.20	257.68	1.109 Level 3	
7,700.00	7,692.01	7,667.35	7,661.01	27.66	232.99	-29.92	-458.05	-366.80	281.60	21.25	260.35	1.082 Level 3	
7,800.00	7,791.89	7,766.50	7,760.14	28.02	235.28	-30.33	-456.78	-366.80	276.17	13.16	263.01	1.050 Level 3	
7,900.00	7,891.76	7,865.33	7,858.96	28.39	237.56	-30.89	-457.28	-366.80	272.39	6.74	265.65	1.025 Level 3	
8,000.00	7,991.64	7,967.10	7,960.64	28.76	239.90	-31.49	-458.05	-366.80	268.88	0.53	268.35	1.002 Level 3	
8,100.00	8,091.52	8,066.91	8,060.44	29.12	242.13	-32.00	-457.43	-366.80	264.11	-6.84	270.95	0.975 Level 3	
8,200.00	8,191.40	8,164.54	8,158.06	29.49	244.32	-32.60	-457.91	-366.80	260.40	-13.09	273.50	0.952 Level 3	
8,300.00	8,291.28	8,266.79	8,260.28	29.85	246.53	-33.22	-458.05	-366.80	256.38	-19.69	276.07	0.929 Level 3	
8,400.00	8,391.16	8,366.67	8,360.16	30.22	248.67	-33.83	-458.05	-366.80	252.27	-26.31	278.58	0.906 Level 3	
8,500.00	8,491.03	8,466.06	8,459.53	30.58	250.80	-34.37	-456.79	-366.80	246.99	-34.09	281.08	0.879 Level 3	
8,600.00	8,590.91	8,564.94	8,558.40	30.95	252.92	-35.05	-457.22	-366.80	243.35	-40.21	283.57	0.858 Level 3	
8,700.00	8,690.79	8,666.40	8,659.79	31.31	255.10	-35.80	-458.05	-366.80	240.12	-45.98	286.11	0.839 Level 3	
8,800.00	8,790.67	8,766.28	8,759.67	31.68	257.17	-36.50	-458.05	-366.80	236.14	-52.40	288.54	0.818 Level 3	
8,900.00	8,890.55	8,866.16	8,859.55	32.04	259.24	-37.22	-458.05	-366.80	232.20	-58.79	290.98	0.798 Level 3	
9,000.00	8,990.43	8,965.62	8,959.00	32.41	261.31	-37.90	-457.01	-366.80	227.29	-66.13	293.41	0.775 Level 3	
9,100.00	9,090.30	9,064.77	9,058.14	32.77	263.36	-38.69	-457.38	-366.80	223.77	-72.07	295.84	0.756 Level 3	
9,200.00	9,190.18	9,165.87	9,159.18	33.14	265.48	-39.54	-458.05	-366.80	220.60	-77.72	298.32	0.739 Level 3	
9,300.00	9,290.06	9,265.75	9,259.06	33.50	267.79	-40.37	-458.05	-366.80	216.82	-84.18	301.00	0.720 Level 3	
9,400.00	9,389.94	9,365.63	9,358.94	33.87	270.10	-41.23	-458.05	-366.80	213.08	-90.60	303.68	0.702 Level 3	
9,500.00	9,489.82	9,465.11	9,458.41	34.24	272.40	-42.06	-457.02	-366.80	208.38	-97.97	306.35	0.680 Level 3	
9,600.00	9,589.70	9,564.31	9,557.61	34.60	274.70	-43.00	-457.39	-366.80	205.11	-103.90	309.02	0.664 Level 3	
9,700.00	9,689.58	9,665.38	9,658.58	34.97	277.08	-43.99	-458.05	-366.80	202.19	-109.58	311.77	0.649 Level 3	
9,800.00	9,789.45	9,765.26	9,758.45	35.33	279.96	-44.98	-458.05	-366.80	198.67	-116.35	315.02	0.631 Level 3	
9,900.00	9,889.33	9,865.14	9,858.33	35.70	282.84	-46.00	-458.05	-366.80	195.21	-123.05	318.26	0.613 Level 3	
10,000.00	9,989.21	9,965.02	9,958.21	36.06	285.72	-47.06	-458.05	-366.80	191.82	-129.70	321.51	0.597 Level 3	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation

10/16/2023 3:14:59PM

Page 7

COMPASS 5000.17 Build 02



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Offsets - Getty 36 State Com #2 (P&A) - OH - OH												Offset Site Error:	0.00 usft	
Survey Program:	250-INC-ONLY		Offset		Semi Major Axis		Highside		Offset Wellbore Centre		Rule Assigned:		Offset Well Error:	0.00 usft
Reference	Measured	Vertical	Measured	Vertical	Reference	Offset	Toolface	+N/-S	+E/-W	Between	Between	Minimum	Separation	Warning
Depth	Depth	Depth	Depth	Depth	Depth	Depth	(°)	(usft)	(usft)	Centres	Ellipses	Separation	Factor	
(usft)	(usft)	(usft)	(usft)	(usft)	(usft)	(usft)		(usft)	(usft)	(usft)	(usft)	(usft)		
10,100.00	10,089.09	10,064.89	10,058.09	36.43	288.60	-48.16	-458.05	-366.80	188.49	-136.27	324.76	0.580	Level 3	
10,200.00	10,188.97	10,164.60	10,157.75	36.79	291.47	-49.24	-454.99	-366.80	182.18	-145.83	328.01	0.555	Level 3	
10,300.00	10,288.85	10,264.02	10,257.17	37.16	294.33	-50.43	-455.22	-366.80	179.23	-152.01	331.25	0.541	Level 3	
10,400.00	10,388.72	10,363.47	10,356.60	37.53	297.20	-51.66	-455.73	-366.80	176.65	-157.84	334.49	0.528	Level 3	
10,410.19	10,398.90	10,373.60	10,366.73	37.56	297.49	-51.79	-455.80	-366.80	176.40	-158.41	334.82	0.527	Level 3	
10,500.00	10,488.65	10,462.98	10,456.10	37.89	300.07	-52.64	-456.52	-366.80	175.06	-162.66	337.72	0.518	Level 3	
10,533.51	10,522.15	10,496.35	10,489.46	38.00	301.03	-52.82	-456.85	-366.80	174.95	-163.85	338.80	0.516	Level 3, CC	
10,598.56	10,587.20	10,561.13	10,554.23	38.23	302.90	179.56	-457.57	-366.80	175.34	-165.55	340.88	0.514	Level 3	
10,600.00	10,588.64	10,562.56	10,555.66	38.23	302.94	179.99	-457.58	-366.80	175.36	-165.57	340.93	0.514	Level 3, ES, SF	
10,650.00	10,638.57	10,614.75	10,607.57	38.39	304.42	179.99	-458.05	-366.80	178.12	-164.47	342.59	0.520	Level 3	
10,700.00	10,688.11	10,664.29	10,657.11	38.55	305.76	179.99	-458.05	-366.80	184.77	-159.32	344.09	0.537	Level 3	
10,750.00	10,736.88	10,713.06	10,705.88	38.70	307.09	179.99	-458.05	-366.80	195.71	-149.86	345.57	0.566	Level 3	
10,800.00	10,784.51	10,760.70	10,753.51	38.84	308.38	179.99	-458.05	-366.80	210.86	-136.15	347.01	0.608	Level 3	
10,850.00	10,830.64	10,806.83	10,799.64	38.98	309.63	179.99	-458.05	-366.80	230.10	-118.30	348.40	0.660	Level 3	
10,900.00	10,874.92	10,850.97	10,843.76	39.10	310.83	179.99	-456.20	-366.80	251.45	-98.28	349.73	0.719	Level 3	
10,950.00	10,917.01	10,892.34	10,885.12	39.22	311.95	179.99	-456.28	-366.80	278.49	-72.48	350.97	0.793	Level 3	
11,000.00	10,956.59	10,931.09	10,923.86	39.32	313.00	179.99	-456.45	-366.80	309.19	-42.93	352.12	0.878	Level 3	
11,050.00	10,993.36	10,966.92	10,959.69	39.41	313.98	179.99	-456.69	-366.80	343.29	-9.88	353.18	0.972	Level 3	
11,100.00	11,027.03	10,999.55	10,992.31	39.50	314.86	179.99	-456.98	-366.80	380.53	26.39	354.13	1.075	Level 3	
11,150.00	11,057.36	11,028.74	11,021.49	39.57	315.65	179.99	-457.29	-366.80	420.58	65.60	354.98	1.185	Level 3	
11,200.00	11,084.11	11,054.27	11,047.02	39.65	316.35	179.99	-457.61	-366.80	463.14	107.42	355.72	1.302	Level 3	
11,250.00	11,107.08	11,075.97	11,068.72	39.73	316.94	179.99	-457.92	-366.80	507.85	151.50	356.35	1.425	Level 3	
11,300.00	11,126.09	11,102.47	11,095.09	39.81	317.59	179.99	-458.05	-366.80	554.16	197.10	357.06	1.552		
11,350.00	11,141.00	11,117.38	11,110.00	39.89	317.94	179.99	-458.05	-366.80	601.87	244.44	357.43	1.684		
11,400.00	11,151.70	11,127.98	11,120.60	39.99	318.19	179.98	-457.77	-366.80	650.41	292.73	357.69	1.818		
11,450.00	11,158.10	11,133.24	11,125.86	40.08	318.31	179.97	-457.78	-366.80	699.99	342.17	357.82	1.956		
11,500.00	11,160.15	11,134.84	11,127.45	40.19	318.35	0.55	-457.78	-366.80	749.94	392.08	357.86	2.096		
11,511.87	11,160.00	11,134.69	11,127.31	40.21	318.35	0.10	-457.78	-366.80	761.80	403.94	357.86	2.129		
11,600.00	11,157.95	11,132.92	11,125.53	40.43	318.30	0.09	-457.78	-366.80	849.91	492.09	357.82	2.375		
11,700.00	11,155.63	11,130.99	11,123.60	40.73	318.26	0.08	-457.77	-366.80	949.88	592.10	357.78	2.655		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Offsets - Leonard State Comm #1 (P&A) - OH - OH													Offset Site Error: 0.00 usft
Survey Program:	120-INC-ONLY												Offset Well Error: 0.00 usft
Reference	Measured	Vertical	Offset	Vertical	Semi Major Axis	Highside	Offset Wellbore Centre	Distance	Rule Assigned:	Minimum	Separation	Warning	
Depth	Depth	Depth	Depth	Reference	Offset	Toolface	+N/-S	+E/-W	Between	Between	Separation	Factor	
(usft)	(usft)	(usft)	(usft)	(usft)	(usft)	(°)	(usft)	(usft)	Centres	Ellipses	(usft)		
									(usft)	(usft)			
23,000.00	10,893.28	10,842.01	10,839.98	177.84	267.38	-179.39	12,747.96	-466.40	959.30	645.78	313.52	3.060	
23,100.00	10,890.95	10,838.90	10,836.87	179.26	267.30	-179.32	12,747.98	-466.40	859.34	545.80	313.54	2.741	
23,200.00	10,888.63	10,835.81	10,833.78	180.68	267.23	-179.23	12,748.00	-466.40	759.39	445.82	313.57	2.422	
23,300.00	10,886.31	10,832.75	10,830.71	182.10	267.16	-179.11	12,748.02	-466.40	659.43	345.83	313.60	2.103	
23,400.00	10,883.99	10,829.70	10,827.66	183.52	267.09	-178.95	12,748.04	-466.40	559.48	245.85	313.63	1.784	
23,500.00	10,881.67	10,826.68	10,824.64	184.94	267.02	-178.72	12,748.06	-466.40	459.52	145.86	313.66	1.465 Level 3	
23,600.00	10,879.34	10,823.67	10,821.64	186.36	266.95	-178.36	12,748.08	-466.40	359.57	45.87	313.69	1.146 Level 3	
23,700.00	10,877.02	10,820.69	10,818.66	187.78	266.88	-177.72	12,748.10	-466.40	259.61	-54.11	313.72	0.828 Level 3	
23,800.00	10,874.70	10,817.73	10,815.70	189.20	266.81	-176.28	12,748.12	-466.40	159.65	-154.10	313.75	0.509 Level 3	
23,900.00	10,872.38	10,814.79	10,812.76	190.62	266.74	-170.18	12,748.14	-466.40	59.70	-254.07	313.76	0.190 Level 3	
23,959.72	10,870.99	10,813.05	10,811.01	191.47	266.70	-93.15	12,748.15	-466.40	0.31	-457.17	457.47	0.001 Level 3, CC, ES, SF	
24,000.00	10,870.06	10,811.87	10,809.84	192.04	266.67	-14.78	12,748.15	-466.40	40.26	-273.67	313.93	0.128 Level 3	
24,100.00	10,867.74	10,808.97	10,806.94	193.47	266.61	-4.30	12,748.17	-466.40	140.22	-173.68	313.90	0.447 Level 3	
24,200.00	10,865.41	10,806.09	10,804.06	194.89	266.54	-2.52	12,748.19	-466.40	240.18	-73.75	313.93	0.765 Level 3	
24,300.00	10,863.09	10,803.23	10,801.20	196.31	266.47	-1.78	12,748.20	-466.40	340.14	26.17	313.96	1.083 Level 3	
24,400.00	10,860.77	10,800.39	10,798.36	197.74	266.41	-1.38	12,748.22	-466.40	440.09	126.09	314.00	1.402 Level 3	
24,500.00	10,858.45	10,797.57	10,795.54	199.16	266.34	-1.13	12,748.23	-466.40	540.05	226.01	314.04	1.720	
24,519.34	10,858.00	10,797.03	10,794.99	199.44	266.33	-1.09	12,748.24	-466.40	559.38	245.34	314.05	1.781	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Pad - Dolly Varden 36-24 State Com #318H - OH - Plan #1													Offset Site Error:
Survey Program: 0-MWD + HDGM													Offset Well Error:
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	89.43	0.60	60.00	60.00				
100.00	100.00	100.00	100.00	0.26	0.26	89.43	0.60	60.00	60.00	59.49	0.52	116.240	
200.00	200.00	200.00	200.00	0.62	0.62	89.43	0.60	60.00	60.00	58.77	1.23	48.659	
300.00	300.00	300.00	300.00	0.98	0.98	89.43	0.60	60.00	60.00	58.05	1.95	30.769	
400.00	400.00	400.00	400.00	1.33	1.33	89.43	0.60	60.00	60.00	57.34	2.67	22.498	
500.00	500.00	500.00	500.00	1.69	1.69	89.43	0.60	60.00	60.00	56.62	3.38	17.732	
524.83	524.83	524.83	524.83	1.78	1.78	89.43	0.60	60.00	60.00	56.44	3.56	16.845	
600.00	600.00	600.00	600.00	2.05	2.05	89.43	0.60	60.00	60.00	55.90	4.10	14.632	
633.33	633.33	633.33	633.33	2.17	2.17	89.43	0.60	60.00	60.00	55.66	4.34	13.826	
700.00	700.00	700.00	700.00	2.41	2.41	89.43	0.60	60.00	60.00	55.19	4.82	12.454	
800.00	800.00	800.00	800.00	2.77	2.77	89.43	0.60	60.00	60.00	54.47	5.53	10.841	CC, ES
900.00	900.00	898.50	898.49	3.13	3.11	89.78	0.24	61.22	61.24	55.00	6.23	9.822	
1,000.00	1,000.00	996.87	996.78	3.48	3.44	90.75	-0.85	64.86	64.95	58.02	6.92	9.381	SF
1,100.00	1,099.99	1,094.91	1,094.61	3.83	3.78	-140.97	-2.64	70.91	72.17	64.57	7.60	9.500	
1,188.38	1,188.30	1,181.02	1,180.39	4.12	4.09	-140.93	-4.81	78.20	82.29	74.11	8.18	10.059	
1,200.00	1,199.91	1,192.30	1,191.61	4.16	4.13	-140.97	-5.14	79.29	83.87	75.61	8.26	10.155	
1,300.00	1,299.79	1,288.95	1,287.62	4.50	4.48	-141.02	-8.31	89.96	98.78	89.87	8.92	11.081	
1,400.00	1,399.67	1,385.86	1,383.59	4.85	4.83	-140.76	-12.13	102.82	115.94	106.36	9.58	12.102	
1,500.00	1,499.54	1,484.29	1,481.00	5.19	5.20	-140.51	-16.16	116.36	133.59	123.32	10.27	13.010	
1,600.00	1,599.42	1,582.72	1,578.41	5.54	5.58	-140.32	-20.18	129.90	151.24	140.28	10.96	13.795	
1,700.00	1,699.30	1,681.15	1,675.82	5.89	5.96	-140.17	-24.21	143.44	168.89	157.23	11.66	14.483	
1,800.00	1,799.18	1,779.58	1,773.23	6.24	6.34	-140.04	-28.23	156.98	186.54	174.18	12.36	15.089	
1,900.00	1,899.06	1,878.01	1,870.64	6.60	6.72	-139.94	-32.26	170.52	204.19	191.12	13.07	15.626	
2,000.00	1,998.94	1,976.44	1,968.05	6.95	7.11	-139.86	-36.29	184.05	221.84	208.07	13.77	16.105	
2,100.00	2,098.82	2,074.86	2,065.46	7.31	7.50	-139.78	-40.31	197.59	239.49	225.01	14.48	16.536	
2,200.00	2,198.69	2,173.29	2,162.87	7.66	7.89	-139.72	-44.34	211.13	257.15	241.95	15.19	16.924	
2,300.00	2,298.57	2,271.72	2,260.29	8.02	8.29	-139.66	-48.36	224.67	274.80	258.89	15.91	17.275	
2,400.00	2,298.45	2,270.15	2,257.70	8.38	8.68	-139.62	-52.39	238.21	292.45	275.83	16.62	17.596	
2,500.00	2,498.33	2,468.58	2,455.11	8.74	9.07	-139.57	-56.41	251.75	310.11	292.77	17.34	17.888	
2,600.00	2,598.21	2,567.01	2,552.52	9.10	9.47	-139.53	-60.44	265.29	327.76	309.71	18.05	18.156	
2,700.00	2,698.09	2,665.44	2,649.93	9.46	9.87	-139.50	-64.46	278.83	345.41	326.64	18.77	18.403	
2,800.00	2,797.96	2,763.87	2,747.34	9.82	10.26	-139.47	-68.49	292.36	363.07	343.58	19.49	18.631	
2,900.00	2,897.84	2,862.30	2,844.75	10.18	10.66	-139.44	-72.51	305.90	380.72	360.51	20.21	18.842	
3,000.00	2,997.72	2,960.73	2,942.16	10.54	11.06	-139.42	-76.54	319.44	398.37	377.45	20.92	19.038	
3,100.00	3,097.60	3,059.16	3,039.57	10.90	11.46	-139.39	-80.57	332.98	416.03	394.38	21.64	19.221	
3,200.00	3,197.48	3,157.59	3,136.98	11.27	11.86	-139.37	-84.59	346.52	433.68	411.31	22.37	19.391	
3,300.00	3,297.36	3,256.02	3,234.39	11.63	12.26	-139.35	-88.62	360.06	451.33	428.25	23.09	19.550	
3,400.00	3,397.23	3,354.45	3,331.80	11.99	12.66	-139.33	-92.64	373.60	468.99	445.18	23.81	19.699	
3,500.00	3,497.11	3,452.87	3,429.21	12.35	13.06	-139.32	-96.67	387.13	486.64	462.11	24.53	19.839	
3,600.00	3,596.99	3,551.30	3,526.62	12.72	13.46	-139.30	-100.69	400.67	504.30	479.04	25.25	19.971	
3,700.00	3,696.87	3,649.73	3,624.03	13.08	13.86	-139.28	-104.72	414.21	521.95	495.97	25.97	20.095	
3,800.00	3,796.75	3,748.16	3,721.44	13.44	14.27	-139.27	-108.74	427.75	539.60	512.91	26.70	20.212	
3,900.00	3,896.63	3,846.59	3,818.85	13.81	14.67	-139.26	-112.77	441.29	557.26	529.84	27.42	20.322	
4,000.00	3,996.51	3,945.02	3,916.27	14.17	15.07	-139.25	-116.79	454.83	574.91	546.77	28.14	20.427	
4,100.00	4,096.38	4,043.45	4,013.68	14.53	15.47	-139.23	-120.82	468.37	592.57	563.70	28.87	20.527	
4,200.00	4,196.26	4,141.88	4,111.09	14.90	15.87	-139.22	-124.85	481.91	610.22	580.63	29.59	20.621	
4,300.00	4,296.14	4,240.31	4,208.50	15.26	16.28	-139.21	-128.87	495.44	627.87	597.56	30.32	20.711	
4,400.00	4,396.02	4,338.74	4,305.91	15.62	16.68	-139.20	-132.90	508.98	645.53	614.49	31.04	20.796	
4,500.00	4,495.90	4,437.17	4,403.32	15.99	17.08	-139.19	-136.92	522.52	663.18	631.42	31.77	20.877	
4,600.00	4,595.78	4,535.60	4,500.73	16.35	17.49	-139.19	-140.95	536.06	680.84	648.35	32.49	20.955	
4,700.00	4,695.65	4,634.03	4,598.14	16.72	17.89	-139.18	-144.97	549.60	698.49	665.27	33.22	21.029	
4,800.00	4,795.53	4,732.46	4,695.55	17.08	18.29	-139.17	-149.00	563.14	716.14	682.20	33.94	21.099	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Pad - Dolly Varden 36-24 State Com #318H - OH - Plan #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD + HDGM													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis	Highside	Offset Wellbore Centre		Rule Assigned:		Distance		Minimum	Separation	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	+N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Separation (usft)	Factor	
4,900.00	4,895.41	4,830.88	4,792.96	17.44	18.70	-139.16	-153.02	576.68	733.80	699.13	34.67	21.167	
5,000.00	4,995.29	4,929.31	4,890.37	17.81	19.10	-139.16	-157.05	590.22	751.45	716.06	35.39	21.232	
5,100.00	5,095.17	5,027.74	4,987.78	18.17	19.50	-139.15	-161.07	603.75	769.11	732.99	36.12	21.294	
5,200.00	5,195.05	5,126.17	5,085.19	18.54	19.91	-139.14	-165.10	617.29	786.76	749.92	36.84	21.354	
5,300.00	5,294.92	5,224.60	5,182.60	18.90	20.31	-139.14	-169.13	630.83	804.42	766.85	37.57	21.411	
5,400.00	5,394.80	5,323.03	5,280.01	19.27	20.72	-139.13	-173.15	644.37	822.07	783.77	38.30	21.466	
5,500.00	5,494.68	5,421.46	5,377.42	19.63	21.12	-139.12	-177.18	657.91	839.72	800.70	39.02	21.519	
5,600.00	5,594.56	5,519.89	5,474.83	19.99	21.52	-139.12	-181.20	671.45	857.38	817.63	39.75	21.570	
5,700.00	5,694.44	5,618.32	5,572.24	20.36	21.93	-139.11	-185.23	684.99	875.03	834.56	40.48	21.619	
5,800.00	5,794.32	5,716.75	5,669.66	20.72	22.33	-139.11	-189.25	698.53	892.69	851.48	41.20	21.666	
5,900.00	5,894.20	5,815.18	5,767.07	21.09	22.74	-139.10	-193.28	712.06	910.34	868.41	41.93	21.711	
6,000.00	5,994.07	5,913.61	5,864.48	21.45	23.14	-139.10	-197.30	725.60	928.00	885.34	42.66	21.755	
6,100.00	6,093.95	6,012.04	5,961.89	21.82	23.55	-139.10	-201.33	739.14	945.65	902.27	43.38	21.797	
6,200.00	6,193.83	6,110.46	6,059.30	22.18	23.95	-139.09	-205.35	752.68	963.30	919.19	44.11	21.838	
6,300.00	6,293.71	6,208.89	6,156.71	22.55	24.36	-139.09	-209.38	766.22	980.96	936.12	44.84	21.878	
6,400.00	6,393.59	6,307.32	6,254.12	22.91	24.76	-139.08	-213.41	779.76	998.61	953.05	45.57	21.916	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Pad - Dolly Varden 36-24 State Com #528H - OH - Plan #1													Offset Site Error:
Survey Program: 0-MWD + HDGM													Offset Well Error:
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	89.43	0.40	40.00	40.00				
100.00	100.00	100.00	100.00	0.26	0.26	89.43	0.40	40.00	40.00	39.49	0.52	77.493	
200.00	200.00	200.00	200.00	0.62	0.62	89.43	0.40	40.00	40.00	38.77	1.23	32.439	
300.00	300.00	300.00	300.00	0.98	0.98	89.43	0.40	40.00	40.00	38.05	1.95	20.513	
400.00	400.00	400.00	400.00	1.33	1.33	89.43	0.40	40.00	40.00	37.33	2.67	14.999	
500.00	500.00	500.00	500.00	1.69	1.69	89.43	0.40	40.00	40.00	36.62	3.38	11.821	
524.09	524.09	524.09	524.09	1.78	1.78	89.43	0.40	40.00	40.00	36.45	3.56	11.247	
600.00	600.00	600.00	600.00	2.05	2.05	89.43	0.40	40.00	40.00	35.90	4.10	9.754	
633.33	633.33	633.33	633.33	2.17	2.17	89.43	0.40	40.00	40.00	35.66	4.34	9.217	
700.00	700.00	700.00	700.00	2.41	2.41	89.43	0.40	40.00	40.00	35.18	4.82	8.303	
800.00	800.00	800.00	800.00	2.77	2.77	89.43	0.40	40.00	40.00	34.47	5.53	7.227	
900.00	900.00	900.00	900.00	3.13	3.13	89.43	0.40	40.00	40.00	33.75	6.25	6.399	
1,000.00	1,000.00	1,000.00	1,000.00	3.48	3.48	89.43	0.40	40.00	40.00	33.03	6.97	5.740 CC, ES	
1,100.00	1,099.99	1,098.95	1,098.94	3.83	3.83	-143.63	0.04	41.23	42.29	34.64	7.66	5.524 SF	
1,188.38	1,188.30	1,186.15	1,186.08	4.12	4.12	-144.75	-0.87	44.35	48.13	39.89	8.24	5.839	
1,200.00	1,199.91	1,197.59	1,197.50	4.16	4.16	-144.91	-1.03	44.90	49.15	40.83	8.32	5.907	
1,300.00	1,299.79	1,295.76	1,295.46	4.50	4.50	-145.64	-2.81	50.99	59.29	50.31	8.98	6.600	
1,400.00	1,399.67	1,393.39	1,392.70	4.85	4.84	-145.46	-5.28	59.43	71.84	62.19	9.64	7.448	
1,500.00	1,499.54	1,491.56	1,490.26	5.19	5.19	-144.87	-8.34	69.91	86.38	76.06	10.32	8.371	
1,600.00	1,599.42	1,590.46	1,588.52	5.54	5.55	-144.41	-11.49	80.69	101.14	90.13	11.01	9.188	
1,700.00	1,699.30	1,689.37	1,686.78	5.89	5.91	-144.07	-14.64	91.47	115.91	104.20	11.70	9.905	
1,800.00	1,799.18	1,788.27	1,785.04	6.24	6.28	-143.80	-17.79	102.25	130.68	118.28	12.40	10.539	
1,900.00	1,899.06	1,887.17	1,883.31	6.60	6.65	-143.59	-20.93	113.03	145.45	132.35	13.10	11.103	
2,000.00	1,998.94	1,986.07	1,981.57	6.95	7.01	-143.42	-24.08	123.81	160.22	146.42	13.80	11.608	
2,100.00	2,098.82	2,084.97	2,079.83	7.31	7.39	-143.27	-27.23	134.59	174.99	160.49	14.51	12.062	
2,200.00	2,198.69	2,183.87	2,178.09	7.66	7.76	-143.15	-30.38	145.36	189.77	174.55	15.21	12.473	
2,300.00	2,298.57	2,282.78	2,276.35	8.02	8.13	-143.05	-33.53	156.14	204.55	188.62	15.92	12.846	
2,400.00	2,298.45	2,281.68	2,274.62	8.38	8.51	-142.96	-36.68	166.92	219.32	202.69	16.63	13.185	
2,500.00	2,498.33	2,480.58	2,472.88	8.74	8.89	-142.88	-39.83	177.70	234.10	216.75	17.35	13.496	
2,600.00	2,598.21	2,579.48	2,571.14	9.10	9.26	-142.81	-42.98	188.48	248.88	230.82	18.06	13.782	
2,700.00	2,698.09	2,678.38	2,669.40	9.46	9.64	-142.75	-46.12	199.26	263.65	244.88	18.77	14.045	
2,800.00	2,797.96	2,777.28	2,767.67	9.82	10.02	-142.69	-49.27	210.04	278.43	258.95	19.49	14.289	
2,900.00	2,897.84	2,876.19	2,865.93	10.18	10.40	-142.65	-52.42	220.81	293.21	273.01	20.20	14.514	
3,000.00	2,997.72	2,975.09	2,964.19	10.54	10.78	-142.60	-55.57	231.59	307.99	287.07	20.92	14.724	
3,100.00	3,097.60	3,073.99	3,062.45	10.90	11.16	-142.56	-58.72	242.37	322.77	301.13	21.63	14.919	
3,200.00	3,197.48	3,172.89	3,160.71	11.27	11.55	-142.52	-61.87	253.15	337.55	315.19	22.35	15.101	
3,300.00	3,297.36	3,271.79	3,258.98	11.63	11.93	-142.49	-65.02	263.93	352.33	329.26	23.07	15.272	
3,400.00	3,397.23	3,370.69	3,357.24	11.99	12.31	-142.46	-68.17	274.71	367.10	343.32	23.79	15.432	
3,500.00	3,497.11	3,469.60	3,455.50	12.35	12.69	-142.43	-71.31	285.49	381.88	357.38	24.51	15.583	
3,600.00	3,596.99	3,568.50	3,553.76	12.72	13.08	-142.40	-74.46	296.26	396.66	371.44	25.23	15.724	
3,700.00	3,696.87	3,667.40	3,652.02	13.08	13.46	-142.38	-77.61	307.04	411.44	385.50	25.95	15.858	
3,800.00	3,796.75	3,766.30	3,750.29	13.44	13.84	-142.36	-80.76	317.82	426.22	399.55	26.67	15.984	
3,900.00	3,896.63	3,865.20	3,848.55	13.81	14.23	-142.33	-83.91	328.60	441.00	413.61	27.39	16.103	
4,000.00	3,996.51	3,964.10	3,946.81	14.17	14.61	-142.31	-87.06	339.38	455.78	427.67	28.11	16.216	
4,100.00	4,096.38	4,063.01	4,045.07	14.53	14.99	-142.29	-90.21	350.16	470.56	441.73	28.83	16.323	
4,200.00	4,196.26	4,161.91	4,143.34	14.90	15.38	-142.28	-93.36	360.94	485.34	455.79	29.55	16.425	
4,300.00	4,296.14	4,260.81	4,241.60	15.26	15.76	-142.26	-96.50	371.71	500.12	469.85	30.27	16.522	
4,400.00	4,396.02	4,359.71	4,339.86	15.62	16.15	-142.24	-99.65	382.49	514.90	483.91	30.99	16.614	
4,500.00	4,495.90	4,458.61	4,438.12	15.99	16.53	-142.23	-102.80	393.27	529.68	497.96	31.71	16.702	
4,600.00	4,595.78	4,557.51	4,536.38	16.35	16.92	-142.22	-105.95	404.05	544.46	512.02	32.44	16.786	
4,700.00	4,695.65	4,656.42	4,634.65	16.72	17.30	-142.20	-109.10	414.83	559.24	526.08	33.16	16.866	
4,800.00	4,795.53	4,755.32	4,732.91	17.08	17.69	-142.19	-112.25	425.61	574.02	540.14	33.88	16.943	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Pad - Dolly Varden 36-24 State Com #528H - OH - Plan #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD + HDGM													Offset Well Error: 0.00 usft
Reference	Offset	Semi Major Axis	Highside	Offset Wellbore Centre		Rule Assigned:		Distance		Minimum	Separation	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Toolface (°)	+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Separation (usft)	Factor	
4,900.00	4,895.41	4,854.22	4,831.17	17.44	18.08	-142.18	-115.40	436.39	588.80	554.19	34.60	17.016	
5,000.00	4,995.29	4,953.12	4,929.43	17.81	18.46	-142.17	-118.55	447.16	603.58	568.25	35.33	17.086	
5,100.00	5,095.17	5,052.02	5,027.69	18.17	18.85	-142.16	-121.69	457.94	618.36	582.31	36.05	17.154	
5,200.00	5,195.05	5,150.93	5,125.96	18.54	19.23	-142.15	-124.84	468.72	633.14	596.36	36.77	17.218	
5,300.00	5,294.92	5,249.83	5,224.22	18.90	19.62	-142.14	-127.99	479.50	647.92	610.42	37.49	17.280	
5,400.00	5,394.80	5,348.73	5,322.48	19.27	20.00	-142.13	-131.14	490.28	662.70	624.48	38.22	17.340	
5,500.00	5,494.68	5,447.63	5,420.74	19.63	20.39	-142.12	-134.29	501.06	677.48	638.53	38.94	17.397	
5,600.00	5,594.56	5,546.53	5,519.01	19.99	20.78	-142.11	-137.44	511.84	692.25	652.59	39.66	17.453	
5,700.00	5,694.44	5,645.43	5,617.27	20.36	21.16	-142.10	-140.59	522.61	707.03	666.65	40.39	17.506	
5,800.00	5,794.32	5,744.34	5,715.53	20.72	21.55	-142.09	-143.74	533.39	721.81	680.70	41.11	17.557	
5,900.00	5,894.20	5,843.24	5,813.79	21.09	21.94	-142.09	-146.88	544.17	736.59	694.76	41.84	17.607	
6,000.00	5,994.07	5,942.14	5,912.05	21.45	22.32	-142.08	-150.03	554.95	751.37	708.81	42.56	17.655	
6,100.00	6,093.95	6,041.04	6,010.32	21.82	22.71	-142.07	-153.18	565.73	766.15	722.87	43.28	17.701	
6,200.00	6,193.83	6,139.94	6,108.58	22.18	23.10	-142.06	-156.33	576.51	780.93	736.93	44.01	17.745	
6,300.00	6,293.71	6,238.84	6,206.84	22.55	23.48	-142.06	-159.48	587.29	795.71	750.98	44.73	17.788	
6,400.00	6,393.59	6,337.75	6,305.10	22.91	23.87	-142.05	-162.63	598.06	810.49	765.04	45.46	17.830	
6,500.00	6,493.47	6,436.65	6,403.37	23.28	24.26	-142.05	-165.78	608.84	825.27	779.09	46.18	17.870	
6,600.00	6,593.34	6,535.55	6,501.63	23.64	24.64	-142.04	-168.93	619.62	840.05	793.15	46.91	17.909	
6,700.00	6,693.22	6,634.45	6,599.89	24.01	25.03	-142.03	-172.07	630.40	854.83	807.20	47.63	17.947	
6,800.00	6,793.10	6,733.35	6,698.15	24.37	25.42	-142.03	-175.22	641.18	869.61	821.26	48.36	17.984	
6,900.00	6,892.98	6,832.25	6,796.41	24.74	25.80	-142.02	-178.37	651.96	884.39	835.31	49.08	18.020	
7,000.00	6,992.86	6,931.16	6,894.68	25.10	26.19	-142.02	-181.52	662.74	899.17	849.37	49.80	18.054	
7,100.00	7,092.74	7,030.06	6,992.94	25.47	26.58	-142.01	-184.67	673.51	913.95	863.42	50.53	18.088	
7,200.00	7,192.61	7,128.96	7,091.20	25.83	26.96	-142.01	-187.82	684.29	928.73	877.48	51.25	18.120	
7,300.00	7,292.49	7,227.86	7,189.46	26.20	27.35	-142.00	-190.97	695.07	943.51	891.53	51.98	18.152	
7,400.00	7,392.37	7,326.76	7,287.72	26.56	27.74	-142.00	-194.12	705.85	958.29	905.59	52.70	18.182	
7,500.00	7,492.25	7,425.66	7,385.99	26.93	28.13	-142.00	-197.26	716.63	973.07	919.64	53.43	18.212	
7,600.00	7,592.13	7,524.57	7,484.25	27.29	28.51	-141.99	-200.41	727.41	987.85	933.70	54.16	18.241	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Pad - Dolly Varden 36-24 State Com #623H - OH - Plan #2													Offset Site Error:
Survey Program: 0-MWD + HDGM													Offset Well Error:
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Rule Assigned: Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	-90.57	-0.20	-20.00	20.00				
100.00	100.00	100.00	100.00	0.26	0.26	-90.57	-0.20	-20.00	20.00	19.48	0.52	38.747	
200.00	200.00	200.00	200.00	0.62	0.62	-90.57	-0.20	-20.00	20.00	18.77	1.23	16.220	
300.00	300.00	300.00	300.00	0.98	0.98	-90.57	-0.20	-20.00	20.00	18.05	1.95	10.256	
400.00	400.00	400.00	400.00	1.33	1.33	-90.57	-0.20	-20.00	20.00	17.33	2.67	7.499	
500.00	500.00	500.00	500.00	1.69	1.69	-90.57	-0.20	-20.00	20.00	16.62	3.38	5.911	
524.37	524.37	524.37	524.37	1.78	1.78	-90.57	-0.20	-20.00	20.00	16.44	3.56	5.620	
600.00	600.00	600.00	600.00	2.05	2.05	-90.57	-0.20	-20.00	20.00	15.90	4.10	4.877	
633.33	633.33	633.33	633.33	2.17	2.17	-90.57	-0.20	-20.00	20.00	15.66	4.34	4.609	
700.00	700.00	700.00	700.00	2.41	2.41	-90.57	-0.20	-20.00	20.00	15.18	4.82	4.151	
800.00	800.00	800.00	800.00	2.77	2.77	-90.57	-0.20	-20.00	20.00	14.47	5.53	3.614 CC, ES	
900.00	900.00	899.46	899.45	3.13	3.11	-91.14	-0.42	-21.28	21.29	15.05	6.24	3.412 SF	
1,000.00	1,000.00	998.79	998.70	3.48	3.45	-92.50	-1.10	-25.09	25.15	18.22	6.93	3.628	
1,100.00	1,099.99	1,097.93	1,097.63	3.83	3.80	34.75	-2.21	-31.44	30.52	22.92	7.61	4.012	
1,188.38	1,188.30	1,185.41	1,184.75	4.12	4.11	36.15	-3.56	-39.13	35.63	27.44	8.19	4.349	
1,200.00	1,199.91	1,196.90	1,196.19	4.16	4.15	36.40	-3.77	-40.29	36.35	28.08	8.27	4.395	
1,300.00	1,299.79	1,295.59	1,294.20	4.50	4.51	37.83	-5.76	-51.62	43.93	34.99	8.94	4.916	
1,400.00	1,399.67	1,393.84	1,391.45	4.85	4.87	38.31	-8.18	-65.37	54.05	44.44	9.60	5.629	
1,500.00	1,499.54	1,491.53	1,487.75	5.19	5.25	38.21	-11.01	-81.48	66.67	56.41	10.26	6.497	
1,600.00	1,599.42	1,590.25	1,584.80	5.54	5.63	37.93	-14.15	-99.34	80.89	69.93	10.96	7.383	
1,700.00	1,699.30	1,689.23	1,682.09	5.89	6.03	37.73	-17.30	-117.26	95.13	83.47	11.66	8.158	
1,800.00	1,799.18	1,788.21	1,779.38	6.24	6.43	37.58	-20.45	-135.19	109.38	97.01	12.37	8.843	
1,900.00	1,899.06	1,887.19	1,876.67	6.60	6.84	37.46	-23.60	-153.12	123.63	110.55	13.08	9.451	
2,000.00	1,998.94	1,986.17	1,973.96	6.95	7.26	37.37	-26.75	-171.04	137.88	124.09	13.80	9.994	
2,100.00	2,098.82	2,085.15	2,071.26	7.31	7.67	37.30	-29.90	-188.97	152.14	137.62	14.52	10.481	
2,200.00	2,198.69	2,184.12	2,168.55	7.66	8.09	37.23	-33.05	-206.90	166.39	151.15	15.23	10.921	
2,300.00	2,298.57	2,283.10	2,265.84	8.02	8.51	37.18	-36.20	-224.82	180.64	164.68	15.96	11.321	
2,400.00	2,298.45	2,382.08	2,363.13	8.38	8.93	37.14	-39.36	-242.75	194.89	178.21	16.68	11.684	
2,500.00	2,498.33	2,481.06	2,460.42	8.74	9.36	37.10	-42.51	-260.68	209.14	191.74	17.40	12.016	
2,600.00	2,598.21	2,580.04	2,557.71	9.10	9.78	37.07	-45.66	-278.60	223.39	205.26	18.13	12.321	
2,700.00	2,698.09	2,679.02	2,655.00	9.46	10.21	37.04	-48.81	-296.53	237.64	218.79	18.86	12.602	
2,800.00	2,797.96	2,778.00	2,752.29	9.82	10.64	37.01	-51.96	-314.46	251.89	232.31	19.59	12.861	
2,900.00	2,897.84	2,876.98	2,849.59	10.18	11.07	36.99	-55.11	-332.38	266.15	245.83	20.31	13.101	
3,000.00	2,997.72	2,975.96	2,946.88	10.54	11.50	36.97	-58.26	-350.31	280.40	259.35	21.04	13.324	
3,100.00	3,097.60	3,074.94	3,044.17	10.90	11.93	36.95	-61.41	-368.24	294.65	272.88	21.77	13.532	
3,200.00	3,197.48	3,173.92	3,141.46	11.27	12.37	36.93	-64.56	-386.16	308.90	286.40	22.51	13.726	
3,300.00	3,297.36	3,272.90	3,238.75	11.63	12.80	36.92	-67.72	-404.09	323.15	299.92	23.24	13.907	
3,400.00	3,397.23	3,371.87	3,336.04	11.99	13.23	36.90	-70.87	-422.02	337.40	313.44	23.97	14.077	
3,500.00	3,497.11	3,470.85	3,433.33	12.35	13.67	36.89	-74.02	-439.94	351.66	326.95	24.70	14.236	
3,600.00	3,596.99	3,569.83	3,530.62	12.72	14.10	36.88	-77.17	-457.87	365.91	340.47	25.43	14.386	
3,700.00	3,696.87	3,668.81	3,627.92	13.08	14.54	36.86	-80.32	-475.79	380.16	353.99	26.17	14.528	
3,800.00	3,796.75	3,767.79	3,725.21	13.44	14.97	36.85	-83.47	-493.72	394.41	367.51	26.90	14.661	
3,900.00	3,896.63	3,866.77	3,822.50	13.81	15.41	36.84	-86.62	-511.65	408.66	381.03	27.64	14.787	
4,000.00	3,996.51	3,965.75	3,919.79	14.17	15.85	36.84	-89.77	-529.57	422.92	394.54	28.37	14.907	
4,100.00	4,096.38	4,064.73	4,017.08	14.53	16.28	36.83	-92.92	-547.50	437.17	408.06	29.11	15.020	
4,200.00	4,196.26	4,163.71	4,114.37	14.90	16.72	36.82	-96.08	-565.43	451.42	421.58	29.84	15.128	
4,300.00	4,296.14	4,262.69	4,211.66	15.26	17.16	36.81	-99.23	-583.35	465.67	435.10	30.58	15.230	
4,400.00	4,396.02	4,361.67	4,308.95	15.62	17.59	36.81	-102.38	-601.28	479.92	448.61	31.31	15.328	
4,500.00	4,495.90	4,460.65	4,406.25	15.99	18.03	36.80	-105.53	-619.21	494.17	462.13	32.05	15.420	
4,600.00	4,595.78	4,559.63	4,503.54	16.35	18.47	36.79	-108.68	-637.13	508.43	475.64	32.78	15.509	
4,700.00	4,695.65	4,658.60	4,600.83	16.72	18.91	36.79	-111.83	-655.06	522.68	489.16	33.52	15.594	
4,800.00	4,795.53	4,757.58	4,698.12	17.08	19.35	36.78	-114.98	-672.99	536.93	502.67	34.26	15.674	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Pad - Dolly Varden 36-24 State Com #623H - OH - Plan #2												Offset Site Error:	0.00 usft
Survey Program: 0-MWD + HDGM												Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Rule Assigned: Distance		Minimum Separation (usft)	Separation Factor	Warning
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
4,900.00	4,895.41	4,856.56	4,795.41	17.44	19.79	36.78	-118.13	-690.91	551.18	516.19	34.99	15.752	
5,000.00	4,995.29	4,955.54	4,892.70	17.81	20.23	36.77	-121.29	-708.84	565.43	529.71	35.73	15.826	
5,100.00	5,095.17	5,054.52	4,989.99	18.17	20.66	36.77	-124.44	-726.77	579.69	543.22	36.47	15.897	
5,200.00	5,195.05	5,153.50	5,087.28	18.54	21.10	36.76	-127.59	-744.69	593.94	556.74	37.20	15.965	
5,300.00	5,294.92	5,252.48	5,184.58	18.90	21.54	36.76	-130.74	-762.62	608.19	570.25	37.94	16.030	
5,400.00	5,394.80	5,351.46	5,281.87	19.27	21.98	36.75	-133.89	-780.55	622.44	583.76	38.68	16.093	
5,500.00	5,494.68	5,450.44	5,379.16	19.63	22.42	36.75	-137.04	-798.47	636.69	597.28	39.41	16.154	
5,600.00	5,594.56	5,549.42	5,476.45	19.99	22.86	36.75	-140.19	-816.40	650.95	610.79	40.15	16.212	
5,700.00	5,694.44	5,648.40	5,573.74	20.36	23.30	36.74	-143.34	-834.33	665.20	624.31	40.89	16.268	
5,800.00	5,794.32	5,747.38	5,671.03	20.72	23.74	36.74	-146.49	-852.25	679.45	637.82	41.63	16.322	
5,900.00	5,894.20	5,846.35	5,768.32	21.09	24.18	36.73	-149.65	-870.18	693.70	651.34	42.37	16.374	
6,000.00	5,994.07	5,945.33	5,865.61	21.45	24.62	36.73	-152.80	-888.11	707.95	664.85	43.10	16.425	
6,100.00	6,093.95	6,044.31	5,962.91	21.82	25.06	36.73	-155.95	-906.03	722.20	678.36	43.84	16.473	
6,200.00	6,193.83	6,143.29	6,060.20	22.18	25.50	36.73	-159.10	-923.96	736.46	691.88	44.58	16.520	
6,300.00	6,293.71	6,242.27	6,157.49	22.55	25.94	36.72	-162.25	-941.89	750.71	705.39	45.32	16.565	
6,400.00	6,393.59	6,341.25	6,254.78	22.91	26.38	36.72	-165.40	-959.81	764.96	718.90	46.06	16.609	
6,500.00	6,493.47	6,440.23	6,352.07	23.28	26.82	36.72	-168.55	-977.74	779.21	732.42	46.80	16.652	
6,600.00	6,593.34	6,539.21	6,449.36	23.64	27.26	36.72	-171.70	-995.67	793.46	745.93	47.53	16.693	
6,700.00	6,693.22	6,638.19	6,546.65	24.01	27.70	36.71	-174.86	-1,013.59	807.72	759.44	48.27	16.732	
6,800.00	6,793.10	6,737.17	6,643.94	24.37	28.14	36.71	-178.01	-1,031.52	821.97	772.96	49.01	16.771	
6,900.00	6,892.98	6,836.15	6,741.24	24.74	28.58	36.71	-181.16	-1,049.45	836.22	786.47	49.75	16.808	
7,000.00	6,992.86	6,935.13	6,838.53	25.10	29.03	36.71	-184.31	-1,067.37	850.47	799.98	50.49	16.845	
7,100.00	7,092.74	7,034.11	6,935.82	25.47	29.47	36.70	-187.46	-1,085.30	864.72	813.50	51.23	16.880	
7,200.00	7,192.61	7,133.08	7,033.11	25.83	29.91	36.70	-190.61	-1,103.23	878.98	827.01	51.97	16.914	
7,300.00	7,292.49	7,232.06	7,130.40	26.20	30.35	36.70	-193.76	-1,121.15	893.23	840.52	52.71	16.947	
7,400.00	7,392.37	7,331.04	7,227.69	26.56	30.79	36.70	-196.91	-1,139.08	907.48	854.03	53.45	16.980	
7,500.00	7,492.25	7,430.02	7,324.98	26.93	31.23	36.70	-200.06	-1,157.01	921.73	867.55	54.18	17.011	
7,600.00	7,592.13	7,529.00	7,422.27	27.29	31.67	36.69	-203.22	-1,174.93	935.98	881.06	54.92	17.041	
7,700.00	7,692.01	7,627.98	7,519.57	27.66	32.11	36.69	-206.37	-1,192.86	950.24	894.57	55.66	17.071	
7,800.00	7,791.89	7,726.96	7,616.86	28.02	32.55	36.69	-209.52	-1,210.79	964.49	908.08	56.40	17.100	
7,900.00	7,891.76	7,825.94	7,714.15	28.39	32.99	36.69	-212.67	-1,228.71	978.74	921.60	57.14	17.128	
8,000.00	7,991.64	7,924.92	7,811.44	28.76	33.44	36.69	-215.82	-1,246.64	992.99	935.11	57.88	17.155	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Pad - Dolly Varden 36-24 State Com #628H - OH - Plan #1													Offset Site Error:
Survey Program: 0-MWD + HDGM													Offset Well Error:
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Rule Assigned: Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	89.43	0.20	20.00	20.00				
100.00	100.00	100.00	100.00	0.26	0.26	89.43	0.20	20.00	20.00	19.48	0.52	38.747	
200.00	200.00	200.00	200.00	0.62	0.62	89.43	0.20	20.00	20.00	18.77	1.23	16.220	
300.00	300.00	300.00	300.00	0.98	0.98	89.43	0.20	20.00	20.00	18.05	1.95	10.256	
400.00	400.00	400.00	400.00	1.33	1.33	89.43	0.20	20.00	20.00	17.33	2.67	7.499	
500.00	500.00	500.00	500.00	1.69	1.69	89.43	0.20	20.00	20.00	16.62	3.38	5.911	
524.37	524.37	524.37	524.37	1.78	1.78	89.43	0.20	20.00	20.00	16.44	3.56	5.620	
600.00	600.00	600.00	600.00	2.05	2.05	89.43	0.20	20.00	20.00	15.90	4.10	4.877	
633.33	633.33	633.33	633.33	2.17	2.17	89.43	0.20	20.00	20.00	15.66	4.34	4.609	
700.00	700.00	700.00	700.00	2.41	2.41	89.43	0.20	20.00	20.00	15.18	4.82	4.151	
800.00	800.00	800.00	800.00	2.77	2.77	89.43	0.20	20.00	20.00	14.47	5.53	3.614	
900.00	900.00	900.00	900.00	3.13	3.13	89.43	0.20	20.00	20.00	13.75	6.25	3.199	
1,000.00	1,000.00	1,000.00	1,000.00	3.48	3.48	89.43	0.20	20.00	20.00	13.03	6.97	2.870 CC, ES	
1,100.00	1,099.99	1,099.99	1,099.99	3.83	3.84	-145.23	0.20	20.00	21.06	13.39	7.67	2.746 SF	
1,188.38	1,188.30	1,188.30	1,188.30	4.12	4.16	-149.77	0.20	20.00	23.88	15.60	8.28	2.883	
1,200.00	1,199.91	1,199.91	1,199.91	4.16	4.20	-150.45	0.20	20.00	24.38	16.01	8.36	2.914	
1,300.00	1,299.79	1,299.12	1,299.11	4.50	4.55	-154.01	-0.20	21.22	29.89	20.84	9.04	3.305	
1,400.00	1,399.67	1,398.06	1,397.97	4.85	4.88	-154.38	-1.39	24.88	37.70	27.99	9.71	3.881	
1,500.00	1,499.54	1,496.59	1,496.29	5.19	5.22	-153.07	-3.35	30.95	47.76	37.38	10.38	4.601	
1,600.00	1,599.42	1,594.94	1,594.24	5.54	5.56	-151.13	-6.07	39.32	60.03	48.98	11.05	5.432	
1,700.00	1,699.30	1,694.08	1,692.92	5.89	5.91	-149.59	-9.03	48.42	72.98	61.24	11.74	6.217	
1,800.00	1,799.18	1,793.22	1,791.60	6.24	6.26	-148.52	-11.98	57.53	85.97	73.54	12.43	6.916	
1,900.00	1,899.06	1,892.36	1,890.28	6.60	6.62	-147.73	-14.94	66.63	98.98	85.85	13.13	7.540	
2,000.00	1,998.94	1,991.51	1,988.96	6.95	6.98	-147.13	-17.89	75.73	112.00	98.18	13.83	8.101	
2,100.00	2,098.82	2,090.65	2,087.64	7.31	7.34	-146.64	-20.85	84.83	125.04	110.51	14.53	8.607	
2,200.00	2,198.69	2,189.79	2,186.32	7.66	7.70	-146.26	-23.80	93.94	138.08	122.85	15.23	9.066	
2,300.00	2,298.57	2,288.93	2,285.00	8.02	8.07	-145.93	-26.76	103.04	151.12	135.19	15.94	9.483	
2,400.00	2,298.45	2,288.08	2,283.68	8.38	8.43	-145.66	-29.71	112.14	164.17	147.53	16.64	9.864	
2,500.00	2,498.33	2,487.22	2,482.36	8.74	8.80	-145.43	-32.67	121.25	177.22	159.87	17.35	10.214	
2,600.00	2,598.21	2,586.36	2,581.03	9.10	9.17	-145.23	-35.62	130.35	190.28	172.22	18.06	10.535	
2,700.00	2,698.09	2,685.50	2,679.71	9.46	9.54	-145.06	-38.58	139.45	203.34	184.56	18.77	10.832	
2,800.00	2,797.96	2,784.64	2,778.39	9.82	9.91	-144.90	-41.54	148.55	216.39	196.91	19.48	11.106	
2,900.00	2,897.84	2,883.79	2,877.07	10.18	10.28	-144.77	-44.49	157.66	229.45	209.26	20.20	11.361	
3,000.00	2,997.72	2,982.93	2,975.75	10.54	10.65	-144.65	-47.45	166.76	242.51	221.60	20.91	11.597	
3,100.00	3,097.60	3,082.07	3,074.43	10.90	11.02	-144.54	-50.40	175.86	255.58	233.95	21.63	11.818	
3,200.00	3,197.48	3,181.21	3,173.11	11.27	11.39	-144.44	-53.36	184.97	268.64	246.30	22.34	12.025	
3,300.00	3,297.36	3,280.35	3,271.79	11.63	11.76	-144.35	-56.31	194.07	281.70	258.65	23.06	12.218	
3,400.00	3,397.23	3,379.50	3,370.47	11.99	12.14	-144.27	-59.27	203.17	294.77	270.99	23.77	12.399	
3,500.00	3,497.11	3,478.64	3,469.15	12.35	12.51	-144.20	-62.22	212.27	307.83	283.34	24.49	12.570	
3,600.00	3,596.99	3,577.78	3,567.83	12.72	12.88	-144.13	-65.18	221.38	320.90	295.69	25.21	12.730	
3,700.00	3,696.87	3,676.92	3,666.50	13.08	13.26	-144.07	-68.13	230.48	333.96	308.04	25.92	12.882	
3,800.00	3,796.75	3,776.07	3,765.18	13.44	13.63	-144.01	-71.09	239.58	347.03	320.38	26.64	13.025	
3,900.00	3,896.63	3,875.21	3,863.86	13.81	14.01	-143.96	-74.04	248.69	360.09	332.73	27.36	13.161	
4,000.00	3,996.51	3,974.35	3,962.54	14.17	14.38	-143.91	-77.00	257.79	373.16	345.08	28.08	13.289	
4,100.00	4,096.38	4,073.49	4,061.22	14.53	14.76	-143.86	-79.95	266.89	386.23	357.43	28.80	13.411	
4,200.00	4,196.26	4,172.63	4,159.90	14.90	15.13	-143.82	-82.91	275.99	399.29	369.78	29.52	13.527	
4,300.00	4,296.14	4,271.78	4,258.58	15.26	15.51	-143.77	-85.86	285.10	412.36	382.12	30.24	13.637	
4,400.00	4,396.02	4,370.92	4,357.26	15.62	15.89	-143.74	-88.82	294.20	425.43	394.47	30.96	13.742	
4,500.00	4,495.90	4,470.06	4,455.94	15.99	16.26	-143.70	-91.77	303.30	438.50	406.82	31.68	13.842	
4,600.00	4,595.78	4,569.20	4,554.62	16.35	16.64	-143.67	-94.73	312.41	451.56	419.16	32.40	13.938	
4,700.00	4,695.65	4,668.34	4,653.30	16.72	17.02	-143.63	-97.68	321.51	464.63	431.51	33.12	14.029	
4,800.00	4,795.53	4,767.49	4,751.98	17.08	17.39	-143.60	-100.64	330.61	477.70	443.86	33.84	14.116	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Dolly Varden 36-24 Pad - Dolly Varden 36-24 State Com #628H - OH - Plan #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD + HDGM												Offset Well Error:	0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre		Rule Assigned: Distance		Minimum Separation (usft)	Separation Factor	Warning
							+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
4,900.00	4,895.41	4,866.63	4,850.65	17.44	17.77	-143.58	-103.59	339.71	490.77	456.21	34.56	14.200	
5,000.00	4,995.29	4,965.77	4,949.33	17.81	18.15	-143.55	-106.55	348.82	503.84	468.55	35.28	14.280	
5,100.00	5,095.17	5,064.91	5,048.01	18.17	18.52	-143.52	-109.50	357.92	516.90	480.90	36.00	14.357	
5,200.00	5,195.05	5,164.06	5,146.69	18.54	18.90	-143.50	-112.46	367.02	529.97	493.25	36.73	14.431	
5,300.00	5,294.92	5,263.20	5,245.37	18.90	19.28	-143.47	-115.42	376.13	543.04	505.59	37.45	14.502	
5,400.00	5,394.80	5,362.34	5,344.05	19.27	19.66	-143.45	-118.37	385.23	556.11	517.94	38.17	14.570	
5,500.00	5,494.68	5,461.48	5,442.73	19.63	20.03	-143.43	-121.33	394.33	569.18	530.29	38.89	14.635	
5,600.00	5,594.56	5,560.62	5,541.41	19.99	20.41	-143.41	-124.28	403.43	582.25	542.63	39.61	14.698	
5,700.00	5,694.44	5,659.77	5,640.09	20.36	20.79	-143.39	-127.24	412.54	595.32	554.98	40.34	14.759	
5,800.00	5,794.32	5,758.91	5,738.77	20.72	21.17	-143.37	-130.19	421.64	608.38	567.33	41.06	14.818	
5,900.00	5,894.20	5,858.05	5,837.45	21.09	21.54	-143.35	-133.15	430.74	621.45	579.67	41.78	14.874	
6,000.00	5,994.07	5,957.19	5,936.13	21.45	21.92	-143.34	-136.10	439.85	634.52	592.02	42.50	14.929	
6,100.00	6,093.95	6,056.33	6,034.80	21.82	22.30	-143.32	-139.06	448.95	647.59	604.37	43.23	14.982	
6,200.00	6,193.83	6,155.48	6,133.48	22.18	22.68	-143.31	-142.01	458.05	660.66	616.71	43.95	15.033	
6,300.00	6,293.71	6,254.62	6,232.16	22.55	23.06	-143.29	-144.97	467.15	673.73	629.06	44.67	15.082	
6,400.00	6,393.59	6,353.76	6,330.84	22.91	23.44	-143.28	-147.92	476.26	686.80	641.41	45.39	15.130	
6,500.00	6,493.47	6,452.90	6,429.52	23.28	23.81	-143.26	-150.88	485.36	699.87	653.75	46.12	15.176	
6,600.00	6,593.34	6,552.05	6,528.20	23.64	24.19	-143.25	-153.83	494.46	712.94	666.10	46.84	15.221	
6,700.00	6,693.22	6,651.19	6,626.88	24.01	24.57	-143.24	-156.79	503.57	726.01	678.44	47.56	15.264	
6,800.00	6,793.10	6,750.33	6,725.56	24.37	24.95	-143.22	-159.74	512.67	739.08	690.79	48.29	15.306	
6,900.00	6,892.98	6,849.47	6,824.24	24.74	25.33	-143.21	-162.70	521.77	752.15	703.14	49.01	15.347	
7,000.00	6,992.86	6,948.61	6,922.92	25.10	25.71	-143.20	-165.65	530.87	765.22	715.48	49.73	15.386	
7,100.00	7,092.74	7,047.76	7,021.60	25.47	26.08	-143.19	-168.61	539.98	778.28	727.83	50.46	15.425	
7,200.00	7,192.61	7,146.90	7,120.27	25.83	26.46	-143.18	-171.56	549.08	791.35	740.17	51.18	15.462	
7,300.00	7,292.49	7,246.04	7,218.95	26.20	26.84	-143.17	-174.52	558.18	804.42	752.52	51.90	15.498	
7,400.00	7,392.37	7,345.18	7,317.63	26.56	27.22	-143.16	-177.47	567.28	817.49	764.87	52.63	15.533	
7,500.00	7,492.25	7,444.33	7,416.31	26.93	27.60	-143.15	-180.43	576.39	830.56	777.21	53.35	15.568	
7,600.00	7,592.13	7,543.47	7,514.99	27.29	27.98	-143.14	-183.39	585.49	843.63	789.56	54.08	15.601	
7,700.00	7,692.01	7,642.61	7,613.67	27.66	28.36	-143.13	-186.34	594.59	856.70	801.90	54.80	15.633	
7,800.00	7,791.89	7,741.75	7,712.35	28.02	28.74	-143.12	-189.30	603.70	869.77	814.25	55.52	15.665	
7,900.00	7,891.76	7,840.89	7,811.03	28.39	29.11	-143.11	-192.25	612.80	882.84	826.59	56.25	15.696	
8,000.00	7,991.64	7,940.04	7,909.71	28.76	29.49	-143.10	-195.21	621.90	895.91	838.94	56.97	15.725	
8,100.00	8,091.52	8,039.18	8,008.39	29.12	29.87	-143.09	-198.16	631.00	908.98	851.28	57.70	15.755	
8,200.00	8,191.40	8,138.32	8,107.07	29.49	30.25	-143.08	-201.12	640.11	922.05	863.63	58.42	15.783	
8,300.00	8,291.28	8,237.46	8,205.75	29.85	30.63	-143.08	-204.07	649.21	935.12	875.98	59.14	15.811	
8,400.00	8,391.16	8,336.60	8,304.42	30.22	31.01	-143.07	-207.03	658.31	948.19	888.32	59.87	15.838	
8,500.00	8,491.03	8,435.75	8,403.10	30.58	31.39	-143.06	-209.98	667.42	961.26	900.67	60.59	15.864	
8,600.00	8,590.91	8,534.89	8,501.78	30.95	31.77	-143.05	-212.94	676.52	974.33	913.01	61.32	15.890	
8,700.00	8,690.79	8,634.03	8,600.46	31.31	32.15	-143.05	-215.89	685.62	987.40	925.36	62.04	15.915	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Reference Depths are relative to KB=28 @ 3700.00usft (Patterson 597 Coordinates are relative to: Dolly Varden 36-24 State Com #626H


Offset Depths are relative to Offset Datum

Coordinate System is US State Plane 1983, New Mexico Eastern Zone

Central Meridian is -104.333334

Grid Convergence at Surface is: 0.49°

Ladder Plot

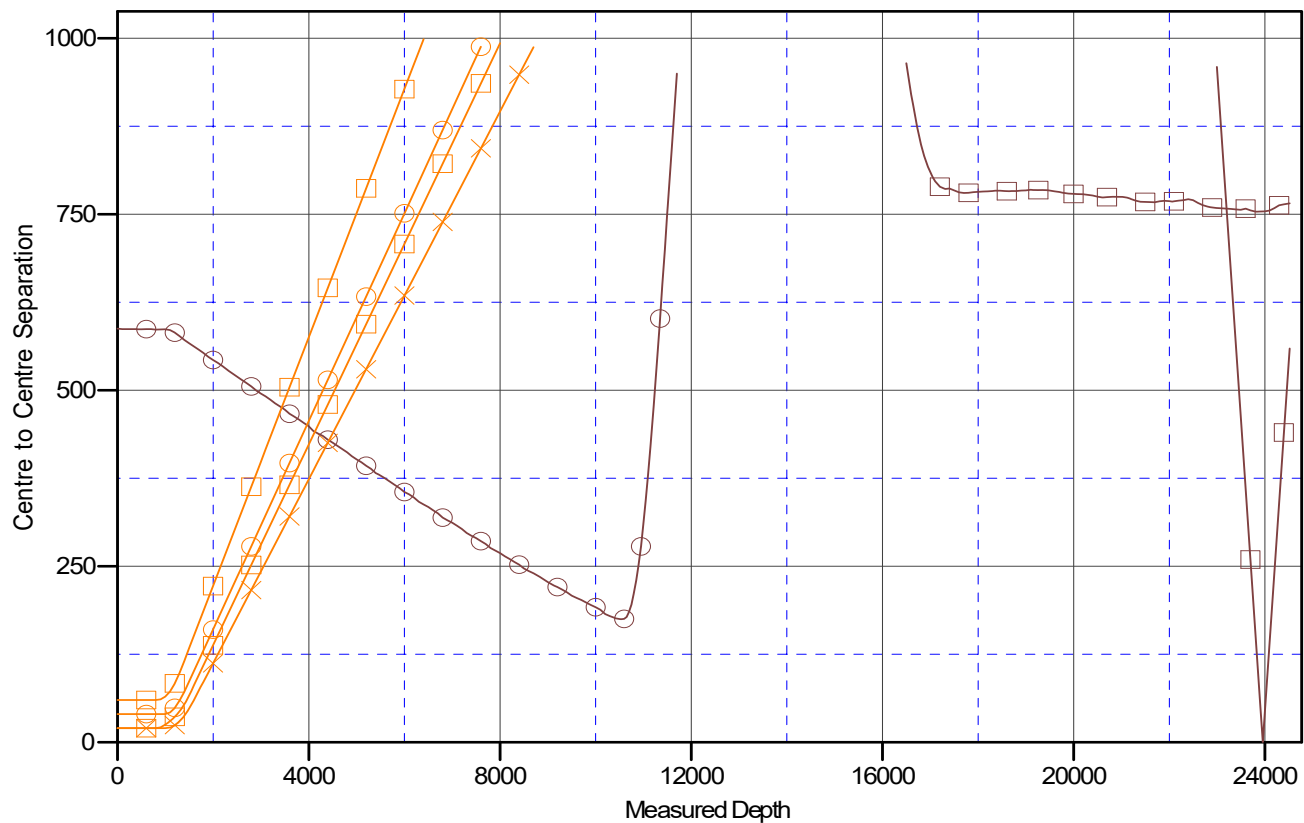

LEGEND

	Dolly Varden 25-24 B2GB36 State Com #1 H, OH, Plan #1 V0		Dolly Varden 36-24 State Com #38 H, OH, Plan #1 V0		Dolly Varden 36-24 State Com #23 H, OH, Plan #2 V0
	Gelly 36 State Com #2 (P6A), OH, OH V0		Dolly Varden 36-24 State Com #28 H, OH, Plan #1 V0		
	Leonard State Com #1 (P6A), OH, OH V0		Dolly Varden 36-24 State Com #23 H, OH, Plan #2 V0		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company:	Mewbourne Oil Company	Local Co-ordinate Reference:	Well Dolly Varden 36-24 State Com #626H
Project:	Lea Co., NM (NAD 83)	TVD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Reference Site:	Dolly Varden 36-24 Pad	MD Reference:	KB=28 @ 3700.00usft (Patterson 597)
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	Dolly Varden 36-24 State Com #626H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	EDM 5000.16 Single User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Reference Depths are relative to KB=28 @ 3700.00usft (Patterson 597) Coordinates are relative to: Dolly Varden 36-24 State Com #626H


Offset Depths are relative to Offset Datum

Coordinate System is US State Plane 1983, New Mexico Eastern Zone

Central Meridian is -104.333334

Grid Convergence at Surface is: 0.49°

Separation Factor Plot

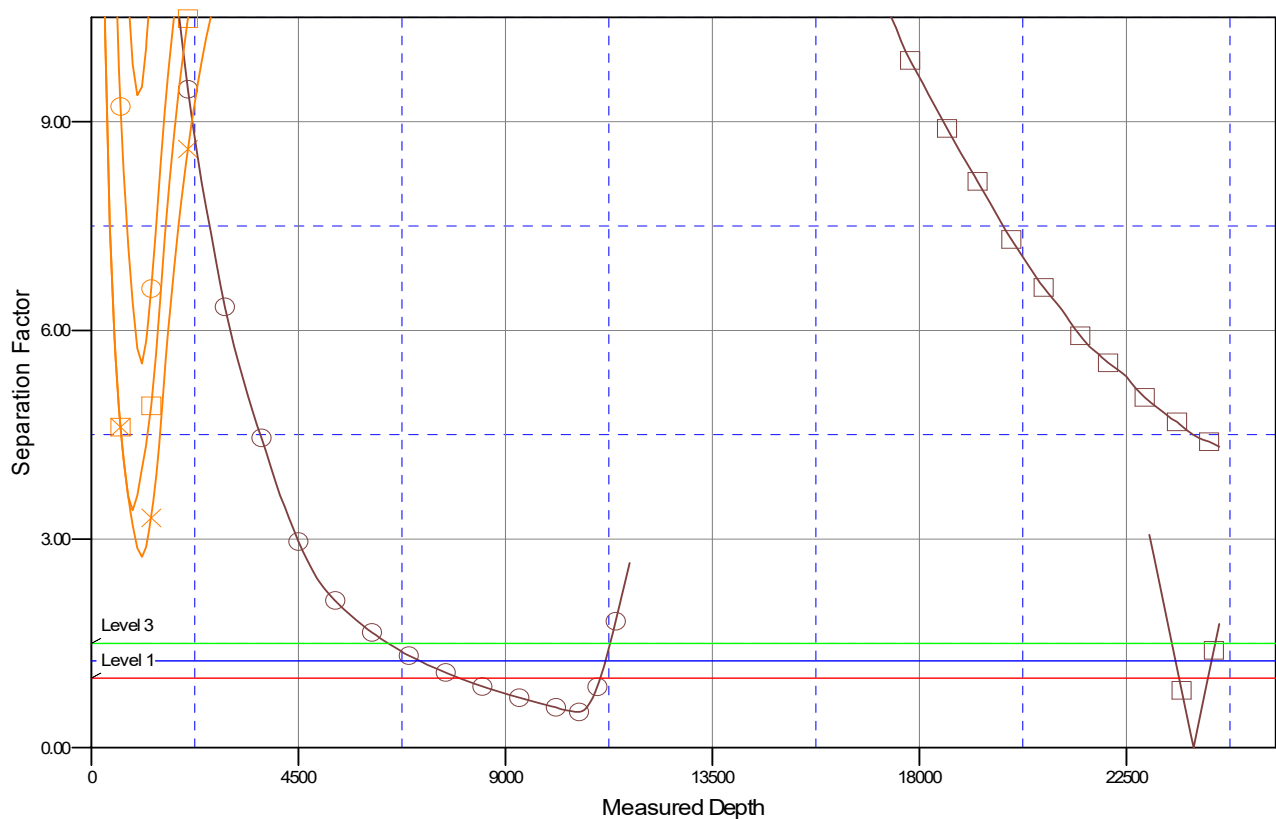

LEGEND

	Dolly Varden 25-24 B2GB State Com #1H, OH, Plan #1 V0		Dolly Varden 36-24 State Com #626H, OH, Plan #1 V0		Dolly Varden 36-24 State Com #626H, OH, Plan #1 V0
	Geely 36 State Com #2 (P&A) OH, OH V0		Dolly Varden 36-24 State Com #626H, OH, Plan #1 V0		Dolly Varden 36-24 State Com #626H, OH, Plan #2 V0
	Leonard State Com #1 (P&A) OH, OH V0		Dolly Varden 36-24 State Com #626H, OH, Plan #1 V0		Dolly Varden 36-24 State Com #626H, OH, Plan #2 V0

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Page 5

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Mewbourne Oil Co. **OGRID:** 14744 **Date:** 12/14/23

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
DOLLY VARDEN 36/24 STATE COM 626H	626H	J 36 21S 34E	2435' FSL x 1610' FEL	2000	4500	1500

IV. Central Delivery Point Name: DOLLY VARDEN 36/24 STATE COM 626H [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
DOLLY VARDEN 36/24 STATE COM 626H	626H	12/14/23	1/14/24	2/14/23	3/17/23	3/17/2

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

Page 8

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	<i>Bradley Bishop</i>
Printed Name:	BRADLEY BISHOP
Title:	REGULATORY MANAGER
E-mail Address:	BBISHOP@MEWBOURNE.COM
Date:	12/14/22
Phone:	575-393-5905
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)	
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	

Mewbourne Oil Company

Natural Gas Management Plan – Attachment

- VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Mewbourne Oil Company (MOC) will take following actions to comply with the regulations listed in 19.15.27.8 :
- A. MOC will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. MOC will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas. If there is no adequate takeaway for the gas, well(s) will be shut in until the natural gas gathering system is available.
 - B. All drilling operations will be equipped with a rig flare located at least 100 ft from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
 - C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flow will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, MOC will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner. MOC will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
 - D. Natural gas will not be flared with the exceptions and provisions listed in the 19.15.27.8 D.(1) through (4). If there is no adequate takeaway for the separator gas, well(s) will be shut in until the natural gas gathering system is available with exception of emergency or malfunction situations. Venting and/or flaring volumes will be estimated and reported appropriately.
 - E. MOC will comply with the performance standards requirements and provisions listed in 19.15.27.8 E.(1) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs in order to minimize the waste. Production storage tanks constructed after May 25, 2021 will be equipped with automatic gauging system. Flares constructed after May 25, 2021 will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. MOC will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
 - F. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared or beneficially used during production operations, will be measured or estimated. MOC will install equipment to measure

the volume of natural gas flared from existing process piping or a flowline piped from equipment such as high pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by an APD issued after May 25, 2021 that has an average daily production greater than 60 Mcf/day. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, MOC will estimate the volume of vented or flared natural gas. Measuring equipment will conform to industry standards and will not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.

- VIII. For maintenance activities involving production equipment and compression, venting will be limited to the depressurization of the subject equipment to ensure safe working conditions. For maintenance of production and compression equipment the associated producing wells will be shut in to eliminate venting. For maintenance of VRUs all gas normally routed to the VRU will be routed to flare to eliminate venting.



Mewbourne Oil Co.

BOP Break Testing Variance

Mewbourne Oil Company requests a variance from the minimum standards for well control equipment testing of 43 CFR 3172 to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with batch drilling & offline cementing operations. Modern rig upgrades which facilitate pad drilling allow the BOP stack to be moved between wells on a multi-well pad without breaking any BOP stack components apart. Widespread use of these technologies has led to break testing BOPE being endorsed as safe and reliable. American Petroleum Institute (API) best practices are frequently used by regulators to develop their regulations. API Standard 53, *Well Control Equipment Systems for Drilling Wells* (5th Ed., Dec. 2018) Section 5.3.7.1 states "A pressure test of the pressure containing component shall be performed following the disconnection or repair, limited to the affected component."

Procedures

1. Full BOPE test at first installation on the pad.
 - Full BOPE test at least every 21 days.
 - Function test BOP elements per 43 CFR 3172.
 - Contact the BLM if a well control event occurs.
2. After the well section is secured and the well is confirmed to be static, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad. Two breaks on the BOPE will be made (Fig. 1).
 - Connection between the flex line and the HCR valve
 - Connection between the wellhead and the BOP quick connect (Fig. 5 & 6).
3. A capping flange will be installed after cementing per wellhead vendor procedure & casing pressure will be monitored via wellhead valve.
4. The BOP will be removed and carried by a hydraulic carrier (Fig. 3 & 4).
5. The rig will then walk to the next well.
6. Confirm that the well is static and remove the capping flange.
7. The connection between the flex line and HCR valve and the connection between the wellhead and the BOP quick connect will be reconnected.
8. Install a test plug into the wellhead.
9. A test will then be conducted against the upper pipe rams and choke, testing both breaks (Fig. 1 & 2).
10. The test will be held at 250 psi low and to the high value submitted in the APD, not to exceed 5000 psi.
11. The annular, blind rams and lower pipe rams will then be function tested.
12. If a pad consists of three or more wells, steps 4 through 11 will be repeated.



13. A break test will only be conducted if the intermediate section can be drilled and cased within 21 days of the last full BOPE test.

Barriers

Before Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff

After Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff
- Offline cementing tool and/or cement head
- Capping flange after cementing

Summary

A variance is requested to only test broken pressure seals on the BOPE when moving between wells on a multi-well pad if the following conditions are met:

- A full BOPE test is conducted on the first well on the pad. API Standard 53 requires testing annular BOP to 70% of RWP or 100% of MASP, whichever is greater.
- If the first well on the pad is not the well with the deepest intermediate section, a full BOPE test will also be performed when moving to a deeper well.
- The hole section being drilled has a MASP under 5000 psi.
- If a well control event occurs, Mewbourne will contact BLM for permission to continue break testing.
- If significant (>50%) losses occur, full BOPE testing will be required going forward.
- Full BOPE test will be required prior to drilling the production hole.

While walking the rig, the BOP stack will be secured via hydraulic winch or hydraulic carrier. A full BOPE test will be performed at least every 21 days.

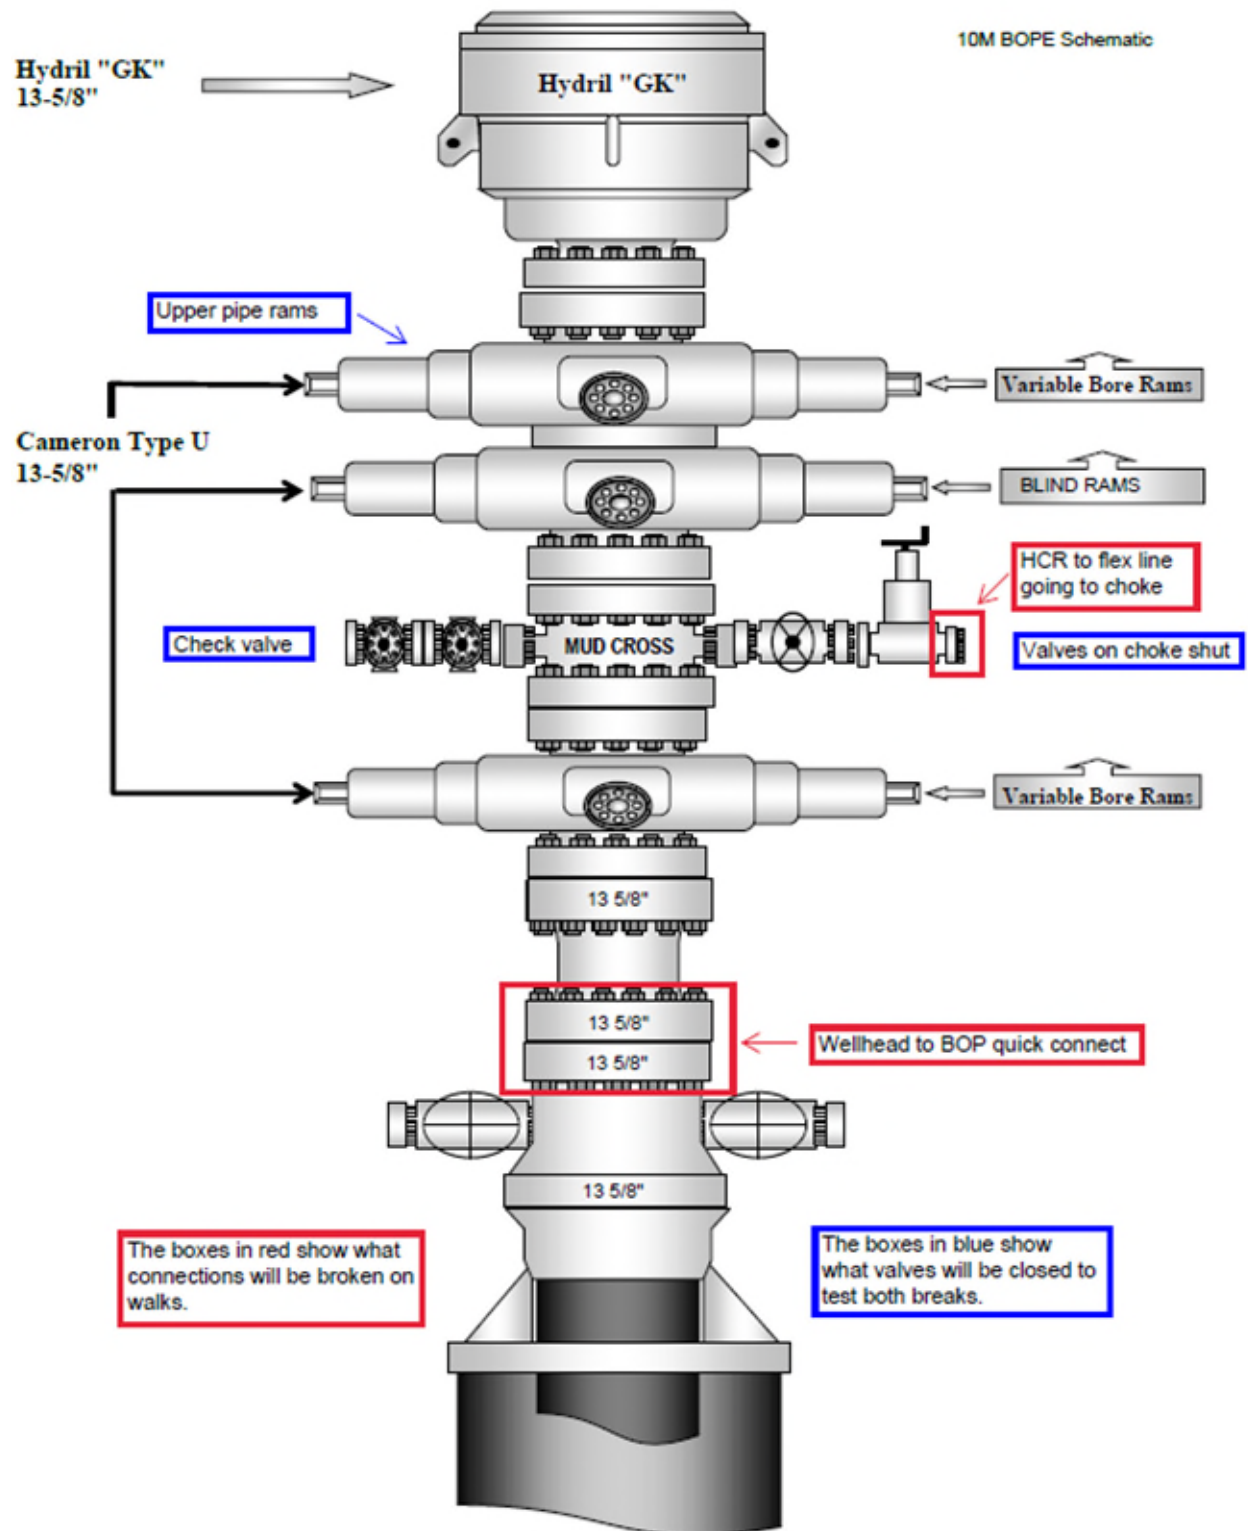


Figure 1. BOP diagram



5M BOPE & Closed Loop Equipment Schematic

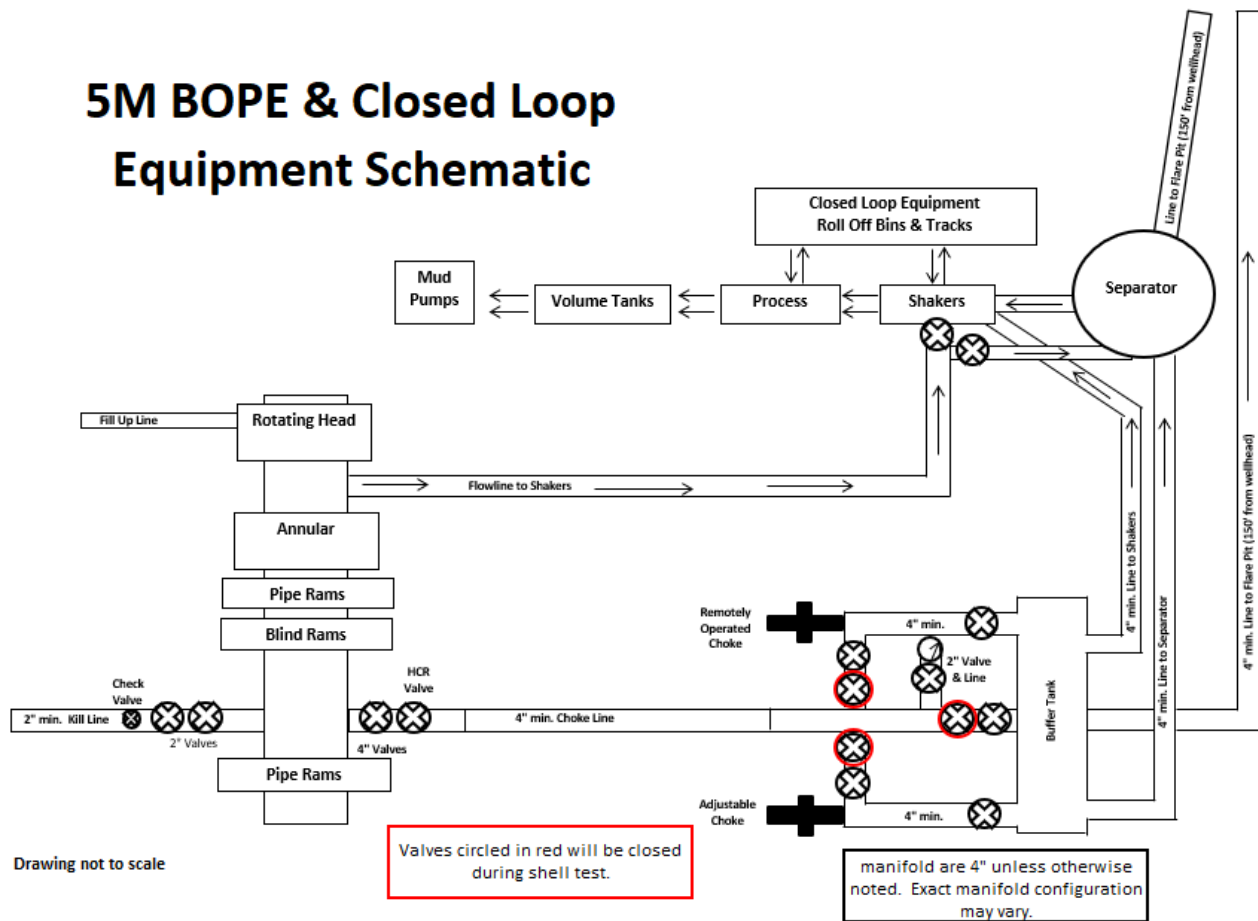


Figure 2. BOPE diagram

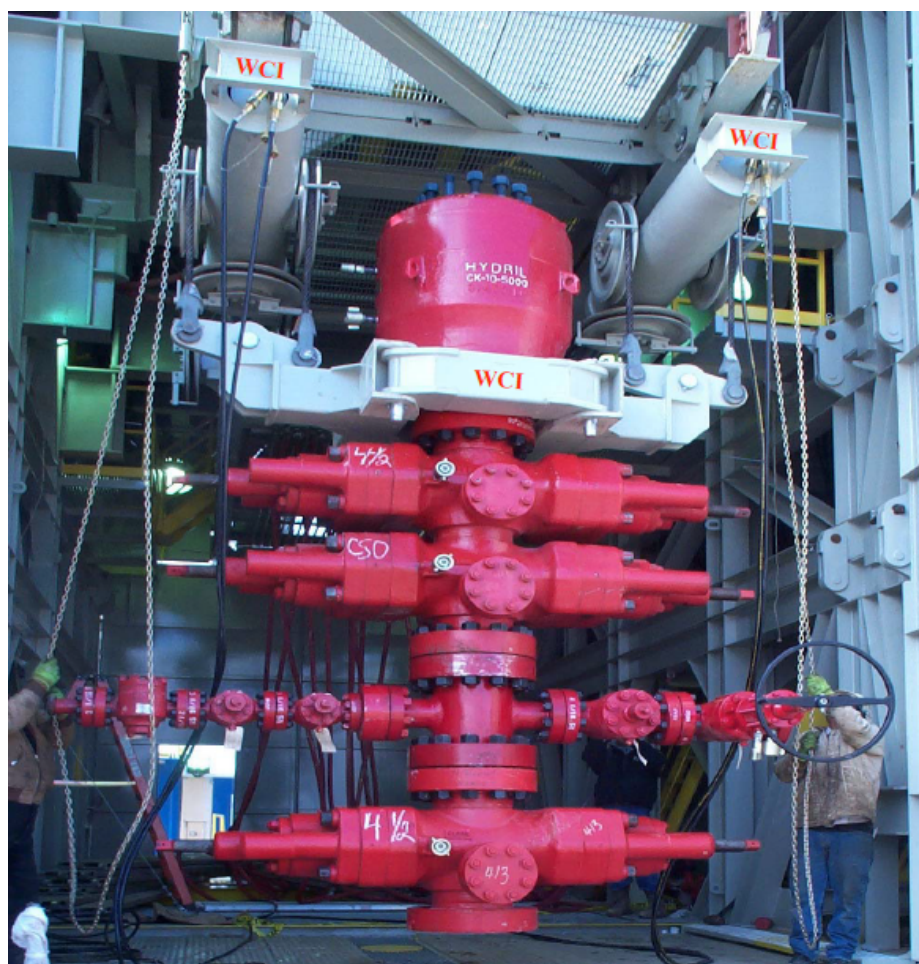


Figure 3. BOP handling system



Figure 4. BOP handling system

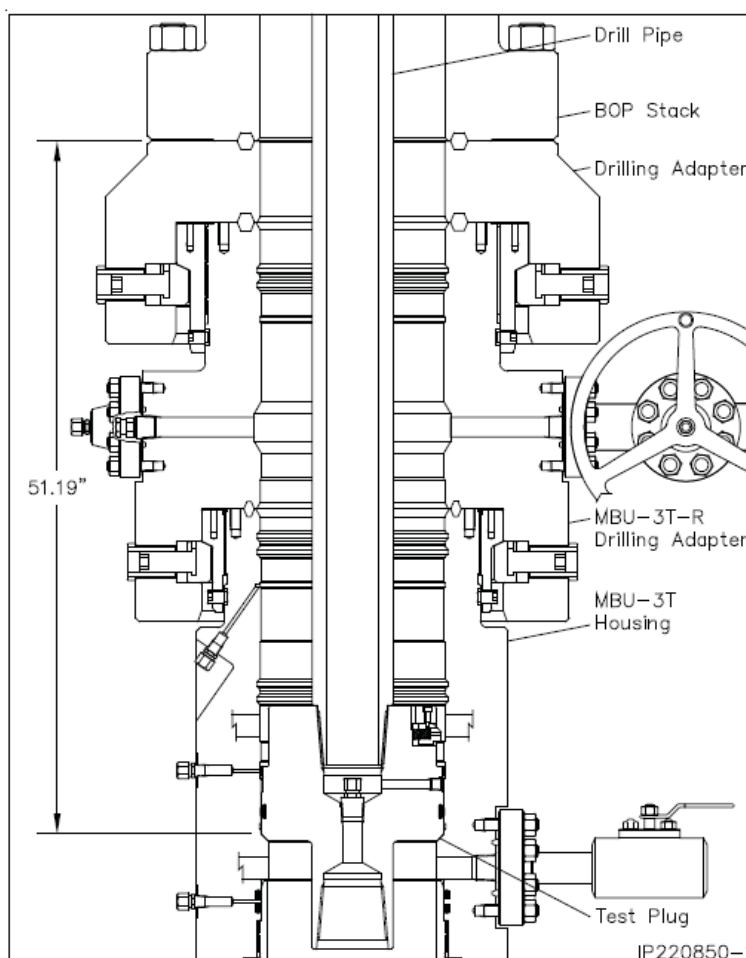


Figure 5. Cactus 5M wellhead with BOP quick connect

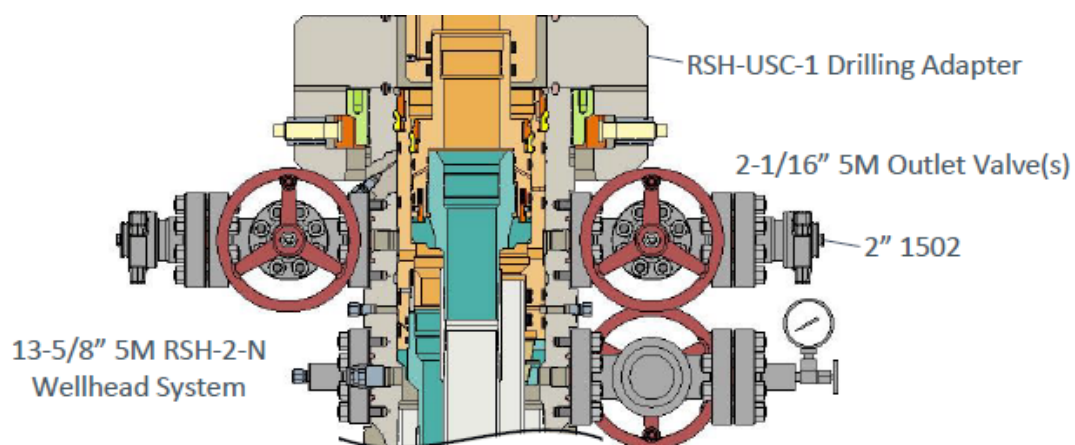


Figure 6. Vault 5M wellhead with BOP quick connect



Mewbourne Oil Co.

Surface & Intermediate Offline Cementing Variance

Mewbourne Oil Company requests a variance to perform offline cementing for surface and intermediate casing strings with the following conditions:

- Offline cementing will not be performed on production casing.
- Offline cementing will not be performed on a hole section with MASP > 5000 psi.
- Offline cementing will not be performed concurrently with offset drilling.

Surface Casing Order of Operations:

1. Run 13 3/8" surface casing as per normal operations (TPGS and float collar).
2. Perform negative pressure test to confirm integrity of float equipment while running casing.
3. Confirm well is static.
4. Make up 13 5/8" wellhead or wellhead landing ring assembly and land on 20" conductor.
5. Fill pipe, circulate casing capacity and confirm float(s) are still holding.
6. Confirm well is static.
7. Back out landing joint and pull to rig floor. Lay down landing joint.
8. Walk rig to next well on pad with cement crew standing by to rig up.
9. Make up offline cement tool with forklift per wellhead manufacturer (Fig. 1 & 2).
10. Make up cement head on top of offline cement tool with forklift.
11. Commence cement operations.
12. If cement circulates, confirm well is static and proceed to step 16.
13. If cement does not circulate, notify the appropriate BLM office, wait a minimum of six hours, and run a temperature survey to determine the top of cement.
14. Use 1" pipe for remedial cement job until the surface casing is cemented to surface.
15. Confirm well is static.
16. Once cement job is complete, the cement head and offline cementing tool are removed. The wellhead technician returns to cellar to install wellhead/valves.
17. Install wellhead capping flange.

Barriers

Before Walk:

- Float(s) in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus



After Walk:

- Float(s) in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Offline cementing tool tested to 5000 psi and cement head
- Capping flange after cementing

20" Surface Casing Order of Operations (4 string area):

1. Run 20" surface casing as per normal operations (TPGS and float collar).
2. Perform negative pressure test to confirm integrity of float equipment while running casing.
3. Fill pipe, circulate casing capacity and confirm float(s) are still holding.
4. Confirm well is static.
5. Back out landing joint and pull to rig floor. Lay down landing joint.
6. Make up cement head.
7. Walk rig to next well on pad with cement crew standing by to rig up.
8. Commence cement operations.
9. If cement circulates, confirm well is static and proceed to step 13.
10. If cement does not circulate, notify the appropriate BLM office, wait a minimum of six hours, and run a temperature survey to determine the top of cement.
11. Use 1" pipe for remedial cement job until the surface casing is cemented to surface.
12. Confirm well is static.
13. Once cement job is complete, remove cement head and install cap.

Barriers

Before Walk:

- Float(s) in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Cement Head

After Walk:

- Float(s) in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Cement head
- Capping flange after cementing



Intermediate Casing Order of Operations:

1. Run casing as per normal operations (float shoe and float collar).
2. Perform negative pressure test to confirm integrity of float equipment while running casing.
3. Confirm well is static (if running SBM).
4. Land casing.
5. Fill pipe, circulate casing capacity and confirm floats are still holding.
6. Confirm well is static.
7. Back out landing joint and pull to rig floor. Lay down landing joint. Install packoff & test.
8. Nipple down BOP.
9. Walk rig to next well on pad with cement crew standing by to rig up.
10. Make up offline cement tool using forklift per wellhead manufacturer (Fig. 3 - 8).
11. Make up cement head on top of offline cement tool.
12. Commence cement operations.
13. If cement circulates, confirm well is static and proceed to step 16.
14. If cement does not circulate (when required), notify the appropriate BLM office, wait a minimum of six hours, and run a temperature survey to determine the top of cement.
15. Pump remedial cement job if required.
16. Confirm well is static.
17. Remove cement head and offline cementing tool.
18. Install wellhead capping flange and test.

Barriers

Before Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff

After Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff
- Offline cementing tool tested to 5000 psi and cement head
- Capping flange after cementing

**Risks:**

- Pressure build up in annulus before cementing
 - o Contact BLM if a well control event occurs.
 - o Rig up 3rd party pump or rig pumps to pump down casing and kill well.
 - o Returns will be taken through the wellhead valves to a choke manifold (Fig 9 & 10).
 - o Well could also be killed through the wellhead valves down the annulus.

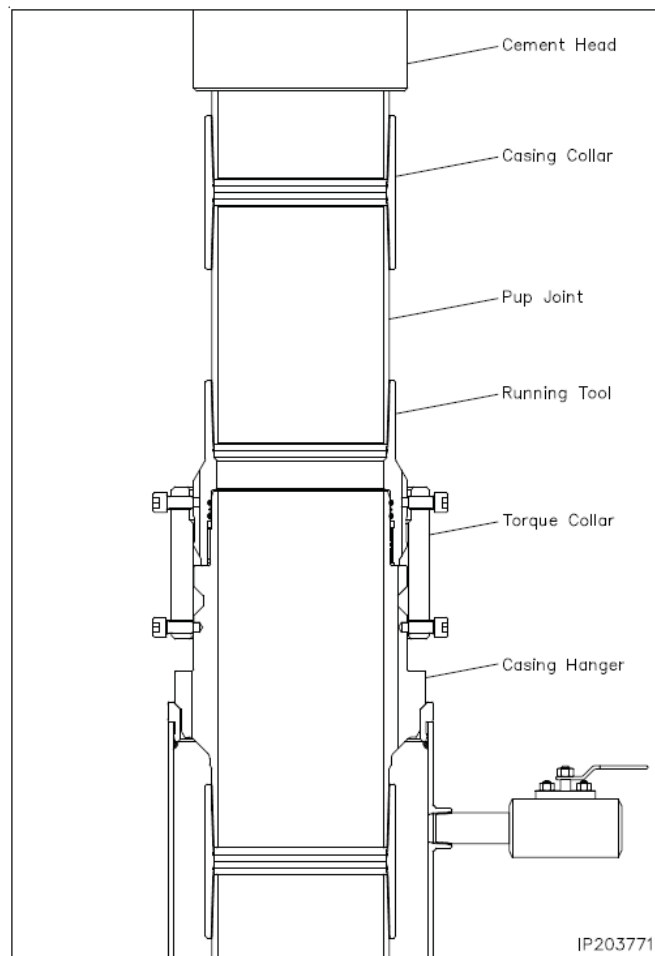


Figure 1. Cactus 13 3/8" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 13 3/8" pup joint and casing.

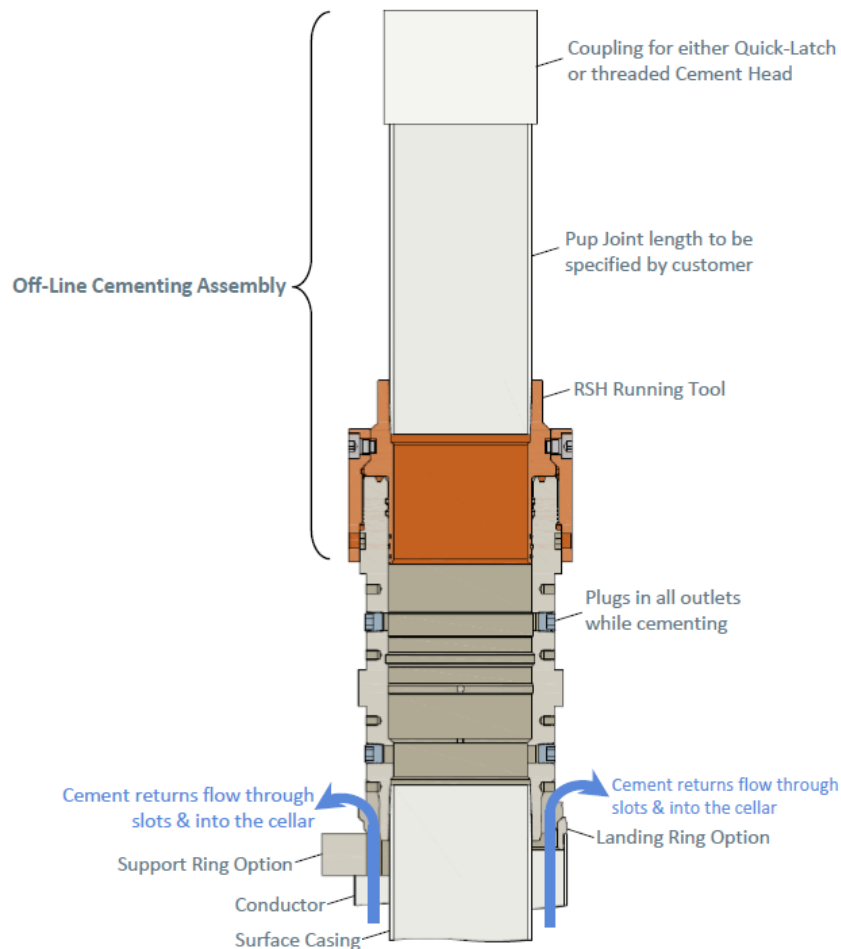


Figure 2. Vault 13 3/8" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 13 3/8" pup joint and casing.

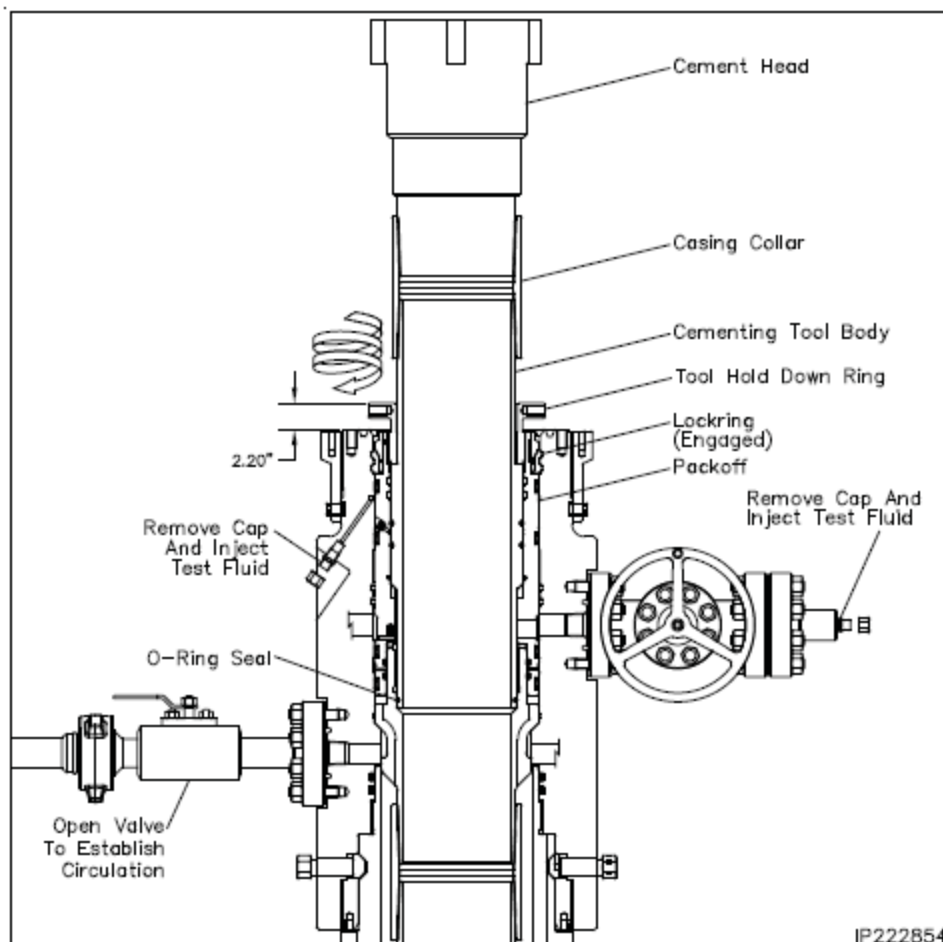


Figure 3. Cactus 9 5/8" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 9 5/8" pup joint and casing.

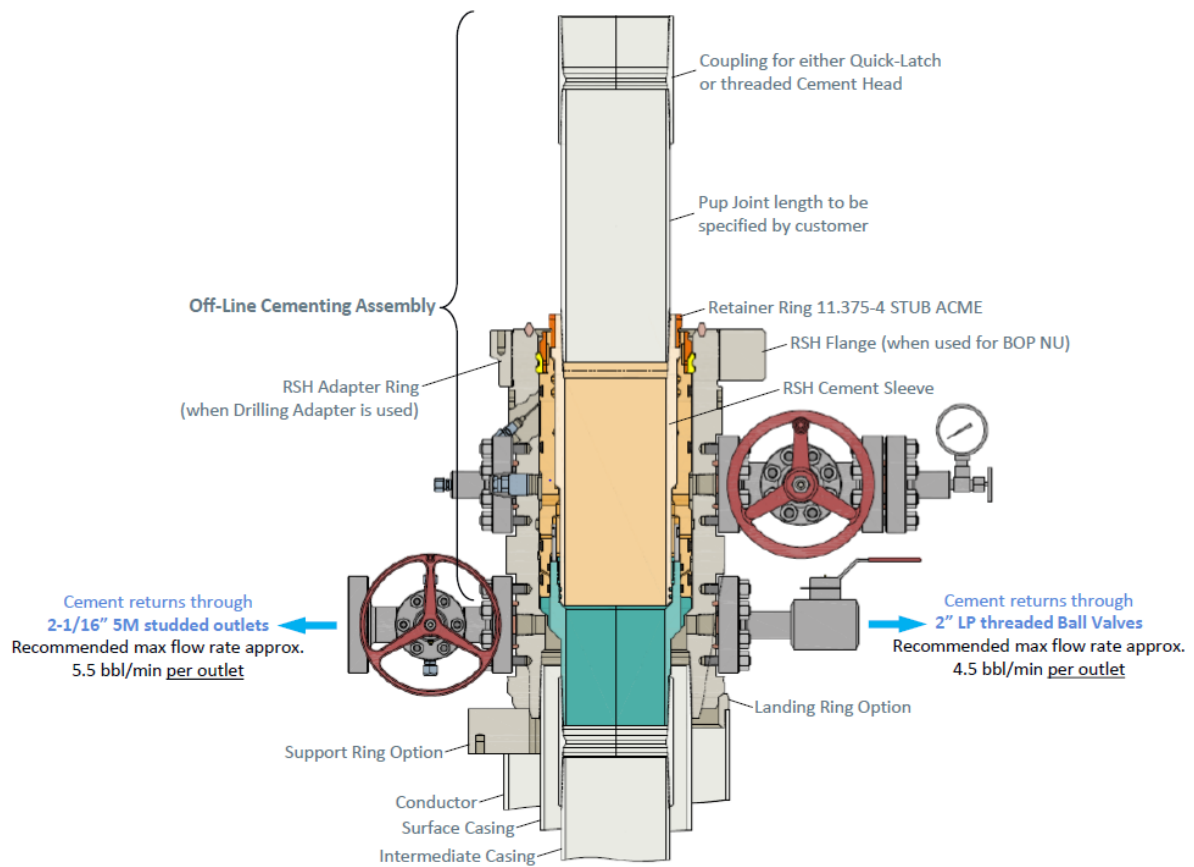


Figure 4. Vault 9 5/8" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 9 5/8" pup joint and casing.

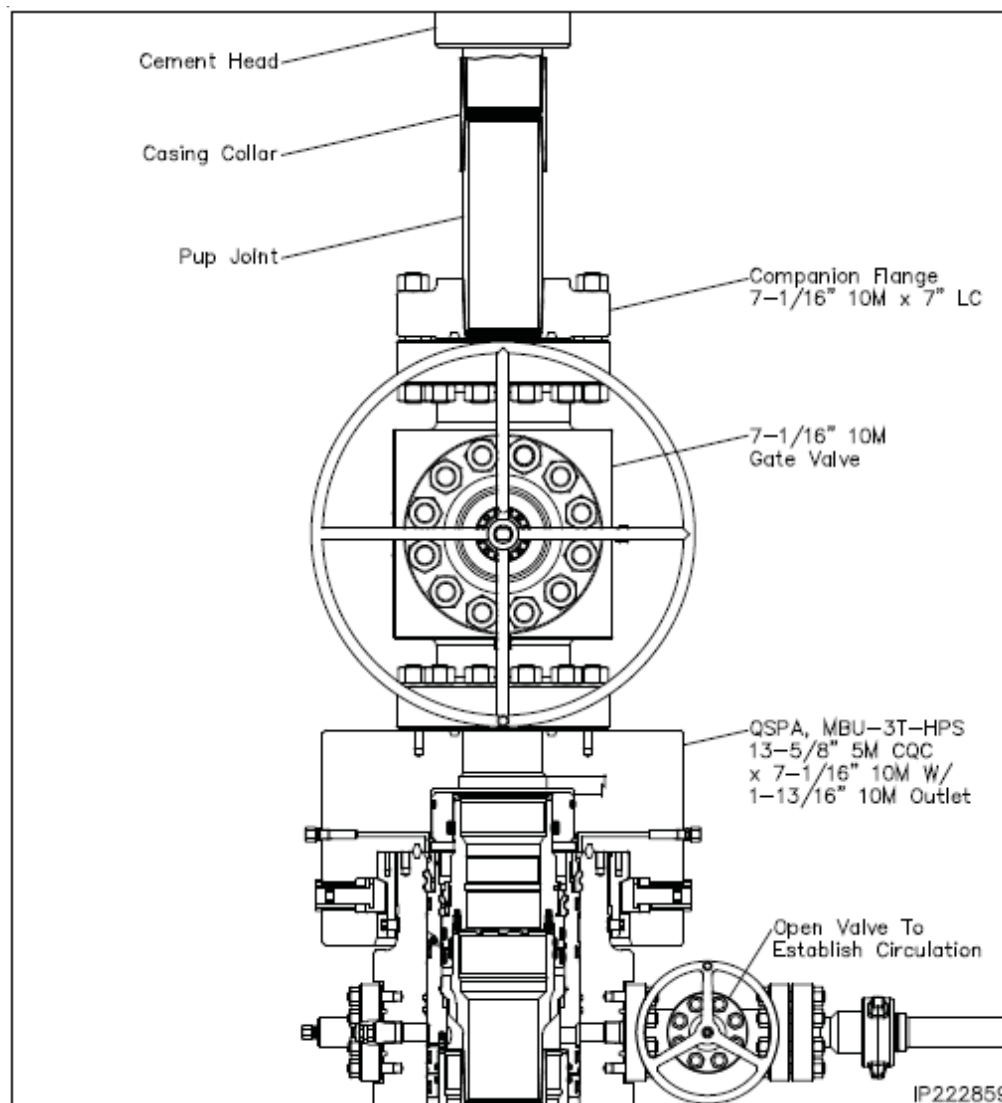


Figure 5. Cactus 7" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 7" pup joint and casing.

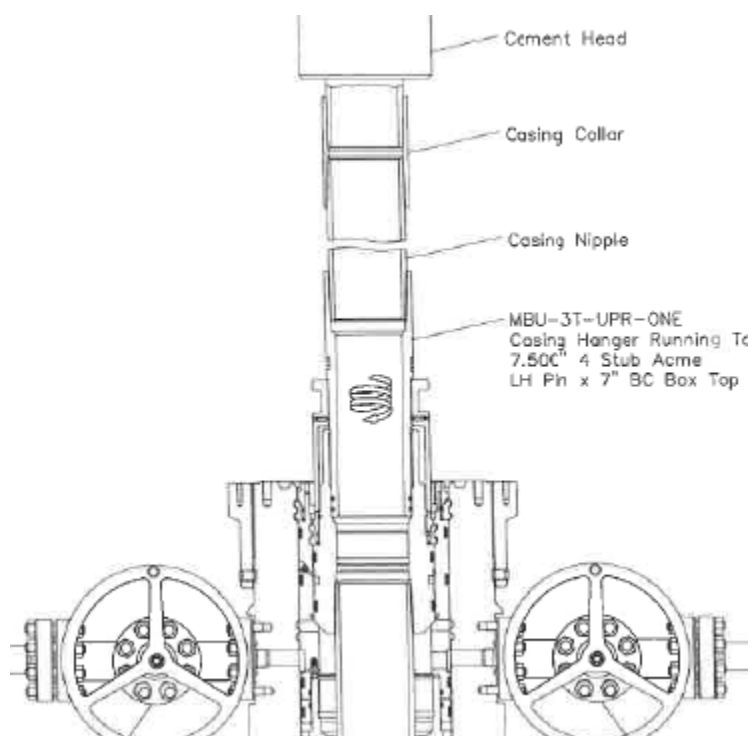


Figure 6. Cactus 7" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 7" pup joint and casing.

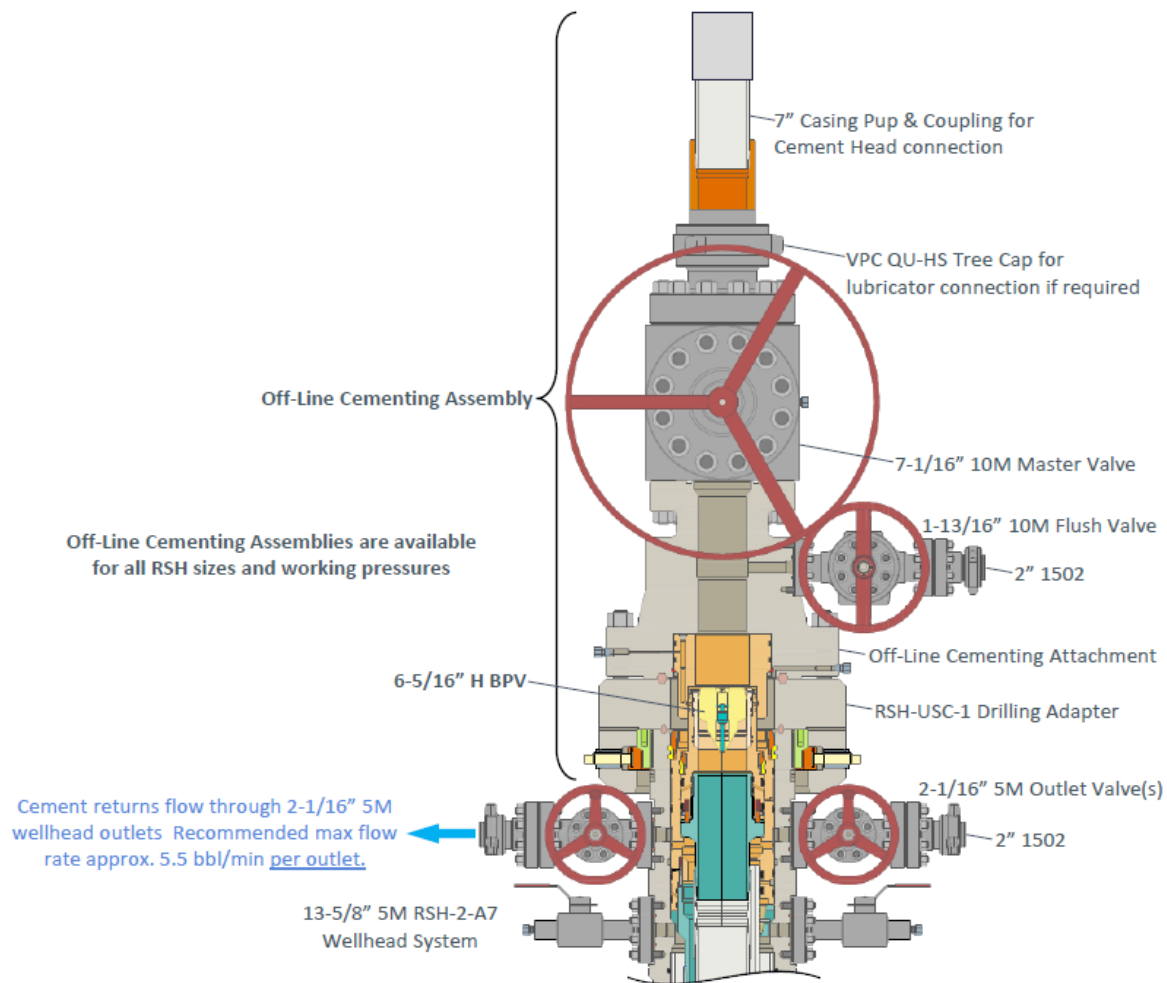


Figure 7. Vault 7" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 7" pup joint and casing.

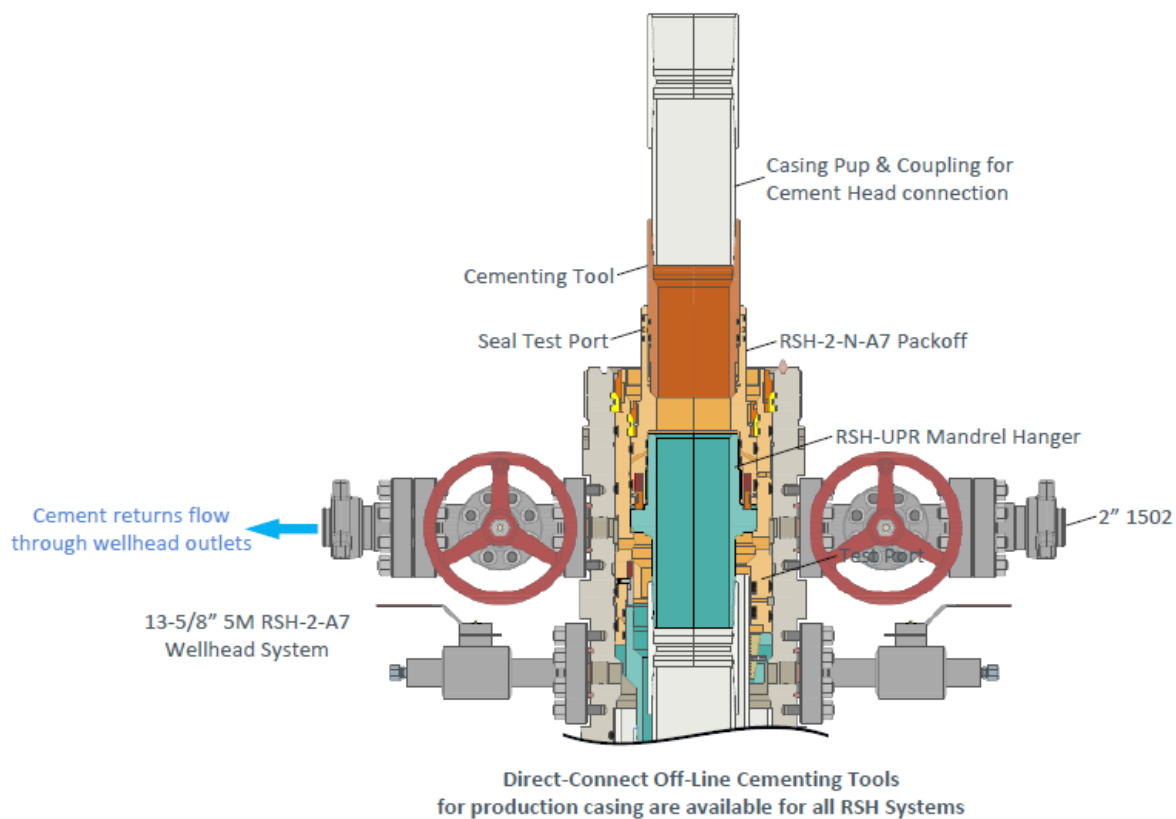


Figure 8. Vault 7" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 7" pup joint and casing.

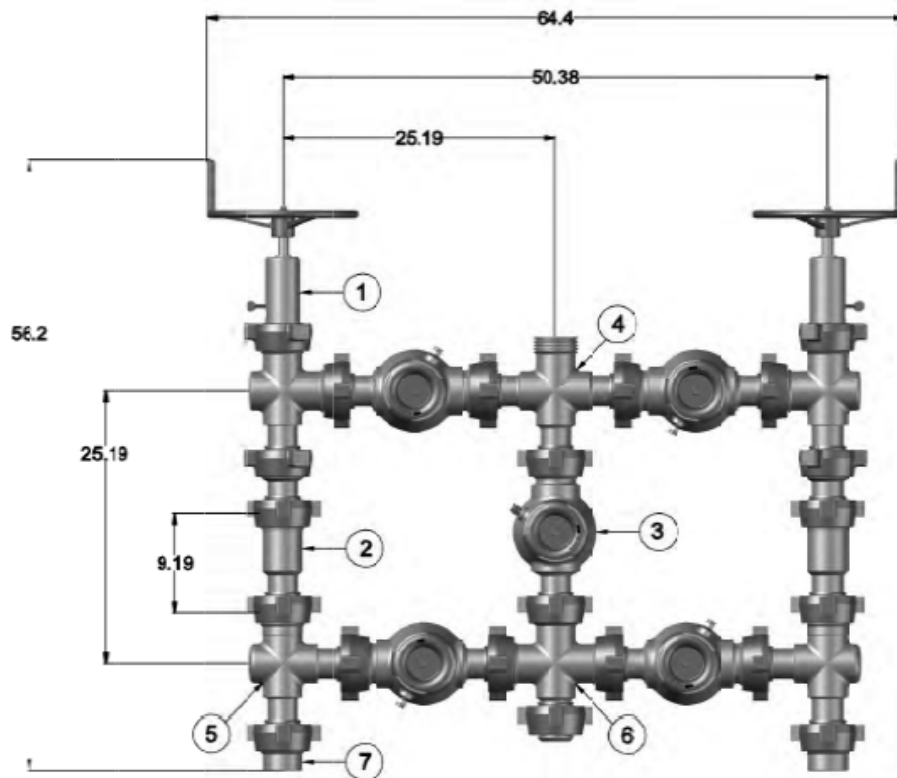


Figure 9. Five valve 15k choke manifold.

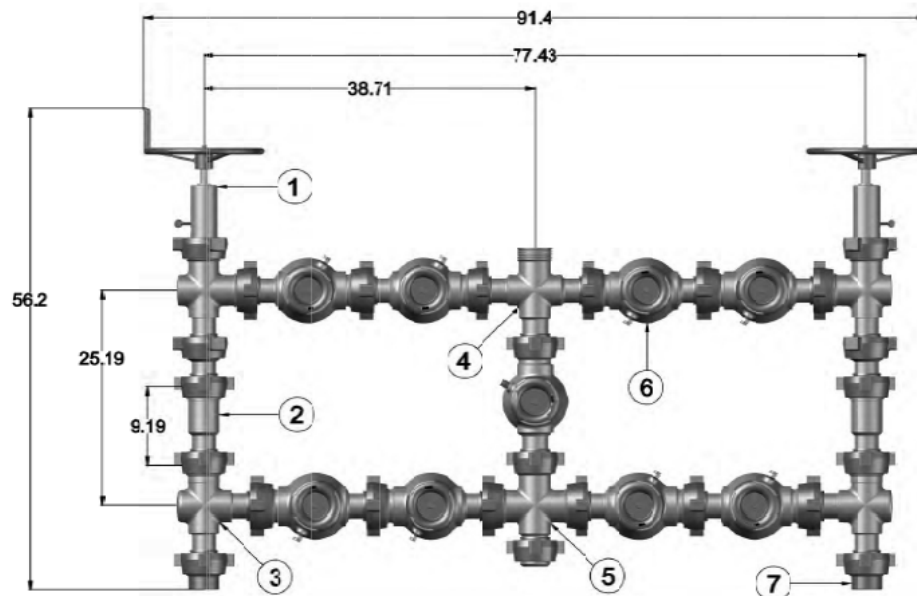


Figure 10. Nine valve 15k choke manifold.