

Well Name: BOLL WEEVIL 27-34 FED COM	Well Location: T26S / R34E / SEC 27 / NENE / 32.0205 / -103.4509	County or Parish/State: LEA / NM
Well Number: 7H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM100569	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002547954	Well Status: Approved Application for Permit to Drill	Operator: DEVON ENERGY PRODUCTION COMPANY LP

Notice of Intent

Sundry ID: 2762115

Type of Submission: Notice of Intent

Type of Action: APD Change

Date Sundry Submitted: 11/16/2023

Time Sundry Submitted: 04:15

Date proposed operation will begin: 11/16/2023

Procedure Description: Devon Energy Production Company L.P. respectfully requests the following changes to the approved APD: BHL change from 20 FSL & 1010 FEL to 20 FSL & 1455 FEL, both 34-26S-34E Dedicated acreage change from 471.68 acs to 235.87 acs. Pooling Order in process. TVD/MD change from 12800'/20288' to 12850'/20326' Casing program change: Surface, Intermediate, and Production Casing size changes. Cement volume changes to accommodate casing change. Please see attached revised C-102 and drilling & directional plans and other supporting documentation.

NOI Attachments

Procedure Description

- BOLL_WEEVIL_27_34_FED_COM_7H_C_102_BHL_SPACING_20231201134327.pdf
- BOLL_WEEVIL_27_34_FED_COM_7H_Directional_Plan_11_16_23_20231116161403.pdf
- BOLL_WEEVIL_27_34_FED_COM_7H_20231116161404.pdf
- 8.625_32lb_P110EC_SPRINT_FJ_VST_20231116161334.pdf
- 10.75_45.50_J55_BTC_20231116161332.pdf
- 5.5_20lb_P110EC_DWC_C_IS_20231116161322.pdf

Received by OCD: 12/21/2023 10:21:41 AM

Page 2 of 51

Well Name: BOLL WEEVIL 27-34 FED COM	Well Location: T26S / R34E / SEC 27 / NENE / 32.0205 / -103.4509	County or Parish/State: LEA / NM
Well Number: 7H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM100569	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002547954	Well Status: Approved Application for Permit to Drill	Operator: DEVON ENERGY PRODUCTION COMPANY LP

Conditions of Approval

Specialist Review

Boll_Weevil_27_34_Fed_Com_7H_Sundry_ID_2762115_20231218113912.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: REBECCA DEAL

Signed on: DEC 01, 2023 01:43 PM

Name: DEVON ENERGY PRODUCTION COMPANY LP

Title: Regulatory Analyst

Street Address: 333 W SHERIDAN AVE

City: OKLAHOMA CITYState: OK

Phone: (303) 299-1406

Email address: REBECCA.DEAL@DVN.COM

Field

Representative Name:

Street Address:

City:State:Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: LONG VO

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5759885402

BLM POC Email Address: LVO@BLM.GOV

Disposition: Approved

Disposition Date: 12/18/2023

Signature: Long Vo

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on page 2		5. Lease Serial No.
1. Type of Well ☐ Oil Well ☐ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
2. Name of Operator		7. If Unit of CA/Agreement, Name and/or No.
3a. Address	3b. Phone No. (include area code)	8. Well Name and No.
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)		9. API Well No.
		10. Field and Pool or Exploratory Area
		11. Country or Parish, State

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
☐ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off	
	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity	
☐ Subsequent Report	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other	
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon		
☐ Final Abandonment Notice	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)		
	Title	
Signature	Date	

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NENE / 372 FNL / 477 FEL / TWSP: 26S / RANGE: 34E / SECTION: 27 / LAT: 32.020642 / LONG: -103.450788 (TVD: 0 feet, MD: 0 feet)

PPP: NENE / 100 FNL / 1010 FEL / TWSP: 26S / RANGE: 34E / SECTION: 27 / LAT: 32.021394 / LONG: -103.452508 (TVD: 12461 feet, MD: 12488 feet)

BHL: SENE / 20 FSL / 1010 FEL / TWSP: 26S / RANGE: 34E / SECTION: 34 / LAT: 32.000335 / LONG: -103.45251 (TVD: 12800 feet, MD: 20288 feet)

CONFIDENTIAL

DISTRICT I
1625 N. FRENCH DR., HOBBS, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. FIRST ST., ARTESIA, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 RIO BRAZOS RD., AZTEC, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. ST. FRANCIS DR., SANTA FE, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DR.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025-47954	Pool Code 96776	Pool Name JABALINA;WOLFCAMP, SOUTHWEST
Property Code 329772	Property Name BOLL WEEVIL 27-34 FED COM	Well Number 7H
OGRID No. 6137	Operator Name DEVON ENERGY PRODUCTION COMPANY, L.P.	Elevation 3219.7'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	27	26-S	34-E		372	NORTH	477	EAST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
2	34	26-S	34-E		20	SOUTH	1455	EAST	LEA

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
235.87			Pooling Order in process.

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

BOLL WEEVIL 27-34 FED COM 7H

EL: 3219.7'
GEODETIC COORDINATES NAD 83
NMSP EAST SURFACE LOCATION
N: 372365.45
E: 814859.36
LAT: 32.020642
LON: 103.450788

KICK OFF POINT

CALLS: 47' FNL, 1456' FEL
N: 372684
E: 813878
LAT: 32.0214
LON: -103.4540

FIRST TAKE POINT (PPP 1)

100' FNL 1455' FEL SEC. 27
N: 372632.21
E: 813879.15
LAT: 32.021397
LON: 103.453944

LAST TAKE POINT


100' FSL 1455' FEL SEC. 34
N: 365049.98
E: 813940.44
LAT: 32.000555
LON: 103.453945

BOTTOM OF HOLE

N: 364969.98
E: 813941.07
LAT: 32.000335
LON: 103.453945

(PPP 2)

0' FSL 1456' FEL SEC. 27

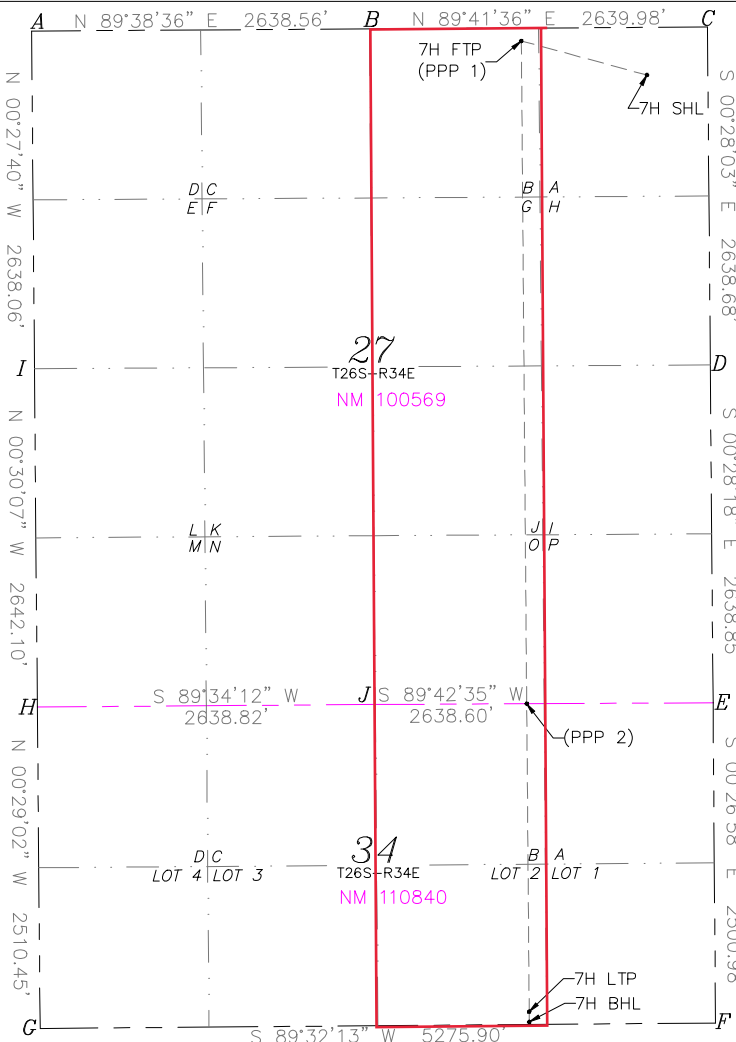

OPERATOR CERTIFICATION

I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Rebecca Deal 11/16/2023
Signature Date

Rebecca Deal, Regulatory Analyst
Printed Name

Rebecca.deal@dvn.com
E-mail Address


SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

07/2019

Date of Survey

Signature & Seal of Professional Surveyor



11/13/2023

Certificate No. 23261 A.DeHOYOS
DRAWN BY: CM

Intent ☒ As Drilled ☐

API #		
Operator Name: DEVON ENERGY PRODUCTION COMPANY, LP.	Property Name: BOLL WEEVIL 27-34 FED COM	Well Number 7H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
	27	26S	34E		47	FNL	1456	FEL	LEA
Latitude 32.0214					Longitude -103.4540				NAD 83

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
B	27	26-S	34-E		100	NORTH	1455	EAST	LEA
Latitude 32.021397					Longitude 103.453944				NAD 83

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
	34	26-S	34-E	2	100	SOUTH	1455	EAST	LEA
Latitude 32.000555					Longitude 103.453945				NAD 83

Is this well the defining well for the Horizontal Spacing Unit?

☐ N


Is this well an infill well?

☐ Y

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name: Devon Energy Production Company, L.P.	Property Name: Boll Weevil 27-34 Fed Com	Well Number 6H

KZ 06/29/2018

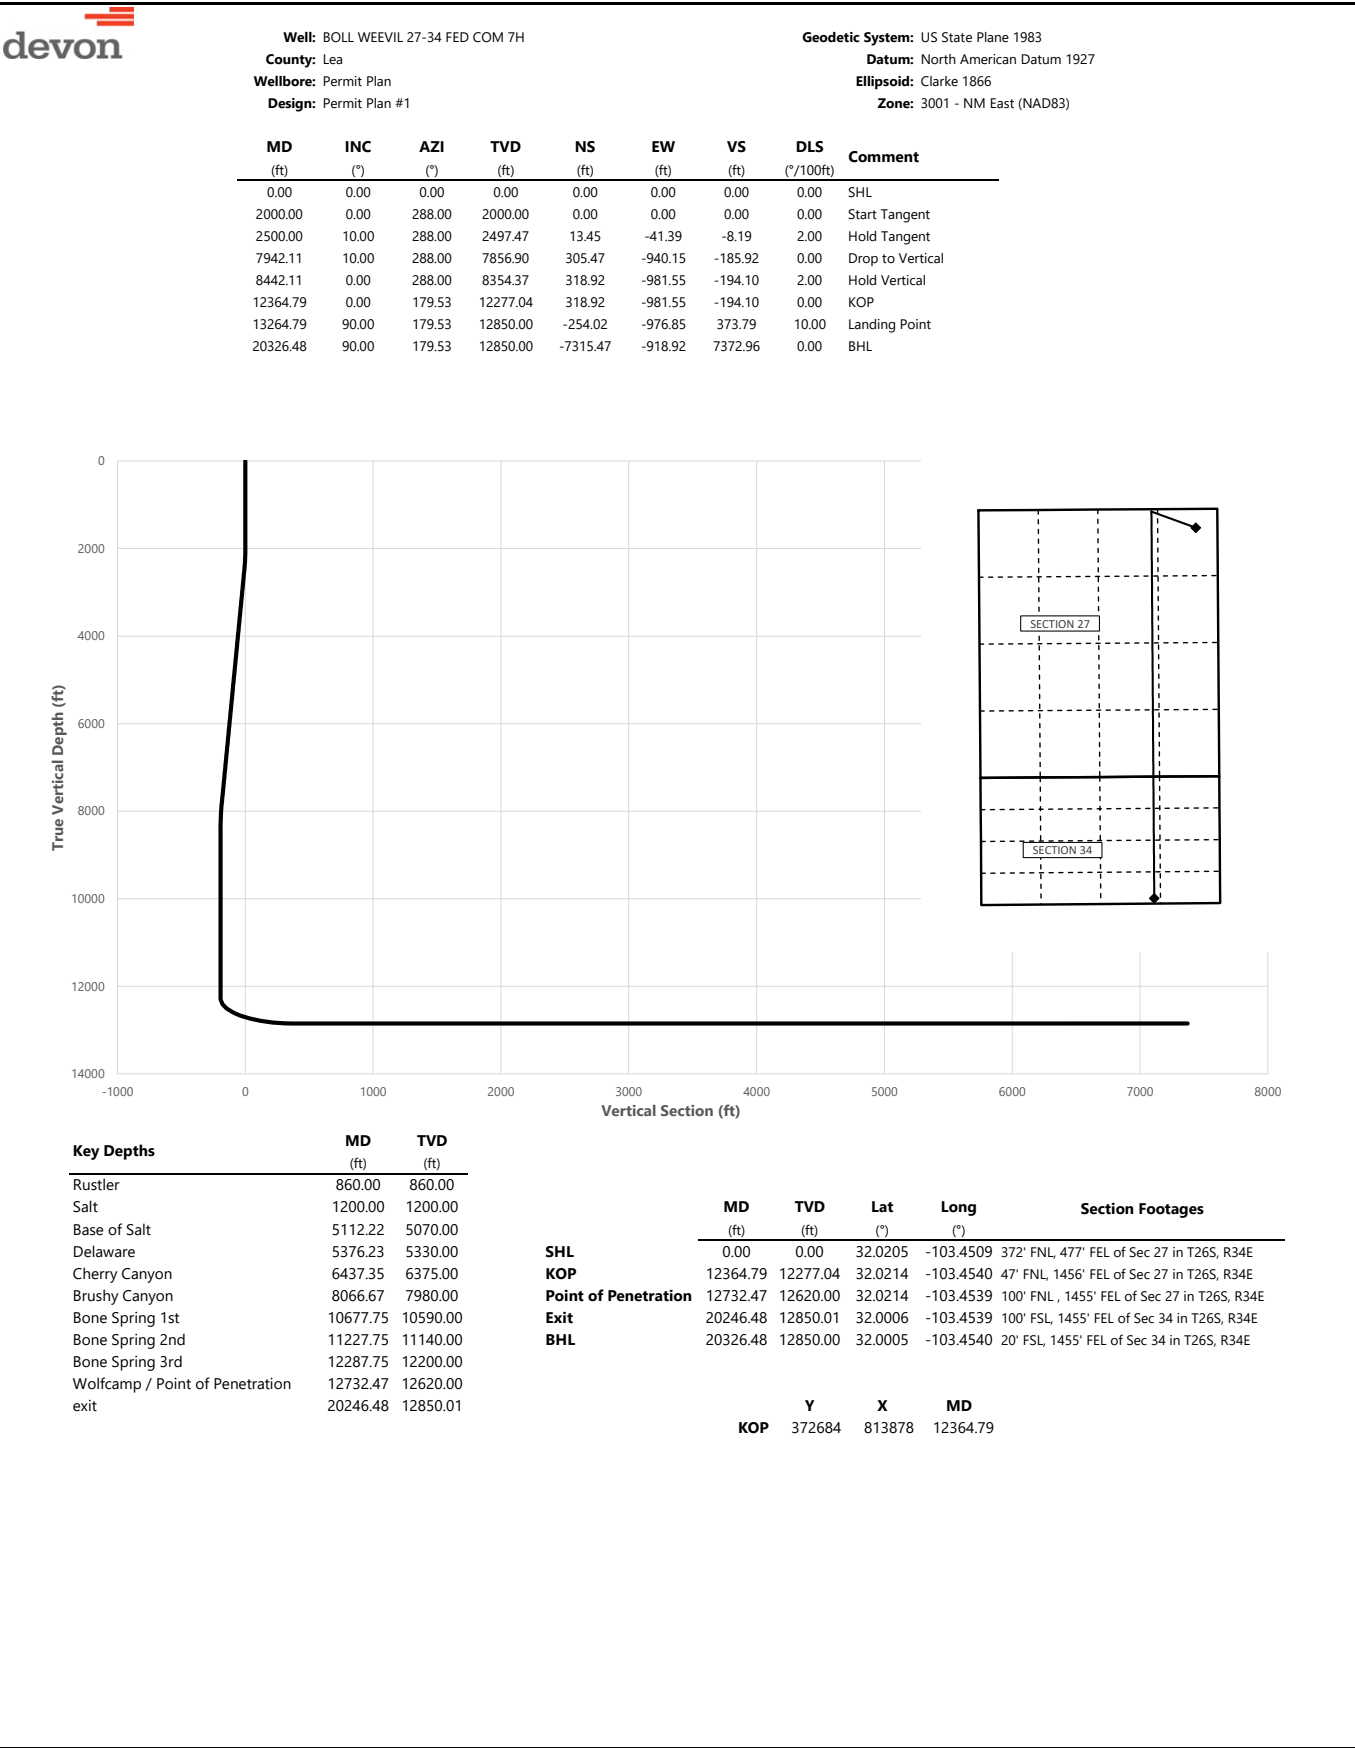

BOLL WEEVIL 27-34 FED COM 7H



Well: BOLL WEEVIL 27-34 FED COM 7H
 County: Lea
 Wellbore: Permit Plan
 Design: Permit Plan #1

Geodetic System: US State Plane 1983
 Datum: North American Datum 1927
 Ellipsoid: Clarke 1866
 Zone: 3001 - NM East (NAD83)

MD	INC	AZI	TVD	NS	EW	VS	DLS	Comment
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100ft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL
100.00	0.00	288.00	100.00	0.00	0.00	0.00	0.00	
200.00	0.00	288.00	200.00	0.00	0.00	0.00	0.00	
300.00	0.00	288.00	300.00	0.00	0.00	0.00	0.00	
400.00	0.00	288.00	400.00	0.00	0.00	0.00	0.00	
500.00	0.00	288.00	500.00	0.00	0.00	0.00	0.00	
600.00	0.00	288.00	600.00	0.00	0.00	0.00	0.00	
700.00	0.00	288.00	700.00	0.00	0.00	0.00	0.00	
800.00	0.00	288.00	800.00	0.00	0.00	0.00	0.00	
860.00	0.00	288.00	860.00	0.00	0.00	0.00	0.00	Rustler
900.00	0.00	288.00	900.00	0.00	0.00	0.00	0.00	
1000.00	0.00	288.00	1000.00	0.00	0.00	0.00	0.00	
1100.00	0.00	288.00	1100.00	0.00	0.00	0.00	0.00	
1200.00	0.00	288.00	1200.00	0.00	0.00	0.00	0.00	Salt,
1300.00	0.00	288.00	1300.00	0.00	0.00	0.00	0.00	
1400.00	0.00	288.00	1400.00	0.00	0.00	0.00	0.00	
1500.00	0.00	288.00	1500.00	0.00	0.00	0.00	0.00	
1600.00	0.00	288.00	1600.00	0.00	0.00	0.00	0.00	
1700.00	0.00	288.00	1700.00	0.00	0.00	0.00	0.00	
1800.00	0.00	288.00	1800.00	0.00	0.00	0.00	0.00	
1900.00	0.00	288.00	1900.00	0.00	0.00	0.00	0.00	
2000.00	0.00	288.00	2000.00	0.00	0.00	0.00	0.00	Start Tangent
2100.00	2.00	288.00	2099.98	0.54	-1.66	-0.33	2.00	
2200.00	4.00	288.00	2199.84	2.16	-6.64	-1.31	2.00	
2300.00	6.00	288.00	2299.45	4.85	-14.93	-2.95	2.00	
2400.00	8.00	288.00	2398.70	8.62	-26.52	-5.24	2.00	
2500.00	10.00	288.00	2497.47	13.45	-41.39	-8.19	2.00	Hold Tangent
2600.00	10.00	288.00	2595.95	18.82	-57.91	-11.45	0.00	
2700.00	10.00	288.00	2694.43	24.18	-74.42	-14.72	0.00	
2800.00	10.00	288.00	2792.91	29.55	-90.94	-17.98	0.00	
2900.00	10.00	288.00	2891.39	34.91	-107.45	-21.25	0.00	
3000.00	10.00	288.00	2989.87	40.28	-123.97	-24.51	0.00	
3100.00	10.00	288.00	3088.35	45.64	-140.48	-27.78	0.00	
3200.00	10.00	288.00	3186.83	51.01	-157.00	-31.05	0.00	
3300.00	10.00	288.00	3285.31	56.38	-173.51	-34.31	0.00	
3400.00	10.00	288.00	3383.79	61.74	-190.03	-37.58	0.00	
3500.00	10.00	288.00	3482.27	67.11	-206.54	-40.84	0.00	
3600.00	10.00	288.00	3580.75	72.47	-223.06	-44.11	0.00	
3700.00	10.00	288.00	3679.23	77.84	-239.57	-47.37	0.00	
3800.00	10.00	288.00	3777.72	83.21	-256.09	-50.64	0.00	
3900.00	10.00	288.00	3876.20	88.57	-272.60	-53.91	0.00	
4000.00	10.00	288.00	3974.68	93.94	-289.12	-57.17	0.00	
4100.00	10.00	288.00	4073.16	99.30	-305.63	-60.44	0.00	
4200.00	10.00	288.00	4171.64	104.67	-322.15	-63.70	0.00	
4300.00	10.00	288.00	4270.12	110.04	-338.66	-66.97	0.00	
4400.00	10.00	288.00	4368.60	115.40	-355.18	-70.24	0.00	
4500.00	10.00	288.00	4467.08	120.77	-371.69	-73.50	0.00	
4600.00	10.00	288.00	4565.56	126.13	-388.21	-76.77	0.00	
4700.00	10.00	288.00	4664.04	131.50	-404.72	-80.03	0.00	
4800.00	10.00	288.00	4762.52	136.87	-421.24	-83.30	0.00	
4900.00	10.00	288.00	4861.00	142.23	-437.75	-86.56	0.00	
5000.00	10.00	288.00	4959.48	147.60	-454.27	-89.83	0.00	
5100.00	10.00	288.00	5057.97	152.96	-470.78	-93.10	0.00	
5112.22	10.00	288.00	5070.00	153.62	-472.80	-93.49	0.00	Base of Salt
5200.00	10.00	288.00	5156.45	158.33	-487.30	-96.36	0.00	
5300.00	10.00	288.00	5254.93	163.70	-503.81	-99.63	0.00	
5376.23	10.00	288.00	5330.00	167.79	-516.40	-102.12	0.00	Delaware
5400.00	10.00	288.00	5353.41	169.06	-520.33	-102.89	0.00	
5500.00	10.00	288.00	5451.89	174.43	-536.84	-106.16	0.00	
5600.00	10.00	288.00	5550.37	179.79	-553.36	-109.42	0.00	
5700.00	10.00	288.00	5648.85	185.16	-569.87	-112.69	0.00	
5800.00	10.00	288.00	5747.33	190.53	-586.39	-115.96	0.00	
5900.00	10.00	288.00	5845.81	195.89	-602.90	-119.22	0.00	
6000.00	10.00	288.00	5944.29	201.26	-619.42	-122.49	0.00	
6100.00	10.00	288.00	6042.77	206.62	-635.93	-125.75	0.00	
6200.00	10.00	288.00	6141.25	211.99	-652.44	-129.02	0.00	
6300.00	10.00	288.00	6239.73	217.36	-668.96	-132.28	0.00	
6400.00	10.00	288.00	6338.22	222.72	-685.47	-135.55	0.00	
6437.35	10.00	288.00	6375.00	224.73	-691.64	-136.77	0.00	Cherry Canyon
6500.00	10.00	288.00	6436.70	228.09	-701.99	-138.82	0.00	

BOLL WEEVIL 27-34 FED COM 7H



Well: BOLL WEEVIL 27-34 FED COM 7H
 County: Lea
 Wellbore: Permit Plan
 Design: Permit Plan #1

Geodetic System: US State Plane 1983
 Datum: North American Datum 1927
 Ellipsoid: Clarke 1866
 Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
6600.00	10.00	288.00	6535.18	233.45	-718.50	-142.08	0.00	
6700.00	10.00	288.00	6633.66	238.82	-735.02	-145.35	0.00	
6800.00	10.00	288.00	6732.14	244.19	-751.53	-148.61	0.00	
6900.00	10.00	288.00	6830.62	249.55	-768.05	-151.88	0.00	
7000.00	10.00	288.00	6929.10	254.92	-784.56	-155.15	0.00	
7100.00	10.00	288.00	7027.58	260.28	-801.08	-158.41	0.00	
7200.00	10.00	288.00	7126.06	265.65	-817.59	-161.68	0.00	
7300.00	10.00	288.00	7224.54	271.01	-834.11	-164.94	0.00	
7400.00	10.00	288.00	7323.02	276.38	-850.62	-168.21	0.00	
7500.00	10.00	288.00	7421.50	281.75	-867.14	-171.47	0.00	
7600.00	10.00	288.00	7519.99	287.11	-883.65	-174.74	0.00	
7700.00	10.00	288.00	7618.47	292.48	-900.17	-178.01	0.00	
7800.00	10.00	288.00	7716.95	297.84	-916.68	-181.27	0.00	
7900.00	10.00	288.00	7815.43	303.21	-933.20	-184.54	0.00	
7942.11	10.00	288.00	7856.90	305.47	-940.15	-185.92	0.00	Drop to Vertical
8000.00	8.84	288.00	7914.01	308.40	-949.16	-187.70	2.00	
8066.67	7.51	288.00	7980.00	311.33	-958.18	-189.48	2.00	Brushy Canyon
8100.00	6.84	288.00	8013.07	312.62	-962.14	-190.26	2.00	
8200.00	4.84	288.00	8112.54	315.76	-971.82	-192.18	2.00	
8300.00	2.84	288.00	8212.31	317.83	-978.19	-193.44	2.00	
8400.00	0.84	288.00	8312.25	318.83	-981.25	-194.04	2.00	
8442.11	0.00	288.00	8354.37	318.92	-981.55	-194.10	2.00	Hold Vertical
8500.00	0.00	179.53	8412.25	318.92	-981.55	-194.10	0.00	
8600.00	0.00	179.53	8512.25	318.92	-981.55	-194.10	0.00	
8700.00	0.00	179.53	8612.25	318.92	-981.55	-194.10	0.00	
8800.00	0.00	179.53	8712.25	318.92	-981.55	-194.10	0.00	
8900.00	0.00	179.53	8812.25	318.92	-981.55	-194.10	0.00	
9000.00	0.00	179.53	8912.25	318.92	-981.55	-194.10	0.00	
9100.00	0.00	179.53	9012.25	318.92	-981.55	-194.10	0.00	
9200.00	0.00	179.53	9112.25	318.92	-981.55	-194.10	0.00	
9300.00	0.00	179.53	9212.25	318.92	-981.55	-194.10	0.00	
9400.00	0.00	179.53	9312.25	318.92	-981.55	-194.10	0.00	
9500.00	0.00	179.53	9412.25	318.92	-981.55	-194.10	0.00	
9600.00	0.00	179.53	9512.25	318.92	-981.55	-194.10	0.00	
9700.00	0.00	179.53	9612.25	318.92	-981.55	-194.10	0.00	
9800.00	0.00	179.53	9712.25	318.92	-981.55	-194.10	0.00	
9900.00	0.00	179.53	9812.25	318.92	-981.55	-194.10	0.00	
10000.00	0.00	179.53	9912.25	318.92	-981.55	-194.10	0.00	
10100.00	0.00	179.53	10012.25	318.92	-981.55	-194.10	0.00	
10200.00	0.00	179.53	10112.25	318.92	-981.55	-194.10	0.00	
10300.00	0.00	179.53	10212.25	318.92	-981.55	-194.10	0.00	
10400.00	0.00	179.53	10312.25	318.92	-981.55	-194.10	0.00	
10500.00	0.00	179.53	10412.25	318.92	-981.55	-194.10	0.00	
10600.00	0.00	179.53	10512.25	318.92	-981.55	-194.10	0.00	
10677.75	0.00	179.53	10590.00	318.92	-981.55	-194.10	0.00	Bone Spring 1st
10700.00	0.00	179.53	10612.25	318.92	-981.55	-194.10	0.00	
10800.00	0.00	179.53	10712.25	318.92	-981.55	-194.10	0.00	
10900.00	0.00	179.53	10812.25	318.92	-981.55	-194.10	0.00	
11000.00	0.00	179.53	10912.25	318.92	-981.55	-194.10	0.00	
11100.00	0.00	179.53	11012.25	318.92	-981.55	-194.10	0.00	
11200.00	0.00	179.53	11112.25	318.92	-981.55	-194.10	0.00	
11227.75	0.00	179.53	11140.00	318.92	-981.55	-194.10	0.00	Bone Spring 2nd
11300.00	0.00	179.53	11212.25	318.92	-981.55	-194.10	0.00	
11400.00	0.00	179.53	11312.25	318.92	-981.55	-194.10	0.00	
11500.00	0.00	179.53	11412.25	318.92	-981.55	-194.10	0.00	
11600.00	0.00	179.53	11512.25	318.92	-981.55	-194.10	0.00	
11700.00	0.00	179.53	11612.25	318.92	-981.55	-194.10	0.00	
11800.00	0.00	179.53	11712.25	318.92	-981.55	-194.10	0.00	
11900.00	0.00	179.53	11812.25	318.92	-981.55	-194.10	0.00	
12000.00	0.00	179.53	11912.25	318.92	-981.55	-194.10	0.00	
12100.00	0.00	179.53	12012.25	318.92	-981.55	-194.10	0.00	
12200.00	0.00	179.53	12112.25	318.92	-981.55	-194.10	0.00	
12287.75	0.00	179.53	12200.00	318.92	-981.55	-194.10	0.00	Bone Spring 3rd
12300.00	0.00	179.53	12212.25	318.92	-981.55	-194.10	0.00	
12364.79	0.00	179.53	12277.04	318.92	-981.55	-194.10	0.00	KOP
12400.00	3.52	179.53	12312.23	317.84	-981.54	-193.03	10.00	
12500.00	13.52	179.53	12411.00	303.04	-981.42	-178.36	10.00	
12600.00	23.52	179.53	12505.70	271.32	-981.16	-146.92	10.00	
12700.00	33.52	179.53	12593.45	223.63	-980.76	-99.65	10.00	
12732.47	36.77	179.53	12620.00	204.95	-980.61	-81.13	10.00	Wolfcamp / Point of Penetration

BOLL WEEVIL 27-34 FED COM 7H



Well: BOLL WEEVIL 27-34 FED COM 7H
County: Lea
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (")	AZI (")	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
12800.00	43.52	179.53	12671.59	161.43	-980.25	-38.00	10.00	
12900.00	53.52	179.53	12737.74	86.61	-979.64	36.16	10.00	
13000.00	63.52	179.53	12789.90	1.44	-978.94	120.58	10.00	
13100.00	73.52	179.53	12826.47	-91.49	-978.18	212.70	10.00	
13200.00	83.52	179.53	12846.34	-189.37	-977.37	309.70	10.00	
13264.79	90.00	179.53	12850.00	-254.02	-976.85	373.79	10.00	Landing Point
13300.00	90.00	179.53	12850.00	-289.22	-976.56	408.68	0.00	
13400.00	90.00	179.53	12850.00	-389.22	-975.74	507.80	0.00	
13500.00	90.00	179.53	12850.00	-489.22	-974.92	606.91	0.00	
13600.00	90.00	179.53	12850.00	-589.21	-974.10	706.03	0.00	
13700.00	90.00	179.53	12850.00	-689.21	-973.27	805.14	0.00	
13800.00	90.00	179.53	12850.00	-789.21	-972.45	904.26	0.00	
13900.00	90.00	179.53	12850.00	-889.20	-971.63	1003.37	0.00	
14000.00	90.00	179.53	12850.00	-989.20	-970.81	1102.49	0.00	
14100.00	90.00	179.53	12850.00	-1089.20	-969.99	1201.60	0.00	
14200.00	90.00	179.53	12850.00	-1189.19	-969.17	1300.71	0.00	
14300.00	90.00	179.53	12850.00	-1289.19	-968.35	1399.83	0.00	
14400.00	90.00	179.53	12850.00	-1389.19	-967.53	1498.94	0.00	
14500.00	90.00	179.53	12850.00	-1489.18	-966.71	1598.06	0.00	
14600.00	90.00	179.53	12850.00	-1589.18	-965.89	1697.17	0.00	
14700.00	90.00	179.53	12850.00	-1689.18	-965.07	1796.29	0.00	
14800.00	90.00	179.53	12850.00	-1789.17	-964.25	1895.40	0.00	
14900.00	90.00	179.53	12850.00	-1889.17	-963.43	1994.52	0.00	
15000.00	90.00	179.53	12850.00	-1989.17	-962.61	2093.63	0.00	
15100.00	90.00	179.53	12850.00	-2089.16	-961.79	2192.75	0.00	
15200.00	90.00	179.53	12850.00	-2189.16	-960.97	2291.86	0.00	
15300.00	90.00	179.53	12850.00	-2289.16	-960.15	2390.98	0.00	
15400.00	90.00	179.53	12850.00	-2389.15	-959.33	2490.09	0.00	
15500.00	90.00	179.53	12850.00	-2489.15	-958.50	2589.21	0.00	
15600.00	90.00	179.53	12850.00	-2589.15	-957.68	2688.32	0.00	
15700.00	90.00	179.53	12850.00	-2689.14	-956.86	2787.43	0.00	
15800.00	90.00	179.53	12850.00	-2789.14	-956.04	2886.55	0.00	
15900.00	90.00	179.53	12850.00	-2889.14	-955.22	2985.66	0.00	
16000.00	90.00	179.53	12850.00	-2989.13	-954.40	3084.78	0.00	
16100.00	90.00	179.53	12850.00	-3089.13	-953.58	3183.89	0.00	
16200.00	90.00	179.53	12850.00	-3189.13	-952.76	3283.01	0.00	
16300.00	90.00	179.53	12850.00	-3289.12	-951.94	3382.12	0.00	
16400.00	90.00	179.53	12850.00	-3389.12	-951.12	3481.24	0.00	
16500.00	90.00	179.53	12850.00	-3489.12	-950.30	3580.35	0.00	
16600.00	90.00	179.53	12850.00	-3589.11	-949.48	3679.47	0.00	
16700.00	90.00	179.53	12850.00	-3689.11	-948.66	3778.58	0.00	
16800.00	90.00	179.53	12850.00	-3789.11	-947.84	3877.70	0.00	
16900.00	90.00	179.53	12850.00	-3889.10	-947.02	3976.81	0.00	
17000.00	90.00	179.53	12850.00	-3989.10	-946.20	4075.93	0.00	
17100.00	90.00	179.53	12850.01	-4089.10	-945.38	4175.04	0.00	
17200.00	90.00	179.53	12850.01	-4189.09	-944.56	4274.15	0.00	
17300.00	90.00	179.53	12850.01	-4289.09	-943.73	4373.27	0.00	
17400.00	90.00	179.53	12850.01	-4389.09	-942.91	4472.38	0.00	
17500.00	90.00	179.53	12850.01	-4489.08	-942.09	4571.50	0.00	
17600.00	90.00	179.53	12850.01	-4589.08	-941.27	4670.61	0.00	
17700.00	90.00	179.53	12850.01	-4689.08	-940.45	4769.73	0.00	
17800.00	90.00	179.53	12850.01	-4789.07	-939.63	4868.84	0.00	
17900.00	90.00	179.53	12850.01	-4889.07	-938.81	4967.96	0.00	
18000.00	90.00	179.53	12850.01	-4989.07	-937.99	5067.07	0.00	
18100.00	90.00	179.53	12850.01	-5089.06	-937.17	5166.19	0.00	
18200.00	90.00	179.53	12850.01	-5189.06	-936.35	5265.30	0.00	
18300.00	90.00	179.53	12850.01	-5289.06	-935.53	5364.42	0.00	
18400.00	90.00	179.53	12850.01	-5389.05	-934.71	5463.53	0.00	
18500.00	90.00	179.53	12850.01	-5489.05	-933.89	5562.64	0.00	
18600.00	90.00	179.53	12850.01	-5589.05	-933.07	5661.76	0.00	
18700.00	90.00	179.53	12850.01	-5689.04	-932.25	5760.87	0.00	
18800.00	90.00	179.53	12850.01	-5789.04	-931.43	5859.99	0.00	
18900.00	90.00	179.53	12850.01	-5889.04	-930.61	5959.10	0.00	
19000.00	90.00	179.53	12850.01	-5989.03	-929.79	6058.22	0.00	
19100.00	90.00	179.53	12850.01	-6089.03	-928.96	6157.33	0.00	
19200.00	90.00	179.53	12850.01	-6189.03	-928.14	6256.45	0.00	
19300.00	90.00	179.53	12850.01	-6289.02	-927.32	6355.56	0.00	
19400.00	90.00	179.53	12850.01	-6389.02	-926.50	6454.68	0.00	
19500.00	90.00	179.53	12850.01	-6489.02	-925.68	6553.79	0.00	
19600.00	90.00	179.53	12850.01	-6589.01	-924.86	6652.91	0.00	



Well: BOLL WEEVIL 27-34 FED COM 7H

County: Lea

Wellbore: Permit Plan

Design: Permit Plan #1

Geodetic System: US State Plane 1983

Datum: North American Datum 1927

Ellipsoid: Clarke 1866

Zone: 3001 - NM East (NAD83)

MD	INC	AZI	TVD	NS	EW	VS	DLS	Comment
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100ft)	
19700.00	90.00	179.53	12850.01	-6689.01	-924.04	6752.02	0.00	
19800.00	90.00	179.53	12850.01	-6789.01	-923.22	6851.14	0.00	
19900.00	90.00	179.53	12850.01	-6889.00	-922.40	6950.25	0.00	
20000.00	90.00	179.53	12850.01	-6989.00	-921.58	7049.36	0.00	
20100.00	90.00	179.53	12850.01	-7089.00	-920.76	7148.48	0.00	
20200.00	90.00	179.53	12850.01	-7188.99	-919.94	7247.59	0.00	
20246.48	90.00	179.53	12850.01	-7235.47	-919.56	7293.66	0.00	exit
20300.00	90.00	179.53	12850.01	-7288.99	-919.12	7346.71	0.00	
20326.48	90.00	179.53	12850.00	-7315.47	-918.92	7372.96	0.00	BHL

BOLL WEEVIL 27-34 FED COM 7H

Well: BOLL WEEVIL 27-34 FED COM 7H

County: Lea

Wellbore: Permit Plan

Design: Permit Plan #1

Geodetic System: US State Plane 1983

Datum: North American Datum 1927

Ellipsoid: Clarke 1866

Zone: 3001 - NM East (NAD83)

MD	INC	AZI	TVD	NS	EW	VS	DLS	Comment
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100ft)	

1. Geologic Formations

TVD of target	12850	Pilot hole depth	N/A
MD at TD:	20326	Deepest expected fresh water	

Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/Target Zone?	Hazards*
Rustler	860		
Salt	1200		
Base of Salt	5070		
Delaware	5330		
Cherry Canyon	6375		
Brushy Canyon	7980		
Bone Spring 1st	10590		
Bone Spring 2nd	11140		
Bone Spring 3rd	12200		
Wolfcamp	12620		

*H2S, water flows, loss of circulation, abnormal pressures, etc.

BOLL WEEVIL 27-34 FED COM 7H

2. Casing Program (Primary Design)

Hole Size	Csg. Size	Wt (PPF)	Grade	Conn	Casing Interval		Casing Interval	
					From (MD)	To (MD)	From (TVD)	To (TVD)
14 3/4	10 3/4	45 1/2	J-55	BTC	0	885	0	885
9 7/8	8 5/8	32	P110	Sprint FJ	0	12264	0	12264
7 7/8	5 1/2	20	P110	DWC / C-IS+	0	20326	0	12850

•All casing strings will be tested in accordance with 43 CFR 3172. Must have table for contingency casing.

3. Cementing Program (Primary Design)

Assuming no returns are established while drilling, Devon requests to pump a two stage cement job on the intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. The final cement top will be verified by Echo-meter. Devon will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program. Devon will report to the BLM the volume of fluid (limited to 1 bbls) used to flush intermediate casing valves following backside cementing procedures.

Casing	# Sks	TOC	Wt. ppg	Yld (ft3/sack)	Slurry Description
Surface	537	Surf	13.2	1.44	Lead: Class C Cement + additives
Int 1	568	Surf	13.0	2.3	2nd State: Bradenhead Squeeze - Lead: Class C Cement + additives
	488	8066	13.2	1.44	Tail: Class H / C + additives
Production	117	10365	9	3.27	Lead: Class H / C + additives
	1054	12365	13.2	1.44	Tail: Class H / C + additives

Casing String	% Excess
Surface	50%
Intermediate 1	30%
Prod	10%

BOLL WEEVIL 27-34 FED COM 7H

4. Pressure Control Equipment (Three String Design)

BOP installed and tested before drilling which hole?		Size?	Min. Required WP	Type	✓	Tested to:	
Int 1		13-5/8"	5M	Annular		X	50% of rated working pressure
				Blind Ram		X	5M
				Pipe Ram			
				Double Ram		X	
				Other*			
Production		13-5/8"	10M	Annular (5M)		X	100% of rated working pressure
				Blind Ram		X	10M
				Pipe Ram			
				Double Ram		X	
				Other*			
				Annular (5M)			
				Blind Ram			
				Pipe Ram			
				Double Ram			
				Other*			
N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.						
Y	A variance is requested to run a 5 M annular on a 10M system						

BOLL WEEVIL 27-34 FED COM 7H

5. Mud Program (Three String Design)

Section	Type	Weight (ppg)
Surface	FW Gel	8.5-9
Intermediate	DBE / Cut Brine	10-10.5
Production	OBM	10-10.5

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing	
X	Will run GR/CNL from TD to surface (horizontal well - vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain.
	Coring? If yes, explain.

Additional logs planned		Interval
	Resistivity	Int. shoe to KOP
	Density	Int. shoe to KOP
X	CBL	Production casing
X	Mud log	Intermediate shoe to TD
	PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH pressure at deepest TVD	7016
Abnormal temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H ₂ S) monitors will be installed prior to drilling out the surface shoe. If H ₂ S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of 43 CFR 3176. If Hydrogen Sulfide is encountered measured values and formations will be provided to the BLM.	
N	H ₂ S is present
Y	H ₂ S plan attached.

BOLL WEEVIL 27-34 FED COM 7H

8. Other facets of operation

Is this a walking operation? Potentially

- 1 If operator elects, drilling rig will batch drill the surface holes and run/cement surface casing; walking the rig to next wells on the pad.
- 2 The drilling rig will then batch drill the intermediate sections and run/cement intermediate casing; the wellbore will be isolated with a blind flange and pressure gauge installed for monitoring the well before walking to the next well.
- 3 The drilling rig will then batch drill the production hole sections on the wells with OBM, run/cement production casing, and install TA caps or tubing heads for completions.

NOTE: During batch operations the drilling rig will be moved from well to well however, it will not be removed from the pad until all wells have production casing run/cemented.

Will be pre-setting casing? Potentially

- 1 Spudder rig will move in and batch drill surface hole.
 - a. Rig will utilize fresh water based mud to drill surface hole to TD. Solids control will be handled entirely on a closed loop basis.,
- 2 After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (43 CFR 3172, all COAs and NMOCD regulations).
- 3 The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
- 4 A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
- 5 Spudder rig operations is expected to take 4-5 days per well on a multi-well pa.
- 6 The NMOCD will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 7 Drilling operations will be performed with drilling rig. A that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The NMOCD will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.

Attachments

X Directional Plan
 Other, describe

Issued on: 16 Dec. 2020 by Logan Van Gorp



Connection Data Sheet

OD	Weight (lb/ft)	Wall Th.	Grade	Alt. Drift:	Connection
8 5/8 in.	Nominal: 32.00 Plain End: 31.13	0.352 in.	P110EC	7.875 in.	VAM® SPRINT-FJ

PIPE PROPERTIES		
Nominal OD	8.625	in.
Nominal ID	7.921	in.
Nominal Cross Section Area	9.149	sqin.
Grade Type	High Yield	
Min. Yield Strength	125	ksi
Max. Yield Strength	140	ksi
Min. Ultimate Tensile Strength	135	ksi


CONNECTION PROPERTIES		
Connection Type	Semi-Premium Integral Flush	
Connection OD (nom):	8.665	in.
Connection ID (nom):	7.954	in.
Make-Up Loss	2.614	in.
Critical Cross Section	6.038	sqin.
Tension Efficiency	65.0	% of pipe
Compression Efficiency	65.0	% of pipe
Internal Pressure Efficiency	80.0	% of pipe
External Pressure Efficiency	100	% of pipe

CONNECTION PERFORMANCES		
Tensile Yield Strength	744	klb
Compression Resistance	744	klb
Max. Internal Pressure	7,150	psi
Structural Collapse Resistance	4,000	psi
Max. Bending with Sealability	41	°/100ft
Max. Bending with Sealability	10	°/100ft

* 87.5% RBW

TORQUE VALUES		
Min. Make-up torque	15,000	ft.lb
Opt. Make-up torque	16,500	ft.lb
Max. Make-up torque	18,000	ft.lb
Max. Torque with Sealability (MTS)	TBD	ft.lb

VAM® SPRINT-FJ is a semi-premium flush connection designed for shale applications, where maximum clearance and high tension capacity are required for intermediate casing strings.

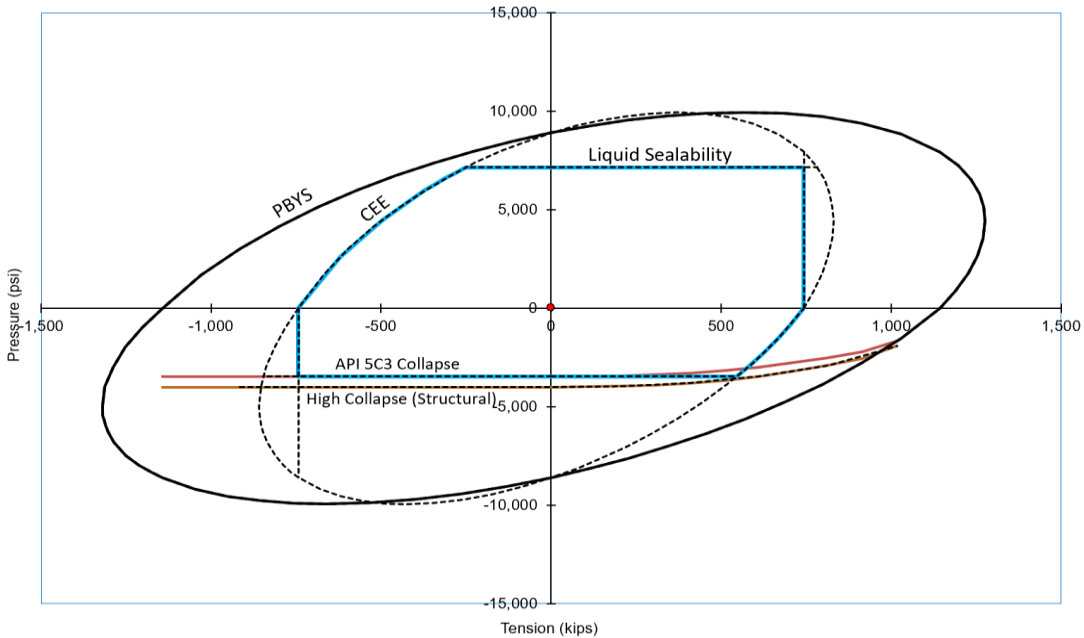

canada@vamfieldservice.com
usa@vamfieldservice.com
mexico@vamfieldservice.com
brazil@vamfieldservice.com

Do you need help on this product? - Remember no one knows VAM® like VAM®

uk@vamfieldservice.com
dubai@vamfieldservice.com
nigeria@vamfieldservice.com
angola@vamfieldservice.com

china@vamfieldservice.com
baku@vamfieldservice.com
singapore@vamfieldservice.com
australia@vamfieldservice.com

Over 140 VAM® Specialists available worldwide 24/7 for Rig Site Assistance





10-3/4" 45.50# 0.400" J-55

Dimensions (Nominal)

Outside Diameter	10.750	in.
Wall	0.400	in.
Inside Diameter	9.950	in.
Drift	9.875	in.
Weight, T&C	45.500	lbs/ft
Weight, PE	44.260	lbs/ft

Performance Properties

Collapse	2090	psi
Internal Yield Pressure at Minimum Yield		
PE	3580	psi
STC	3580	psi
BTC	3580	psi
Yield Strength, Pipe Body	715	1000 lbs
Joint Strength		
STC	493	1000 lbs
BTC	796	1000 lbs
BTC Special Clearance (11.25" OD Cplg)	506	1000 lbs

Note: SeAH Steel has produced this specification sheet for general information only. SeAH does not assume liability or responsibility for any loss or injury resulting from the use of information or data contained herein. All applications for the material described are at the customer's own risk and responsibility.

Well Name: BOLL WEEVIL 27-34 FED COM	Well Location: T26S / R34E / SEC 27 / NENE / 32.020642 / -103.450788	County or Parish/State: LEA / NM
Well Number: 7H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM100569	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002547954	Well Status: Approved Application for Permit to Drill	Operator: DEVON ENERGY PRODUCTION COMPANY LP

Notice of Intent

Sundry ID: 2762115

Type of Submission: Notice of Intent

Type of Action: APD Change

Date Sundry Submitted: 11/16/2023

Time Sundry Submitted: 04:15

Date proposed operation will begin: 11/16/2023

Procedure Description: Devon Energy Production Company L.P. respectfully requests the following changes to the approved APD: BHL change from 20 FSL & 1010 FEL to 20 FSL & 1455 FEL, both 34-26S-34E Dedicated acreage change from 471.68 acs to 235.87 acs. Pooling Order in process. TVD/MD change from 12800'/20288' to 12850'/20326' Casing program change: Surface, Intermediate, and Production Casing size changes. Cement volume changes to accommodate casing change. Please see attached revised C-102 and drilling & directional plans and other supporting documentation.

NOI Attachments

Procedure Description

BOLL_WEEVIL_27_34_FED_COM_7H_C_102_BHL_SPACING_20231201134327.pdf

BOLL_WEEVIL_27_34_FED_COM_7H_Directional_Plan_11_16_23_20231116161403.pdf

BOLL_WEEVIL_27_34_FED_COM_7H_20231116161404.pdf

8.625_32lb_P110EC_SPRINT_FJ_VST_20231116161334.pdf

10.75_45.50_J55_BTC_20231116161332.pdf

5.5_20lb_P110EC_DWC_C_IS_20231116161322.pdf

Well Name: BOLLWEE 4127-34 FED COM	Well Location: T26S / R34E / SEC 27 / NENE / 32.020642 / -103.450788	County or Parish/State: LEA / NM
Well Number: 7H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM100569	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002547954	Well Status: Approved Application for Permit to Drill	Operator: DEVON ENERGY PRODUCTION COMPANY LP

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: REBECCA DEAL Signed on: DEC 01, 2023 01:43 PM
Name: DEVON ENERGY PRODUCTION COMPANY LP
Title: Regulatory Analyst
Street Address: 333 W SHERIDAN AVE
City: OKLAHOMA CITY State: OK
Phone: (303) 299-1406
Email address: REBECCA.DEAL@DVN.COM

Field

Representative Name:
Street Address:
City: State: Zip:
Phone:
Email address:

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Devon Energy Production Company LP
LEASE NO.:	NMNM100569
LOCATION:	Section 27, T.26 S., R.34 E., NMPM
COUNTY:	Lea County, New Mexico

WELL NAME & NO.:	Boll Weevil 27-34 Fed Com 7H
SURFACE HOLE FOOTAGE:	372'/N & 477'/E
BOTTOM HOLE FOOTAGE:	20'/S & 1455'/E
ATS/API ID:	3002547954
APD ID:	10400047164
Sundry ID:	2762115

COA

H2S	Yes v		
Potash	None v		
Cave/Karst Potential	Low v		
Cave/Karst Potential	☐ Critical		
Variance	☒ None	☒ Flex Hose	☒ Other
Wellhead	Conventional and Multibowl v		
Other	☐ 4 String	Capitan Reef v	☐ WIPP
Other	Pilot Hole v	☐ Open Annulus	
Cementing	Contingency Squeeze v	Echo-Meter v	Primary Cement Squeeze v
Special Requirements	☐ Water Disposal/Injection	☒ COM	☐ Unit
Special Requirements	☐ Batch Sundry		
Special Requirements Variance	☐ Break Testing	☐ Offline Cementing	☐ Casing Clearance

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated 500 feet prior to drilling into the **Wolfcamp** formation. As a result, the Hydrogen Sulfide area must meet **43 CFR part 3170 Subpart 3176** requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The **10-3/4** inch surface casing shall be set at approximately **1055 feet** (a minimum of **25 feet (Lea County)** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface. The surface hole shall be **14 3/4** inch in diameter.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the **8-5/8** inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

Option 2:

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- a. First stage: Operator will cement with intent to reach the top of the **Brushy Canyon at 7980' (488 sxs Class H/C+ additives)**.
- b. Second stage:
 - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified. (**Squeeze 568 sxs Class C**)

Operator has proposed to pump down 10-3/4" X 8-5/8" annulus after primary cementing stage. Operator must run Echo-meter to verify Cement Slurry/Fluid top in the annulus Or operator shall run a CBL from TD of the 8-5/8" casing to surface after the second stage BH to verify TOC.

Submit results to the BLM. No displacement fluid/wash out shall be utilized at the top of the cement slurry between second stage BH and top out. Operator must run one CBL per Well Pad.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

3. The minimum required fill of cement behind the **5-1/2** inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi**.
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **8-5/8** inch intermediate casing shoe shall be **10,000 (10M) psi**. **Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**

Option 2:

Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the **10-3/4** inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M)** psi. **Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.

D. SPECIAL REQUIREMENT (S)**Communitization Agreement**

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in **43 CFR part 3170 Subpart 3171**
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

BLM_NM_CFO_DrillingNotifications@BLM.GOV

(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,

(575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a

digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172** and **API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after

installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR**

part 3170 Subpart 3172.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

LVO 12/18/2023

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.	NMNM100569
6. If Indian, Allottee or Tribe Name	

SUBMIT IN TRIPLICATE - Other instructions on page 2		7. If Unit of CA/Agreement, Name and/or No.
1. Type of Well ☒ Oil Well ☐ Gas Well ☐ Other		8. Well Name and No. BOLL WEEVIL 27-34 FED COM/7H
2. Name of Operator DEVON ENERGY PRODUCTION COMPANY LP		9. API Well No. 3002547954
3a. Address 333 WEST SHERIDAN AVE, OKLAHOMA CITY,	3b. Phone No. (include area code) (405) 235-3611	10. Field and Pool or Exploratory Area WC-025 G-08 S263412K/BONE SPRING
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) SEC 27/T26S/R34E/NMP		11. Country or Parish, State LEA/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA				
TYPE OF SUBMISSION	TYPE OF ACTION			
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other
	☒ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

Devon Energy Production Company L.P. respectfully requests the following changes to the approved APD:
BHL change from 20 FSL & 1010 FEL to 20 FSL & 1455 FEL, both 34-26S-34E
Dedicated acreage change from 471.68 acs to 235.87 acs. Pooling Order in process.
TVD/MD change from 12800/20288 to 12850/20326'
Casing program change: Surface, Intermediate, and Production Casing size changes. Cement volume changes to accommodate casing change.
Please see attached revised C-102 and drilling & directional plans and other supporting documentation.

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) REBECCA DEAL / Ph: (303) 299-1406	Title Regulatory Analyst
Signature (Electronic Submission)	Date 12/01/2023

THE SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NENE / 372 FNL / 477 FEL / TWSP: 26S / RANGE: 34E / SECTION: 27 / LAT: 32.020642 / LONG: -103.450788 (TVD: 0 feet, MD: 0 feet)

PPP: NENE / 100 FNL / 1010 FEL / TWSP: 26S / RANGE: 34E / SECTION: 27 / LAT: 32.021394 / LONG: -103.452508 (TVD: 12461 feet, MD: 12488 feet)

BHL: SENE / 20 FSL / 1010 FEL / TWSP: 26S / RANGE: 34E / SECTION: 34 / LAT: 32.000335 / LONG: -103.45251 (TVD: 12800 feet, MD: 20288 feet)

CONFIDENTIAL

DISTRICT I
1625 N. FRENCH DR., HOBBS, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. FIRST ST., ARTESIA, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 RIO BRAZOS RD., AZTEC, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. ST. FRANCIS DR., SANTA FE, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DR.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025-47954	Pool Code 96776	Pool Name JABALINA;WOLFCAMP, SOUTHWEST
Property Code 329772	Property Name BOLL WEEVIL 27-34 FED COM	Well Number 7H
OGRID No. 6137	Operator Name DEVON ENERGY PRODUCTION COMPANY, L.P.	Elevation 3219.7'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	27	26-S	34-E		372	NORTH	477	EAST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
2	34	26-S	34-E		20	SOUTH	1455	EAST	LEA

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
235.87			Pooling Order in process.

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

BOLL WEEVIL 27-34 FED COM 7H

EL: 3219.7'
GEODETIC COORDINATES NAD 83
NMSP EAST SURFACE LOCATION
N: 372365.45
E: 814859.36
LAT: 32.020642
LON: 103.450788

KICK OFF POINT

CALLS: 47' FNL 1456' FEL
N: 372684
E: 813878
LAT: 32.0214
LON: -103.4540

FIRST TAKE POINT (PPP 1)

100' FNL 1455' FEL SEC. 27
N: 372632.21
E: 813879.15
LAT: 32.021397
LON: 103.453944

LAST TAKE POINT


100' FSL 1455' FEL SEC. 34
N: 365049.98
E: 813940.44
LAT: 32.000555
LON: 103.453945

BOTTOM OF HOLE

N: 364969.98
E: 813941.07
LAT: 32.000335
LON: 103.453945

(PPP 2)

0' FSL 1456' FEL SEC. 27

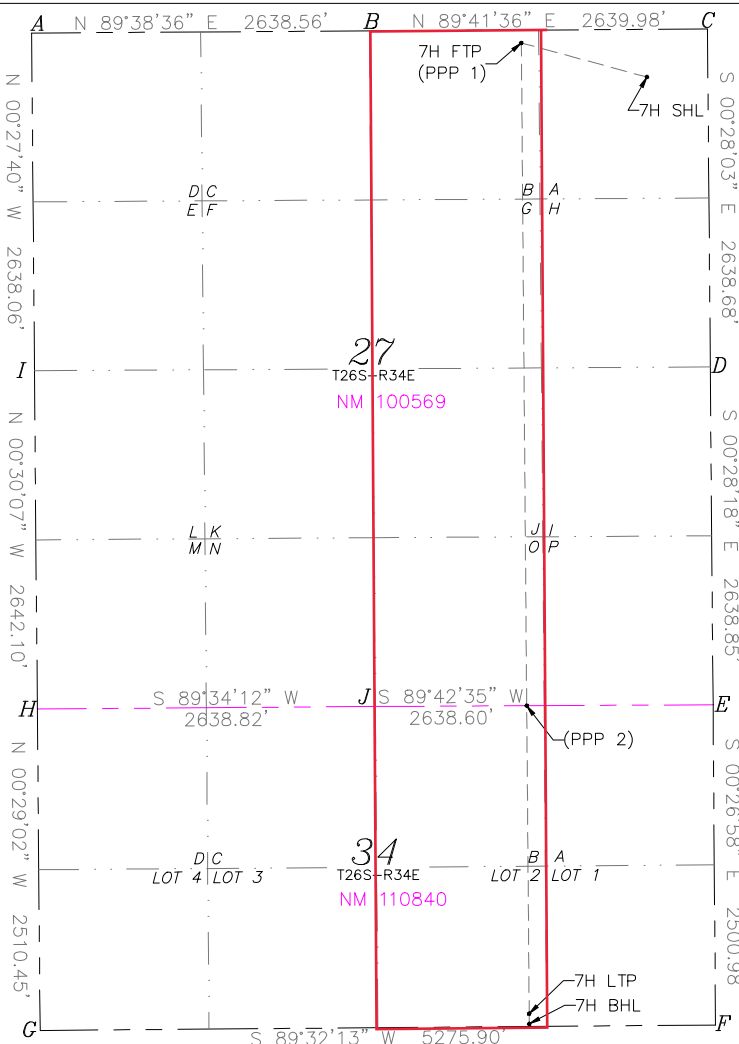

OPERATOR CERTIFICATION

I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Rebecca Deal 11/16/2023
Signature Date

Rebecca Deal, Regulatory Analyst
Printed Name

Rebecca.deal@dvn.com
E-mail Address


SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

07/2019

Date of Survey

Signature & Seal of Professional Surveyor



11/13/2023

Certificate No. 23261 A.DeHOYOS

DRAWN BY: CM

Intent ☒ As Drilled ☐

API #		
Operator Name: DEVON ENERGY PRODUCTION COMPANY, LP.	Property Name: BOLL WEEVIL 27-34 FED COM	Well Number 7H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
	27	26S	34E		47	FNL	1456	FEL	LEA
Latitude 32.0214					Longitude -103.4540				NAD 83

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
B	27	26-S	34-E		100	NORTH	1455	EAST	LEA
Latitude 32.021397					Longitude 103.453944				NAD 83

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
	34	26-S	34-E	2	100	SOUTH	1455	EAST	LEA
Latitude 32.000555					Longitude 103.453945				NAD 83

Is this well the defining well for the Horizontal Spacing Unit?

☐ N

Is this well an infill well?

☐ Y

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name: Devon Energy Production Company, L.P.	Property Name: Boll Weevil 27-34 Fed Com	Well Number 6H


KZ 06/29/2018



Well: BOLL WEEVIL 27-34 FED COM 7H
County: Lea
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL
2000.00	0.00	288.00	2000.00	0.00	0.00	0.00	0.00	Start Tangent
2500.00	10.00	288.00	2497.47	13.45	-41.39	-8.19	2.00	Hold Tangent
7942.11	10.00	288.00	7856.90	305.47	-940.15	-185.92	0.00	Drop to Vertical
8442.11	0.00	288.00	8354.37	318.92	-981.55	-194.10	2.00	Hold Vertical
12364.79	0.00	179.53	12277.04	318.92	-981.55	-194.10	0.00	KOP
13264.79	90.00	179.53	12850.00	-254.02	-976.85	373.79	10.00	Landing Point
20326.48	90.00	179.53	12850.00	-7315.47	-918.92	7372.96	0.00	BHL

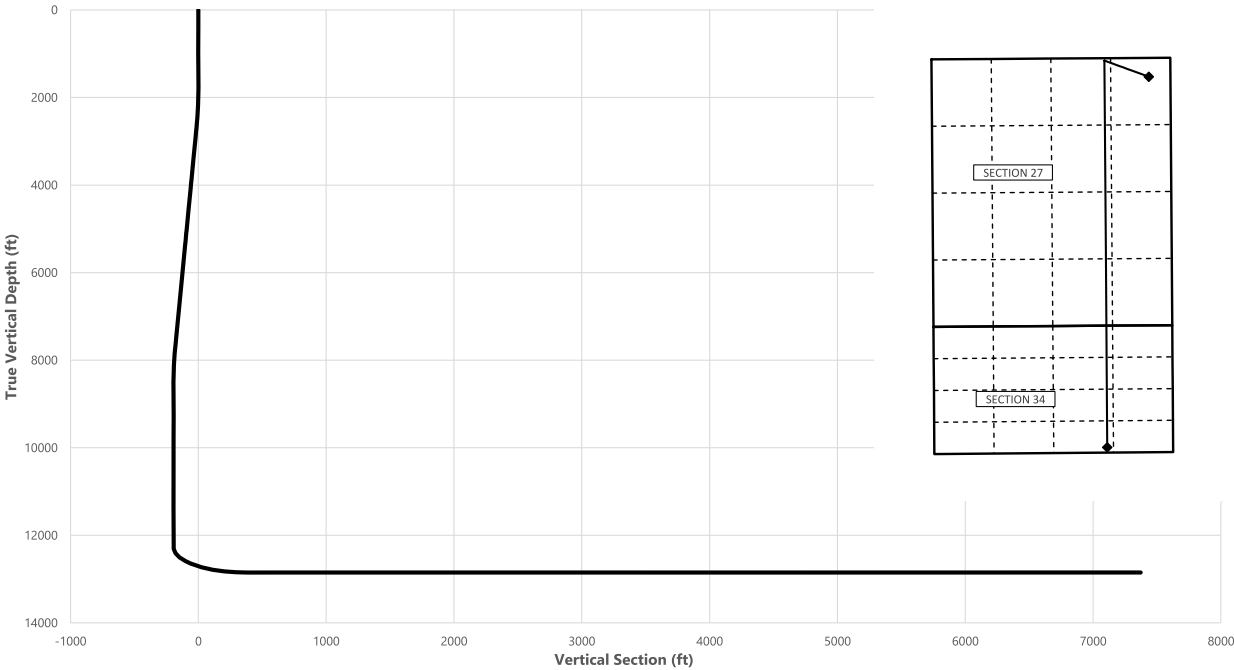

Key Depths	MD (ft)	TVD (ft)
Rustler	860.00	860.00
Salt	1200.00	1200.00
Base of Salt	5112.22	5070.00
Delaware	5376.23	5330.00
Cherry Canyon	6437.35	6375.00
Brushy Canyon	8066.67	7980.00
Bone Spring 1st	10677.75	10590.00
Bone Spring 2nd	11227.75	11140.00
Bone Spring 3rd	12287.75	12200.00
Wolfcamp / Point of Penetration	12732.47	12620.00
exit	20246.48	12850.01

SHL
KOP
Point of Penetration
Exit
BHL

MD (ft)	TVD (ft)	Lat (°)	Long (°)	Section Footages
0.00	0.00	32.0205	-103.4509	372' FNL, 477' FEL of Sec 27 in T26S, R34E
12364.79	12277.04	32.0214	-103.4540	47' FNL, 1456' FEL of Sec 27 in T26S, R34E
12732.47	12620.00	32.0214	-103.4539	100' FNL, 1455' FEL of Sec 27 in T26S, R34E
20246.48	12850.01	32.0006	-103.4539	100' FSL, 1455' FEL of Sec 34 in T26S, R34E
20326.48	12850.00	32.0005	-103.4540	20' FSL, 1455' FEL of Sec 34 in T26S, R34E

	Y	X	MD
KOP	372684	813878	12364.79

BOLL WEEVIL 27-34 FED COM 7H



Well: BOLL WEEVIL 27-34 FED COM 7H
County: Lea
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD	INC	AZI	TVD	NS	EW	VS	DLS	Comment
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100ft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL
100.00	0.00	288.00	100.00	0.00	0.00	0.00	0.00	
200.00	0.00	288.00	200.00	0.00	0.00	0.00	0.00	
300.00	0.00	288.00	300.00	0.00	0.00	0.00	0.00	
400.00	0.00	288.00	400.00	0.00	0.00	0.00	0.00	
500.00	0.00	288.00	500.00	0.00	0.00	0.00	0.00	
600.00	0.00	288.00	600.00	0.00	0.00	0.00	0.00	
700.00	0.00	288.00	700.00	0.00	0.00	0.00	0.00	
800.00	0.00	288.00	800.00	0.00	0.00	0.00	0.00	
860.00	0.00	288.00	860.00	0.00	0.00	0.00	0.00	Rustler
900.00	0.00	288.00	900.00	0.00	0.00	0.00	0.00	
1000.00	0.00	288.00	1000.00	0.00	0.00	0.00	0.00	
1100.00	0.00	288.00	1100.00	0.00	0.00	0.00	0.00	
1200.00	0.00	288.00	1200.00	0.00	0.00	0.00	0.00	Salt,
1300.00	0.00	288.00	1300.00	0.00	0.00	0.00	0.00	
1400.00	0.00	288.00	1400.00	0.00	0.00	0.00	0.00	
1500.00	0.00	288.00	1500.00	0.00	0.00	0.00	0.00	
1600.00	0.00	288.00	1600.00	0.00	0.00	0.00	0.00	
1700.00	0.00	288.00	1700.00	0.00	0.00	0.00	0.00	
1800.00	0.00	288.00	1800.00	0.00	0.00	0.00	0.00	
1900.00	0.00	288.00	1900.00	0.00	0.00	0.00	0.00	
2000.00	0.00	288.00	2000.00	0.00	0.00	0.00	0.00	Start Tangent
2100.00	2.00	288.00	2099.98	0.54	-1.66	-0.33	2.00	
2200.00	4.00	288.00	2199.84	2.16	-6.64	-1.31	2.00	
2300.00	6.00	288.00	2299.45	4.85	-14.93	-2.95	2.00	
2400.00	8.00	288.00	2398.70	8.62	-26.52	-5.24	2.00	
2500.00	10.00	288.00	2497.47	13.45	-41.39	-8.19	2.00	Hold Tangent
2600.00	10.00	288.00	2595.95	18.82	-57.91	-11.45	0.00	
2700.00	10.00	288.00	2694.43	24.18	-74.42	-14.72	0.00	
2800.00	10.00	288.00	2792.91	29.55	-90.94	-17.98	0.00	
2900.00	10.00	288.00	2891.39	34.91	-107.45	-21.25	0.00	
3000.00	10.00	288.00	2989.87	40.28	-123.97	-24.51	0.00	
3100.00	10.00	288.00	3088.35	45.64	-140.48	-27.78	0.00	
3200.00	10.00	288.00	3186.83	51.01	-157.00	-31.05	0.00	
3300.00	10.00	288.00	3285.31	56.38	-173.51	-34.31	0.00	
3400.00	10.00	288.00	3383.79	61.74	-190.03	-37.58	0.00	
3500.00	10.00	288.00	3482.27	67.11	-206.54	-40.84	0.00	
3600.00	10.00	288.00	3580.75	72.47	-223.06	-44.11	0.00	
3700.00	10.00	288.00	3679.23	77.84	-239.57	-47.37	0.00	
3800.00	10.00	288.00	3777.72	83.21	-256.09	-50.64	0.00	
3900.00	10.00	288.00	3876.20	88.57	-272.60	-53.91	0.00	
4000.00	10.00	288.00	3974.68	93.94	-289.12	-57.17	0.00	
4100.00	10.00	288.00	4073.16	99.30	-305.63	-60.44	0.00	
4200.00	10.00	288.00	4171.64	104.67	-322.15	-63.70	0.00	
4300.00	10.00	288.00	4270.12	110.04	-338.66	-66.97	0.00	
4400.00	10.00	288.00	4368.60	115.40	-355.18	-70.24	0.00	
4500.00	10.00	288.00	4467.08	120.77	-371.69	-73.50	0.00	
4600.00	10.00	288.00	4565.56	126.13	-388.21	-76.77	0.00	
4700.00	10.00	288.00	4664.04	131.50	-404.72	-80.03	0.00	
4800.00	10.00	288.00	4762.52	136.87	-421.24	-83.30	0.00	
4900.00	10.00	288.00	4861.00	142.23	-437.75	-86.56	0.00	
5000.00	10.00	288.00	4959.48	147.60	-454.27	-89.83	0.00	
5100.00	10.00	288.00	5057.97	152.96	-470.78	-93.10	0.00	
5112.22	10.00	288.00	5070.00	153.62	-472.80	-93.49	0.00	Base of Salt
5200.00	10.00	288.00	5156.45	158.33	-487.30	-96.36	0.00	
5300.00	10.00	288.00	5254.93	163.70	-503.81	-99.63	0.00	
5376.23	10.00	288.00	5330.00	167.79	-516.40	-102.12	0.00	Delaware
5400.00	10.00	288.00	5353.41	169.06	-520.33	-102.89	0.00	
5500.00	10.00	288.00	5451.89	174.43	-536.84	-106.16	0.00	
5600.00	10.00	288.00	5550.37	179.79	-553.36	-109.42	0.00	
5700.00	10.00	288.00	5648.85	185.16	-569.87	-112.69	0.00	
5800.00	10.00	288.00	5747.33	190.53	-586.39	-115.96	0.00	
5900.00	10.00	288.00	5845.81	195.89	-602.90	-119.22	0.00	
6000.00	10.00	288.00	5944.29	201.26	-619.42	-122.49	0.00	
6100.00	10.00	288.00	6042.77	206.62	-635.93	-125.75	0.00	
6200.00	10.00	288.00	6141.25	211.99	-652.44	-129.02	0.00	
6300.00	10.00	288.00	6239.73	217.36	-668.96	-132.28	0.00	
6400.00	10.00	288.00	6338.22	222.72	-685.47	-135.55	0.00	
6437.35	10.00	288.00	6375.00	224.73	-691.64	-136.77	0.00	Cherry Canyon
6500.00	10.00	288.00	6436.70	228.09	-701.99	-138.82	0.00	

BOLL WEEVIL 27-34 FED COM 7H



Well: BOLL WEEVIL 27-34 FED COM 7H
County: Lea
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
6600.00	10.00	288.00	6535.18	233.45	-718.50	-142.08	0.00	
6700.00	10.00	288.00	6633.66	238.82	-735.02	-145.35	0.00	
6800.00	10.00	288.00	6732.14	244.19	-751.53	-148.61	0.00	
6900.00	10.00	288.00	6830.62	249.55	-768.05	-151.88	0.00	
7000.00	10.00	288.00	6929.10	254.92	-784.56	-155.15	0.00	
7100.00	10.00	288.00	7027.58	260.28	-801.08	-158.41	0.00	
7200.00	10.00	288.00	7126.06	265.65	-817.59	-161.68	0.00	
7300.00	10.00	288.00	7224.54	271.01	-834.11	-164.94	0.00	
7400.00	10.00	288.00	7323.02	276.38	-850.62	-168.21	0.00	
7500.00	10.00	288.00	7421.50	281.75	-867.14	-171.47	0.00	
7600.00	10.00	288.00	7519.99	287.11	-883.65	-174.74	0.00	
7700.00	10.00	288.00	7618.47	292.48	-900.17	-178.01	0.00	
7800.00	10.00	288.00	7716.95	297.84	-916.68	-181.27	0.00	
7900.00	10.00	288.00	7815.43	303.21	-933.20	-184.54	0.00	
7942.11	10.00	288.00	7856.90	305.47	-940.15	-185.92	0.00	Drop to Vertical
8000.00	8.84	288.00	7914.01	308.40	-949.16	-187.70	2.00	
8066.67	7.51	288.00	7980.00	311.33	-958.18	-189.48	2.00	Brushy Canyon
8100.00	6.84	288.00	8013.07	312.62	-962.14	-190.26	2.00	
8200.00	4.84	288.00	8112.54	315.76	-971.82	-192.18	2.00	
8300.00	2.84	288.00	8212.31	317.83	-978.19	-193.44	2.00	
8400.00	0.84	288.00	8312.25	318.83	-981.25	-194.04	2.00	
8442.11	0.00	288.00	8354.37	318.92	-981.55	-194.10	2.00	Hold Vertical
8500.00	0.00	179.53	8412.25	318.92	-981.55	-194.10	0.00	
8600.00	0.00	179.53	8512.25	318.92	-981.55	-194.10	0.00	
8700.00	0.00	179.53	8612.25	318.92	-981.55	-194.10	0.00	
8800.00	0.00	179.53	8712.25	318.92	-981.55	-194.10	0.00	
8900.00	0.00	179.53	8812.25	318.92	-981.55	-194.10	0.00	
9000.00	0.00	179.53	8912.25	318.92	-981.55	-194.10	0.00	
9100.00	0.00	179.53	9012.25	318.92	-981.55	-194.10	0.00	
9200.00	0.00	179.53	9112.25	318.92	-981.55	-194.10	0.00	
9300.00	0.00	179.53	9212.25	318.92	-981.55	-194.10	0.00	
9400.00	0.00	179.53	9312.25	318.92	-981.55	-194.10	0.00	
9500.00	0.00	179.53	9412.25	318.92	-981.55	-194.10	0.00	
9600.00	0.00	179.53	9512.25	318.92	-981.55	-194.10	0.00	
9700.00	0.00	179.53	9612.25	318.92	-981.55	-194.10	0.00	
9800.00	0.00	179.53	9712.25	318.92	-981.55	-194.10	0.00	
9900.00	0.00	179.53	9812.25	318.92	-981.55	-194.10	0.00	
10000.00	0.00	179.53	9912.25	318.92	-981.55	-194.10	0.00	
10100.00	0.00	179.53	10012.25	318.92	-981.55	-194.10	0.00	
10200.00	0.00	179.53	10112.25	318.92	-981.55	-194.10	0.00	
10300.00	0.00	179.53	10212.25	318.92	-981.55	-194.10	0.00	
10400.00	0.00	179.53	10312.25	318.92	-981.55	-194.10	0.00	
10500.00	0.00	179.53	10412.25	318.92	-981.55	-194.10	0.00	
10600.00	0.00	179.53	10512.25	318.92	-981.55	-194.10	0.00	
10677.75	0.00	179.53	10590.00	318.92	-981.55	-194.10	0.00	Bone Spring 1st
10700.00	0.00	179.53	10612.25	318.92	-981.55	-194.10	0.00	
10800.00	0.00	179.53	10712.25	318.92	-981.55	-194.10	0.00	
10900.00	0.00	179.53	10812.25	318.92	-981.55	-194.10	0.00	
11000.00	0.00	179.53	10912.25	318.92	-981.55	-194.10	0.00	
11100.00	0.00	179.53	11012.25	318.92	-981.55	-194.10	0.00	
11200.00	0.00	179.53	11112.25	318.92	-981.55	-194.10	0.00	
11227.75	0.00	179.53	11140.00	318.92	-981.55	-194.10	0.00	Bone Spring 2nd
11300.00	0.00	179.53	11212.25	318.92	-981.55	-194.10	0.00	
11400.00	0.00	179.53	11312.25	318.92	-981.55	-194.10	0.00	
11500.00	0.00	179.53	11412.25	318.92	-981.55	-194.10	0.00	
11600.00	0.00	179.53	11512.25	318.92	-981.55	-194.10	0.00	
11700.00	0.00	179.53	11612.25	318.92	-981.55	-194.10	0.00	
11800.00	0.00	179.53	11712.25	318.92	-981.55	-194.10	0.00	
11900.00	0.00	179.53	11812.25	318.92	-981.55	-194.10	0.00	
12000.00	0.00	179.53	11912.25	318.92	-981.55	-194.10	0.00	
12100.00	0.00	179.53	12012.25	318.92	-981.55	-194.10	0.00	
12200.00	0.00	179.53	12112.25	318.92	-981.55	-194.10	0.00	
12287.75	0.00	179.53	12200.00	318.92	-981.55	-194.10	0.00	Bone Spring 3rd
12300.00	0.00	179.53	12212.25	318.92	-981.55	-194.10	0.00	
12364.79	0.00	179.53	12277.04	318.92	-981.55	-194.10	0.00	KOP
12400.00	3.52	179.53	12312.23	317.84	-981.54	-193.03	10.00	
12500.00	13.52	179.53	12411.00	303.04	-981.42	-178.36	10.00	
12600.00	23.52	179.53	12505.70	271.32	-981.16	-146.92	10.00	
12700.00	33.52	179.53	12593.45	223.63	-980.76	-99.65	10.00	
12732.47	36.77	179.53	12620.00	204.95	-980.61	-81.13	10.00	Wolfcamp / Point of Penetration

BOLL WEEVIL 27-34 FED COM 7H



Well: BOLL WEEVIL 27-34 FED COM 7H
County: Lea
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
12800.00	43.52	179.53	12671.59	161.43	-980.25	-38.00	10.00	
12900.00	53.52	179.53	12737.74	86.61	-979.64	36.16	10.00	
13000.00	63.52	179.53	12789.90	1.44	-978.94	120.58	10.00	
13100.00	73.52	179.53	12826.47	-91.49	-978.18	212.70	10.00	
13200.00	83.52	179.53	12846.34	-189.37	-977.37	309.70	10.00	
13264.79	90.00	179.53	12850.00	-254.02	-976.85	373.79	10.00	Landing Point
13300.00	90.00	179.53	12850.00	-289.22	-976.56	408.68	0.00	
13400.00	90.00	179.53	12850.00	-389.22	-975.74	507.80	0.00	
13500.00	90.00	179.53	12850.00	-489.22	-974.92	606.91	0.00	
13600.00	90.00	179.53	12850.00	-589.21	-974.10	706.03	0.00	
13700.00	90.00	179.53	12850.00	-689.21	-973.27	805.14	0.00	
13800.00	90.00	179.53	12850.00	-789.21	-972.45	904.26	0.00	
13900.00	90.00	179.53	12850.00	-889.20	-971.63	1003.37	0.00	
14000.00	90.00	179.53	12850.00	-989.20	-970.81	1102.49	0.00	
14100.00	90.00	179.53	12850.00	-1089.20	-969.99	1201.60	0.00	
14200.00	90.00	179.53	12850.00	-1189.19	-969.17	1300.71	0.00	
14300.00	90.00	179.53	12850.00	-1289.19	-968.35	1399.83	0.00	
14400.00	90.00	179.53	12850.00	-1389.19	-967.53	1498.94	0.00	
14500.00	90.00	179.53	12850.00	-1489.18	-966.71	1598.06	0.00	
14600.00	90.00	179.53	12850.00	-1589.18	-965.89	1697.17	0.00	
14700.00	90.00	179.53	12850.00	-1689.18	-965.07	1796.29	0.00	
14800.00	90.00	179.53	12850.00	-1789.17	-964.25	1895.40	0.00	
14900.00	90.00	179.53	12850.00	-1889.17	-963.43	1994.52	0.00	
15000.00	90.00	179.53	12850.00	-1989.17	-962.61	2093.63	0.00	
15100.00	90.00	179.53	12850.00	-2089.16	-961.79	2192.75	0.00	
15200.00	90.00	179.53	12850.00	-2189.16	-960.97	2291.86	0.00	
15300.00	90.00	179.53	12850.00	-2289.16	-960.15	2390.98	0.00	
15400.00	90.00	179.53	12850.00	-2389.15	-959.33	2490.09	0.00	
15500.00	90.00	179.53	12850.00	-2489.15	-958.50	2589.21	0.00	
15600.00	90.00	179.53	12850.00	-2589.15	-957.68	2688.32	0.00	
15700.00	90.00	179.53	12850.00	-2689.14	-956.86	2787.43	0.00	
15800.00	90.00	179.53	12850.00	-2789.14	-956.04	2886.55	0.00	
15900.00	90.00	179.53	12850.00	-2889.14	-955.22	2985.66	0.00	
16000.00	90.00	179.53	12850.00	-2989.13	-954.40	3084.78	0.00	
16100.00	90.00	179.53	12850.00	-3089.13	-953.58	3183.89	0.00	
16200.00	90.00	179.53	12850.00	-3189.13	-952.76	3283.01	0.00	
16300.00	90.00	179.53	12850.00	-3289.12	-951.94	3382.12	0.00	
16400.00	90.00	179.53	12850.00	-3389.12	-951.12	3481.24	0.00	
16500.00	90.00	179.53	12850.00	-3489.12	-950.30	3580.35	0.00	
16600.00	90.00	179.53	12850.00	-3589.11	-949.48	3679.47	0.00	
16700.00	90.00	179.53	12850.00	-3689.11	-948.66	3778.58	0.00	
16800.00	90.00	179.53	12850.00	-3789.11	-947.84	3877.70	0.00	
16900.00	90.00	179.53	12850.00	-3889.10	-947.02	3976.81	0.00	
17000.00	90.00	179.53	12850.00	-3989.10	-946.20	4075.93	0.00	
17100.00	90.00	179.53	12850.01	-4089.10	-945.38	4175.04	0.00	
17200.00	90.00	179.53	12850.01	-4189.09	-944.56	4274.15	0.00	
17300.00	90.00	179.53	12850.01	-4289.09	-943.73	4373.27	0.00	
17400.00	90.00	179.53	12850.01	-4389.09	-942.91	4472.38	0.00	
17500.00	90.00	179.53	12850.01	-4489.08	-942.09	4571.50	0.00	
17600.00	90.00	179.53	12850.01	-4589.08	-941.27	4670.61	0.00	
17700.00	90.00	179.53	12850.01	-4689.08	-940.45	4769.73	0.00	
17800.00	90.00	179.53	12850.01	-4789.07	-939.63	4868.84	0.00	
17900.00	90.00	179.53	12850.01	-4889.07	-938.81	4967.96	0.00	
18000.00	90.00	179.53	12850.01	-4989.07	-937.99	5067.07	0.00	
18100.00	90.00	179.53	12850.01	-5089.06	-937.17	5166.19	0.00	
18200.00	90.00	179.53	12850.01	-5189.06	-936.35	5265.30	0.00	
18300.00	90.00	179.53	12850.01	-5289.06	-935.53	5364.42	0.00	
18400.00	90.00	179.53	12850.01	-5389.05	-934.71	5463.53	0.00	
18500.00	90.00	179.53	12850.01	-5489.05	-933.89	5562.64	0.00	
18600.00	90.00	179.53	12850.01	-5589.05	-933.07	5661.76	0.00	
18700.00	90.00	179.53	12850.01	-5689.04	-932.25	5760.87	0.00	
18800.00	90.00	179.53	12850.01	-5789.04	-931.43	5859.99	0.00	
18900.00	90.00	179.53	12850.01	-5889.04	-930.61	5959.10	0.00	
19000.00	90.00	179.53	12850.01	-5989.03	-929.79	6058.22	0.00	
19100.00	90.00	179.53	12850.01	-6089.03	-928.96	6157.33	0.00	
19200.00	90.00	179.53	12850.01	-6189.03	-928.14	6256.45	0.00	
19300.00	90.00	179.53	12850.01	-6289.02	-927.32	6355.56	0.00	
19400.00	90.00	179.53	12850.01	-6389.02	-926.50	6454.68	0.00	
19500.00	90.00	179.53	12850.01	-6489.02	-925.68	6553.79	0.00	
19600.00	90.00	179.53	12850.01	-6589.01	-924.86	6652.91	0.00	

BOLL WEEVIL 27-34 FED COM 7H



Well: BOLL WEEVIL 27-34 FED COM 7H
County: Lea
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD	INC	AZI	TVD	NS	EW	VS	DLS	Comment
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100ft)	
19700.00	90.00	179.53	12850.01	-6689.01	-924.04	6752.02	0.00	
19800.00	90.00	179.53	12850.01	-6789.01	-923.22	6851.14	0.00	
19900.00	90.00	179.53	12850.01	-6889.00	-922.40	6950.25	0.00	
20000.00	90.00	179.53	12850.01	-6989.00	-921.58	7049.36	0.00	
20100.00	90.00	179.53	12850.01	-7089.00	-920.76	7148.48	0.00	
20200.00	90.00	179.53	12850.01	-7188.99	-919.94	7247.59	0.00	
20246.48	90.00	179.53	12850.01	-7235.47	-919.56	7293.66	0.00	exit
20300.00	90.00	179.53	12850.01	-7288.99	-919.12	7346.71	0.00	
20326.48	90.00	179.53	12850.00	-7315.47	-918.92	7372.96	0.00	BHL

BOLL WEEVIL 27-34 FED COM 7H

Well: BOLL WEEVIL 27-34 FED COM 7H

County: Lea

Wellbore: Permit Plan

Design: Permit Plan #1

Geodetic System: US State Plane 1983

Datum: North American Datum 1927

Ellipsoid: Clarke 1866

Zone: 3001 - NM East (NAD83)

MD	INC	AZI	TVD	NS	EW	VS	DLS	Comment
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100ft)	

BOLL WEEVIL 27-34 FED COM 7H

1. Geologic Formations

TVD of target	12850	Pilot hole depth	N/A
MD at TD:	20326	Deepest expected fresh water	

Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/Target Zone?	Hazards*
Rustler	860		
Salt	1200		
Base of Salt	5070		
Delaware	5330		
Cherry Canyon	6375		
Brushy Canyon	7980		
Bone Spring 1st	10590		
Bone Spring 2nd	11140		
Bone Spring 3rd	12200		
Wolfcamp	12620		

*H2S, water flows, loss of circulation, abnormal pressures, etc.

BOLL WEEVIL 27-34 FED COM 7H

2. Casing Program (Primary Design)

Hole Size	Csg. Size	Wt (PPF)	Grade	Conn	Casing Interval		Casing Interval	
					From (MD)	To (MD)	From (TVD)	To (TVD)
14 3/4	10 3/4	45 1/2	J-55	BTC	0	885	0	885
9 7/8	8 5/8	32	P110	Sprint FJ	0	12264	0	12264
7 7/8	5 1/2	20	P110	DWC / C-IS+	0	20326	0	12850

•All casing strings will be tested in accordance with 43 CFR 3172. Must have table for contingency casing.

3. Cementing Program (Primary Design)

Assuming no returns are established while drilling, Devon requests to pump a two stage cement job on the intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. The final cement top will be verified by Echo-meter. Devon will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program. Devon will report to the BLM the volume of fluid (limited to 1 bbls) used to flush intermediate casing valves following backside cementing procedures.

Casing	# Sks	TOC	Wt. ppg	Yld (ft3/sack)	Slurry Description
Surface	537	Surf	13.2	1.44	Lead: Class C Cement + additives
Int 1	568	Surf	13.0	2.3	2nd State: Bradenhead Squeeze - Lead: Class C Cement + additives
	488	8066	13.2	1.44	Tail: Class H / C + additives
Production	117	10365	9	3.27	Lead: Class H / C + additives
	1054	12365	13.2	1.44	Tail: Class H / C + additives

Casing String	% Excess
Surface	50%
Intermediate 1	30%
Prod	10%

BOLL WEEVIL 27-34 FED COM 7H

4. Pressure Control Equipment (Three String Design)

BOP installed and tested before drilling which hole?		Size?	Min. Required WP	Type	✓	Tested to:
Int 1	13-5/8"	5M	Annular		X	50% of rated working pressure
			Blind Ram		X	5M
			Pipe Ram			
			Double Ram		X	
			Other*			
Production	13-5/8"	10M	Annular (5M)		X	100% of rated working pressure
			Blind Ram		X	10M
			Pipe Ram			
			Double Ram		X	
			Other*			
			Annular (5M)			
			Blind Ram			
			Pipe Ram			
			Double Ram			
			Other*			
N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.					
Y	A variance is requested to run a 5 M annular on a 10M system					

BOLL WEEVIL 27-34 FED COM 7H

5. Mud Program (Three String Design)

Section	Type	Weight (ppg)
Surface	FW Gel	8.5-9
Intermediate	DBE / Cut Brine	10-10.5
Production	OBM	10-10.5

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing	
X	Will run GR/CNL from TD to surface (horizontal well - vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain.
	Coring? If yes, explain.

Additional logs planned		Interval
	Resistivity	Int. shoe to KOP
	Density	Int. shoe to KOP
X	CBL	Production casing
X	Mud log	Intermediate shoe to TD
	PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH pressure at deepest TVD	7016
Abnormal temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H ₂ S) monitors will be installed prior to drilling out the surface shoe. If H ₂ S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of 43 CFR 3176. If Hydrogen Sulfide is encountered measured values and formations will be provided to the BLM.	
N	H ₂ S is present
Y	H ₂ S plan attached.

BOLL WEEVIL 27-34 FED COM 7H

8. Other facets of operation

Is this a walking operation? Potentially

- 1 If operator elects, drilling rig will batch drill the surface holes and run/cement surface casing; walking the rig to next wells on the pad.
- 2 The drilling rig will then batch drill the intermediate sections and run/cement intermediate casing; the wellbore will be isolated with a blind flange and pressure gauge installed for monitoring the well before walking to the next well.
- 3 The drilling rig will then batch drill the production hole sections on the wells with OBM, run/cement production casing, and install TA caps or tubing heads for completions.

NOTE: During batch operations the drilling rig will be moved from well to well however, it will not be removed from the pad until all wells have production casing run/cemented.

Will be pre-setting casing? Potentially

- 1 Spudder rig will move in and batch drill surface hole.
 - a. Rig will utilize fresh water based mud to drill surface hole to TD. Solids control will be handled entirely on a closed loop basis.,
- 2 After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (43 CFR 3172, all COAs and NMOCD regulations).
- 3 The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
- 4 A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
- 5 Spudder rig operations is expected to take 4-5 days per well on a multi-well pa.
- 6 The NMOCD will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 7 Drilling operations will be performed with drilling rig. A that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The NMOCD will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.

Attachments

X Directional Plan
 Other, describe

Issued on: 16 Dec. 2020 by Logan Van Gorp



Connection Data Sheet

OD	Weight (lb/ft)	Wall Th.	Grade	Alt. Drift:	Connection
8 5/8 in.	Nominal: 32.00 Plain End: 31.13	0.352 in.	P110EC	7.875 in.	VAM® SPRINT-FJ

PIPE PROPERTIES			
Nominal OD	8.625	in.	
Nominal ID	7.921	in.	
Nominal Cross Section Area	9.149	sqin.	
Grade Type	High Yield		
Min. Yield Strength	125	ksi	
Max. Yield Strength	140	ksi	
Min. Ultimate Tensile Strength	135	ksi	


CONNECTION PROPERTIES			
Connection Type	Semi-Premium Integral Flush		
Connection OD (nom):	8.665	in.	
Connection ID (nom):	7.954	in.	
Make-Up Loss	2.614	in.	
Critical Cross Section	6.038	sqin.	
Tension Efficiency	65.0	% of pipe	
Compression Efficiency	65.0	% of pipe	
Internal Pressure Efficiency	80.0	% of pipe	
External Pressure Efficiency	100	% of pipe	

CONNECTION PERFORMANCES			
Tensile Yield Strength	744	klb	
Compression Resistance	744	klb	
Max. Internal Pressure	7,150	psi	
Structural Collapse Resistance	4,000	psi	
Max. Bending with Sealability	41	°/100ft	
Max. Bending with Sealability	10	°/100ft	

* 87.5% RBW

TORQUE VALUES			
Min. Make-up torque	15,000	ft.lb	
Opt. Make-up torque	16,500	ft.lb	
Max. Make-up torque	18,000	ft.lb	
Max. Torque with Sealability (MTS)	TBD	ft.lb	

VAM® SPRINT-FJ is a semi-premium flush connection designed for shale applications, where maximum clearance and high tension capacity are required for intermediate casing strings.

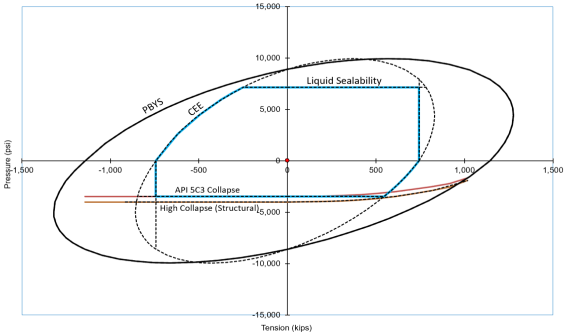

canada@vamfieldservice.com
usa@vamfieldservice.com
mexico@vamfieldservice.com
brazil@vamfieldservice.com

Do you need help on this product? - Remember no one knows VAM® like VAM®

uk@vamfieldservice.com
dubai@vamfieldservice.com
nigeria@vamfieldservice.com
angola@vamfieldservice.com

china@vamfieldservice.com
baku@vamfieldservice.com
singapore@vamfieldservice.com
australia@vamfieldservice.com

Over 140 VAM® Specialists available worldwide 24/7 for Rig Site Assistance





10-3/4" 45.50# 0.400" J-55

Dimensions (Nominal)

Outside Diameter	10.750	in.
Wall	0.400	in.
Inside Diameter	9.950	in.
Drift	9.875	in.
Weight, T&C	45.500	lbs/ft
Weight, PE	44.260	lbs/ft

Performance Properties

Collapse	2090	psi
Internal Yield Pressure at Minimum Yield		
PE	3580	psi
STC	3580	psi
BTC	3580	psi
Yield Strength, Pipe Body	715	1000 lbs
Joint Strength		
STC	493	1000 lbs
BTC	796	1000 lbs
BTC Special Clearance (11.25" OD Cplg)	506	1000 lbs

Note: SeAH Steel has produced this specification sheet for general information only. SeAH does not assume liability or responsibility for any loss or injury resulting from the use of information or data contained herein. All applications for the material described are at the customer's own risk and responsibility.

27-26-34-A Sundry ID 2762115 Boll Weevil 27-34 Fed Com 7H

Boll Weevil 27-34 Fed Com 7H

10 3/4		surface csg in a		14 3/4		inch hole.		Design Factors				Surface	
Segment	#/ft	Grade		Coupling	Body	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	45.50		j 55	btc	14.90	4.24	0.54	1,055	8	0.90	8.00	48,003	
"B"				btc				0				0	
w/8.4#/g mud, 30min Sfc Csg Test psig: 1,500				Tail Cmt	does not	circ to sfc.		Totals:	1,055			48,003	
Comparison of Proposed to Minimum Required Cement Volumes													
Hole	Annular	1 Stage	1 Stage	Min	Annular	1 Stage	Drilling	Calc	Req'd			Min Dist	
Size	Volume	Cmt Sx	CuFt Cmt	Cu Ft	% Excess	Mud Wt	MASP	BOPE				Hole-Cplg	
14 3/4	0.5563	537	773	587	32	9.00	3991	5M				1.50	
Burst Frac Gradient(s) for Segment(s) A, B = , b All > 0.70, OK.													
Site plot (see racks 2 or E) as per O.D. 1-in. O.A. C not found.													

8 5/8		casing inside the		10 3/4		Design Factors				Int 1			
Segment	#/ft	Grade		Coupling	Joint	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	32.00		p 110	vam sprint fj	1.90	0.6	1.02	12,264	1	1.71	1.00	392,448	
"B"								0				0	
w/8.4#/g mud, 30min Sfc Csg Test psig: -347								Totals:	12,264				392,448
The cement volume(s) are intended to achieve a top of								0	ft from surface or a		1055	overlap.	
Hole	Annular	1 Stage	1 Stage	Min	1 Stage	Drilling	Calc	Req'd	Min Dist				
Size	Volume	Cmt Sx	CuFt Cmt	Cu Ft	% Excess	Mud Wt	MASP	BOPE	Hole-Cplg				
9 7/8	0.1261	488	703	1555	-55	10.50	4182	5M	0.61				
r D V Tool(s):			7980	sum of sx				Σ CuFt	Σ%excess				
t by stage % :			30	29	1056				2009	29			
Class 'H' tail cmt yld > 1.20													

Tail cmt												
5 1/2		casing inside the		8 5/8		Design Factors				Prod 1		
Segment	#/ft	Grade		Coupling	Joint	Collapse	Burst	Length	B@s	a-B	a-C	Weight
"A"	20.00		p 110	dwc/c is+	2.84	1.72	2.05	20,326	2	3.43	2.89	406,520
"B"								0				0
"C"								0				0
"D"				0				0				0
w/8.4#/g mud, 30min Sfc Csg Test psig: 2,827								Totals:	20,326			406,520
The cement volume(s) are intended to achieve a top of								12064	ft from surface or a	200		overlap.
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE				Min Dist Hole-Cplg
7 7/8	0.1733	1171	1900	1432	33	10.50						0.79
Class 'C' tail cmt yld > 1.35												

#N/A											
0	5 1/2			Design Factors				<Choose Casing>			
Segment	#/ft	Grade	Coupling	#N/A	Collapse	Burst	Length	B@s	a-B	a-C	Weight
"A"			0.00				0				0
"B"			0.00				0				0
w/8.4#/g mud, 30min Sfc Csg Test psig:							Totals:	0			
Cmt vol calc below includes this csg, TOC intended				#N/A	ft from surface or a		#N/A				overlap.
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE			Min Dist Hole-Cplg
0		#N/A	#N/A	0	#N/A						
#N/A											
Capitan Reef est top XXXX.											

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 296981

CONDITIONS

Operator: DEVON ENERGY PRODUCTION COMPANY, LP 333 West Sheridan Ave. Oklahoma City, OK 73102	OGRID: 6137
	Action Number: 296981
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
pkautz	None	1/31/2024