

Well Name: RED HILLS UNIT	Well Location: T25S / R33E / SEC 33 / NENE /	County or Parish/State:
Well Number: 81H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM005792	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002551930	Well Status: Approved Application for Permit to Drill	Operator: CIMAREX ENERGY COMPANY

Notice of Intent

Sundry ID: 2768274

Type of Submission: Notice of Intent	Type of Action: APD Change
Date Sundry Submitted: 01/04/2024	Time Sundry Submitted: 02:49
Date proposed operation will begin: 03/01/2024	

Procedure Description: Cimarex Energy Company respectfully requests the following drilling and directional changes be made to the existing and approved APD for the following well: Red Hills Unit 81H 1. Casing design change - Long String to Liner. 2. New bottom hole location 100 FSL 870 FEL to 100 FSL 1870 FEL. 3. New surface hole location 328 FNL 869 FEL to 388 FNL 1029 FEL. See attached.

NOI Attachments

Procedure Description

Red_Hills_Unit_81H_Sundry_Submittal_01042024_20240104142927.pdf

Well Name: RED HILLS UNIT	Well Location: T25S / R33E / SEC 33 / NENE /	County or Parish/State:
Well Number: 81H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM005792	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002551930	Well Status: Approved Application for Permit to Drill	Operator: CIMAREX ENERGY COMPANY

Conditions of Approval

Additional

33_25_33_A_Sundry_ID_2768274_Red_Hills_Unit_81H_Lea_NM05792_CIMAREX_ENERGY_COMPANY_13_22g_1_30_2024_LV_20240220135230.pdf

Red_Hills_Unit_81H_Dr_COA_20240220135230.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHELLY BOWEN	Signed on: MAR 11, 2024 06:40 AM
Name: CIMAREX ENERGY COMPANY	
Title: Regulatory Analyst	
Street Address: 6001 DEAUVILLE BLVD STE 300N	
City: MIDLAND	State: TX
Phone: (432) 620-1644	
Email address: DL_PBUREGULATORY@COTERRA.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: CHRISTOPHER WALLS	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752342234	BLM POC Email Address: cwalls@blm.gov
Disposition: Approved	Disposition Date: 03/11/2024
Signature: Chris Walls	

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.	
6. If Indian, Allottee or Tribe Name	
7. If Unit of CA/Agreement, Name and/or No.	
8. Well Name and No.	
9. API Well No.	
10. Field and Pool or Exploratory Area	
11. Country or Parish, State	

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
☐ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off	
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity	
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☐ Other	
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon		
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)	Title
Signature	Date

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NENE / 328 FNL / 869 FEL / TWSP: 25S / RANGE: 33E / SECTION: 33 / LAT: 32.093374 / LONG: -103.57156 (TVD: 0 feet, MD: 0 feet)

PPP: NENE / 328 FNL / 869 FEL / TWSP: 25S / RANGE: 33E / SECTION: 33 / LAT: 32.093374 / LONG: -103.57156 (TVD: 10000 feet, MD: 10276 feet)

BHL: SESE / 100 FSL / 870 FEL / TWSP: 26S / RANGE: 33E / SECTION: 4 / LAT: 32.065538 / LONG: -103.571525 (TVD: 10000 feet, MD: 20020 feet)

CONFIDENTIAL

33-25-33-A Sundry ID 2768274 Red Hills Unit 81H Lea NM05792 CIMAREX ENERGY COMPANY 13-22g 1-30-2024 LV

Red Hills Unit 81H

13 3/8		surface csg in a		17 1/2		inch hole.		Design Factors				Surface		
Segment	#/ft	Grade		Coupling		Joint	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	48.00			h 40		stc	6.39	1.69	0.68	1,050	4	1.18	3.45	50,400
"B"						stc			0					0
w/8.4#/g mud, 30min Sfc Csg Test psig: 753							Tail Cmt	does not	circ to sfc.	Totals:	1,050			50,400
Comparison of Proposed to Minimum Required Cement Volumes														
Hole	Annular	1 Stage		1 Stage		Min	1 Stage	Drilling	Calc	Req'd				Min Dist
Size	Volume	Cmt Sx		CuFt Cmt		Cu Ft	% Excess	Mud Wt	MASP	BOPE				Hole-Cplg
17 1/2	0.6946	620		1017		729	39	8.33	1464	2M				1.56
Burst Frac Gradient(s) for Segment(s) A, B = , b All > 0.70, OK.														
Site plot (pipe racks 3 or 4) as per D.O. 3.111 D.4.1, not found														

9 5/8		casing inside the		13 3/8		Design Factors					Int 1	
Segment	#/ft	Grade		Coupling	Body	Collapse	Burst	Length	B@s	a-B	a-C	Weight
"A"	40.00		hck 55	ltc	3.22	1.67	0.79	4,932	2	1.49	2.89	197,280
"B"								0				0
w/8.4#/g mud, 30min Sfc Csg Test psig: 631								Totals:	4,932			197,280
The cement volume(s) are intended to achieve a top of						0	ft from surface or a		1050			overlap.
Hole	Annular	1 Stage	1 Stage	Min	1 Stage	Drilling	Calc	Req'd				Min Dist
Size	Volume	Cmt Sx	CuFt Cmt	Cu Ft	% Excess	Mud Wt	MASP	BOPE				Hole-Cplg
12 1/4	0.3132	1226	2149	1611	33	10.00	2657	3M				0.81
r D V Tool(s):							sum of sx	Σ CuFt				Σ%excess
t by stage % :		#VALUE!	#VALUE!				1226	2149				33
Class 'H' tail cmt yld > 1.20												
Burst Frac Gradient(s) for Segment(s): A, B, C, D = 0.81, b, c, d All > 0.70, OK.												

7	casing inside the		9 5/8		Design Factors					Prod 1		
Segment	#/ft	Grade	Coupling	Body	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	29.00		l 80	btc	2.17	1.4	1.46	10,994	2	2.53	2.64	318,826
"B"							0				0	
"C"							0				0	
"D"							0				0	
w/8.4#/g mud, 30min Sfc Csg Test psig: 1,029								Totals:	10,994		318,826	
The cement volume(s) are intended to achieve a top of					4732	ft from surface or a		200			overlap.	
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE			Min Dist Hole-Cplg	
8 3/4	0.1503	463	1400	943	48	9.00	3221	5M			0.55	
Class 'C' tail cmt yld > 1.35												

4 1/2	Liner w/top @			9740	Design Factors					Liner 1		
Segment	#/ft	Grade	Coupling	Body	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	11.60		p 110	btc	2.94	1.35	1.91	11,006	2	3.32	2.35	127,670
"B"								0				0
w/8.4#/g mud, 30min Sfc Csg Test psig: 2,366								Totals:	11,006			127,670
The cement volume(s) are intended to achieve a top of				9740	ft from surface or a			1254			overlap.	
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE			Min Dist Hole-Cplg	
6	0.0859	724	941	848	11	10.00						0.50
Class 'H' tail cmt yld > 1.20												
Capitan Reef est top XXXX.												

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Cimarex Energy Company
LEASE NO.:	NMNM05792
LOCATION:	Section 33, T.25 S., R.33 E., NMPM
COUNTY:	Lea County, New Mexico ▼

WELL NAME & NO.:	Red Hills Unit 81H
SURFACE HOLE FOOTAGE:	388'/N & 1029'/E
BOTTOM HOLE FOOTAGE:	100'/S & 1870'/E
ATS/API ID:	3002551930
APD ID:	10400059633
Sundry ID:	2768274

COA

H2S	Yes ▼		
Potash	None ▼		
Cave/Karst Potential	Low ▼		
Cave/Karst Potential	☐ Critical		
Variance	☒ None	☒ Flex Hose	☒ Other
Wellhead	Conventional and Multibowl ▼		
Other	☐ 4 String	Capitan Reef None ▼	☐ WIPP
Other	Pilot Hole None ▼	☐ Open Annulus	
Cementing	Contingency Squeeze None ▼	Echo-Meter None ▼	Primary Cement Squeeze None ▼
Special Requirements	☐ Water Disposal/Injection	☐ COM	☒ Unit
Special Requirements	☐ Batch Sundry		
Special Requirements Variance	☐ Break Testing	☐ Offline Cementing	☐ Casing Clearance

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated 500 feet prior to drilling into the **Bone Springs** formation. As a result, the Hydrogen Sulfide area must meet **43 CFR part 3170 Subpart 3176** requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The **13-3/8** inch surface casing shall be set at approximately **1050 feet** (a minimum of **25 feet (Lea County)** into the Rustler Anhydrite and above the salt when present, and below usable fresh water) and cemented to the surface. The surface hole shall be **17 1/2** inch in diameter.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.
3. The minimum required fill of cement behind the **7** inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
4. The minimum required fill of cement behind the **4-1/2** inch production liner is:
 - Cement should tie-back **100 feet** into the previous casing. Operator shall provide method of verification.
Cement excess is less than 25%, more cement is required if washout occurs. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **9-5/8** inch intermediate casing shoe shall be **3000 (3M)** psi.
- c. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **7** inch intermediate casing shoe shall be **5000 (5M)** psi.

Option 2:

Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the **13-3/8** inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.

D. SPECIAL REQUIREMENT (S)

Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

Commercial Well Determination

A commercial well determination shall be submitted after production has been established for at least six months.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
(575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report when present.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172** and **API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-

off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

LVO 2/20/2024

Received by OCD: 3/12/2024 8:01:27 AM

Sundry ID	Well Name	API	S/T/R	SHL Old	SHL New	S/T/R	BHL Old	BHL New
	Red Hills Unit 81H	30-025-51930	33/25S/33E	328 FNL 869 FEL	388 FNL 1029 FEL	4/26S/33E	100 FSL 870 FEL	100 FSL 1870 FEL
		TVD Old	TVD New	MD Old	MD New	Old Formation	New Formation	Producing Zone
		10,000'	10,772'	20,020	20,746	Wolfcamp	Upper 2nd Sand	WC G-09 S253335K;LOWER BONE SPRING

Section 1 - Geologic Formations
See attached drilling plan/attached Geoprog

Section 2 - Blowout Prevention	
Old	New
2M	2M
5M	3M
	5M

Section 3 - Casing							
Old							
Hole Size	Casing Depth From (MD)	Casing Depth To (MD)	Setting Depth (TVD)	Casing Size	Weight (lb/ft)	Grade	Conn
17 1/2	0	970	970	13-3/8"	48.00	H-40/J-55	ST&C
12 1/4	0	4850	4850	9-5/8"	36.00	J-55	LT&C
8 3/4	0	9475	9475	5-1/2"	20.00	L-80	LT&C
8 3/4	9475	20020	10000	5-1/2"	20.00	L-80	BT&C

New							
Hole Size	Casing Depth From (MD)	Casing Depth To (MD)	Setting Depth (TVD)	Casing Size	Weight (lb/ft)	Grade	Conn
17 1/2	0	1010	1010	13-3/8"	48.00	H-40	ST&C
12 1/4	0	4932	4890	9-5/8"	40.00	HCK-55	LT&C
8 3/4	0	10240	10240	7"	29.00	L-80	BT&C
8 3/4	10240	10994	10732	7"	29.00	L-80	BT&C
6	9740	20746	10755	4-1/2"	11.60	P-110	BT&C

Section 4 - Cement	
Old	
Casing	# SKS
Surface	601
Intermediate	1201
Production	3547

New	
Casing	# SKS
Surface	620
Intermediate	1226
Production	463
Completion System	724

Section 5 - Circulating Medium			
Old			
Depth	Type	Weight (ppg)	Viscosity
0' to 970'	Fresh Water	7.83 - 8.33	28
970' to 4850'	Brine Water	9.50 - 10.00	30-32
4850' to 20020'	OBM	8.50 - 9.00	50-70

New			
Depth	Type	Weight (ppg)	Viscosity
0' to 1010'	Fresh Water	7.83 - 8.33	28
1010' to 4932'	Brine Water	9.50 - 10.00	30-32
4932' to 10994'	Cut Brine or OBM	8.50 - 9.00	27-70
11296' to 20746'	OBM	9.50 - 10.00	50-70

Section 7 - Bottom Hole Pressure	
Old	New
4680	5592

Section 10 - Variances

Variance Request #1: Skid Rig after Cementing Surface Casing

Coterra requests permission to skid the rig to the next well on the pad in order to begin operations immediately after the cement job for the surface casing has been completed. After the cement job is completed, no operations on the subject well will be conducted until at least 8 hours have elapsed, and both lead and tail slurries have achieved 500 psi compressive strength. While cement cures, the surface casing of the subject well will be suspended in the well by a mandrel and landing ring system, which is independent from the rig and ensures that casing remains centered while the rig is active on other wells.

Variance Request #4: Utilize Co-Flex Choke Line

Coterra requests approval to utilize a co-flex choke line between the BOP and choke manifold. Certification for the proposed co-flex choke line is attached. The choke line is not required by the manufacturer to be anchored. In the event the specific co-flex choke line is not available, one of equal or higher rating will be used. Variance to include Hammer Union connections on lines downstream of the buffer tank only.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-51930	² Pool Code 97741	³ Pool Name WC G-09 S253335K;LOWER BONE SPRING
⁴ Property Code	⁵ Property Name RED HILLS UNIT	⁶ Well Number 81H
⁷ OGRID No. 215099	⁸ Operator Name CIMAREX ENERGY CO.	⁹ Elevation 3343.1'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	33	25S	33E		388	NORTH	1029	EAST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
O	4	26S	33E		100	SOUTH	1870	EAST	LEA
¹² Dedicated Acres 360	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

- ¹⁶ NOTE:
- Distances referenced on plat to section lines are perpendicular.
 - Basis of Bearing is a Transverse Mercator Projection with a Central Meridian of W-103°53'00" (NAD 83)

NAD 83 (SURFACE HOLE LOCATION)
LATITUDE = 32°05'35.56" (32.093211°)
LONGITUDE = -103°34'19.48" (-103.572077°)
NAD 27 (SURFACE HOLE LOCATION)
LATITUDE = 32°05'35.11" (32.093086°)
LONGITUDE = -103°34'17.78" (-103.571606°)
STATE PLANE NAD 83 (N.M. EAST)
N: 398478.95' E: 777082.02'
STATE PLANE NAD 27 (N.M. EAST)
N: 398421.34' E: 735895.50'


NAD 83 (KOP/LP/FTP)
LATITUDE = 32°05'38.43" (32.094009°)
LONGITUDE = -103°34'29.25" (-103.574792°)
NAD 27 (KOP/LP/FTP)
LATITUDE = 32°05'37.98" (32.093884°)
LONGITUDE = -103°34'27.56" (-103.574322°)
STATE PLANE NAD 83 (N.M. EAST)
N: 398763.53' E: 776238.99'
STATE PLANE NAD 27 (N.M. EAST)
N: 398705.91' E: 735052.49'

NAD 83 (LPP #1)
LATITUDE = 32°04'47.21" (32.079780°)
LONGITUDE = -103°34'29.18" (-103.574772°)
NAD 27 (LPP #1)
LATITUDE = 32°04'46.76" (32.079655°)
LONGITUDE = -103°34'27.49" (-103.574303°)
STATE PLANE NAD 83 (N.M. EAST)
N: 393587.05' E: 776281.60'
STATE PLANE NAD 27 (N.M. EAST)
N: 393529.56' E: 735094.86'

NAD 83 (LTP/BHL)
LATITUDE = 32°03'55.96" (32.065544°)
LONGITUDE = -103°34'29.11" (-103.574752°)
NAD 27 (LTP/BHL)
LATITUDE = 32°03'55.51" (32.065419°)
LONGITUDE = -103°34'27.42" (-103.574283°)
STATE PLANE NAD 83 (N.M. EAST)
N: 388408.27' E: 776324.22'
STATE PLANE NAD 27 (N.M. EAST)
N: 388350.91' E: 735137.23'

LINE TABLE		
LINE	DIRECTION	LENGTH
L1	N71°06'28"W	889.92'

- = SURFACE HOLE LOCATION
- ◆ = KICK OFF POINT/LANDING POINT /FIRST TAKE POINT
- ☆ = LEASE PENETRATION POINT
- = LAST TAKE POINT/BOTTOM HOLE LOCATION
- ▲ = SECTION CORNER LOCATED
- = LEASE LINE

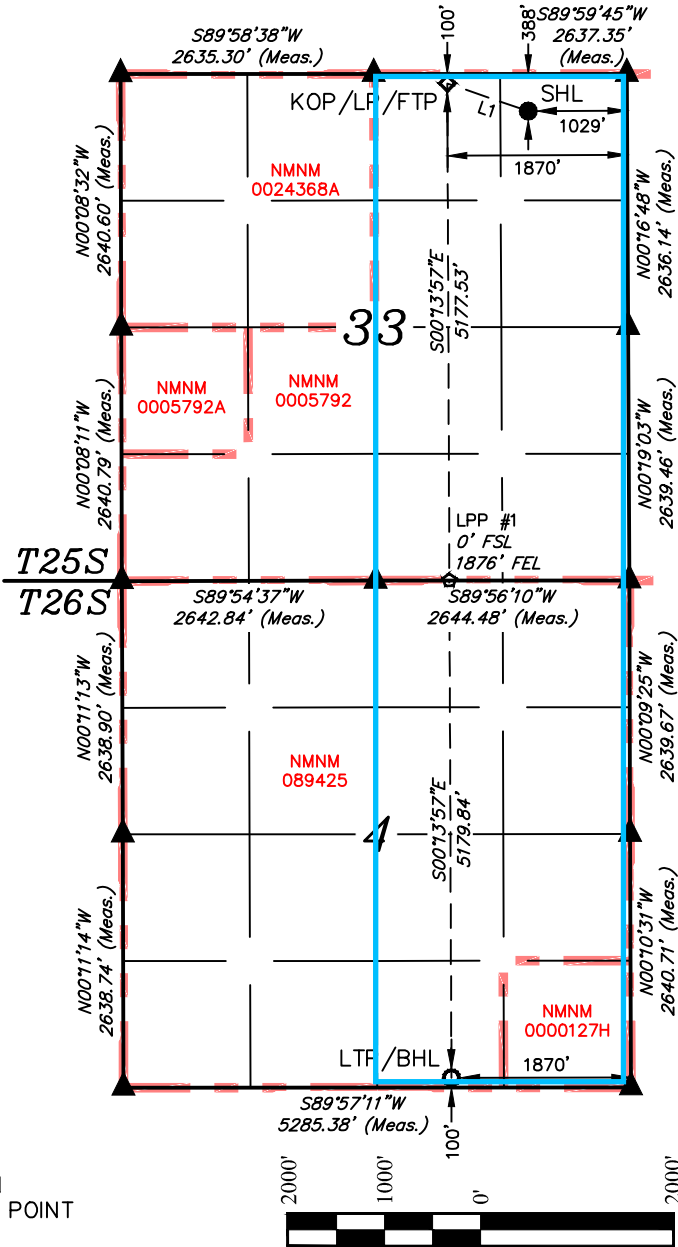

¹⁷ OPERATOR
CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Shelly Bowen 1/4/24
Signature Date

Shelly Bowen
Printed Name

shelly.bowen@coterra.com

E-mail Address

¹⁸ SURVEYOR
CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

May 05, 2017

Date of Survey
Signature and Seal of Professional Surveyor:



Certificate Number:

1. Geological Formations

TVD of target 10,755

Pilot Hole TD N/A

MD at TD 20,746

Deepest expected fresh water

Formation	Depth (TVD) from KB	Water/Mineral Bearing/Target Zone	Hazards
Rustler	960	N/A	
Top of Salt	1270	N/A	
Base of Salt/Lamar	4915	N/A	
Top Delaware Sands/Bell Canyon	4940	Hydrocarbons	
Cherry Canyon	5960	Hydrocarbons	
Brushy Canyon	7480	Hydrocarbons	
Basal Brushy Canyon	8855	N/A	
Bone Spring Lime	9040	N/A	
Leonard/Avalon Sand	9065	Hydrocarbons	
Avalon Shale	9330	Hydrocarbons	
1st Bone Spring Sand	10035	Hydrocarbons	
2nd Bone Spring Shale	10235	Hydrocarbons	
2nd Bone Spring Sand	10585	Hydrocarbons	
Upper 2nd Sand - Target	10772	Hydrocarbons	

2. Casing Program

Hole Size	Casing Depth From	Casing Depth To	Setting Depth TVD	Casing Size	Weight (lb/ft)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
17 1/2	0	1010	1010	13-3/8"	48.00	H-40	ST&C	1.69	3.95	6.64
12 1/4	0	4932	4890	9-5/8"	40.00	HCK-55	LT&C	1.50	1.55	2.87
8 3/4	0	10240	10240	7"	29.00	L-80	BT&C	1.46	1.70	2.17
8 3/4	10240	10994	10732	7"	29.00	L-80	BT&C	1.40	1.62	47.38
6	9740	20746	10755	4-1/2"	11.60	P-110	BT&C	1.36	1.92	31.17
BLM Minimum Safety Factor								1.125	1	1.6 Dry 1.8 Wet

TVD was used on all calculations.

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Cimarex Energy Co., Red Hills Unit 81H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	N
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3rd string cement tied back 500' into previous casing?	N
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	N
Is 2nd string set 100' to 600' below the base of salt?	N
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	N
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	N
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	N
Is AC Report included?	Y

3. Cementing Program

Casing	# Sk	Wt. lb/gal	Yld ft3/sack	H2O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surface	489	13.50	1.72	9.15	15.5	Lead: Class C + Bentonite
	131	14.80	1.34	6.32	9.5	Tail: Class C + LCM
Intermediate	937	12.90	1.88	9.65	12	Lead: 35:65 (Poz:C) + Salt + Bentonite
	289	14.80	1.34	6.32	9.5	Tail: Class C + LCM
Production	338	10.30	3.64	22.18		Lead: Tuned Light + LCM
	125	14.80	1.36	6.57	9.5	Tail: Class C + Retarder
Completion System	724	14.20	1.30	5.86	14:30	Tail: 50:50 (Poz:H) + Salt + Bentonite + Fluid Loss + Dispersant + SMS

Casing String	TOC	% Excess
Surface	0	45
Intermediate	0	49
Production	4732	25
Completion System	10794	10

Cimarex request the ability to perform casing integrity tests after plug bump of cement job.

4. Pressure Control Equipment

A variance is requested for the use of a diverter on the surface casing. See attached for schematic.					
BOP installed and tested before drilling which hole?	Size	Min Required WP	Type		Tested To
12 1/4	13 5/8	2M	Annular	X	50% of working pressure
			Blind Ram		2M
			Pipe Ram		
			Double Ram	X	
			Other		
8 3/4	13 5/8	3M	Annular	X	50% of working pressure
			Blind Ram		3M
			Pipe Ram		
			Double Ram	X	
			Other		
6	13 5/8	5M	Annular	X	50% of working pressure
			Blind Ram		5M
			Pipe Ram	X	
			Double Ram	X	
			Other		

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

X	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.				
X	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.				
	N	Are anchors required by manufacturer?			

Cimarex Energy Co., Red Hills Unit 81H

5. Mud Program

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0' to 1010'	Fresh Water	7.83 - 8.33	28	N/C
1010' to 4932'	Brine Water	9.50 - 10.00	30-32	N/C
4932' to 10994'	Cut Brine or OBM	8.50 - 9.00	27-70	N/C
11296' to 20746'	OBM	9.50 - 10.00	50-70	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing	
	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
X	No logs are planned based on well control or offset log information.
	Drill stem test?
	Coring?

Additional Logs Planned	Interval
-------------------------	----------

7. Drilling Conditions

Condition	
BH Pressure at deepest TVD	5592 psi
Abnormal Temperature	No

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

X	H ₂ S is present
X	H ₂ S plan is attached

8. Other Facets of Operation**9. Wellhead**

A multi-bowl wellhead system will be utilized.

After running the 13-3/8" surface casing, a 13 5/8" BOP/BOPE system with a minimum working pressure of 5000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 5000 psi test. Annular will be tested to 50% of working pressure. The pressure test will be repeated at least every 30 days, as per Onshore Order No. 2.

The multi-bowl wellhead will be installed by vendor's representative. A copy of the installation instructions has been sent to the BLM field office.

The wellhead will be installed by a third-party welder while being monitored by the wellhead vendor representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi.

A solid steel body pack-off will be utilized after running and cementing the production casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi.

All casing strings will be tested as per Onshore Order No.2 to at least 0.22 psi/ft or 1,500 whichever is greater and not to exceed 70% of casing burst.

If well conditions dictate conventional slips will be set and BOPE will be tested to appropriate pressures based on permitted pressure requirements.

Geologic Prognosis



Well Information					Contact Information		
Well Name: Red Hills Unit 81H		County: Lea			Jenny Blake		
API #:		State: New Mexico			Office: (432) 571-7800		
Dev/Exp: Development		Field:			Cell: (281) 639-4419		
Surface Hole Information					Email: Jenny.Blake@coterra.com		
Footages:	Section:	Township:	Range:	Direction			
388' FNL / 1029' FEL	33	25S	33E	N-S	Staci Mueller		
Bottom Hole Information					Office: (432) 571-7898		
Footages:	Section:	Township:	Range:		Cell: (406) 794-2287		
100' FSL / 1870' FEL	4	26S	33E		Email: Staci.Mueller@coterra.com		
Target Information							
2nd Bone Spring Sand		Landing TVD: 10,772'		TD TVD: 10,755'			
Generated By: Jenny Blake Date Generated: 12/11/2023 Est. GL Elevation: 3357 Est. KB above GL: 23 Rig: Est. KB Elevation: 3380							
Horizon	TVD top	TVD base	SSTVD top	Thickness	Lithology	Mineral Resource	Comments
Rustler	960	1270	2420	310	Anhydrite	Useable Water	Hardline 100' FSL/100' FNL & 330' FWL/FEL
Top Salt/Salado	1270	4915	2110	3645	Halite	N/A	
Base Salt/Lamar	4915	4940	-1535	25	Shale	N/A	
Top Delaware Sands/Bell Canyon	4940	5960	-1560	1020	Sandstone	Natural gas, oil	
Cherry Canyon	5960	7480	-2580	1520	Sandstone	Natural gas, oil	
Brushy Canyon	7480	8855	-4100	1375	Sandstone	Natural gas, oil	
Basal Brushy Canyon	8855	9040	-5475	185			
Bone Spring Lime	9040	9065	-5660	25	Limestone	N/A	
Leonard/Avalon Sand	9065	9330	-5685	265	Shale	Natural gas, oil	
Avalon Shale	9330	10035	-5950	705	Shale	Natural gas, oil	
1st Bone Spring Sand	10035	10235	-6655	200	Sandstone	Natural gas, oil	
2nd Bone Spring Shale	10235	10585	-6855	350	Shale	Natural gas, oil	
2nd Bone Spring Sand	10585	10,772	-7205	187	Sandstone	Natural gas, oil	
Upper 2nd Sand Target	10,772	---	-7,392	---			
Potential Geologic / Drilling Hazards: N/A							
Type Log: 30025351120000							
Offset Injection Wells:							
Open Hole Logs: n/a Service Provider: Ops Contact: Sales Contact: Log Type:							
Mudlogging Vendor: n/a							

Borehole:	Well:	Field:	Structure:
Red Hills Unit 81H	Red Hills Unit 81H	NM Lea County (NAD 83)	Coterra Red Hills Unit Pad 76-81

Gravity & Magnetic Parameters				Surface Location				Miscellaneous			
Model:	HDGM 2023	Dip:	59.593°	Date:	21-Dec-2023	Lat:	N 32 5 35.56	Northing:	398478.95ftUS	Grid Conv:	0.4045°
MagDec:	6.192°	FS:	47275.765nT	Gravity FS:	998.438mgn (9.80665 Based)	Lon:	W 103 34 19.48	Easting:	777082.02ftUS	Scale Fact:	0.99997274
								Slot:	Red Hills Unit 81H	TVD Ref:	RKB (3366.100 ft above MSL)
								Plan:	Coterra Red Hills Unit 81H Rev1 kFc 21Dec23		

Critical Point		MD	INCL	AZIM	Critical Points					
					TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS	
SHL [388' FNL, 1029' FEL]		0.00	0.00	0.00	0.00	0.00	0.00	0.00		
Rustler		960.00	0.00	277.59	960.00	0.00	0.00	0.00	0.00	
Salado		1270.00	0.00	277.59	1270.00	0.00	0.00	0.00	0.00	
Nudge, Build 2"/100ft		1600.00	0.00	277.59	1600.00	0.00	0.00	0.00	0.00	
Hold		2074.83	9.50	277.59	2072.66	-5.51	5.19	-38.92	2.00	
Lamar		4956.67	9.50	277.59	4915.00	-72.18	67.99	-510.22	0.00	
Bell Canyon		4982.01	9.50	277.59	4940.00	-72.76	68.54	-514.37	0.00	
Cherry Canyon		6016.19	9.50	277.59	5960.00	-96.69	91.07	-683.50	0.00	
Drop 2"/100ft		6325.50	9.50	277.59	6265.07	-103.85	97.81	-734.08	0.00	
Hold		6800.33	0.00	277.59	6737.73	-109.35	103.00	-773.00	2.00	
Brushy Canyon		7542.60	0.00	277.59	7480.00	-109.35	103.00	-773.00	0.00	
Basal Brushy Canyon		8917.60	0.00	277.59	8855.00	-109.35	103.00	-773.00	0.00	
Bone Springs Lime		9102.60	0.00	277.59	9040.00	-109.35	103.00	-773.00	0.00	
Leonard		9127.60	0.00	277.59	9065.00	-109.35	103.00	-773.00	0.00	
Avalon		9392.60	0.00	277.59	9330.00	-109.35	103.00	-773.00	0.00	
1st BS SS		10097.60	0.00	277.59	10035.00	-109.35	103.00	-773.00	0.00	
KOP, Build 10"/100ft		10240.33	0.00	277.59	10177.73	-109.35	103.00	-773.00	0.00	
2nd BS Carb		10297.69	5.74	179.53	10235.00	-106.48	100.13	-772.98	10.00	
2nd BS SS		10693.34	45.30	179.53	10585.00	60.60	-66.95	-771.61	10.00	
Build & Turn 10"/100ft		10740.33	50.00	179.53	10616.64	95.32	-101.66	-771.32	10.00	
Build 5"/100ft		10994.12	75.00	184.53	10732.96	318.29	-324.71	-780.35	10.00	
Landing Point		11296.12	90.10	184.53	10772.00	615.73	-622.36	-803.94	5.00	
Turn 2"/100ft		11536.12	90.10	184.53	10771.58	854.82	-861.61	-822.89	0.00	
Hold		11786.25	90.10	179.53	10771.14	1104.64	-1111.51	-831.74	2.00	
Red Hills Unit 81H - BHL [100' FSL, 1870' FEL]		20746.03	90.10	179.53	10755.00	10064.40	-10070.97	-757.82	0.00	

Grid
True
Mag

Grid North
Tot Corr (M->G 5.788°)
Mag Dec (6.192°)
Grid Conv (0.404°)

1

Client

2

Client

3

Office

4

Office



Copy number for

CONTROLLED

Coterra Red Hills Unit 81H Rev1 kFc 21Dec23

of 3

22-Dec-2023

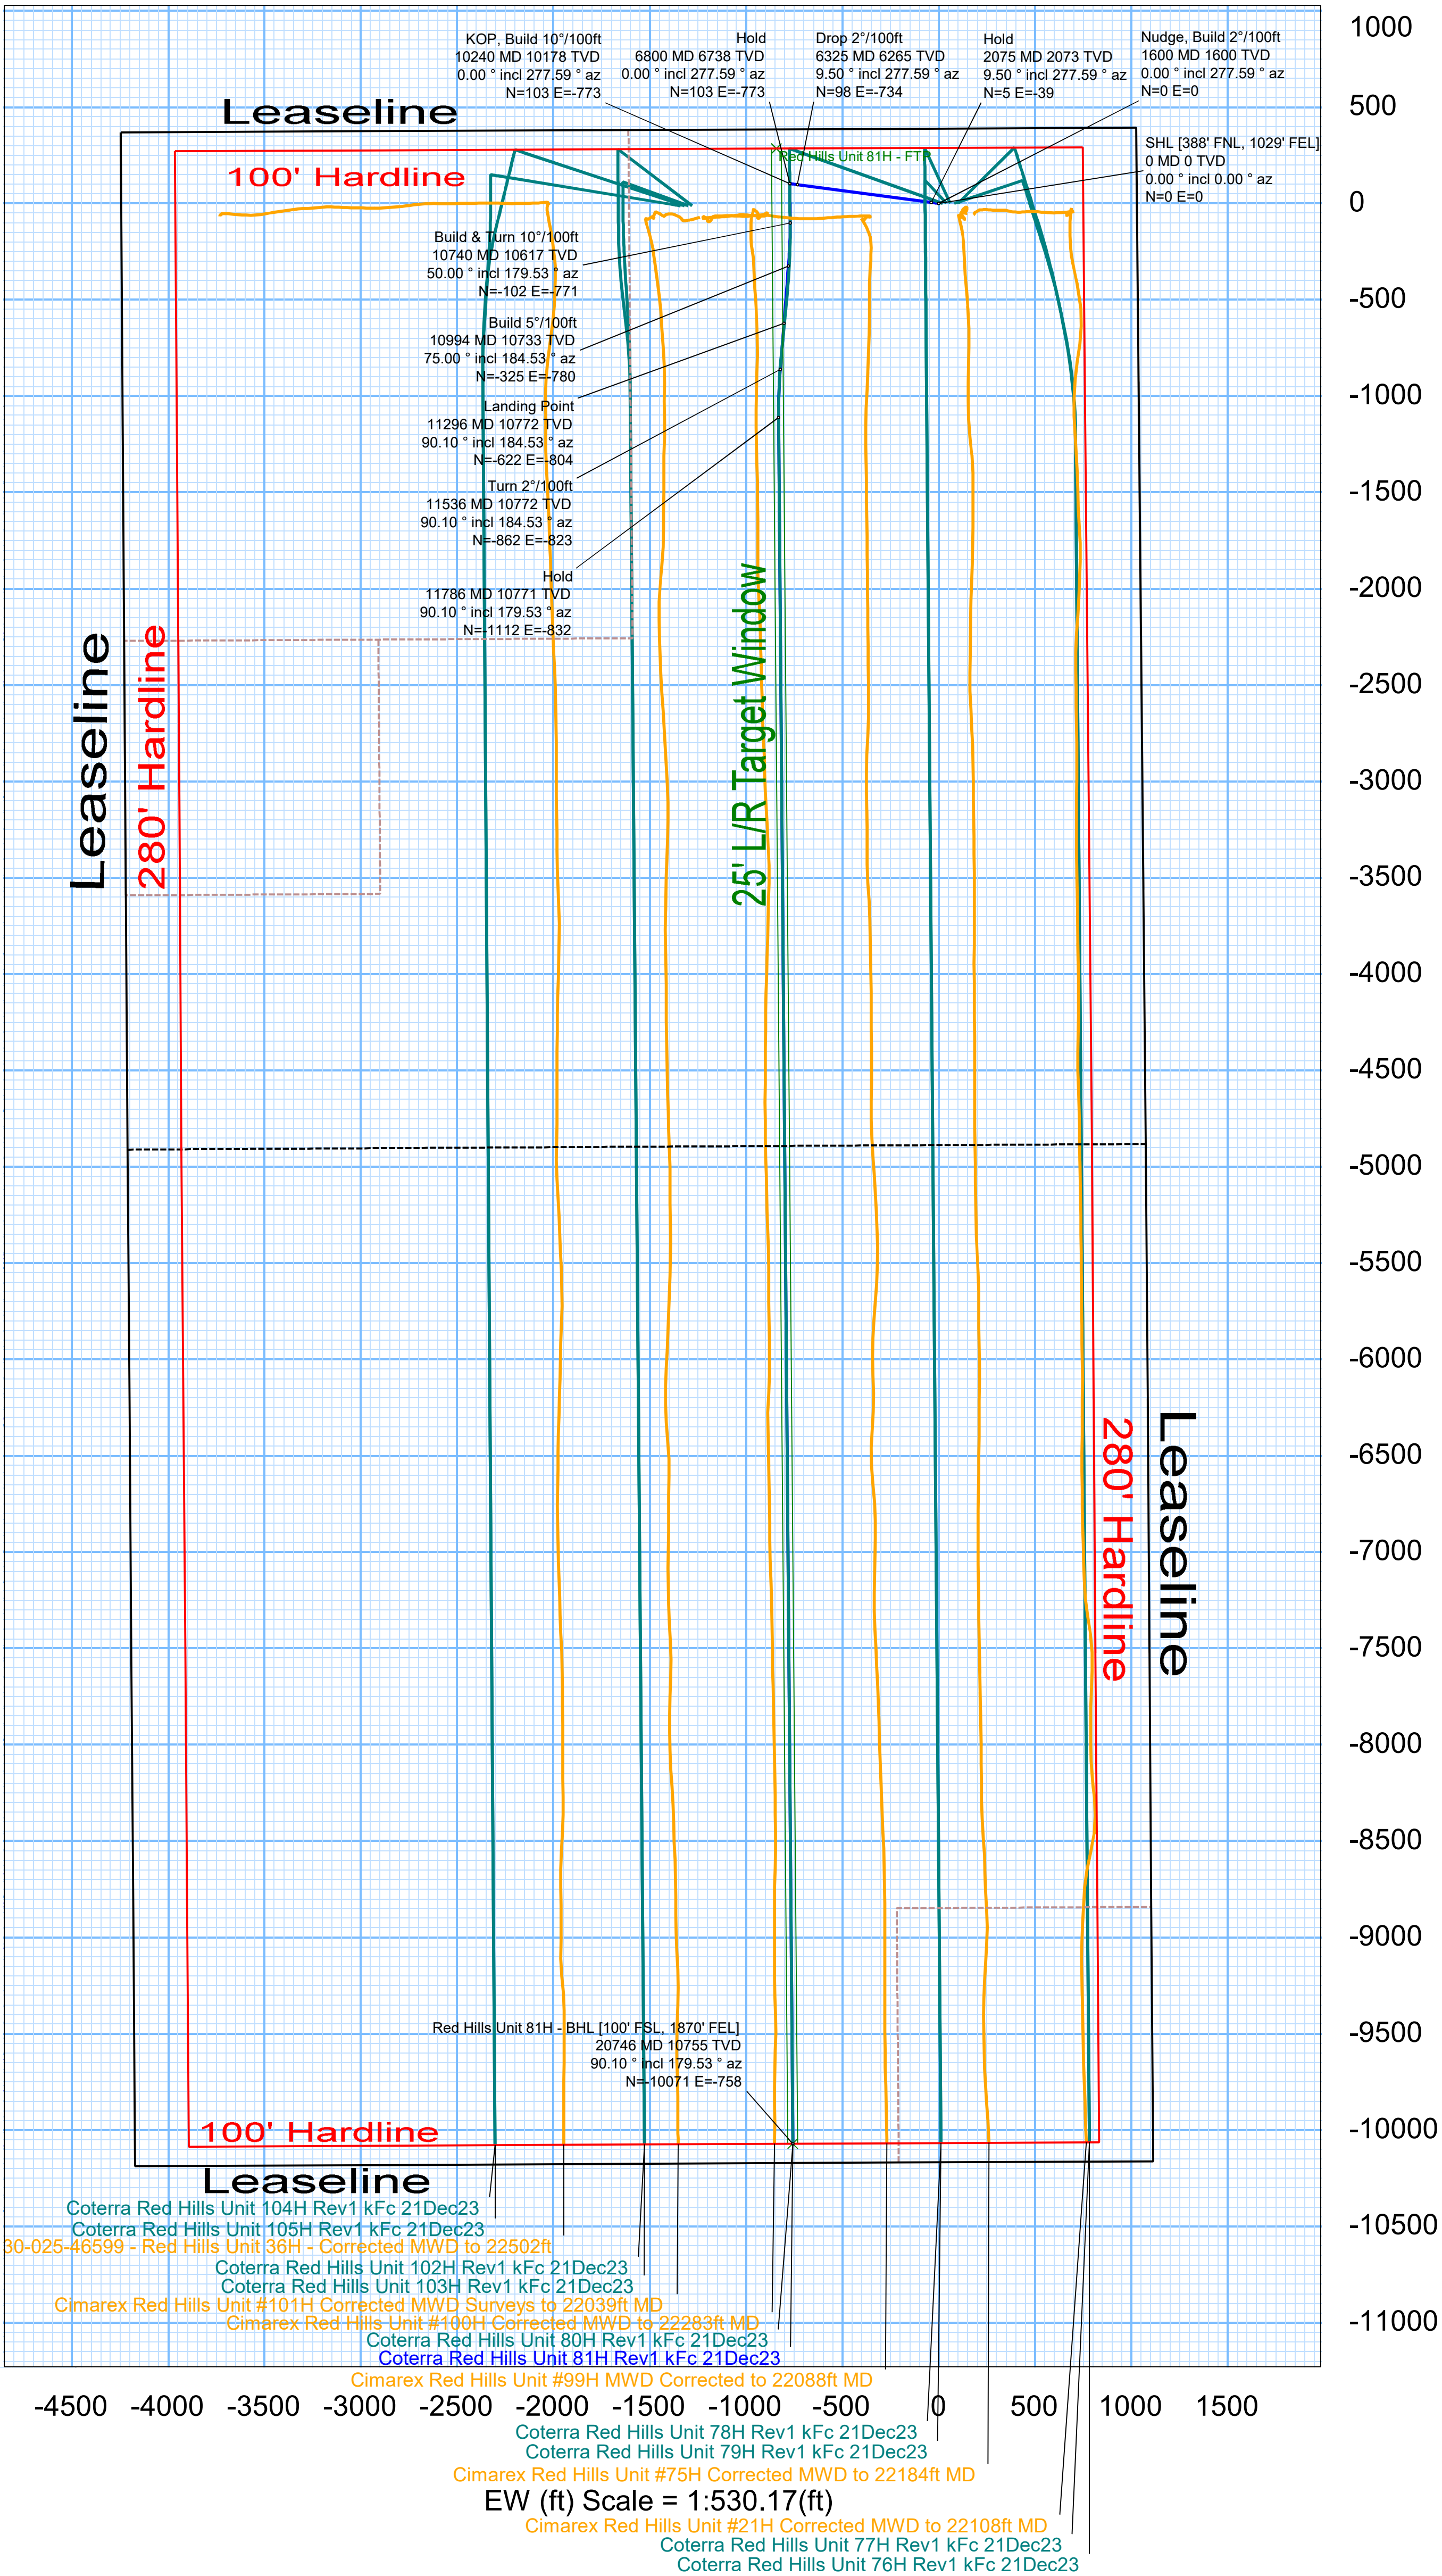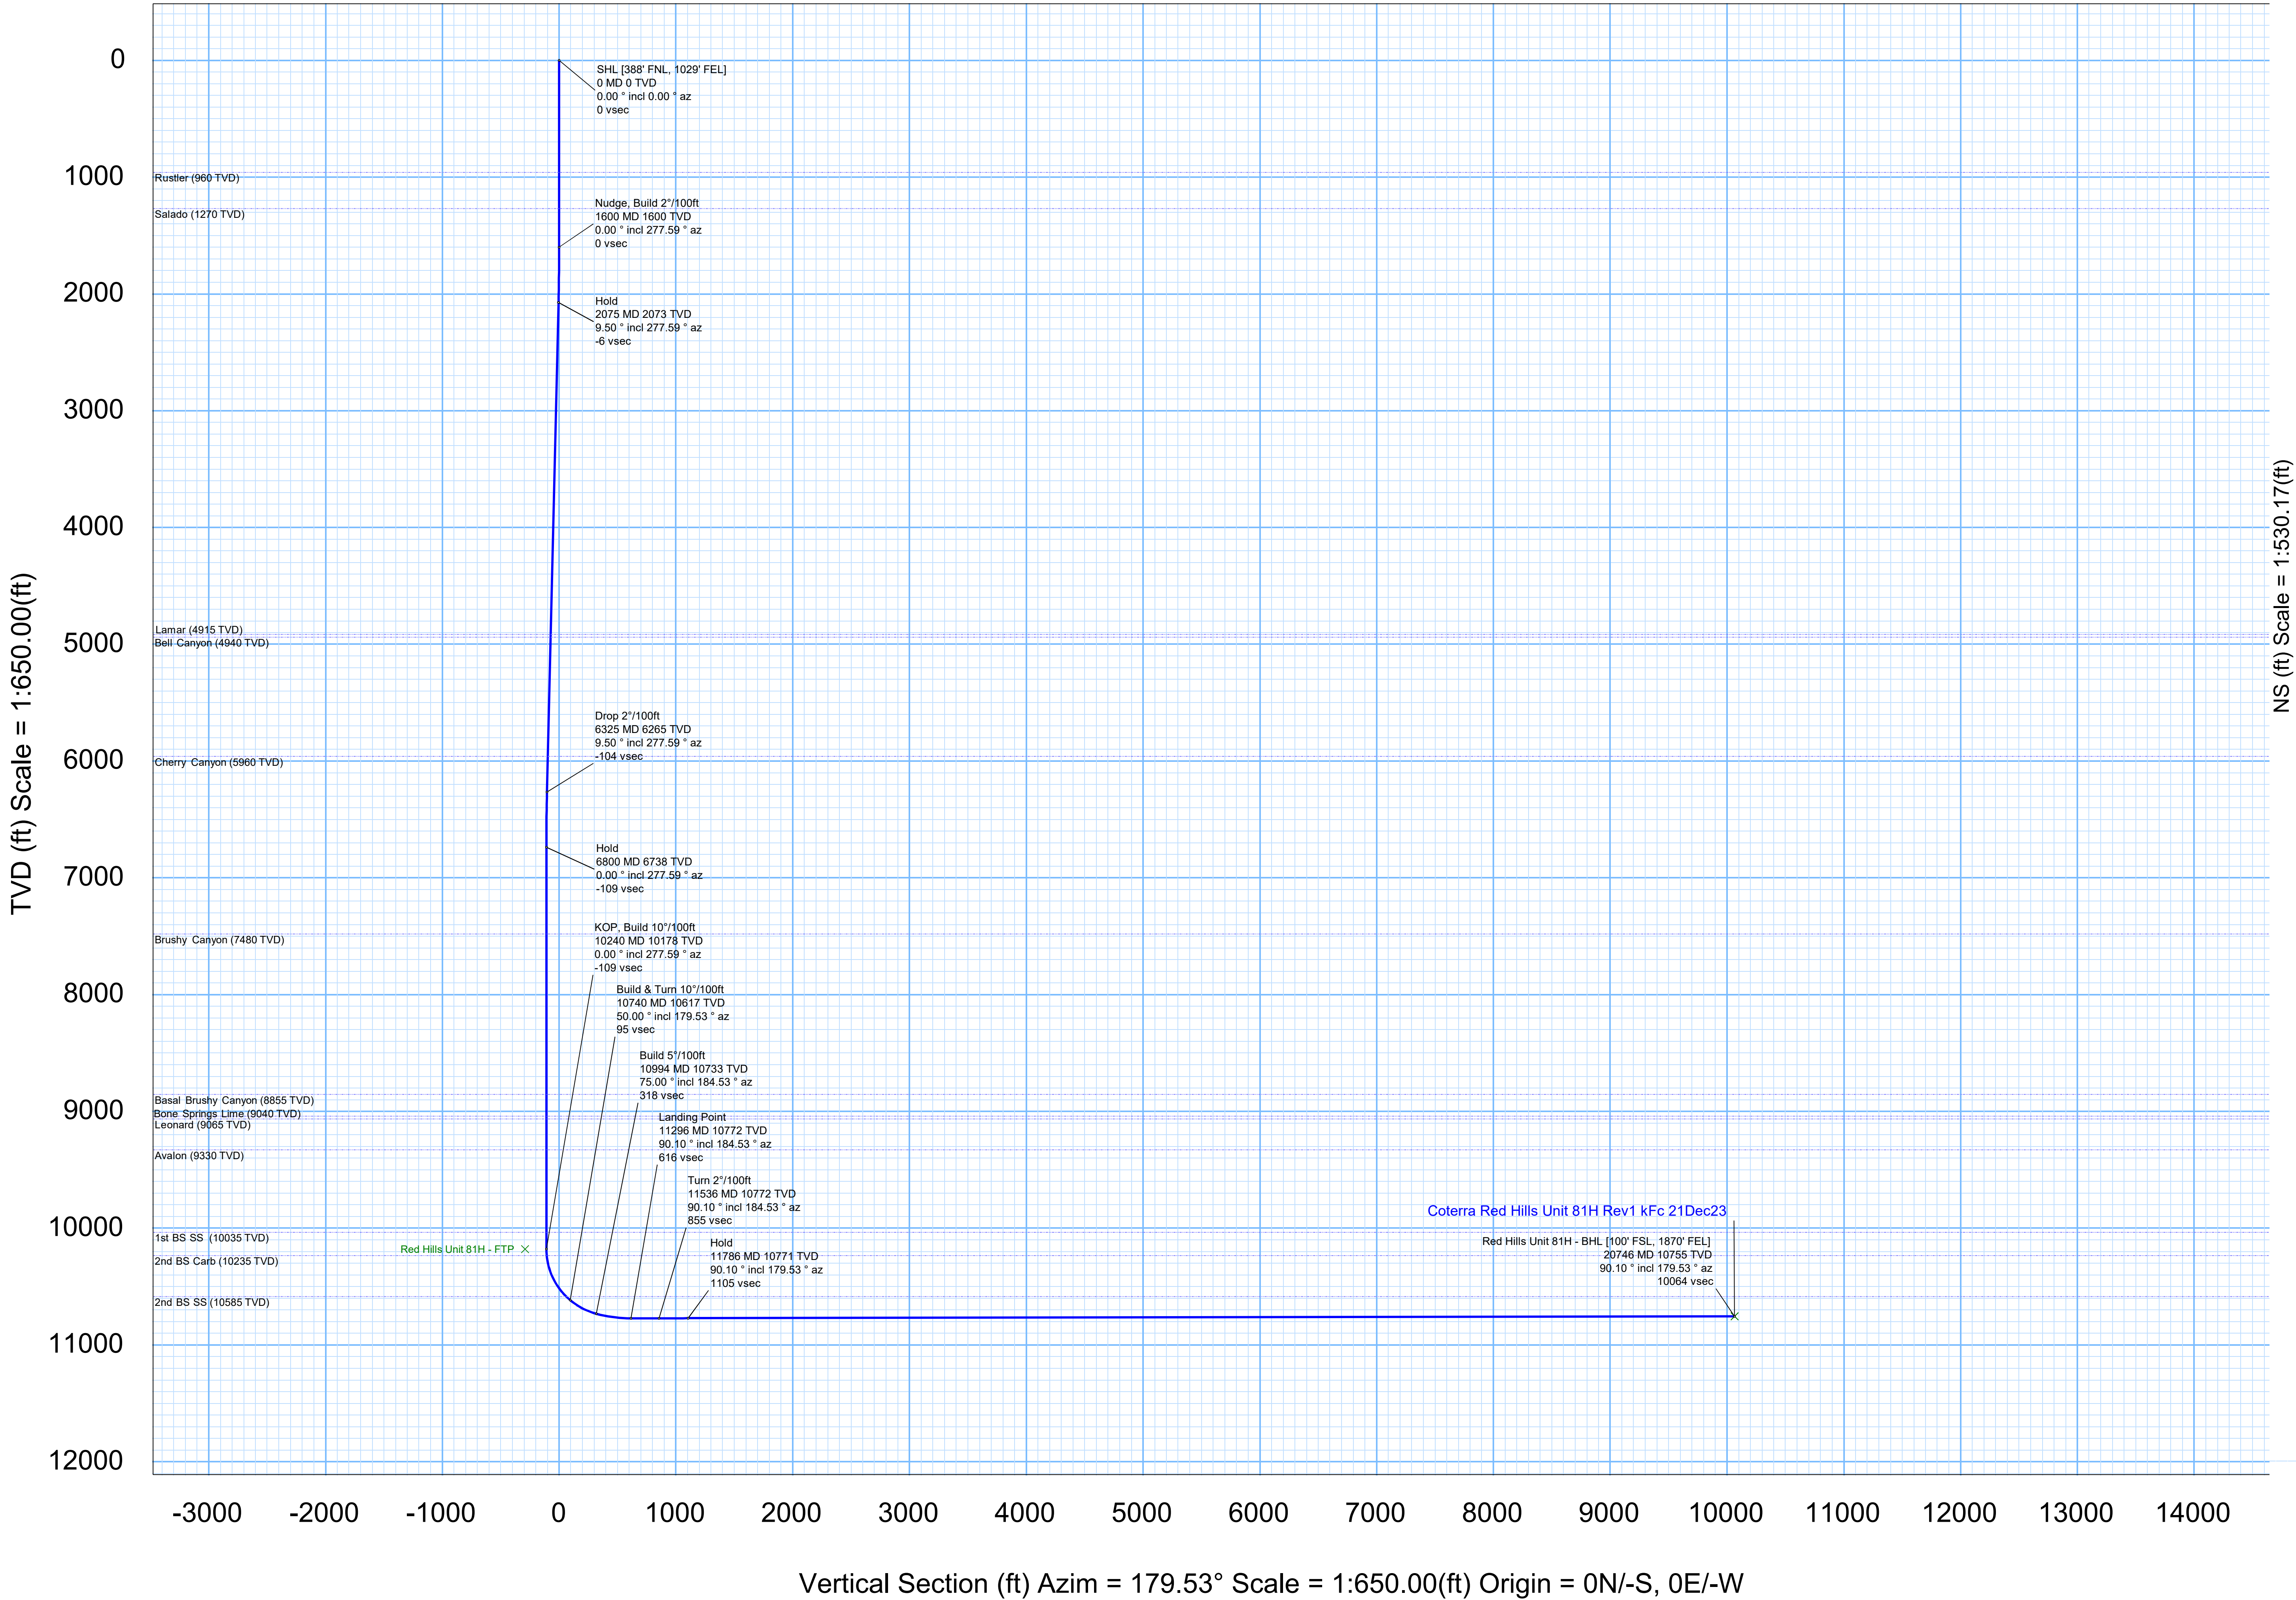



Coterra Red Hills Unit 81H Rev1 kFc 21Dec23 Anti-Collision Summary Report

Analysis Date-24hr Time: December 22, 2023 - 05:37 PM (UTC 0)
Client: COTERRA
Field: NM Lea County (NAD 83)
Structure: Coterra Red Hills Unit Pad 76-81
Slot: Red Hills Unit 81H
Well: Red Hills Unit 81H
Borehole: Red Hills Unit 81H
Scan MD Range: 0.00ft ~ 20746.03ft

Analysis Method: 3D Least Distance
Reference Trajectory: Coterra Red Hills Unit 81H Rev1 kFc 21Dec23 (Def Plan)
Depth Interval: Every 10.00 Measured Depth (ft)
Rule Set: NAL Procedure: D&M AntiCollision Standard S002
Min Pts: Absolute minima indicated.
Engine Version: 2023.1.0.1
Database 1 Project: Red Hills Unit 81H-COTERRA

Trajectory Error Model: ISCSA0 3 - D 95 % Confidence 2.7955 sigma

Offset Trajectories Summary

Offset Selection Criteria

Bounding box scan: minimum Ct-Ct separation <= 2000ft
Selection filters: Definitive Surveys - Definitive Plans - Definitive surveys exclude definitive plans
- All Non-Def Surveys when no Def-Survey is set in a borehole - All Non-Def Plans when no Def-Plan is set in a borehole
15 out of 33 are selected

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		

Results highlighted in red: Sep-Factor <= 1.5

Result highlighted in boxed, red and bold: all local minima indicated.

Coterra Red Hills Unit 80H Rev1 kFc 21Dec23 (DefinitivePlan)													Fail Minor
19.99	16.21	18.93	3.79	N/A	MAS = 4.94 (m)	0.00	0.00	CtCt<=15m<15.00				Enter Alert	
19.99	16.21	18.93	3.79	N/A	MAS = 4.94 (m)	23.00	23.00					WRP	
19.99	20.05	6.29	-0.06	1.50	OSF1.50	1330.00	1330.00		OSF<1.50			Enter Minor	
19.99	24.11	3.59	-4.12	1.23	OSF1.50	1600.00	1600.00					MinPt-CtCt	
20.15	24.56	3.45	-4.41	1.22	OSF1.50	1630.00	1630.00					MinPts	
20.27	24.71	3.47	-4.44	1.22	OSF1.50	1640.00	1640.00					MinPt-ADP	
26.92	27.07	8.55	-0.15	1.49	OSF1.50	1800.00	1799.84		OSF>1.50			Exit Minor	
55.02	34.18	31.90	20.83	2.44	OSF1.50	2300.00	2294.74					MinPt-ADP	
73.82	48.34	41.26	25.48	2.31	OSF1.50	3190.00	3172.55					MinPt-SF	
170.47	115.25	93.31	55.22	2.22	OSF1.50	6890.00	6827.40					MinPt-CtCt	
170.92	116.66	92.82	54.26	2.20	OSF1.50	6970.00	6907.40					MinPt-EOU	
171.34	117.16	92.91	54.18	2.20	OSF1.50	7000.00	6937.40					MinPt-ADP	
172.11	117.79	93.25	54.31	2.20	OSF1.50	7040.00	6977.40					MinPt-SF	
181.80	161.45	73.84	20.35	1.69	OSF1.50	10240.33	10177.73					MinPts	
548.76	165.64	438.01	383.13	4.99	OSF1.50	10930.00	10712.98	OSF>5.00				Exit Alert	
647.54	195.16	517.10	452.38	4.99	OSF1.50	15750.00	10764.00	OSF<5.00				Enter Alert	
647.20	347.82	414.99	299.38	2.79	OSF1.50	20740.00	10755.01					MinPt-CtCt	
647.20	347.97	414.90	299.23	2.79	OSF1.50	20746.03	10755.00					MinPts	
Coterra Red Hills Unit 79H Rev1 kFc 21Dec23 (DefinitivePlan)													Warning Alert
39.99	32.21	38.93	7.79	N/A	MAS = 9.82 (m)	0.00	0.00	CtCt<=15m<15.00				Enter Alert	
39.99	32.21	38.93	7.79	N/A	MAS = 9.82 (m)	23.00	23.00					WRP	
39.99	32.21	23.59	7.79	2.53	MAS = 9.82 (m)	1600.00	1600.00					MinPts	
40.15	32.21	23.45	7.94	2.49	MAS = 9.82 (m)	1630.00	1630.00					MinPt-EOU	
40.84	32.21	23.74	8.63	2.47	MAS = 9.82 (m)	1670.00	1669.99					MinPt-SF	
109.56	33.84	86.68	75.72	4.96	OSF1.50	2260.00	2255.29	OSF>5.00				Exit Alert	
701.11	148.11	602.04	553.00	7.14	OSF1.50	9990.00	9927.40					MinPt-CtCt	
701.18	148.38	601.93	552.80	7.13	OSF1.50	10030.00	9967.40					MinPt-EOU	
701.28	148.50	601.95	552.78	7.12	OSF1.50	10050.00	9987.40					MinPt-ADP	
702.24	148.90	602.65	553.34	7.11	OSF1.50	10120.00	10057.40					MinPt-SF	
851.25	256.20	680.12	595.05	5.00	OSF1.50	17240.00	10761.32	OSF<5.00				Enter Alert	
850.15	356.60	612.09	493.55	3.58	OSF1.50	20746.03	10755.00					MinPts	
Coterra Red Hills Unit 78H Rev1 kFc 21Dec23 (DefinitivePlan)													Warning Alert
59.99	32.81	58.93	27.18	N/A	MAS = 10.00 (m)	0.00	0.00					Surface	
59.99	32.81	58.93	27.18	55438.61	MAS = 10.00 (m)	23.00	23.00					WRP	
59.99	32.81	47.20	27.18	5.00	MAS = 10.00 (m)	1240.00	1240.00	OSF<5.00				Enter Alert	
59.99	32.81	43.59	27.18	3.83	MAS = 10.00 (m)	1600.00	1600.00					MinPts	
60.15	32.81	43.45	27.34	3.76	MAS = 10.00 (m)	1630.00	1630.00					MinPt-EOU	
62.08	32.81	44.59	29.28	3.70	MAS = 10.00 (m)	1710.00	1709.97					MinPt-SF	
102.39	32.81	81.06	69.58	4.98	MAS = 10.00 (m)	2100.00	2097.48	OSF>5.00				Exit Alert	
723.86	153.83	620.98	570.03	7.09	OSF1.50	10250.00	10187.40					MinPt-EOU	
723.92	153.90	620.99	570.02	7.09	OSF1.50	10260.00	10197.40					MinPt-ADP	
725.60	154.46	622.30	571.15	7.08	OSF1.50	10330.00	10267.04					MinPt-SF	
769.69	150.34	669.14	619.35	7.72	OSF1.50	10940.00	10716.54					MinPt-CtCt	
769.72	150.42	669.11	619.30	7.72	OSF1.50	10950.00	10719.93					MinPts	
776.36	152.86	674.13	623.50	7.68	OSF1.50	11190.00	10767.28					MinPt-SF	
808.20	243.38	645.62	564.83	5.00	OSF1.50	16370.00	10762.88	OSF<5.00				Enter Alert	
804.00	363.97	661.02	440.03	3.32	OSF1.50	20746.03	10755.00					MinPts	
Coterra Red Hills Unit 77H Rev1 kFc 21Dec23 (DefinitivePlan)													Warning Alert
79.98	32.81	78.92	47.17	N/A	MAS = 10.00 (m)	0.00	0.00					Surface	
79.98	32.81	78.92	47.17	N/A	MAS = 10.00 (m)	23.00	23.00					WRP	
79.98	32.81	63.58	47.17	5.12	MAS = 10.00 (m)	1600.00	1600.00					MinPts	
80.14	32.81	63.44	47.33	5.04	MAS = 10.00 (m)	1630.00	1630.00					MinPt-EOU	
80.42	32.81	63.52	47.61	4.99	MAS = 10.00 (m)	1650.00	1650.00	OSF<5.00				Enter Alert	
83.37	32.81	65.59	50.56	4.90	MAS = 10.00 (m)	1740.00	1739.94					MinPt-SF	
89.28	32.81	70.61	56.47	4.99	MAS = 10.00 (m)	1830.00	1829.75	OSF>5.00				Exit Alert	
1208.10	152.43	1106.15	1056.67	11.96	OSF1.50	10270.00	10207.39					MinPts	
1540.07	361.65	1298.65	1178.43	6.40	OSF1.50	20746.03	10755.00					MinPts	
Cimarex Red Hills Unit #100H Corrected MWD to 22283ft MD (DefinitiveSurvey)													Warning Alert
1221.95	32.81	1220.89	1189.14	#####	MAS = 10.00 (m)	0.00	0.00					Surface	
1221.93	32.81	1220.82	1189.12	26427.03	MAS = 10.00 (m)	23.00	23.00					WRP	
1221.56	32.81	1219.73	1188.76	1588.85	MAS = 10.00 (m)	140.00	140.00					MinPts	
1221.75	32.81	1219.57	1188.94	1090.14	MAS = 10.00 (m)	180.00	180.00					MinPt-EOU	
1219.24	32.81	1210.08	1186.43	150.51	MAS = 10.00 (m)	880.00	880.00					MinPts	
1219.39	32.81	1209.16	1186.58	132.84	MAS = 10.00 (m)	990.00	990.00					MinPt-EOU	
1219.71	32.81	1208.87	1186.90	123.76	MAS = 10.00 (m)	1080.00	1080.00					MinPt-EOU	
275.55	83.68	219.44	191.87	4.98	OSF1.50	5870.00	5815.82	OSF<5.00				Enter Alert	
191.49	99.59	124.77	91.90	2.90	OSF1.50	6770.00	6707.41					MinPt-CtCt	
192.84	102.88	123.93	89.97	2.82	OSF1.50	7020.00	6957.40					MinPt-EOU	
194.05	104.32	124.17	89.73	2.80	OSF1.50	7130.00	7067.40					MinPt-ADP	
201.28	109.92	127.67	91.36	2.76	OSF1.50	7550.00	7487.40					MinPt-SF	
215.47	119.40	135.54	96.07	2.72	OSF1.50	8250.00	8187.40					MinPt-SF	
218.65	121.16	137.55	97.49	2.72	OSF1.50	8380.00	8317.40					MinPt-SF	

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
244.34	135.90	153.41	108.44	2.71		OSF1.50	9430.00	9367.40				MinPt-ADP	
247.71	144.58	151.00	103.14	2.58		OSF1.50	10040.00	9977.40				MinPt-CtCt	
167.36	147.24	68.81	20.06	1.71		OSF1.50	10685.21	10579.24				MinPts	
501.00	152.78	398.82	348.22	4.94		OSF1.50	11210.00	10768.92	OSF<5.00			Exit Alert	
1721.62	115.62	1644.21	1606.00	22.51		OSF1.50	12600.00	10769.67				MinPt-CtCt	
1721.95	116.56	1643.91	1605.38	22.34		OSF1.50	12670.00	10769.55				MinPt-EOU	
1722.29	116.97	1643.99	1605.32	22.26		OSF1.50	12700.00	10769.49				MinPt-ADP	
1720.38	119.78	1640.21	1600.61	21.71		OSF1.50	12850.00	10769.22				MinPt-CtCt	
1720.44	128.44	1634.48	1592.00	20.24		OSF1.50	13310.00	10768.40				MinPt-CtCt	
1720.69	129.17	1634.25	1591.52	20.12		OSF1.50	13360.00	10768.31				MinPt-EOU	
1722.21	144.90	1629.29	1581.31	17.98		OSF1.50	14060.00	10767.04				MinPt-CtCt	
1723.44	151.37	1622.20	1572.07	17.18		OSF1.50	14330.00	10766.56				MinPt-CtCt	
1723.12	157.34	1617.90	1565.78	16.52		OSF1.50	14570.00	10766.13				MinPt-CtCt	
1724.90	169.78	1611.35	1555.12	15.32		OSF1.50	15070.00	10765.22				MinPt-EOU	
1726.10	175.64	1608.68	1550.46	14.82		OSF1.50	15270.00	10764.86				MinPt-CtCt	
1727.76	182.72	1605.56	1544.98	14.25		OSF1.50	15530.00	10764.40				MinPt-CtCt	
1728.49	185.17	1604.71	1543.31	14.07		OSF1.50	15640.00	10764.20				MinPt-EOU	
1729.14	193.52	1599.79	1535.61	13.46		OSF1.50	15920.00	10763.69				MinPt-CtCt	
1727.66	206.85	1589.43	1520.81	12.58		OSF1.50	16390.00	10762.85				MinPt-CtCt	
1724.02	228.71	1571.22	1495.31	11.35		OSF1.50	17140.00	10761.50				MinPt-CtCt	
1725.73	243.01	1563.40	1482.73	10.69		OSF1.50	17620.00	10760.63				MinPt-CtCt	
1726.77	246.18	1562.33	1480.59	10.56		OSF1.50	17750.00	10760.40				MinPt-EOU	
1727.78	247.38	1562.53	1480.39	10.51		OSF1.50	17800.00	10760.31				MinPt-ADP	
1730.74	268.98	1551.09	1461.76	9.68		OSF1.50	18480.00	10759.08				MinPt-CtCt	
1728.73	284.88	1538.48	1443.84	9.13		OSF1.50	19000.00	10758.15				MinPt-CtCt	
1728.70	305.64	1524.61	1423.06	8.51		OSF1.50	19670.00	10756.94				MinPt-CtCt	
1727.96	313.41	1518.69	1414.55	8.29		OSF1.50	19920.00	10756.49				MinPt-CtCt	
1726.94	325.95	1509.31	1400.99	7.97		OSF1.50	20320.00	10755.77				MinPt-CtCt	
1731.84	339.14	1505.42	1392.70	7.68		OSF1.50	20740.00	10755.01				MinPt-CtCt	
1731.85	339.18	1505.40	1392.66	7.68		OSF1.50	20746.03	10755.00				MinPts	

Cimarex Red Hills Unit #99H MWD Corrected to 22088ft MD (DefinitiveSurvey)

Warning Alert

1201.99	32.81	1200.93	1169.19	6183505.09	MAS = 10.00 (m)	0.00	0.00					MinPts	
1202.01	32.81	1200.92	1169.20	38191.78	MAS = 10.00 (m)	23.00	23.00					WRP	
1202.78	32.81	1200.63	1169.97	1103.74	MAS = 10.00 (m)	190.00	190.00					MinPt-EOU	
1202.79	32.81	1198.07	1169.98	328.59	MAS = 10.00 (m)	450.00	450.00					MinPts	
1202.91	32.81	1197.93	1170.10	307.20	MAS = 10.00 (m)	480.00	480.00					MinPt-EOU	
250.64	76.32	199.43	174.31	4.97	OSF1.50	5360.00	5312.81	OSF<5.00				Enter Alert	
169.97	88.72	110.49	81.24	2.89	OSF1.50	5933.82	5878.76					MinPt-CtCt	
170.05	88.97	110.41	81.08	2.88	OSF1.50	5950.00	5894.72					MinPt-EOU	
170.18	89.12	110.44	81.07	2.88	OSF1.50	5960.00	5904.58					MinPt-ADP	
170.64	89.40	110.71	81.24	2.88	OSF1.50	5980.00	5924.31					MinPt-SF	
336.69	101.73	268.54	234.96	5.00	OSF1.50	7190.00	7127.40	OSF>5.00				Exit Alert	
449.72	135.73	358.90	313.99	5.00	OSF1.50	9510.00	9447.40	OSF<5.00				Enter Alert	
389.27	148.52	289.93	240.75	3.95	OSF1.50	10720.00	10603.30					MinPt-CtCt	
389.32	148.60	289.93	240.72	3.95	OSF1.50	10730.00	10609.93					MinPts	
389.52	148.68	290.07	240.84	3.95	OSF1.50	10740.00	10616.43					MinPt-SF	
504.21	152.18	402.43	352.04	4.99	OSF1.50	11060.00	10748.17	OSF>5.00				Exit Alert	
1591.86	129.88	1504.95	1461.98	18.51	OSF1.50	13210.00	10768.58					MinPt-CtCt	
1589.05	140.77	1493.88	1447.29	17.03	OSF1.50	13760.00	10767.58					MinPt-CtCt	
1588.47	142.01	1493.41	1446.47	16.89	OSF1.50	13830.00	10767.46					MinPt-EOU	
1587.01	149.29	1487.15	1437.71	16.04	OSF1.50	14140.00	10766.90					MinPt-CtCt	
1587.28	150.15	1486.86	1437.13	15.95	OSF1.50	14190.00	10766.81					MinPt-EOU	
1587.58	150.50	1486.92	1437.08	15.92	OSF1.50	14210.00	10766.77					MinPt-ADP	
1592.73	156.64	1487.97	1436.09	15.34	OSF1.50	14460.00	10766.32					MinPt-EOU	
1597.31	168.00	1484.99	1429.32	14.34	OSF1.50	14900.00	10765.53					MinPt-CtCt	
1599.21	179.37	1479.30	1419.84	13.44	OSF1.50	15340.00	10764.74					MinPt-CtCt	
1599.82	181.30	1478.62	1418.51	13.30	OSF1.50	15430.00	10764.58					MinPt-EOU	
1601.87	183.68	1479.09	1418.19	13.14	OSF1.50	15530.00	10764.40					MinPt-ADP	
1608.01	192.24	1479.52	1415.77	12.60	OSF1.50	15830.00	10763.86					MinPt-EOU	
1608.36	198.42	1475.75	1409.94	12.21	OSF1.50	16030.00	10763.50					MinPt-CtCt	
1608.78	199.66	1475.34	1409.13	12.14	OSF1.50	16090.00	10763.39					MinPt-EOU	
1609.30	200.26	1475.46	1409.03	12.11	OSF1.50	16120.00	10763.33					MinPt-ADP	
1609.59	218.41	1453.66	1381.18	11.03	OSF1.50	16750.00	10762.20					MinPt-CtCt	
1609.31	225.86	1448.42	1373.46	10.66	OSF1.50	17010.00	10761.73					MinPt-CtCt	
1600.47	239.69	1440.34	1360.78	10.05	OSF1.50	17480.00	10760.88					MinPt-CtCt	
1601.49	244.83	1437.94	1356.66	9.85	OSF1.50	17670.00	10760.54					MinPt-EOU	
1602.20	245.69	1438.08	1356.61	9.82	OSF1.50	17710.00	10760.47					MinPt-ADP	
1609.85	278.46	1423.88	1331.39	8.70	OSF1.50	18770.00	10758.56					MinPt-CtCt	
1612.44	290.75	1418.27	1321.68	8.34	OSF1.50	19170.00	10757.84					MinPt-CtCt	
1612.20	298.43	1412.92	1313.77	8.13	OSF1.50	19420.00	10757.39					MinPt-CtCt	
1601.12	337.71	1375.65	1263.41	7.13	OSF1.50	20690.00	10755.10					MinPt-CtCt	
1601.25	339.32	1374.70	1261.92	7.09	OSF1.50	20746.03	10755.00					MinPts	

Coterra Red Hills Unit 102H Rev1 kFc 21Dec23 (DefinitivePlan)

Warning Alert

1280.12	32.81	1279.05	1247.31	N/A	MAS = 10.00 (m)	0.00	0.00					Surface	
1280.12	32.81	1279.02	1247.31	32816.66	MAS = 10.00 (m)	23.00	23.00					WRP	
846.36	98.47	780.39	747.90	13.01	OSF1.50	6540.00	6477.76					MinPt-CtCt	
846.55	98.92	780.28	747.63	12.95	OSF1.50	6570.00	6507.65					MinPt-EOU	
846.69	99.08	780.31	747.61	12.93	OSF1.50	6580.00	6517.62					MinPt-ADP	
910.70	152.98	806.39	757.72	8.98	OSF1.50	10250.00	10187.40					MinPt-EOU	
910.75	153.06	806.39	757.70	8.97	OSF1.50	10260.00	10197.40					MinPt-ADP	
913.31	153.80	810.44	759.50	8.95	OSF1.50	10360.00	10296.54					MinPt-SF	
798.97	240.41	638.37	558.56	5.00	OSF1.50	16300.00	10763.01	OSF<5.00				Enter Alert	
795.69	363.34	553.14	432.35	3.29	OSF1.50	20743.17	10755.01					MinPt-CtCt	
795.70	363.36	553.13	432.33	3.29	OSF1.50	20746.03	10755.00					MinPts	

Coterra Red Hills Unit 103H Rev1 kFc 21Dec23 (DefinitivePlan)

Warning Alert

1300.12	32.81	1299.05	1267.31	N/A	MAS = 10.00 (m)	0.00	0.00		
1300.12	32.81	1299.01	1267.31	32444.95	MAS = 10.00 (m)	23.00	23.00		
866.96	147.71	768.16	719.25	8.85	OSF1.50	9980.00	9917.40		
867.09	148.14	768.00	718.95	8.83	OSF1.50	10030.00	9967.40		
867.23	148.32	768.02	718.91	8.82	OSF1.50	10050.00	9987.40		
871.54	149.74	771.39	721.80	8.78	OSF1.50	10200.00	10137.40		
865.16	260.47	691.18	604.69	5.00	OSF1.50	17330.00	10761.15	OSF<5.00	
864.08	357.73	625.26	506.35	3.63	OSF1.50	20744.23	10755.00		
864.08	357	625.24	506.32	3.63	OSF1.50	20746.03	10755.00		

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
102.92	32.81	85.55	70.11	6.22		MAS = 10.00 (m)	1700.00	1699.98				MinPt-SF	
1180.91	153.27	1078.40	1027.64	11.62		OSF 1.50	10260.00	10197.40				MinPt-EOU	
1180.98	153.35	1078.42	1027.63	11.62		OSF 1.50	10270.00	10207.39				MinPt-ADP	
1186.52	154.65	1083.09	1031.87	11.57		OSF 1.50	10440.00	10373.39				MinPt-SF	
1678.33	363.63	1435.58	1314.70	6.94		OSF 1.50	20746.03	10755.00				MinPts	
Cimarex Red Hills Unit #75H Corrected MWD to 22184ft MD (DefinitiveSurvey)													Pass
152.21	32.81	151.15	119.41	N/A		MAS = 10.00 (m)	0.00	0.00				Surface	
152.21	32.81	151.15	119.40	604858.48		MAS = 10.00 (m)	10.00	10.00				MinPts	
152.21	32.81	151.15	119.41	100472.32		MAS = 10.00 (m)	23.00	23.00				WRP	
129.49	32.81	114.51	96.64	9.20		MAS = 10.00 (m)	1690.00	1689.99				MinPts	
133.68	32.81	114.46	96.68	9.15		MAS = 10.00 (m)	1700.00	1699.98				MinPt-EOU	
537.57	32.81	117.84	100.87	8.93		MAS = 10.00 (m)	1800.00	1799.84				MinPt-SF	
537.57	56.33	499.68	481.23	14.54		OSF 1.50	4170.00	4139.12				MinPt-SF	
908.13	97.01	843.13	811.12	14.17		OSF 1.50	6940.00	6877.40				MinPt-CtCt	
901.51	108.63	828.76	792.87	12.55		OSF 1.50	7750.00	7687.40				MinPt-CtCt	
901.77	109.39	828.51	792.38	12.46		OSF 1.50	7810.00	7747.40				MinPt-EOU	
902.20	109.91	828.60	792.29	12.41		OSF 1.50	7850.00	7787.40				MinPt-ADP	
925.37	134.81	835.17	790.56	10.36		OSF 1.50	9560.00	9497.40				MinPt-EOU	
893.71	147.95	794.74	745.75	9.11		OSF 1.50	10730.00	10609.93				MinPts	
893.76	148.02	794.76	745.74	9.11		OSF 1.50	10740.00	10616.43				MinPt-ADP	
894.51	148.22	795.37	746.29	9.10		OSF 1.50	10770.00	10635.13				MinPt-SF	
1980.66	140.31	1886.79	1840.34	21.31		OSF 1.50	13170.00	10768.65				MinPt-CtCt	
1980.83	140.81	1886.63	1840.02	21.24		OSF 1.50	13210.00	10768.58				MinPt-EOU	
1981.06	141.07	1886.69	1839.99	21.20		OSF 1.50	13230.00	10768.54				MinPt-ADP	
1981.55	141.53	1886.87	1840.02	21.14		OSF 1.50	13260.00	10768.49				MinPt-ADP	
1988.76	150.57	1888.05	1838.19	19.93		OSF 1.50	13710.00	10767.67				MinPt-CtCt	
1989.58	158.40	1883.65	1831.18	18.95		OSF 1.50	14090.00	10766.99				MinPt-CtCt	
1987.35	178.17	1868.24	1809.18	16.82		OSF 1.50	14960.00	10765.42				MinPt-CtCt	
1988.04	189.78	1861.19	1798.26	15.79		OSF 1.50	15430.00	10764.58				MinPt-CtCt	
1988.39	190.88	1860.81	1797.51	15.70		OSF 1.50	15490.00	10764.47				MinPt-EOU	
1989.02	198.25	1856.52	1790.76	15.12		OSF 1.50	15760.00	10763.98				MinPt-CtCt	
1989.77	203.59	1853.71	1786.18	14.72		OSF 1.50	15960.00	10763.62				MinPt-CtCt	
1990.67	206.19	1852.89	1784.49	14.54		OSF 1.50	16080.00	10763.41				MinPt-EOU	
1992.42	208.33	1853.21	1784.09	14.41		OSF 1.50	16170.00	10763.24				MinPt-ADP	
1995.13	216.04	1850.78	1779.10	13.91		OSF 1.50	16420.00	10762.79				MinPt-CtCt	
1979.86	253.80	1810.33	1726.06	11.74		OSF 1.50	17770.00	10760.36				MinPt-CtCt	
1985.45	283.11	1796.38	1702.34	10.55		OSF 1.50	18770.00	10758.56				MinPt-CtCt	
1987.29	292.45	1791.99	1694.84	10.22		OSF 1.50	19110.00	10757.95				MinPt-EOU	
1990.33	295.93	1792.72	1694.40	10.12		OSF 1.50	19240.00	10757.71				MinPt-ADP	
1991.31	302.93	1789.03	1688.38	9.89		OSF 1.50	19430.00	10757.37				MinPt-CtCt	
1974.16	325.51	1756.83	1648.65	9.12		OSF 1.50	20180.00	10756.02				MinPt-CtCt	
1976.62	334.58	1753.24	1642.04	8.88		OSF 1.50	20500.00	10755.44				MinPt-EOU	
1977.84	336.05	1753.48	1641.79	8.85		OSF 1.50	20560.00	10755.34				MinPt-ADP	
1979.09	339.73	1752.28	1639.36	8.76		OSF 1.50	20640.00	10755.19				MinPt-CtCt	
1979.40	340.65	1751.98	1638.74	8.74		OSF 1.50	20690.00	10755.10				MinPt-EOU	
1979.71	341.02	1752.04	1638.69	8.73		OSF 1.50	20710.00	10755.06				MinPt-ADP	
1980.54	341.65	1752.45	1638.89	8.72		OSF 1.50	20746.03	10755.00				MinPt-SF	
Cimarex Red Hills Unit #21H Corrected MWD to 22108ft MD (DefinitiveSurvey)													Pass
189.71	32.81	188.65	156.91	N/A		MAS = 10.00 (m)	0.00	0.00				Surface	
189.71	32.81	188.64	156.90	N/A		MAS = 10.00 (m)	1.70	1.70				MinPts	
189.71	32.81	188.65	156.91	54251.40		MAS = 10.00 (m)	23.00	23.00				WRP	
190.50	32.81	181.54	157.69	23.99		MAS = 10.00 (m)	880.00	880.00				MinPts	
190.66	32.81	181.41	157.85	23.16		MAS = 10.00 (m)	910.00	910.00				MinPt-EOU	
224.81	32.81	208.12	192.00	14.25		MAS = 10.00 (m)	1900.00	1899.45				MinPt-SF	
1446.09	136.19	1354.96	1309.89	16.03		OSF 1.50	9640.00	9577.40				MinPt-CtCt	
1434.34	147.07	1335.96	1287.27	14.72		OSF 1.50	10640.00	10545.77				MinPt-CtCt	
1434.37	147.17	1335.93	1287.20	14.71		OSF 1.50	10660.00	10560.87				MinPts	
1437.57	147.93	1338.63	1289.65	14.66		OSF 1.50	10780.00	10641.09				MinPt-SF	
2201.41	142.50	2106.08	2058.91	23.32		OSF 1.50	12490.00	10769.87				MinPt-EOU	
2183.92	149.82	2083.71	2034.10	22.00		OSF 1.50	13040.00	10768.88				MinPt-CtCt	
2183.14	154.09	2080.08	2029.05	21.38		OSF 1.50	13300.00	10768.41				MinPt-CtCt	
2183.60	155.42	2079.66	2028.18	21.20		OSF 1.50	13390.00	10768.25				MinPt-EOU	
2178.99	169.05	2065.96	2009.94	19.44		OSF 1.50	14100.00	10766.97				MinPt-CtCt	
2176.27	193.51	2046.93	1982.76	16.95		OSF 1.50	15200.00	10764.99				MinPt-CtCt	
2176.46	194.14	2046.70	1982.32	16.89		OSF 1.50	15240.00	10764.92				MinPt-EOU	
2176.70	194.45	2046.74	1982.25	16.87		OSF 1.50	15260.00	10764.88				MinPt-ADP	
2180.84	201.32	2046.30	1979.52	16.32		OSF 1.50	15520.00	10764.41				MinPt-CtCt	
2182.22	216.25	2037.72	1965.97	15.20		OSF 1.50	16110.00	10763.35				MinPt-CtCt	
2182.02	222.78	2033.17	1959.24	14.75		OSF 1.50	16360.00	10762.90				MinPt-CtCt	
2181.88	229.60	2028.49	1952.28	14.31		OSF 1.50	16620.00	10762.43				MinPt-CtCt	
2182.37	231.01	2028.04	1951.37	14.23		OSF 1.50	16690.00	10762.31				MinPt-EOU	
2175.05	246.92	2010.11	1928.13	13.26		OSF 1.50	17260.00	10761.28				MinPt-CtCt	
2174.88	250.51	2007.54	1924.37	13.07		OSF 1.50	17390.00	10761.05				MinPt-CtCt	
2175.56	253.02	2006.56	1922.55	12.94		OSF 1.50	17500.00	10760.85				MinPt-EOU	
2176.25	253.85	2006.69	1922.40	12.90		OSF 1.50	17540.00	10760.78				MinPt-ADP	
2178.37	258.05	2006.02	1920.33	12.71		OSF 1.50	17660.00	10760.56				MinPt-CtCt	
2178.66	258.97	2005.69	1919.69	12.66		OSF 1.50	17710.00	10760.47				MinPt-EOU	
2179.12	259.51	2005.79	1919.61	12.64		OSF 1.50	17740.00	10760.42				MinPt-ADP	
2182.51	263.39	2006.69	1919.12	12.47		OSF 1.50	17870.00	10760.18				MinPt-EOU	
2183.02	264.00	2006.70	1919.02	12.44		OSF 1.50	17900.00	10760.13				MinPt-ADP	
2202.48	269.36	2022.57	1933.11	12.30		OSF 1.50	18230.00	10759.53				MinPt-SF	
2200.05	287.89	2											

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
717.13	116.56	639.06	600.54	9.29		OSF1.50	6230.00	8167.40				MinPt-EOU	
718.41	118.17	639.30	600.24	9.18		OSF1.50	8340.00	8277.40				MinPt-ADP	
727.34	141.08	632.96	586.27	7.78		OSF1.50	9930.00	9867.40				MinPt-CtCt	
728.72	145.42	631.45	583.30	7.56		OSF1.50	10240.33	10177.73				MinPt-EOU	
715.38	147.82	616.60	567.56	7.30		OSF1.50	10660.00	10560.87				MinPts	
715.41	147.86	616.51	567.55	7.30		OSF1.50	10670.00	10568.25				MinPt-ADP	
715.89	148.01	616.89	567.88	7.29		OSF1.50	10700.00	10589.66				MinPt-SF	
1628.14	118.42	1548.87	1509.72	20.78		OSF1.50	12480.00	10769.89				MinPt-EOU	
1629.27	119.82	1549.06	1509.45	20.55		OSF1.50	12570.00	10769.73				MinPt-ADP	
1615.73	143.94	1519.46	1471.81	16.94		OSF1.50	13860.00	10767.40				MinPt-CtCt	
1617.45	148.89	1517.85	1468.56	16.39		OSF1.50	14090.00	10766.99				MinPt-EOU	
1618.72	150.39	1518.13	1468.33	16.24		OSF1.50	14160.00	10766.86				MinPt-ADP	
1621.18	153.40	1518.50	1467.78	15.94		OSF1.50	14280.00	10766.65				MinPt-EOU	
1623.23	161.14	1515.48	1462.09	15.19		OSF1.50	14580.00	10766.11				MinPt-CtCt	
1623.77	177.90	1504.84	1445.87	13.76		OSF1.50	15240.00	10764.92				MinPt-CtCt	
1622.27	184.99	1498.62	1437.28	13.22		OSF1.50	15510.00	10764.43				MinPt-CtCt	
1621.96	190.29	1494.79	1431.69	12.84		OSF1.50	15710.00	10764.07				MinPt-CtCt	
1622.52	191.74	1494.36	1430.78	12.75		OSF1.50	15780.00	10763.95				MinPt-EOU	
1619.54	207.90	1479.62	1410.65	11.73		OSF1.50	16340.00	10762.94				MinPt-CtCt	
1618.98	209.18	1479.19	1409.80	11.66		OSF1.50	16400.00	10762.83				MinPt-EOU	
1619.68	210.03	1479.33	1409.65	11.61		OSF1.50	16440.00	10762.76				MinPt-ADP	
1619.71	234.79	1462.85	1384.92	10.38		OSF1.50	17270.00	10761.26				MinPt-CtCt	
1620.10	236.04	1462.41	1384.05	10.33		OSF1.50	17330.00	10761.15				MinPt-EOU	
1620.44	236.43	1462.49	1384.00	10.32		OSF1.50	17350.00	10761.12				MinPt-ADP	
1642.68	262.86	1467.09	1379.80	9.40		OSF1.50	18220.00	10759.55				MinPt-CtCt	
1642.45	266.51	1464.45	1375.94	9.27		OSF1.50	18340.00	10759.33				MinPt-CtCt	
1644.23	273.49	1461.55	1370.74	9.05		OSF1.50	18590.00	10758.88				MinPt-EOU	
1638.96	295.82	1441.42	1343.14	8.33		OSF1.50	19310.00	10757.59				MinPt-CtCt	
1639.36	297.09	1440.95	1342.28	8.30		OSF1.50	19370.00	10757.48				MinPt-EOU	
1633.88	314.22	1424.08	1319.67	7.82		OSF1.50	19910.00	10756.51				MinPt-CtCt	
1634.27	315.49	1423.62	1318.78	7.79		OSF1.50	19970.00	10756.40				MinPt-EOU	
1634.61	315.89	1423.69	1318.72	7.78		OSF1.50	19990.00	10756.36				MinPt-ADP	
1640.80	331.93	1419.19	1308.87	7.43		OSF1.50	20480.00	10755.48				MinPt-CtCt	
1641.61	334.70	1418.14	1306.90	7.37		OSF1.50	20590.00	10755.28				MinPt-EOU	
1641.51	340.03	1414.50	1301.48	7.26		OSF1.50	20740.00	10755.01				MinPt-CtCt	
1641.52	340.07	1414.48	1301.45	7.26		OSF1.50	20746.03	10755.00				MinPts	

30-025-46599 - Red Hills Unit 36H - Corrected MWD to 22502ft (DefinitiveSurvey)

Pass

3733.72	32.81	3732.63	3700.91	120693.83	MAS = 10.00 (m)	0.00	0.00					MinPts	
3733.75	32.81	3732.59	3700.95	36042.52	MAS = 10.00 (m)	23.00	23.00					WRP	
1257.68	149.30	1157.83	1108.39	12.71	OSF1.50	10140.00	10077.40					MinPt-CtCt	
1254.65	152.57	1152.60	1102.07	12.41	OSF1.50	10582.74	10500.12					MinPt-CtCt	
1254.68	152.67	1152.67	1102.01	12.40	OSF1.50	10600.00	10514.24					MinPt-EOU	
1254.74	152.72	1152.50	1102.01	12.39	OSF1.50	10610.00	10522.28					MinPt-ADP	
1256.76	153.20	1154.30	1103.56	12.38	OSF1.50	10700.00	10589.66					MinPt-SF	
2067.38	149.39	1967.46	1918.00	20.89	OSF1.50	13130.00	10768.72					MinPt-CtCt	
2067.55	149.83	1967.34	1917.72	20.83	OSF1.50	13170.00	10768.65					MinPt-EOU	
2067.75	150.05	1967.38	1917.69	20.80	OSF1.50	13190.00	10768.61					MinPt-ADP	
2068.18	154.84	1964.62	1913.34	20.15	OSF1.50	13450.00	10768.14					MinPt-CtCt	
2067.80	157.22	1962.66	1910.58	19.84	OSF1.50	13580.00	10767.91					MinPt-CtCt	
2068.09	158.05	1962.35	1910.04	19.74	OSF1.50	13640.00	10767.80					MinPt-EOU	
2069.57	162.61	1960.83	1906.96	19.20	OSF1.50	13860.00	10767.40					MinPt-CtCt	
2069.81	163.29	1960.63	1906.53	19.12	OSF1.50	13910.00	10767.31					MinPt-EOU	
2070.04	163.56	1960.67	1906.48	19.09	OSF1.50	13930.00	10767.28					MinPt-ADP	
2067.83	173.98	1951.51	1893.85	17.92	OSF1.50	14410.00	10766.41					MinPt-CtCt	
2068.11	174.91	1951.18	1893.20	17.83	OSF1.50	14470.00	10766.31					MinPt-EOU	
2068.49	175.38	1951.25	1893.12	17.78	OSF1.50	14500.00	10766.25					MinPt-ADP	
2069.79	178.52	1950.45	1891.27	17.48	OSF1.50	14610.00	10766.05					MinPt-CtCt	
2070.85	183.30	1948.32	1887.54	17.03	OSF1.50	14830.00	10765.66					MinPt-EOU	
2071.27	183.80	1948.41	1887.47	16.99	OSF1.50	14860.00	10765.60					MinPt-ADP	
2074.30	188.48	1948.33	1885.83	16.59	OSF1.50	15050.00	10765.26					MinPt-EOU	
2075.92	195.33	1945.37	1880.59	16.02	OSF1.50	15310.00	10764.79					MinPt-CtCt	
2077.33	199.97	1943.69	1877.36	15.65	OSF1.50	15520.00	10764.41					MinPt-EOU	
2056.24	221.05	1908.55	1835.19	14.01	OSF1.50	16320.00	10762.97					MinPt-CtCt	
2056.65	222.31	1908.11	1834.34	13.93	OSF1.50	16390.00	10762.85					MinPt-EOU	
2057.11	222.85	1908.21	1834.26	13.90	OSF1.50	16420.00	10762.79					MinPt-ADP	
2068.88	228.21	1916.41	1840.67	13.65	OSF1.50	16670.00	10762.34					MinPt-ADP	
2074.65	233.95	1918.36	1840.71	13.35	OSF1.50	16840.00	10762.04					MinPt-ADP	
2077.86	238.59	1918.47	1839.27	13.11	OSF1.50	16980.00	10761.78					MinPt-EOU	
2078.27	239.07	1918.56	1839.20	13.09	OSF1.50	17010.00	10761.73					MinPt-ADP	
2085.63	251.18	1917.85	1834.45	12.50	OSF1.50	17440.00	10760.96					MinPt-EOU	
2074.14	274.82	1890.59	1799.32	11.36	OSF1.50	18250.00	10759.50					MinPt-CtCt	
2073.21	292.00	1878.21	1781.20	10.68	OSF1.50	18840.00	10758.43					MinPt-CtCt	
2073.44	292.61	1878.03	1780.82	10.66	OSF1.50	18880.00	10758.36					MinPt-EOU	
2073.56	292.76	1878.06	1780.80	10.65	OSF1.50	18890.00	10758.34					MinPt-ADP	
2089.87	300.81	1869.00	1789.05	10.45	OSF1.50	19200.00	10757.79					MinPts	
2092.64	310.37	1885.40	1782.27	10.14	OSF1.50	19460.00	10757.32					MinPt-CtCt	
2093.63	312.81	1884.76	1780.82	10.07	OSF1.50	19570.00	10757.12					MinPt-EOU	
2096.84	330.32	1866.30	1756.52	9.50	OSF1.50	20130.00	10756.11					MinPt-CtCt	
2088.09	339.10	1861.69	1748.99	9.26	OSF1.50	20420.00	10755.59					MinPt-CtCt	
2088.71	341.08	1861.00	1747.63	9.21	OSF1.50	20510.00	10755.43					MinPt-EOU	
2089.37	348.77	1856.53	1740.60	9.01	OSF1.50	20740.00	10755.01					MinPt-CtCt	
2089.38	348.80	1856.52	1740.58	9.01	OSF1.50	20746.03	10755.00					MinPts	

Coterra Red Hills Unit 104H Rev1 kFc 21Dec23 (DefinitivePlan)

Pass

1320.11	32.81	319.05	1287.30	N/A	MAS = 10.00 (m)	0.00	0.00
1320.11	32.81	319.00	1287.30	32092.22	MAS = 10.00 (m)	23.00	23.00
1269.83	35.55	1245.80	1234.28	55.06	OSF1.50	2497.68	2489.71
1269.95	35.94	1245.67	1234.02	54.46	OSF1.50	2530.00	2521.59
1277.16	46.97	1245.52	1230.19	41.63	OSF1.50	3260.00	3241.59
1313.10	94.97	1249.46	1218.13	20.94	OSF1.50	6330.00	6269.51
1437.86	153.43	1335.24	1284.43	14.14	OSF1.50	10260.00	10197.40
1437.91	153.51	1335.25	1284.41	14.13	OSF1.50	10270.00	10207.39
1444.43	154.92	1340.83	1289.52	14.07	OSF1.50	10470.00	10401.30
1653.07	154.09	1550.01	1498.98	16.19	OSF1.50	11780.00	10771.15
1663.21	362.16	1421.45	1301.06	6.90	OSF1.50	20746.03	10755.00



Coterra Red Hills Unit 81H Rev1 kFc 21Dec23 Proposal Geodetic Report

Def Plan

Report Date:	December 22, 2023 - 05:36 PM (UTC 0)	Survey / DLS Computation:	Minimum Curvature / Lubinski
Client:	COTERRA	Vertical Section Azimuth:	179.529 °(GRID North)
Field:	NM Lea County (NAD 83)	Vertical Section Origin:	0.000 ft, 0.000 ft
Structure / Slot:	Coterra Red Hills Unit Pad 76-81 / Red Hills Unit 81H	TVD Reference Datum:	RKB
Well:	Red Hills Unit 81H	TVD Reference Elevation:	3366.100 ft above MSL
Borehole:	Red Hills Unit 81H	Seabed / Ground Elevation:	3343.100 ft above MSL
UBHI / API#:	Unknown / Unknown	Magnetic Declination:	6.192°
Survey Name:	Coterra Red Hills Unit 81H Rev1 kFc 21Dec23	Total Gravity Field Strength:	998.4378mgn (9.80665 Based)
Survey Date:	December 22, 2023	Gravity Model:	GARM
Tort / AHD / DDI / ERD Ratio:	114.475 ° / 10956.288 ft / 6.383 / 1.017	Total Magnetic Field Strength:	47275.765 nT
Coordinate Reference System:	NAD83 New Mexico State Plane, Eastern Zone, US Feet	Magnetic Dip Angle:	59.593°
Location Lat / Long:	32°5'35.55847"N , 103°34'19.47557"W	Declination Date:	December 21, 2023
Location Grid N/E Y/X:	N 398478.950 RUS , E 777082.020 RUS	Magnetic Declination Model:	HDGM 2023
CRS Grid Convergence Angle:	0.404°	North Reference:	Grid North
Grid Scale Factor:	0.99997274	Grid Convergence Used:	0.404°
Version / Patch:	2023.1.0.1	Total Corr Mag North->Grid North:	5.788°
		Local Coord Referenced To:	Well Head

Comments	MD (ft)	Incl (°)	Azim (°)	TVD (ft)	TVDSS (ft)	VSEC (ft)	NS (ft)	EW (ft)	Northing (RUS)	Easting (RUS)	Latitude (°)	Longitude (°)	DLS (°/100ft)	BR (°/100ft)	TR (°/100ft)
SHL [388' FNL, 1029' FEL]	0.00	0.00	0.00	0.00	-3,366.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655			
Nudge, Build 2"/100ft	1,600.00	0.00	277.59	1,600.00	-1,766.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
Hold	2,074.83	9.50	277.59	2,072.66	-1,293.44	-5.51	5.19	-38.92	398,484.14	777,043.10	32.09322570	-103.57220208	2.00	2.00	0.00
Drop 2"/100ft	6,325.50	9.50	277.59	6,265.07	2,898.97	-103.85	97.81	-734.08	398,576.76	776,347.96	32.09349377	-103.57444455	0.00	0.00	0.00
Hold	6,800.33	0.00	277.59	6,737.73	3,371.63	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	2.00	-2.00	0.00
KOP, Build 10"/100ft	10,240.33	0.00	277.59	10,177.73	6,811.63	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
Build & Turn 10"/100ft	10,740.33	50.00	179.53	10,616.64	7,250.54	95.32	-101.66	-771.32	398,377.29	776,310.72	32.09294620	-103.57456932	10.00	10.00	0.00
Build 5"/100ft	10,994.12	75.00	184.53	10,732.96	7,366.86	318.29	-324.71	-780.35	398,154.25	776,301.69	32.09233329	-103.57460354	10.00	9.85	1.97
Landing Point	11,296.12	90.10	184.53	10,772.00	7,405.90	615.73	-622.36	-803.94	397,856.60	776,278.11	32.09151560	-103.57468645	5.00	5.00	0.00
Turn 2"/100ft	11,536.12	90.10	184.53	10,771.58	7,405.48	854.82	-861.61	-822.89	397,617.36	776,259.15	32.09085836	-103.57475308	0.00	0.00	0.00
Hold	11,786.25	90.10	179.53	10,771.14	7,405.04	1,104.64	-1,111.51	-831.74	397,367.47	776,250.30	32.09017165	-103.57478734	2.00	0.00	-2.00
Red Hills Unit 81H - BHL [100' FSL, 1870' FEL]	20,746.03	90.10	179.53	10,755.00	7,388.90	10,064.40	-10,070.97	-757.82	388,408.27	776,324.22	32.06554361	-103.57475208	0.00	0.00	0.00

Survey Type: Def Plan

Survey Error Model: ISCWSA0 3 - D 95 % Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Expected Max Inclination (deg)	Survey Tool Code	Vendor / Tool	Borehole / Survey
	1	0.000	10,200.000	1/100.000	14.75 – 9.875	10.75 – 7.625		A001Mb_MWD		Red Hills Unit 81H / Coterra Red Hills Unit 81H Re
	1	10,200.000	20,943.821	1/100.000	9.875 – 6.75	7.625 – 6.75		A008Mb_MWD+IFR1+MS		Red Hills Unit 81H / Coterra Red Hills Unit 81H Re

EOU Geometry:			
End MD (ft)	Hole Size (in)	Casing Size (in)	Name
1,016.700	14.750	10.750	
12,216.700	9.875	7.625	
22,166.700	6.750		

Schlumberger

Coterra Red Hills Unit 81H Rev1 kFc 21Dec23 Proposal Geodetic Report

Def Plan

Report Date: December 22, 2023 - 05:36 PM (UTC 0)
 Client: COTERRA
 Field: NM Lea County (NAD 83)
 Structure / Slot: Coterra Red Hills Unit Pad 76-81 / Red Hills Unit 81H
 Well: Red Hills Unit 81H
 Borehole: Red Hills Unit 81H
 UBHI / API#: Unknown / Unknown
 Survey Name: Coterra Red Hills Unit 81H Rev1 kFc 21Dec23
 Survey Date: December 22, 2023
 Tort / AHD / DDI / ERD Ratio: 114.475' / 10956.288 ft / 6.383' / 1.017
 Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
 Location Lat / Long: 32°5'35.5584"N, 103°34'19.4755"W
 Location Grid N/E Y/X: N 398478.950 RUS , E 777082.020 RUS
 CRS Grid Convergence Angle: 0.404"
 Grid Scale Factor: 0.99997274
 Version / Patch: 2023.1.0.1

Survey / DLS Computation: Minimum Curvature / Lubinski
 Vertical Section Azimuth: 179.529° (GRID North)
 Vertical Section Origin: 0.000 ft, 0.000 ft
 TVD Reference Datum: RKB
 TVD Reference Elevation: 3366.100 ft above MSL
 Sealed / Ground Elevation: 3343.100 ft above MSL
 Magnetic Declination: 6.192"
 Total Gravity Field Strength: 998.4378mgm (9.80665 Based)
 Gravity Model: GARM
 Total Magnetic Field Strength: 47275.765 nT
 Magnetic Dip Angle: 59.593°
 Declination Date: December 21, 2023
 Magnetic Declination Model: HDGM 2023
 North Reference: Grid North
 Grid Convergence Used: 0.404"
 Total Corr Mag North->Grid North: 5.788"
 Local Coord Referenced To: Well Head


Comments	MD (ft)	Incl (°)	Azim (°)	TVD (ft)	TVDSS (ft)	VSECC (ft)	NS (ft)	EW (ft)	Northing (RUS)	Easting (RUS)	Latitude (°)	Longitude (°)	DLS (°/100ft)	BR (°/100ft)	TR (°/100ft)
SHL [388' FNL, 1029' FEL]	0.00	0.00	0.00	0.00	-3,366.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655			
	100.00	0.00	277.59	100.00	-3,266.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	200.00	0.00	277.59	200.00	-3,166.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	300.00	0.00	277.59	300.00	-3,066.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	400.00	0.00	277.59	400.00	-2,966.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	500.00	0.00	277.59	500.00	-2,866.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	600.00	0.00	277.59	600.00	-2,766.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	700.00	0.00	277.59	700.00	-2,666.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	800.00	0.00	277.59	800.00	-2,566.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	900.00	0.00	277.59	900.00	-2,466.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
Rustler	960.00	0.00	277.59	960.00	-2,406.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	1,000.00	0.00	277.59	1,000.00	-2,366.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	1,100.00	0.00	277.59	1,100.00	-2,266.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	1,200.00	0.00	277.59	1,200.00	-2,166.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
Salado	1,270.00	0.00	277.59	1,270.00	-2,096.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	1,300.00	0.00	277.59	1,300.00	-2,066.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	1,400.00	0.00	277.59	1,400.00	-1,966.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	1,500.00	0.00	277.59	1,500.00	-1,866.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
Nudge, Build 2"/100ft	1,600.00	0.00	277.59	1,600.00	-1,766.10	0.00	0.00	0.00	398,478.95	777,082.02	32.09321069	-103.57207655	0.00	0.00	0.00
	1,700.00	2.00	277.59	1,699.98	-1,666.12	-0.24	0.23	-1.73	398,479.18	777,080.29	32.09321135	-103.57208213	2.00	2.00	0.00
	1,800.00	4.00	277.59	1,799.84	-1,566.26	-0.98	0.92	-6.92	398,479.87	777,075.10	32.09321335	-103.57209886	2.00	2.00	0.00
	1,900.00	6.00	277.59	1,899.45	-1,466.65	-2.20	2.07	-15.56	398,481.02	777,066.46	32.09321669	-103.57212673	2.00	2.00	0.00
	2,000.00	8.00	277.59	1,998.70	-1,367.40	-3.91	3.68	-27.64	398,482.63	777,054.39	32.09322134	-103.57216569	2.00	2.00	0.00
Hold	2,074.83	9.50	277.59	2,072.66	-1,293.44	-5.51	5.19	-38.92	398,484.14	777,043.10	32.09322570	-103.57220208	2.00	2.00	0.00
	2,100.00	9.50	277.59	2,097.48	-1,268.62	-5.09	5.73	-43.03	398,484.68	777,038.99	32.09322728	-103.57221536	0.00	0.00	0.00
	2,200.00	9.50	277.59	2,196.11	-1,169.99	-8.40	7.91	-59.39	398,486.86	777,022.63	32.09323359	-103.57226812	0.00	0.00	0.00
	2,300.00	9.50	277.59	2,294.74	-1,071.36	-10.71	10.09	-75.74	398,489.04	777,006.28	32.09323990	-103.57232087	0.00	0.00	0.00
	2,400.00	9.50	277.59	2,393.37	-972.73	-13.03	12.27	-92.10	398,491.22	776,989.93	32.09324620	-103.57237363	0.00	0.00	0.00
	2,500.00	9.50	277.59	2,492.00	-874.10	-15.34	14.45	-108.45	398,493.40	776,973.57	32.09325251	-103.57242638	0.00	0.00	0.00
	2,600.00	9.50	277.59	2,590.63	-775.47	-17.66	16.63	-124.80	398,495.58	776,957.22	32.09325882	-103.57247914	0.00	0.00	0.00
	2,700.00	9.50	277.59	2,689.26	-676.84	-19.97	18.81	-141.16	398,497.76	776,940.87	32.09326512	-103.57253190	0.00	0.00	0.00
	2,800.00	9.50	277.59	2,787.89	-578.21	-22.28	20.99	-157.51	398,499.94	776,924.51	32.09327143	-103.57258945	0.00	0.00	0.00
	2,900.00	9.50	277.59	2,886.52	-479.58	-24.60	23.17	-173.87	398,502.12	776,908.16	32.09327774	-103.57263741	0.00	0.00	0.00
	3,000.00	9.50	277.59	2,985.15	-380.95	-26.91	25.35	-190.22	398,504.30	776,891.80	32.09328405	-103.57269016	0.00	0.00	0.00
	3,100.00	9.50	277.59	3,083.78	-282.32	-29.22	27.53	-206.58	398,506.47	776,875.45	32.09329035	-103.57274292	0.00	0.00	0.00
	3,200.00	9.50	277.59	3,182.41	-183.69	-31.54	29.70	-222.93	398,508.65	776,859.10	32.09329666	-103.57279567	0.00	0.00	0.00
	3,300.00	9.50	277.59	3,281.04	-85.06	-33.85	31.88	-239.28	398,510.83	776,842.74	32.09330297	-103.57284843	0.00	0.00	0.00
	3,400.00	9.50	277.59	3,379.67	13.57	-36.16	34.06	-255.64	398,513.01	776,826.39	32.09330927	-103.57290118	0.00	0.00	0.00
	3,500.00	9.50	277.59	3,478.30	112.23	-38.48	36.24	-271.99	398,515.19	776,810.03	32.09331558	-103.57295394	0.00	0.00	0.00
	3,600.00	9.50	277.59	3,576.93	210.83	-40.79	38.42	-288.35	398,517.37	776,793.68	32.09332189	-103.57300670	0.00	0.00	0.00
	3,700.00	9.50	277.59	3,675.56	309.46	-43.10	40.60	-304.70	398,519.55	776,777.33	32.09332819	-103.57305945	0.00	0.00	0.00
	3,800.00	9.50	277.59	3,774.19	408.09	-45.42	42.78	-321.06	398,521.73	776,760.97	32.09333450	-103.57311221	0.00	0.00	0.00
	3,900.00	9.50	277.59	3,872.82	506.72	-47.73	44.96	-337.41	398,523.91	776,744.62	32.09334081	-103.57316496	0.00	0.00	0.00
	4,000.00	9.50	277.59	3,971.45	605.35	-50.04	47.14	-353.76	398,526.09	776,728.27	32.09334711	-103.57321772	0.00	0.00	0.00
	4,100.00	9.50	277.59	4,070.07	703.97	-52.36	49.32	-370.12	398,528.27	776,711.91	32.09335342	-103.57327047	0.00	0.00	0.00
	4,200.00	9.50	277.59	4,168.70	802.57	-54.67	51.50	-386.47	398,530.44	776,695.56	32.09335973	-103.57332323	0.00	0.00	0.00
	4,300.00	9.50	277.59	4,267.33	901.23	-56.99	53.68	-402.83	398,532.62	776,679.22	32.09336603	-103.57337598	0.00	0.00	0.00
	4,400.00	9.50	277.59	4,365.96	999.86	-59.30	55.85	-419.18	398,534.80	776,662.85	32.09337234	-103.57342874	0.00	0.00	0.00
	4,500.00	9.50	277.59	4,464.59	1,098.49	-61.61	58.03	-435.54	398,536.98	776,646.50	32.09337864	-103.57348150	0.00	0.00	0.00
	4,600.00	9.50	277.59	4,563.22	1,197.12	-63.93	60.21	-451.89	398,539.16	776,630.14	32.09338495	-103.57353425	0.00	0.00	0.00
	4,700.00	9.50	277.59	4,661.85	1,295.75	-66.24	62.39	-468.24	398,541.34	776,613.79	32.09339126	-103.57358701	0.00	0.00	0.00
	4,800.00	9.50	277.59	4,760.48	1,394.38	-68.55	64.57	-484.60	398,543.52	776,597.44	32.09339756	-103.57363976	0.00	0.00	0.00
	4,900.00	9.50	277.59	4,859.11	1,493.01	-70.87	66.75	-500.95	398,545.70	776,581.08	32.09340387	-103.57369252	0.00	0.00	0.00
Lamar	4,956.67	9.50	277.59	4,915.00	1,548.90	-72.18	67.99	-510.22	398,547.88	776,564.73	32.09340904	-103.57374527	0.00	0.00	0.00
Bel Canyon	4,982.01	9.50	277.59	4,940.00	1,573.90	-72.76	68.54	-514.37	398,547.49	776,567.67	32.09340904	-103.57373578	0.00	0.00	0.00
	5,000.00	9.50	277.59	4,957.74	1,591.64	-73.18	68.93	-517.31	398,547.88	776,564.73	32.09341018	-103.57374527	0.00	0.00	0.00
	5,100.00	9.50	277.59	5,056.37	1,690.27	-75.49	71.11	-533.66	398,550.06	776,548.37	32.09341648	-103.57379803	0.00	0.00	0.00
	5,200.00	9.50	277.59	5,155.00	1,788.90	-77.81	73.29	-550.02	398,552.24	776,532.02	32.09342279	-103.57385079	0.00	0.00	0.00
	5,300.00	9.50	277.59	5,253.63	1,887.53	-80.12	75.47								

Comments	MD (ft)	Incl (°)	Azim (°)	TVD (ft)	TVSS (ft)	VSEC (ft)	NS (ft)	EW (ft)	Northing (ftUS)	Easting (ftUS)	Latitude (°)	Longitude (°)	DLS (°/100ft)	BR (°/100ft)	TR (°/100ft)
Leonard□	9,127.60	0.00	277.59	9,065.00	5,698.90	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
	9,200.00	0.00	277.59	9,137.40	5,771.30	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
	9,300.00	0.00	277.59	9,237.40	5,871.30	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
Avalon□	9,392.60	0.00	277.59	9,330.00	5,963.90	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
	9,400.00	0.00	277.59	9,337.40	5,971.30	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
	9,500.00	0.00	277.59	9,437.40	6,071.30	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
	9,600.00	0.00	277.59	9,537.40	6,171.30	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
	9,700.00	0.00	277.59	9,637.40	6,271.30	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
	9,800.00	0.00	277.59	9,737.40	6,371.30	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
	9,900.00	0.00	277.59	9,837.40	6,471.30	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
	10,000.00	0.00	277.59	9,937.40	6,571.30	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
1st BS SS □	10,097.60	0.00	277.59	10,035.00	6,668.90	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
	10,100.00	0.00	277.59	10,037.40	6,671.30	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
	10,200.00	0.00	277.59	10,137.40	6,771.30	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	0.00
KOP, Build 10"/100ft	10,240.33	0.00	277.59	10,177.73	6,811.63	-109.35	103.00	-773.00	398,581.95	776,309.04	32.09350877	-103.57457009	0.00	0.00	-2.00
2nd BS Carb□	10,297.69	5.74	179.53	10,235.00	6,868.90	-106.48	100.13	-772.98	398,579.08	776,309.07	32.09350088	-103.57457008	10.00	10.00	0.00
	10,300.00	5.97	179.53	10,237.30	6,871.20	-106.25	99.90	-772.97	398,578.84	776,309.07	32.09350024	-103.57457008	10.00	10.00	0.00
	10,400.00	15.97	179.53	10,335.35	6,969.25	-87.25	80.89	-772.82	398,559.84	776,309.22	32.09344801	-103.57457000	10.00	10.00	0.00
	10,500.00	25.97	179.53	10,428.61	7,062.51	-51.51	45.16	-772.53	398,524.11	776,309.52	32.09334978	-103.57456987	10.00	10.00	0.00
	10,600.00	35.97	179.53	10,514.24	7,148.14	-0.12	-6.23	-772.10	398,472.72	776,309.94	32.09320852	-103.57456988	10.00	10.00	0.00
	10,693.34	45.30	179.53	10,595.00	7,216.18	-11.95	-14.61	-771.61	398,410.98	776,310.46	32.09304162	-103.57456945	10.00	10.00	0.00
	10,700.00	45.97	179.53	10,589.66	7,223.56	65.36	-71.71	-771.57	398,407.24	776,310.48	32.09302853	-103.57456943	10.00	10.00	0.00
Build & Turn 10"/100ft	10,740.33	50.00	179.53	10,616.64	7,250.54	95.32	-101.66	-771.32	398,377.29	776,310.72	32.09294620	-103.57456932	10.00	10.00	0.00
	10,800.00	55.86	180.94	10,652.60	7,286.50	142.90	-149.25	-771.54	398,329.70	776,310.50	32.09281539	-103.57457111	10.00	9.82	2.37
	10,900.00	65.71	182.93	10,701.35	7,335.25	229.99	-236.37	-774.56	398,242.59	776,307.48	32.09257601	-103.57458283	10.00	9.85	1.98
Build 5"/100ft	10,994.12	75.00	184.53	10,732.96	7,366.86	318.29	-324.71	-780.35	398,154.25	776,301.69	32.09233329	-103.57460354	10.00	9.87	1.70
	11,000.00	75.29	184.53	10,734.47	7,368.37	323.95	-330.38	-780.80	398,148.58	776,301.24	32.09231771	-103.57460512	5.00	5.00	0.00
	11,100.00	84.29	184.53	10,755.60	7,388.15	421.29	-421.29	-827.52	397,953.75	776,293.52	32.09205013	-103.57463225	5.00	5.00	0.00
	11,200.00	85.29	184.53	10,768.14	7,402.04	520.09	-526.65	-796.35	397,952.31	776,291.75	32.09177853	-103.57463225	5.00	5.00	-2.00
Landing Point	11,296.12	90.10	184.53	10,772.00	7,405.90	615.73	-622.36	-803.94	397,856.60	776,278.11	32.09151560	-103.57468645	5.00	5.00	0.00
	11,300.00	90.10	184.53	10,772.00	7,405.90	619.60	-626.24	-804.24	397,852.73	776,277.80	32.09150497	-103.57468753	0.00	0.00	0.00
	11,400.00	90.10	184.53	10,771.82	7,405.72	719.22	-725.92	-812.14	397,753.05	776,269.90	32.09123111	-103.57471529	0.00	0.00	0.00
	11,500.00	90.10	184.53	10,771.65	7,405.55	818.84	-825.61	-820.04	397,653.36	776,262.01	32.09095726	-103.57474306	0.00	0.00	0.00
Turn 2"/100ft	11,536.12	90.10	184.53	10,771.58	7,405.48	854.82	-861.61	-822.89	397,617.36	776,259.15	32.09085836	-103.57475308	0.00	0.00	0.00
	11,600.00	90.10	183.25	10,771.47	7,405.37	925.52	-925.52	-827.23	397,543.82	776,254.82	32.09084367	-103.57475308	0.00	0.00	-2.00
	11,700.00	90.10	181.25	10,771.30	7,405.20	1,018.40	-1,025.27	-801.16	397,453.19	776,250.88	32.09040653	-103.57478349	2.00	0.00	0.00
Hold	11,786.25	90.10	179.53	10,771.14	7,405.04	1,104.64	-1,111.51	-831.74	397,367.47	776,250.30	32.09017165	-103.57478734	2.00	0.00	-2.00
	11,800.00	90.10	179.53	10,771.12	7,405.02	1,118.39	-1,125.26	-831.63	397,353.72	776,250.42	32.09013385	-103.57478729	0.00	0.00	0.00
	11,900.00	90.10	179.53	10,770.94	7,404.84	1,218.39	-1,225.26	-830.80	397,253.73	776,251.24	32.08985898	-103.57478689	0.00	0.00	0.00
	12,000.00	90.10	179.53	10,770.76	7,404.66	1,318.39	-1,325.25	-829.98	397,153.73	776,252.07	32.08965841	-103.57478650	0.00	0.00	0.00
	12,100.00	90.10	179.53	10,770.58	7,404.48	1,418.39	-1,425.25	-829.15	397,053.74	776,252.89	32.08930924	-103.57478611	0.00	0.00	0.00
	12,200.00	90.10	179.53	10,770.40	7,404.30	1,518.39	-1,525.25	-828.33	396,953.75	776,253.72	32.08893437	-103.57478571	0.00	0.00	0.00
	12,300.00	90.10	179.53	10,770.21	7,404.11	1,618.39	-1,625.24	-827.50	396,853.75	776,254.54	32.08875958	-103.57478532	0.00	0.00	0.00
	12,400.00	90.10	179.53	10,770.03	7,403.93	1,718.39	-1,725.24	-826.68	396,753.76	776,255.37	32.08848463	-103.57478493	0.00	0.00	0.00
	12,500.00	90.10	179.53	10,769.85	7,403.75	1,818.39	-1,825.24	-825.85	396,653.77	776,256.19	32.08820976	-103.57478454	0.00	0.00	0.00
	12,600.00	90.10	179.53	10,769.67	7,403.57	1,918.39	-1,925.23	-825.03	396,553.77	776,257.02	32.08793489	-103.57478414	0.00	0.00	0.00
	12,700.00	90.10	179.53	10,769.49	7,403.39	2,018.39	-2,025.23	-824.20	396,453.78	776,257.84	32.08766002	-103.57478375	0.00	0.00	0.00
	12,800.00	90.10	179.53	10,769.31	7,403.21	2,118.39	-2,125.23	-823.38	396,353.79	776,258.67	32.08738515	-103.57478336	0.00	0.00	0.00
	12,900.00	90.10	179.53	10,769.13	7,403.03	2,218.39	-2,225.22	-822.55	396,253.79	776,259.49	32.08711028	-103.57478296	0.00	0.00	0.00
	13,000.00	90.10	179.53	10,768.95	7,402.85	2,318.39	-2,325.21	-821.72	396,153.80	776,260.31	32.08683541	-103.57478257	0.00	0.00	0.00
	13,100.00	90.10	179.53	10,768.77	7,402.67	2,418.38	-2,425.21	-820.90	396,053.81	776,261.14	32.08656054	-103.57478218	0.00	0.00	0.00
	13,200.00	90.10	179.53	10,768.59	7,402.49	2,518.38	-2,525.21	-820.08	395,953.81	776,261.97	32.08628567	-103.57478178	0.00	0.00	0.00
	13,300.00	90.10	179.53	10,768.41	7,402.31	2,618.38	-2,625.21	-819.25	395,853.82	776,262.79	32.08601080	-103.57478139	0.00	0.00	0.00
	13,400.00	90.10	179.53	10,768.23	7,402.13	2,718.38	-2,725.20	-818.43	395,753.83	776,263.62	32.08573593	-103.57478100	0.00	0.00	0.00
	13,500.00	90.10	179.53	10,768.05	7,401.95	2,818.38	-2,825.20	-817.60	395,653.83	776,264.44	32.08546106	-103.57478061	0.00	0.00	0.00
	13,600.00	90.10	179.53	10,767.87	7,401.77	2,918.38	-2,825.20	-816.78	395,553.84	776,265.27	32.08518618	-103.57478021	0.00	0.00	0.00
	13,700.00	90.10	179.53	10,767.69	7,401.59	3,018.38	-3,025.19	-815.95	395,453.84	776,266.09	32.08491131	-103.57477982	0.00	0.00	0.00
	13,800.00	90.10	179.53	10,767.51	7,401.41	3,118.38	-3,125.19	-815.13	395,353.85	776,266.92	32.08463644	-103.57477943	0.00	0.00	0.00
	13,900.00	90.10	179.53	10,767.33	7,401.23	3,218.38	-3,225.19	-814.30	395,253.86	776,267.74	32.08436157	-103.57477903	0.00	0.00	0.00
	14,000.00	90.10	179.53	10,767.15	7,401.05	3,318.38	-3,325.18	-813.48	395,153.86	776,268.57	32.08408670	-103.57477864	0.00	0.00	0.00
	14,100.00	90.10	179.53	10,766.97	7,400.87	3,418.38	-3,425.18	-812.65	395,053.87	776,269.39	32.08381183	-103.57477825	0.00	0.00	0.00
	14,200.00	90.10	179.53	10,766.79	7,400.69	3,518.38	-3,525.18	-811.83	394,953.88	776,270.22	32.08353696	-103.57477785	0.00		


Comments	MD (ft)	Incl (°)	Azim (°)	TVD (ft)	TVDSS (ft)	VSEC (ft)	NS (ft)	EW (ft)	Northing (ftUS)	Easting (ftUS)	Latitude (°)	Longitude (°)	DLS (°/100ft)	BR (°/100ft)	TR (°/100ft)
Survey Type: Def Plan															
Survey Error Model: ISCWSA0 3 - D 95 % Confidence 2.7955 sigma															
Survey Program:															
Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Expected Max Inclination (deg)	Survey Tool Code		Vendor / Tool		Borehole / Survey			
	1	0.000	10,200.000	1/100.000	14.75 – 9.875	10.75 – 7.625		A001Mb_MWD				Red Hills Unit 81H / Coterra Red Hills Unit 81H Ren			
	1	10,200.000	20,943.821	1/100.000	9.875 – 6.75	7.625 – 6.75		A008Mb_MWD+IFR1+MS				Red Hills Unit 81H / Coterra Red Hills Unit 81H Ren			
EOU Geometry:															
End MD (ft)	Hole Size (in)			Casing Size (in)			Name								
1,016.700	14.750			10.750											
12,216.700	9.875			7.625											
22,166.700	6.750														

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
1554.69		152.86	1452.46	1401.83	15.34	OSF1.50	10240.33	10177.73				MinPt-SF	
1554.04		152.99	1451.72	1401.05	15.33	OSF1.50	10590.00	10506.10				MinPt-CtCt	
1554.05		153.01	1451.72	1401.04	15.32	OSF1.50	10600.00	10514.24				MinPts	
1555.79		153.34	1453.24	1402.46	15.31	OSF1.50	10730.00	10609.93				MinPt-SF	
1533.82		158.72	1427.68	1375.10	14.58	OSF1.50	11780.00	10771.15				MinPt-CtCt	
1545.50		362.22	1303.69	1183.28	6.41	OSF1.50	20746.03	10755.00				MinPts	


Drilling 12 1/4" hole
below 13 3/8"
Casing

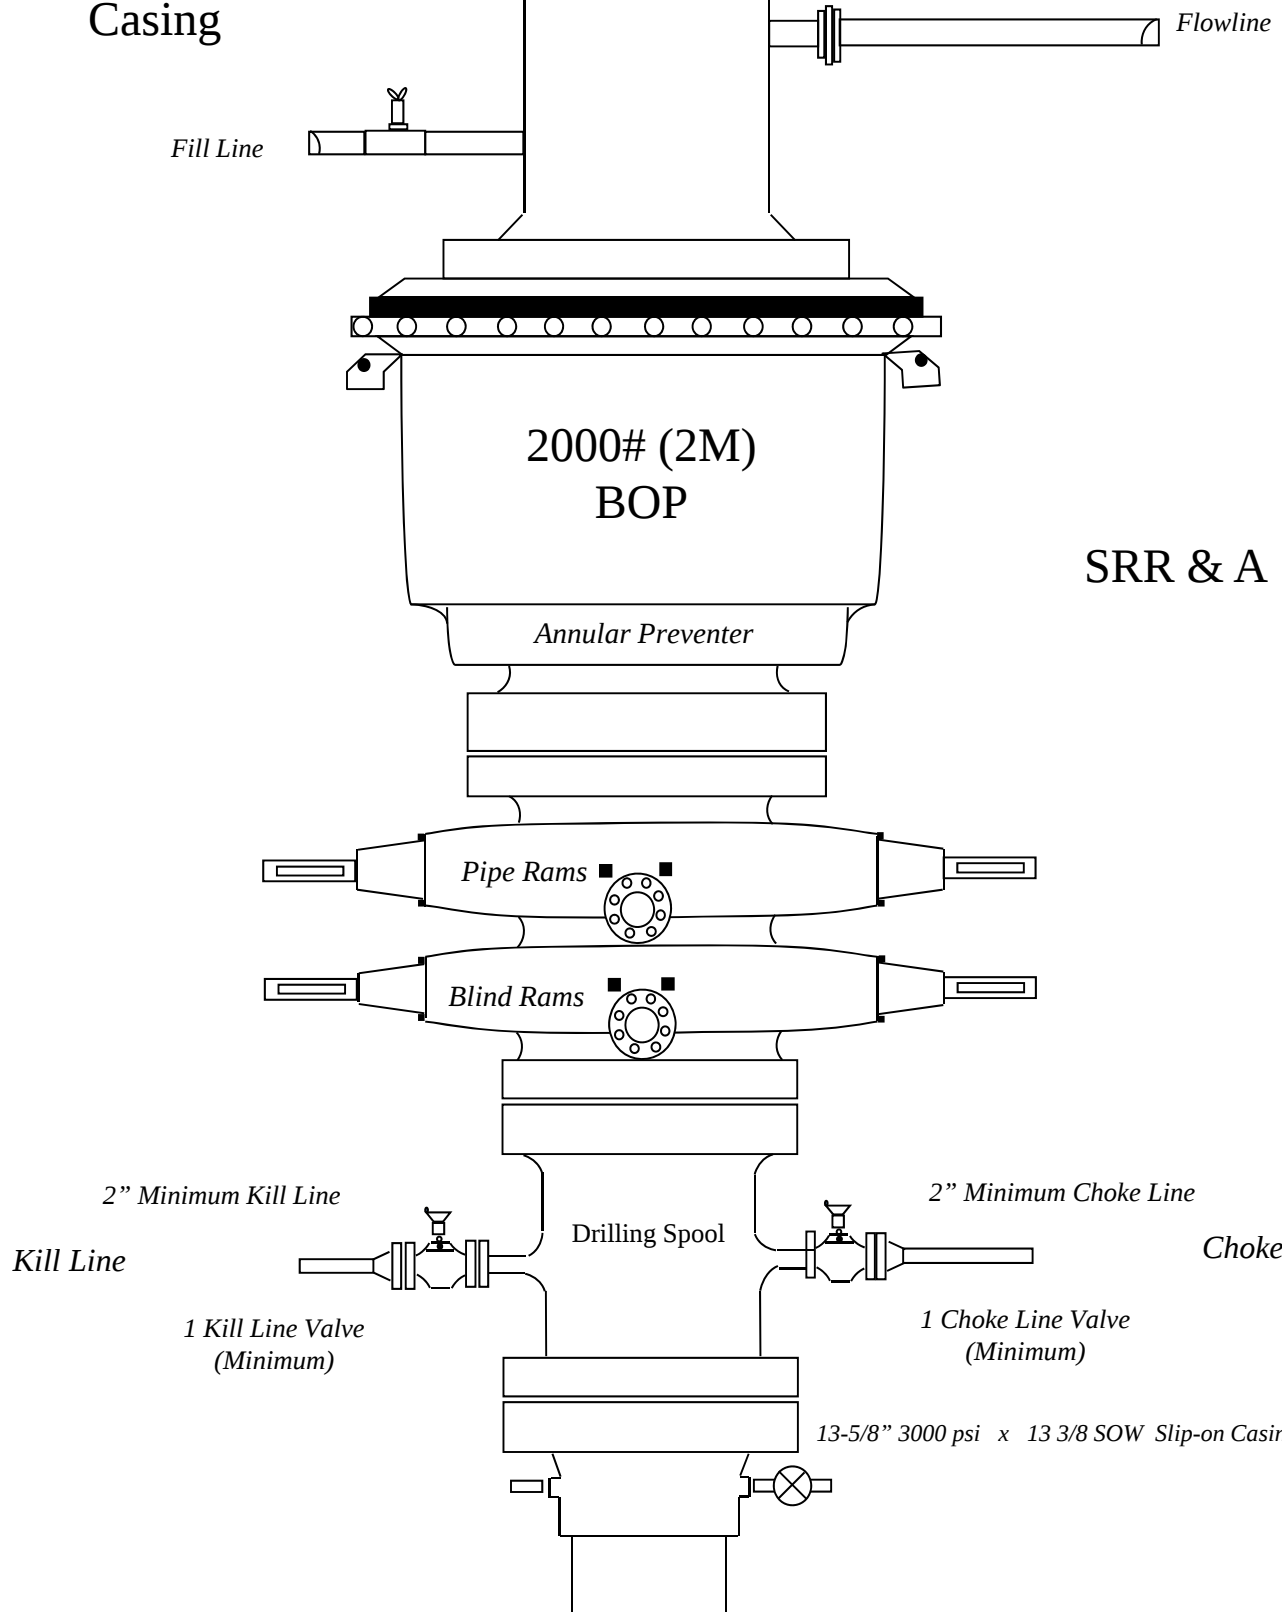

Drilling 8-3/4" hole
below 9 5/8" Casing

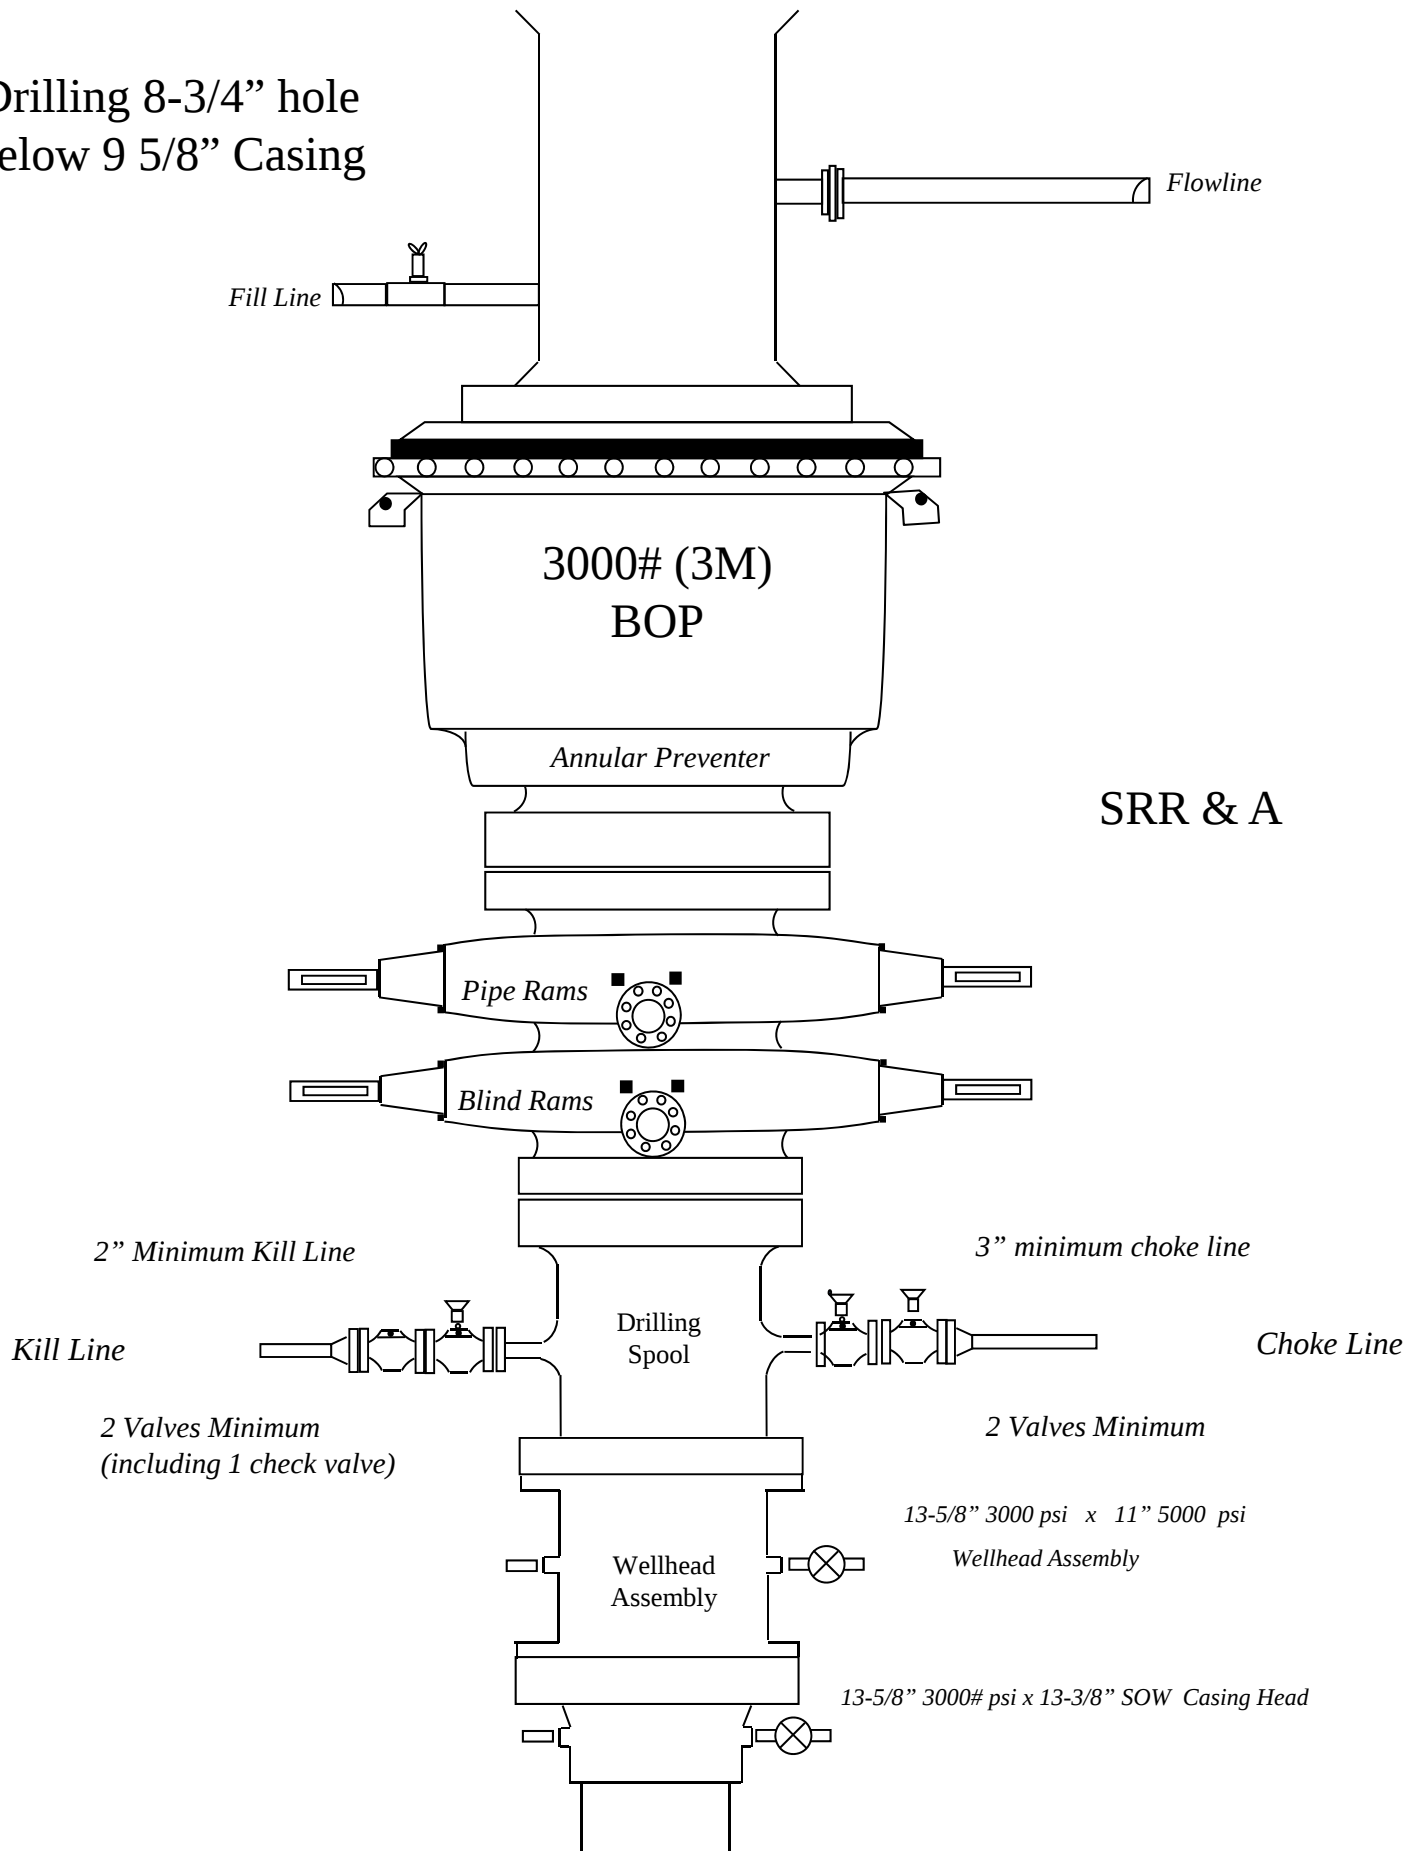

Drilling 6" hole
below 7" Casing

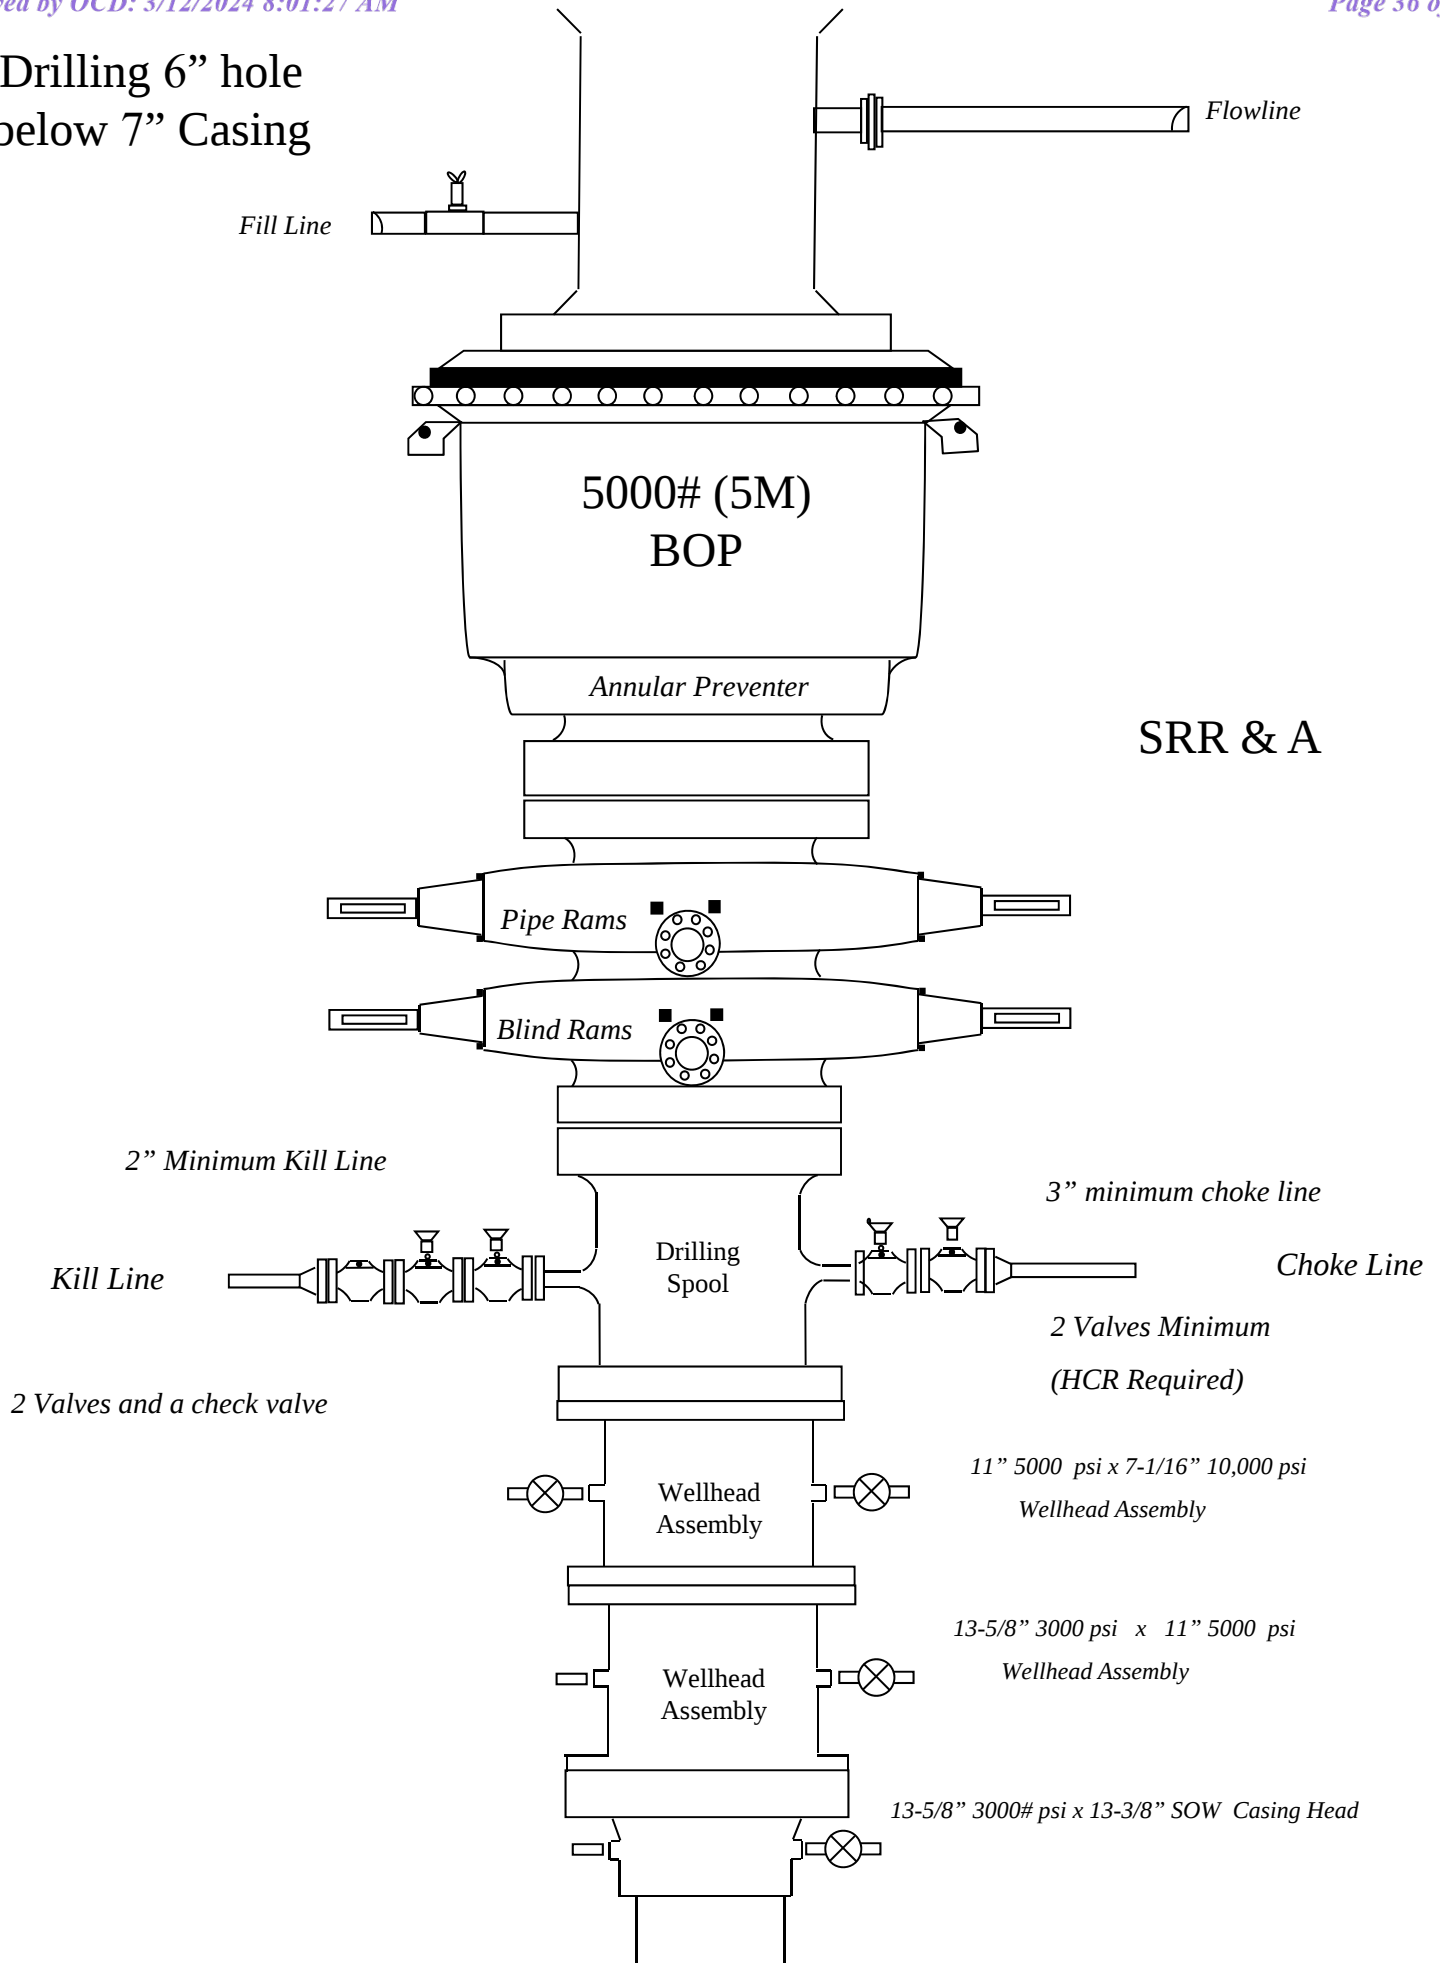

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 322400

CONDITIONS

Operator: CIMAREX ENERGY CO. 6001 Deauville Blvd Midland, TX 79706	OGRID: 215099
	Action Number: 322400
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
pkautz	ALL PREVIOUS COA'S APPLY	5/28/2024