

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Well Name: MR POTATO HEAD 11-14 FED COM	Well Location: T24S / R29E / SEC 11 / NENE / 32.2388916 / -103.949097	County or Parish/State: EDDY / NM
Well Number: 825H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM88134	Unit or CA Name:	Unit or CA Number: NMNM143625
US Well Number:	Operator: DEVON ENERGY PRODUCTION COMPANY LP	

Notice of Intent

Sundry ID: 2791194

Type of Submission: Notice of Intent

Type of Action: APD Change

Date Sundry Submitted: 05/20/2024

Time Sundry Submitted: 06:53

Date proposed operation will begin: 05/20/2024

Procedure Description: Devon Energy Production Co., L.P. (Devon) respectfully requests to move the BHL on the subject well. Please see attached revised C102, drill plan (break test variance included), and directional plan. Permitted BHL: SESE 20 FSL, 1030 FEL, 14-24S-29E Proposed BHL: SESE 20 FSL, 330 FEL, 14-24S-29E No new leases have been added since approved APD. APD ID: 10400086510

NOI Attachments

Procedure Description

WA018532808_MR_POTATO_HEAD_11_14_F_C_825H_WL_R1_20240520065222.pdf

5.5_17lb_P110_BTC_20240520065212.pdf

MR_POTATO_HEAD_11_14_FED_COM_825H_Directional_Plan_04_24_24_20240520065213.pdf

break_test_variance_BOP_1_15_24_20240520065213.pdf

MR_POTATO_HEAD_11_14_FED_COM_825H_R1_20240520065213.pdf

8.625_32lb_P110EC_SPRINT_FJ_VST_20240520065213.pdf

10.750_40.5lb_H40_20240520065213.pdf

Well Name: MR POTATO HEAD 11-14
FED COM

Well Location: T24S / R29E / SEC 11 /
NENE / 32.2388916 / -103.949097

County or Parish/State: EDDY /
NM

Well Number: 825H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM88134

Unit or CA Name:

Unit or CA Number:
NMNM143625

US Well Number:

Operator: DEVON ENERGY
PRODUCTION COMPANY LP

Conditions of Approval

Specialist Review

Mr_Potato_Head_11_14_Fed_Com_825H_Sundry_ID_2791194_20240521120833.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHAYDA OMOUMI

Signed on: MAY 20, 2024 06:52 AM

Name: DEVON ENERGY PRODUCTION COMPANY LP

Title: Regulatory Compliance Associate 3

Street Address: 333 W SHERIDAN AVE

City: OKLAHOMA CITY State: OK

Phone: (405) 235-3611

Email address: SHAYDA.OMOUMI@DVN.COM

Field

Representative Name:

Street Address:

City: State: Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: LONG VO

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5759885402

BLM POC Email Address: LVO@BLM.GOV

Disposition: Approved

Disposition Date: 05/21/2024

Signature: Long Vo

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

7. If Unit of CA/Agreement, Name and/or No.

1. Type of Well

Oil Well Gas Well Other

8. Well Name and No.

2. Name of Operator

9. API Well No.

3a. Address

3b. Phone No. (include area code)

10. Field and Pool or Exploratory Area

4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)

11. Country or Parish, State

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other	
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)

Title

Signature

Date

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NENE / 200 FNL / 766 FEL / TWSP: 24S / RANGE: 29E / SECTION: 11 / LAT: 32.2388916 / LONG: -103.949097 (TVD: 0 feet, MD: 0 feet)

PPP: NENE / 100 FNL / 1030 FEL / TWSP: 24S / RANGE: 29E / SECTION: 11 / LAT: 32.2391644 / LONG: -103.9499508 (TVD: 10221 feet, MD: 10245 feet)

BHL: SESE / 20 FSL / 1030 FEL / TWSP: 24S / RANGE: 29E / SECTION: 14 / LAT: 32.2103258 / LONG: -103.9499731 (TVD: 10942 feet, MD: 21274 feet)

CONFIDENTIAL

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number		² Pool Code 98220		³ Pool Name Purple Sage; Wolfcamp (Gas)	
⁴ Property Code 326251		⁵ Property Name MR POTATO HEAD 11-14 FED COM			⁶ Well Number 825H
⁷ OGRID No. 6137		⁸ Operator Name DEVON ENERGY PRODUCTION COMPANY, L.P.			⁹ Elevation 3077.3

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	11	24 S	29 E		200	NORTH	766	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	14	24 S	29 E		20	SOUTH	330	EAST	EDDY

¹² Dedicated Acres 1280	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
---------------------------------------	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

MR POTATO HEAD 11-14 FED COM 825H
EL. = 3077.3

GEODETTIC COORDINATES
NAD 83 NMSP EAST
SURFACE LOCATION
N. = 450854.80
E. = 660136.72
LAT. = 32.2388916°N
LONG. = 103.9490970°W

KICK OFF POINT FIRST TAKE POINT (PPP 1)
CALLS 45' FNL 330' FEL 100' FNL, 330' FEL
N. = 451013 N. = 450957.66
E. = 660571 E. = 660572.19
LAT. = 32.23922866 LAT. = 32.2391700°N
LONG. = -103.94777096 LONG. = 103.9476873°W

LAST TAKE POINT BOTTOM OF HOLE
100' FSL, 330' FEL 20' FSL, 330' FEL
N. = 440547.05 N. = 440467.06
E. = 660602.58 E. = 660602.74
LAT. = 32.2105526°N LAT. = 32.2103327°N
LONG. = 103.9477099°W LONG. = 103.9477103°W

PPP 2
0' FSL, 336' FEL
N. = 445747.55
E. = 660587.39
LAT. = 32.2248481°N
LONG. = 103.9476986°W

CORNER COORDINATES TABLE
NAD 83 NMSP EAST

A - N. = 451030.14	E. = 655595.01
B - N. = 451042.47	E. = 658249.35
C - N. = 451059.78	E. = 660901.66
D - N. = 448402.62	E. = 660913.47
E - N. = 445749.34	E. = 660923.11
F - N. = 443099.57	E. = 660927.38
G - N. = 440449.43	E. = 660932.70
H - N. = 440430.47	E. = 658288.01
I - N. = 440412.71	E. = 655642.49
J - N. = 443066.77	E. = 655632.22
K - N. = 445720.12	E. = 655621.49
L - N. = 448375.07	E. = 655608.09
M - N. = 445735.13	E. = 658270.76

LEGEND
- - - - - SECTION LINE
- - - - - QUARTER LINE
- - - - - LEASE LINE
- - - - - WELL PATH

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Shayda Omoumi 4/26/2024
Signature Date

Shayda Omoumi
Printed Name

shayda.omoumi@dvn.com
E-mail Address

¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

APRIL 23, 2024
Date of Survey

Signature and Seal of Professional Surveyor: _____
Certificate Number: _____

Intent As Drilled

API #		
Operator Name: DEVON ENERGY PRODUCTION COMPANY, L.P.	Property Name: MR POTATO HEAD 11 14 FED COM	Well Number 825H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
A	11	24S	29E		45	NORTH	330	EAST	EDDY
Latitude					Longitude				NAD
32.23922866					-103.94777096				83

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
A	11	24S	29E		100	NORTH	330	EAST	EDDY
Latitude					Longitude				NAD
32.2391700					103.9476873				83

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
P	14	24S	29E		100	SOUTH	330	EAST	EDDY
Latitude					Longitude				NAD
32.2105526					103.9477099				83

Is this well the defining well for the Horizontal Spacing Unit? N

Is this well an infill well? Y

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API # 30-015-46722		
Operator Name: DEVON ENERGY PRODUCTION COMPANY, L.P.	Property Name: MR POTATO HEAD 11-14 FED COM	Well Number 623H

KZ 06/29/2018



U. S. Steel Tubular Products

5.500" 17.00lbs/ft (0.304" Wall) P110

2/21/2019 8:12:22 AM

MECHANICAL PROPERTIES	Pipe	BTC	LTC	STC	
Minimum Yield Strength	110,000	--	--	--	psi
Maximum Yield Strength	140,000	--	--	--	psi
Minimum Tensile Strength	125,000	--	--	--	psi
DIMENSIONS	Pipe	BTC	LTC	STC	
Outside Diameter	5.500	6.050	6.050	--	in.
Wall Thickness	0.304	--	--	--	in.
Inside Diameter	4.892	4.892	4.892	--	in.
Standard Drift	4.767	4.767	4.767	--	in.
Alternate Drift	--	--	--	--	in.
Nominal Linear Weight, T&C	17.00	--	--	--	lbs/ft
Plain End Weight	16.89	--	--	--	lbs/ft
PERFORMANCE	Pipe	BTC	LTC	STC	
Minimum Collapse Pressure	7,480	7,480	7,480	--	psi
Minimum Internal Yield Pressure	10,640	10,640	10,640	--	psi
Minimum Pipe Body Yield Strength	546	--	--	--	1,000 lbs
Joint Strength	--	568	445	--	1,000 lbs
Reference Length	--	22,271	17,449	--	ft
MAKE-UP DATA	Pipe	BTC	LTC	STC	
Make-Up Loss	--	4.13	3.50	--	in.
Minimum Make-Up Torque	--	--	3,470	--	ft-lbs
Maximum Make-Up Torque	--	--	5,780	--	ft-lbs

Legal Notice

All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.

U. S. Steel Tubular Products
 460 Wildwood Forest Drive, Suite 300S
 Spring, Texas 77380


1-877-893-9461
 connections@uss.com
 www.usstubular.com



Well: MR POTATO HEAD 11-14 FED COM 825H
 County: Eddy
 Wellbore: Permit Plan
 Design: Permit Plan #1

Geodetic System: US State Plane 1983
 Datum: North American Datum 1927
 Ellipsoid: Clarke 1866
 Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL
2000.00	0.00	70.00	2000.00	0.00	0.00	0.00	0.00	Start Tangent
2500.00	10.00	70.00	2497.47	14.89	40.90	-13.04	2.00	Hold Tangent
4662.93	10.00	70.00	4627.54	143.34	393.84	-125.55	0.00	Drop to Vertical
5162.93	0.00	70.00	5125.00	158.23	434.73	-138.59	2.00	Hold Vertical
10426.97	0.00	179.83	10389.04	158.23	434.73	-138.59	0.00	KOP
11328.12	90.11	179.83	10962.00	-415.87	436.44	435.01	10.00	Landing Point
21300.05	90.11	179.83	10942.00	-10387.74	466.02	10398.19	0.00	BHL

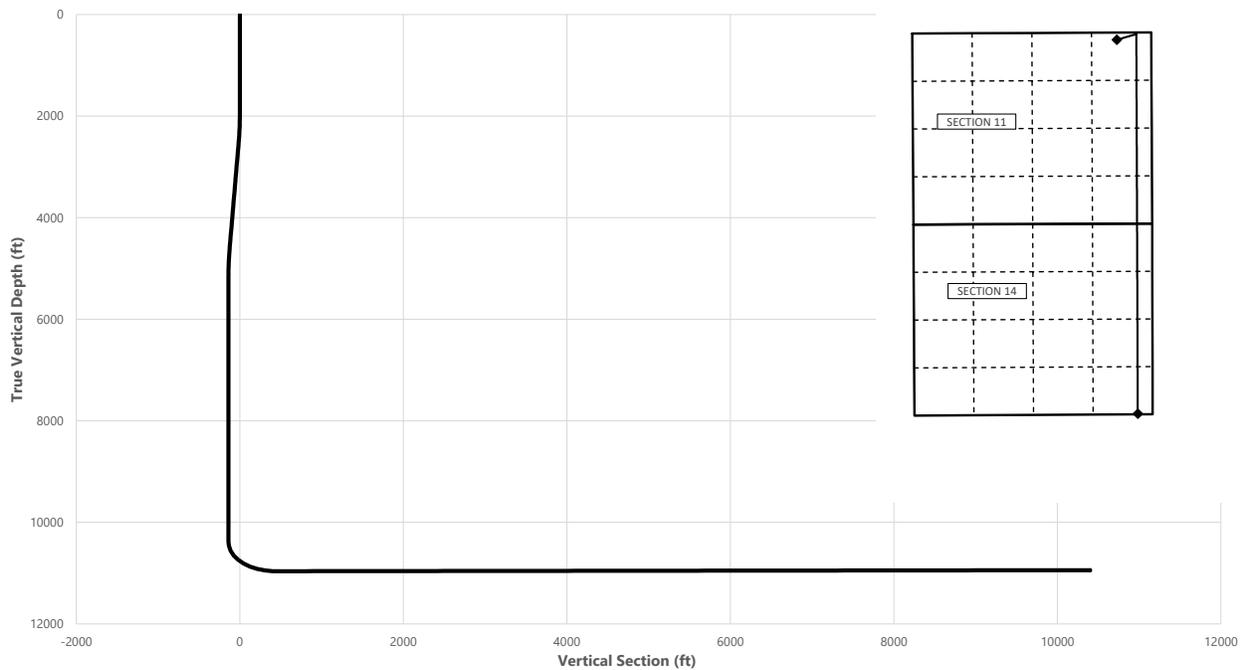

Key Depths	MD (ft)	TVD (ft)
Rustler	234.00	234.00
Salt	523.00	523.00
Base of Salt	2963.58	2954.00
Delaware	3233.68	3220.00
Cherry Canyon	4071.41	4045.00
Brushy Canyon	5700.93	5663.00
1st Bone Spring Lime	6953.93	6916.00
Bone Spring 1st	7984.93	7947.00
Bone Spring 2nd	8799.93	8762.00
3rd Bone Spring Lime	9135.93	9098.00
Bone Spring 3rd	9932.93	9895.00
Wolfcamp / Point of Penetration	10258.93	10221.00
exit	21220.05	10942.17

	MD (ft)	TVD (ft)	Lat (°)	Long (°)	Section Footages
SHL	0.00	0.00	32.2388	-103.9492	200' FNL, 766' FEL of Sec 11 in T24S, R29E
KOP	10426.97	10389.04	32.2392	-103.9478	45' FNL, 330' FEL of Sec 11 in T24S, R29E
Point of Penetration	10258.93	10221.00	32.2392	-103.9477	100' FNL, 330' FEL of Sec 11 in T24S, R29E
Exit	21220.05	10942.17	32.2106	-103.9477	100' FSL, 330' FEL of Sec 14 in T24S, R29E
BHL	21300.05	10942.00	32.2102	-103.9478	20' FSL, 330' FEL of Sec 14 in T24S, R29E

	Y	X	MD
KOP	451013	660571	10426.97



Well: MR POTATO HEAD 11-14 FED COM 825H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL
100.00	0.00	70.00	100.00	0.00	0.00	0.00	0.00	
200.00	0.00	70.00	200.00	0.00	0.00	0.00	0.00	
234.00	0.00	70.00	234.00	0.00	0.00	0.00	0.00	Rustler
300.00	0.00	70.00	300.00	0.00	0.00	0.00	0.00	
400.00	0.00	70.00	400.00	0.00	0.00	0.00	0.00	
500.00	0.00	70.00	500.00	0.00	0.00	0.00	0.00	
523.00	0.00	70.00	523.00	0.00	0.00	0.00	0.00	Salt
600.00	0.00	70.00	600.00	0.00	0.00	0.00	0.00	
700.00	0.00	70.00	700.00	0.00	0.00	0.00	0.00	
800.00	0.00	70.00	800.00	0.00	0.00	0.00	0.00	
900.00	0.00	70.00	900.00	0.00	0.00	0.00	0.00	
1000.00	0.00	70.00	1000.00	0.00	0.00	0.00	0.00	
1100.00	0.00	70.00	1100.00	0.00	0.00	0.00	0.00	
1200.00	0.00	70.00	1200.00	0.00	0.00	0.00	0.00	
1300.00	0.00	70.00	1300.00	0.00	0.00	0.00	0.00	
1400.00	0.00	70.00	1400.00	0.00	0.00	0.00	0.00	
1500.00	0.00	70.00	1500.00	0.00	0.00	0.00	0.00	
1600.00	0.00	70.00	1600.00	0.00	0.00	0.00	0.00	
1700.00	0.00	70.00	1700.00	0.00	0.00	0.00	0.00	
1800.00	0.00	70.00	1800.00	0.00	0.00	0.00	0.00	
1900.00	0.00	70.00	1900.00	0.00	0.00	0.00	0.00	
2000.00	0.00	70.00	2000.00	0.00	0.00	0.00	0.00	Start Tangent
2100.00	2.00	70.00	2099.98	0.60	1.64	-0.52	2.00	
2200.00	4.00	70.00	2199.84	2.39	6.56	-2.09	2.00	
2300.00	6.00	70.00	2299.45	5.37	14.75	-4.70	2.00	
2400.00	8.00	70.00	2398.70	9.54	26.20	-8.35	2.00	
2500.00	10.00	70.00	2497.47	14.89	40.90	-13.04	2.00	Hold Tangent
2600.00	10.00	70.00	2595.95	20.82	57.22	-18.24	0.00	
2700.00	10.00	70.00	2694.43	26.76	73.53	-23.44	0.00	
2800.00	10.00	70.00	2792.91	32.70	89.85	-28.64	0.00	
2900.00	10.00	70.00	2891.39	38.64	106.17	-33.84	0.00	
2963.58	10.00	70.00	2954.00	42.42	116.54	-37.15	0.00	Base of Salt
3000.00	10.00	70.00	2989.87	44.58	122.49	-39.05	0.00	
3100.00	10.00	70.00	3088.35	50.52	138.80	-44.25	0.00	
3200.00	10.00	70.00	3186.83	56.46	155.12	-49.45	0.00	
3233.68	10.00	70.00	3220.00	58.46	160.62	-51.20	0.00	Delaware
3300.00	10.00	70.00	3285.31	62.40	171.44	-54.65	0.00	
3400.00	10.00	70.00	3383.79	68.34	187.76	-59.85	0.00	
3500.00	10.00	70.00	3482.27	74.28	204.07	-65.06	0.00	
3600.00	10.00	70.00	3580.75	80.22	220.39	-70.26	0.00	
3700.00	10.00	70.00	3679.23	86.16	236.71	-75.46	0.00	
3800.00	10.00	70.00	3777.72	92.09	253.03	-80.66	0.00	
3900.00	10.00	70.00	3876.20	98.03	269.34	-85.86	0.00	
4000.00	10.00	70.00	3974.68	103.97	285.66	-91.06	0.00	
4071.41	10.00	70.00	4045.00	108.21	297.31	-94.78	0.00	Cherry Canyon
4100.00	10.00	70.00	4073.16	109.91	301.98	-96.27	0.00	
4200.00	10.00	70.00	4171.64	115.85	318.30	-101.47	0.00	
4300.00	10.00	70.00	4270.12	121.79	334.61	-106.67	0.00	
4400.00	10.00	70.00	4368.60	127.73	350.93	-111.87	0.00	
4500.00	10.00	70.00	4467.08	133.67	367.25	-117.07	0.00	
4600.00	10.00	70.00	4565.56	139.61	383.57	-122.28	0.00	
4662.93	10.00	70.00	4627.54	143.34	393.84	-125.55	0.00	Drop to Vertical
4700.00	9.26	70.00	4664.08	145.47	399.66	-127.41	2.00	
4800.00	7.26	70.00	4763.04	150.38	413.16	-131.71	2.00	
4900.00	5.26	70.00	4862.44	154.11	423.40	-134.97	2.00	
5000.00	3.26	70.00	4962.16	156.65	430.38	-137.20	2.00	
5100.00	1.26	70.00	5062.08	157.99	434.08	-138.38	2.00	
5162.93	0.00	70.00	5125.00	158.23	434.73	-138.59	2.00	Hold Vertical
5200.00	0.00	179.83	5162.07	158.23	434.73	-138.59	0.00	
5300.00	0.00	179.83	5262.07	158.23	434.73	-138.59	0.00	
5400.00	0.00	179.83	5362.07	158.23	434.73	-138.59	0.00	
5500.00	0.00	179.83	5462.07	158.23	434.73	-138.59	0.00	
5600.00	0.00	179.83	5562.07	158.23	434.73	-138.59	0.00	
5700.00	0.00	179.83	5662.07	158.23	434.73	-138.59	0.00	
5700.93	0.00	179.83	5663.00	158.23	434.73	-138.59	0.00	Brushy Canyon
5800.00	0.00	179.83	5762.07	158.23	434.73	-138.59	0.00	
5900.00	0.00	179.83	5862.07	158.23	434.73	-138.59	0.00	
6000.00	0.00	179.83	5962.07	158.23	434.73	-138.59	0.00	
6100.00	0.00	179.83	6062.07	158.23	434.73	-138.59	0.00	



Well: MR POTATO HEAD 11-14 FED COM 825H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
6200.00	0.00	179.83	6162.07	158.23	434.73	-138.59	0.00	
6300.00	0.00	179.83	6262.07	158.23	434.73	-138.59	0.00	
6400.00	0.00	179.83	6362.07	158.23	434.73	-138.59	0.00	
6500.00	0.00	179.83	6462.07	158.23	434.73	-138.59	0.00	
6600.00	0.00	179.83	6562.07	158.23	434.73	-138.59	0.00	
6700.00	0.00	179.83	6662.07	158.23	434.73	-138.59	0.00	
6800.00	0.00	179.83	6762.07	158.23	434.73	-138.59	0.00	
6900.00	0.00	179.83	6862.07	158.23	434.73	-138.59	0.00	
6953.93	0.00	179.83	6916.00	158.23	434.73	-138.59	0.00	1st Bone Spring Lime
7000.00	0.00	179.83	6962.07	158.23	434.73	-138.59	0.00	
7100.00	0.00	179.83	7062.07	158.23	434.73	-138.59	0.00	
7200.00	0.00	179.83	7162.07	158.23	434.73	-138.59	0.00	
7300.00	0.00	179.83	7262.07	158.23	434.73	-138.59	0.00	
7400.00	0.00	179.83	7362.07	158.23	434.73	-138.59	0.00	
7500.00	0.00	179.83	7462.07	158.23	434.73	-138.59	0.00	
7600.00	0.00	179.83	7562.07	158.23	434.73	-138.59	0.00	
7700.00	0.00	179.83	7662.07	158.23	434.73	-138.59	0.00	
7800.00	0.00	179.83	7762.07	158.23	434.73	-138.59	0.00	
7900.00	0.00	179.83	7862.07	158.23	434.73	-138.59	0.00	
7984.93	0.00	179.83	7947.00	158.23	434.73	-138.59	0.00	Bone Spring 1st
8000.00	0.00	179.83	7962.07	158.23	434.73	-138.59	0.00	
8100.00	0.00	179.83	8062.07	158.23	434.73	-138.59	0.00	
8200.00	0.00	179.83	8162.07	158.23	434.73	-138.59	0.00	
8300.00	0.00	179.83	8262.07	158.23	434.73	-138.59	0.00	
8400.00	0.00	179.83	8362.07	158.23	434.73	-138.59	0.00	
8500.00	0.00	179.83	8462.07	158.23	434.73	-138.59	0.00	
8600.00	0.00	179.83	8562.07	158.23	434.73	-138.59	0.00	
8700.00	0.00	179.83	8662.07	158.23	434.73	-138.59	0.00	
8799.93	0.00	179.83	8762.00	158.23	434.73	-138.59	0.00	Bone Spring 2nd
8800.00	0.00	179.83	8762.07	158.23	434.73	-138.59	0.00	
8900.00	0.00	179.83	8862.07	158.23	434.73	-138.59	0.00	
9000.00	0.00	179.83	8962.07	158.23	434.73	-138.59	0.00	
9100.00	0.00	179.83	9062.07	158.23	434.73	-138.59	0.00	
9135.93	0.00	179.83	9098.00	158.23	434.73	-138.59	0.00	3rd Bone Spring Lime
9200.00	0.00	179.83	9162.07	158.23	434.73	-138.59	0.00	
9300.00	0.00	179.83	9262.07	158.23	434.73	-138.59	0.00	
9400.00	0.00	179.83	9362.07	158.23	434.73	-138.59	0.00	
9500.00	0.00	179.83	9462.07	158.23	434.73	-138.59	0.00	
9600.00	0.00	179.83	9562.07	158.23	434.73	-138.59	0.00	
9700.00	0.00	179.83	9662.07	158.23	434.73	-138.59	0.00	
9800.00	0.00	179.83	9762.07	158.23	434.73	-138.59	0.00	
9900.00	0.00	179.83	9862.07	158.23	434.73	-138.59	0.00	
9932.93	0.00	179.83	9895.00	158.23	434.73	-138.59	0.00	Bone Spring 3rd
10000.00	0.00	179.83	9962.07	158.23	434.73	-138.59	0.00	
10100.00	0.00	179.83	10062.07	158.23	434.73	-138.59	0.00	
10200.00	0.00	179.83	10162.07	158.23	434.73	-138.59	0.00	
10258.93	0.00	179.83	10221.00	158.23	434.73	-138.59	0.00	Wolfcamp / Point of Penetration
10300.00	0.00	179.83	10262.07	158.23	434.73	-138.59	0.00	
10400.00	0.00	179.83	10362.07	158.23	434.73	-138.59	0.00	
10426.97	0.00	179.83	10389.04	158.23	434.73	-138.59	0.00	KOP
10500.00	7.30	179.83	10461.87	153.58	434.75	-133.94	10.00	
10600.00	17.30	179.83	10559.45	132.30	434.81	-112.68	10.00	
10700.00	27.30	179.83	10651.85	94.40	434.92	-74.81	10.00	
10800.00	37.30	179.83	10736.27	41.03	435.08	-21.49	10.00	
10900.00	47.30	179.83	10810.14	-26.19	435.28	45.67	10.00	
11000.00	57.30	179.83	10871.21	-105.21	435.52	124.63	10.00	
11100.00	67.30	179.83	10917.63	-193.64	435.78	212.98	10.00	
11200.00	77.30	179.83	10947.99	-288.79	436.06	308.04	10.00	
11300.00	87.30	179.83	10961.37	-387.76	436.36	406.93	10.00	
11328.12	90.11	179.83	10962.00	-415.87	436.44	435.01	10.00	Landing Point
11400.00	90.11	179.83	10961.86	-487.75	436.65	506.83	0.00	
11500.00	90.11	179.83	10961.66	-587.75	436.95	606.74	0.00	
11600.00	90.11	179.83	10961.46	-687.75	437.24	706.66	0.00	
11700.00	90.11	179.83	10961.25	-787.75	437.54	806.57	0.00	
11800.00	90.11	179.83	10961.05	-887.75	437.84	906.48	0.00	
11900.00	90.11	179.83	10960.85	-987.75	438.14	1006.39	0.00	
12000.00	90.11	179.83	10960.65	-1087.75	438.43	1106.31	0.00	
12100.00	90.11	179.83	10960.45	-1187.75	438.73	1206.22	0.00	
12200.00	90.11	179.83	10960.25	-1287.75	439.03	1306.13	0.00	
12300.00	90.11	179.83	10960.05	-1387.75	439.32	1406.04	0.00	



Well: MR POTATO HEAD 11-14 FED COM 825H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
12400.00	90.11	179.83	10959.85	-1487.75	439.62	1505.95	0.00	
12500.00	90.11	179.83	10959.65	-1587.75	439.92	1605.87	0.00	
12600.00	90.11	179.83	10959.45	-1687.74	440.21	1705.78	0.00	
12700.00	90.11	179.83	10959.25	-1787.74	440.51	1805.69	0.00	
12800.00	90.11	179.83	10959.05	-1887.74	440.81	1905.60	0.00	
12900.00	90.11	179.83	10958.85	-1987.74	441.11	2005.52	0.00	
13000.00	90.11	179.83	10958.65	-2087.74	441.40	2105.43	0.00	
13100.00	90.11	179.83	10958.45	-2187.74	441.70	2205.34	0.00	
13200.00	90.11	179.83	10958.25	-2287.74	442.00	2305.25	0.00	
13300.00	90.11	179.83	10958.05	-2387.74	442.29	2405.16	0.00	
13400.00	90.11	179.83	10957.85	-2487.74	442.59	2505.08	0.00	
13500.00	90.11	179.83	10957.65	-2587.74	442.89	2604.99	0.00	
13600.00	90.11	179.83	10957.45	-2687.74	443.18	2704.90	0.00	
13700.00	90.11	179.83	10957.25	-2787.74	443.48	2804.81	0.00	
13800.00	90.11	179.83	10957.05	-2887.74	443.78	2904.73	0.00	
13900.00	90.11	179.83	10956.85	-2987.74	444.08	3004.64	0.00	
14000.00	90.11	179.83	10956.64	-3087.74	444.37	3104.55	0.00	
14100.00	90.11	179.83	10956.44	-3187.74	444.67	3204.46	0.00	
14200.00	90.11	179.83	10956.24	-3287.73	444.97	3304.37	0.00	
14300.00	90.11	179.83	10956.04	-3387.73	445.26	3404.29	0.00	
14400.00	90.11	179.83	10955.84	-3487.73	445.56	3504.20	0.00	
14500.00	90.11	179.83	10955.64	-3587.73	445.86	3604.11	0.00	
14600.00	90.11	179.83	10955.44	-3687.73	446.15	3704.02	0.00	
14700.00	90.11	179.83	10955.24	-3787.73	446.45	3803.93	0.00	
14800.00	90.11	179.83	10955.04	-3887.73	446.75	3903.85	0.00	
14900.00	90.11	179.83	10954.84	-3987.73	447.04	4003.76	0.00	
15000.00	90.11	179.83	10954.64	-4087.73	447.34	4103.67	0.00	
15100.00	90.11	179.83	10954.44	-4187.73	447.64	4203.58	0.00	
15200.00	90.11	179.83	10954.24	-4287.73	447.94	4303.50	0.00	
15300.00	90.11	179.83	10954.04	-4387.73	448.23	4403.41	0.00	
15400.00	90.11	179.83	10953.84	-4487.73	448.53	4503.32	0.00	
15500.00	90.11	179.83	10953.64	-4587.73	448.83	4603.23	0.00	
15600.00	90.11	179.83	10953.44	-4687.73	449.12	4703.14	0.00	
15700.00	90.11	179.83	10953.24	-4787.73	449.42	4803.06	0.00	
15800.00	90.11	179.83	10953.04	-4887.72	449.72	4902.97	0.00	
15900.00	90.11	179.83	10952.84	-4987.72	450.01	5002.88	0.00	
16000.00	90.11	179.83	10952.64	-5087.72	450.31	5102.79	0.00	
16100.00	90.11	179.83	10952.44	-5187.72	450.61	5202.71	0.00	
16200.00	90.11	179.83	10952.24	-5287.72	450.91	5302.62	0.00	
16300.00	90.11	179.83	10952.03	-5387.72	451.20	5402.53	0.00	
16400.00	90.11	179.83	10951.83	-5487.72	451.50	5502.44	0.00	
16500.00	90.11	179.83	10951.63	-5587.72	451.80	5602.35	0.00	
16600.00	90.11	179.83	10951.43	-5687.72	452.09	5702.27	0.00	
16700.00	90.11	179.83	10951.23	-5787.72	452.39	5802.18	0.00	
16800.00	90.11	179.83	10951.03	-5887.72	452.69	5902.09	0.00	
16900.00	90.11	179.83	10950.83	-5987.72	452.98	6002.00	0.00	
17000.00	90.11	179.83	10950.63	-6087.72	453.28	6101.91	0.00	
17100.00	90.11	179.83	10950.43	-6187.72	453.58	6201.83	0.00	
17200.00	90.11	179.83	10950.23	-6287.72	453.88	6301.74	0.00	
17300.00	90.11	179.83	10950.03	-6387.71	454.17	6401.65	0.00	
17400.00	90.11	179.83	10949.83	-6487.71	454.47	6501.56	0.00	
17500.00	90.11	179.83	10949.63	-6587.71	454.77	6601.48	0.00	
17600.00	90.11	179.83	10949.43	-6687.71	455.06	6701.39	0.00	
17700.00	90.11	179.83	10949.23	-6787.71	455.36	6801.30	0.00	
17800.00	90.11	179.83	10949.03	-6887.71	455.66	6901.21	0.00	
17900.00	90.11	179.83	10948.83	-6987.71	455.95	7001.12	0.00	
18000.00	90.11	179.83	10948.63	-7087.71	456.25	7101.04	0.00	
18100.00	90.11	179.83	10948.43	-7187.71	456.55	7200.95	0.00	
18200.00	90.11	179.83	10948.23	-7287.71	456.84	7300.86	0.00	
18300.00	90.11	179.83	10948.03	-7387.71	457.14	7400.77	0.00	
18400.00	90.11	179.83	10947.83	-7487.71	457.44	7500.69	0.00	
18500.00	90.11	179.83	10947.63	-7587.71	457.74	7600.60	0.00	
18600.00	90.11	179.83	10947.42	-7687.71	458.03	7700.51	0.00	
18700.00	90.11	179.83	10947.22	-7787.71	458.33	7800.42	0.00	
18800.00	90.11	179.83	10947.02	-7887.71	458.63	7900.33	0.00	
18900.00	90.11	179.83	10946.82	-7987.70	458.92	8000.25	0.00	
19000.00	90.11	179.83	10946.62	-8087.70	459.22	8100.16	0.00	
19100.00	90.11	179.83	10946.42	-8187.70	459.52	8200.07	0.00	
19200.00	90.11	179.83	10946.22	-8287.70	459.81	8299.98	0.00	
19300.00	90.11	179.83	10946.02	-8387.70	460.11	8399.90	0.00	



Well: MR POTATO HEAD 11-14 FED COM 825H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
19400.00	90.11	179.83	10945.82	-8487.70	460.41	8499.81	0.00	
19500.00	90.11	179.83	10945.62	-8587.70	460.71	8599.72	0.00	
19600.00	90.11	179.83	10945.42	-8687.70	461.00	8699.63	0.00	
19700.00	90.11	179.83	10945.22	-8787.70	461.30	8799.54	0.00	
19800.00	90.11	179.83	10945.02	-8887.70	461.60	8899.46	0.00	
19900.00	90.11	179.83	10944.82	-8987.70	461.89	8999.37	0.00	
20000.00	90.11	179.83	10944.62	-9087.70	462.19	9099.28	0.00	
20100.00	90.11	179.83	10944.42	-9187.70	462.49	9199.19	0.00	
20200.00	90.11	179.83	10944.22	-9287.70	462.78	9299.10	0.00	
20300.00	90.11	179.83	10944.02	-9387.70	463.08	9399.02	0.00	
20400.00	90.11	179.83	10943.82	-9487.69	463.38	9498.93	0.00	
20500.00	90.11	179.83	10943.62	-9587.69	463.68	9598.84	0.00	
20600.00	90.11	179.83	10943.42	-9687.69	463.97	9698.75	0.00	
20700.00	90.11	179.83	10943.22	-9787.69	464.27	9798.67	0.00	
20800.00	90.11	179.83	10943.02	-9887.69	464.57	9898.58	0.00	
20900.00	90.11	179.83	10942.81	-9987.69	464.86	9998.49	0.00	
21000.00	90.11	179.83	10942.61	-10087.69	465.16	10098.40	0.00	
21100.00	90.11	179.83	10942.41	-10187.69	465.46	10198.31	0.00	
21200.00	90.11	179.83	10942.21	-10287.69	465.75	10298.23	0.00	
21220.05	90.11	179.83	10942.17	-10307.74	465.81	10318.26	0.00	exit
21300.00	90.11	179.83	10942.01	-10387.69	466.05	10398.14	0.00	
21300.05	90.11	179.83	10942.00	-10387.74	466.02	10398.19	0.00	BHL

Section 2 - Blowout Preventer Testing Procedure

Variance Request

Devon Energy requests to only test BOP connection breaks after drilling out of surface casing and while skidding between wells which conforms to API Standard 53 and industry standards. This test will include the Top Pipe Rams, HCR, Kill Line Check Valve, QDC (quick disconnect to wellhead) and Shell of the 10M BOPE to 5M for 10 minutes. If a break to the flex hose that runs to the choke manifold is required due to repositioning from a skid, the HCR will remain open during the shell test to include that additional break. The variance only pertains to intermediate hole-sections and no deeper than the Bone Springs Formation where 5M BOP tests are required. The initial BOP test will follow 43 CFR 3172, and subsequent tests following a skid will only test connections that are broken. The annular preventer will be tested to 100% working pressure. This variance will meet or exceed 43 CFR 3172 per the following: Devon Energy will perform a full BOP test per 43 CFR 3172 before drilling out of the intermediate casing string(s) and starting the production hole, before starting any hole section that requires a 10M test, before the expiration of the allotted 14-days for 5M intermediate batch drilling or when the drilling rig is fully mobilized to a new well pad, whichever is sooner. We will utilize a 200' TVD tolerance between intermediate shoes as the cutoff for a full BOP test. The BLM will be contacted 4hrs prior to a BOPE test. The BLM will be notified if and when a well control event is encountered. Break test will be a 14 day interval and not a 30 day full BOPE test interval. If in the event break testing is not utilized, then a full BOPE test would be conducted.



1. Well Control Response:
 1. Primary barrier remains fluid
 2. In the event of an influx due to being underbalanced and after a realized gain or flow, the order of closing BOPE is as follows:
 - a) Annular first
 - b) If annular were to not hold, Upper pipe rams second (which were tested on the skid BOP test)
 - c) If the Upper Pipe Rams were to not hold, Lower Pipe Rams would be third

Cactus
Wellhead

2-9-17
E Bell

80.7 °F

15:49

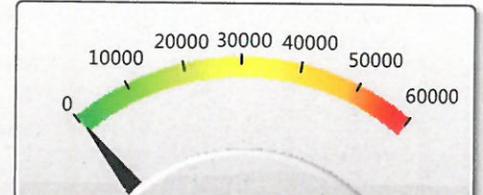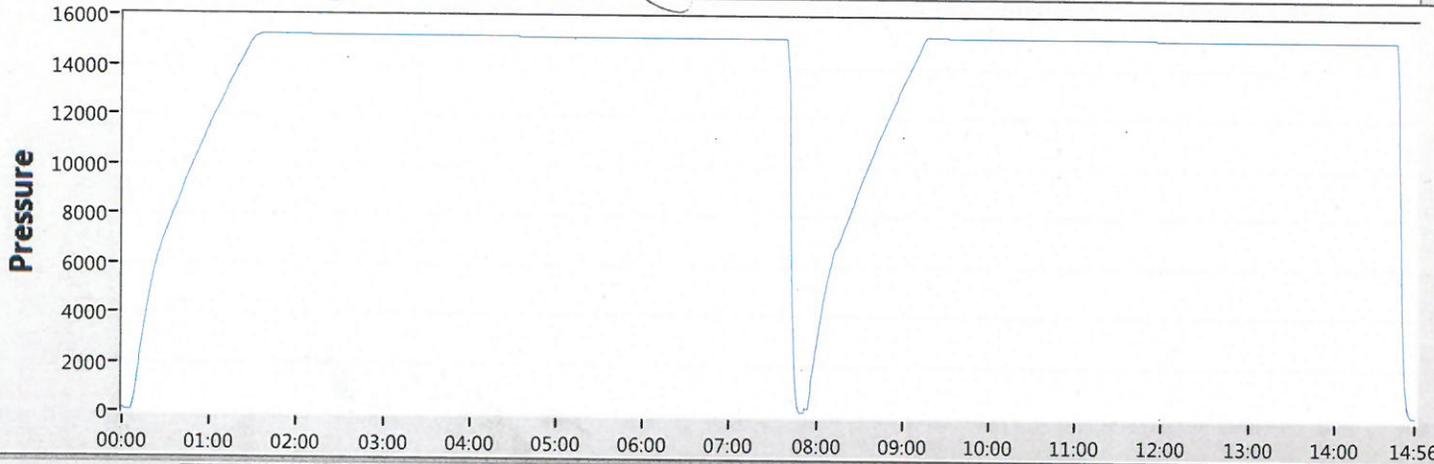

50

Date 02-09-17

Tested By E.BELL

Transducer bay2

Transducer Serial 181504

Calibration Date 9/6/15

Job#	Part#	Serial#	Description	Test Pressure
1	TRJ0006341-0007 116966	TRJ6341-7-1	ADPT,DRLG,CW,MBU-3T,13-5/8 10M	15000
2				
3				
4				
5			TRANSDUCER CALIBRATION DUE 03/13/2017	
6				
7				
8				

Start Stop Zero Config Save Print EXIT

MR POTATO HEAD 11-14 FED COM 825H

2. Casing Program (Primary Design)

Hole Size	Csg. Size	Wt (PPF)	Grade	Conn	Casing Interval		Casing Interval	
					From (MD)	To (MD)	From (TVD)	To (TVD)
14 3/4	10 3/4	40 1/2	H40	BTC	0	259	0	259
9 7/8	8 5/8	32	P110	Sprint FJ	0	10327	0	10327
7 7/8	5 1/2	17	P110	BTC	0	21300	0	10942

• All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 IILB.1.h Must have table for contingency casing.

3. Cementing Program (Primary Design)

Assuming no returns are established while drilling, Devon requests to pump a two stage cement job on the intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon and the second stage performed as a bradenhead squeeze with planned cement from the Brushy canyon to surface.

Devon will report to the BLM the volume of fluid (limited to 1 bbls) used to flush intermediate casing valves following backside cementing procedures.

Casing	# Skis	TOC	Wt. ppg	Yld (ft3/sack)	Slurry Description
Surface	176	Surf	13.2	1.44	Lead: Class C Cement + additives
Int 1	410	Surf	13.0	2.3	2nd State: Bradenhead Squeeze - Lead: Class C Cement + additives
	537	5700	13.2	1.44	Tail: Class H / C + additives
Production	117	8427	9	3.27	Lead: Class H / C + additives
	1439	10427	13.2	1.44	Tail: Class H / C + additives

Casing String	% Excess
Surface	50%
Intermediate 1	30%
Prod	10%

4. Pressure Control Equipment (Three String Design)

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
Int 1	13-5/8"	5M	Annular	X	50% of rated working pressure
			Blind Ram	X	5M
			Pipe Ram		
			Double Ram	X	
			Other*		
Production	13-5/8"	5M	Annular (5M)	X	50% of rated working pressure
			Blind Ram	X	5M
			Pipe Ram		
			Double Ram	X	
			Other*		
			Annular (5M)		
			Blind Ram		
			Pipe Ram		
			Double Ram		
			Other*		
N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.				
Y	A variance is requested to run a 5 M annular on a 10M system				

5. Mud Program (Three String Design)

Section	Type	Weight (ppg)
Surface	FW Gel	8.5-9
Intermediate	DBE / Cut Brine	10-10.5
Production	OBM	10-10.5

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing	
X	Will run GR/CNL from TD to surface (horizontal well - vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain.
	Coring? If yes, explain.

Additional logs planned	Interval
	Resistivity
	Density
X	CBL
X	Mud log
	PEX

7. Drilling Conditions

Condition	Specify what type and where?
BH pressure at deepest TVD	5974
Abnormal temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered measured values and formations will be provided to the BLM.

N	H2S is present
Y	H2S plan attached.

8. Other facets of operation

Is this a walking operation? Potentially

- 1 If operator elects, drilling rig will batch drill the surface holes and run/cement surface casing; walking the rig to next wells on the pad.
- 2 The drilling rig will then batch drill the intermediate sections and run/cement intermediate casing; the wellbore will be isolated with a blind flange and pressure gauge installed for monitoring the well before walking to the next well.
- 3 The drilling rig will then batch drill the production hole sections on the wells with OBM, run/cement production casing, and install TA caps or tubing heads for completions.

NOTE: During batch operations the drilling rig will be moved from well to well however, it will not be removed from the pad until all wells have production casing run/cemented.

Will be pre-setting casing? Potentially

- 1 Spudder rig will move in and batch drill surface hole.
 - a. Rig will utilize fresh water based mud to drill surface hole to TD. Solids control will be handled entirely on a closed loop basis.,
- 2 After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
- 3 The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
- 4 A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
- 5 Spudder rig operations is expected to take 4-5 days per well on a multi-well pa.
- 6 The NMOCD will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 7 Drilling operations will be performed with drilling rig. A that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The NMOCD will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.

Attachments

- Directional Plan
- Other, describe

Issued on: 16 Dec. 2020 by Logan Van Gorp



Connection Data Sheet

OD 8 5/8 in.	Weight (lb/ft) Nominal: 32.00 Plain End: 31.13	Wall Th. 0.352 in.	Grade P110EC	Alt. Drift: 7.875 in.	Connection VAM® SPRINT-FJ
------------------------	---	------------------------------	------------------------	---------------------------------	-------------------------------------

PIPE PROPERTIES		
Nominal OD	8.625	in.
Nominal ID	7.921	in.
Nominal Cross Section Area	9.149	sqin.
Grade Type	High Yield	
Min. Yield Strength	125	ksi
Max. Yield Strength	140	ksi
Min. Ultimate Tensile Strength	135	ksi


CONNECTION PROPERTIES		
Connection Type	Semi-Premium Integral Flush	
Connection OD (nom):	8.665	in.
Connection ID (nom):	7.954	in.
Make-Up Loss	2.614	in.
Critical Cross Section	6.038	sqin.
Tension Efficiency	65.0	% of pipe
Compression Efficiency	65.0	% of pipe
Internal Pressure Efficiency	80.0	% of pipe
External Pressure Efficiency	100	% of pipe

CONNECTION PERFORMANCES		
Tensile Yield Strength	744	klb
Compression Resistance	744	klb
Max. Internal Pressure	7,150	psi
Structural Collapse Resistance	4,000	psi
Max. Bending with Sealability	41	°/100ft
Max. Bending with Sealability	10	°/100ft

TORQUE VALUES		
Min. Make-up torque	15,000	ft.lb
Opt. Make-up torque	16,500	ft.lb
Max. Make-up torque	18,000	ft.lb
Max. Torque with Sealability (MTS)	TBD	ft.lb

* 87.5% RBW

VAM® SPRINT-FJ is a semi-premium flush connection designed for shale applications, where maximum clearance and high tension capacity are required for intermediate casing strings.

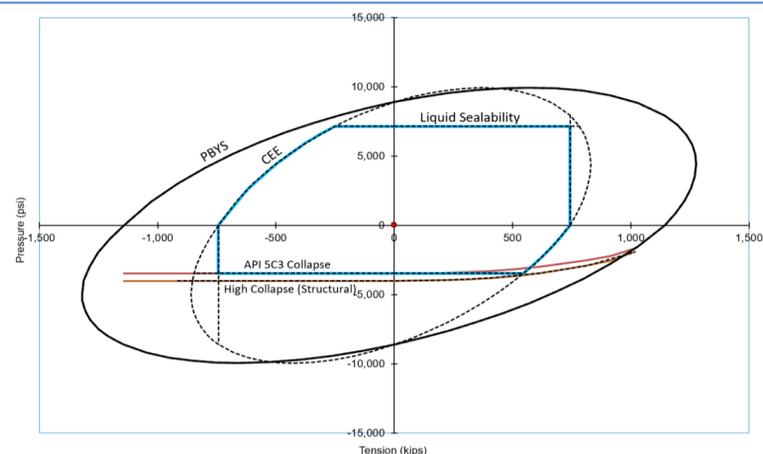

Do you need help on this product? - Remember no one knows VAM® like VAM®

canada@vamfieldservice.com
usa@vamfieldservice.com
mexico@vamfieldservice.com
brazil@vamfieldservice.com

uk@vamfieldservice.com
dubai@vamfieldservice.com
nigeria@vamfieldservice.com
angola@vamfieldservice.com

china@vamfieldservice.com
baku@vamfieldservice.com
singapore@vamfieldservice.com
australia@vamfieldservice.com

Over 140 VAM® Specialists available worldwide 24/7 for Rig Site Assistance





U. S. Steel Tubular Products

10.750" 40.50lb/ft (0.350" Wall) H40

11/4/2021 10:14:32 AM

MECHANICAL PROPERTIES	Pipe	BTC	LTC	STC		--
Minimum Yield Strength	40,000	--	--	--	psi	--
Maximum Yield Strength	80,000	--	--	--	psi	--
Minimum Tensile Strength	60,000	--	--	--	psi	--
DIMENSIONS	Pipe	BTC	LTC	STC		--
Outside Diameter	10.750	0.000	0.000	11.750	in.	--
Wall Thickness	0.350	--	--	--	in.	--
Inside Diameter	10.050	--	--	10.050	in.	--
Standard Drift	9.894	9.894	9.894	9.894	in.	--
Alternate Drift	--	--	--	--	in.	--
Nominal Linear Weight, T&C	40.50	--	--	--	lb/ft	--
Plain End Weight	38.91	--	--	--	lb/ft	--
PERFORMANCE	Pipe	BTC	LTC	STC		--
Minimum Collapse Pressure	1,390	1,390	1,390	1,390	psi	--
Minimum Internal Yield Pressure	2,280	2,280	2,280	2,280	psi	--
Minimum Pipe Body Yield Strength	457	--	--	--	1,000 lbs	--
Joint Strength	--	--	--	314	1,000 lbs	--
Reference Length	--	--	--	5,164	ft	--
MAKE-UP DATA	Pipe	BTC	LTC	STC		--
Make-Up Loss	--	--	--	3.50	in.	--
Minimum Make-Up Torque	--	--	--	2,360	ft-lb	--
Maximum Make-Up Torque	--	--	--	3,930	ft-lb	--

UNCONTROLLED

Notes

Legal Notice

All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.

U. S. Steel Tubular Products
 460 Wildwood Forest Drive, Suite 300S
 Spring, Texas 77380

1-877-893-9461
 connections@uss.com
 www.usstubular.com

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Well Name: MR POTATO HEAD 11-14 FED COM	Well Location: T24S / R29E / SEC 11 / NENE / 32.2388916 / -103.949097	County or Parish/State: EDDY / NM
Well Number: 825H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM88134	Unit or CA Name:	Unit or CA Number: NMNM143625
US Well Number:	Operator: DEVON ENERGY PRODUCTION COMPANY LP	

Notice of Intent

Sundry ID: 2791194

Type of Submission: Notice of Intent

Type of Action: APD Change

Date Sundry Submitted: 05/20/2024

Time Sundry Submitted: 06:53

Date proposed operation will begin: 05/20/2024

Procedure Description: Devon Energy Production Co., L.P. (Devon) respectfully requests to move the BHL on the subject well. Please see attached revised C102, drill plan (break test variance included), and directional plan. Permitted BHL: SESE 20 FSL, 1030 FEL, 14-24S-29E Proposed BHL: SESE 20 FSL, 330 FEL, 14-24S-29E No new leases have been added since approved APD. APD ID: 10400086510

NOI Attachments

Procedure Description

WA018532808_MR_POTATO_HEAD_11_14_F_C_825H_WL_R1_20240520065222.pdf

5.5_17lb_P110_BTC_20240520065212.pdf

MR_POTATO_HEAD_11_14_FED_COM_825H_Directional_Plan_04_24_24_20240520065213.pdf

break_test_variance_BOP_1_15_24_20240520065213.pdf

MR_POTATO_HEAD_11_14_FED_COM_825H_R1_20240520065213.pdf

8.625_32lb_P110EC_SPRINT_FJ_VST_20240520065213.pdf

10.750_40.5lb_H40_20240520065213.pdf

Well Name: MR POTATO HEAD 11-14
FED COM

Well Location: T24S / R29E / SEC 11 /
NENE / 32.2388916 / -103.949097

County or Parish/State: EDDY /
NM

Well Number: 825H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM88134

Unit or CA Name:

Unit or CA Number:
NMNM143625

US Well Number:

Operator: DEVON ENERGY
PRODUCTION COMPANY LP

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHAYDA OMOUMI

Signed on: MAY 20, 2024 06:52 AM

Name: DEVON ENERGY PRODUCTION COMPANY LP

Title: Regulatory Compliance Associate 3

Street Address: 333 W SHERIDAN AVE

City: OKLAHOMA CITY State: OK

Phone: (405) 235-3611

Email address: SHAYDA.OMOUMI@DVN.COM

Field

Representative Name:

Street Address:

City: State: Zip:

Phone:

Email address:

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Devon Energy Production Company LP
LEASE NO.:	NMNM088134
LOCATION:	Section 11, T.24 S., R.29 E., NMPM
COUNTY:	Eddy County, New Mexico ▼

WELL NAME & NO.:	Mr Potato Head 11-14 Fed Com 825H
SURFACE HOLE FOOTAGE:	200'/N & 766'/E
BOTTOM HOLE FOOTAGE:	20'/S & 330'/E
ATS/API ID:	ATS-22-1532
APD ID:	10400086510
Sundry ID:	2791194

COA

H2S	No ▼		
Potash	None ▼		
Cave/Karst Potential	Medium ▼		
Cave/Karst Potential	<input type="checkbox"/> Critical		
Variance	<input checked="" type="checkbox"/> None	<input checked="" type="checkbox"/> Flex Hose	<input checked="" type="checkbox"/> Other
Wellhead	Conventional and Multibowl ▼		
Other	<input type="checkbox"/> 4 String	Capitan Reef None ▼	<input type="checkbox"/> WIPP
Other	Pilot Hole None ▼	<input type="checkbox"/> Open Annulus	
Cementing	Contingency Squeeze None ▼	Echo-Meter None ▼	Primary Cement Squeeze Int 1 ▼
Special Requirements	<input type="checkbox"/> Water Disposal/Injection	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit
Special Requirements	<input type="checkbox"/> Batch Sundry		
Special Requirements Variance	<input checked="" type="checkbox"/> Break Testing	<input checked="" type="checkbox"/> Offline Cementing	<input type="checkbox"/> Casing Clearance

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet **43 CFR part 3170 Subpart 3176**, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **10-3/4** inch surface casing shall be set at approximately **400 feet** (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite and above the salt when present, and below usable fresh water) and cemented to the surface. The surface hole shall be **14 3/4** inch in diameter.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Cement excess is less than 25%, more cement is required if washout occurs. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the **8-5/8** inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**

Option 2:

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- a. First stage: Operator will cement with intent to reach the top of the **Brushy Canyon at 5663' (537 sxs Class H/C+ additives)**.
- b. Second stage:
 - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified. **(Squeeze 410 sxs Class C)**
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

Operator has proposed to pump down 10-3/4" X 8-5/8" annulus after primary cementing stage. Operator must run a CBL from TD of the 8-5/8" casing to surface. Submit results to the BLM. Operator may conduct a negative and positive pressure test during completion to remediate sustained casing pressure.

If cement does not tie-back into the previous casing shoe, a third stage remediation BH may be performed. The appropriate BLM office shall be notified.

- ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi. Annular which shall be tested to 3500 (70% Working Pressure) psi.**
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **8-5/8** inch intermediate casing shoe shall be **5000 (5M) psi.**

Option 2:

Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the **10-3/4** inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi.**

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in **43 CFR part 3170 Subpart 3171**
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.

- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

BOPE Break Testing Variance (Approved)

- BOPE Break Testing is ONLY permitted for 5M BOPE or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP)**
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer **(575-706-2779)** prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted **(575-361-2822 Eddy County)** 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at **21-day** intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per **43 CFR part 3170 Subpart 3172**.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

Offline Cementing

Operator has been **(Approved)** to pump the proposed cement program offline in the **Intermediate(s) interval**.

Offline cementing should commence within 24 hours of landing the casing for the interval.

Notify the BLM 4hrs prior to cementing offline at **Eddy County: 575-361-2822**.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

BLM_NM_CFO_DrillingNotifications@BLM.GOV

(575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report when present.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172 and API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including

lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

Long Vo (LVO) 5/21/2024

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2

7. If Unit of CA/Agreement, Name and/or No.

1. Type of Well

Oil Well Gas Well Other

8. Well Name and No.

2. Name of Operator

9. API Well No.

3a. Address

3b. Phone No. (include area code)

10. Field and Pool or Exploratory Area

4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)

11. Country or Parish, State

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)

Title

Signature

Date

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NENE / 200 FNL / 766 FEL / TWSP: 24S / RANGE: 29E / SECTION: 11 / LAT: 32.2388916 / LONG: -103.949097 (TVD: 0 feet, MD: 0 feet)

PPP: NENE / 100 FNL / 1030 FEL / TWSP: 24S / RANGE: 29E / SECTION: 11 / LAT: 32.2391644 / LONG: -103.9499508 (TVD: 10221 feet, MD: 10245 feet)

BHL: SESE / 20 FSL / 1030 FEL / TWSP: 24S / RANGE: 29E / SECTION: 14 / LAT: 32.2103258 / LONG: -103.9499731 (TVD: 10942 feet, MD: 21274 feet)

CONFIDENTIAL

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number		² Pool Code		³ Pool Name	
		98220		Purple Sage; Wolfcamp (Gas)	
⁴ Property Code		⁵ Property Name			⁶ Well Number
326251		MR POTATO HEAD 11-14 FED COM			825H
⁷ OGRID No.		⁸ Operator Name			⁹ Elevation
6137		DEVON ENERGY PRODUCTION COMPANY, L.P.			3077.3

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	11	24 S	29 E		200	NORTH	766	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	14	24 S	29 E		20	SOUTH	330	EAST	EDDY

¹² Dedicated Acres	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
1280			

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

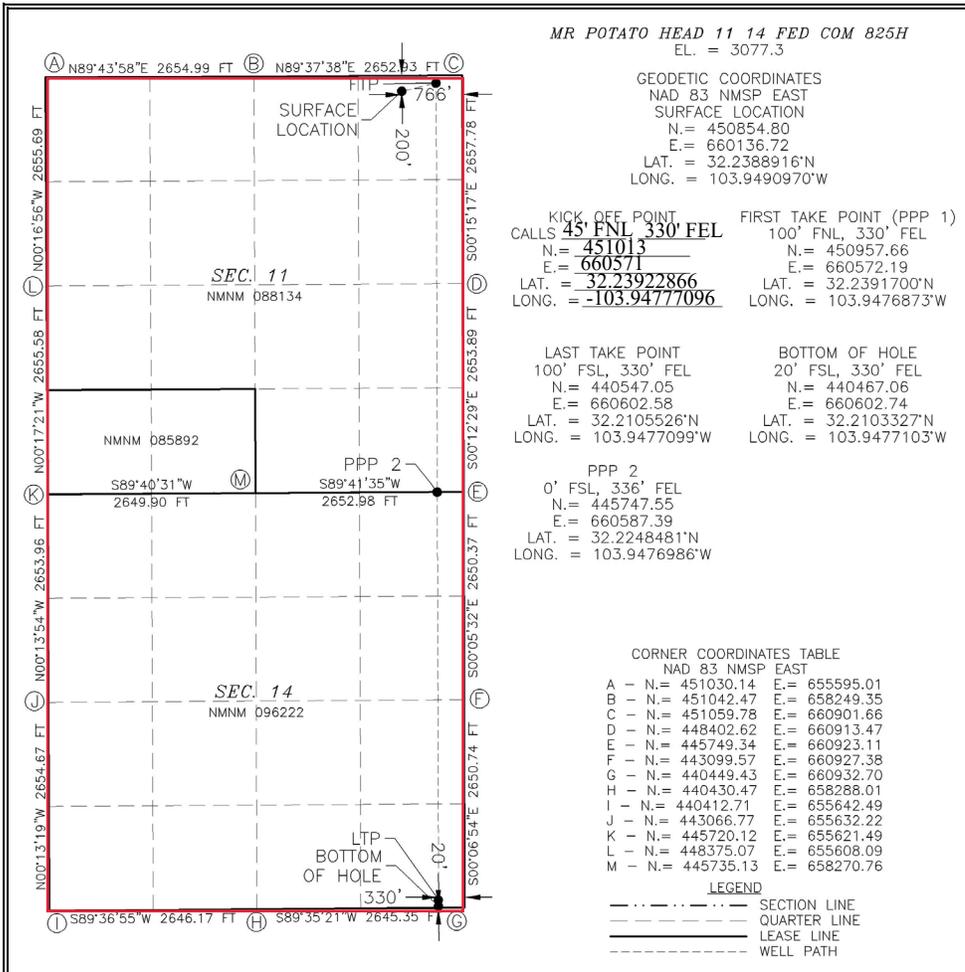

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Shayda Omoumi 4/26/2024
Signature Date

Shayda Omoumi
Printed Name

shayda.omoumi@dvn.com
E-mail Address

¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

APRIL 23, 2024
Date of Survey

Shayda Omoumi
Signature and Seal of Professional Surveyor

Certificate Number: 12797
NEW MEXICO PROFESSIONAL SURVEYORS
NO. 9409A

Intent As Drilled

API #	
Operator Name: DEVON ENERGY PRODUCTION COMPANY, L.P.	Property Name: MR POTATO HEAD 11 14 FED COM Well Number 825H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
A	11	24S	29E		45	NORTH	330	EAST	EDDY
Latitude					Longitude				NAD
32.23922866					-103.94777096				83

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
A	11	24S	29E		100	NORTH	330	EAST	EDDY
Latitude					Longitude				NAD
32.2391700					103.9476873				83

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
P	14	24S	29E		100	SOUTH	330	EAST	EDDY
Latitude					Longitude				NAD
32.2105526					103.9477099				83

Is this well the defining well for the Horizontal Spacing Unit? N

Is this well an infill well? Y

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API # 30-015-46722	
Operator Name: DEVON ENERGY PRODUCTION COMPANY, L.P.	Property Name: MR POTATO HEAD 11-14 FED COM Well Number 623H

KZ 06/29/2018



U. S. Steel Tubular Products

5.500" 17.00lbs/ft (0.304" Wall) P110

2/21/2019 8:12:22 AM

MECHANICAL PROPERTIES	Pipe	BTC	LTC	STC	
Minimum Yield Strength	110,000	--	--	--	psi
Maximum Yield Strength	140,000	--	--	--	psi
Minimum Tensile Strength	125,000	--	--	--	psi
DIMENSIONS	Pipe	BTC	LTC	STC	
Outside Diameter	5.500	6.050	6.050	--	in.
Wall Thickness	0.304	--	--	--	in.
Inside Diameter	4.892	4.892	4.892	--	in.
Standard Drift	4.767	4.767	4.767	--	in.
Alternate Drift	--	--	--	--	in.
Nominal Linear Weight, T&C	17.00	--	--	--	lbs/ft
Plain End Weight	16.89	--	--	--	lbs/ft
PERFORMANCE	Pipe	BTC	LTC	STC	
Minimum Collapse Pressure	7,480	7,480	7,480	--	psi
Minimum Internal Yield Pressure	10,640	10,640	10,640	--	psi
Minimum Pipe Body Yield Strength	546	--	--	--	1,000 lbs
Joint Strength	--	568	445	--	1,000 lbs
Reference Length	--	22,271	17,449	--	ft
MAKE-UP DATA	Pipe	BTC	LTC	STC	
Make-Up Loss	--	4.13	3.50	--	in.
Minimum Make-Up Torque	--	--	3,470	--	ft-lbs
Maximum Make-Up Torque	--	--	5,780	--	ft-lbs

Legal Notice

All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.

U. S. Steel Tubular Products
 460 Wildwood Forest Drive, Suite 300S
 Spring, Texas 77380


1-877-893-9461
 connections@uss.com
 www.usstubular.com



Well: MR POTATO HEAD 11-14 FED COM 825H
 County: Eddy
 Wellbore: Permit Plan
 Design: Permit Plan #1

Geodetic System: US State Plane 1983
 Datum: North American Datum 1927
 Ellipsoid: Clarke 1866
 Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL
2000.00	0.00	70.00	2000.00	0.00	0.00	0.00	0.00	Start Tangent
2500.00	10.00	70.00	2497.47	14.89	40.90	-13.04	2.00	Hold Tangent
4662.93	10.00	70.00	4627.54	143.34	393.84	-125.55	0.00	Drop to Vertical
5162.93	0.00	70.00	5125.00	158.23	434.73	-138.59	2.00	Hold Vertical
10426.97	0.00	179.83	10389.04	158.23	434.73	-138.59	0.00	KOP
11328.12	90.11	179.83	10962.00	-415.87	436.44	435.01	10.00	Landing Point
21300.05	90.11	179.83	10942.00	-10387.74	466.02	10398.19	0.00	BHL

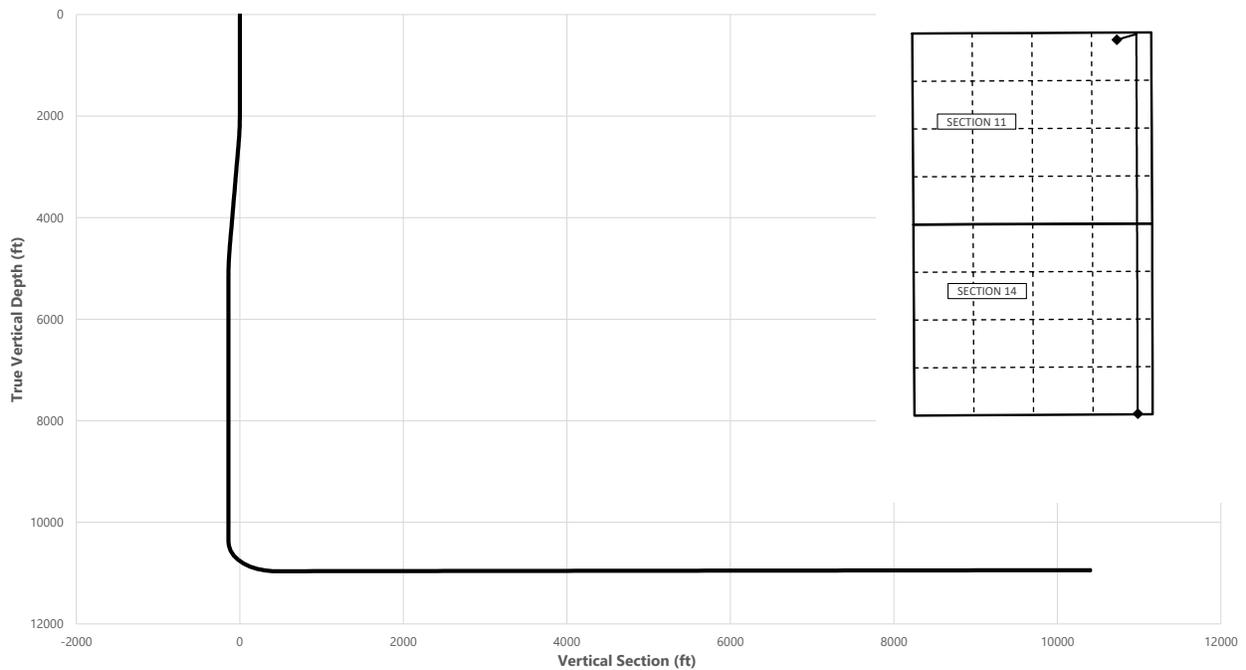

Key Depths	MD (ft)	TVD (ft)
Rustler	234.00	234.00
Salt	523.00	523.00
Base of Salt	2963.58	2954.00
Delaware	3233.68	3220.00
Cherry Canyon	4071.41	4045.00
Brushy Canyon	5700.93	5663.00
1st Bone Spring Lime	6953.93	6916.00
Bone Spring 1st	7984.93	7947.00
Bone Spring 2nd	8799.93	8762.00
3rd Bone Spring Lime	9135.93	9098.00
Bone Spring 3rd	9932.93	9895.00
Wolfcamp / Point of Penetration	10258.93	10221.00
exit	21220.05	10942.17

	MD (ft)	TVD (ft)	Lat (°)	Long (°)	Section Footages
SHL	0.00	0.00	32.2388	-103.9492	200' FNL, 766' FEL of Sec 11 in T24S, R29E
KOP	10426.97	10389.04	32.2392	-103.9478	45' FNL, 330' FEL of Sec 11 in T24S, R29E
Point of Penetration	10258.93	10221.00	32.2392	-103.9477	100' FNL, 330' FEL of Sec 11 in T24S, R29E
Exit	21220.05	10942.17	32.2106	-103.9477	100' FSL, 330' FEL of Sec 14 in T24S, R29E
BHL	21300.05	10942.00	32.2102	-103.9478	20' FSL, 330' FEL of Sec 14 in T24S, R29E

	Y	X	MD
KOP	451013	660571	10426.97



Well: MR POTATO HEAD 11-14 FED COM 825H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL
100.00	0.00	70.00	100.00	0.00	0.00	0.00	0.00	
200.00	0.00	70.00	200.00	0.00	0.00	0.00	0.00	
234.00	0.00	70.00	234.00	0.00	0.00	0.00	0.00	Rustler
300.00	0.00	70.00	300.00	0.00	0.00	0.00	0.00	
400.00	0.00	70.00	400.00	0.00	0.00	0.00	0.00	
500.00	0.00	70.00	500.00	0.00	0.00	0.00	0.00	
523.00	0.00	70.00	523.00	0.00	0.00	0.00	0.00	Salt
600.00	0.00	70.00	600.00	0.00	0.00	0.00	0.00	
700.00	0.00	70.00	700.00	0.00	0.00	0.00	0.00	
800.00	0.00	70.00	800.00	0.00	0.00	0.00	0.00	
900.00	0.00	70.00	900.00	0.00	0.00	0.00	0.00	
1000.00	0.00	70.00	1000.00	0.00	0.00	0.00	0.00	
1100.00	0.00	70.00	1100.00	0.00	0.00	0.00	0.00	
1200.00	0.00	70.00	1200.00	0.00	0.00	0.00	0.00	
1300.00	0.00	70.00	1300.00	0.00	0.00	0.00	0.00	
1400.00	0.00	70.00	1400.00	0.00	0.00	0.00	0.00	
1500.00	0.00	70.00	1500.00	0.00	0.00	0.00	0.00	
1600.00	0.00	70.00	1600.00	0.00	0.00	0.00	0.00	
1700.00	0.00	70.00	1700.00	0.00	0.00	0.00	0.00	
1800.00	0.00	70.00	1800.00	0.00	0.00	0.00	0.00	
1900.00	0.00	70.00	1900.00	0.00	0.00	0.00	0.00	
2000.00	0.00	70.00	2000.00	0.00	0.00	0.00	0.00	Start Tangent
2100.00	2.00	70.00	2099.98	0.60	1.64	-0.52	2.00	
2200.00	4.00	70.00	2199.84	2.39	6.56	-2.09	2.00	
2300.00	6.00	70.00	2299.45	5.37	14.75	-4.70	2.00	
2400.00	8.00	70.00	2398.70	9.54	26.20	-8.35	2.00	
2500.00	10.00	70.00	2497.47	14.89	40.90	-13.04	2.00	Hold Tangent
2600.00	10.00	70.00	2595.95	20.82	57.22	-18.24	0.00	
2700.00	10.00	70.00	2694.43	26.76	73.53	-23.44	0.00	
2800.00	10.00	70.00	2792.91	32.70	89.85	-28.64	0.00	
2900.00	10.00	70.00	2891.39	38.64	106.17	-33.84	0.00	
2963.58	10.00	70.00	2954.00	42.42	116.54	-37.15	0.00	Base of Salt
3000.00	10.00	70.00	2989.87	44.58	122.49	-39.05	0.00	
3100.00	10.00	70.00	3088.35	50.52	138.80	-44.25	0.00	
3200.00	10.00	70.00	3186.83	56.46	155.12	-49.45	0.00	
3233.68	10.00	70.00	3220.00	58.46	160.62	-51.20	0.00	Delaware
3300.00	10.00	70.00	3285.31	62.40	171.44	-54.65	0.00	
3400.00	10.00	70.00	3383.79	68.34	187.76	-59.85	0.00	
3500.00	10.00	70.00	3482.27	74.28	204.07	-65.06	0.00	
3600.00	10.00	70.00	3580.75	80.22	220.39	-70.26	0.00	
3700.00	10.00	70.00	3679.23	86.16	236.71	-75.46	0.00	
3800.00	10.00	70.00	3777.72	92.09	253.03	-80.66	0.00	
3900.00	10.00	70.00	3876.20	98.03	269.34	-85.86	0.00	
4000.00	10.00	70.00	3974.68	103.97	285.66	-91.06	0.00	
4071.41	10.00	70.00	4045.00	108.21	297.31	-94.78	0.00	Cherry Canyon
4100.00	10.00	70.00	4073.16	109.91	301.98	-96.27	0.00	
4200.00	10.00	70.00	4171.64	115.85	318.30	-101.47	0.00	
4300.00	10.00	70.00	4270.12	121.79	334.61	-106.67	0.00	
4400.00	10.00	70.00	4368.60	127.73	350.93	-111.87	0.00	
4500.00	10.00	70.00	4467.08	133.67	367.25	-117.07	0.00	
4600.00	10.00	70.00	4565.56	139.61	383.57	-122.28	0.00	
4662.93	10.00	70.00	4627.54	143.34	393.84	-125.55	0.00	Drop to Vertical
4700.00	9.26	70.00	4664.08	145.47	399.66	-127.41	2.00	
4800.00	7.26	70.00	4763.04	150.38	413.16	-131.71	2.00	
4900.00	5.26	70.00	4862.44	154.11	423.40	-134.97	2.00	
5000.00	3.26	70.00	4962.16	156.65	430.38	-137.20	2.00	
5100.00	1.26	70.00	5062.08	157.99	434.08	-138.38	2.00	
5162.93	0.00	70.00	5125.00	158.23	434.73	-138.59	2.00	Hold Vertical
5200.00	0.00	179.83	5162.07	158.23	434.73	-138.59	0.00	
5300.00	0.00	179.83	5262.07	158.23	434.73	-138.59	0.00	
5400.00	0.00	179.83	5362.07	158.23	434.73	-138.59	0.00	
5500.00	0.00	179.83	5462.07	158.23	434.73	-138.59	0.00	
5600.00	0.00	179.83	5562.07	158.23	434.73	-138.59	0.00	
5700.00	0.00	179.83	5662.07	158.23	434.73	-138.59	0.00	
5700.93	0.00	179.83	5663.00	158.23	434.73	-138.59	0.00	Brushy Canyon
5800.00	0.00	179.83	5762.07	158.23	434.73	-138.59	0.00	
5900.00	0.00	179.83	5862.07	158.23	434.73	-138.59	0.00	
6000.00	0.00	179.83	5962.07	158.23	434.73	-138.59	0.00	
6100.00	0.00	179.83	6062.07	158.23	434.73	-138.59	0.00	



Well: MR POTATO HEAD 11-14 FED COM 825H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
6200.00	0.00	179.83	6162.07	158.23	434.73	-138.59	0.00	
6300.00	0.00	179.83	6262.07	158.23	434.73	-138.59	0.00	
6400.00	0.00	179.83	6362.07	158.23	434.73	-138.59	0.00	
6500.00	0.00	179.83	6462.07	158.23	434.73	-138.59	0.00	
6600.00	0.00	179.83	6562.07	158.23	434.73	-138.59	0.00	
6700.00	0.00	179.83	6662.07	158.23	434.73	-138.59	0.00	
6800.00	0.00	179.83	6762.07	158.23	434.73	-138.59	0.00	
6900.00	0.00	179.83	6862.07	158.23	434.73	-138.59	0.00	
6953.93	0.00	179.83	6916.00	158.23	434.73	-138.59	0.00	1st Bone Spring Lime
7000.00	0.00	179.83	6962.07	158.23	434.73	-138.59	0.00	
7100.00	0.00	179.83	7062.07	158.23	434.73	-138.59	0.00	
7200.00	0.00	179.83	7162.07	158.23	434.73	-138.59	0.00	
7300.00	0.00	179.83	7262.07	158.23	434.73	-138.59	0.00	
7400.00	0.00	179.83	7362.07	158.23	434.73	-138.59	0.00	
7500.00	0.00	179.83	7462.07	158.23	434.73	-138.59	0.00	
7600.00	0.00	179.83	7562.07	158.23	434.73	-138.59	0.00	
7700.00	0.00	179.83	7662.07	158.23	434.73	-138.59	0.00	
7800.00	0.00	179.83	7762.07	158.23	434.73	-138.59	0.00	
7900.00	0.00	179.83	7862.07	158.23	434.73	-138.59	0.00	
7984.93	0.00	179.83	7947.00	158.23	434.73	-138.59	0.00	Bone Spring 1st
8000.00	0.00	179.83	7962.07	158.23	434.73	-138.59	0.00	
8100.00	0.00	179.83	8062.07	158.23	434.73	-138.59	0.00	
8200.00	0.00	179.83	8162.07	158.23	434.73	-138.59	0.00	
8300.00	0.00	179.83	8262.07	158.23	434.73	-138.59	0.00	
8400.00	0.00	179.83	8362.07	158.23	434.73	-138.59	0.00	
8500.00	0.00	179.83	8462.07	158.23	434.73	-138.59	0.00	
8600.00	0.00	179.83	8562.07	158.23	434.73	-138.59	0.00	
8700.00	0.00	179.83	8662.07	158.23	434.73	-138.59	0.00	
8799.93	0.00	179.83	8762.00	158.23	434.73	-138.59	0.00	Bone Spring 2nd
8800.00	0.00	179.83	8762.07	158.23	434.73	-138.59	0.00	
8900.00	0.00	179.83	8862.07	158.23	434.73	-138.59	0.00	
9000.00	0.00	179.83	8962.07	158.23	434.73	-138.59	0.00	
9100.00	0.00	179.83	9062.07	158.23	434.73	-138.59	0.00	
9135.93	0.00	179.83	9098.00	158.23	434.73	-138.59	0.00	3rd Bone Spring Lime
9200.00	0.00	179.83	9162.07	158.23	434.73	-138.59	0.00	
9300.00	0.00	179.83	9262.07	158.23	434.73	-138.59	0.00	
9400.00	0.00	179.83	9362.07	158.23	434.73	-138.59	0.00	
9500.00	0.00	179.83	9462.07	158.23	434.73	-138.59	0.00	
9600.00	0.00	179.83	9562.07	158.23	434.73	-138.59	0.00	
9700.00	0.00	179.83	9662.07	158.23	434.73	-138.59	0.00	
9800.00	0.00	179.83	9762.07	158.23	434.73	-138.59	0.00	
9900.00	0.00	179.83	9862.07	158.23	434.73	-138.59	0.00	
9932.93	0.00	179.83	9895.00	158.23	434.73	-138.59	0.00	Bone Spring 3rd
10000.00	0.00	179.83	9962.07	158.23	434.73	-138.59	0.00	
10100.00	0.00	179.83	10062.07	158.23	434.73	-138.59	0.00	
10200.00	0.00	179.83	10162.07	158.23	434.73	-138.59	0.00	
10258.93	0.00	179.83	10221.00	158.23	434.73	-138.59	0.00	Wolfcamp / Point of Penetration
10300.00	0.00	179.83	10262.07	158.23	434.73	-138.59	0.00	
10400.00	0.00	179.83	10362.07	158.23	434.73	-138.59	0.00	
10426.97	0.00	179.83	10389.04	158.23	434.73	-138.59	0.00	KOP
10500.00	7.30	179.83	10461.87	153.58	434.75	-133.94	10.00	
10600.00	17.30	179.83	10559.45	132.30	434.81	-112.68	10.00	
10700.00	27.30	179.83	10651.85	94.40	434.92	-74.81	10.00	
10800.00	37.30	179.83	10736.27	41.03	435.08	-21.49	10.00	
10900.00	47.30	179.83	10810.14	-26.19	435.28	45.67	10.00	
11000.00	57.30	179.83	10871.21	-105.21	435.52	124.63	10.00	
11100.00	67.30	179.83	10917.63	-193.64	435.78	212.98	10.00	
11200.00	77.30	179.83	10947.99	-288.79	436.06	308.04	10.00	
11300.00	87.30	179.83	10961.37	-387.76	436.36	406.93	10.00	
11328.12	90.11	179.83	10962.00	-415.87	436.44	435.01	10.00	Landing Point
11400.00	90.11	179.83	10961.86	-487.75	436.65	506.83	0.00	
11500.00	90.11	179.83	10961.66	-587.75	436.95	606.74	0.00	
11600.00	90.11	179.83	10961.46	-687.75	437.24	706.66	0.00	
11700.00	90.11	179.83	10961.25	-787.75	437.54	806.57	0.00	
11800.00	90.11	179.83	10961.05	-887.75	437.84	906.48	0.00	
11900.00	90.11	179.83	10960.85	-987.75	438.14	1006.39	0.00	
12000.00	90.11	179.83	10960.65	-1087.75	438.43	1106.31	0.00	
12100.00	90.11	179.83	10960.45	-1187.75	438.73	1206.22	0.00	
12200.00	90.11	179.83	10960.25	-1287.75	439.03	1306.13	0.00	
12300.00	90.11	179.83	10960.05	-1387.75	439.32	1406.04	0.00	



Well: MR POTATO HEAD 11-14 FED COM 825H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (")	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
12400.00	90.11	179.83	10959.85	-1487.75	439.62	1505.95	0.00	
12500.00	90.11	179.83	10959.65	-1587.75	439.92	1605.87	0.00	
12600.00	90.11	179.83	10959.45	-1687.74	440.21	1705.78	0.00	
12700.00	90.11	179.83	10959.25	-1787.74	440.51	1805.69	0.00	
12800.00	90.11	179.83	10959.05	-1887.74	440.81	1905.60	0.00	
12900.00	90.11	179.83	10958.85	-1987.74	441.11	2005.52	0.00	
13000.00	90.11	179.83	10958.65	-2087.74	441.40	2105.43	0.00	
13100.00	90.11	179.83	10958.45	-2187.74	441.70	2205.34	0.00	
13200.00	90.11	179.83	10958.25	-2287.74	442.00	2305.25	0.00	
13300.00	90.11	179.83	10958.05	-2387.74	442.29	2405.16	0.00	
13400.00	90.11	179.83	10957.85	-2487.74	442.59	2505.08	0.00	
13500.00	90.11	179.83	10957.65	-2587.74	442.89	2604.99	0.00	
13600.00	90.11	179.83	10957.45	-2687.74	443.18	2704.90	0.00	
13700.00	90.11	179.83	10957.25	-2787.74	443.48	2804.81	0.00	
13800.00	90.11	179.83	10957.05	-2887.74	443.78	2904.73	0.00	
13900.00	90.11	179.83	10956.85	-2987.74	444.08	3004.64	0.00	
14000.00	90.11	179.83	10956.64	-3087.74	444.37	3104.55	0.00	
14100.00	90.11	179.83	10956.44	-3187.74	444.67	3204.46	0.00	
14200.00	90.11	179.83	10956.24	-3287.73	444.97	3304.37	0.00	
14300.00	90.11	179.83	10956.04	-3387.73	445.26	3404.29	0.00	
14400.00	90.11	179.83	10955.84	-3487.73	445.56	3504.20	0.00	
14500.00	90.11	179.83	10955.64	-3587.73	445.86	3604.11	0.00	
14600.00	90.11	179.83	10955.44	-3687.73	446.15	3704.02	0.00	
14700.00	90.11	179.83	10955.24	-3787.73	446.45	3803.93	0.00	
14800.00	90.11	179.83	10955.04	-3887.73	446.75	3903.85	0.00	
14900.00	90.11	179.83	10954.84	-3987.73	447.04	4003.76	0.00	
15000.00	90.11	179.83	10954.64	-4087.73	447.34	4103.67	0.00	
15100.00	90.11	179.83	10954.44	-4187.73	447.64	4203.58	0.00	
15200.00	90.11	179.83	10954.24	-4287.73	447.94	4303.50	0.00	
15300.00	90.11	179.83	10954.04	-4387.73	448.23	4403.41	0.00	
15400.00	90.11	179.83	10953.84	-4487.73	448.53	4503.32	0.00	
15500.00	90.11	179.83	10953.64	-4587.73	448.83	4603.23	0.00	
15600.00	90.11	179.83	10953.44	-4687.73	449.12	4703.14	0.00	
15700.00	90.11	179.83	10953.24	-4787.73	449.42	4803.06	0.00	
15800.00	90.11	179.83	10953.04	-4887.72	449.72	4902.97	0.00	
15900.00	90.11	179.83	10952.84	-4987.72	450.01	5002.88	0.00	
16000.00	90.11	179.83	10952.64	-5087.72	450.31	5102.79	0.00	
16100.00	90.11	179.83	10952.44	-5187.72	450.61	5202.71	0.00	
16200.00	90.11	179.83	10952.24	-5287.72	450.91	5302.62	0.00	
16300.00	90.11	179.83	10952.03	-5387.72	451.20	5402.53	0.00	
16400.00	90.11	179.83	10951.83	-5487.72	451.50	5502.44	0.00	
16500.00	90.11	179.83	10951.63	-5587.72	451.80	5602.35	0.00	
16600.00	90.11	179.83	10951.43	-5687.72	452.09	5702.27	0.00	
16700.00	90.11	179.83	10951.23	-5787.72	452.39	5802.18	0.00	
16800.00	90.11	179.83	10951.03	-5887.72	452.69	5902.09	0.00	
16900.00	90.11	179.83	10950.83	-5987.72	452.98	6002.00	0.00	
17000.00	90.11	179.83	10950.63	-6087.72	453.28	6101.91	0.00	
17100.00	90.11	179.83	10950.43	-6187.72	453.58	6201.83	0.00	
17200.00	90.11	179.83	10950.23	-6287.72	453.88	6301.74	0.00	
17300.00	90.11	179.83	10950.03	-6387.71	454.17	6401.65	0.00	
17400.00	90.11	179.83	10949.83	-6487.71	454.47	6501.56	0.00	
17500.00	90.11	179.83	10949.63	-6587.71	454.77	6601.48	0.00	
17600.00	90.11	179.83	10949.43	-6687.71	455.06	6701.39	0.00	
17700.00	90.11	179.83	10949.23	-6787.71	455.36	6801.30	0.00	
17800.00	90.11	179.83	10949.03	-6887.71	455.66	6901.21	0.00	
17900.00	90.11	179.83	10948.83	-6987.71	455.95	7001.12	0.00	
18000.00	90.11	179.83	10948.63	-7087.71	456.25	7101.04	0.00	
18100.00	90.11	179.83	10948.43	-7187.71	456.55	7200.95	0.00	
18200.00	90.11	179.83	10948.23	-7287.71	456.84	7300.86	0.00	
18300.00	90.11	179.83	10948.03	-7387.71	457.14	7400.77	0.00	
18400.00	90.11	179.83	10947.83	-7487.71	457.44	7500.69	0.00	
18500.00	90.11	179.83	10947.63	-7587.71	457.74	7600.60	0.00	
18600.00	90.11	179.83	10947.42	-7687.71	458.03	7700.51	0.00	
18700.00	90.11	179.83	10947.22	-7787.71	458.33	7800.42	0.00	
18800.00	90.11	179.83	10947.02	-7887.71	458.63	7900.33	0.00	
18900.00	90.11	179.83	10946.82	-7987.70	458.92	8000.25	0.00	
19000.00	90.11	179.83	10946.62	-8087.70	459.22	8100.16	0.00	
19100.00	90.11	179.83	10946.42	-8187.70	459.52	8200.07	0.00	
19200.00	90.11	179.83	10946.22	-8287.70	459.81	8299.98	0.00	
19300.00	90.11	179.83	10946.02	-8387.70	460.11	8399.90	0.00	



Well: MR POTATO HEAD 11-14 FED COM 825H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
19400.00	90.11	179.83	10945.82	-8487.70	460.41	8499.81	0.00	
19500.00	90.11	179.83	10945.62	-8587.70	460.71	8599.72	0.00	
19600.00	90.11	179.83	10945.42	-8687.70	461.00	8699.63	0.00	
19700.00	90.11	179.83	10945.22	-8787.70	461.30	8799.54	0.00	
19800.00	90.11	179.83	10945.02	-8887.70	461.60	8899.46	0.00	
19900.00	90.11	179.83	10944.82	-8987.70	461.89	8999.37	0.00	
20000.00	90.11	179.83	10944.62	-9087.70	462.19	9099.28	0.00	
20100.00	90.11	179.83	10944.42	-9187.70	462.49	9199.19	0.00	
20200.00	90.11	179.83	10944.22	-9287.70	462.78	9299.10	0.00	
20300.00	90.11	179.83	10944.02	-9387.70	463.08	9399.02	0.00	
20400.00	90.11	179.83	10943.82	-9487.69	463.38	9498.93	0.00	
20500.00	90.11	179.83	10943.62	-9587.69	463.68	9598.84	0.00	
20600.00	90.11	179.83	10943.42	-9687.69	463.97	9698.75	0.00	
20700.00	90.11	179.83	10943.22	-9787.69	464.27	9798.67	0.00	
20800.00	90.11	179.83	10943.02	-9887.69	464.57	9898.58	0.00	
20900.00	90.11	179.83	10942.81	-9987.69	464.86	9998.49	0.00	
21000.00	90.11	179.83	10942.61	-10087.69	465.16	10098.40	0.00	
21100.00	90.11	179.83	10942.41	-10187.69	465.46	10198.31	0.00	
21200.00	90.11	179.83	10942.21	-10287.69	465.75	10298.23	0.00	
21220.05	90.11	179.83	10942.17	-10307.74	465.81	10318.26	0.00	exit
21300.00	90.11	179.83	10942.01	-10387.69	466.05	10398.14	0.00	
21300.05	90.11	179.83	10942.00	-10387.74	466.02	10398.19	0.00	BHL

Section 2 - Blowout Preventer Testing Procedure

Variance Request

Devon Energy requests to only test BOP connection breaks after drilling out of surface casing and while skidding between wells which conforms to API Standard 53 and industry standards. This test will include the Top Pipe Rams, HCR, Kill Line Check Valve, QDC (quick disconnect to wellhead) and Shell of the 10M BOPE to 5M for 10 minutes. If a break to the flex hose that runs to the choke manifold is required due to repositioning from a skid, the HCR will remain open during the shell test to include that additional break. The variance only pertains to intermediate hole-sections and no deeper than the Bone Springs Formation where 5M BOP tests are required. The initial BOP test will follow 43 CFR 3172, and subsequent tests following a skid will only test connections that are broken. The annular preventer will be tested to 100% working pressure. This variance will meet or exceed 43 CFR 3172 per the following: Devon Energy will perform a full BOP test per 43 CFR 3172 before drilling out of the intermediate casing string(s) and starting the production hole, before starting any hole section that requires a 10M test, before the expiration of the allotted 14-days for 5M intermediate batch drilling or when the drilling rig is fully mobilized to a new well pad, whichever is sooner. We will utilize a 200' TVD tolerance between intermediate shoes as the cutoff for a full BOP test. The BLM will be contacted 4hrs prior to a BOPE test. The BLM will be notified if and when a well control event is encountered. Break test will be a 14 day interval and not a 30 day full BOPE test interval. If in the event break testing is not utilized, then a full BOPE test would be conducted.



1. Well Control Response:
 1. Primary barrier remains fluid
 2. In the event of an influx due to being underbalanced and after a realized gain or flow, the order of closing BOPE is as follows:
 - a) Annular first
 - b) If annular were to not hold, Upper pipe rams second (which were tested on the skid BOP test)
 - c) If the Upper Pipe Rams were to not hold, Lower Pipe Rams would be third

Cactus
Wellhead

2-9-17
E Bell

80.7 °F

15:49

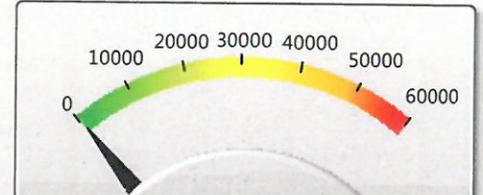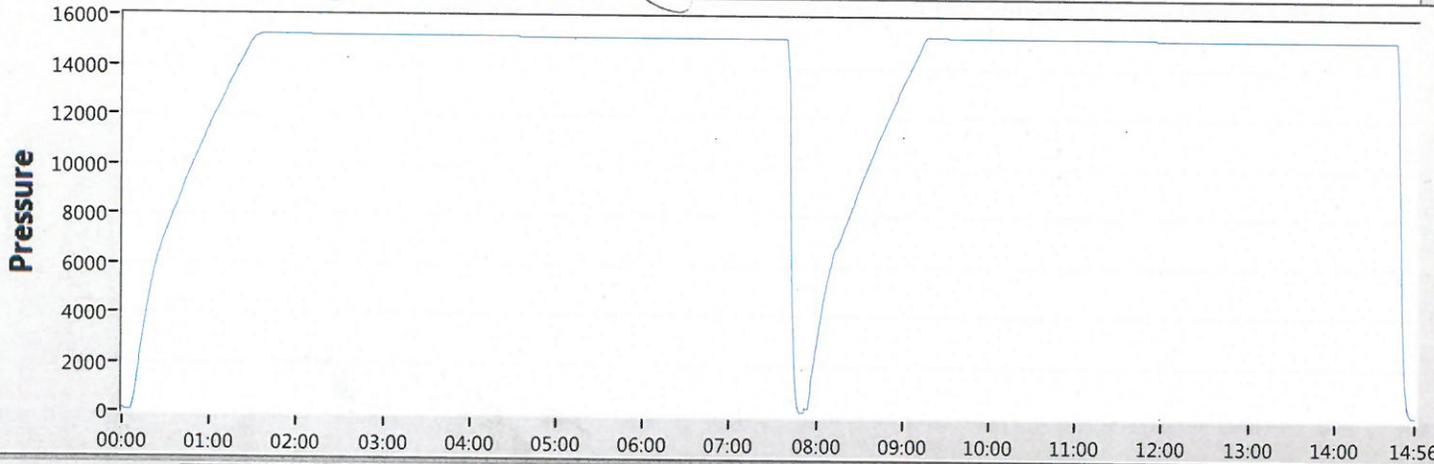

50

Date 02-09-17

Tested By E.BELL

Transducer bay2

Transducer Serial 181504

Calibration Date 9/6/15

Job#	Part#	Serial#	Description	Test Pressure
1	TRJ0006341-0007 116966	TRJ6341-7-1	ADPT,DRLG,CW,MBU-3T,13-5/8 10M	15000
2				
3				
4				
5			TRANSDUCER CALIBRATION DUE 03/13/2017	
6				
7				
8				

Start Stop Zero Config Save Print EXIT

MR POTATO HEAD 11-14 FED COM 825H

2. Casing Program (Primary Design)

Hole Size	Csg. Size	Wt (PPF)	Grade	Conn	Casing Interval		Casing Interval	
					From (MD)	To (MD)	From (TVD)	To (TVD)
14 3/4	10 3/4	40 1/2	H40	BTC	0	259	0	259
9 7/8	8 5/8	32	P110	Sprint FJ	0	10327	0	10327
7 7/8	5 1/2	17	P110	BTC	0	21300	0	10942

• All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 IILB.1.h Must have table for contingency casing.

3. Cementing Program (Primary Design)

Assuming no returns are established while drilling, Devon requests to pump a two stage cement job on the intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon and the second stage performed as a bradenhead squeeze with planned cement from the Brushy canyon to surface.

Devon will report to the BLM the volume of fluid (limited to 1 bbls) used to flush intermediate casing valves following backside cementing procedures.

Casing	# Skis	TOC	Wt. ppg	Yld (ft3/sack)	Slurry Description
Surface	176	Surf	13.2	1.44	Lead: Class C Cement + additives
Int 1	410	Surf	13.0	2.3	2nd State: Bradenhead Squeeze - Lead: Class C Cement + additives
	537	5700	13.2	1.44	Tail: Class H / C + additives
Production	117	8427	9	3.27	Lead: Class H / C + additives
	1439	10427	13.2	1.44	Tail: Class H / C + additives

Casing String	% Excess
Surface	50%
Intermediate 1	30%
Prod	10%

4. Pressure Control Equipment (Three String Design)

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
Int 1	13-5/8"	5M	Annular	X	50% of rated working pressure
			Blind Ram	X	5M
			Pipe Ram		
			Double Ram	X	
			Other*		
Production	13-5/8"	5M	Annular (5M)	X	50% of rated working pressure
			Blind Ram	X	5M
			Pipe Ram		
			Double Ram	X	
			Other*		
			Annular (5M)		
			Blind Ram		
			Pipe Ram		
			Double Ram		
			Other*		
N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.				
Y	A variance is requested to run a 5 M annular on a 10M system				

5. Mud Program (Three String Design)

Section	Type	Weight (ppg)
Surface	FW Gel	8.5-9
Intermediate	DBE / Cut Brine	10-10.5
Production	OBM	10-10.5

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing	
X	Will run GR/CNL from TD to surface (horizontal well - vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain.
	Coring? If yes, explain.

Additional logs planned	Interval
	Resistivity
	Density
X	CBL
X	Mud log
	PEX

7. Drilling Conditions

Condition	Specify what type and where?
BH pressure at deepest TVD	5974
Abnormal temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered measured values and formations will be provided to the BLM.

N	H2S is present
Y	H2S plan attached.

8. Other facets of operation

Is this a walking operation? Potentially

- 1 If operator elects, drilling rig will batch drill the surface holes and run/cement surface casing; walking the rig to next wells on the pad.
- 2 The drilling rig will then batch drill the intermediate sections and run/cement intermediate casing; the wellbore will be isolated with a blind flange and pressure gauge installed for monitoring the well before walking to the next well.
- 3 The drilling rig will then batch drill the production hole sections on the wells with OBM, run/cement production casing, and install TA caps or tubing heads for completions.

NOTE: During batch operations the drilling rig will be moved from well to well however, it will not be removed from the pad until all wells have production casing run/cemented.

Will be pre-setting casing? Potentially

- 1 Spudder rig will move in and batch drill surface hole.
 - a. Rig will utilize fresh water based mud to drill surface hole to TD. Solids control will be handled entirely on a closed loop basis.,
- 2 After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
- 3 The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
- 4 A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
- 5 Spudder rig operations is expected to take 4-5 days per well on a multi-well pa.
- 6 The NMOCD will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 7 Drilling operations will be performed with drilling rig. A that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The NMOCD will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.

Attachments

- Directional Plan
- Other, describe

Issued on: 16 Dec. 2020 by Logan Van Gorp



Connection Data Sheet

OD 8 5/8 in.	Weight (lb/ft) Nominal: 32.00 Plain End: 31.13	Wall Th. 0.352 in.	Grade P110EC	Alt. Drift: 7.875 in.	Connection VAM® SPRINT-FJ
------------------------	---	------------------------------	------------------------	---------------------------------	-------------------------------------

PIPE PROPERTIES		
Nominal OD	8.625	in.
Nominal ID	7.921	in.
Nominal Cross Section Area	9.149	sqin.
Grade Type	High Yield	
Min. Yield Strength	125	ksi
Max. Yield Strength	140	ksi
Min. Ultimate Tensile Strength	135	ksi


CONNECTION PROPERTIES		
Connection Type	Semi-Premium Integral Flush	
Connection OD (nom):	8.665	in.
Connection ID (nom):	7.954	in.
Make-Up Loss	2.614	in.
Critical Cross Section	6.038	sqin.
Tension Efficiency	65.0	% of pipe
Compression Efficiency	65.0	% of pipe
Internal Pressure Efficiency	80.0	% of pipe
External Pressure Efficiency	100	% of pipe

CONNECTION PERFORMANCES		
Tensile Yield Strength	744	klb
Compression Resistance	744	klb
Max. Internal Pressure	7,150	psi
Structural Collapse Resistance	4,000	psi
Max. Bending with Sealability	41	°/100ft
Max. Bending with Sealability	10	°/100ft

TORQUE VALUES		
Min. Make-up torque	15,000	ft.lb
Opt. Make-up torque	16,500	ft.lb
Max. Make-up torque	18,000	ft.lb
Max. Torque with Sealability (MTS)	TBD	ft.lb

* 87.5% RBW

VAM® SPRINT-FJ is a semi-premium flush connection designed for shale applications, where maximum clearance and high tension capacity are required for intermediate casing strings.

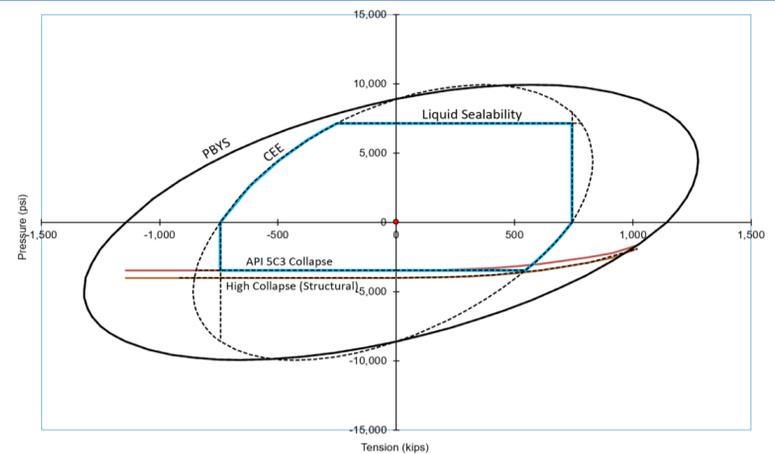

Do you need help on this product? - Remember no one knows VAM® like VAM®

<p>canada@vamfieldservice.com usa@vamfieldservice.com mexico@vamfieldservice.com brazil@vamfieldservice.com</p>	<p>uk@vamfieldservice.com dubai@vamfieldservice.com nigeria@vamfieldservice.com angola@vamfieldservice.com</p>	<p>china@vamfieldservice.com baku@vamfieldservice.com singapore@vamfieldservice.com australia@vamfieldservice.com</p>
---	--	---

Over 140 VAM® Specialists available worldwide 24/7 for Rig Site Assistance





U. S. Steel Tubular Products

10.750" 40.50lb/ft (0.350" Wall) H40

11/4/2021 10:14:32 AM

MECHANICAL PROPERTIES	Pipe	BTC	LTC	STC		--
Minimum Yield Strength	40,000	--	--	--	psi	--
Maximum Yield Strength	80,000	--	--	--	psi	--
Minimum Tensile Strength	60,000	--	--	--	psi	--
DIMENSIONS	Pipe	BTC	LTC	STC		--
Outside Diameter	10.750	0.000	0.000	11.750	in.	--
Wall Thickness	0.350	--	--	--	in.	--
Inside Diameter	10.050	--	--	10.050	in.	--
Standard Drift	9.894	9.894	9.894	9.894	in.	--
Alternate Drift	--	--	--	--	in.	--
Nominal Linear Weight, T&C	40.50	--	--	--	lb/ft	--
Plain End Weight	38.91	--	--	--	lb/ft	--
PERFORMANCE	Pipe	BTC	LTC	STC		--
Minimum Collapse Pressure	1,390	1,390	1,390	1,390	psi	--
Minimum Internal Yield Pressure	2,280	2,280	2,280	2,280	psi	--
Minimum Pipe Body Yield Strength	457	--	--	--	1,000 lbs	--
Joint Strength	--	--	--	314	1,000 lbs	--
Reference Length	--	--	--	5,164	ft	--
MAKE-UP DATA	Pipe	BTC	LTC	STC		--
Make-Up Loss	--	--	--	3.50	in.	--
Minimum Make-Up Torque	--	--	--	2,360	ft-lb	--
Maximum Make-Up Torque	--	--	--	3,930	ft-lb	--

UNCONTROLLED

Notes

Legal Notice

All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.

U. S. Steel Tubular Products
 460 Wildwood Forest Drive, Suite 300S
 Spring, Texas 77380

1-877-893-9461
 connections@uss.com
 www.usstubular.com

11-24-29-A Sundry ID 2791194 Mr Potato Head 11-14 Fed Com 835H

Mr Potato Head 11-14 Fed Com 825H

10 3/4		surface csg in a		14 3/4		inch hole.		Design Factors			Surface		Weight
Segment	#/ft	Grade		Coupling	Joint	Collapse	Burst	Length	B@s	a-B	a-C		
"A"	40.50			h 40	btc	28.21	7.43	400	13	0.68	14.04	16,200	
"B"					btc			0				0	
w/8.4#/g mud, 30min Sfc Csg Test psig: 1,421								Totals:	400			16,200	
Comparison of Proposed to Minimum Required Cement Volumes Tail Cmt does not circ to sfc.													
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE			Min Dist Hole-Cplg		
14 3/4	0.5563	176	253	223	14	9.00	3361	5M			2.00		
Burst Frac Gradient(s) for Segment(s) A, B = , b All > 0.70, OK.													

8 5/8		casing inside the		10 3/4		Design Factors			Int 1		Weight	
Segment	#/ft	Grade		Coupling	Joint	Collapse	Burst	Length	B@s	a-B		a-C
"A"	32.00			p 110	vam sprint fj	2.25	0.71	10,327	1	2.01	1.19	330,464
"B"								0				0
w/8.4#/g mud, 30min Sfc Csg Test psig: 499								Totals:	10,327			330,464
The cement volume(s) are intended to achieve a top of 0 ft from surface or a 400 overlap.												
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE			Min Dist Hole-Cplg	
9 7/8	0.1261	537	773	1310	-41	10.50	3561	5M			0.61	
D V Tool(s): 5663 sum of sx 947 ̅ CuFt 1716 ̅ %excess 31 t by stage % : 31 31 Class 'C' tail cmt yld > 1.35												

5 1/2		casing inside the		8 5/8		Design Factors			Prod 1		Weight	
Segment	#/ft	Grade		Coupling	Body	Collapse	Burst	Length	B@s	a-B		a-C
"A"	17.00			p 110	btc	2.93	1.25	21,300	2	2.99	2.10	362,100
"B"								0				0
w/8.4#/g mud, 30min Sfc Csg Test psig: 2,407								Totals:	21,300			362,100
The cement volume(s) are intended to achieve a top of 10127 ft from surface or a 200 overlap.												
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE			Min Dist Hole-Cplg	
7 7/8	0.1733	1556	2455	1937	27	10.50					0.91	
Class 'C' tail cmt yld > 1.35												

#N/A		5 1/2		Design Factors			<Choose Casing>		Weight			
Segment	#/ft	Grade		Coupling	#N/A	Collapse	Burst	Length		B@s	a-B	a-C
"A"				0.00				0				0
"B"				0.00				0				0
w/8.4#/g mud, 30min Sfc Csg Test psig:								Totals:	0			0
Cmt vol calc below includes this csg, TOC intended #N/A ft from surface or a #N/A overlap.												
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE			Min Dist Hole-Cplg	
0		#N/A	#N/A	0	#N/A							
#N/A Capitan Reef est top XXXX.												

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 346410

CONDITIONS

Operator: DEVON ENERGY PRODUCTION COMPANY, LP 333 West Sheridan Ave. Oklahoma City, OK 73102	OGRID: 6137
	Action Number: 346410
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	All original COA's still apply. Additionally, if cement is not circulated to surface during cementing operations, then a CBL is required.	6/10/2024