

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well ☐ gas well ☐ other ☐  
2. NAME OF OPERATOR  
Cotton Petroleum Corporation  
3. ADDRESS OF OPERATOR  
717 17th Street, Suite 2200, Denver, CO 80202  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 660' FSL & 660' FEL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:


TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

☐  
☐  
☐  
☐  
☐  
☒  
☐  
☐

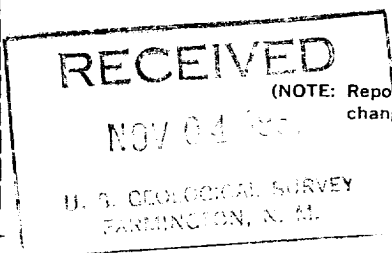

(NOTE: Report results of multiple completion or zone change on Form 9-330.)



17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

The Dakota D was abandoned after testing no hydrocarbon on 10-17-81, as follows: Four squeeze holes were shot at 7285', a wireline set cement retainer was set at 7185', then pumped 150 sacks Class B cement into perfs at 7285', 7390'-7400'. The well was cleaned out to a PBTD of 7281' on 10-20-81. Work received verbal approval from USGS on 10-16-81.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Raymond W. Vinyard TITLE Division Prod. Mgr DATE October 30, 1981.

(This space for Federal or State office use)  
RAYMOND W. VINYARD

APPROVED BY (Orig. Sgd.) RAYMOND W. VINYARD TITLE ACTING DISTRICT SUPERVISOR DATE NOV 06 1981  
CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

NMOCC