

Form 3160-3
(June 2015)

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

| | | |
|---|--|---|
| 1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER | | 5. Lease Serial No. NMNM29234 |
| 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other | | 6. If Indian, Allottee or Tribe Name |
| 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone | | 7. If Unit or CA Agreement, Name and No. NMNM139115A/WOLFCAMP FORMATIC |
| 2. Name of Operator CHEVRON USA INCORPORATED | | 8. Lease Name and Well No. SND JAVELINA UNIT 11 2 PAD 27 617H |
| 3a. Address P.O. BOX 1392, BAKERSFIELD, CA 93302 | | 9. API Well No. 30-015-55264 |
| 3b. Phone No. (include area code) (661) 633-4000 | | 10. Field and Pool, or Exploratory PURPLE SAGE/WOLFCAMP (GAS) |
| 4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NWNE / 370 FNL / 1627 FEL / LAT 32.223619 / LONG -103.745327 At proposed prod. zone LOT 2 / 25 FNL / 1430 FEL / LAT 32.2536 / LONG -103.74468 | | 11. Sec., T. R. M. or Blk. and Survey or Area SEC 14/T24S/R31E/NMP |
| 14. Distance in miles and direction from nearest town or post office* 33.6 miles | | 12. County or Parish EDDY |
| 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 370 feet | | 13. State NM |
| 16. No of acres in lease | | 17. Spacing Unit dedicated to this well 639.94 |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 250 feet | | 20. BLM/BIA Bond No. in file FED: ES0022 |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3555 feet | | 22. Approximate date work will start* 07/15/2025 |
| | | 23. Estimated duration 130 days |
| 24. Attachments | | |

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

| | | |
|--|--|--------------------|
| 25. Signature (Electronic Submission) | Name (Printed/Typed) CINDY HERRERA-MURILLO / Ph: (432) 687-7866 | Date 10/18/2022 |
| Title Permitting Specialist | | |
| Approved by (Signature) (Electronic Submission) | Name (Printed/Typed) CODY LAYTON / Ph: (575) 234-5959 | Date 06/18/2024 |
| Title Assistant Field Manager Lands & Minerals Carlsbad Field Office | | |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



(Continued on page 2)

*(Instructions on page 2)

VI. Separation Equipment:

Separation equipment installed at each Chevron facility is designed for maximum anticipated throughput and pressure to minimize waste. Separation equipment is designed and built according to ASME Sec VIII Div I to ensure gas is separated from liquid streams according to projected production.

VII./VIII. Operational & Best Management Practices:

1. General Requirements for Venting and Flaring of Natural Gas:

- In all circumstances, Chevron will flare rather than vent unless flaring is technically infeasible and venting of natural gas will avoid a risk of an immediate and substantial adverse impact on safety, public health, or the environment.
- Chevron installs and operates vapor recovery units (VRUs) in new facilities to minimize venting and flaring. If a VRU experiences operating issues, it is quickly assessed so that action can be taken to return the VRU to operation or, if necessary, facilities are shut-in to reduce the venting or flaring of natural gas.

2. During Drilling Operations:

- Flare stacks will be located a minimum of 110 feet from the nearest surface hole location.
- If an emergency or malfunction occurs, gas will be flared or vented to avoid a risk of an immediate and substantial adverse impact on public health, safety or the environment and be properly reported to the NMOCD pursuant to 19.15.27.8.G.
- Natural gas is captured or combusted if technically feasible using best industry practices and control technologies, such as the use of separators (e.g., Sand Commanders) during normal drilling and completions operations.

3. During Completions:

- Chevron typically does not complete traditional flowback, instead Chevron will flow produced oil, water, and gas to a centralized tank battery and continuously recover salable quality gas. If Chevron completes traditional flowback, Chevron conducts reduced emission completions as required by 40 CFR 60.5375a by routing gas to a gas flow line as soon as practicable once there is enough gas to operate a separator. Venting does not occur once there is enough gas to operate a separator
- Normally, during completions a flare is not on-site. A Snubbing Unit will have a flare on-site, and the flare volume will be estimated.
- If natural gas does not meet pipeline quality specification, the gas is sampled twice per week until the gas meets the specifications.

4. During Production:

- An audio, visual and olfactory (AVO) inspection will be performed daily (at minimum) for active wells and facilities to confirm that all production equipment is operating properly and there are no leaks or releases except as allowed in Subsection D of 19.15.27.8 NMAC. Inactive, temporarily abandoned, or shut-in wells and facilities will be inspected weekly. Inspection records will be kept for a minimum of five years and will be available upon request by the division.
- Monitor manual liquid unloading for wells on-site, takes all reasonable actions to achieve a stabilized rate and pressure at the earliest practical time and takes reasonable actions to minimize venting to the maximum extent practicable.
- In all circumstances, Chevron will flare rather than vent unless flaring is technically infeasible and venting of natural gas will avoid a risk of an immediate and substantial adverse impact on safety, public health, or the environment.
- Chevron's design for new facilities utilizes air-activated pneumatic controllers and pumps.
- If natural gas does not meet pipeline quality specification, the gas is sampled twice per week until the gas meets the specifications.
- Chevron does not produce oil or gas until all flowlines, tank batteries, and oil/gas takeaway are installed, tested, and determined operational.

5. Performance Standards

- Equipment installed at each facility is designed for maximum anticipated throughput and pressure to minimize waste. Tank pressure relief systems utilize a soft seated or metal seated PSVs, as appropriate, which are both designed to not leak.
- Flare stack has been designed for proper size and combustion efficiency. New flares will have a continuous pilot and will be located at least 100 feet from the well and storage tanks and will be securely anchored.
- New tanks will be equipped with an automatic gauging system.
- An audio, visual and olfactory (AVO) inspection will be performed daily (at minimum) for active wells and facilities to confirm that all production equipment is operating properly and there are no leaks or releases except as allowed in Subsection D of 19.15.27.8 NMAC. Inactive, temporarily abandoned, or shut-in wells and facilities will be inspected weekly. Inspection records will be kept for a minimum of five years and will be available upon request by the division.

6. Measurement or Estimation of Vented and Flared Natural Gas

- Chevron estimates or measures the volume of natural gas that is vented, flared, or beneficially used during drilling, operations, regardless of the reason or authorization for such venting or flaring.
- Where technically practicable, Chevron will install meters on flares installed after May 25, 2021. Meters will conform to industry standards. Bypassing the meter will only occur for inspecting and servicing of the meter.

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator: Chevron USA Inc **OGRID:** 4323 **Date:** 10 / 18 / 2022

II. Type: Original Amendment due to 19.15.27.9.D(6)(a) NMAC 19.15.27.9.D(6)(b) NMAC Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name | API | ULSTR | Footages | Anticipated Oil BBL/D | Anticipated Gas MCF/D | Anticipated Produced Water BBL/D |
|---|---------|------------------|------------------------|-----------------------|-----------------------|----------------------------------|
| SND JAVELINA UNIT 11 2 PAD 27 # 511H | Pending | UL:B-14-24S-31E | 370' FNL, 1587' FEL | 1975 BBL/D | 5180 MCF/D | 4150 BBL/D |
| SND JAVELINA UNIT 11 2 PAD 27 #512H | Pending | UL: B-14-24S-31E | 370' FNL, 1567' FEL | 1975 BBL/D | 5180 MCF/D | 4150 BBL/D |
| SND JAVELINA UNIT 11 2 PAD 27 #616H | Pending | UL:B-14-24S-31E | 370' FNL 1647' FEL | 1975 BBL/D | 5180 MCF/D | 4150 BBL/D |
| SND JAVELINA UNIT 11 2 PAD 27 #617H | Pending | UL:B-14-24S-31E | 370' FSL, 1627' FWL | 1975 BBL/D | 5180 MCF/D | 4150 BBL/D |
| SND JAVELINA UNIT 11 2 PAD 27 #618H | Pending | UL:B-14-24S-31E | 370' FNL, 1607' FWL | 1975 BBL/D | 5180 MCF/D | 4150 BBL/D |

IV. Central Delivery Point Name: SAT 14 [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name | API | Spud Date | TD Reached Date | Completion Commencement Date | Initial Flow Back Date | First Production Date |
|--|---------|------------------|-----------------|------------------------------|------------------------|-----------------------|
| SND JAVELINA UNIT 11 2 PAD 27 #511H | Pending | <u>6/10/2025</u> | <u>N/A</u> | <u>N/A</u> | <u>N/A</u> | <u>N/A</u> |
| SND JAVELINA UNIT 11 2 PAD 27 #512H | Pending | <u>6/28/2025</u> | <u>N/A</u> | <u>N/A</u> | <u>N/A</u> | <u>N/A</u> |
| SND JAVELINA UNIT 11 2 PAD 27 #616H | Pending | <u>7/16/2025</u> | <u>N/A</u> | <u>N/A</u> | <u>N/A</u> | <u>N/A</u> |
| SND JAVELINA UNIT 11 2 PAD 27 #617H | Pending | <u>8/3/2025</u> | <u>N/A</u> | <u>N/A</u> | <u>N/A</u> | <u>N/A</u> |
| SND JAVELINA UNIT 11 2 PAD 27 #618H | Pending | <u>8/21/2025</u> | <u>N/A</u> | <u>N/A</u> | <u>N/A</u> | <u>N/A</u> |

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: Attach a complete description of Operator’s best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

| Well | API | Anticipated Average Natural Gas Rate MCF/D | Anticipated Volume of Natural Gas for the First Year MCF |
|------|-----|--|--|
| | | | |
| | | | |

X. Natural Gas Gathering System (NGGS):

| Operator | System | ULSTR of Tie-in | Anticipated Gathering Start Date | Available Maximum Daily Capacity of System Segment Tie-in |
|----------|--------|-----------------|----------------------------------|---|
| | | | | |
| | | | | |

XI. Map. Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system will will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator does does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

Attach Operator’s plan to manage production in response to the increased line pressure.

XIV. Confidentiality: Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

| | |
|-----------------|---------------------------------------|
| Signature: | <i>Cindy Herrera-Murillo</i> |
| Printed Name: | Cindy Herrera-Murillo |
| Title: | Sr HSE Regulatory affairs Coordinator |
| E-mail Address: | eeof@chevron.com |
| Date: | 10/18/2022 |
| Phone: | 575-263-0431 |

OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)

| |
|-------------------------|
| Approved By: |
| Title: |
| Approval Date: |
| Conditions of Approval: |

Operator Name: CHEVRON USA INCORPORATED**Well Name:** SND JAVELINA UNIT 11 2 PAD 27**Well Number:** 617H**Pressure Rating (PSI):** 5M**Rating Depth:** 11859

Equipment: "Chevron respectfully request to vary from the Onshore Order 2 where it states: (A full BOP Test) shall be performed: when initially installed and whenever any seal subject to test pressure is broken. We propose to break test if able to finish the next hole section within 21 days of the previous full BOP test. No BOP components nor any break will ever surpass 21 days between testing. A break test will consist of a 250 psi low / 5,000 psi high for 10 min each test against the connection that was broken when skidding the rig. Upon the first nipple up of the pad a full BOP test will be performed. A full BOP test will be completed prior to drilling the production lateral sections unless the BOP connection was not broken prior to drilling that hole section (example: drilling straight from production into production liner hole section). A break test will only be performed on operations where BLM documentation states a 5M or less BOP can be utilized.

Requesting Variance? YES

Variance request: Chevron requests a variance to use a FMC Technologies UH-S Multibowl wellhead, which will be run through the rig floor on surface casing. BOPE will be nipped up and tested after cementing surface casing. Subsequent tests will be performed as needed, not to exceed 30 days. The field report from FMC Technologies and BOP test information will be provided in a subsequent report at the end of the well. Please see the attached wellhead schematic. An installation manual has been placed on file with the BLM office and remains unchanged from previous submittal. All tests performed by third party. A variance to use a CoFlex hose with a metal protective covering that will be utilized between the BOP and Choke manifold. Please refer to the attached testing and specification documents. - A variance from the Onshore Order 2 where it states: "(A full BOP Test) shall be performed: when initially installed and whenever any seal subject to test pressure is broken." We propose to break test if able to finish the next hole section within 21 days of the previous full BOP test. No BOP components nor any break will ever surpass 21 days between testing. A break test will consist of a 250 psi low / 5,000 psi high for 10 min each test against the connection that was broken when skidding the rig. Upon the first nipple up of the pad a full BOP test will be performed. A break test will NOT be performed on our last production section. A break test will only be performed on operations where BLM documentation states a 5M or less BOP can be utilized. We will test seals that have been broken individually between full BOP tests. Time between tests for a single test or full test will not exceed 21 days.

Testing Procedure: The stack will be tested as specified in the attached testing requirements. Batch drilling of the surface, production, and production liner will take place. A full BOP test will be performed per hole section, unless approval from BLM is received otherwise (see variance request). Flex choke hose will be used for all wells on the pad (see attached specs and variance). BOP test pressures and other documented tests may be recorded and documented via utilization of the IPT 'Suretec' Digital BOP Test Method in lieu of the standard test chart. In the event the IPT system is unavailable, the standard test chart will be used.

Choke Diagram Attachment:

BLM_Choke_Hose_Test_Specs_and_Pressure_Test_Continental_20221011142329.pdf

BLM_5M_Choke_Manifold_Diagram_20221011142405.pdf

Choke_Flex_Hose_2_20200326061721.pdf

BOP Diagram Attachment:

Sundry_Break_Testing_and_WOC_500_psi_SND_P27c_20221011142312.pdf

BLM_5M_Annular_10M_Stack_BOP_Choke_Schematic_20200326062158.pdf

Operator Name: CHEVRON USA INCORPORATED

Well Name: SND JAVELINA UNIT 11 2 PAD 27

Well Number: 617H

Section 3 - Casing

| Casing ID | String Type | Hole Size | Csg Size | Condition | Standard | Tapered String | Top Set MD | Bottom Set MD | Top Set TVD | Bottom Set TVD | Top Set MSL | Bottom Set MSL | Calculated casing length MD | Grade | Weight | Joint Type | Collapse SF | Burst SF | Joint SF Type | Joint SF | Body SF Type | Body SF |
|-----------|--------------|-----------|----------|-----------|----------|----------------|------------|---------------|-------------|----------------|-------------|----------------|-----------------------------|-------|--------|----------------|-------------|----------|---------------|----------|--------------|---------|
| 1 | SURFACE | 16 | 13.375 | NEW | API | N | 0 | 988 | 0 | 988 | 3555 | 2567 | 988 | J-55 | 54.5 | OTHER - BTC | 3.75 | 2.03 | BUOY | 15.85 | BUOY | 15.85 |
| 2 | INTERMEDIATE | 12.25 | 9.625 | NEW | API | N | 0 | 4517 | 0 | 4477 | 3554 | -922 | 4517 | L-80 | 40 | OTHER - BTC | 2.3 | 2.05 | BUOY | 5.11 | DRY | 5.11 |
| 3 | PRODUCTION | 8.75 | 7.0 | NEW | API | N | 0 | 11295 | 0 | 11284 | 3554 | -7729 | 11295 | P-110 | 29 | OTHER - TN-110 | 2.45 | 2.38 | BUOY | 2.84 | BUOY | 2.84 |
| 4 | PRODUCTION | 6.125 | 5.0 | NEW | API | Y | 10995 | 11745 | 10745 | 11684 | -7190 | -8129 | 750 | P-110 | 18 | OTHER - W513 | 1.55 | 2.23 | BUOY | 1.75 | BUOY | 1.75 |
| 5 | PRODUCTION | 6.125 | 4.5 | NEW | API | N | 11745 | 22405 | 11684 | 11857 | -8129 | -8302 | 10660 | P-110 | 11.6 | OTHER - W521 | 1.55 | 2.23 | BUOY | 1.75 | BUOY | 1.75 |

Casing Attachments

Casing ID: 1 **String** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

13.375_54.5ppf_J55_BTC_20200326073511.pdf

Operator Name: CHEVRON USA INCORPORATED

Well Name: SND JAVELINA UNIT 11 2 PAD 27

Well Number: 617H

Casing Attachments

Casing ID: 2 **String** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

9.625_40.0lb_L80IC_BTC_20200326074307.pdf

Casing ID: 3 **String** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

7_29ppf_P110_TSH_Blue_20210817095842.pdf

Casing ID: 4 **String** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

5_18ppf_P110_Flush_W513_20221011142815.pdf

Casing Design Assumptions and Worksheet(s):

5_18ppf_P110_Flush_W513_20221011142858.pdf

Operator Name: CHEVRON USA INCORPORATED

Well Name: SND JAVELINA UNIT 11 2 PAD 27

Well Number: 617H

Casing Attachments

Casing ID: 5 **String** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

4.5_11.6ppf_P110IC_W521_20221011143009.pdf

Section 4 - Cement

| String Type | Lead/Tail | Stage Tool Depth | Top MD | Bottom MD | Quantity(sx) | Yield | Density | Cu Ft | Excess% | Cement type | Additives |
|-------------|-----------|------------------|--------|-----------|--------------|-------|---------|-------|---------|-------------|---|
| SURFACE | Lead | | 0 | 988 | 645 | 1.33 | 14.8 | 858 | 25 | Class C | Extender, Antifoam, Retarder, Viscosifier |

| | | | | | | | | | | | |
|--------------|------|--|-----------|-----------|------|------|------|------|----|---------|---|
| INTERMEDIATE | Lead | | 0 | 3517 | 553 | 2.49 | 11.9 | 1377 | 25 | Class C | Extender, Antifoam, Retarder, Viscosifier |
| INTERMEDIATE | Tail | | 3517 | 4517 | 323 | 1.33 | 14.8 | 429 | 25 | Class C | Extender, Antifoam, Retarder, Viscosifier |
| PRODUCTION | Lead | | 0 | 1029 5 | 724 | 2.49 | 11.9 | 1802 | 25 | Class C | Extender, Antifoam, Retarder, Viscosifier |
| PRODUCTION | Tail | | 1029 5 | 1129 5 | 141 | 1.33 | 14.8 | 188 | 25 | Class C | Extender, Antifoam, Retarder, Viscosifier |
| PRODUCTION | Lead | | 1099 5 | 2240 5 | 1010 | 1.33 | 14.8 | 1343 | 25 | Class H | Extender, Antifoam, Retarder, Viscosifier |

Operator Name: CHEVRON USA INCORPORATED

Well Name: SND JAVELINA UNIT 11 2 PAD 27

Well Number: 617H

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: A closed system will be used consisting of above ground steel tanks. All wastes accumulated during drilling operations will be contained in a portable trash cage and removed from location and deposited in an approved sanitary landfill. Sanitary wastes will be contained in a chemical porta-toilet and then hauled to an approved sanitary landfill. All fluids and cuttings will be disposed of in accordance with New Mexico Oil Conservation Division rules and regulations. And transporting of E&P waste will follow EPA regulations and accompanying manifests.

Describe the mud monitoring system utilized: A mud test shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH. Visual mud monitoring equipment shall be in place to detect volume changes indicating loss or gain of circulating fluid volume. When abnormal pressures are anticipated -- a pit volume totalizer (PVT), stroke counter, and flow sensor will be used to detect volume changes indicating loss or gain of circulating fluid volume.

Circulating Medium Table

| Top Depth | Bottom Depth | Mud Type | Min Weight (lbs/gal) | Max Weight (lbs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | PH | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics |
|-----------|--------------|--------------------|----------------------|----------------------|---------------------|-----------------------------|----|----------------|----------------|-----------------|---|
| 1129 5 | 2240 5 | OIL-BASED MUD | 10 | 12 | | | | | | | -Due to wellbore instability in the lateral, may exceed the MW weight window needed to maintain overburden stresses |
| 0 | 988 | SPUD MUD | 8.3 | 8.9 | | | | | | | |
| 988 | 4517 | SALT SATURATED | 8.9 | 10 | | | | | | | Viscosity: 26-36 Filtrate: 15-25 -Saturated brine would be used through salt sections. |
| 4517 | 1129 5 | WATER-BASED MUD | 8.7 | 9 | | | | | | | |

Operator Name: CHEVRON USA INCORPORATED

Well Name: SND JAVELINA UNIT 11 2 PAD 27

Well Number: 617H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

6. TESTING, LOGGING, AND CORING

- a. Production tests are not planned.
- b. Logs run include: Gamma Ray Log, Directional Survey
- c. Coring Operations are not planned.

List of open and cased hole logs run in the well:

GAMMA RAY LOG,ELECTRIC LOG,

Coring operation description for the well:

Conventional whole core samples are not planned. A directional survey will be run.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 7400

Anticipated Surface Pressure: 4791

Anticipated Bottom Hole Temperature(F): 165

Anticipated abnormal pressures, temperatures, or potential geologic hazards? YES

Describe:

Pressure ramp begins in the bottom of the thirdbone spring. PP increases to approximately 12.0 ppg once into the wolfcamp.

Contingency Plans geohazards description:

- "- Casing design accounts for pressure ramp.
- Mud weighting agents available on location to increase drilling fluid density.
- BOP, choke, and well control drills.
- BOP functioned and pressure tested"

Contingency Plans geohazards

Hydrogen Sulfide drilling operations plan required? NO

Hydrogen sulfide drilling operations

Operator Name: CHEVRON USA INCORPORATED

Well Name: SND JAVELINA UNIT 11 2 PAD 27

Well Number: 617H

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

DefPlan100ft_SNDJavelinaUnit112Pad27No.617H_R0_20221017150021.pdf

9point_SND_Javelina_Pad_27_617H_20221017150035.pdf

Gas_Management_Plan___SND_PAD_27C_20221018105131.pdf

Operational_Best_Management_Practices_Pad_27_20221018105150.pdf

Other proposed operations facets description:

Chevron is also requesting to use the spudder rig to spud the well and set surface casing. The drilling rig will move in less than 90 days to continue drilling operations.

Chevron is also requesting a variance from the Onshore Order 2 to preform a break test on the BOP when able to finish the next hole section within 21 days of the previous full BOP test. Upon the first nipple up of the pas a full BOP test will be preformed. A break test will not be preformed on our last production hole section. A break test will only be preformed on operation where BLM documentation states a 5M or less Bop can be utilized. Summary with details attached below.

Other proposed operations facets attachment:

5_well_rig_layout_patterson2_20221012073621.pdf

Chevron_Standard_H2S_Contingency_Plan_2022_20221012073638.pdf

Other Variance attachment:



SND Javelina Unit 11 2 Pad 27 No. 617H R0 mdv 09Jun22 Proposal Geodetic Report (Def Plan)

Report Date: June 13, 2022 - 01:57 PM
Client: Chevron
Field: NM, Eddy County (NAD 27 EZ)
Structure / Slot: Chevron SND P27C / 617H
Well: SND Javelina Unit 11 2 Pad 27 No. 617H
Borehole: SND Javelina Unit 11 2 Pad 27 No. 617H
UWI / API#: Unknown / Unknown
Survey Name: SND Javelina Unit 11 2 Pad 27 No. 617H R0 mdv 09Jun22
Survey Date: June 13, 2022
Tort / AHD / DDI / ERD Ratio: 109.053° / 11024.889 ft / 6.355 / 0.927
Coordinate Reference System: NAD27 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 13' 24.58317", W 103° 44' 41.43926"
Location Grid N/E Y/X: N 445525.000 ftUS, E 681986.000 ftUS
CRS Grid Convergence Angle: 0.3138°
Grid Scale Factor: 0.99994702
Version / Patch: 2.10.829.1

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 359.710° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB = 28ft
TVD Reference Elevation: 3583.000 ft above MSL
Seabed / Ground Elevation: 3555.000 ft above MSL
Magnetic Declination: 6.441°
Total Gravity Field Strength: 998.4300mgn (9.80665 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 47599.700 nT
Magnetic Dip Angle: 59.831°
Declination Date: June 13, 2022
Magnetic Declination Model: HDGM 2022
North Reference: Grid North
Grid Convergence Used: 0.3138°
Total Corr Mag North->Grid North: 6.1273°
Local Coord Referenced To: Well Head

| Comments | MD (ft) | Incl (°) | Azim Grid (°) | TVD (ft) | VSEC (ft) | NS (ft) | EW (ft) | DLS (°/100ft) | Northing (ftUS) | Easting (ftUS) | Latitude (N/S ° ' ") | Longitude (E/W ° ' ") |
|------------------------------|---------|----------|---------------|----------|-----------|---------|---------|---------------|-----------------|----------------|------------------------------|------------------------------|
| Surface | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | N/A | 445525.00 | 681986.00 | N 32 13 24.58 W 103 44 41.44 |
| | 100.00 | 0.00 | 15.00 | 100.00 | 0.00 | 0.00 | 0.00 | 0.00 | 445525.00 | 681986.00 | N 32 13 24.58 W 103 44 41.44 | |
| | 200.00 | 0.00 | 15.00 | 200.00 | 0.00 | 0.00 | 0.00 | 0.00 | 445525.00 | 681986.00 | N 32 13 24.58 W 103 44 41.44 | |
| | 300.00 | 0.00 | 15.00 | 300.00 | 0.00 | 0.00 | 0.00 | 0.00 | 445525.00 | 681986.00 | N 32 13 24.58 W 103 44 41.44 | |
| | 400.00 | 0.00 | 15.00 | 400.00 | 0.00 | 0.00 | 0.00 | 0.00 | 445525.00 | 681986.00 | N 32 13 24.58 W 103 44 41.44 | |
| | 500.00 | 0.00 | 15.00 | 500.00 | 0.00 | 0.00 | 0.00 | 0.00 | 445525.00 | 681986.00 | N 32 13 24.58 W 103 44 41.44 | |
| Build 1.5"/100ft | 600.00 | 0.00 | 15.00 | 600.00 | 0.00 | 0.00 | 0.00 | 0.00 | 445525.00 | 681986.00 | N 32 13 24.58 W 103 44 41.44 | |
| | 700.00 | 1.50 | 15.00 | 699.99 | 1.26 | 1.26 | 0.34 | 1.50 | 445526.26 | 681986.34 | N 32 13 24.60 W 103 44 41.44 | |
| Rustler (RSLR) | 764.05 | 2.46 | 15.00 | 764.00 | 3.40 | 3.40 | 0.91 | 1.50 | 445528.40 | 681986.91 | N 32 13 24.62 W 103 44 41.43 | |
| | 800.00 | 3.00 | 15.00 | 799.91 | 5.05 | 5.06 | 1.35 | 1.50 | 445530.06 | 681987.35 | N 32 13 24.63 W 103 44 41.42 | |
| | 900.00 | 4.50 | 15.00 | 899.69 | 11.36 | 11.37 | 3.05 | 1.50 | 445536.37 | 681989.05 | N 32 13 24.70 W 103 44 41.40 | |
| Rustler Los Medaños Member | 963.55 | 5.45 | 15.00 | 963.00 | 16.68 | 16.70 | 4.47 | 1.50 | 445541.70 | 681990.47 | N 32 13 24.75 W 103 44 41.39 | |
| Rustler Los Medaños M-1 unit | 989.68 | 5.85 | 15.00 | 989.00 | 19.16 | 19.18 | 5.14 | 1.50 | 445544.18 | 681991.14 | N 32 13 24.77 W 103 44 41.38 | |
| Turn 1.5"/100ft | 1000.00 | 6.00 | 15.00 | 999.27 | 20.18 | 20.21 | 5.42 | 1.50 | 445545.21 | 681991.42 | N 32 13 24.78 W 103 44 41.37 | |
| Saldo (SLDO) | 1053.01 | 5.72 | 22.28 | 1052.00 | 25.29 | 25.33 | 7.13 | 1.50 | 445550.33 | 681993.13 | N 32 13 24.83 W 103 44 41.35 | |
| | 1100.00 | 5.55 | 29.26 | 1098.77 | 29.43 | 29.48 | 9.13 | 1.50 | 445554.48 | 681995.13 | N 32 13 24.87 W 103 44 41.33 | |
| | 1200.00 | 5.48 | 44.91 | 1198.31 | 37.00 | 37.08 | 14.86 | 1.50 | 445562.07 | 682000.86 | N 32 13 24.95 W 103 44 41.26 | |
| | 1300.00 | 5.81 | 59.83 | 1297.83 | 42.89 | 43.00 | 22.61 | 1.50 | 445568.00 | 682008.61 | N 32 13 25.01 W 103 44 41.17 | |
| Hold | 1333.27 | 6.00 | 64.32 | 1330.93 | 44.47 | 44.60 | 25.64 | 1.50 | 445569.60 | 682011.63 | N 32 13 25.02 W 103 44 41.14 | |
| | 1400.00 | 6.00 | 64.32 | 1397.29 | 47.46 | 47.63 | 31.92 | 0.00 | 445572.62 | 682017.92 | N 32 13 25.05 W 103 44 41.06 | |
| | 1500.00 | 6.00 | 64.32 | 1496.74 | 51.95 | 52.16 | 41.34 | 0.00 | 445577.15 | 682027.34 | N 32 13 25.10 W 103 44 40.95 | |
| | 1600.00 | 6.00 | 64.32 | 1596.19 | 56.43 | 56.69 | 50.76 | 0.00 | 445581.68 | 682036.76 | N 32 13 25.14 W 103 44 40.84 | |
| | 1700.00 | 6.00 | 64.32 | 1695.64 | 60.91 | 61.22 | 60.18 | 0.00 | 445586.21 | 682046.18 | N 32 13 25.19 W 103 44 40.73 | |
| | 1800.00 | 6.00 | 64.32 | 1795.10 | 65.39 | 65.75 | 69.61 | 0.00 | 445590.74 | 682055.60 | N 32 13 25.23 W 103 44 40.62 | |
| | 1900.00 | 6.00 | 64.32 | 1894.55 | 69.88 | 70.28 | 79.03 | 0.00 | 445595.27 | 682065.02 | N 32 13 25.27 W 103 44 40.51 | |
| | 2000.00 | 6.00 | 64.32 | 1994.00 | 74.36 | 74.81 | 88.45 | 0.00 | 445599.81 | 682074.44 | N 32 13 25.32 W 103 44 40.40 | |
| | 2100.00 | 6.00 | 64.32 | 2093.45 | 78.84 | 79.34 | 97.87 | 0.00 | 445604.34 | 682083.86 | N 32 13 25.36 W 103 44 40.29 | |
| | 2200.00 | 6.00 | 64.32 | 2192.91 | 83.33 | 83.87 | 107.29 | 0.00 | 445608.87 | 682093.28 | N 32 13 25.41 W 103 44 40.19 | |
| | 2300.00 | 6.00 | 64.32 | 2292.36 | 87.81 | 88.40 | 116.71 | 0.00 | 445613.40 | 682102.70 | N 32 13 25.45 W 103 44 40.08 | |
| | 2400.00 | 6.00 | 64.32 | 2391.81 | 92.29 | 92.93 | 126.13 | 0.00 | 445617.93 | 682112.12 | N 32 13 25.50 W 103 44 39.97 | |
| | 2500.00 | 6.00 | 64.32 | 2491.26 | 96.78 | 97.46 | 135.55 | 0.00 | 445622.46 | 682121.54 | N 32 13 25.54 W 103 44 39.86 | |
| | 2600.00 | 6.00 | 64.32 | 2590.71 | 101.26 | 101.99 | 144.97 | 0.00 | 445626.99 | 682130.96 | N 32 13 25.58 W 103 44 39.75 | |
| | 2700.00 | 6.00 | 64.32 | 2690.17 | 105.74 | 106.52 | 154.39 | 0.00 | 445631.52 | 682140.38 | N 32 13 25.63 W 103 44 39.64 | |
| Drop .75"/100ft | 2740.50 | 6.00 | 64.32 | 2730.44 | 107.56 | 108.36 | 158.21 | 0.00 | 445633.35 | 682144.20 | N 32 13 25.65 W 103 44 39.59 | |
| | 2800.00 | 5.55 | 64.32 | 2789.64 | 110.13 | 110.95 | 163.61 | 0.75 | 445635.95 | 682149.60 | N 32 13 25.67 W 103 44 39.53 | |
| Castile (CSTL) | 2898.76 | 4.81 | 64.32 | 2888.00 | 113.95 | 114.82 | 171.65 | 0.75 | 445639.82 | 682157.64 | N 32 13 25.71 W 103 44 39.43 | |
| | 2900.00 | 4.80 | 64.32 | 2889.23 | 114.00 | 114.87 | 171.74 | 0.75 | 445639.86 | 682157.73 | N 32 13 25.71 W 103 44 39.43 | |
| | 3000.00 | 4.05 | 64.32 | 2988.93 | 117.31 | 118.21 | 178.70 | 0.75 | 445643.21 | 682164.69 | N 32 13 25.74 W 103 44 39.35 | |
| | 3100.00 | 3.30 | 64.32 | 3088.73 | 120.06 | 121.00 | 184.48 | 0.75 | 445646.99 | 682170.47 | N 32 13 25.77 W 103 44 39.28 | |
| | 3200.00 | 2.55 | 64.32 | 3188.59 | 122.25 | 123.21 | 189.09 | 0.75 | 445648.20 | 682175.08 | N 32 13 25.79 W 103 44 39.23 | |
| | 3300.00 | 1.80 | 64.32 | 3288.52 | 123.88 | 124.86 | 192.52 | 0.75 | 445649.85 | 682178.51 | N 32 13 25.81 W 103 44 39.19 | |
| | 3400.00 | 1.05 | 64.32 | 3388.49 | 124.95 | 125.94 | 194.76 | 0.75 | 445650.93 | 682180.75 | N 32 13 25.82 W 103 44 39.16 | |
| | 3500.00 | 0.30 | 64.32 | 3488.48 | 125.46 | 126.45 | 195.83 | 0.75 | 445651.45 | 682181.82 | N 32 13 25.82 W 103 44 39.15 | |
| Hold | 3540.57 | 0.00 | 64.32 | 3529.05 | 125.51 | 126.50 | 195.93 | 0.75 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 3600.00 | 0.00 | 64.32 | 3588.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 3700.00 | 0.00 | 64.32 | 3688.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 3800.00 | 0.00 | 64.32 | 3788.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 3900.00 | 0.00 | 64.32 | 3888.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 4000.00 | 0.00 | 64.32 | 3988.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 4100.00 | 0.00 | 64.32 | 4088.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 4200.00 | 0.00 | 64.32 | 4188.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 4300.00 | 0.00 | 64.32 | 4288.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 4400.00 | 0.00 | 64.32 | 4388.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 4500.00 | 0.00 | 64.32 | 4488.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| Lamar (LMAR) | 4509.52 | 0.00 | 64.32 | 4498.00 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| Bell Canyon (BEL) | 4554.52 | 0.00 | 64.32 | 4543.00 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 4600.00 | 0.00 | 64.32 | 4588.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 4700.00 | 0.00 | 64.32 | 4688.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 4800.00 | 0.00 | 64.32 | 4788.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 4900.00 | 0.00 | 64.32 | 4888.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 5000.00 | 0.00 | 64.32 | 4988.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 5100.00 | 0.00 | 64.32 | 5088.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 5200.00 | 0.00 | 64.32 | 5188.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 5300.00 | 0.00 | 64.32 | 5288.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 5400.00 | 0.00 | 64.32 | 5388.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| Cherry Canyon (CHR) | 5461.52 | 0.00 | 64.32 | 5450.00 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 5500.00 | 0.00 | 64.32 | 5488.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 5600.00 | 0.00 | 64.32 | 5588.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 5700.00 | 0.00 | 64.32 | 5688.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 5800.00 | 0.00 | 64.32 | 5788.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 5900.00 | 0.00 | 64.32 | 5888.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 6000.00 | 0.00 | 64.32 | 5988.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W 103 44 39.15 | |
| | 6100.00 | 0.00 | 64.32 | 6088.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49</ | | | |

| Comments | MD (ft) | Incl (°) | Azim Grid (°) | TVD (ft) | VSEC (ft) | NS (ft) | EW (ft) | DLS (°/100ft) | Northing (ftUS) | Easting (ftUS) | Latitude (N/S ° ° ' '') | Longitude (E/W ° ° ' '') |
|--------------------------------|----------|----------|---------------|----------|-----------|---------|---------|---------------|-----------------|----------------|-------------------------|--------------------------|
| | 7000.00 | 0.00 | 64.32 | 6988.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 7100.00 | 0.00 | 64.32 | 7088.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 7200.00 | 0.00 | 64.32 | 7188.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 7300.00 | 0.00 | 64.32 | 7288.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 7400.00 | 0.00 | 64.32 | 7388.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 7500.00 | 0.00 | 64.32 | 7488.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 7600.00 | 0.00 | 64.32 | 7588.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 7700.00 | 0.00 | 64.32 | 7688.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 7800.00 | 0.00 | 64.32 | 7788.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 7900.00 | 0.00 | 64.32 | 7888.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 8000.00 | 0.00 | 64.32 | 7988.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 8100.00 | 0.00 | 64.32 | 8088.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 8200.00 | 0.00 | 64.32 | 8188.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 8300.00 | 0.00 | 64.32 | 8288.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 8400.00 | 0.00 | 64.32 | 8388.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| Bone Spring (BSL) | 8405.52 | 0.00 | 64.32 | 8394.00 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| Upper Avalon (AVU) | 8466.52 | 0.00 | 64.32 | 8455.00 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 8500.00 | 0.00 | 64.32 | 8488.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 8600.00 | 0.00 | 64.32 | 8588.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 8700.00 | 0.00 | 64.32 | 8688.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 8800.00 | 0.00 | 64.32 | 8788.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 8900.00 | 0.00 | 64.32 | 8888.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| Lower Avalon (AVL) | 8962.52 | 0.00 | 64.32 | 8951.00 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 9000.00 | 0.00 | 64.32 | 8988.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 9100.00 | 0.00 | 64.32 | 9088.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 9200.00 | 0.00 | 64.32 | 9188.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 9300.00 | 0.00 | 64.32 | 9288.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 9400.00 | 0.00 | 64.32 | 9388.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| First Bone Spring Upper (FBU) | 9463.52 | 0.00 | 64.32 | 9452.00 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 9500.00 | 0.00 | 64.32 | 9488.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 9600.00 | 0.00 | 64.32 | 9588.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 9700.00 | 0.00 | 64.32 | 9688.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| First Bone Spring Lower (FBL) | 9741.52 | 0.00 | 64.32 | 9730.00 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 9800.00 | 0.00 | 64.32 | 9788.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 9900.00 | 0.00 | 64.32 | 9888.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 10000.00 | 0.00 | 64.32 | 9988.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| Second Bone Spring Upper (SBU) | 10080.52 | 0.00 | 64.32 | 10069.00 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 10100.00 | 0.00 | 64.32 | 10088.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 10200.00 | 0.00 | 64.32 | 10188.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 10300.00 | 0.00 | 64.32 | 10288.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 10400.00 | 0.00 | 64.32 | 10388.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 10500.00 | 0.00 | 64.32 | 10488.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| Second Bone Spring Lower (SBL) | 10598.52 | 0.00 | 64.32 | 10587.00 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 10600.00 | 0.00 | 64.32 | 10588.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 10700.00 | 0.00 | 64.32 | 10688.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 10800.00 | 0.00 | 64.32 | 10788.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 10900.00 | 0.00 | 64.32 | 10888.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 11000.00 | 0.00 | 64.32 | 10988.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 11100.00 | 0.00 | 64.32 | 11088.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 11200.00 | 0.00 | 64.32 | 11188.48 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| Build 10°/100ft | 11295.57 | 0.00 | 64.32 | 11284.05 | 125.51 | 126.50 | 195.93 | 0.00 | 445651.49 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| | 11300.00 | 0.44 | 359.71 | 11288.48 | 125.52 | 126.52 | 195.93 | 10.00 | 445651.51 | 682181.92 | N 32 13 25.82 W | 103 44 39.15 |
| Third Bone Spring (TBS) | 11314.52 | 1.90 | 359.71 | 11303.00 | 125.82 | 126.81 | 195.93 | 10.00 | 445651.81 | 682181.92 | N 32 13 25.83 W | 103 44 39.15 |
| | 11400.00 | 10.44 | 359.71 | 11387.90 | 135.00 | 135.99 | 195.88 | 10.00 | 445660.98 | 682181.87 | N 32 13 25.92 W | 103 44 39.15 |
| | 11500.00 | 20.44 | 359.71 | 11484.17 | 161.59 | 162.59 | 195.75 | 10.00 | 445687.58 | 682181.73 | N 32 13 26.18 W | 103 44 39.15 |
| | 11600.00 | 30.44 | 359.71 | 11574.36 | 204.50 | 205.49 | 195.53 | 10.00 | 445730.48 | 682181.52 | N 32 13 26.61 W | 103 44 39.15 |
| | 11700.00 | 40.44 | 359.71 | 11655.72 | 262.42 | 263.41 | 195.23 | 10.00 | 445788.39 | 682181.22 | N 32 13 27.18 W | 103 44 39.15 |
| | 11800.00 | 50.44 | 359.71 | 11725.80 | 333.58 | 334.57 | 194.87 | 10.00 | 445859.55 | 682180.86 | N 32 13 27.88 W | 103 44 39.15 |
| Wolfcamp A (WCA) | 11875.67 | 58.01 | 359.71 | 11770.00 | 394.93 | 395.92 | 194.55 | 10.00 | 445920.90 | 682180.54 | N 32 13 28.49 W | 103 44 39.15 |
| | 11900.00 | 60.44 | 359.71 | 11782.45 | 415.83 | 416.82 | 194.45 | 10.00 | 445941.80 | 682180.44 | N 32 13 28.70 W | 103 44 39.15 |
| | 12000.00 | 70.44 | 359.71 | 11823.95 | 506.67 | 507.66 | 193.98 | 10.00 | 446032.63 | 682179.97 | N 32 13 29.60 W | 103 44 39.15 |
| | 12100.00 | 80.44 | 359.71 | 11849.06 | 603.34 | 604.33 | 193.49 | 10.00 | 446129.29 | 682179.48 | N 32 13 30.55 W | 103 44 39.15 |
| Landing Point | 12198.13 | 90.26 | 359.71 | 11857.00 | 701.03 | 702.02 | 192.99 | 10.00 | 446226.98 | 682178.98 | N 32 13 31.52 W | 103 44 39.15 |
| FTP Cross | 12198.32 | 90.26 | 359.71 | 11857.00 | 701.21 | 702.20 | 192.99 | 0.00 | 446227.16 | 682178.98 | N 32 13 31.52 W | 103 44 39.15 |
| | 12200.00 | 90.26 | 359.71 | 11856.99 | 702.90 | 703.88 | 192.98 | 0.00 | 446228.84 | 682178.97 | N 32 13 31.54 W | 103 44 39.15 |
| | 12300.00 | 90.26 | 359.71 | 11856.55 | 803.90 | 803.88 | 192.47 | 0.00 | 446328.84 | 682178.46 | N 32 13 32.53 W | 103 44 39.15 |
| | 12400.00 | 90.26 | 359.71 | 11856.10 | 902.89 | 903.88 | 191.96 | 0.00 | 446428.83 | 682177.95 | N 32 13 33.52 W | 103 44 39.15 |
| | 12500.00 | 90.26 | 359.71 | 11855.65 | 1002.89 | 1003.88 | 191.45 | 0.00 | 446528.82 | 682177.44 | N 32 13 34.51 W | 103 44 39.15 |
| | 12600.00 | 90.26 | 359.71 | 11855.20 | 1102.89 | 1103.87 | 190.94 | 0.00 | 446628.81 | 682176.93 | N 32 13 35.50 W | 103 44 39.15 |
| | 12700.00 | 90.26 | 359.71 | 11854.75 | 1202.89 | 1203.87 | 190.43 | 0.00 | 446728.80 | 682176.42 | N 32 13 36.49 W | 103 44 39.15 |
| | 12800.00 | 90.26 | 359.71 | 11854.31 | 1302.89 | 1303.87 | 189.92 | 0.00 | 446828.80 | 682175.91 | N 32 13 37.48 W | 103 44 39.15 |
| | 12900.00 | 90.26 | 359.71 | 11853.86 | 1402.89 | 1403.87 | 189.41 | 0.00 | 446928.79 | 682175.40 | N 32 13 38.46 W | 103 44 39.15 |
| | 13000.00 | 90.26 | 359.71 | 11853.41 | 1502.89 | 1503.86 | 188.90 | 0.00 | 447028.78 | 682174.89 | N 32 13 39.45 W | 103 44 39.15 |
| | 13100.00 | 90.26 | 359.71 | 11852.96 | 1602.89 | 1603.86 | 188.39 | 0.00 | 447128.77 | 682174.38 | N 32 13 40.44 W | 103 44 39.15 |
| | 13200.00 | 90.26 | 359.71 | 11852.51 | 1702.89 | 1703.86 | 187.88 | 0.00 | 447228.77 | 682173.87 | N 32 13 41.43 W | 103 44 39.15 |
| | 13300.00 | 90.26 | 359.71 | 11852.07 | 1802.89 | 1803.86 | 187 | | | | | |

| Comments | MD (ft) | Incl (°) | Azim Grid (°) | TVD (ft) | VSEC (ft) | NS (ft) | EW (ft) | DLS (°/100ft) | Northing (ftUS) | Easting (ftUS) | Latitude (N/S ° ° °) | Longitude (E/W ° ° °) |
|--|----------|----------|---------------|----------|-----------|----------|---------|---------------|-----------------|----------------|----------------------|-----------------------|
| | 16500.00 | 89.45 | 359.71 | 11876.21 | 5002.75 | 5003.68 | 171.27 | 0.00 | 450528.41 | 682157.26 | N 32 14 14.09 | W 103 44 39.13 |
| | 16600.00 | 89.45 | 359.71 | 11877.17 | 5102.75 | 5103.68 | 170.77 | 0.00 | 450628.40 | 682156.76 | N 32 14 15.08 | W 103 44 39.13 |
| | 16700.00 | 89.45 | 359.71 | 11878.14 | 5202.74 | 5203.67 | 170.27 | 0.00 | 450728.39 | 682156.26 | N 32 14 16.07 | W 103 44 39.13 |
| | 16800.00 | 89.45 | 359.71 | 11879.11 | 5302.74 | 5303.67 | 169.77 | 0.00 | 450828.38 | 682155.76 | N 32 14 17.06 | W 103 44 39.12 |
| | 16900.00 | 89.45 | 359.71 | 11880.08 | 5402.74 | 5403.66 | 169.27 | 0.00 | 450928.36 | 682155.26 | N 32 14 18.04 | W 103 44 39.12 |
| | 17000.00 | 89.45 | 359.71 | 11881.04 | 5502.73 | 5503.66 | 168.76 | 0.00 | 451028.35 | 682154.76 | N 32 14 19.03 | W 103 44 39.12 |
| | 17100.00 | 89.45 | 359.71 | 11882.01 | 5602.73 | 5603.65 | 168.26 | 0.00 | 451128.34 | 682154.25 | N 32 14 20.02 | W 103 44 39.12 |
| | 17150.66 | 89.45 | 359.71 | 11882.50 | 5653.39 | 5654.31 | 168.01 | 0.00 | 451179.00 | 682154.00 | N 32 14 20.53 | W 103 44 39.12 |
| MP Hold | 17151.03 | 89.45 | 359.71 | 11882.50 | 5653.39 | 5654.31 | 168.01 | 2.00 | 451179.36 | 682154.00 | N 32 14 20.53 | W 103 44 39.12 |
| | 17200.00 | 89.45 | 359.71 | 11882.97 | 5702.72 | 5703.64 | 167.76 | 0.00 | 451228.33 | 682153.75 | N 32 14 21.01 | W 103 44 39.12 |
| | 17300.00 | 89.45 | 359.71 | 11883.94 | 5802.72 | 5803.64 | 167.24 | 0.00 | 451328.32 | 682153.23 | N 32 14 22.00 | W 103 44 39.12 |
| | 17400.00 | 89.45 | 359.71 | 11884.90 | 5902.71 | 5903.63 | 166.73 | 0.00 | 451428.31 | 682152.72 | N 32 14 22.99 | W 103 44 39.12 |
| | 17500.00 | 89.45 | 359.71 | 11885.86 | 6002.71 | 6003.63 | 166.22 | 0.00 | 451528.30 | 682152.21 | N 32 14 23.98 | W 103 44 39.12 |
| | 17600.00 | 89.45 | 359.71 | 11886.82 | 6102.70 | 6103.62 | 165.71 | 0.00 | 451628.28 | 682151.70 | N 32 14 24.97 | W 103 44 39.12 |
| | 17700.00 | 89.45 | 359.71 | 11887.78 | 6202.70 | 6203.61 | 165.19 | 0.00 | 451728.27 | 682151.18 | N 32 14 25.96 | W 103 44 39.12 |
| | 17800.00 | 89.45 | 359.71 | 11888.74 | 6302.69 | 6303.61 | 164.68 | 0.00 | 451828.26 | 682150.67 | N 32 14 26.95 | W 103 44 39.12 |
| | 17900.00 | 89.45 | 359.71 | 11889.70 | 6402.69 | 6403.60 | 164.17 | 0.00 | 451928.25 | 682150.16 | N 32 14 27.94 | W 103 44 39.12 |
| IFP2, Build 2"/100ft Hold | 17930.75 | 89.45 | 359.71 | 11890.00 | 6433.44 | 6434.35 | 164.01 | 0.00 | 451959.00 | 682150.00 | N 32 14 28.24 | W 103 44 39.12 |
| | 17979.69 | 90.43 | 359.71 | 11890.05 | 6482.38 | 6483.29 | 163.76 | 2.00 | 452007.94 | 682149.75 | N 32 14 28.07 | W 103 44 39.12 |
| | 18000.00 | 90.43 | 359.71 | 11889.90 | 6502.69 | 6503.60 | 163.65 | 0.00 | 452028.24 | 682149.63 | N 32 14 28.93 | W 103 44 39.12 |
| | 18100.00 | 90.43 | 359.71 | 11889.15 | 6602.68 | 6603.59 | 163.14 | 0.00 | 452128.23 | 682149.13 | N 32 14 29.92 | W 103 44 39.12 |
| | 18200.00 | 90.43 | 359.71 | 11888.41 | 6702.68 | 6703.59 | 162.63 | 0.00 | 452228.22 | 682148.62 | N 32 14 30.91 | W 103 44 39.12 |
| | 18300.00 | 90.43 | 359.71 | 11887.66 | 6802.68 | 6803.59 | 162.11 | 0.00 | 452328.21 | 682148.10 | N 32 14 31.90 | W 103 44 39.12 |
| | 18400.00 | 90.43 | 359.71 | 11886.91 | 6902.68 | 6903.58 | 161.60 | 0.00 | 452428.20 | 682147.59 | N 32 14 32.89 | W 103 44 39.12 |
| | 18500.00 | 90.43 | 359.71 | 11886.17 | 7002.67 | 7003.58 | 161.08 | 0.00 | 452528.19 | 682147.08 | N 32 14 33.88 | W 103 44 39.12 |
| | 18600.00 | 90.43 | 359.71 | 11885.42 | 7102.67 | 7103.57 | 160.57 | 0.00 | 452628.18 | 682146.56 | N 32 14 34.87 | W 103 44 39.12 |
| | 18700.00 | 90.43 | 359.71 | 11884.67 | 7202.67 | 7203.57 | 160.06 | 0.00 | 452728.17 | 682146.05 | N 32 14 35.86 | W 103 44 39.12 |
| | 18800.00 | 90.43 | 359.71 | 11883.93 | 7302.66 | 7303.57 | 159.54 | 0.00 | 452828.16 | 682145.53 | N 32 14 36.85 | W 103 44 39.12 |
| | 18900.00 | 90.43 | 359.71 | 11883.18 | 7402.66 | 7403.56 | 159.03 | 0.00 | 452928.15 | 682145.02 | N 32 14 37.83 | W 103 44 39.12 |
| | 19000.00 | 90.43 | 359.71 | 11882.43 | 7502.66 | 7503.56 | 158.51 | 0.00 | 453028.14 | 682144.50 | N 32 14 38.82 | W 103 44 39.12 |
| | 19100.00 | 90.43 | 359.71 | 11881.69 | 7602.66 | 7603.55 | 158.00 | 0.00 | 453128.13 | 682143.99 | N 32 14 39.81 | W 103 44 39.11 |
| | 19200.00 | 90.43 | 359.71 | 11880.94 | 7702.65 | 7703.55 | 157.49 | 0.00 | 453228.13 | 682143.48 | N 32 14 40.80 | W 103 44 39.11 |
| | 19300.00 | 90.43 | 359.71 | 11880.19 | 7802.65 | 7803.54 | 156.97 | 0.00 | 453328.12 | 682142.96 | N 32 14 41.79 | W 103 44 39.11 |
| | 19400.00 | 90.43 | 359.71 | 11879.44 | 7902.65 | 7903.54 | 156.46 | 0.00 | 453428.11 | 682142.45 | N 32 14 42.78 | W 103 44 39.11 |
| | 19500.00 | 90.43 | 359.71 | 11878.70 | 8002.64 | 8003.54 | 155.94 | 0.00 | 453528.10 | 682141.93 | N 32 14 43.77 | W 103 44 39.11 |
| | 19600.00 | 90.43 | 359.71 | 11877.95 | 8102.64 | 8103.53 | 155.43 | 0.00 | 453628.09 | 682141.42 | N 32 14 44.76 | W 103 44 39.11 |
| | 19700.00 | 90.43 | 359.71 | 11877.20 | 8202.64 | 8203.53 | 154.91 | 0.00 | 453728.08 | 682140.91 | N 32 14 45.75 | W 103 44 39.11 |
| | 19800.00 | 90.43 | 359.71 | 11876.46 | 8302.64 | 8303.52 | 154.40 | 0.00 | 453828.07 | 682140.39 | N 32 14 46.74 | W 103 44 39.11 |
| | 19900.00 | 90.43 | 359.71 | 11875.71 | 8402.63 | 8403.52 | 153.89 | 0.00 | 453928.06 | 682139.88 | N 32 14 47.73 | W 103 44 39.11 |
| | 20000.00 | 90.43 | 359.71 | 11874.96 | 8502.63 | 8503.52 | 153.37 | 0.00 | 454028.05 | 682139.36 | N 32 14 48.72 | W 103 44 39.11 |
| | 20100.00 | 90.43 | 359.71 | 11874.22 | 8602.63 | 8603.51 | 152.86 | 0.00 | 454128.04 | 682138.85 | N 32 14 49.71 | W 103 44 39.11 |
| | 20200.00 | 90.43 | 359.71 | 11873.47 | 8702.62 | 8703.51 | 152.34 | 0.00 | 454228.03 | 682138.34 | N 32 14 50.70 | W 103 44 39.11 |
| | 20300.00 | 90.43 | 359.71 | 11872.72 | 8802.62 | 8803.50 | 151.83 | 0.00 | 454328.02 | 682137.82 | N 32 14 51.69 | W 103 44 39.11 |
| | 20400.00 | 90.43 | 359.71 | 11871.98 | 8902.62 | 8903.50 | 151.32 | 0.00 | 454428.01 | 682137.31 | N 32 14 52.68 | W 103 44 39.11 |
| | 20500.00 | 90.43 | 359.71 | 11871.23 | 9002.62 | 9003.50 | 150.80 | 0.00 | 454528.00 | 682136.79 | N 32 14 53.67 | W 103 44 39.11 |
| | 20600.00 | 90.43 | 359.71 | 11870.48 | 9102.61 | 9103.49 | 150.29 | 0.00 | 454627.99 | 682136.28 | N 32 14 54.66 | W 103 44 39.11 |
| | 20700.00 | 90.43 | 359.71 | 11869.74 | 9202.61 | 9203.49 | 149.77 | 0.00 | 454727.98 | 682135.77 | N 32 14 55.65 | W 103 44 39.11 |
| | 20800.00 | 90.43 | 359.71 | 11868.99 | 9302.61 | 9303.48 | 149.26 | 0.00 | 454827.97 | 682135.25 | N 32 14 56.64 | W 103 44 39.11 |
| | 20900.00 | 90.43 | 359.71 | 11868.24 | 9402.61 | 9403.48 | 148.75 | 0.00 | 454927.96 | 682134.74 | N 32 14 57.63 | W 103 44 39.11 |
| | 21000.00 | 90.43 | 359.71 | 11867.49 | 9502.60 | 9503.47 | 148.23 | 0.00 | 455027.95 | 682134.22 | N 32 14 58.62 | W 103 44 39.11 |
| | 21100.00 | 90.43 | 359.71 | 11866.75 | 9602.60 | 9603.47 | 147.72 | 0.00 | 455127.94 | 682133.71 | N 32 14 59.60 | W 103 44 39.11 |
| | 21200.00 | 90.43 | 359.71 | 11866.00 | 9702.60 | 9703.47 | 147.20 | 0.00 | 455227.93 | 682133.20 | N 32 15 0.59 | W 103 44 39.11 |
| | 21300.00 | 90.43 | 359.71 | 11865.25 | 9802.59 | 9803.46 | 146.69 | 0.00 | 455327.92 | 682132.68 | N 32 15 1.58 | W 103 44 39.11 |
| | 21400.00 | 90.43 | 359.71 | 11864.51 | 9902.59 | 9903.46 | 146.18 | 0.00 | 455427.91 | 682132.17 | N 32 15 2.57 | W 103 44 39.11 |
| | 21500.00 | 90.43 | 359.71 | 11863.76 | 10002.59 | 10003.45 | 145.66 | 0.00 | 455527.90 | 682131.65 | N 32 15 3.56 | W 103 44 39.11 |
| | 21600.00 | 90.43 | 359.71 | 11863.01 | 10102.59 | 10103.45 | 145.15 | 0.00 | 455627.89 | 682131.14 | N 32 15 4.55 | W 103 44 39.11 |
| | 21700.00 | 90.43 | 359.71 | 11862.27 | 10202.58 | 10203.45 | 144.63 | 0.00 | 455727.88 | 682130.63 | N 32 15 5.54 | W 103 44 39.11 |
| | 21800.00 | 90.43 | 359.71 | 11861.52 | 10302.58 | 10303.44 | 144.12 | 0.00 | 455827.88 | 682130.11 | N 32 15 6.53 | W 103 44 39.11 |
| | 21900.00 | 90.43 | 359.71 | 11860.77 | 10402.58 | 10403.44 | 143.60 | 0.00 | 455927.87 | 682129.60 | N 32 15 7.52 | W 103 44 39.11 |
| | 22000.00 | 90.43 | 359.71 | 11860.03 | 10502.57 | 10503.43 | 143.09 | 0.00 | 456027.86 | 682129.08 | N 32 15 8.51 | W 103 44 39.11 |
| | 22100.00 | 90.43 | 359.71 | 11859.28 | 10602.57 | 10603.43 | 142.58 | 0.00 | 456127.85 | 682128.57 | N 32 15 9.50 | W 103 44 39.11 |
| LTP Cross | 22100.37 | 90.43 | 359.71 | 11859.28 | 10602.94 | 10603.80 | 142.57 | 0.00 | 456128.22 | 682128.57 | N 32 15 9.50 | W 103 44 39.11 |
| | 22200.00 | 90.43 | 359.71 | 11858.53 | 10702.57 | 10703.43 | 142.06 | 0.00 | 456227.84 | 682128.05 | N 32 15 10.49 | W 103 44 39.11 |
| | 22300.00 | 90.43 | 359.71 | 11857.79 | 10802.57 | 10803.42 | 141.55 | 0.00 | 456327.83 | 682127.54 | N 32 15 11.48 | W 103 44 39.11 |
| | 22400.00 | 90.43 | 359.71 | 11857.04 | 10902.56 | 10903.42 | 141.03 | 0.00 | 456427.82 | 682127.03 | N 32 15 12.47 | W 103 44 39.11 |
| SND Javelina Unit 11 2 Pad 27 No. 617H BHL | 22405.18 | 90.43 | 359.71 | 11857.00 | 10907.75 | 10908.60 | 141.01 | 0.00 | 456433.00 | 682127.00 | N 32 15 12.52 | W 103 44 39.10 |

Survey Type: Def Plan

Survey Error Model: ISCWSA Rev 3 *** 3-D 97.071% Confidence 3.0000 sigma

| Description | Part | MD From (ft) | MD To (ft) | EOU Freq (ft) | Hole Size (in) | Casing Diameter (in) | Expected Max Inclination (deg) | Survey Tool Type | Borehole / Survey |
|-------------|------|--------------|------------|---------------|----------------|----------------------|--------------------------------|----------------------------|--|
| | 1 | 0.000 | 28.000 | 1/100.000 | 30.000 | 30.000 | | B001Mb_MWD+HRGM-Depth Only | SND Javelina Unit 11 2 Pad 27 No. 617H / SND Javelina Unit 11 2 Pad 27 No. 617H R0 mdv |
| | 1 | 28.000 | 22405.183 | 1/100.000 | 30.000 | 30.000 | | B001Mb_MWD+HRGM | SND Javelina Unit 11 2 Pad 27 No. 617H / SND Javelina Unit 11 2 Pad 27 No. 617H / SND Javelina Unit 11 |

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

| | |
|-----------------------|------------------------------------|
| OPERATOR'S NAME: | CHEVRON USA INCORPORATED |
| WELL NAME & NO.: | SND JAVELINA UNIT 11 2 PAD 27 617H |
| SURFACE HOLE FOOTAGE: | 370'/N & 1627'/E |
| BOTTOM HOLE FOOTAGE: | 25'/N & 1430'/E |
| LOCATION: | Section 14, T.24 S., R.31 E., NMP |
| COUNTY: | Eddy County, New Mexico |

COA

| | | | |
|----------------------------------|--|---|--|
| H2S | <input checked="" type="radio"/> Yes | <input type="radio"/> No | |
| Potash | <input type="radio"/> None | <input checked="" type="radio"/> Secretary | <input type="radio"/> R-111-P |
| Cave/Karst Potential | <input checked="" type="radio"/> Low | <input type="radio"/> Medium | <input type="radio"/> High |
| Cave/Karst Potential | <input type="radio"/> Critical | | |
| Variance | <input type="radio"/> None | <input checked="" type="radio"/> Flex Hose | <input type="radio"/> Other |
| Wellhead | <input type="radio"/> Conventional | <input checked="" type="radio"/> Multibowl | <input type="radio"/> Both |
| Wellhead Variance | <input type="radio"/> Diverter | | |
| Other | <input type="checkbox"/> 4 String | <input type="checkbox"/> Capitan Reef | <input type="checkbox"/> WIPP |
| Other | <input type="checkbox"/> Fluid Filled | <input type="checkbox"/> Pilot Hole | <input type="checkbox"/> Open Annulus |
| Cementing | <input type="checkbox"/> Contingency Cement Squeeze | <input type="checkbox"/> EchoMeter | <input type="checkbox"/> Primary Cement Squeeze |
| Special Requirements | <input type="checkbox"/> Water Disposal | <input type="checkbox"/> COM | <input checked="" type="checkbox"/> Unit |
| Special Requirements | <input type="checkbox"/> Batch Sundry | | |
| Special Requirements Variance | <input checked="" type="checkbox"/> Break Testing | <input type="checkbox"/> Offline Cementing | <input type="checkbox"/> Casing Clearance |

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet 43 CFR part 3170 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

Primary Casing Design:

- The 13-3/8 inch surface casing shall be set at approximately **988 feet** (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface. The surface hole shall be **16 inch** in diameter.

- a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **24 hours in the Potash Area** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Operator is approved to use contingency cementing for the Intermediate and Production section. Operator shall notify the BLM before proceeding with contingency operation.

2. The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
Cement excess is less than 25%, more cement is required if washout occurs. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.
- ❖ In Secretary Potash Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

3. The minimum required fill of cement behind the **7** inch intermediate casing is:

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
Cement excess is less than 25%, more cement is required if washout occurs. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.

4. The minimum required fill of cement behind the **5 X 4-1/2** inch production liner is:
 - Cement should tie-back **100 feet** into the previous casing. Operator shall provide method of verification.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the **13-3/8** inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in **43 CFR 3172.6(b)(9)** must be followed.

D. SPECIAL REQUIREMENT (S)

Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

Commercial Well Determination

A commercial well determination shall be submitted after production has been established for at least six months. **(This is not necessary for secondary recovery unit wells)**

(Note: For a minimum 5M BOPE or less (Utilizing a 10M BOPE system))**BOPE Break Testing Variance**

- BOPE Break Testing is ONLY permitted for 5M BOPE or less. (**Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP**)
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (**575-706-2779**) prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-361-2822 Eddy County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per 43 CFR 3170.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

BLM_NM_CFO_DrillingNotifications@BLM.GOV

(575) 361-2822

Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,

(575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.

- a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive

strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172 and API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.

4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3170 must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever

is greater, prior to initiating the test (see casing segment as lead cement may be critical item).

- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

JS 12/15/2023

H₂S Preparedness and Contingency Plan Summary

Training

MCBU Drilling and Completions H₂S training requirements are intended to define the minimum level of training required for employees, contractors and visitors to enter or perform work at MCBU Drilling and Completions locations that have known concentrations of H₂S.

Awareness Level

Employees and visitors to MCBU Drilling and Completions locations that have known concentrations of H₂S, who are not required to perform work in H₂S areas, will be provided with an awareness level of H₂S training prior to entering any H₂S areas. At a minimum, awareness level training will include:

1. Physical and chemical properties of H₂S
2. Health hazards of H₂S
3. Personal protective equipment
4. Information regarding potential sources of H₂S
5. Alarms and emergency evacuation procedures

Awareness level training will be developed and conducted by personnel who are qualified either by specific training, educational experience and/or work-related background.

Advanced Level H₂S Training

Employees and contractors required to work in areas that may contain H₂S will be provided with Advanced Level H₂S training prior to initial assignment. In addition to the Awareness Level requirements, Advanced Level H₂S training will include:

1. H₂S safe work practice procedures;
2. Emergency contingency plan procedures;
3. Methods to detect the presence or release of H₂S (e.g., alarms, monitoring equipment), including hands-on training with direct reading and personal monitoring H₂S equipment.
4. Basic overview of respiratory protective equipment suitable for use in H₂S environments. Note: Employees who work at sites that participate in the Chevron Respirator User program will require separate respirator training as required by the MCBU Respiratory Protection Program;
5. Basic overview of emergency rescue techniques, first aid, CPR and medical evaluation procedures. Employees who may be required to perform "standby" duties are required to receive additional first aid and CPR training, which is not covered in the Advanced Level H₂S training;
6. Proficiency examination covering all course material.

Advanced H₂S training courses will be instructed by personnel who have successfully completed an appropriate H₂S train-the-trainer development course (ANSI/ASSE Z390.1-2006) or who possess significant past experience through educational or work-related background.

H₂S Preparedness and Contingency Plan Summary

H₂S Training Certification

All employees and visitors will be issued an H₂S training certification card (or certificate) upon successful completion of the appropriate H₂S training course. Personnel working in an H₂S environment will carry a current H₂S training certification card as proof of having received the proper training on their person at all times.

Briefing Area

A minimum of two briefing areas will be established in locations that at least one area will be upwind from the well at all times. Upon recognition of an emergency situation, all personnel should assemble at the designated upwind briefing areas for instructions.

H₂S Equipment

Respiratory Protection

- a) Six 30 minute SCBAs – 2 at each briefing area and 2 in the Safety Trailer.
- b) Eight 5 minute EBAs – 5 in the dog house at the rig floor, 1 at the accumulator, 1 at the shale shakers and 1 at the mud pits.

Visual Warning System

- a) One color code sign, displaying all possible conditions, will be placed at the entrance to the location with a flag displaying the current condition.
- b) Two windsocks will be on location, one on the dog house and one on the Drill Site Manager's Trailer.

H₂S Detection and Monitoring System

- a) H₂S monitoring system (sensor head, warning light and siren) placed throughout rig.
 - Drilling Rig Locations: at a minimum, in the area of the Shale shaker, rig floor, and bell nipple.
 - Workover Rig Locations: at a minimum, in the area of the Cellar, rig floor and circulating tanks or shale shaker.

H₂S Preparedness and Contingency Plan Summary

Well Control Equipment

- a) Flare Line 150' from wellhead with igniter.
- b) Choke manifold with a remotely operated choke.
- c) Mud / gas separator

Mud Program

In the event of drilling, completions, workover and well servicing operations involving a hydrogen sulfide concentration of 100 ppm or greater the following shall be considered:

- 1. Use of a degasser
- 2. Use of a zinc based mud treatment
- 3. Increasing mud weight

Public Safety - Emergency Assistance

| <u>Agency</u> | <u>Telephone Number</u> |
|------------------------------------|-------------------------|
| Lea County Sheriff's Department | 575-396-3611 |
| Fire Department: | |
| Carlsbad | 575-885-3125 |
| Artesia | 575-746-5050 |
| Lea County Regional Medical Center | 575-492-5000 |
| Jal Community Hospital | 505-395-2511 |
| Lea County Emergency Management | 575-396-8602 |
| Poison Control Center | 800-222-1222 |

H₂S Preparedness and Contingency Plan Summary


Chevron MCBU D&C Emergency Notifications

Below are lists of contacts to be used in emergency situations.

| | Name | Title | Office Number | Cell Phone |
|----|----------------|---------------------|----------------|--------------|
| 1. | TBD | Drilling Engineer | | |
| 2. | TBD | Superintendent | | |
| 5. | Steve Hassmann | Drilling Manager | (713) 372-4496 | 832-729-3236 |
| 6. | Kyle Eastman | Operations Manager | TBD | 281-755-6554 |
| 7. | TBD | D&C HES | | |
| 8. | TBD | Completion Engineer | | |




H₂S Preparedness and Contingency Plan Summary

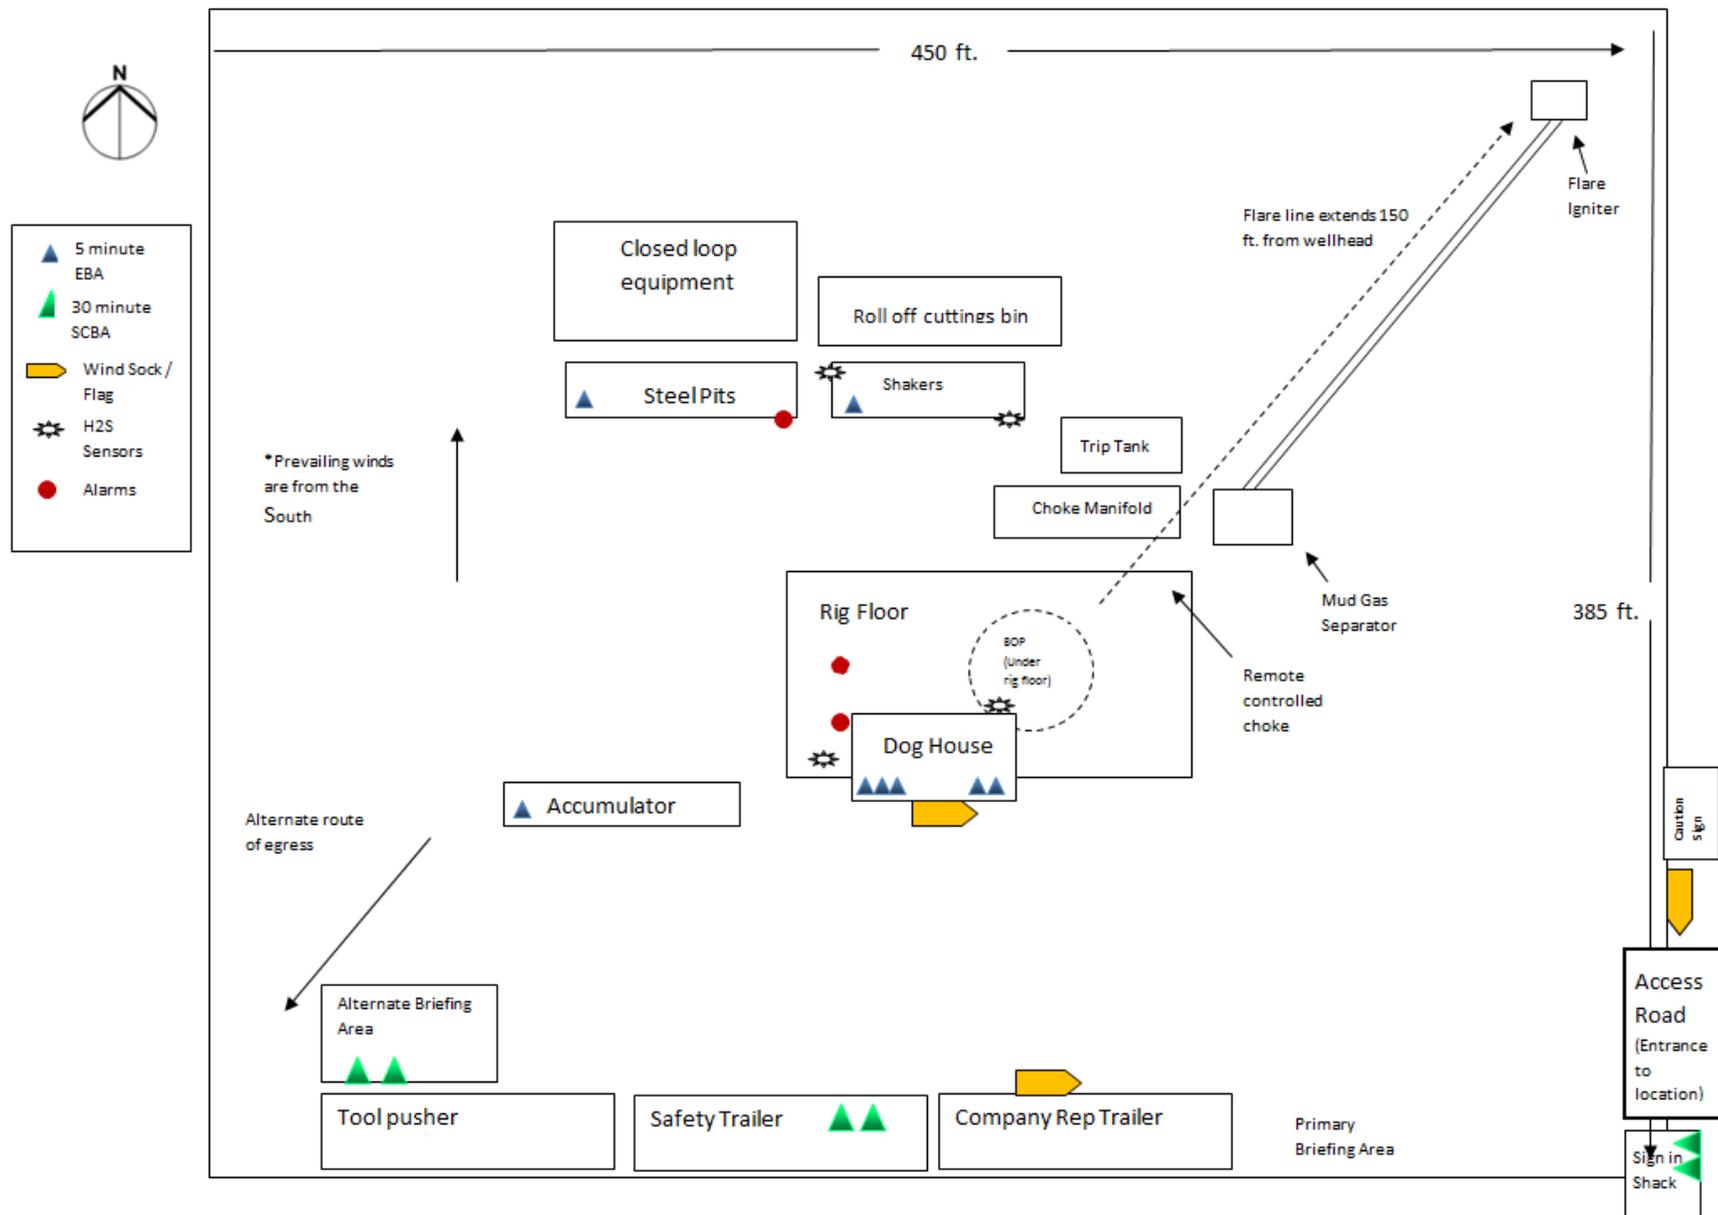



Rig layout shows rig in first and last well for illustration purposes.

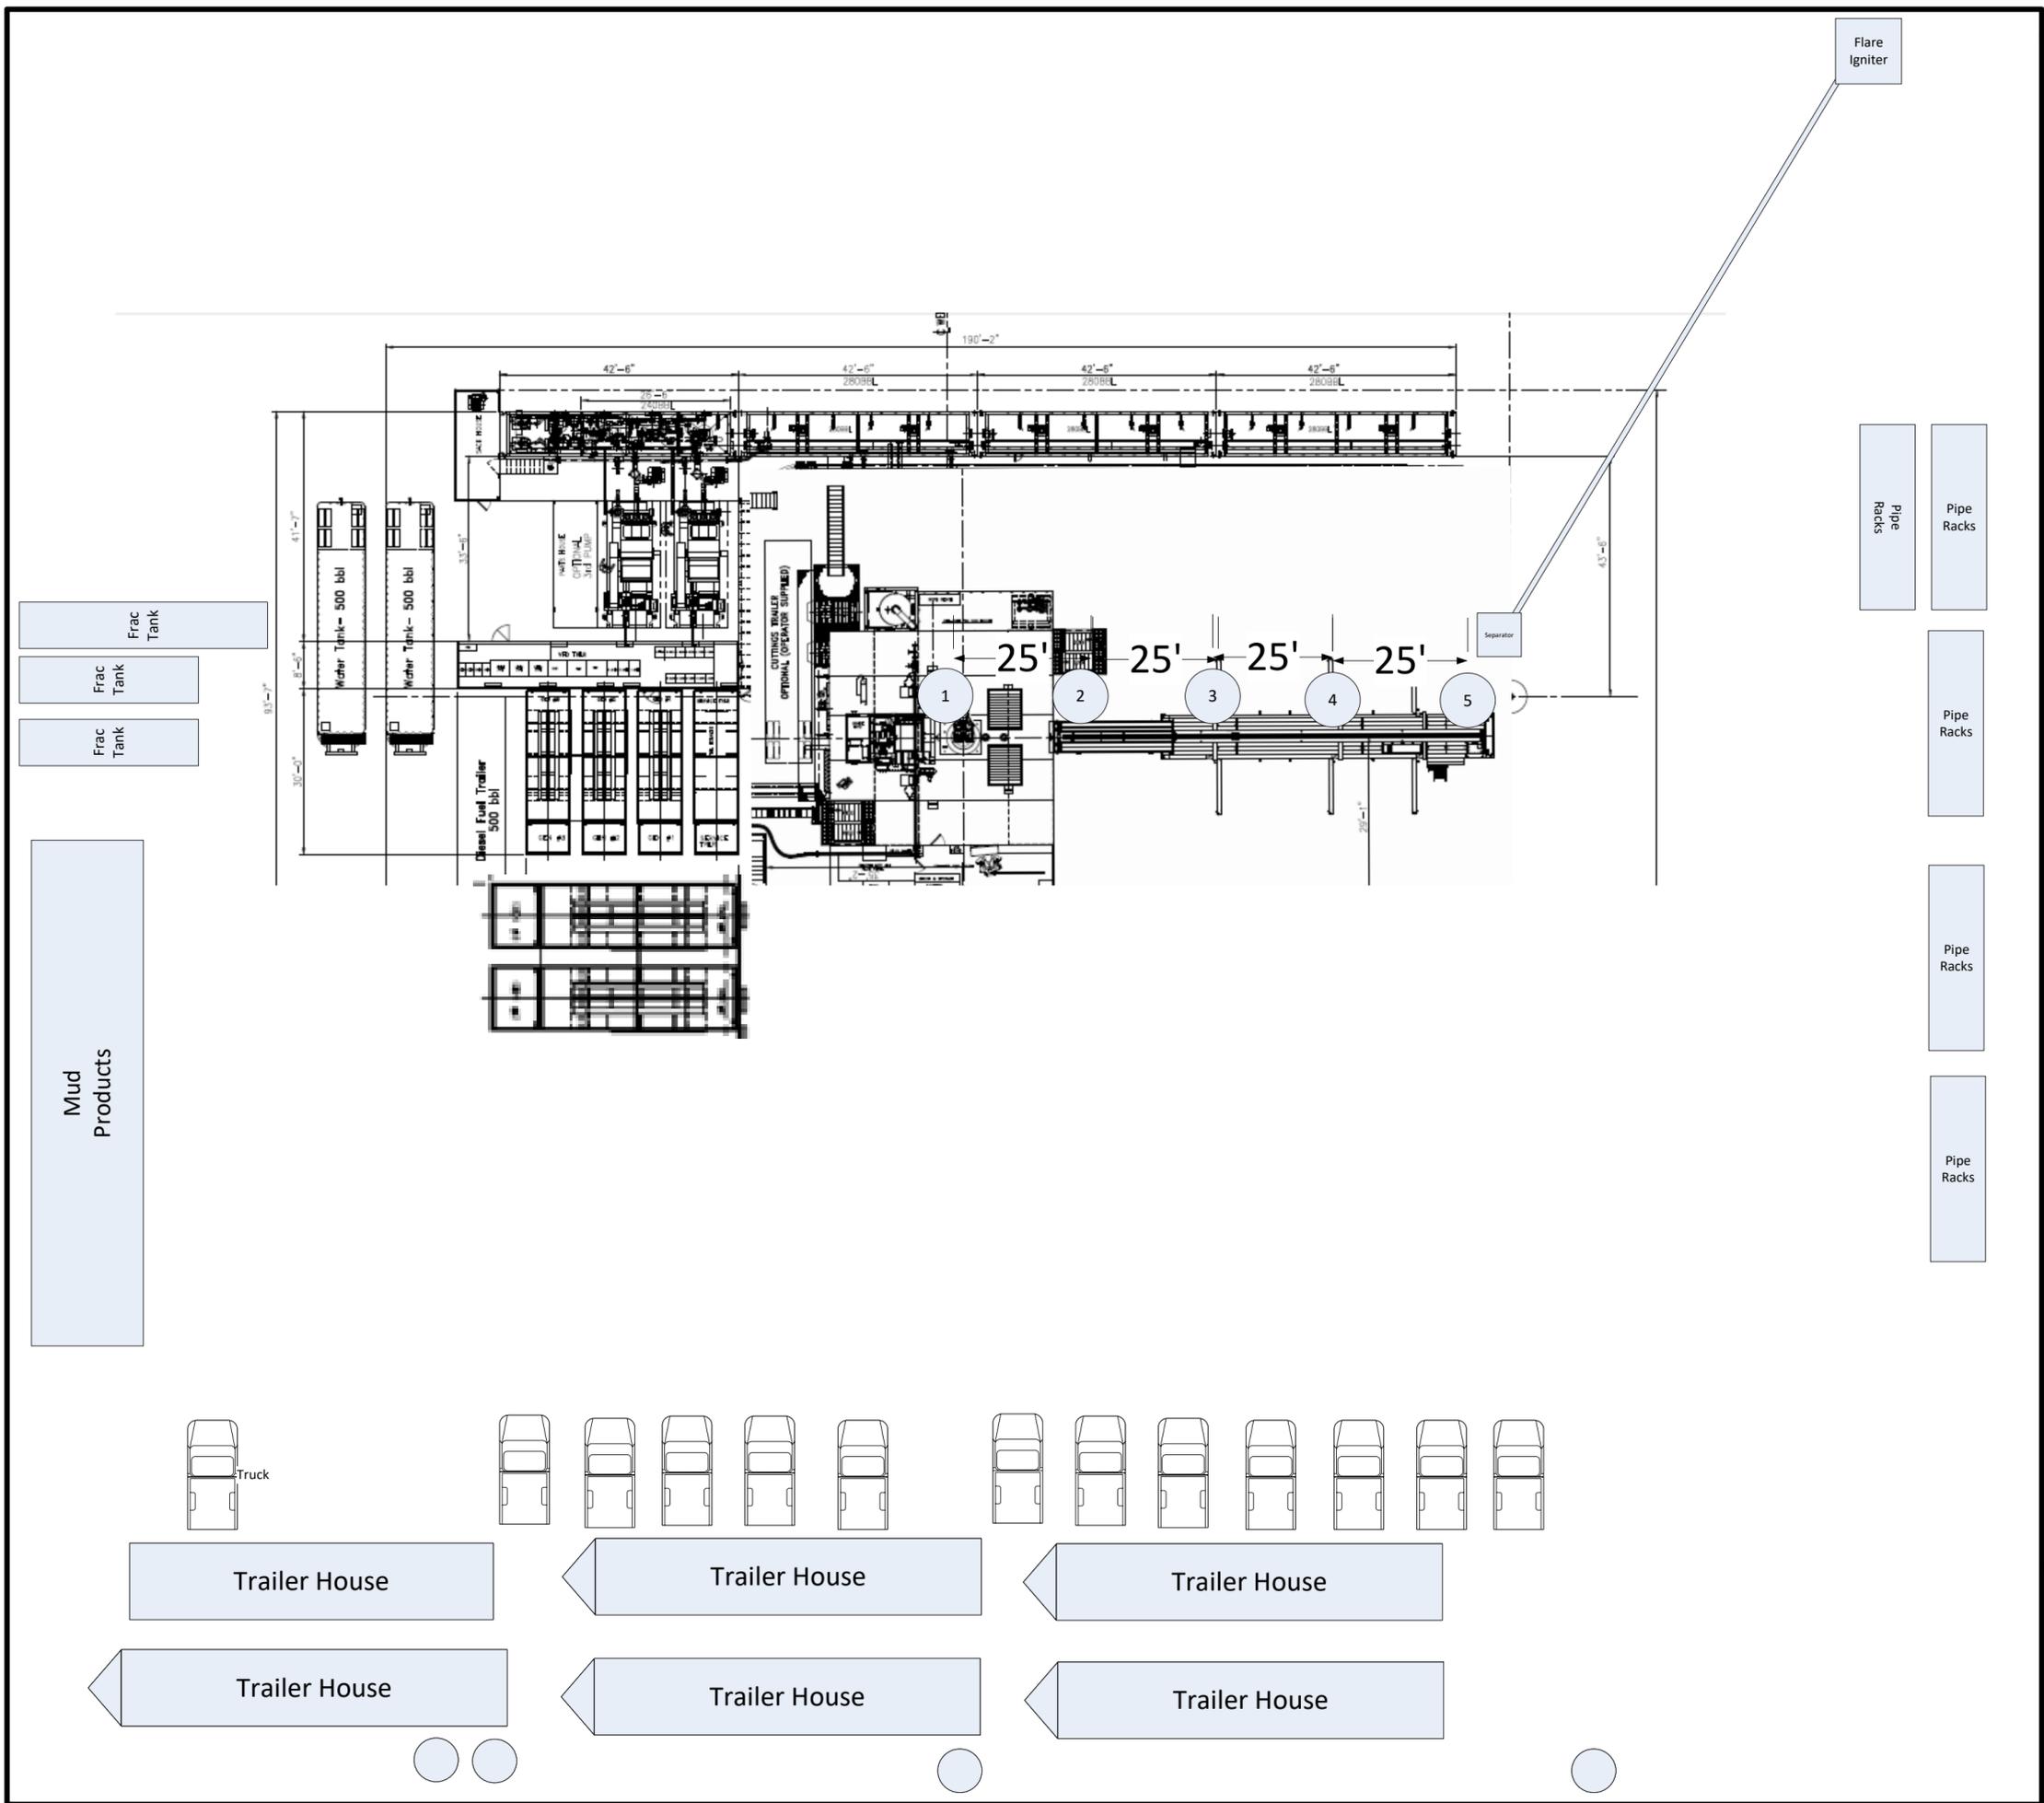

- H2S Monitor Locations**
- Bop/Cellar
 - Rig Floor
 - Shaker Skid
 - Bell Nipple
 - Trailers
- Flag Locations**
- Sign-in Shack
 - Rig Floor
 - Dog House
- 10 Minute Escape Packs**
- 1 at Pits
 - 1 at Trip Tank
 - 1 at Accumulator
 - 4 at Rig Floor
- 45 Minute Escape Packs**
- 2 at Briefing Area
 - 2 at Alternate Briefing Area

Intent As Drilled

| | | | | | | | | | |
|----------------|--|--|--|--|----------------|--|--|--|-------------|
| API # | | | | | | | | | |
| Operator Name: | | | | | Property Name: | | | | Well Number |

Kick Off Point (KOP)

| UL | Section | Township | Range | Lot | Feet | From N/S | Feet | From E/W | County |
|----------|---------|----------|-------|-----|-----------|----------|------|----------|--------|
| Latitude | | | | | Longitude | | | | NAD |

First Take Point (FTP)

| UL | Section | Township | Range | Lot | Feet | From N/S | Feet | From E/W | County |
|----------|---------|----------|-------|-----|-----------|----------|------|----------|--------|
| Latitude | | | | | Longitude | | | | NAD |

Last Take Point (LTP)

| UL | Section | Township | Range | Lot | Feet | From N/S | Feet | From E/W | County |
|----------|---------|----------|-------|-----|-----------|----------|------|----------|--------|
| Latitude | | | | | Longitude | | | | NAD |

Is this well the defining well for the Horizontal Spacing Unit?

Is this well an infill well?

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

| | | | | | | | | | |
|----------------|--|--|--|--|----------------|--|--|--|-------------|
| API # | | | | | | | | | |
| Operator Name: | | | | | Property Name: | | | | Well Number |

KZ 06/29/2018



Drilling Plan Data Report

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

06/19/2024

APD ID: 10400088693

Submission Date: 10/18/2022

Highlighted data reflects the most recent changes

Operator Name: CHEVRON USA INCORPORATED

Well Name: SND JAVELINA UNIT 11 2 PAD 27

Well Number: 617H

Well Type: OIL WELL

Well Work Type: Drill

Show Final Text

Section 1 - Geologic Formations

| Formation ID | Formation Name | Elevation | True Vertical | Measured Depth | Lithologies | Mineral Resources | Producing Formatio |
|--------------|------------------|-----------|---------------|----------------|------------------|-------------------|--------------------|
| 13618039 | RUSTLER | 3555 | 763 | 963 | ANHYDRITE | NONE | N |
| 13618050 | SALADO | 2503 | 1052 | 1052 | SALT | NONE | N |
| 13618053 | CASTILE | 669 | 2886 | 2886 | ANHYDRITE | NONE | N |
| 13618040 | LAMAR | -947 | 4502 | 4542 | LIMESTONE | NONE | N |
| 13618041 | BELL CANYON | -991 | 4546 | 4586 | SANDSTONE | NONE | N |
| 13618042 | CHERRY CANYON | -1893 | 5448 | 5488 | SANDSTONE | NONE | N |
| 13618045 | BRUSHY CANYON | -3111 | 6666 | 6741 | SANDSTONE | NONE | N |
| 13618046 | BONE SPRING LIME | -4833 | 8388 | 8399 | LIMESTONE, SHALE | NONE | N |
| 13618047 | AVALON SAND | -4895 | 8450 | 8461 | LIMESTONE, SHALE | NONE | N |
| 13618051 | BONE SPRING 1ST | -5890 | 9445 | 9456 | SANDSTONE | NONE | N |
| 13618052 | BONE SPRING 2ND | -6506 | 10061 | 10072 | SANDSTONE | NONE | N |
| 13618054 | BONE SPRING 3RD | -7733 | 11288 | 11299 | SANDSTONE | NONE | N |
| 13618055 | WOLFCAMP | -8205 | 11760 | 11771 | SANDSTONE | NATURAL GAS, OIL | Y |

Section 2 - Blowout Prevention

BLOWOUT PREVENTER SCHEMATIC

Operation: Intermediate & Production Drilling Operations

Minimum System operation pressure 5,000 psi

BOP Stack

| Part | Size | Pressure Rating | Description |
|------|---------|-----------------|---------------------------|
| A | 13-5/8" | N/A | Rotating Head/Bell nipple |
| B | 13-5/8" | 5,000 | Annular |
| C | 13-5/8" | 10,000 | Blind Ram |
| D | 13-5/8" | 10,000 | Pipe Ram |
| E | 13-5/8" | 10,000 | Mud Cross |
| F | 13-5/8" | 10,000 | Pipe Ram |

Kill Line


| Part | Size | Pressure Rating | Description |
|------|------|-----------------|--------------------------------------|
| G | 2" | 10,000 | Inside Kill Line Valve (gate valve) |
| H | 2" | 10,000 | Outside Kill Line Valve (gate valve) |
| I | 2" | 10,000 | Kill Line Check valve |

Choke line

| Part | Size | Pressure Rating | Description |
|------|------|-----------------|-------------------------|
| J | 3" | 10,000 | HCR (gate valve) |
| K | 3" | 10,000 | Manual HCR (gate valve) |

Wellhead

| Part | Size | Pressure Rating | Description |
|------|---------|-----------------|------------------------|
| L | 13-5/8" | 5,000 | FMC Multibowl wellhead |

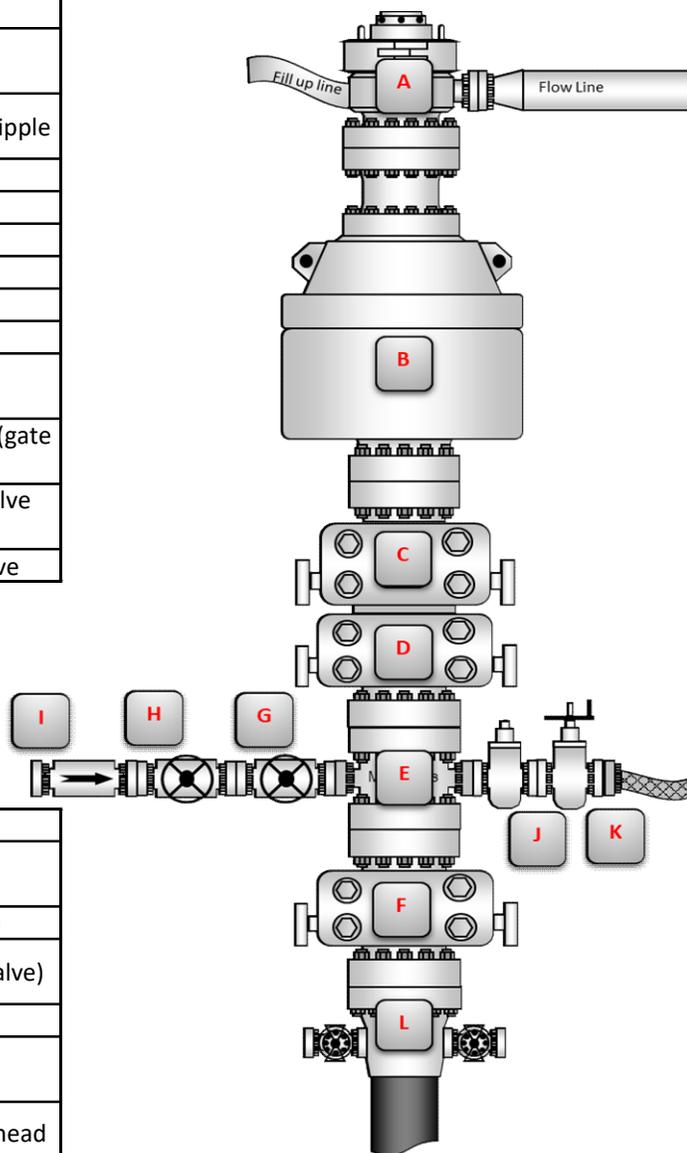

BOP Installation Checklist: *The following items must be verified and checked off prior to pressure testing BOP equipment*

The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.

All valves on the kill line and choke line will be full opening and will allow straight flow through.

Manual (hand wheels) or automatic locking devices will be installed on all ram preventers. Hand wheels will also be install on all manual valves on the choke and kill line.

A valve will be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve will remain open unless accumulator is inoperative.

Upper kelly cock valve with handle will be available on rig floor along with saved valve and subs to fit all drill string connections in use.

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720
District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 357187

CONDITIONS

| | |
|--|---|
| Operator: CHEVRON U S A INC 6301 Deauville Blvd Midland, TX 79706 | OGRID: 4323 |
| | Action Number: 357187 |
| | Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |
| | |

CONDITIONS

| Created By | Condition | Condition Date |
|-------------|--|----------------|
| ward.rikala | Notify OCD 24 hours prior to casing & cement | 7/23/2024 |
| ward.rikala | Will require a File As Drilled C-102 and a Directional Survey with the C-104 | 7/23/2024 |
| ward.rikala | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string | 7/23/2024 |
| ward.rikala | Cement is required to circulate on both surface and intermediate1 strings of casing | 7/23/2024 |
| ward.rikala | If cement does not circulate on any string, a CBL is required for that string of casing | 7/23/2024 |
| ward.rikala | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system | 7/23/2024 |