

Form 3160-3  
(June 2015)FORM APPROVED  
OMB No. 1004-0137  
Expires: January 31, 2018

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
**APPLICATION FOR PERMIT TO DRILL OR REENTER**

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone			5. Lease Serial No. <b>NMNM63016</b> 6. If Indian, Allottee or Tribe Name  7. If Unit or CA Agreement, Name and No.  8. Lease Name and Well No.  <b>DOUBLE STAMP FED COM</b>  <b>116H</b>
2. Name of Operator <b>TAP ROCK OPERATING LLC</b>			9. API Well No.  <b>30-025-54000</b>
3a. Address <b>602 PARK POINT DRIVE SUITE 200, GOLDEN, CO 8040</b>		3b. Phone No. (include area code) <b>(720) 460-3316</b>	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface <b>SWSE / 569 FSL / 2471 FEL / LAT 32.5674894 / LONG -103.7363679</b> At proposed prod. zone <b>NENE / 5 FNL / 1254 FEL / LAT 32.5949762 / LONG -103.7324324</b>			10. Field and Pool, or Exploratory <b>SALT LAKE/BONE SPRING</b> 11. Sec., T. R. M. or Blk. and Survey or Area <b>SEC 14/T20S/R32E/NMP</b>
14. Distance in miles and direction from nearest town or post office* <b>20 miles</b>		12. County or Parish <b>LEA</b>	13. State <b>NM</b>
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>569 feet</b>		16. No of acres in lease  17. Spacing Unit dedicated to this well <b>640.0</b>	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>25 feet</b>		19. Proposed Depth <b>8984 feet / 19479 feet</b> 20. BLM/BIA Bond No. in file <b>FED: NMB105800930</b>	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) <b>3533 feet</b>		22. Approximate date work will start* <b>03/01/2024</b> 23. Estimated duration <b>60 days</b>	
24. Attachments			

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- |   |   |
|---|---|
| 1. Well plat certified by a registered surveyor.<br>2. A Drilling Plan.<br>3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).<br>5. Operator certification.<br>6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature (Electronic Submission)		Name (Printed/Typed) <b>BRIAN WOOD / Ph: (720) 460-3316</b>	Date <b>06/16/2023</b>
Title <b>Permitting Agent</b>			
Approved by (Signature) (Electronic Submission)		Name (Printed/Typed) <b>CODY LAYTON / Ph: (575) 234-5959</b>	Date <b>11/22/2024</b>
Title <b>Assistant Field Manager Lands &amp; Minerals</b>		Office <b>Carlsbad Field Office</b>	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

\*(Instructions on page 2)



Approval Date: 11/22/2024

State of New Mexico  
Energy, Minerals & Natural Resources  
Department  
OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Revised August 1, 2011

**Submit one copy to appropriate**

## District Office

☐ **AMENDED REPORT**

# WELL LOCATION AND ACREAGE DEDICATION PLAT

<sup>1</sup> API Number <b>30-025-54000</b>	<sup>2</sup> Pool Code <b>53560</b>	<sup>3</sup> Pool Name <b>SALT LAKE; BONE SPRING</b>
<sup>4</sup> Property Code <b>336539</b>	<sup>5</sup> Property Name <b>DOUBLE STAMP FED COM</b>	
<sup>7</sup> OGRID No. <b>#372043</b>	<sup>8</sup> Operator Name <b>TAP ROCK OPERATING, LLC.</b>	<sup>6</sup> Well Number <b>116H</b>
		<sup>9</sup> Elevation <b>3533'</b>

## <sup>10</sup>Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
0	14	20-S	32-E	-	569'	SOUTH	2471'	EAST	LEA

<sup>11</sup>Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	11	20-S	32-E	—	5'	NORTH	1254'	EAST	LEA

<sup>12</sup> Dedicated Acres  640	<sup>13</sup> Joint or Infill	<sup>14</sup> Consolidation Code	<sup>15</sup> Order No.
--	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

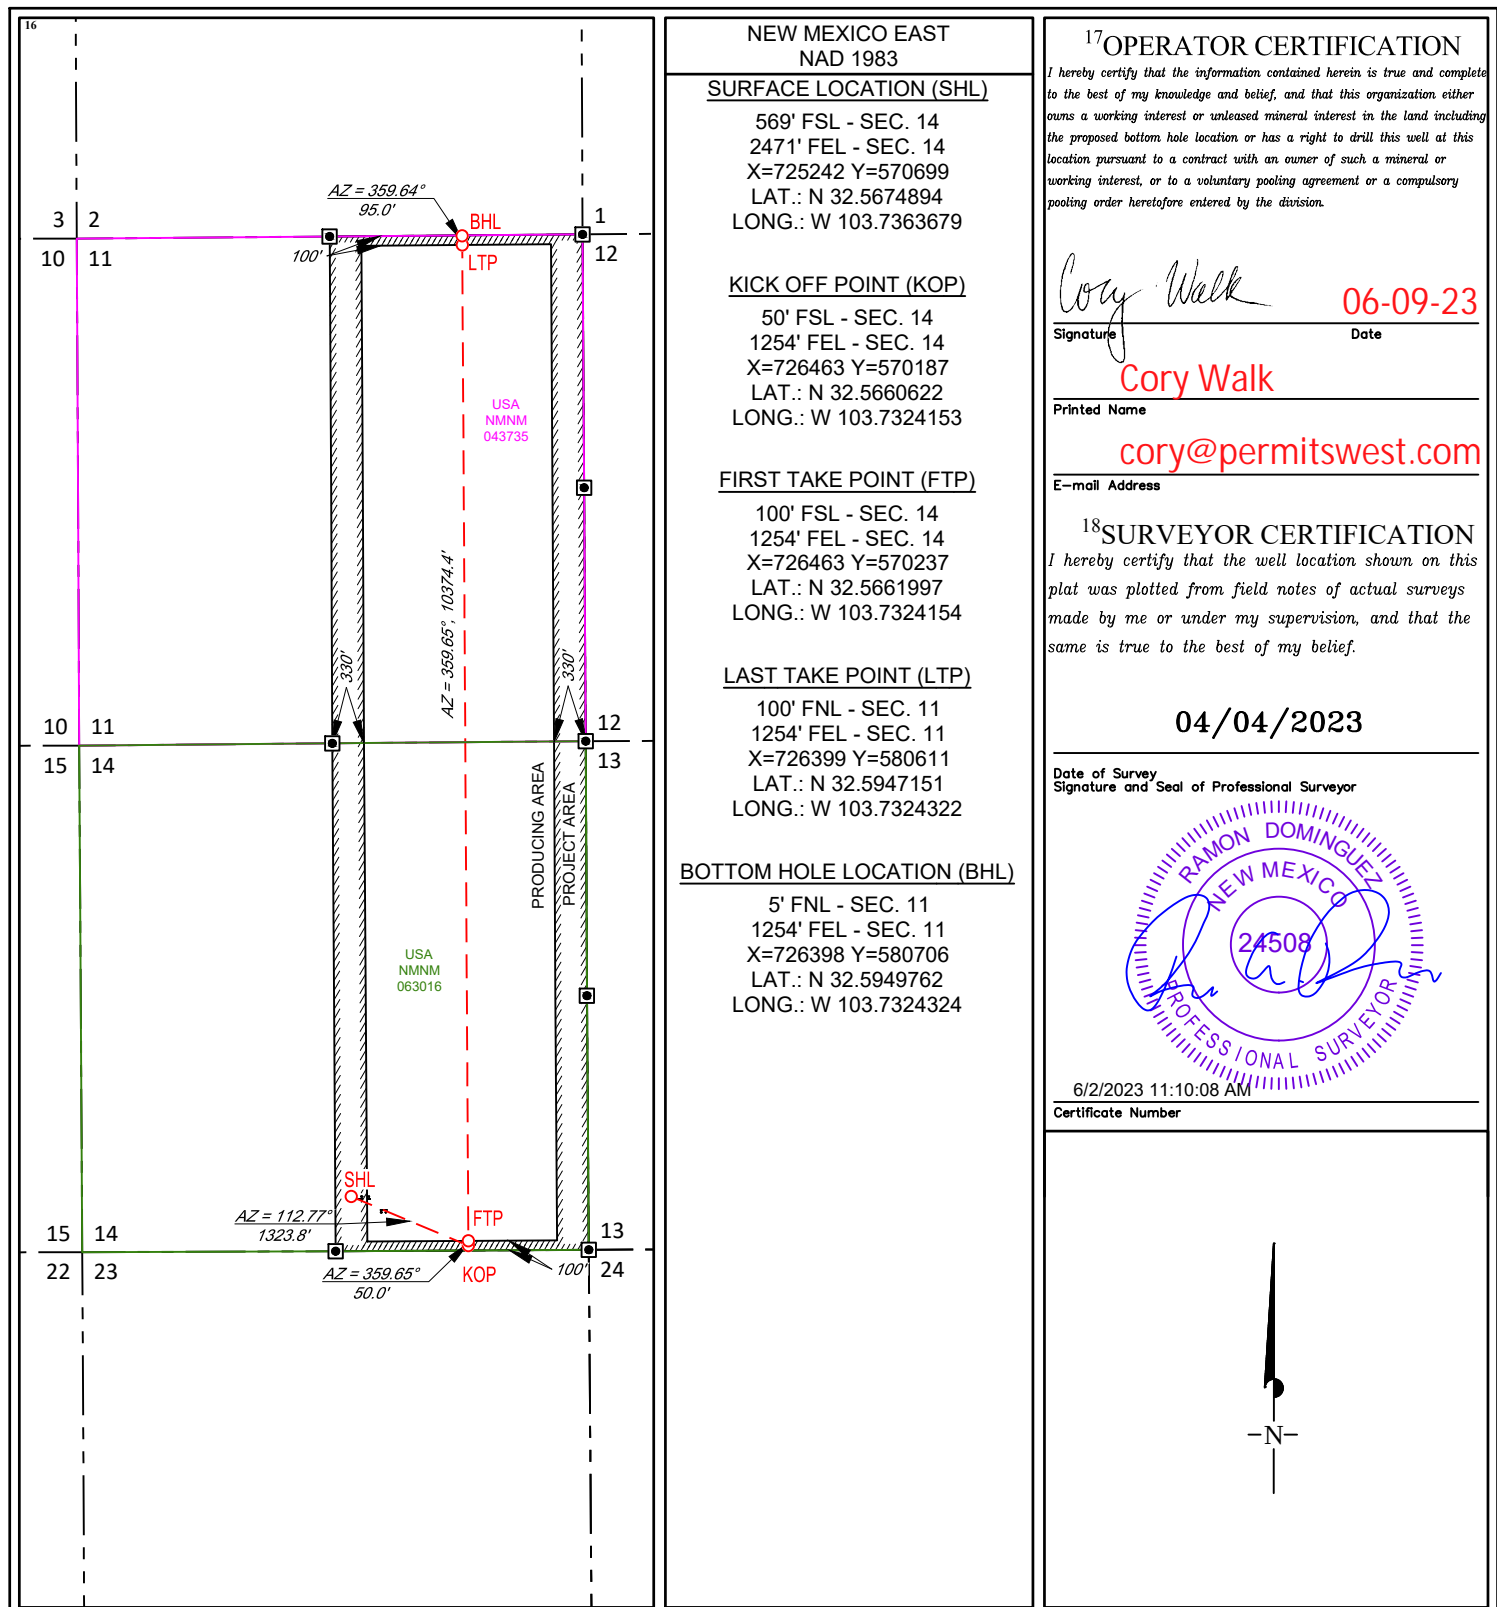

State of New Mexico  
Energy, Minerals and Natural Resources Department

Submit Electronically  
Via E-permitting

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

## NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

### Section 1 – Plan Description

Effective May 25, 2021

**I. Operator:** TAP ROCK OPERATING, LLC      **OGRID:** 3725043      **Date:** 11/18/2024

**II. Type:** ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: \_\_\_\_\_

**III. Well(s):** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
<u>SEE ATTACHED</u>						

**IV. Central Delivery Point Name:** DOUBLE STAMP E2 CTB [See 19.15.27.9(D)(1) NMAC]

**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
<u>SEE ATTACHED</u>						

**VI. Separation Equipment:** ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

**VII. Operational Practices:** ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

**VIII. Best Management Practices:** ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

## **Section 2 – Enhanced Plan**

### **EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

#### **IX. Anticipated Natural Gas Production:**

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

#### **X. Natural Gas Gathering System (NGGS):**

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

**XI. Map.** ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

**XII. Line Capacity.** The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

**XIII. Line Pressure.** Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

**XIV. Confidentiality:** ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

### **Section 3 - Certifications**

**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

***If Operator checks this box, Operator will select one of the following:***

**Well Shut-In.** ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

**Venting and Flaring Plan.** ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

### **Section 4 - Notices**

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: <i>William Ramsey</i>
Printed Name: Bill Ramsey
Title: Sr. Environmental & Regulatory Specialist
E-mail Address: bramsey@taprk.com
Date: 11/18/2024
Phone: (720) 238-2787
<b>OIL CONSERVATION DIVISION</b> <b>(Only applicable when submitted as a standalone form)</b>
Approved By:
Title:
Approval Date:
Conditions of Approval:

**III. Well(s):** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
DOUBLE STAMP FED COM 113H	TBD	O Sec 14 20-S 32-E	569' FSL / 2496' FEL	515	810	1770
DOUBLE STAMP FED COM 114H	TBD	O Sec 14 20-S 32-E	569' FSL / 2366' FEL	515	810	1770
DOUBLE STAMP FED COM 116H	TBD	O Sec 14 20-S 32-E	569' FSL / 2471' FEL	515	810	1770
DOUBLE STAMP FED COM 123H	TBD	O Sec 14 20-S 32-E	544' FSL / 2496' FEL	515	810	1770
DOUBLE STAMP FED COM 124H	TBD	O Sec 14 20-S 32-E	544' FSL / 2391' FEL	515	810	1770
DOUBLE STAMP FED COM 126H	TBD	O Sec 14 20-S 32-E	544' FSL / 2471' FEL	515	810	1770
DOUBLE STAMP FED COM 128H	TBD	O Sec 14 20-S 32-E	544' FSL / 2366' FEL	515	810	1770
DOUBLE STAMP FED COM 133H	TBD	O Sec 14 20-S 32-E	402' FSL / 2162' FEL	515	810	1770
DOUBLE STAMP FED COM 134H	TBD	O Sec 14 20-S 32-E	402' FSL / 2112' FEL	515	810	1770
DOUBLE STAMP FED COM 136H	TBD	O Sec 14 20-S 32-E	427' FSL / 2137' FEL	515	810	1770
DOUBLE STAMP FED COM 153H	TBD	O Sec 14 20-S 32-E	427' FSL / 2162' FEL	515	810	1770
DOUBLE STAMP FED COM 154H	TBD	O Sec 14 20-S 32-E	427' FSL / 2112' FEL	515	810	1770
DOUBLE STAMP FED COM 173H	TBD	O Sec 14 20-S 32-E	568' FSL / 2286' FEL	515	810	1770
DOUBLE STAMP FED COM 174H	TBD	O Sec 14 20-S 32-E	543' FSL / 2286' FEL	515	810	1770

**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flowback Date	First Production Date
DOUBLE STAMP FED COM 113H	TBD	02/17/2025	05/17/2025	08/13/2025	08/30/2025	09/18/2025
DOUBLE STAMP FED COM 114H	TBD	02/17/2025	05/17/2025	08/13/2025	08/30/2025	09/18/2025
DOUBLE STAMP FED COM 116H	TBD	TBD	TBD	TBD	TBD	TBD
DOUBLE STAMP FED COM 123H	TBD	02/17/2025	05/17/2025	08/13/2025	08/30/2025	09/18/2025
DOUBLE STAMP FED COM 124H	TBD	02/17/2025	05/17/2025	08/13/2025	08/30/2025	09/18/2025
DOUBLE STAMP FED COM 126H	TBD	TBD	TBD	TBD	TBD	TBD
DOUBLE STAMP FED COM 128H	TBD	02/17/2025	05/17/2025	08/13/2025	08/30/2025	09/18/2025
DOUBLE STAMP FED COM 133H	TBD	12/01/2026	02/08/2027	02/20/2027	03/10/2027	04/01/2027
DOUBLE STAMP FED COM 134H	TBD	12/01/2026	02/08/2027	02/20/2027	03/10/2027	04/01/2027
DOUBLE STAMP FED COM 136H	TBD	12/01/2026	02/08/2027	02/20/2027	03/10/2027	04/01/2027
DOUBLE STAMP FED COM 153H	TBD	TBD	TBD	TBD	TBD	TBD
DOUBLE STAMP FED COM 154H	TBD	TBD	TBD	TBD	TBD	TBD
DOUBLE STAMP FED COM 173H	TBD	TBD	TBD	TBD	TBD	TBD
DOUBLE STAMP FED COM 174H	TBD	TBD	TBD	TBD	TBD	TBD





## **Tap Rock Operating Natural Gas Management Plan**

### **VI. Separation Equipment:**

Each surface facility design includes the following process equipment: 3-phase separators (1 separator per well), a sales gas scrubber, one or two 3-phase heater treaters, a VRU compressor, multiple water and oil tanks, as well as flare knockouts (HP & LP), and flares (HP & LP). All process vessels will be sized to separate oil, water, gas based upon typical/historical & predicted well performance. Each process vessel will be fitted with an appropriately sized PSV as per ASME code requirements to mitigate vessel rupture and loss of containment. Additionally, the process vessels will be fitted with pressure transmitters tied to the facility control system which will allow operations to monitor pressures and when necessary, shut-in the facility to avoid vessel over-pressure and the potential vent of natural gas. Natural gas will preferentially be sold to pipeline, and only during upset/emergency conditions will gas be directed to the HP flare system. Flash gas from both the 3-phase heater treater will be recompressed using a VRU compressor and this gas will also preferentially be directed to the gas sales pipeline. High-pressure steel oil tanks & water tanks will be fitted with 40 oz thief hatches as well as PRVs to protect the tanks from rupture/collapse. Additionally, the tank vapor outlets and tank vapor capture system will be sized to keep tank pressures below 12 oz. The tank vapor capture system will include a tank vapor blower & knockout as well as a low-pressure flare and knockout. Tank vapors will preferentially be directed to the VRU and the sales gas pipeline. Only during process upsets/emergency conditions will tank vapors be directed to the LP flare system.

### **VII. Operational Practices:**

- During drilling operations, gas meters will be installed at the shakers and Volume Totalizers will be installed on the pits. In the event that elevated gas levels, or a pit gain are observed, returns will be diverted to a gas buster. Gas coming off the gas buster will be combusted at the flare stack. A 10' or taller flare will be located at least 100' from the SHL.
- During completions operations, including stimulation and frac plug drill out operations, hydrocarbon production to surface is minimized. When gas production does occur, gas will be combusted at a flare stack. A 10' or taller flare will be located at least 100' from the SHL.
- During production operations, all process vessels (separators, heater treaters, VRTs, Tanks) will recompress (where necessary) and route gas outlets into the natural gas gathering pipeline. Gas will preferentially be routed to natural gas gathering pipeline and the flare system will be used only during emergency, malfunction, or if the gas does not meet pipeline specifications. In the event of flaring off-specification gas, operations will pull gas samples twice a week and will also route gas back to pipeline as soon as the gas meets specification. Exceptions to this will include only those qualified emergencies as mentioned in the BLM Waste Prevention Rule.



- To comply with state performance standards, separation and storage equipment will be designed to handle the maximum anticipated throughput and pressure to minimize waste and reduce the likelihood of venting gas to atmosphere. Additionally, each storage atmospheric tank (Oil & Water) will be fitted with a level transmitter to facilitate gauging of the tank without opening of the thief hatch. Any gas collected through the tank vent system is expected to be recompressed and routed to sales. However, in the event of an emergency, the tank vapor capture system will be designed to combust the gas using a flare stack fitted with a continuous or automatic ignitor. The flare stack will be properly anchored and will be located a minimum of 100 feet from the well and storage tanks. Operators will conduct weekly AVO inspections. These AVO inspection records will be stored for the required 5-year period and will be made available upon Division request.

#### **VIII. Best Management Practices:**

- When performing routine or preventive maintenance on a vessel or tank, initially all inlet valves are closed, and the vessel or tank is allowed to depressurize through the normal outlet connections to gas sales and/or liquid tanks. Once the vessel or tank is depressurized to lowest acceptable sales outlet pressure, usually around 20 psig, a temporary low-pressure flowline is connected from the vessel or tank to the Vapor Recovery Unit (VRU) for further pressure reduction. Once depressurized to less than 1-2 psig, the remaining natural gas in the vessel or tank is vented to atmosphere through a controlled pressure relief valve. Once the vessel or tank is depressurized to atmospheric pressure, the vessel or tank can be safely opened, and maintenance performed.



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

# Drilling Plan Data Report

11/23/2024

APD ID: 10400092885

Submission Date: 06/16/2023

Highlighted data  
reflects the most  
recent changes

Operator Name: TAP ROCK OPERATING LLC

Well Name: DOUBLE STAMP FED COM

Well Number: 116H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

## Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
14549694	QUATERNARY	3533	0	0	OTHER : None	NONE	N
14549695	RUSTLER ANHYDRITE	2463	1070	1070	ANHYDRITE	NONE	N
14549696	TOP SALT	2103	1430	1430	SALT	OTHER : Salt	N
14549697	YATES	1013	2520	2520	SANDSTONE	NONE	N
14549693	CAPITAN REEF	573	2960	2960	OTHER : Carbonate	NONE	N
14549698	DELAWARE	-1282	4815	4843	SANDSTONE	NONE	N
14549699	LAMAR	-1282	4815	4843	SANDSTONE	NATURAL GAS, OIL	N
14549700	BELL CANYON	-1362	4895	4924	SANDSTONE	NATURAL GAS, OIL	N
14549701	CHERRY CANYON	-1557	5090	5121	SANDSTONE	NATURAL GAS, OIL	N
14549702	BRUSHY CANYON	-2412	5945	5985	SANDSTONE	NATURAL GAS, OIL	N
14549703	BONE SPRING LIME	-4277	7810	7856	LIMESTONE	NATURAL GAS, OIL	N
14549704	AVALON SAND	-4357	7890	7936	OTHER : Upper - Carbonate	NATURAL GAS, OIL	N
14549705	AVALON SAND	-4722	8255	8301	OTHER : Middle - Carbonate	NATURAL GAS, OIL	N
14549706	AVALON SAND	-5067	8600	8647	OTHER : Lower - Carbonate	NATURAL GAS, OIL	N
14549707	BONE SPRING 1ST	-5322	8855	8939	SANDSTONE	NATURAL GAS, OIL	Y

## Section 2 - Blowout Prevention

Operator Name: TAP ROCK OPERATING LLC

Well Name: DOUBLE STAMP FED COM

Well Number: 116H

Pressure Rating (PSI): 5M

Rating Depth: 15000

**Equipment:** At 19,479', a 5M pressure control system is required. The BOP stack consisting of 3 rams with 2 pipe rams, 1 blind ram, and 1 annular preventer will be used below surface casing to TD. See attachments for BOP and choke manifold diagrams. Also present will be an accumulator that meets the requirements of 43 CFR 3172 for the pressure rating of the BOP stack. A rotating head will also be installed as needed. BOP will be inspected and operated as recommended in 43 CFR 3172. A top drive check valve and sub equipped with a full opening valve sized to fit the drill pipe and collars will be available on the rig floor in the open position. The wellhead will be a multi-bowl speed head.

**Requesting Variance?** YES

**Variance request:** Tap Rock requests a variance to run a multi-bowl speed head for setting the Intermediate and Production Strings. Tap Rock requests a variance to drill this well using a co-flex line between the BOP and choke manifold. Certification for proposed co-flex hose is attached. The hose is not required by the manufacturer to be anchored. In the event the specific hose is not available, one of equal or higher rating will be used. Tap Rock requests a variance to have the option of batch drilling this well with other wells on the same pad. If this well is batch drilled, after cementing a casing string, a 5M dry hole cap with bleed off valve will be installed. The rig will then walk to another well on the pad.

**Testing Procedure:** After surface casing is set and the BOP is nipped up, the BOP pressure tests will be made with a third party tester to 250 psi low, 5000 psi high, and the annular preventer will be tested to 250 psi low, 2500 psi high.

**Choke Diagram Attachment:**

Choke\_Diagram\_032918\_20230615153302.pdf

**BOP Diagram Attachment:**

5M\_BOP\_Stack\_20240726124437.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	20	16.0	NEW	API	N	0	1120	0	1120	3533	2413	1120	J-55	75	BUTT	1.13	1.15	DRY	1.6	DRY	1.6
2	INTERMEDIATE	14.75	11.75	NEW	API	N	0	2620	0	2570	3531	963	2620	J-55	47	BUTT	1.13	1.15	DRY	1.6	DRY	1.6
3	INTERMEDIATE	11	8.625	NEW	API	N	0	4753	0	4685	3531	-1152	4753	J-55	32	BUTT	1.13	1.15	DRY	1.6	DRY	1.6
4	PRODUCTION	7.875	5.5	NEW	NON API	N	0	19479	0	8984	3531	-5451	19479	P-110	20	OTHER - Geoconn	1.13	1.15	DRY	1.6	DRY	1.6

Casing Attachments

Operator Name: TAP ROCK OPERATING LLC

Well Name: DOUBLE STAMP FED COM

Well Number: 116H

Casing Attachments

Casing ID: 1StringSURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Casing\_Design\_Assumptions\_20230615153344.pdf

Casing ID: 2StringINTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Casing\_Design\_Assumptions\_20230615153402.pdf

Casing ID: 3StringINTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Casing\_Design\_Assumptions\_20230615153439.pdf

Operator Name: TAP ROCK OPERATING LLC

Well Name: DOUBLE STAMP FED COM

Well Number: 116H

Casing Attachments

Casing ID: 4StringPRODUCTION

Inspection Document:

Spec Document:  
5.5in\_Casing\_Spec\_20240726124601.pdf

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):  
Casing\_Design\_Assumptions\_20230615153513.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	820	655	1.72	13.5	1127	75	Class C	5% NCI + LCM
SURFACE	Tail		820	1120	310	1.33	1.48	412	75	Class C	5% NCI + LCM
INTERMEDIATE	Lead		0	1920	414	2.72	11	1126	65	Class C	Bentonite + 1% CaCL2 + 10% NaCl + LCM +1% MgO
INTERMEDIATE	Tail		1920	2620	265	1.72	13.5	455	50	Class C	Bentonite + 1% CaCL2 + 10% NaCl + LCM +1% MgO
INTERMEDIATE	Lead		0	3753	430	2.72	11	1168	65	Class C	Bentonite + 1% CaCL2 + 8% NaCL + LCM
INTERMEDIATE	Tail		3753	4753	192	1.72	13.5	331	30	Class C	5% NaCL + LCM
PRODUCTION	Lead		5253	8131	173	3.38	10.5	586	0	Class C	Fluid Loss + Dispersant + Retarder + LCM
PRODUCTION	Tail		8131	19479	2129	1.44	13.2	3066	20	Class H	Fluid Loss + Dispersant + Retarder + LCM

**Operator Name:** TAP ROCK OPERATING LLC**Well Name:** DOUBLE STAMP FED COM**Well Number:** 116H**Section 5 - Circulating Medium****Mud System Type:** Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with Onshore Order #2:****Diagram of the equipment for the circulating system in accordance with Onshore Order #2:****Describe what will be on location to control well or mitigate other conditions:** All necessary mud products (i.e., barite, pac) for weight addition and fluid loss control will always be on site. Mud program is subject to change due to hole conditions.**Describe the mud monitoring system utilized:** Electronic Pason mud monitor system complying with 43 CFR 3172 will be used.**Circulating Medium Table**

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1120	OTHER : Fresh Water Spud Mud	8.4	8.4							
1120	2620	OTHER : Brine Water	10	10							
2620	4753	OTHER : Fresh Water/Cut Brine	9	9							
4753	1947 9	OTHER : Fresh Water/Cut Brine	9	9							

**Operator Name:** TAP ROCK OPERATING LLC**Well Name:** DOUBLE STAMP FED COM**Well Number:** 116H

## Section 6 - Test, Logging, Coring

**List of production tests including testing procedures, equipment and safety measures:**

Electric Logging Program: No open-hole logs are planned at this time. GR will be collected while drilling through the MWD tools from KOP to TD. A 2-person mud logging program will be used from KOP to TD. C

**List of open and cased hole logs run in the well:**

GAMMA RAY LOG, MUD LOG/GEOLOGICAL LITHOLOGY LOG,

**Coring operation description for the well:**

No DSTs or cores are planned at this time.

## Section 7 - Pressure

**Anticipated Bottom Hole Pressure:** 4186**Anticipated Surface Pressure:** 2192**Anticipated Bottom Hole Temperature(F):** 160**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations**

DS\_E2\_H2S\_Plan\_20230615153754.pdf

## Section 8 - Other Information

**Proposed horizontal/directional/multi-lateral plan submission:**

DS\_116H\_Directional\_Plan\_20230615153828.pdf

**Other proposed operations facets description:****Other proposed operations facets attachment:**

DS\_116H\_Anticollision\_Report\_20230615153847.pdf

Wellhead\_Diagram\_4string\_20230615153856.pdf

CoFlex\_Certs\_Rev\_20240726124911.pdf

DS\_116H\_Drill\_Plan\_Rev2\_20240917162459.pdf


DS\_WBD\_Q111\_Rev\_20240930155909.pdf

**Other Variance attachment:**













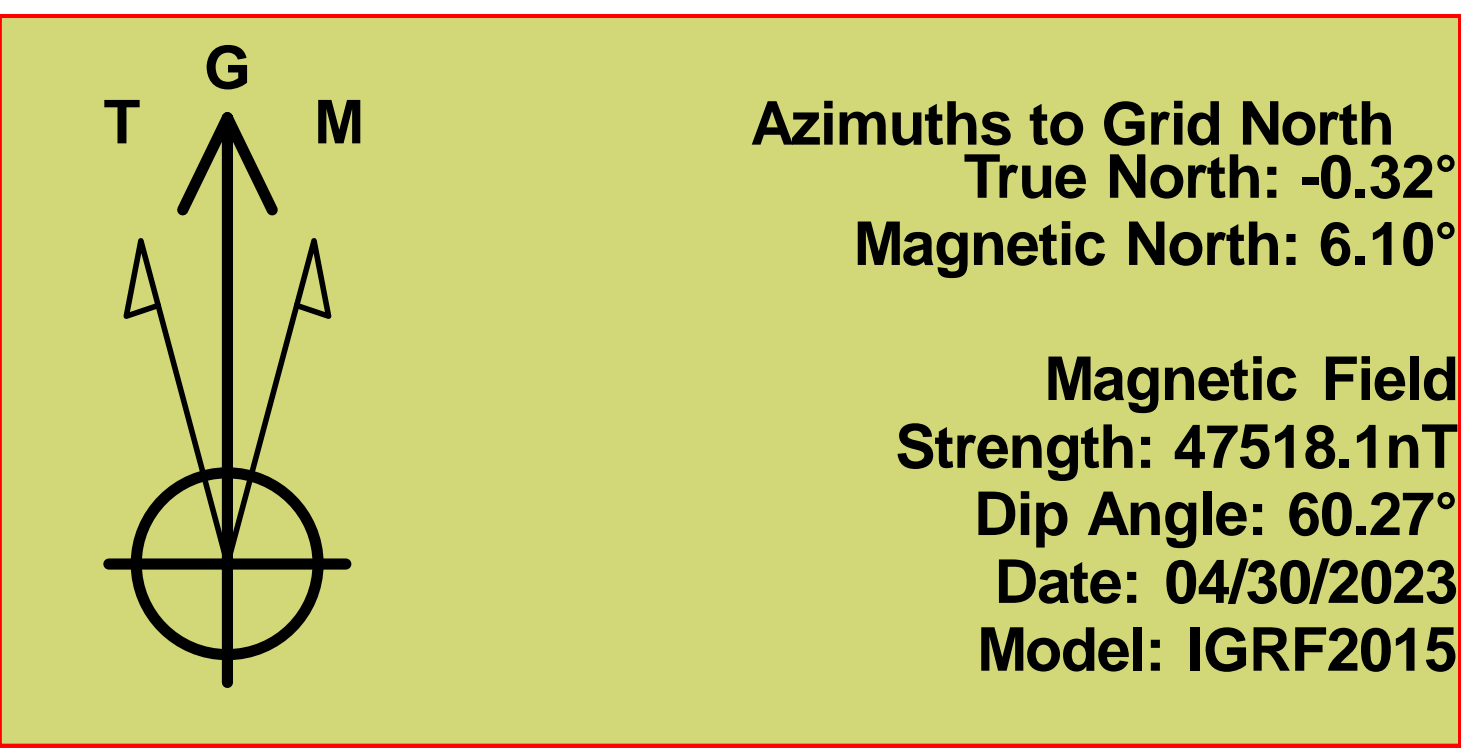

Tap Rock Resources, LLC  
Project: Lea County, NM (NAD 83 NME)  
Site: (Double Stamp Fed) Sec-14, T-20-S, R-32-E  
Well: Double Stamp Fed Com #116H  
Wellbore: OWB  
Design: Plan #1  
Lat: 32° 34' 2.961 N  
Long: 103° 44' 10.927 W  
Pad GL: 3533.0  
KB: KB @ 3559.0usft

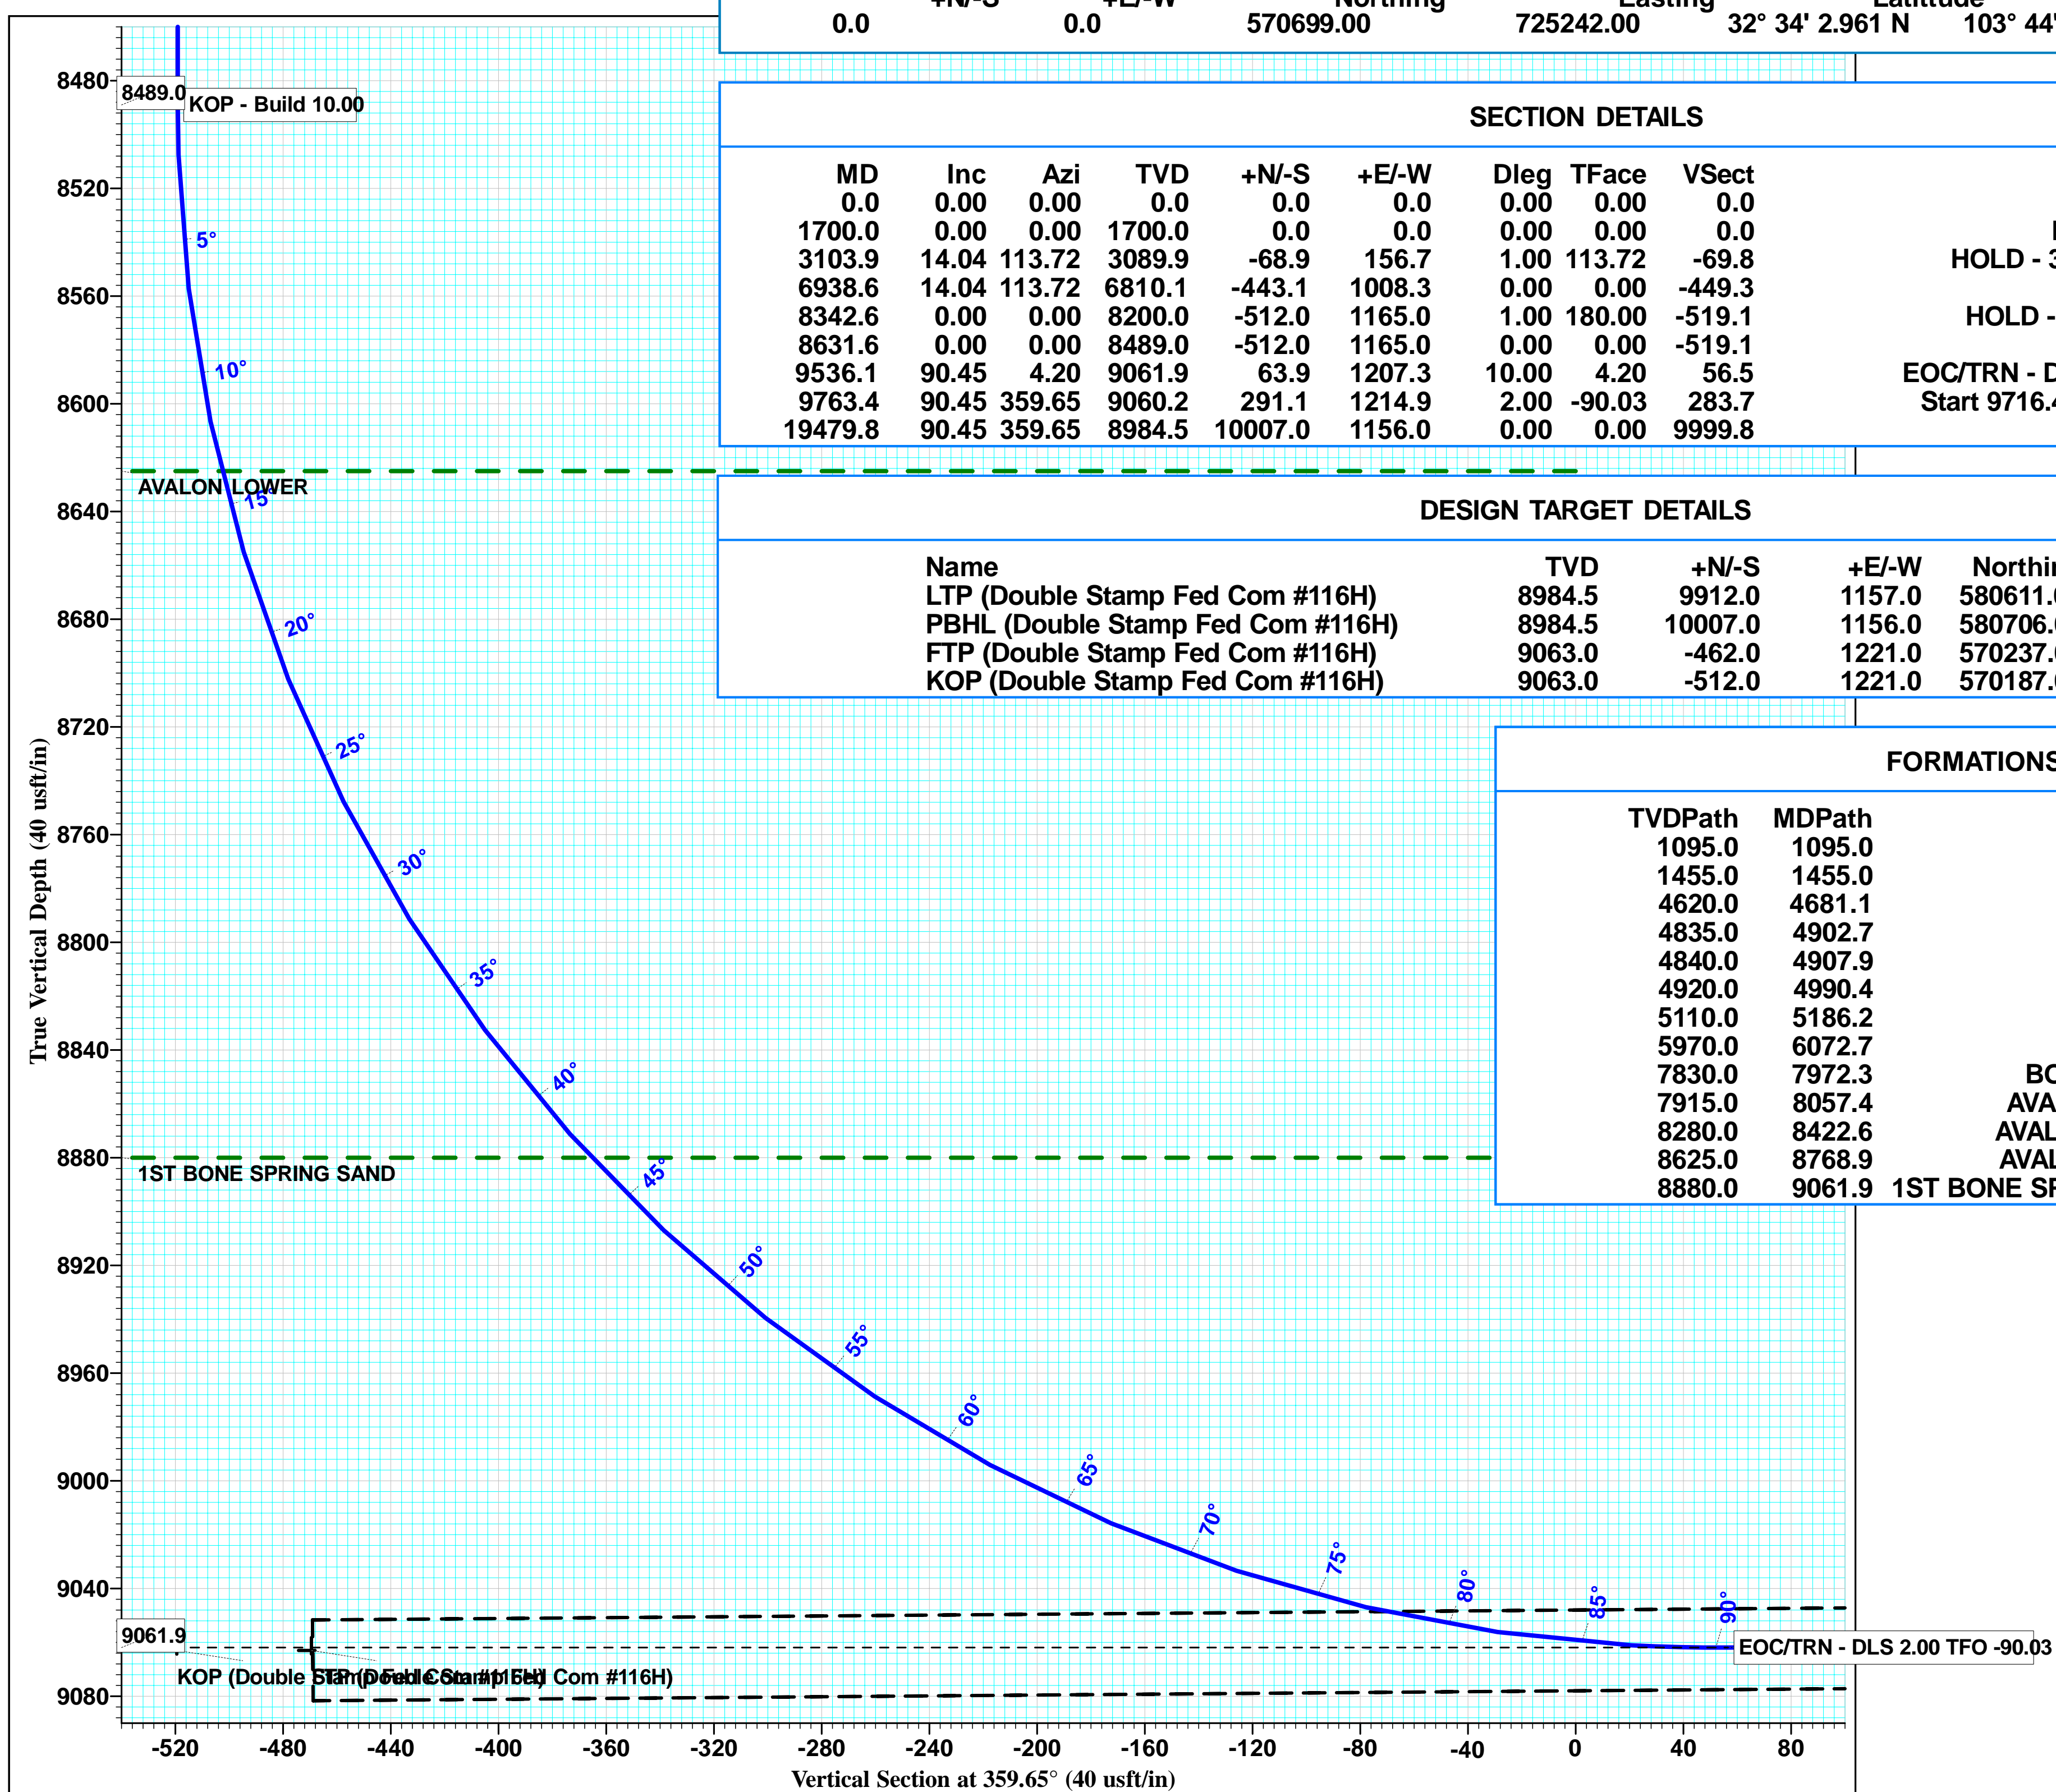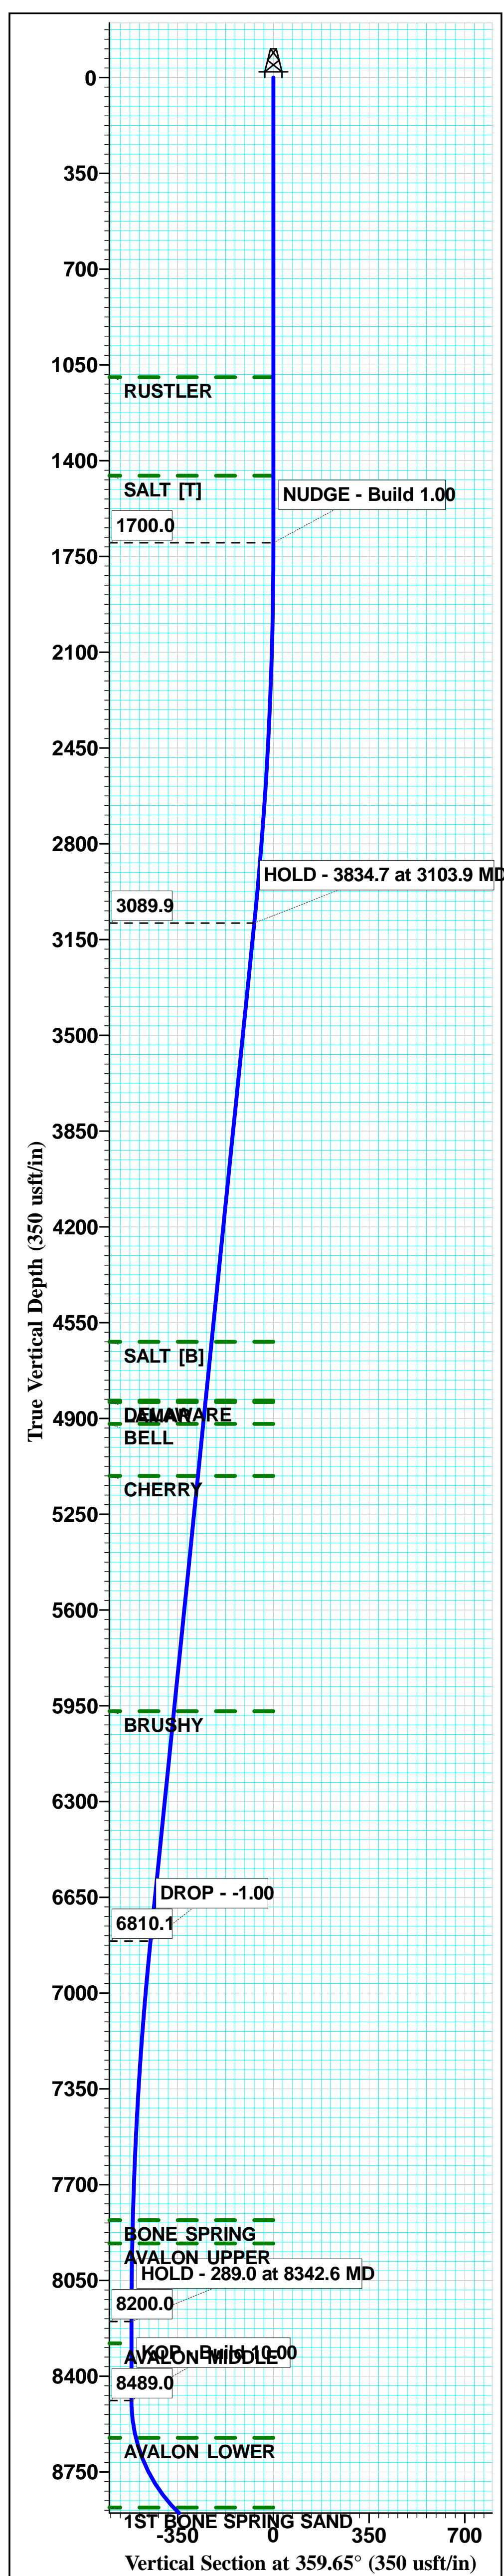

WELL DETAILS: Double Stamp Fed Com #116H									
0.0	+N-S	+E-W	Northing		Easting		Latitude		Longitude
		0.0	570699.00		725242.00	32° 34' 2.961 N	103° 44' 10.927 W		
SECTION DETAILS									
MD	Inc	Azi	TVD	+N-S	+E-W	Dleg	TFace	VSect	Annotation
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
1700.0	0.00	0.00	1700.0	0.0	0.0	0.00	0.00	0.0	NUDGE - Build 1.00
3103.9	14.04	113.72	3089.9	-68.9	156.7	1.00	113.72	-69.8	HOLD - 3834.7 at 3103.9 MD
6938.6	14.04	113.72	6810.1	-443.1	1008.3	0.00	0.00	-449.3	DROP - -1.00
8342.6	0.00	0.00	8200.0	-512.0	1165.0	1.00	180.00	-519.1	HOLD - 289.0 at 8342.6 MD
8631.6	0.00	0.00	8489.0	-512.0	1165.0	0.00	0.00	-519.1	KOP - Build 10.00
9536.1	90.45	4.20	9061.9	63.9	1207.3	10.00	4.20	56.5	EOC/TRN - DLS 2.00 TFO -90.03
9763.4	90.45	359.65	9060.2	291.1	1214.9	2.00	-90.03	283.7	Start 9716.4 hold at 9763.4 MD
19479.8	90.45	359.65	8984.5	10007.0	1156.0	0.00	0.00	9999.8	TD at 19479.8
DESIGN TARGET DETAILS									
Name						TVD	+N-S	+E-W	Northing Easting
LTP (Double Stamp Fed Com #116H)						8984.5	9912.0	1157.0	580611.00 726399.00
PBHL (Double Stamp Fed Com #116H)						8984.5	10007.0	1156.0	580706.00 726398.00
FTP (Double Stamp Fed Com #116H)						9063.0	-462.0	1221.0	570237.00 726463.00
KOP (Double Stamp Fed Com #116H)						9063.0	-512.0	1221.0	570187.00 726463.00

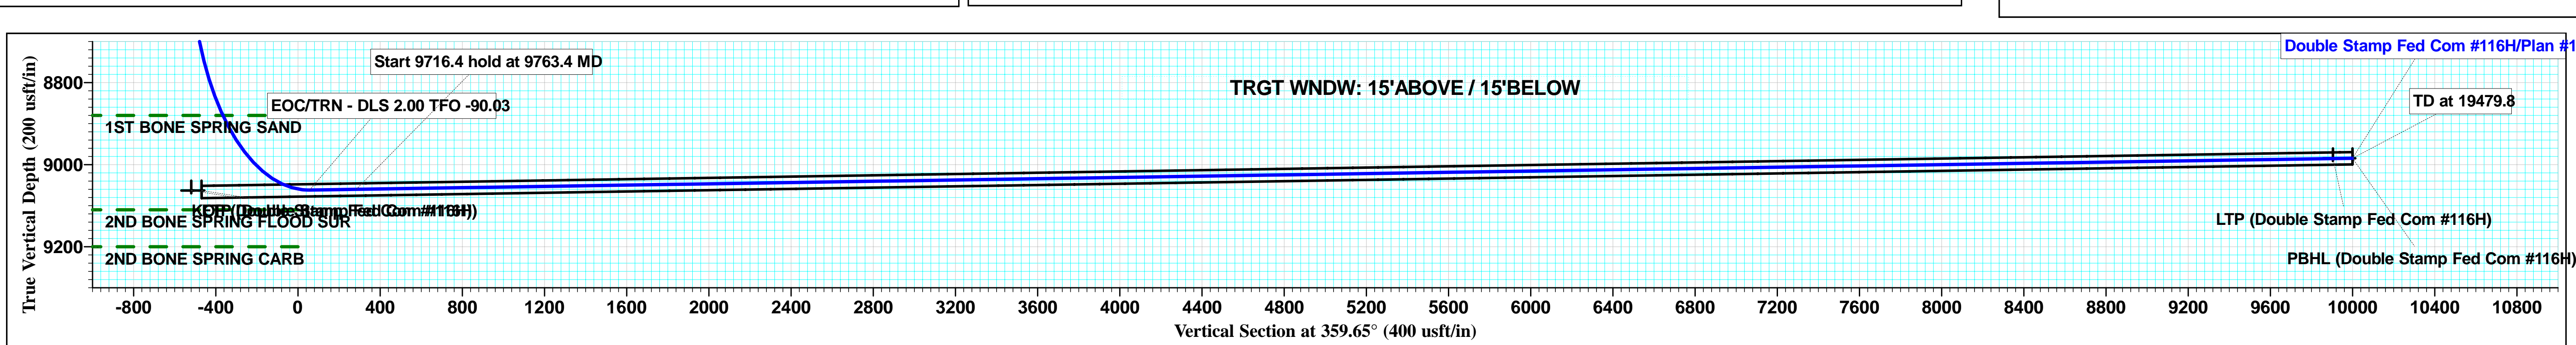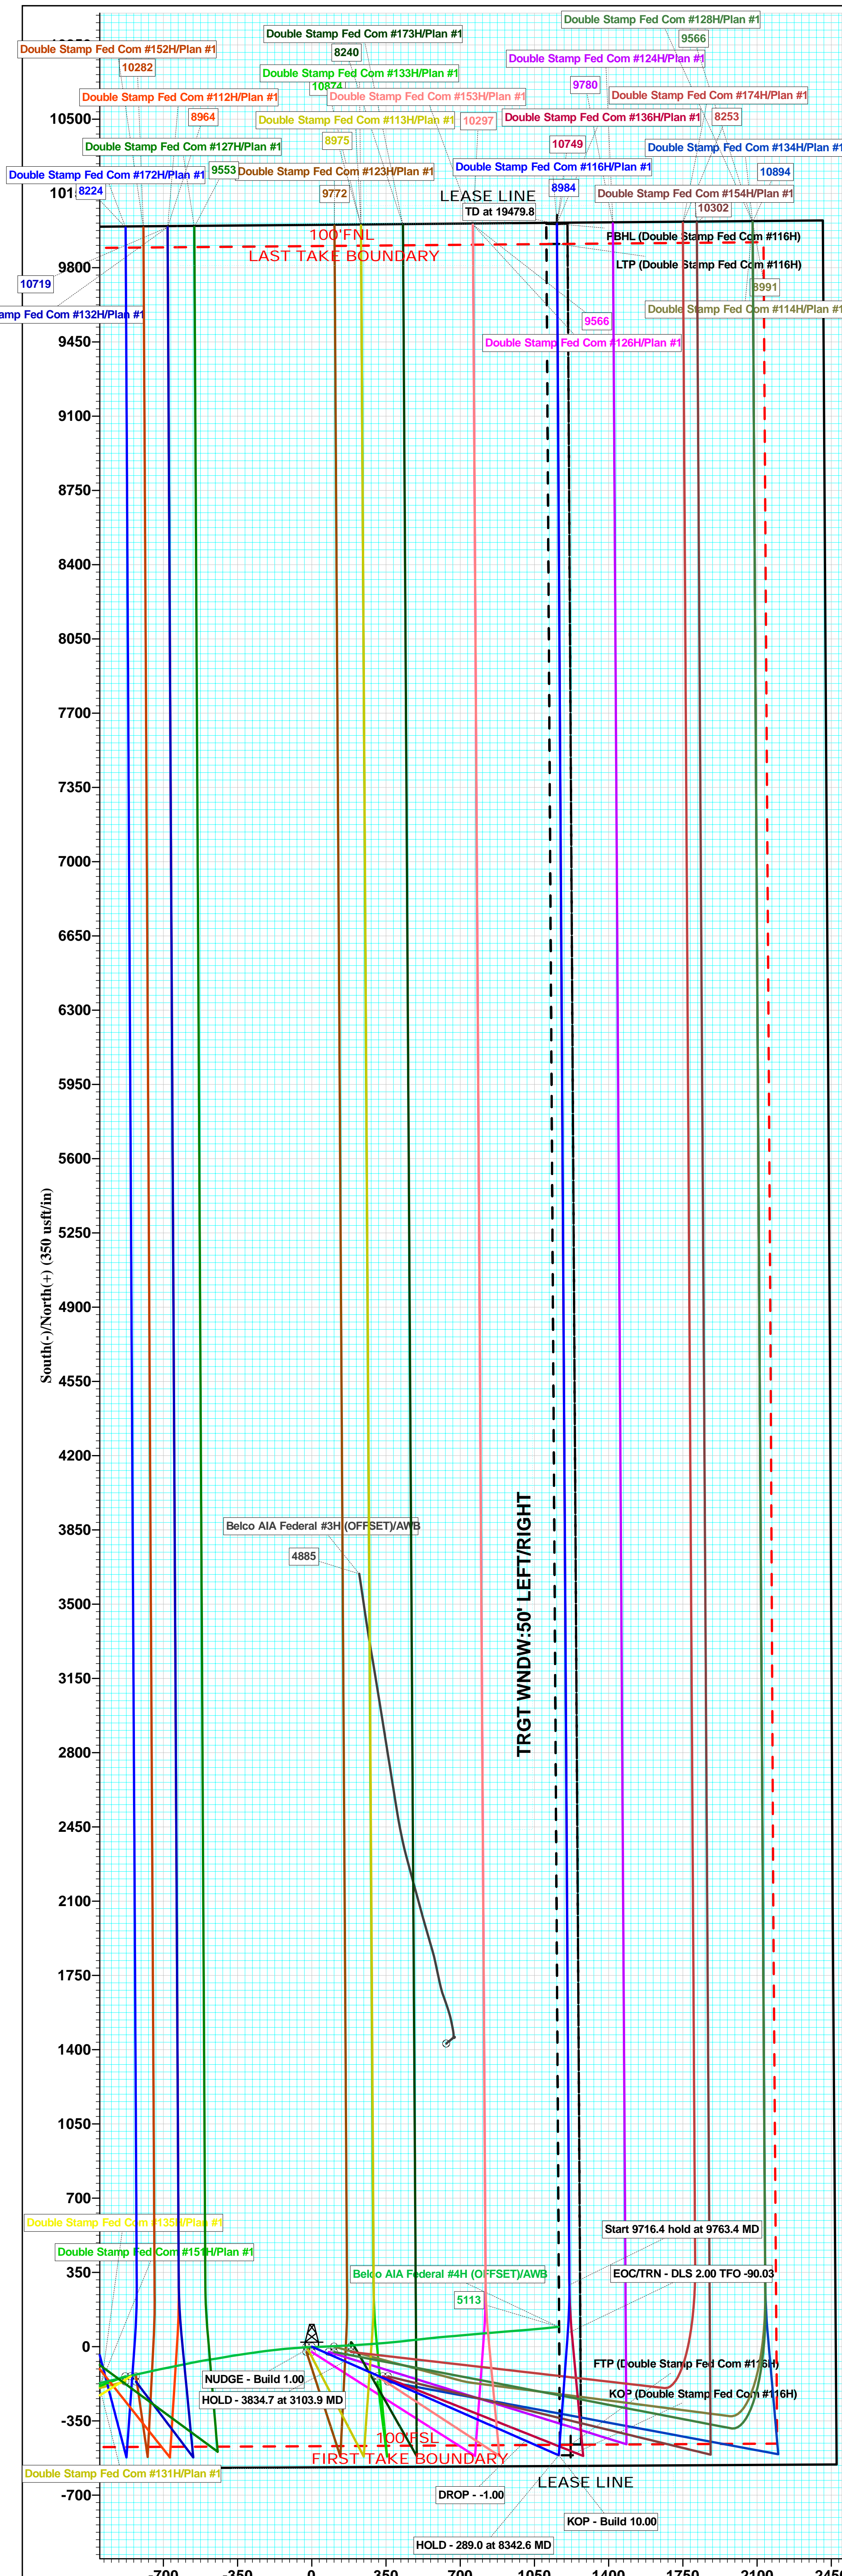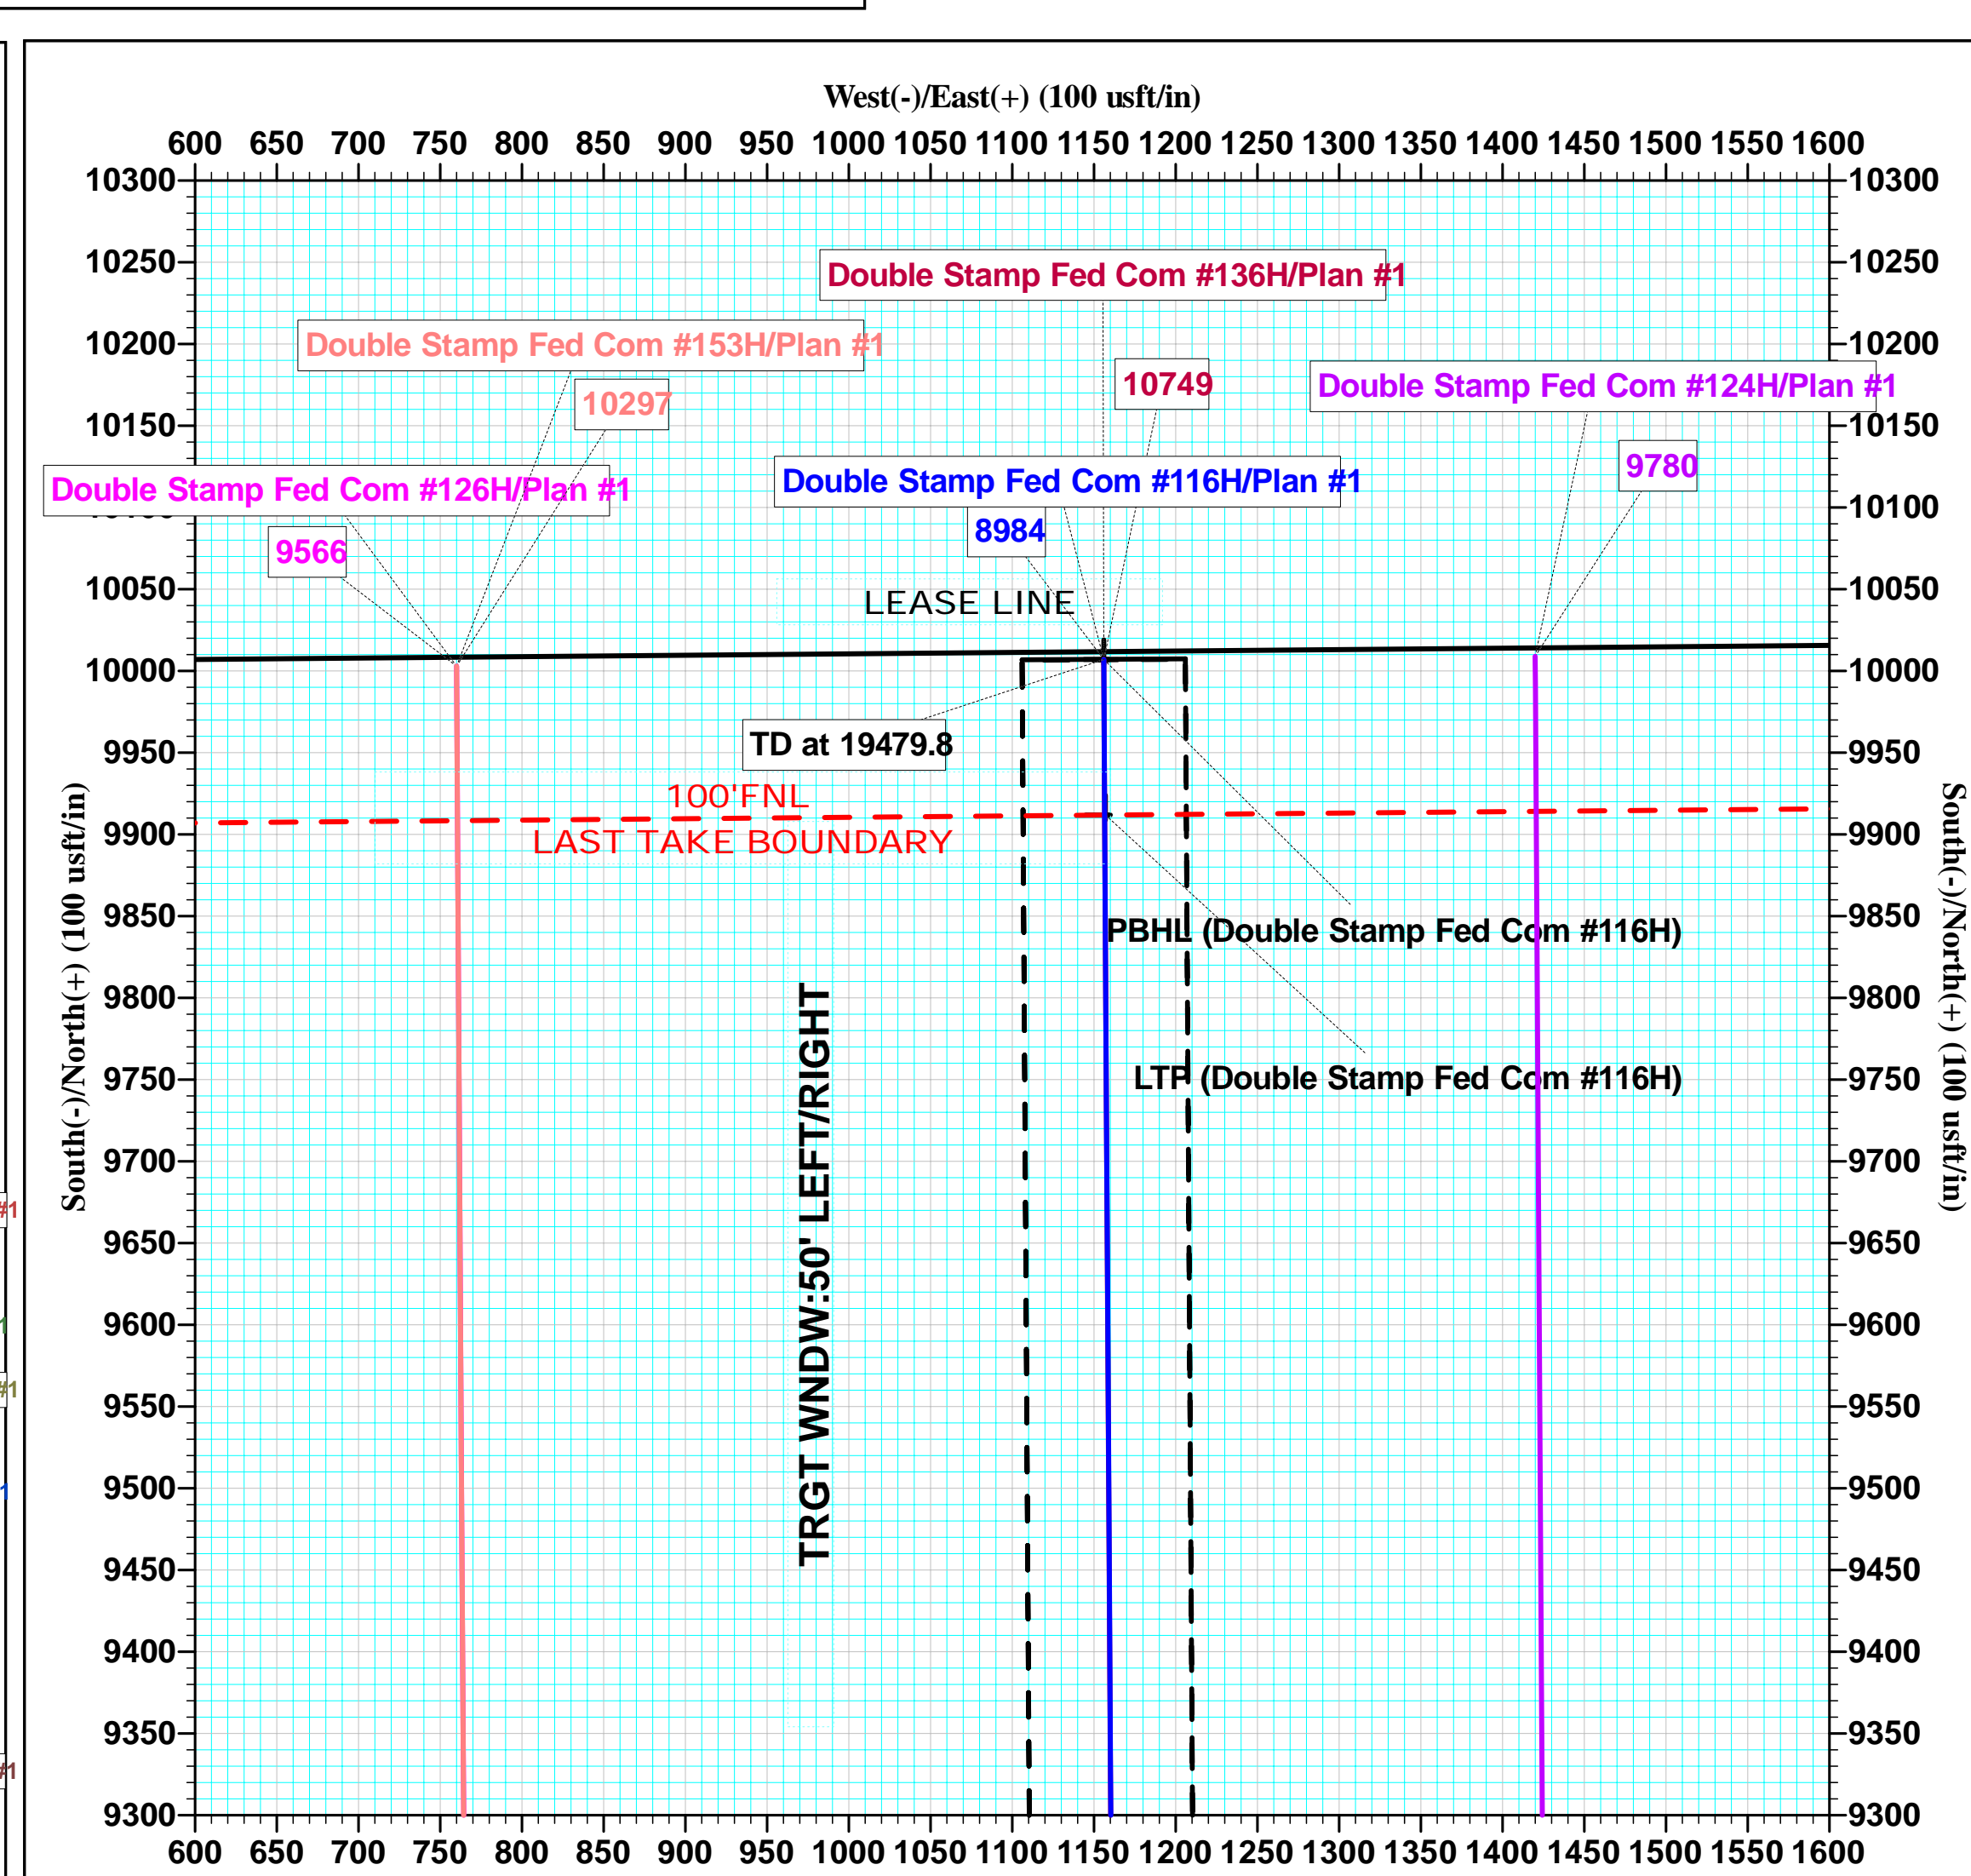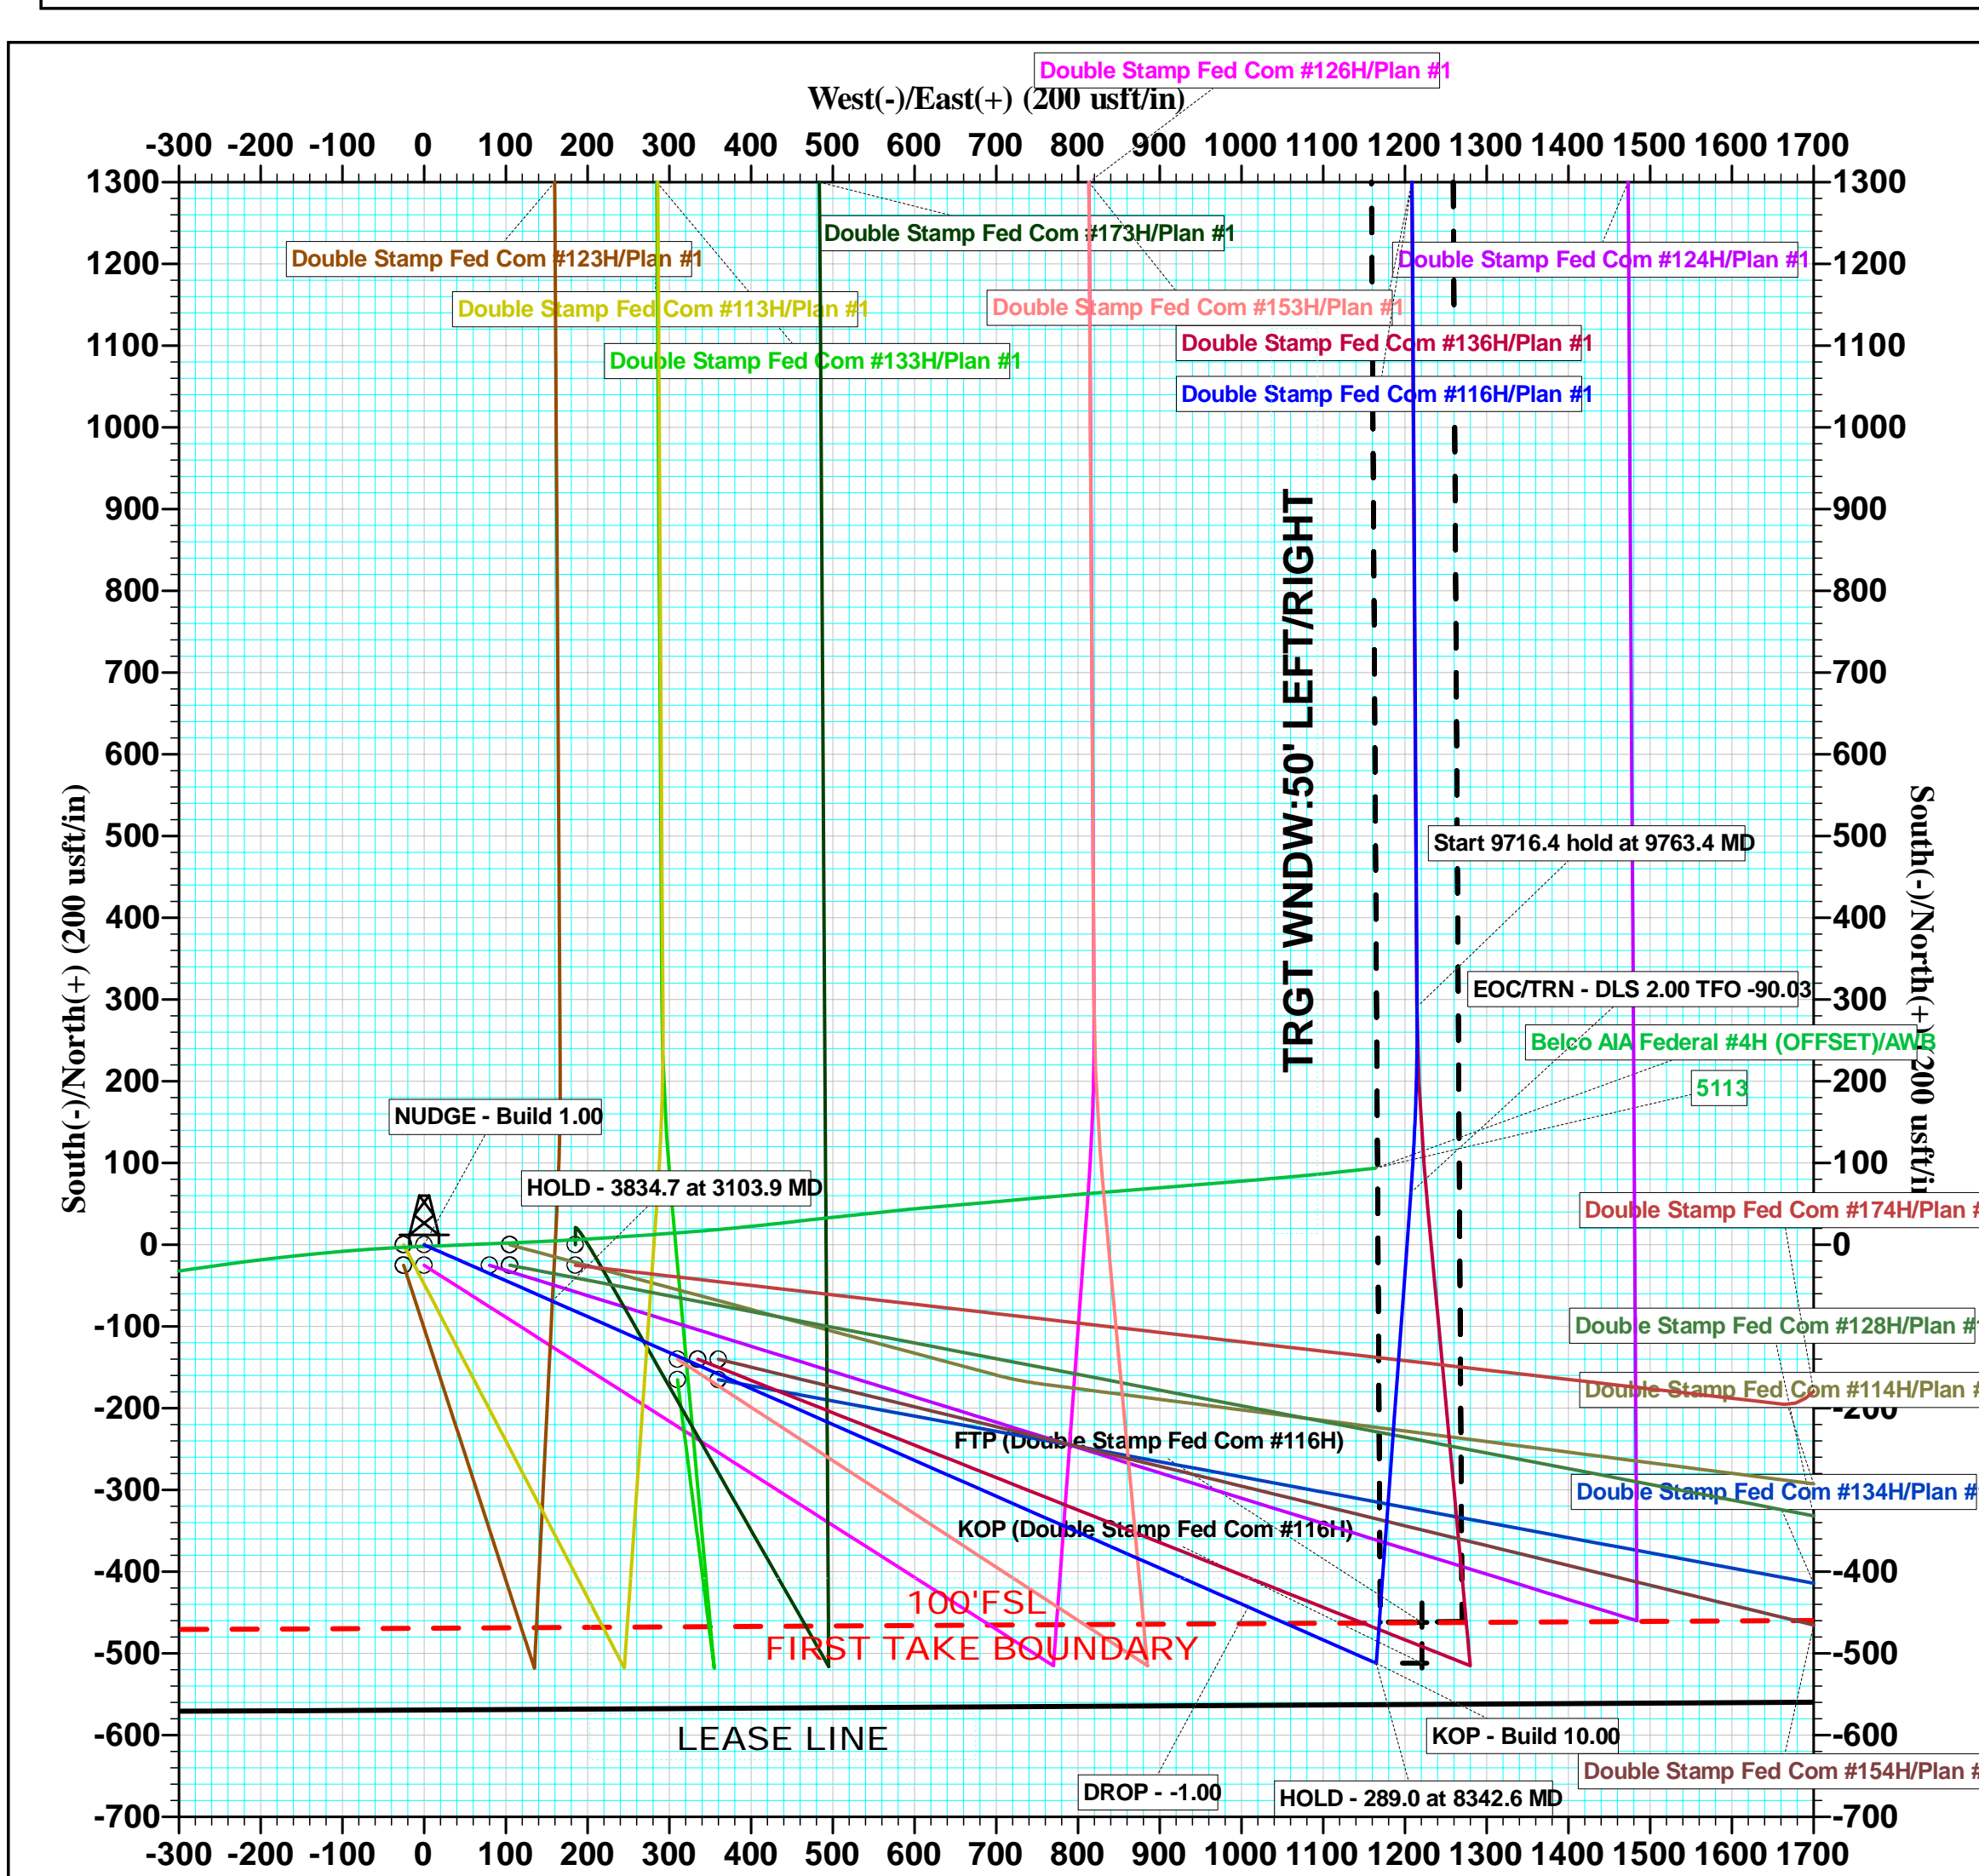





# **Tap Rock Resources, LLC**

**Lea County, NM (NAD 83 NME)  
(Double Stamp Fed) Sec-14\_T-20-S\_R-32-E  
Double Stamp Fed Com #116H**

**OWB**

**Plan: Plan #1**

## **Standard Planning Report**

**04 May, 2023**





# Intrepid Planning Report



<b>Database:</b>	EDM 5000.15 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Double Stamp Fed Com #116H
<b>Company:</b>	Tap Rock Resources, LLC	<b>TVD Reference:</b>	KB @ 3559.0usft
<b>Project:</b>	Lea County, NM (NAD 83 NME)	<b>MD Reference:</b>	KB @ 3559.0usft
<b>Site:</b>	(Double Stamp Fed) Sec-14_T-20-S_R-32-E	<b>North Reference:</b>	Grid
<b>Well:</b>	Double Stamp Fed Com #116H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OWB		
<b>Design:</b>	Plan #1		

<b>Project</b>	Lea County, NM (NAD 83 NME)		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	New Mexico Eastern Zone		

<b>Site</b>	(Double Stamp Fed) Sec-14_T-20-S_R-32-E		
<b>Site Position:</b>		<b>Northing:</b>	570,699.00 usft
<b>From:</b>	Map	<b>Easting:</b>	724,028.00 usft
<b>Position Uncertainty:</b>	0.0 usft	<b>Slot Radius:</b>	13-3/16 "
		<b>Latitude:</b>	32° 34' 3.028 N
		<b>Longitude:</b>	103° 44' 25.113 W
		<b>Grid Convergence:</b>	0.32 °

<b>Well</b>	Double Stamp Fed Com #116H		
<b>Well Position</b>	<b>+N/-S</b>	0.0 usft	<b>Northing:</b> 570,699.00 usft
	<b>+E/-W</b>	1,214.0 usft	<b>Easting:</b> 725,242.00 usft
<b>Position Uncertainty</b>	0.0 usft	<b>Wellhead Elevation:</b>	<b>Latitude:</b> 32° 34' 2.961 N
			<b>Longitude:</b> 103° 44' 10.927 W
			<b>Ground Level:</b> 3,533.0 usft

<b>Wellbore</b>	OWB				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2015	04/30/23	6.42	60.27	47,518.08276069

<b>Design</b>	Plan #1			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PLAN	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (°)</b>
	0.0	0.0	0.0	359.65

<b>Plan Survey Tool Program</b>	<b>Date</b>	05/04/23		
<b>Depth From (usft)</b>	<b>Depth To (usft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Remarks</b>
1	0.0	19,479.8	Plan #1 (OWB)	MWD
				OWSG MWD - Standard

<b>Plan Sections</b>										
<b>Measured Depth (usft)</b>	<b>Inclination (°)</b>	<b>Azimuth (°)</b>	<b>Vertical Depth (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Dogleg Rate (°/100usft)</b>	<b>Build Rate (°/100usft)</b>	<b>Turn Rate (°/100usft)</b>	<b>TFO (°)</b>	<b>Target</b>
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.00	0.00	0.00	0.00	
3,103.9	14.04	113.72	3,089.9	-68.9	156.7	1.00	1.00	0.00	113.72	
6,938.6	14.04	113.72	6,810.1	-443.1	1,008.3	0.00	0.00	0.00	0.00	
8,342.6	0.00	0.00	8,200.0	-512.0	1,165.0	1.00	-1.00	0.00	180.00	
8,631.6	0.00	0.00	8,489.0	-512.0	1,165.0	0.00	0.00	0.00	0.00	
9,536.1	90.45	4.20	9,061.9	63.9	1,207.3	10.00	10.00	0.00	4.20	
9,763.4	90.45	359.65	9,060.2	291.1	1,214.9	2.00	0.00	-2.00	-90.03	
19,479.8	90.45	359.65	8,984.5	10,007.0	1,156.0	0.00	0.00	0.00	0.00	PBHL (Double Stam



# Intrepid Planning Report



**Database:** EDM 5000.15 Single User Db  
**Company:** Tap Rock Resources, LLC  
**Project:** Lea County, NM (NAD 83 NME)  
**Site:** (Double Stamp Fed) Sec-14\_T-20-S\_R-32-E  
**Well:** Double Stamp Fed Com #116H  
**Wellbore:** OWB  
**Design:** Plan #1

**Local Co-ordinate Reference:** Well Double Stamp Fed Com #116H  
**TVD Reference:** KB @ 3559.0usft  
**MD Reference:** KB @ 3559.0usft  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
<b>NUDGE - Build 1.00</b>									
1,800.0	1.00	113.72	1,800.0	-0.4	0.8	-0.4	1.00	1.00	0.00
1,900.0	2.00	113.72	1,900.0	-1.4	3.2	-1.4	1.00	1.00	0.00
2,000.0	3.00	113.72	1,999.9	-3.2	7.2	-3.2	1.00	1.00	0.00
2,100.0	4.00	113.72	2,099.7	-5.6	12.8	-5.7	1.00	1.00	0.00
2,200.0	5.00	113.72	2,199.4	-8.8	20.0	-8.9	1.00	1.00	0.00
2,300.0	6.00	113.72	2,298.9	-12.6	28.7	-12.8	1.00	1.00	0.00
2,400.0	7.00	113.72	2,398.3	-17.2	39.1	-17.4	1.00	1.00	0.00
2,500.0	8.00	113.72	2,497.4	-22.4	51.0	-22.7	1.00	1.00	0.00
2,600.0	9.00	113.72	2,596.3	-28.4	64.6	-28.8	1.00	1.00	0.00
2,700.0	10.00	113.72	2,694.9	-35.0	79.7	-35.5	1.00	1.00	0.00
2,800.0	11.00	113.72	2,793.3	-42.4	96.4	-42.9	1.00	1.00	0.00
2,900.0	12.00	113.72	2,891.2	-50.4	114.6	-51.1	1.00	1.00	0.00
3,000.0	13.00	113.72	2,988.9	-59.1	134.4	-59.9	1.00	1.00	0.00
3,103.9	14.04	113.72	3,089.9	-68.9	156.7	-69.8	1.00	1.00	0.00
<b>HOLD - 3834.7 at 3103.9 MD</b>									
3,200.0	14.04	113.72	3,183.1	-78.2	178.0	-79.3	0.00	0.00	0.00
3,300.0	14.04	113.72	3,280.1	-88.0	200.2	-89.2	0.00	0.00	0.00
3,400.0	14.04	113.72	3,377.1	-97.8	222.4	-99.1	0.00	0.00	0.00
3,500.0	14.04	113.72	3,474.2	-107.5	244.6	-109.0	0.00	0.00	0.00
3,600.0	14.04	113.72	3,571.2	-117.3	266.9	-118.9	0.00	0.00	0.00
3,700.0	14.04	113.72	3,668.2	-127.0	289.1	-128.8	0.00	0.00	0.00
3,800.0	14.04	113.72	3,765.2	-136.8	311.3	-138.7	0.00	0.00	0.00
3,900.0	14.04	113.72	3,862.2	-146.6	333.5	-148.6	0.00	0.00	0.00
4,000.0	14.04	113.72	3,959.2	-156.3	355.7	-158.5	0.00	0.00	0.00
4,100.0	14.04	113.72	4,056.2	-166.1	377.9	-168.4	0.00	0.00	0.00
4,200.0	14.04	113.72	4,153.3	-175.8	400.1	-178.3	0.00	0.00	0.00
4,300.0	14.04	113.72	4,250.3	-185.6	422.3	-188.2	0.00	0.00	0.00
4,400.0	14.04	113.72	4,347.3	-195.4	444.5	-198.1	0.00	0.00	0.00
4,500.0	14.04	113.72	4,444.3	-205.1	466.7	-208.0	0.00	0.00	0.00
4,600.0	14.04	113.72	4,541.3	-214.9	488.9	-217.9	0.00	0.00	0.00
4,700.0	14.04	113.72	4,638.3	-224.6	511.1	-227.8	0.00	0.00	0.00
4,800.0	14.04	113.72	4,735.3	-234.4	533.4	-237.7	0.00	0.00	0.00
4,900.0	14.04	113.72	4,832.3	-244.2	555.6	-247.6	0.00	0.00	0.00
5,000.0	14.04	113.72	4,929.4	-253.9	577.8	-257.4	0.00	0.00	0.00



# Intrepid Planning Report



**Database:** EDM 5000.15 Single User Db  
**Company:** Tap Rock Resources, LLC  
**Project:** Lea County, NM (NAD 83 NME)  
**Site:** (Double Stamp Fed) Sec-14\_T-20-S\_R-32-E  
**Well:** Double Stamp Fed Com #116H  
**Wellbore:** OWB  
**Design:** Plan #1

**Local Co-ordinate Reference:** Well Double Stamp Fed Com #116H  
**TVD Reference:** KB @ 3559.0usft  
**MD Reference:** KB @ 3559.0usft  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,100.0	14.04	113.72	5,026.4	-263.7	600.0	-267.3	0.00	0.00	0.00
5,200.0	14.04	113.72	5,123.4	-273.4	622.2	-277.2	0.00	0.00	0.00
5,300.0	14.04	113.72	5,220.4	-283.2	644.4	-287.1	0.00	0.00	0.00
5,400.0	14.04	113.72	5,317.4	-293.0	666.6	-297.0	0.00	0.00	0.00
5,500.0	14.04	113.72	5,414.4	-302.7	688.8	-306.9	0.00	0.00	0.00
5,600.0	14.04	113.72	5,511.4	-312.5	711.0	-316.8	0.00	0.00	0.00
5,700.0	14.04	113.72	5,608.4	-322.2	733.2	-326.7	0.00	0.00	0.00
5,800.0	14.04	113.72	5,705.5	-332.0	755.4	-336.6	0.00	0.00	0.00
5,900.0	14.04	113.72	5,802.5	-341.8	777.7	-346.5	0.00	0.00	0.00
6,000.0	14.04	113.72	5,899.5	-351.5	799.9	-356.4	0.00	0.00	0.00
6,100.0	14.04	113.72	5,996.5	-361.3	822.1	-366.3	0.00	0.00	0.00
6,200.0	14.04	113.72	6,093.5	-371.0	844.3	-376.2	0.00	0.00	0.00
6,300.0	14.04	113.72	6,190.5	-380.8	866.5	-386.1	0.00	0.00	0.00
6,400.0	14.04	113.72	6,287.5	-390.6	888.7	-396.0	0.00	0.00	0.00
6,500.0	14.04	113.72	6,384.6	-400.3	910.9	-405.9	0.00	0.00	0.00
6,600.0	14.04	113.72	6,481.6	-410.1	933.1	-415.8	0.00	0.00	0.00
6,700.0	14.04	113.72	6,578.6	-419.8	955.3	-425.7	0.00	0.00	0.00
6,800.0	14.04	113.72	6,675.6	-429.6	977.5	-435.6	0.00	0.00	0.00
6,900.0	14.04	113.72	6,772.6	-439.4	999.7	-445.5	0.00	0.00	0.00
6,938.6	14.04	113.72	6,810.1	-443.1	1,008.3	-449.3	0.00	0.00	0.00
<b>DROP - -1.00</b>									
7,000.0	13.43	113.72	6,869.7	-449.0	1,021.7	-455.2	1.00	-1.00	0.00
7,100.0	12.43	113.72	6,967.2	-458.0	1,042.1	-464.4	1.00	-1.00	0.00
7,200.0	11.43	113.72	7,065.0	-466.3	1,061.1	-472.8	1.00	-1.00	0.00
7,300.0	10.43	113.72	7,163.2	-473.9	1,078.4	-480.5	1.00	-1.00	0.00
7,400.0	9.43	113.72	7,261.7	-480.9	1,094.2	-487.6	1.00	-1.00	0.00
7,500.0	8.43	113.72	7,360.5	-487.1	1,108.4	-493.9	1.00	-1.00	0.00
7,600.0	7.43	113.72	7,459.5	-492.7	1,121.0	-499.5	1.00	-1.00	0.00
7,700.0	6.43	113.72	7,558.8	-497.5	1,132.0	-504.4	1.00	-1.00	0.00
7,800.0	5.43	113.72	7,658.3	-501.7	1,141.5	-508.6	1.00	-1.00	0.00
7,900.0	4.43	113.72	7,757.9	-505.1	1,149.4	-512.1	1.00	-1.00	0.00
8,000.0	3.43	113.72	7,857.6	-507.9	1,155.6	-514.9	1.00	-1.00	0.00
8,100.0	2.43	113.72	7,957.5	-509.9	1,160.3	-517.0	1.00	-1.00	0.00
8,200.0	1.43	113.72	8,057.5	-511.3	1,163.4	-518.4	1.00	-1.00	0.00
8,300.0	0.43	113.72	8,157.4	-511.9	1,164.9	-519.0	1.00	-1.00	0.00
8,342.6	0.00	0.00	8,200.0	-512.0	1,165.0	-519.1	1.00	-1.00	0.00
<b>HOLD - 289.0 at 8342.6 MD</b>									
8,400.0	0.00	0.00	8,257.4	-512.0	1,165.0	-519.1	0.00	0.00	0.00
8,500.0	0.00	0.00	8,357.4	-512.0	1,165.0	-519.1	0.00	0.00	0.00
8,600.0	0.00	0.00	8,457.4	-512.0	1,165.0	-519.1	0.00	0.00	0.00
8,631.6	0.00	0.00	8,489.0	-512.0	1,165.0	-519.1	0.00	0.00	0.00
<b>KOP - Build 10.00</b>									
8,650.0	1.84	4.20	8,507.4	-511.7	1,165.0	-518.8	10.00	10.00	0.00
8,700.0	6.84	4.20	8,557.3	-507.9	1,165.3	-515.0	10.00	10.00	0.00
8,750.0	11.84	4.20	8,606.6	-499.8	1,165.9	-506.9	10.00	10.00	0.00
8,800.0	16.84	4.20	8,655.0	-487.5	1,166.8	-494.6	10.00	10.00	0.00
8,850.0	21.84	4.20	8,702.2	-471.0	1,168.0	-478.1	10.00	10.00	0.00
8,900.0	26.84	4.20	8,747.7	-450.4	1,169.5	-457.6	10.00	10.00	0.00
8,950.0	31.84	4.20	8,791.3	-426.0	1,171.3	-433.1	10.00	10.00	0.00
9,000.0	36.84	4.20	8,832.6	-397.9	1,173.4	-405.0	10.00	10.00	0.00
9,050.0	41.84	4.20	8,871.2	-366.3	1,175.7	-373.4	10.00	10.00	0.00
9,100.0	46.84	4.20	8,907.0	-331.4	1,178.3	-338.6	10.00	10.00	0.00
9,150.0	51.84	4.20	8,939.5	-293.6	1,181.0	-300.8	10.00	10.00	0.00



# Intrepid Planning Report



**Database:** EDM 5000.15 Single User Db  
**Company:** Tap Rock Resources, LLC  
**Project:** Lea County, NM (NAD 83 NME)  
**Site:** (Double Stamp Fed) Sec-14\_T-20-S\_R-32-E  
**Well:** Double Stamp Fed Com #116H  
**Wellbore:** OWB  
**Design:** Plan #1

**Local Co-ordinate Reference:** Well Double Stamp Fed Com #116H  
**TVD Reference:** KB @ 3559.0usft  
**MD Reference:** KB @ 3559.0usft  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,200.0	56.84	4.20	8,968.7	-253.1	1,184.0	-260.3	10.00	10.00	0.00
9,250.0	61.84	4.20	8,994.2	-210.2	1,187.2	-217.5	10.00	10.00	0.00
9,300.0	66.84	4.20	9,015.8	-165.3	1,190.5	-172.6	10.00	10.00	0.00
9,350.0	71.84	4.20	9,033.4	-118.6	1,193.9	-125.9	10.00	10.00	0.00
9,400.0	76.84	4.20	9,046.9	-70.6	1,197.4	-77.9	10.00	10.00	0.00
9,450.0	81.84	4.20	9,056.2	-21.6	1,201.0	-29.0	10.00	10.00	0.00
9,500.0	86.84	4.20	9,061.1	28.0	1,204.7	20.6	10.00	10.00	0.00
9,536.1	90.45	4.20	9,061.9	63.9	1,207.3	56.5	10.00	10.00	0.00
EOC/TRN - DLS 2.00 TFO -90.03									
9,600.0	90.45	2.92	9,061.4	127.7	1,211.3	120.3	2.00	0.00	-2.00
9,700.0	90.45	0.92	9,060.7	227.7	1,214.6	220.2	2.00	0.00	-2.00
9,763.4	90.45	359.65	9,060.2	291.1	1,214.9	283.7	2.00	0.00	-2.00
Start 9716.4 hold at 9763.4 MD									
9,800.0	90.45	359.65	9,059.9	327.7	1,214.7	320.2	0.00	0.00	0.00
9,900.0	90.45	359.65	9,059.1	427.6	1,214.1	420.2	0.00	0.00	0.00
10,000.0	90.45	359.65	9,058.3	527.6	1,213.5	520.2	0.00	0.00	0.00
10,100.0	90.45	359.65	9,057.5	627.6	1,212.9	620.2	0.00	0.00	0.00
10,200.0	90.45	359.65	9,056.8	727.6	1,212.3	720.2	0.00	0.00	0.00
10,300.0	90.45	359.65	9,056.0	827.6	1,211.7	820.2	0.00	0.00	0.00
10,400.0	90.45	359.65	9,055.2	927.6	1,211.1	920.2	0.00	0.00	0.00
10,500.0	90.45	359.65	9,054.4	1,027.6	1,210.5	1,020.2	0.00	0.00	0.00
10,600.0	90.45	359.65	9,053.6	1,127.6	1,209.9	1,120.2	0.00	0.00	0.00
10,700.0	90.45	359.65	9,052.9	1,227.6	1,209.3	1,220.2	0.00	0.00	0.00
10,800.0	90.45	359.65	9,052.1	1,327.6	1,208.6	1,320.2	0.00	0.00	0.00
10,900.0	90.45	359.65	9,051.3	1,427.6	1,208.0	1,420.2	0.00	0.00	0.00
11,000.0	90.45	359.65	9,050.5	1,527.6	1,207.4	1,520.2	0.00	0.00	0.00
11,100.0	90.45	359.65	9,049.7	1,627.6	1,206.8	1,620.2	0.00	0.00	0.00
11,200.0	90.45	359.65	9,049.0	1,727.6	1,206.2	1,720.2	0.00	0.00	0.00
11,300.0	90.45	359.65	9,048.2	1,827.6	1,205.6	1,820.2	0.00	0.00	0.00
11,400.0	90.45	359.65	9,047.4	1,927.6	1,205.0	1,920.2	0.00	0.00	0.00
11,500.0	90.45	359.65	9,046.6	2,027.6	1,204.4	2,020.2	0.00	0.00	0.00
11,600.0	90.45	359.65	9,045.9	2,127.6	1,203.8	2,120.2	0.00	0.00	0.00
11,700.0	90.45	359.65	9,045.1	2,227.6	1,203.2	2,220.2	0.00	0.00	0.00
11,800.0	90.45	359.65	9,044.3	2,327.6	1,202.6	2,320.2	0.00	0.00	0.00
11,900.0	90.45	359.65	9,043.5	2,427.5	1,202.0	2,420.2	0.00	0.00	0.00
12,000.0	90.45	359.65	9,042.7	2,527.5	1,201.4	2,520.2	0.00	0.00	0.00
12,100.0	90.45	359.65	9,042.0	2,627.5	1,200.8	2,620.2	0.00	0.00	0.00
12,200.0	90.45	359.65	9,041.2	2,727.5	1,200.2	2,720.2	0.00	0.00	0.00
12,300.0	90.45	359.65	9,040.4	2,827.5	1,199.5	2,820.1	0.00	0.00	0.00
12,400.0	90.45	359.65	9,039.6	2,927.5	1,198.9	2,920.1	0.00	0.00	0.00
12,500.0	90.45	359.65	9,038.8	3,027.5	1,198.3	3,020.1	0.00	0.00	0.00
12,600.0	90.45	359.65	9,038.1	3,127.5	1,197.7	3,120.1	0.00	0.00	0.00
12,700.0	90.45	359.65	9,037.3	3,227.5	1,197.1	3,220.1	0.00	0.00	0.00
12,800.0	90.45	359.65	9,036.5	3,327.5	1,196.5	3,320.1	0.00	0.00	0.00
12,900.0	90.45	359.65	9,035.7	3,427.5	1,195.9	3,420.1	0.00	0.00	0.00
13,000.0	90.45	359.65	9,034.9	3,527.5	1,195.3	3,520.1	0.00	0.00	0.00
13,100.0	90.45	359.65	9,034.2	3,627.5	1,194.7	3,620.1	0.00	0.00	0.00
13,200.0	90.45	359.65	9,033.4	3,727.5	1,194.1	3,720.1	0.00	0.00	0.00
13,300.0	90.45	359.65	9,032.6	3,827.5	1,193.5	3,820.1	0.00	0.00	0.00
13,400.0	90.45	359.65	9,031.8	3,927.5	1,192.9	3,920.1	0.00	0.00	0.00
13,500.0	90.45	359.65	9,031.0	4,027.5	1,192.3	4,020.1	0.00	0.00	0.00
13,600.0	90.45	359.65	9,030.3	4,127.5	1,191.7	4,120.1	0.00	0.00	0.00
13,700.0	90.45	359.65	9,029.5	4,227.5	1,191.1	4,220.1	0.00	0.00	0.00
13,800.0	90.45	359.65	9,028.7	4,327.5	1,190.4	4,320.1	0.00	0.00	0.00



# Intrepid Planning Report



**Database:** EDM 5000.15 Single User Db  
**Company:** Tap Rock Resources, LLC  
**Project:** Lea County, NM (NAD 83 NME)  
**Site:** (Double Stamp Fed) Sec-14\_T-20-S\_R-32-E  
**Well:** Double Stamp Fed Com #116H  
**Wellbore:** OWB  
**Design:** Plan #1

**Local Co-ordinate Reference:** Well Double Stamp Fed Com #116H  
**TVD Reference:** KB @ 3559.0usft  
**MD Reference:** KB @ 3559.0usft  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,900.0	90.45	359.65	9,027.9	4,427.5	1,189.8	4,420.1	0.00	0.00	0.00
14,000.0	90.45	359.65	9,027.2	4,527.4	1,189.2	4,520.1	0.00	0.00	0.00
14,100.0	90.45	359.65	9,026.4	4,627.4	1,188.6	4,620.1	0.00	0.00	0.00
14,200.0	90.45	359.65	9,025.6	4,727.4	1,188.0	4,720.1	0.00	0.00	0.00
14,300.0	90.45	359.65	9,024.8	4,827.4	1,187.4	4,820.1	0.00	0.00	0.00
14,400.0	90.45	359.65	9,024.0	4,927.4	1,186.8	4,920.1	0.00	0.00	0.00
14,500.0	90.45	359.65	9,023.3	5,027.4	1,186.2	5,020.1	0.00	0.00	0.00
14,600.0	90.45	359.65	9,022.5	5,127.4	1,185.6	5,120.1	0.00	0.00	0.00
14,700.0	90.45	359.65	9,021.7	5,227.4	1,185.0	5,220.1	0.00	0.00	0.00
14,800.0	90.45	359.65	9,020.9	5,327.4	1,184.4	5,320.1	0.00	0.00	0.00
14,900.0	90.45	359.65	9,020.1	5,427.4	1,183.8	5,420.1	0.00	0.00	0.00
15,000.0	90.45	359.65	9,019.4	5,527.4	1,183.2	5,520.1	0.00	0.00	0.00
15,100.0	90.45	359.65	9,018.6	5,627.4	1,182.6	5,620.1	0.00	0.00	0.00
15,200.0	90.45	359.65	9,017.8	5,727.4	1,182.0	5,720.1	0.00	0.00	0.00
15,300.0	90.45	359.65	9,017.0	5,827.4	1,181.4	5,820.1	0.00	0.00	0.00
15,400.0	90.45	359.65	9,016.2	5,927.4	1,180.7	5,920.1	0.00	0.00	0.00
15,500.0	90.45	359.65	9,015.5	6,027.4	1,180.1	6,020.1	0.00	0.00	0.00
15,600.0	90.45	359.65	9,014.7	6,127.4	1,179.5	6,120.0	0.00	0.00	0.00
15,700.0	90.45	359.65	9,013.9	6,227.4	1,178.9	6,220.0	0.00	0.00	0.00
15,800.0	90.45	359.65	9,013.1	6,327.4	1,178.3	6,320.0	0.00	0.00	0.00
15,900.0	90.45	359.65	9,012.4	6,427.4	1,177.7	6,420.0	0.00	0.00	0.00
16,000.0	90.45	359.65	9,011.6	6,527.3	1,177.1	6,520.0	0.00	0.00	0.00
16,100.0	90.45	359.65	9,010.8	6,627.3	1,176.5	6,620.0	0.00	0.00	0.00
16,200.0	90.45	359.65	9,010.0	6,727.3	1,175.9	6,720.0	0.00	0.00	0.00
16,300.0	90.45	359.65	9,009.2	6,827.3	1,175.3	6,820.0	0.00	0.00	0.00
16,400.0	90.45	359.65	9,008.5	6,927.3	1,174.7	6,920.0	0.00	0.00	0.00
16,500.0	90.45	359.65	9,007.7	7,027.3	1,174.1	7,020.0	0.00	0.00	0.00
16,600.0	90.45	359.65	9,006.9	7,127.3	1,173.5	7,120.0	0.00	0.00	0.00
16,700.0	90.45	359.65	9,006.1	7,227.3	1,172.9	7,220.0	0.00	0.00	0.00
16,800.0	90.45	359.65	9,005.3	7,327.3	1,172.3	7,320.0	0.00	0.00	0.00
16,900.0	90.45	359.65	9,004.6	7,427.3	1,171.6	7,420.0	0.00	0.00	0.00
17,000.0	90.45	359.65	9,003.8	7,527.3	1,171.0	7,520.0	0.00	0.00	0.00
17,100.0	90.45	359.65	9,003.0	7,627.3	1,170.4	7,620.0	0.00	0.00	0.00
17,200.0	90.45	359.65	9,002.2	7,727.3	1,169.8	7,720.0	0.00	0.00	0.00
17,300.0	90.45	359.65	9,001.4	7,827.3	1,169.2	7,820.0	0.00	0.00	0.00
17,400.0	90.45	359.65	9,000.7	7,927.3	1,168.6	7,920.0	0.00	0.00	0.00
17,500.0	90.45	359.65	8,999.9	8,027.3	1,168.0	8,020.0	0.00	0.00	0.00
17,600.0	90.45	359.65	8,999.1	8,127.3	1,167.4	8,120.0	0.00	0.00	0.00
17,700.0	90.45	359.65	8,998.3	8,227.3	1,166.8	8,220.0	0.00	0.00	0.00
17,800.0	90.45	359.65	8,997.5	8,327.3	1,166.2	8,320.0	0.00	0.00	0.00
17,900.0	90.45	359.65	8,996.8	8,427.3	1,165.6	8,420.0	0.00	0.00	0.00
18,000.0	90.45	359.65	8,996.0	8,527.3	1,165.0	8,520.0	0.00	0.00	0.00
18,100.0	90.45	359.65	8,995.2	8,627.2	1,164.4	8,620.0	0.00	0.00	0.00
18,200.0	90.45	359.65	8,994.4	8,727.2	1,163.8	8,720.0	0.00	0.00	0.00
18,300.0	90.45	359.65	8,993.7	8,827.2	1,163.2	8,820.0	0.00	0.00	0.00
18,400.0	90.45	359.65	8,992.9	8,927.2	1,162.5	8,920.0	0.00	0.00	0.00
18,500.0	90.45	359.65	8,992.1	9,027.2	1,161.9	9,020.0	0.00	0.00	0.00
18,600.0	90.45	359.65	8,991.3	9,127.2	1,161.3	9,120.0	0.00	0.00	0.00
18,700.0	90.45	359.65	8,990.5	9,227.2	1,160.7	9,220.0	0.00	0.00	0.00
18,800.0	90.45	359.65	8,989.8	9,327.2	1,160.1	9,320.0	0.00	0.00	0.00
18,900.0	90.45	359.65	8,989.0	9,427.2	1,159.5	9,419.9	0.00	0.00	0.00
19,000.0	90.45	359.65	8,988.2	9,527.2	1,158.9	9,519.9	0.00	0.00	0.00
19,100.0	90.45	359.65	8,987.4	9,627.2	1,158.3	9,619.9	0.00	0.00	0.00
19,200.0	90.45	359.65	8,986.6	9,727.2	1,157.7	9,719.9	0.00	0.00	0.00





# Intrepid Planning Report



**Database:** EDM 5000.15 Single User Db  
**Company:** Tap Rock Resources, LLC  
**Project:** Lea County, NM (NAD 83 NME)  
**Site:** (Double Stamp Fed) Sec-14\_T-20-S\_R-32-E  
**Well:** Double Stamp Fed Com #116H  
**Wellbore:** OWB  
**Design:** Plan #1

**Local Co-ordinate Reference:** Well Double Stamp Fed Com #116H  
**TVD Reference:** KB @ 3559.0usft  
**MD Reference:** KB @ 3559.0usft  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

## Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
19,300.0	90.45	359.65	8,985.9	9,827.2	1,157.1	9,819.9	0.00	0.00	0.00
19,400.0	90.45	359.65	8,985.1	9,927.2	1,156.5	9,919.9	0.00	0.00	0.00
19,479.8	90.45	359.65	8,984.5	10,007.0	1,156.0	9,999.8	0.00	0.00	0.00
TD at 19479.8									

## Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
PBHL (Double Stamp I - plan hits target center - Rectangle (sides W100.0 H10,469.0 D30.0)	-0.45	359.65	8,984.5	10,007.0	1,156.0	580,706.00	726,398.00	32° 35' 41.916 N	103° 43' 56.759 W
LTP (Double Stamp Fe - plan misses target center by 0.9usft at 19384.8usft MD (8985.2 TVD, 9912.0 N, 1156.6 E) - Point	0.00	0.00	8,984.5	9,912.0	1,157.0	580,611.00	726,399.00	32° 35' 40.976 N	103° 43' 56.753 W
KOP (Double Stamp F - plan misses target center by 241.8usft at 9087.9usft MD (8898.6 TVD, -340.1 N, 1177.6 E) - Point	0.00	0.00	9,063.0	-512.0	1,221.0	570,187.00	726,463.00	32° 33' 57.827 N	103° 43' 56.693 W
FTP (Double Stamp Fe - plan misses target center by 207.6usft at 9105.2usft MD (8910.5 TVD, -327.6 N, 1178.5 E) - Point	0.00	0.00	9,063.0	-462.0	1,221.0	570,237.00	726,463.00	32° 33' 58.322 N	103° 43' 56.690 W

## Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,095.0	1,095.0	RUSTLER			
1,455.0	1,455.0	SALT [T]			
4,681.1	4,620.0	SALT [B]			
4,902.7	4,835.0	DELAWARE			
4,907.9	4,840.0	LAMAR			
4,990.4	4,920.0	BELL			
5,186.2	5,110.0	CHERRY			
6,072.7	5,970.0	BRUSHY			
7,972.3	7,830.0	BONE SPRING			
8,057.4	7,915.0	AVALON UPPER			
8,422.6	8,280.0	AVALON MIDDLE			
8,768.9	8,625.0	AVALON LOWER			
9,061.9	8,880.0	1ST BONE SPRING SAND			



# Intrepid Planning Report



<b>Database:</b>	EDM 5000.15 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Double Stamp Fed Com #116H
<b>Company:</b>	Tap Rock Resources, LLC	<b>TVD Reference:</b>	KB @ 3559.0usft
<b>Project:</b>	Lea County, NM (NAD 83 NME)	<b>MD Reference:</b>	KB @ 3559.0usft
<b>Site:</b>	(Double Stamp Fed) Sec-14_T-20-S_R-32-E	<b>North Reference:</b>	Grid
<b>Well:</b>	Double Stamp Fed Com #116H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OWB		
<b>Design:</b>	Plan #1		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,700.0	1,700.0	0.0	0.0	NUDGE - Build 1.00
3,103.9	3,089.9	-68.9	156.7	HOLD - 3834.7 at 3103.9 MD
6,938.6	6,810.1	-443.1	1,008.3	DROP - -1.00
8,342.6	8,200.0	-512.0	1,165.0	HOLD - 289.0 at 8342.6 MD
8,631.6	8,489.0	-512.0	1,165.0	KOP - Build 10.00
9,536.1	9,061.9	63.9	1,207.3	EOC/TRN - DLS 2.00 TFO -90.03
9,763.4	9,060.2	291.1	1,214.9	Start 9716.4 hold at 9763.4 MD
19,479.8	8,984.5	10,007.0	1,156.0	TD at 19479.8

## PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

<b>OPERATOR'S NAME:</b>	Tap Rock Operating LLC
<b>WELL NAME &amp; NO.:</b>	Double Stamp Fed Com 116H
<b>LOCATION:</b>	Sec 14-20S-32E-NMP
<b>COUNTY:</b>	Lea County, New Mexico <span style="float: right;">▼</span>

COA

<b>H<sub>2</sub>S</b>	<input type="radio"/> No <span style="margin-left: 100px;"><input checked="" type="radio"/> Yes</span>			
<b>Potash / WIPP</b>	<input type="radio"/> None <span style="margin-left: 20px;"><input type="radio"/> Secretary</span> <span style="margin-left: 20px;"><input checked="" type="radio"/> R-111-Q</span> <span style="margin-left: 20px;"><input type="radio"/> Open Annulus</span> 4-String Design: Open 2nd Int x Production Casing (ICP 2 above Relief Zone) <span style="float: right;"><input type="radio"/> WIPP</span>			
<b>Cave / Karst</b>	<input type="radio"/> Low	<input checked="" type="radio"/> Medium	<input type="radio"/> High	<input type="radio"/> Critical
<b>Wellhead</b>	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both	<input type="radio"/> Diverter
<b>Cementing</b>	<input type="checkbox"/> Primary Squeeze	<input type="checkbox"/> Cont. Squeeze	<input type="checkbox"/> EchoMeter	<input type="checkbox"/> DV Tool
<b>Special Req</b>	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit
<b>Waste Prev.</b>	<input type="radio"/> Self-Certification	<input type="radio"/> Waste Min. Plan	<input checked="" type="radio"/> APD Submitted prior to 06/10/2024	
<b>Additional Language</b>	<input checked="" type="checkbox"/> Flex Hose	<input type="checkbox"/> Casing Clearance	<input type="checkbox"/> Pilot Hole	<input type="checkbox"/> Break Testing
	<input checked="" type="checkbox"/> Four-String	<input type="checkbox"/> Offline Cementing	<input checked="" type="checkbox"/> Fluid-Filled	

### A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H<sub>2</sub>S) Drilling Plan shall be activated 500 feet prior to drilling into the **Bone Springs & Delaware** formations. As a result, the Hydrogen Sulfide area must meet all requirements from 43 CFR 3176, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

*APD is within the R-111-Q defined boundary. Operator must follow all procedures and requirements listed within the updated order.*

### B. CASING

1. The **16** inch surface casing shall be set at approximately **1120** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 pounds compressive strength**, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

**Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.**

2. The minimum required fill of cement behind the **11-3/4** inch intermediate casing is:

- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, Capitan Reef, or potash.**

**Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.**

3. The minimum required fill of cement behind the **8-5/8** inch intermediate casing (set at 4550' per BLM geologist) is:

- Cement should tie-back **500 feet** into the previous casing but not higher than USGS Marker Bed No. 126. **Operator must verify top of cement per R-111-Q requirements.** Submit results to the BLM. If cement does not circulate, contact the appropriate BLM office. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, Capitan Reef, or potash.**

4. The minimum required fill of cement behind the **5-1/2** inch production casing is:

- Cement should tie-back **500 feet** into the previous casing but not higher than USGS Marker Bed No. 126. **Operator must verify top of cement per R-111-Q requirements.** Submit results to the BLM. If cement does not circulate, contact the appropriate BLM office. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, Capitan Reef, or potash.**

## **C. PRESSURE CONTROL**

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
2. Operator has proposed a multi-bowl wellhead assembly. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.

#### **D. SPECIAL REQUIREMENT (S)**

##### **Communitization Agreement**

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in 43 CFR 3171 and 3172.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

## GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

### Contact Lea County Petroleum Engineering Inspection Staff:

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
  - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
  - b. When the operator proposes to set surface casing with Spudder Rig
    - i. Notify the BLM when moving in and removing the Spudder Rig.
    - ii. Notify the BLM when moving in the 2<sup>nd</sup> Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
    - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2<sup>nd</sup> Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

### A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following

- conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
  4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
  5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
  6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
  7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
  8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

## **B. PRESSURE CONTROL**

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.



3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
  - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - iii. Manufacturer representative shall install the test plug for the initial BOP test.
  - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
  - v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
  - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
  - iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).



- iv. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- v. The results of the test shall be reported to the appropriate BLM office.
- vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- vii. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

### **C. DRILLING MUD**

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

### **D. WASTE MATERIAL AND FLUIDS**

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.



## Hydrogen Sulfide Drilling

### Operations Plan

#### Tap Rock Resources

##### 1 H2S safety instructions to the following:

- Characteristics of H2S
- Physical effects and hazards
- Principal and operation of H2S detectors, warning system and briefing areas
- Evacuation procedures, routes and first aid
- Proper use of safety equipment & life support systems
- Essential personnel meeting medical evaluation criteria will receive additional training on the proper use of 30min pressure demand air packs

##### 2 H2S Detection and Alarm Systems:

- H2S sensor/detectors to be located on the drilling rig floor, in the base of the sub structure / cellar area, on the mud pits in the shale shaker area. Additional H2S detectors may be placed as deemed necessary
- An audio alarm system will be installed on the derrick floor and in the doghouse

##### 3 Windssocks and / Wind Streamers:

- Windssocks at mud pit area should be high enough to be visible
- Windssock on the rig floor and / top of doghouse should be high enough to be visible

##### 4 Condition Flags and Signs:

- Warning sign on access road to location
- Flags to be displayed on sign at entrance to location
  - Green Flag – Normal Safe Operation Condition
  - Yellow Flag – Potential Pressure and Danger
  - Red Flag – Danger (H2S present in dangerous concentrations) Only H2S trained personnel admitted on location

##### 5 Well Control Equipment:

- See Drilling Operations Plan Schematics

##### 6 Communication:

- While working under masks chalkboards will be used for communications
- Hand signals will be used where chalk board is inappropriate
- Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.



#### 7 Drilling Stem Testing:

- No DST cores are planned at this time

8 Drilling contractor supervisor will be required to be familiar with the effects H<sub>2</sub>S has on tubulars good and other mechanical equipment


9 If H<sub>2</sub>S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H<sub>2</sub>S scavengers if necessary

#### 11 Emergency Contacts

<b>Emergency Contacts</b>		
Carlsbad Police Department	575.887.7551	911
Carlsbad Medical Center	575.887.4100	911
Eddy County Fire Service	575.628.5450	911
Eddy County Sherriff	575.887.7551	911
Lea County Fire Service	575.391.2983	911
Lea County Sherriff	575.396.3611	911
Jal Police Department	575.395.2121	911
Jal Fire Department	575.395.2221	911
Tap Rock Resources	720.772.5090	




Rig Diagram  
Double Stamp Fed Com  
E2 Pad  
Tap Rock Operating, LLC  
14-20S-32E  
Lea County, NM

- N  
↑
- Briefing Area
  - Current Well
  - △ Flare Stack
  - ◇ H2S Monitor
  - ⌚ Wind Indicator
  - Mud Gas Separator

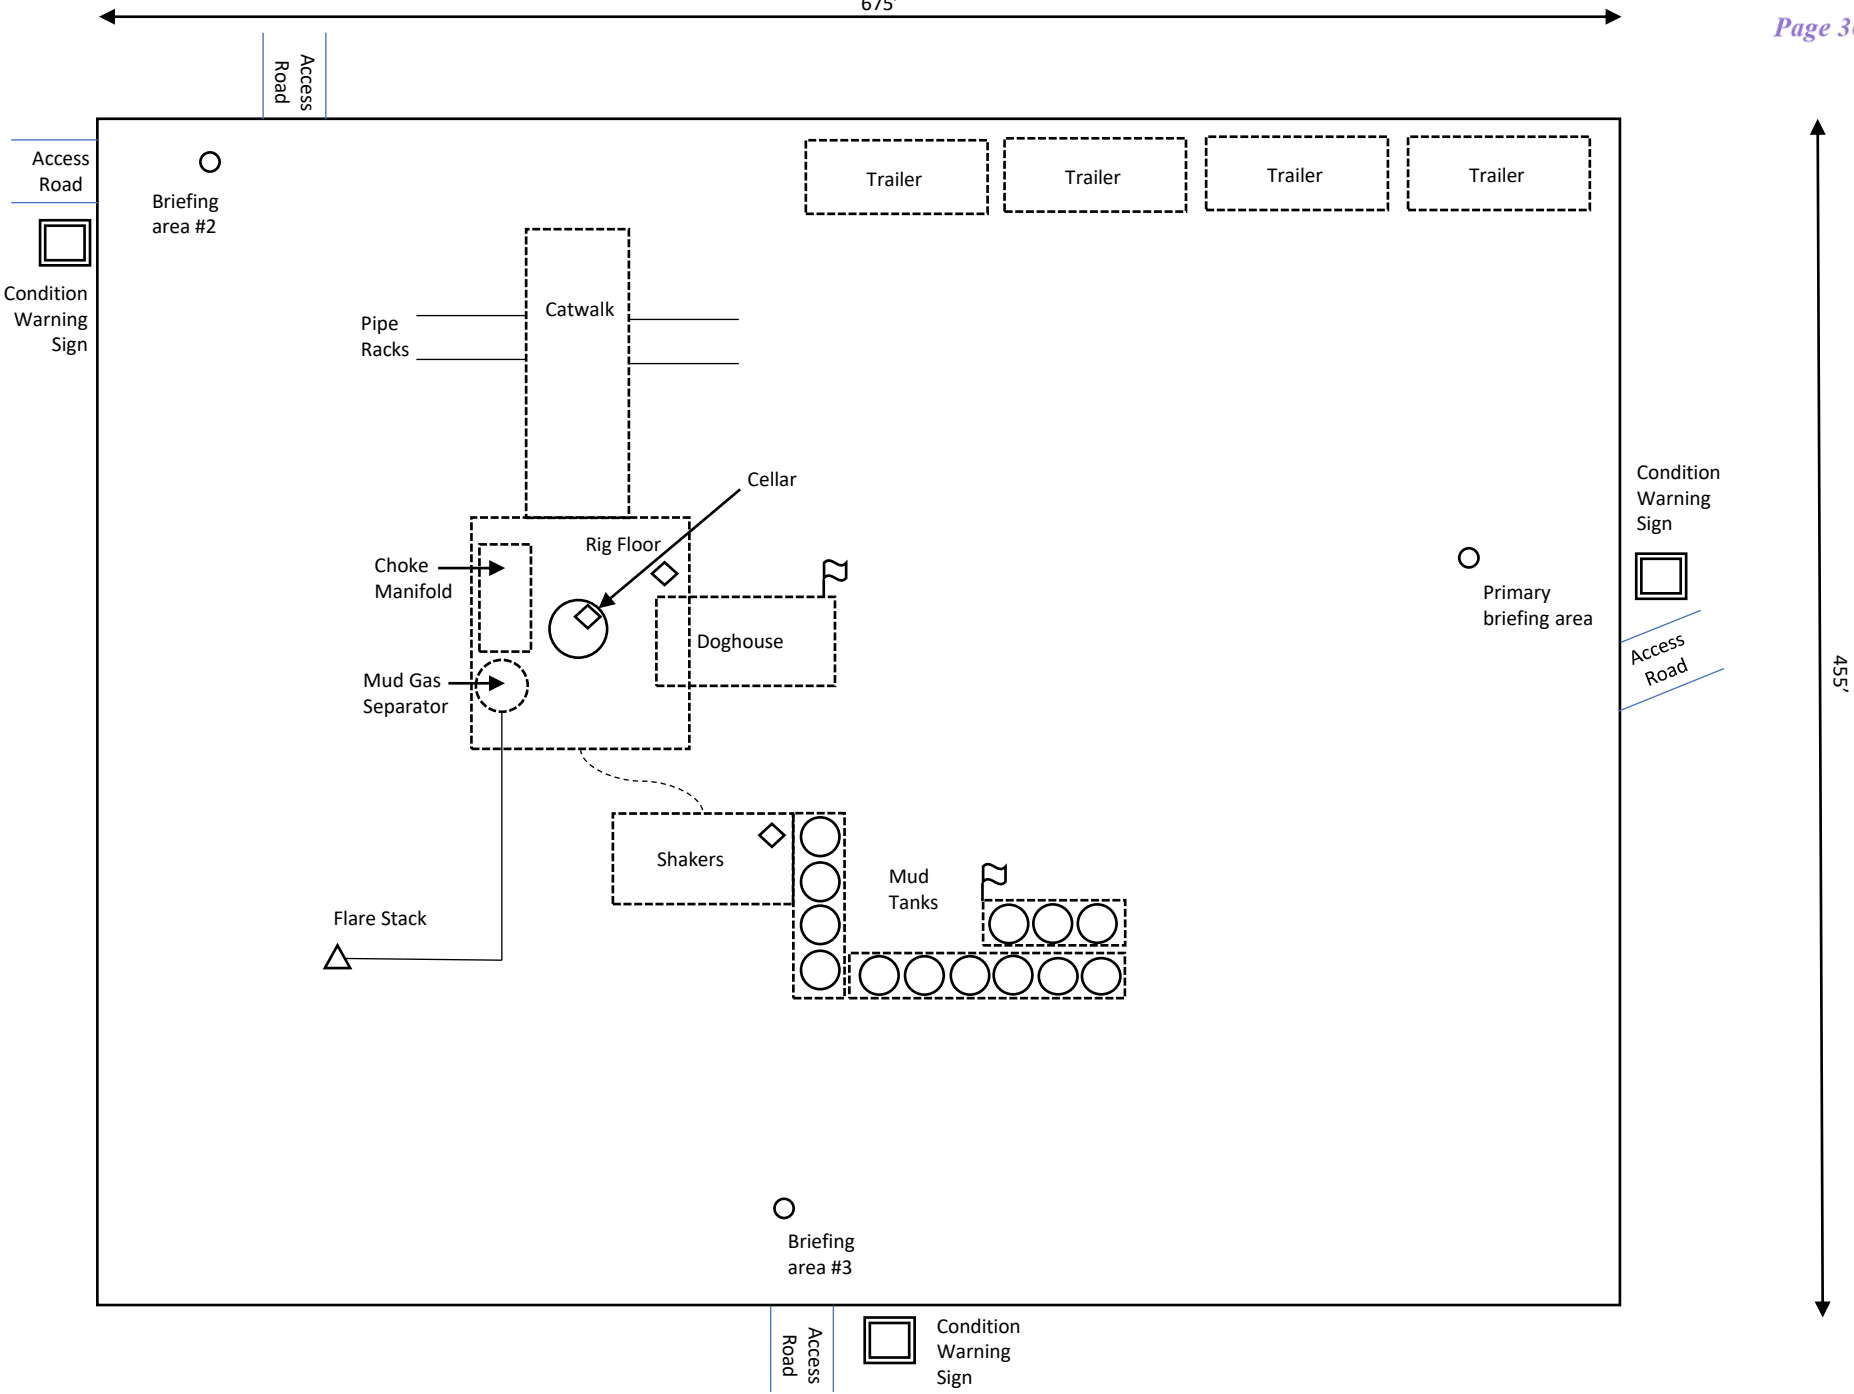



Sec. 14, Township 20S, Range 32E  
Lea County, New Mexico

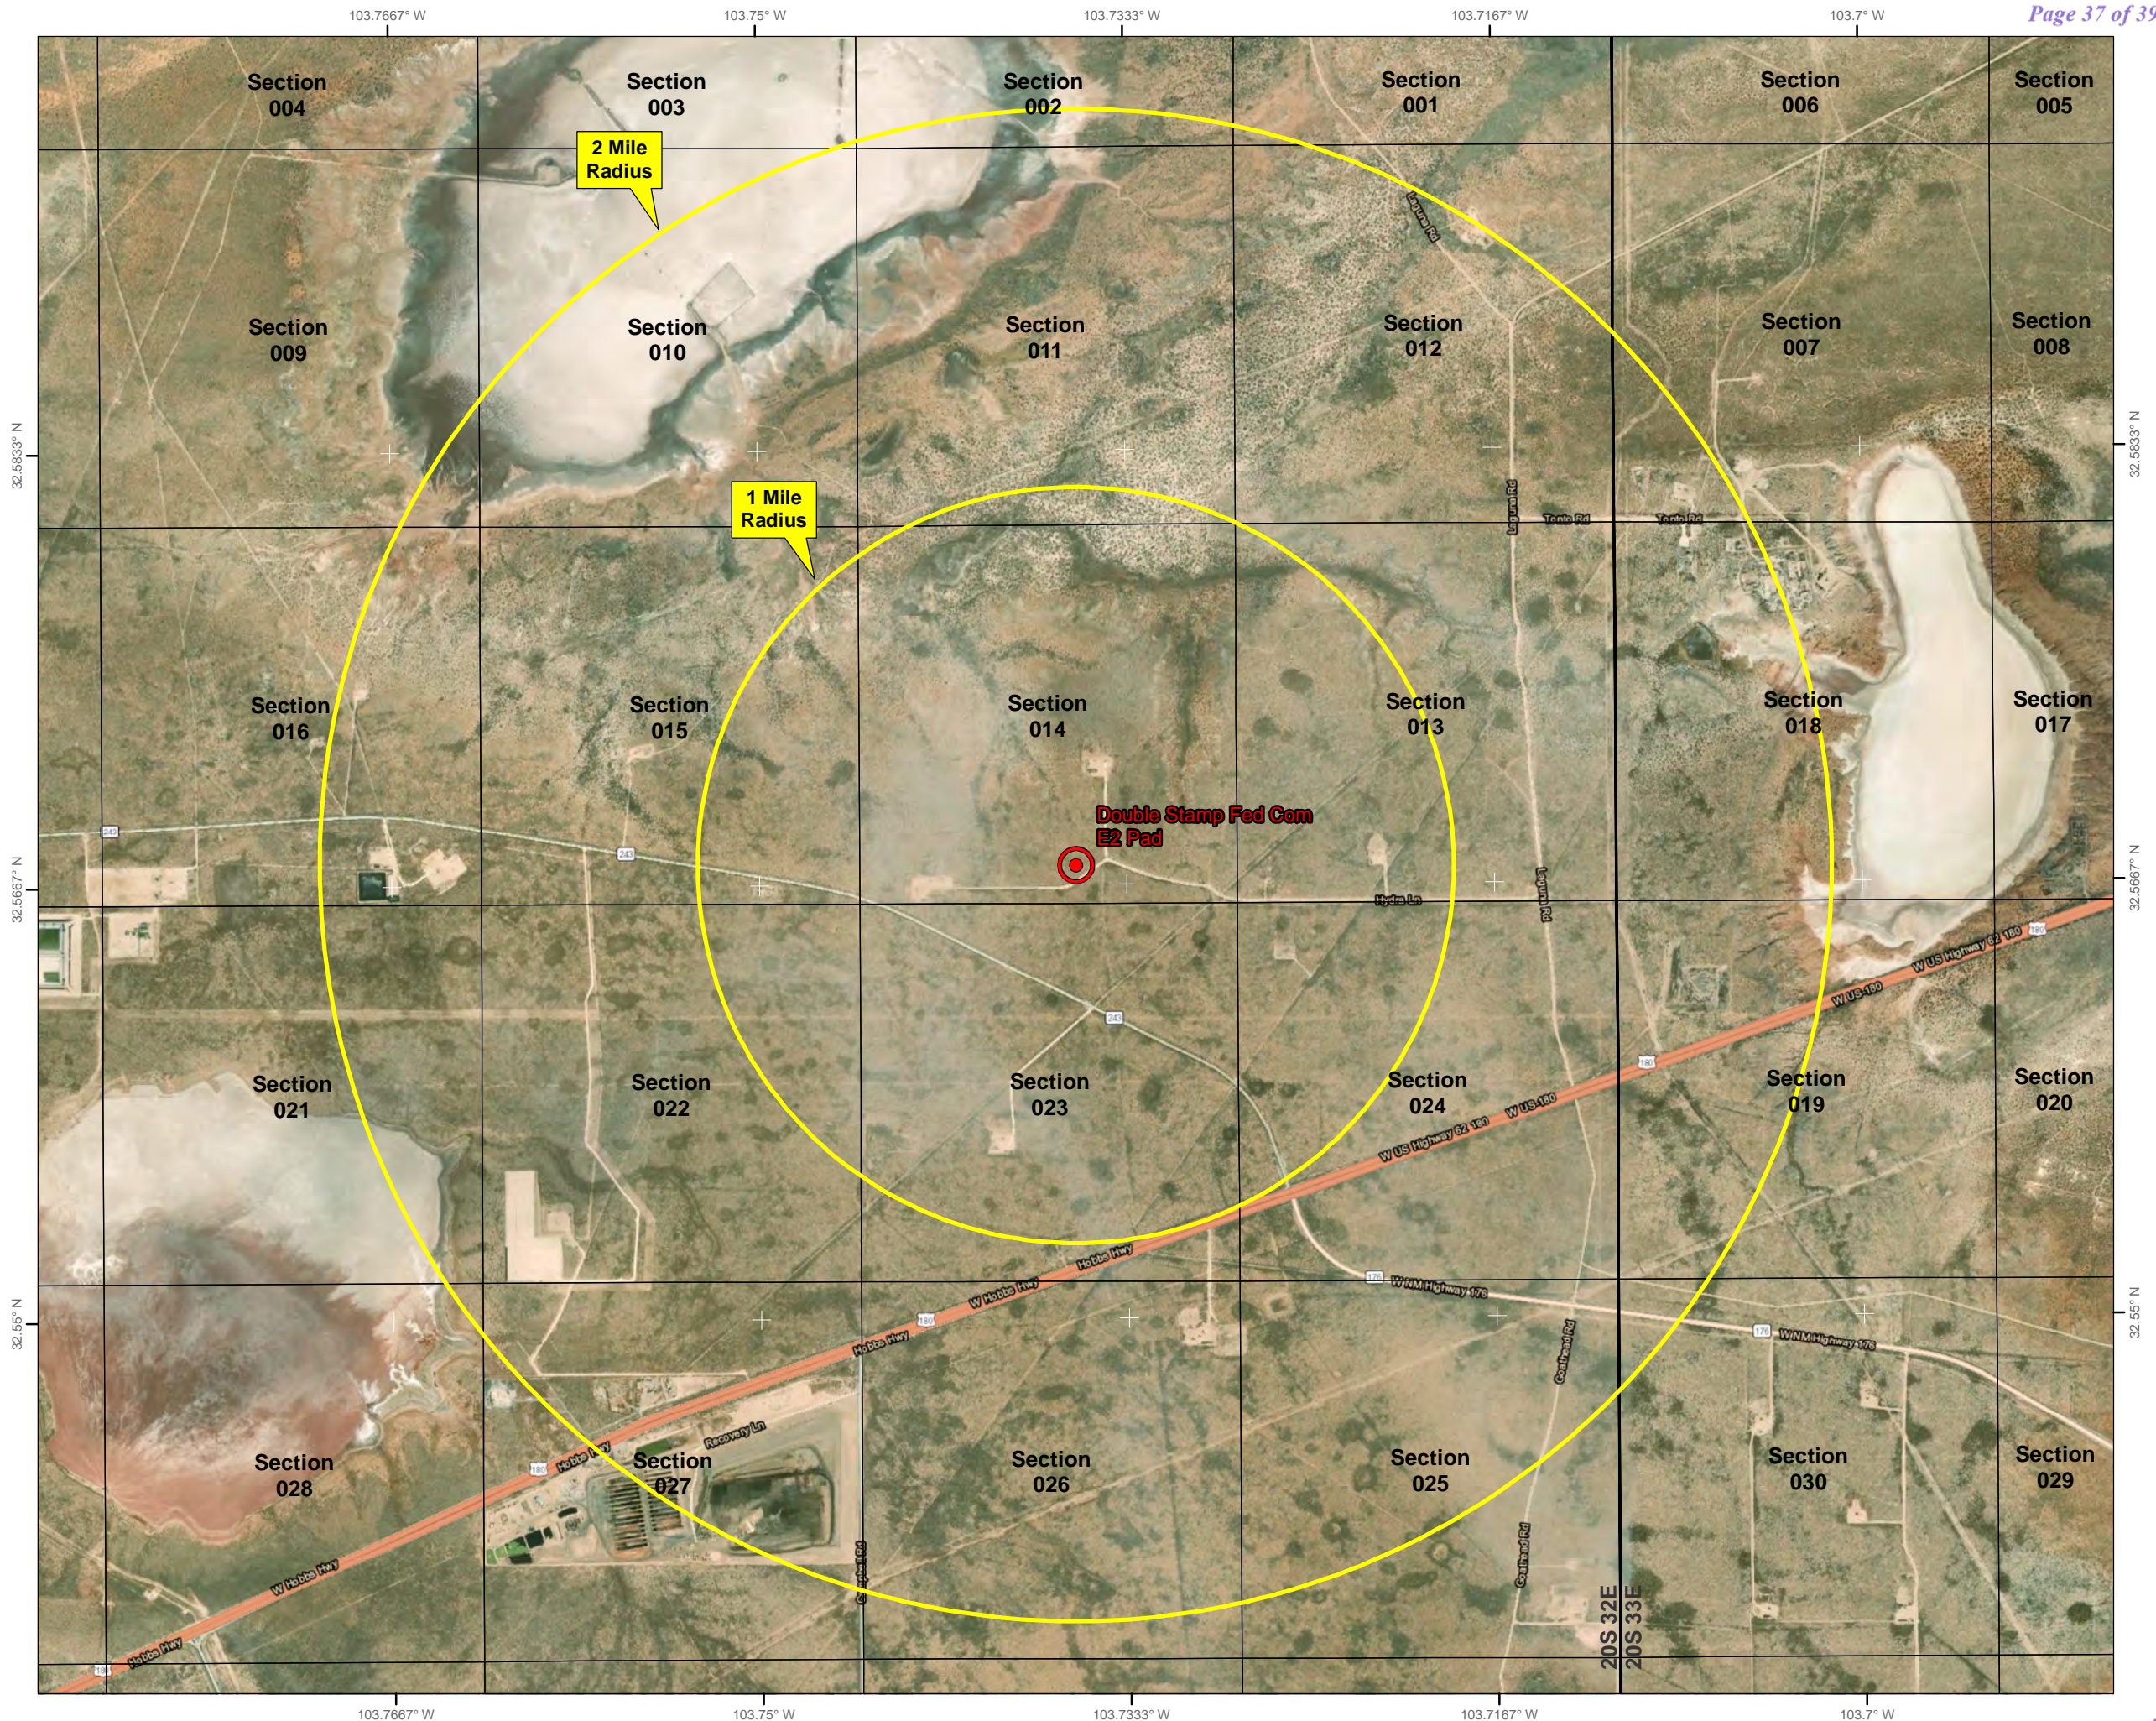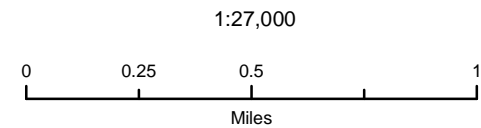



## Avant Natural Resources Closed Loop Mud System Schematic



Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS  
  
Action 406090

CONDITIONS

Operator:  TAP ROCK OPERATING, LLC 523 Park Point Drive Golden, CO 80401	OGRID:  372043
	Action Number:  406090
	Action Type:  [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
bwood	Cement is required to circulate on both surface and intermediate1 strings of casing.	11/24/2024
bwood	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.	11/24/2024
pkautz	EFFECTIVE DATE FOR SUBMITTING TO OCD THE NEW FORM C-102 WAS 08/01/2024. PLEASE SUBMIT THE C-102 ON NEW FORM.	12/2/2024
pkautz	File As Drilled C-102 and a directional Survey with C-104 completion packet.	12/2/2024
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	12/2/2024
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	12/2/2024