

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

## APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

## 1a. TYPE OF WORK

DRILL ☒DEEPEN ☐PLUG BACK ☐

## b. TYPE OF WELL

OIL  
WELL ☐GAS  
WELL ☒

OTHER

SINGLE  
ZONE ☒MULTIPLE  
ZONE ☐

## 2. NAME OF OPERATOR

Conoco Inc.

## 3. ADDRESS OF OPERATOR

P.O. Box 460, Hobbs, N.M. 88240

## 4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)\*

At surface

1550' FSL &amp; 1520' FWL

K At proposed prod. zone

Same

## 14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*

## 15. DISTANCE FROM PROPOSED\*

LOCATION TO NEAREST  
PROPERTY OR LEASE LINE, FT.  
(Also to nearest drlg. unit line, if any)18. DISTANCE FROM PROPOSED LOCATION\*  
TO NEAREST WELL, DRILLING, COMPLETED,  
OR APPLIED FOR, ON THIS LEASE, FT.

## 21. ELEVATIONS (Show whether DF, RT, GR, etc.)

7300' GR

## 23.

## PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	9 5/8"	36 #	250'	132 SX.
8 3/4"	7"	23 #	4300'	432 SX.
6 1/4"	4 1/2"	10.5 #	6300'	257 SX.

It is proposed to drill a straight hole to a TD of 6300' & complete it as a Blanco Mesaverde gas well.

See Attachments for 10-point well plan & 13-point Surface Use Plan.

Acreage is dedicated to a purchaser.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED

John A. Butterfield

TITLE Admin. Supervisor

DATE 11/5/80

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

APPROVED BY

TITLE

DATE


CONDITIONS OF APPROVAL, IF ANY

USGS (Durango) - 6  
FILE  
SEA  
MIL  
Gas Co. of New MexicoAPPROVED  
AS AMENDEDFEB 20 1980  
James F. Sims  
JAMES F. SIMS  
DISTRICT ENGINEER

\*See Instructions On Reverse Side

ok Smith

J. F. Sims



JAN 17 1980

U. S. GEOLOGICAL SURVEY  
DURANGO, COLO.

## OIL CONSERVATION DIVISION

STATE OF NEW MEXICO  
ENERGY AND MINERALS DEPARTMENTP. O. BOX 2088  
SANTA FE, NEW MEXICO 87501Form C-102  
Revised 10-1-78

All distances must be from the outer boundaries of the Section.


Operator CONTINENTAL OIL COMPANY			Lease AXI APACHE "N"		Well No. 11A
Unit Letter K	Section 1	Township 25N	Range 4W	County Rio Arriba	
Actual Footage Location of Well: 1550 feet from the South line and 1520 feet from the West line					
Ground Level Elev. 7300	Producing Formation Mesaverde		Pool Blanco Mesaverde		Dedicated Acreage: 320.8 Acres

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation \_\_\_\_\_

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) \_\_\_\_\_

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

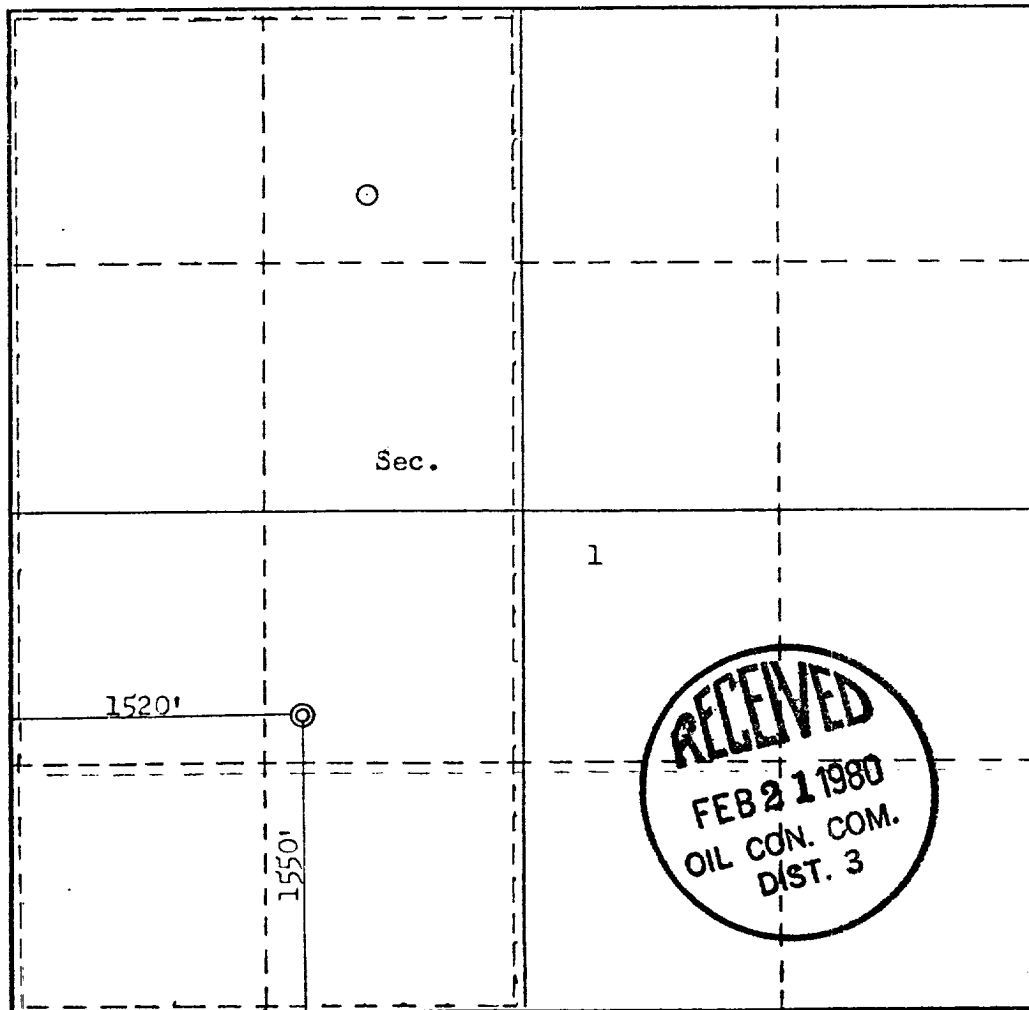

## CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Name W. A. Porter  
Position Admin. Supervisor  
Company Conoco Inc.  
Date 11/15/80

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed October 3, 1979  
Registered Professional Engineer and/or Land Surveyor  
Fred B. Kerr, Jr.  
Certificate No. 3950

ATTACHMENT TO FORM 9-331 C  
APPLICATION FOR PERMIT TO DRILL

Conoco Inc.  
AXI Apache N No. 14 A  
Sec. 1, T-25N, R-4W  
Rio Arriba County, New Mexico

1. The geologic name of the surface formation is Quaternary Sand.
2. The estimated tops of important geologic markers are shown on the attached Proposed Well Plan.
3. The estimated depths at which anticipated water, oil, gas or other mineral-bearing formations to be encountered are shown on attached Proposed Well Plan.
4. The proposed casing program is as follows:

0'-250'	9 5/8"	36#	,	H-40,	STC
0'-4300'	7"			23#	K-55, STC
4250'-6300'	4 1/2,	10.5#		K-55,	STC
5. A drawing of an API Series 900 Blowout Preventer Specification is attached. Pipe rams and blinds will be checked to 1,000 PSI for 30 minutes when BOP is installed. BOP will be checked when casing string is set and operated daily for checks.
6. The proposed mud program is as follows:

0'-250'	8.5 - 9.0 PPG	spud mud
250'-4300'	8.5 - 9.0 PPG	fresh gel (low solids)
4300'-6300'	Air	
7. The auxiliary equipment to be used is:
  - (1) kelly cocks
  - (2) floats at the bit
8. It is proposed to run GR CAL CNL FDC PDC & SP-IES logs at selected intervals.
9. No abnormal pressures or temperatures are expected to be encountered in this well.
10. The anticipated starting date is June 1, 1980, with a duration of approximately 15 days.

### PROPOSED WELL PLAN OUTLINE

WELL NAME: AXI APACHE "N" NO. 14A

COUNTY: RIO ARRIBA

LOCATION: 1550' FSL & 1520' FWL  
Sec. 1, T-25N, R-4W

STATE: NEW MEXICO

KB: 7312'

GL: 7300'

DEPTH	FORMATION TOPS & TYPE	DRILLING PROBLEMS	TYPE OF FORMATION EVALUATION	HOLE SIZE (IN)	CASING		CUTTING MUD (PPG)	CUTTING MUD (PPG)	MUD	
					SIZE (IN)	DEPTH (FT)			WEIGHT (PPG)	TYPE
	Quaternary		Geograph Deviation 0'-6300'	12-1/4	9-5/8 36# H-40 STC	250	12-13	8.0- 9.0	8.5- 9.0	Spud
1000										
2000										
3000	Ojo Alamo SS.	3210' Fresh water zone								
	Kirtland SH	3550'								
4000	Pictured Cliffs SS.	3850' Possible severe lost circ. zone		8-3/4	23# K-55 STC 7	4300'	12-13	8.0- 9.0	8.5- 9.0	Fresh gel (low solid)
5000	Chacra SS.	4810'	SP-IES 4300'-6300' 2" & 5" GR-FDC-Caliper 4300'-6300' (Pull GR to 3500') 2" & 5"							
6000	Cliff House SS.	5530' Possible severe lost circ. zone								
	Point Lookout SS.	5970'			10.5# K-55 STC					
	Mancos SH. TD-6300'	6250'	PDC 5400'-6300'	6-1/4	4-1/2	6300'	13.0- 14.0	Less than 8.5	-	Air
	NOTE: Mud and logging programs will be revised if no fluid is encountered while drilling with air.									

WELL NAME AXI APACHE "N" NO. 14A FIELD AXI APACHE AREA DATE 12/27/79  
 AFE NO. ELEV. GRD 7300' KB 7312' PROPOSED TD 6300'  
 LOCATION (SURF.) 1550' FSL & 1520' FWL OF SEC 1 T -25N R -4W  
 COUNTY RIO ARIBATATE NEW MEXICO SPACING  
 LOCATION (BOTTOM HOLE) Same as surface

GEOLOGICAL ESTIMATES

<u>ZONE</u>	<u>TOP</u>	<u>THICKNESS</u>	<u>CONTENT</u>	<u>ZONE</u>	<u>TOP</u>	<u>THICKNESS</u>	<u>CO</u>
Ojo Alamo SS.	3210'		Fresh water				
Kirtland SH.	3550'						
Pictured Cliffs SS.	3850'		Gas				
Chacra SS.	4810'		Gas				
Cliff House SS.	5530'		O,W,G				
Point Lookout SS.	5970'		O,W,G				
Mancos SH.	6250'						

<u>CORING NO.</u>	<u>TYPE</u>	<u>HORIZON</u>	<u>INTERVAL FROM-TO</u>	<u>FOOTAGE</u>	<u>REMARKS</u>
-------------------	-------------	----------------	-------------------------	----------------	----------------

NONE

DRILL STEM TESTSWATER SHUT OFF TESTS

<u>NUMBER</u>	<u>HORIZON</u>	<u>NUMBER</u>	<u>HORIZON</u>	<u>NUMBER</u>	<u>HORIZON</u>	<u>NUMBER</u>	<u>HORI</u>
---------------	----------------	---------------	----------------	---------------	----------------	---------------	-------------

NONE

WELL SURVEYS (List types by code numbers as follows: Directional and/or Deviation (1) Deflection (2) Caliper (3) Temperature (4) Electrical (5) Radio-active (6) Geolograph (7) Photoclinometer (8) Mudlogging (9) Other (10) and name of that type.)

<u>DEPTH POINTS</u>	<u>TYPE</u>	<u>HOLE SIZE</u>	<u>REMARKS</u>
0'-6300'	(1) Deviation	12-1/4", 8-3/4", 6-1/4"	One every 500'
0'-6300'	(7) Geolograph	12-1/4", 8-3/4", 6-1/4"	
4300'-6300'	(5) SP-IES	6-1/4"	2" & 5" Scales
4300'-6300'	(6) FDC-GR-Caliper	6-1/4"	2" & 5" Scales (Pull GR to 3
5400'-6300'	(6) PDC(GR Collar)	4-1/2" Liner	Depth Control
0'-4300'	(4) Temperature	7" Casing	Determine top of cement

FUEL AND WATER (SOURCE)

Conoco to furnish water.  
 Contractor to furnish fuel.

PROPOSED WELL PLAN

WELL NAME	AXI APACHE "N" NO. 14A	FIELD	AXI APACHE AREA
<u>ATTACHMENT</u>	<u>NO.</u>	<u>REQUIRED</u>	<u>NOT REQUIRED</u>
CASING CENTRALIZERS, SCRATCHERS	_____	X	_____
CEMENTING	_____	X	_____
MUD PROGRAM	_____	X	_____
WELL PLAN OUTLINE	_____	X	_____
PORE PRESSURE - FRAC GRADIENT	_____	_____	_____
PROJECTED PROGRESS	_____	_____	_____
CROSS SECTION OR WELL COURSE	_____	_____	_____
HYDRAULICS PROGRAM	_____	_____	_____
BIT PROGRAM	_____	_____	_____
VENDER USAGE LIST	_____	_____	_____

DRILLING AND COMPLETION PROCEDURE

1. 0'-250' - Drill a 12-1/4" hole. Set and cement 9-5/8" surface casing. WOC 18 hours. Pressure test casing to 600 psi for 30 minutes and drill out.
2. 250'-4300' - Drill an 8-3/4" hole. Set and cement 7" production casing. WOC 18 hours. Pressure test casing to 1450 psi for 30 minutes and drill out.
3. 4300'-6300' - Drill a 6-1/4" hole with air. Load hole with mud and run open-hole logs. Set and cement 4-1/2" liner. Drill out liner top and pressure test to 3000 psi.
4. Detailed completion procedure to be prepared after open-hole logs are analyzed.

NOTE: Use pre-mixed mud for logging, running casing, and cementing with weight as low as possible. (See mud program)

LIST TYPE OF STRING BY CODE LITERS, i.e. CONDUCTOR (C); SURFACE (S); INTERMEDIATE (I); PRODUCTION (P); LINER (L); PERFORATIONS (PP)

TYPE OF STRING & INTERVAL (FT)	OD	DRIFT ID	WT PER FT	GRADE	THREAD	A/T	WT. IN AIR, WT. IN MUD		REMARKS
							1000 LBS	1000 LBS	
(S) 0'-250'	9-5/8"	8.765"	36#	H-40	STC	250'	9		
(P) 0'-4300'	7"	6.241"	23#	K-55	STC	4300'	98.9		
(L) 4250'-6300'	4-1/2"	3.927"	10.5#	K-55	STC	2050'	21.5		Sandblast bottom 800'

TYPE OF STRING	CENTRALIZERS		SCRATCHER	OTHER ACCESSORY EQUIPMENT		REMARKS
	INTERVAL	NO. FROM 4-TO		NO. INTERVAL	(SUCH AS DEGASSERS, MUD, CENTRIFUGE FLOAT COLLARS, ETC. - SPECIFY)	
Surface	(6) 0'-250'	NONE			Guide shoe and float collar	
Production	(2) 200'-250'	(10) every 15'			Float shoe and float collar	
	Just above 9-5/8" from shoe to shoe	150' above shoe				
Liner	(12) 3850'-4300'	NONE			Float shoe, float collar, liner hanger and liner top pack-off	
	One every joint					

NOTE: Liner top pack-off to be used only if necessary (Example: Excessive gas and/or liquids in Chacra)

# MUD PROGRAM

DEPTH INTERVAL FROM-TO	WEIGHT LBS/CAL	TYPE	OIL %	pH	WATER LOSS (cc)	VIS. (sec.)	MAXIMUM		WATER LOSS AGENTS
							% SOLIDS	% LCM	
0'-250'	8.5-9.0	Spud Fresh	-	-	NC	NC	-	-	-
250'-4300'	8.5-9.0	gel (low solids)	-	as req'd.	6-10	35-40	1-3	3-5% thru Pictured Cliffs	Cypan or equivalent
4300'-6300'	-	Air	-	-	-	-	-	-	-
Logging	8.5-9.0	Fresh gel (low solids)	-	as req'd.	6	35-40	3	3-5%	Cypan or equivalent
Cementing	8.5-9.0	Fresh gel (low solids)	-	as req'd.	8-10	35	-	-	Cypan or equivalent

## REMARKS

- Pressure surges should be kept to a minimum below 5500'.
- Pressure drop across bit should be kept at 65% of pump output pressure to obtain optimum bit hydraulics when drilling with mud.
- Load hole with mud prior to logging, running casing, and cementing.
- Maintain hardness at approximately 150-180 ppm when utilizing Cypan. DO NOT treat out total hardness. (Cypan is calcium sensitive.)
- Control PH as required to obtain water loss control.




CEMENT

TYPE OF STRING INTERVAL (FT) FROM-TO TYPE MIX	GEL%	SALT%	CaCl <sub>2</sub>	SLURRY WEIGHT LB./GAL	SLURRY YIELD OF/SKN	TOTAL AMT. REQUIRED SKN/CF	FILL UP	EHT	SIZE	REMARKS
(S) 0'-250' Class 'B'	-	-	-	15.60	1.18	132/157	Circulate	65°	12-1/4"	100% excess-add 1/4#/sx Flocele if lost circ. occurs
(P) 0'-4300' Class 'B'	2%	(Pozmix 50-50)	-	14.15 15.60	1.26 1.18	332/419 100/118	2000'	120°	8-3/4"	50% excess-add 1/4#/sx Flocele if lost circ. occurs
(L) 4250'-6300' Class 'B'	2%	(Pozmix 50-50)	-	14.15 15.60	1.26 1.18	157/198 100/118	4250'	146°	6-1/4"	50% excess-add 1/4#/ sx Flocele if lost circ. occurs

## NOTE:

1. Reciprocate production casing while cementing.
2. Add 0.75% CFR-2 or equivalent friction reducer to all cement.
3. Pump plug down with treated fresh water.
4. Lab test cement slurries prior to cementing liner.
5. Re-calculate cement volumes for liner from open-hole caliper.

CONTINENTAL OIL COMPANY  
Blow-out Preventer Specifications

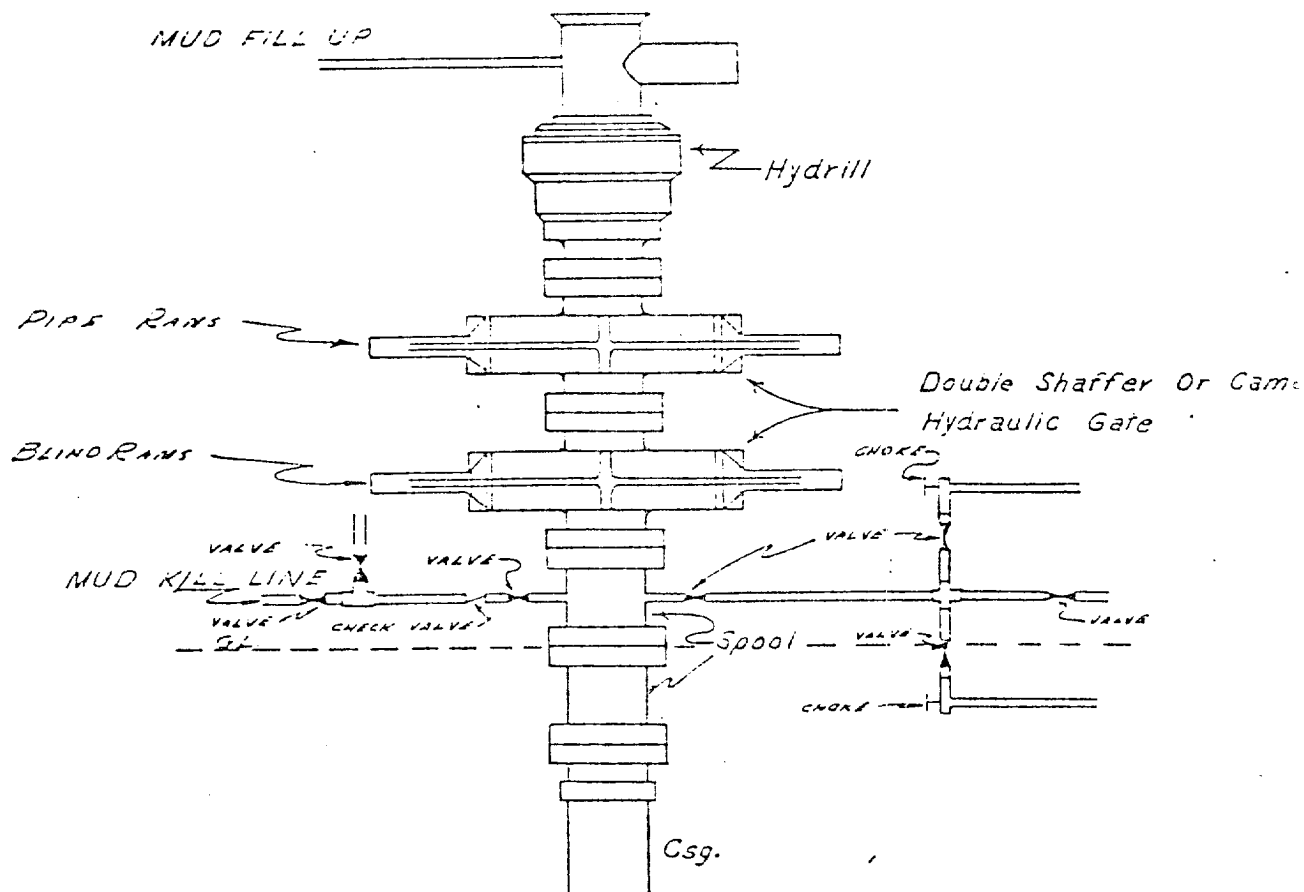

NOTE:

API SERIES 900

Manual and Hydraulic controls with closing unit no less than 75' from well head.  
Remote controls on rig floor.

DUE TO SUBSTRUCTURE CLEARANCE,  
HYDRILL ☐ ☐ ☐ NOT ☐ USED.

SURFACE USE PLAN  
Conoco Inc.  
AXI Apache M Nos. 7, 8  
AXI Apache N Nos. 11A, 12A, 13A, 14A  
T-25N, R-4W  
Rio Arriba County, New Mexico

This plan is to accompany "Application for Permit to Drill" the subject well. The following is a discussion of pertinent information concerning possible effect which the proposed drilling of the well may have on the environment of the well and road sites and surrounding acreage. A copy will be posted on the derrick floor so that all contractors and sub-contractors will be aware of all items of this plan.

1. Existing Roads

A. The proposed well sites are as follows:

AXI Apache M No. 7 1100' FNL & 800' FEL, Section 13, T-25N, R-4W  
AXI Apache M No. 8 790' FNL & 1050' FEL, Section 14, T-25N, R-4W  
AXI Apache N No. 11A 1120' FNL & 1520' FEL, Section 12, T-25N, R-4W  
AXI Apache N No. 12A 1695' FSL & 825' FWL, Section 11, T-25N, R-4W  
AXI Apache N No. 13A 1520' FSL & 1050' FEL, Section 2, T-25N, R-4W  
AXI Apache N No. 14A 1550' FSL & 1520' FWL, Section 1, T-25N, R-4W

B. Exhibit "A" is a portion of an AXI Apache M or AXI Apache N lease map showing existing roads and proposed new roads and locations.

C. The access roads are shown on Exhibits "A" and "B".

2. Planned Access Roads

Refer to the attached archaeological report.

3. Location of Existing Wells

See Exhibit "A".

4. Location of Existing and/or Proposed Facilities

A. Tank Batteries: One 400 Bbl. tank and a production unit will be located on each well site.

B. Rehabilitation: Pits will be backfilled and leveled as soon as practical to original condition. Commencement of rehabilitation operations will immediately follow removal of drilling and completion equipment from location and rehabilitation of the surface is planned to be completed within 45 days from commencement.

5. Water Supply

The supply of water will be hauled from Largo Wash in the NE/4 of the SE/4 of Section 10, T-24N, R-4W, Rio Arriba County, New Mexico. See Exhibit "C".

6. Source of Construction Materials

Not applicable. Drilling pad to be compacted.

7. Methods for Handling Waste Disposal

Waste Disposal: Well cutting will be disposed in reserve pit. Barrel trash containers to be in accessible locations within drill site area during drilling and completion procedures. All detrimental waste will be hauled away, burned or buried with a minimum cover of 24" of dirt. See Exhibit "D" for location of pits. If well is productive, maintenance waste will be placed in special trash cans and hauled away periodically. Any produced water will be collected in tanks until hauled to an approved disposal system, or separate disposal applications will be submitted to the survey for appropriate approval.

8. Ancillary Facilities

None.

9. Well Site Layout

Exhibit "D" shows the relative location and dimensions of the well pad, mud pit, reserve pit, etc. The reserve pit will be lined with plastic. The pad and pits are staked.

10. Plans for Restoration of Surface

Pits will be backfilled and leveled as soon as practical to original condition. Commencement of rehabilitation operations will immediately follow removal of drilling and completion equipment from location and rehabilitation of the surface is planned to be completed with 45 days from commencement.

11. Other Information

- A. Terrain: "A" through "C" refer to the attached archaeological report.
- B. Soil:
- C. Vegetation:
- D. Surface Use: Suitable for grazing.
- E. Ponds and Streams: None within one mile
- F. Water Wells: See Exhibit "C".
- G. Residences & Buildings: None within one mile.
- H. Arroyos, Canyons, Etc.: See attached topographic map, Exhibit "B".
- I. Well Sign: Sign identifying and locating well will be maintained.
- J. Open Pits: All pits containing mud or other liquids will be fenced.
- K. Archaeological Resources: See attached report.

12. Operator's Representative

Field personnel who can be contacted concerning compliance of this Surface Use Plan are as follows:

B. E. Anderson  
Petroleum Center Building  
Room 215  
501 Airport Drive  
Farmington, New Mexico  
Phone: (505) 327-9557

L. P. Thompson or J. R. Kemp  
1001 North Turner  
Hobbs, New Mexico 88240  
Phone: (505) 393-4141


13. Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Conoco Inc. and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

12/13/79  
Date

John R Kemp

KJH:bep

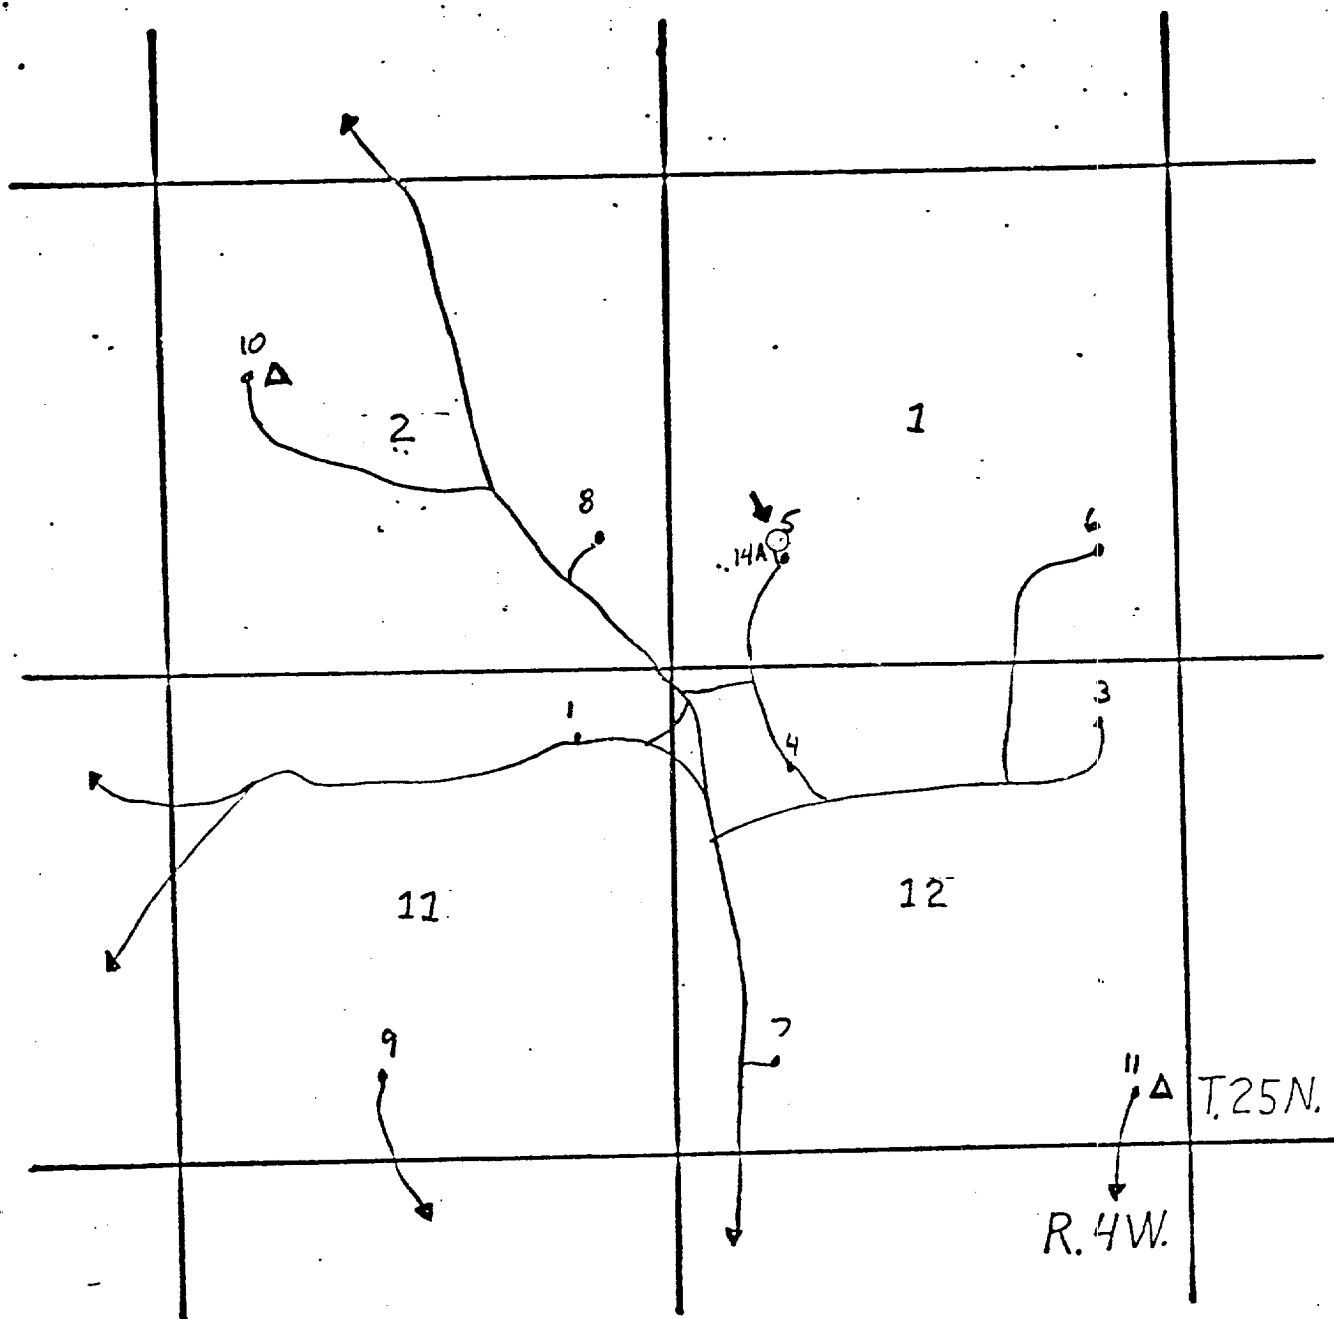

CONOCO

PRODUCTION DEPT. HOBBS DIV.  
AXI APACHE "N" LEASE 14A


LEGEND

- CONOCO WELL
- △ TANK BATTERY
- LEASE ROAD
- HWY.

Exhibit A

NTS  
CHAVEZ



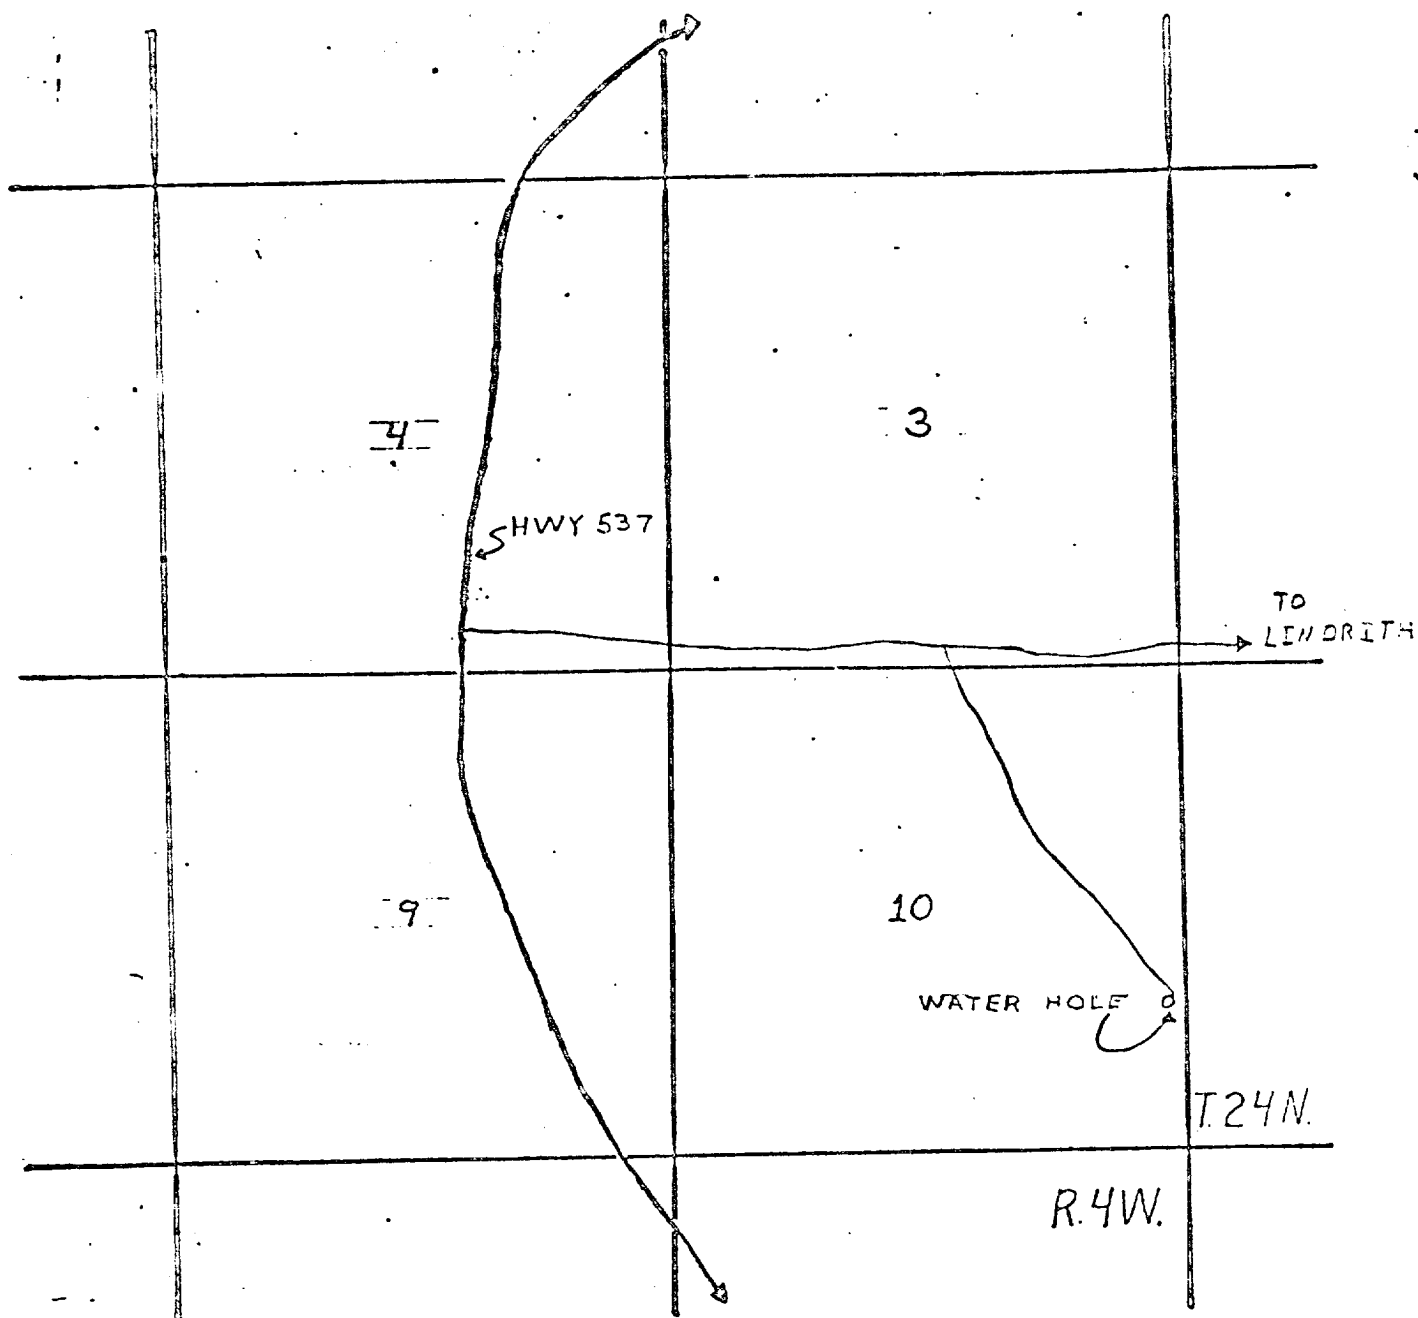

CONOCO

PRODUCTION DEPT. HOBBS DIV.  
LARGO WATER HOLE


LEGEND

- CONOCO WELL
- △ TANK BATTERY
- LEASE ROAD
- HWY.

Exhibit C

NTS  
CHAVEZ



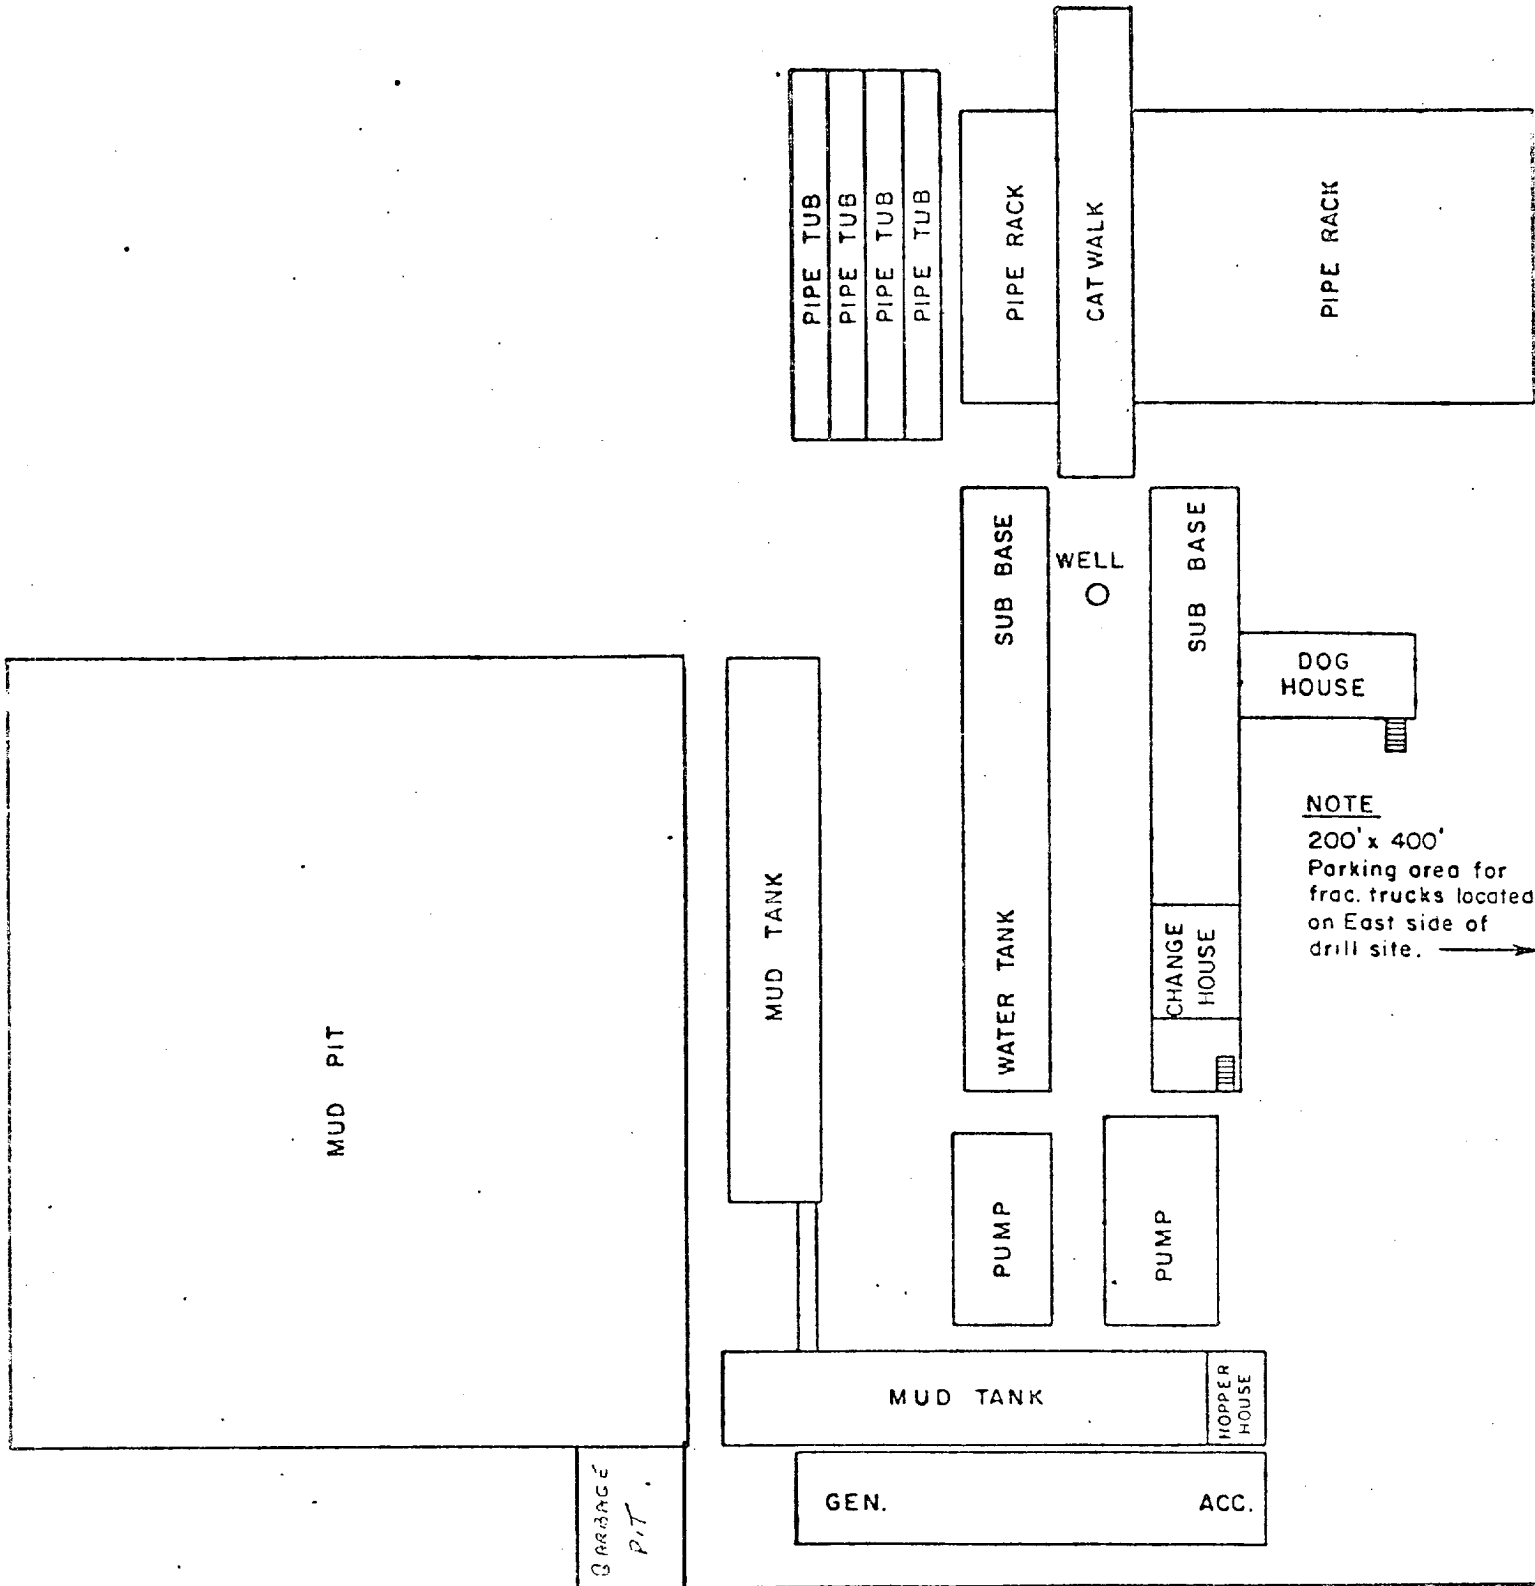

APPROX. RIG SITE DIMENSIONS

160' x 200'

**CONTINENTAL OIL COMPANY**  
PRODUCTION DEPARTMENT



RIG LAYOUT

Engineer: ~~XXXXXXXXXX~~

Draftsman: ~~XXXXXXXXXX~~

Date: 1-4-73

Exhibit D

Project No. 88-79-MK

Permit No. Federal Antiquities  
Permit #79-NM-178

Archaeological Examinations of  
Nine Proposed Wells  
on the Jicarilla Apache Reservation

for

Conoco, Inc.

Locations

Northeast Haynes #1E  
Northeast Haynes #2E  
Northeast Haynes #3E  
Conoco AXI Apache M #7  
Conoco AXI Apache M #8  
Conoco AXI Apache N #11A  
Conoco AXI Apache N #12A  
Conoco AXI Apache N #13A  
Conoco AXI Apache N #14A ←

by

Margaret A. Powers  
Supervisory Archaeologist

Submitted by  
Meade F. Kemrer, Ph.D.  
Principal Investigator

DIVISION OF CONSERVATION ARCHAEOLOGY

Contributions to Anthropology Series, No. 213  
San Juan County Archaeological Research Center and Library

October 24, 1979

### Abstract

At the request of Conoco, Inc., the Division of Conservation Archaeology of the San Juan County Archaeological Research Center and Library at Salmon Ruins conducted archaeological inspections of 9 proposed Conoco gas wells on the Jicarilla Apache Reservation on October 4, 1979. Isolated artifacts were found on 2 pads and two archaeological sites, DCA-79-137 and 139 were found, the first along the access road to Conoco AXI Apache N #12A, the second at Conoco AXI Apache M #8. The isolated finds were documented in the field. The access road was rerouted to avoid DCA-79-137. DCA-79-139 has been flagged for avoidance. Archaeological clearance is recommended for all locations with stipulations for Conoco AXI Apache M #8 and Conoco AXI Apache N #14A.

## Introduction

On October 4, 1979, Ms. Margaret A. Powers of the Division of Conservation Archaeology of the San Juan County Archaeological Research Center and Library at Salmon Ruins conducted archaeological surveys of 9 proposed wells and access roads on the Jicarilla Apache Reservation. The survey was arranged by Mr. Joe McKinney of Achison Construction Company, for Conoco, Inc., Dr. Meade F. Kemrer, Principal Investigator, administered the project for the Division of Conservation Archaeology.

In recognition of the limited, non-renewable nature of archaeological remains, federal and state governments have enacted legislation that is designed to conserve and protect these resources. The principal federal legislation includes the Antiquities Act of 1906 (PL 52-209), the Historic Preservation Act of 1966 (PL 89-665), the National Environmental Policy Act of 1969 (PL 91-852), the 1971 Executive Order No. 11593, and the Archaeological and Historical Conservation Act of 1974 (PL 93-291).

In addition, the states of Arizona, New Mexico, Colorado, and Utah have enacted laws to ensure compliance with federal laws and to protect archaeological resources within their jurisdiction. Work undertaken in the course of this project is for purposes of compliance with these statutes

Mr. Andy Anderson of Conoco, Inc. and Mr. Joe McKinney were present during the inspections. Work was conducted under provisions of Federal Antiquities Permit 79-NM-178. Each proposed well was surveyed in a series of 15m interval parallel transects and each access road was covered with a single linear transect. All examinations were foot surveys. On October 8, 1979 the survey archaeologist returned to two pads that required additional site documentation not feasible during the time available in the initial survey.

## Survey

The nine wells are all located within the Canyon Largo drainage. Details of each survey area are given below. Proposed wells and access roads are shown in Figures 1 and 2.

road avoids all features, intact midden deposits, and potential pithouse locations. It lies between the main structural area and the secondary structural areas and hearth to the northwest. There should be no significant primary adverse impacts to the archaeological remains with this routing. All intact deposits adjacent to the revised right-of-way have been flagged with red pin flags to prevent inadvertent disturbance of these areas. There is insufficient data to assess the potential secondary impacts of road development on the site. The site has relatively low visibility and should not be particularly evident to vandals unless they are already aware of its existence. We recommend archaeological clearance for the well pad and road. It is also recommended that the Bureau of Indian Affairs periodically check DCA-79-137 for evidence of vandalism.

Location: Conoco AXI Apache N #13A

Legal Description: 1520' F/SL, 1050' F/EL, Section 2, T25N, R4W, N.M.P.M., Rio Arriba County, New Mexico (Figure 2).

Map Source: USGS 7.5' Schmitz Ranch, New Mexico Quadrangle (1963).

Land Jurisdiction: Jicarilla Apache.

Area Surveyed: 300' X 250' (pad); approximately 600' X 20' (road).

Description: The proposed pad is located in colluvial and aeolian sands. The pad is on the edge of a pinyon-dominated woodland. The road runs south through a sage-filled valley area. Along the transition area, there are also grasses -- Indian rice grass, crested wheatgrass (Agropyron sp.), and grama grass (Bouteloua gracilis) -- and annuals.

Cultural Resources: One rusted food can was found, but no significant loci of human activity occur in the impact area.

Recommendation: Archaeological clearance is recommended.

→ Location: Conoco AXI Apache N #14A

Legal Description: 1550' F/SL, 1520' F/WL, Section 1, T25N, R4W, N.M.P.M., Rio Arriba County, New Mexico (Figure 2).

Map Source: USGS 7.5' Schmitz Ranch, New Mexico Quadrangle (1963).

Land Jurisdiction: Jicarilla Apache.

Area Surveyed: 300' X 250' (pad); approximately 700' X 20' (road).

Description: The pad and road are located in pinyon-juniper woodland with a low density understory of sage and snakeweed. The road runs south from the pad through colluvial sandy loams. The area is moderately dissected by shallow east-west washes.

Cultural Resources: Several brown ware sherds and one corrugated grayware sherd were found in the shallow drainages crossing the survey area. They do not appear to derive from a site on the well pad itself but may be transported from the ridges to the east. There are no recorded sites, however, in that area.

Recommendation: We recommend archaeological clearance for the proposed construction with the following stipulations:

- 1.) that the contractor be alerted to the possibility that buried cultural remains could be encountered.
- 2.) that he be informed of the procedures for notifying the proper authorities.

