

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐

2. NAME OF OPERATOR
Amoco Production Company

3. ADDRESS OF OPERATOR
501 Airport Drive, Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 840' FNL X 1030' FNL
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐

(other) Completion operations

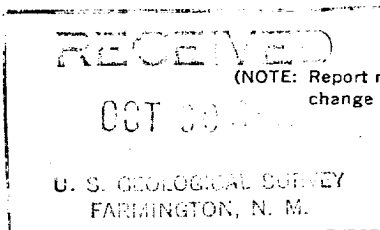

5. LEASE

Jicarilla Contract 146

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

Jicarilla Apache

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Jicarilla Contract 146

9. WELL NO.

36

10. FIELD OR WILDCAT NAME

Otero Chacra/Gonzales Mesaverde

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA NE/4, NE/4, Section 4 T25N, R5W

12. COUNTY OR PARISH

Rio Arriba

13. STATE


New Mexico

14. API NO.

30-039-22486

15. ELEVATIONS (SHOW DF, KDB, AND WD)

6615' G. I.



17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Completion operations commenced on 10-15-81. Total depth of the well is 5379' and plugback depth is 5336'. Perforated intervals from 5096'-5148', 5192'-5196' 5230'-5236', and 5272'-5280' with 2 SPF a total of 108 .38" holes. Perforated intervals from 3786'-3820' with 4 SPF a total of 136 .40" holes. Fraced interval 5096'-5280' with 56,000 gallons of frac fluid and 72,000 pounds of 10-20 sand. Landed 2-3/8" tubing at 3831'. Set bridge plug at 4000'. Released the Rig on 10-24-81.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

Original Signed By _____ TITLE Dist. Admin. Supvr. DATE 10/29/81
SIGNED E. E. SVOBODA

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

NMOCC

BY