Form 3160-3 FORM APPROVED OMB No. 1004-0137 (June 2015) Expires: January 31, 2018 **UNITED STATES** DEPARTMENT OF THE INTERIOR 5. Lease Serial No. NMNM94968 **BUREAU OF LAND MANAGEMENT** APPLICATION FOR PERMIT TO DRILL OR REENTER 6. If Indian, Allotee or Tribe Name 7. If Unit or CA Agreement, Name and No. **✓** DRILL REENTER 1a. Type of work: Oil Well 1b. Type of Well: Gas Well Other 8. Lease Name and Well No. 1c. Type of Completion: Hydraulic Fracturing Single Zone ✓ Multiple Zone QUERECHO 23/26 FED COM 527H 2. Name of Operator 9. API Well No. MEWBOURNE OIL COMPANY 30-025-54735 3a. Address 3b. Phone No. (include area code) 10. Field and Pool, or Exploratory P O BOX 5270, HOBBS, NM 88241 (575) 393-5905 Querecho Plains/Bone Spring 4. Location of Well (Report location clearly and in accordance with any State requirements.*) 11. Sec., T. R. M. or Blk. and Survey or Area SEC 23/T18S/R32E/NMP At surface NENE / 235 FNL / 1245 FEL / LAT 32.7395673 / LONG -103.7324603 At proposed prod. zone SESE / 100 FSL / 660 FEL / LAT 32.7114425 / LONG -103.7305143 14. Distance in miles and direction from nearest town or post office* 12. County or Parish 13. State NM LEA 10 miles 15. Distance from proposed* 16. No of acres in lease 17. Spacing Unit dedicated to this well 210 feet location to nearest property or lease line, ft. 240.0 (Also to nearest drig. unit line, if any) 18. Distance from proposed location* 19. Proposed Depth 20. BLM/BIA Bond No. in file to nearest well, drilling, completed, 330 feet 9637 feet / 20189 feet FED: NM1693 applied for, on this lease, ft. 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 22. Approximate date work will start* 23. Estimated duration 3794 feet 07/30/2024 60 days 24. Attachments The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable) 1. Well plat certified by a registered surveyor. 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the 5. Operator certification. SUPO must be filed with the appropriate Forest Service Office). 6. Such other site specific information and/or plans as may be requested by the Name (Printed/Typed) Date 25. Signature BRADLEY BISHOP / Ph: (575) 393-5905 06/17/2024 (Electronic Submission) Title Regulatory Approved by (Signature) Date Name (Printed/Typed) (Electronic Submission) CODY LAYTON / Ph: (575) 234-5959 05/19/2025 Title Office Assistant Field Manager Lands & Minerals Carlsbad Field Office Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



Santa Fe Main Office

Phone: (505) 476-3441 Fax: (55) 476-3462

General Information Phone: (505) 629-6116

Online Phone Directory Visit:

https://www.emnrd.nm.gov/ocd/contact-us/

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION

Revised July 9, 2024 Submit Electronically via OCD Permitting ▼ Initial Submittal

Submittal ☐ Amended Report

Type: ☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-025-54735	Pool Code 50510	Pool Name QUERECHO PLAINS; LOW	/ER BONE SPRING
Property Code 335029	Property Name QUERECHO	23/26 FED COM	Well Number 527H
OGRID No. 14744	Operator Name MEWBOURN	E OIL COMPANY	Ground Level Elevation 3794
Surface Owner: □ State □ Fee □ Tribal 🖎 Federal		Mineral Owner: ☐ State ☐ Fee ☐ Tribal 🔀 Fe	ederal

Surface Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
Α	23	18S	32E		235 FNL	1245 FEL	32.7395673	-103.7324603	LEA
	Bottom Hole Location								
UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
Р	26	18S	32E		100FSL	660 FEL	32.7114425	-103.7305143	LEA

Dedicated Acres	Infill or Defining Well	Defining Well API	Overlapping Spacing Unit (Y/N)	Consolidation Code
320	DEFINING		N	N/A
Order Numbers.			Well setbacks are under Common	Ownership: □Yes □No

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
Р	14	18	32		473 FSL	660 FEL	32.7415117	-103.7305590	LEA
	First Take Point (FTP)								
UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
Α	23	18	32		100 FNL	660 FEL	32.7399372	-103.7305581	LEA
	Last Take Point (LTP)								
UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
Р	26	18	32		100 FSL	660 FEL	32.7114425	-103.7305143	LEA

Unitized Area or Area of Uniform Interest Spacing Unit Type ★Horizontal □ Vertical Ground Floor Elevation: 3794	1
---	---

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

5/20/25

RYAN MCDANIEL

RYANMCDANIEL@MEWBOURNE.COM

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief.

SIONAL

Signature and Seal of Professional Surveyor


Certificate Number

Date of Survey

19680

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

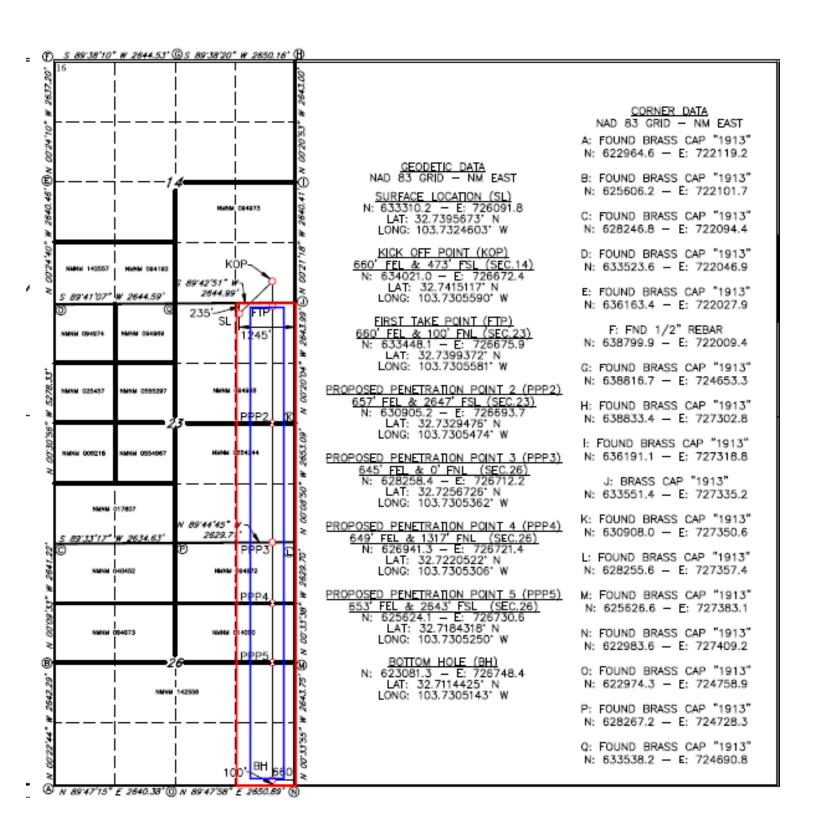

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

	N.	ATURAL G	AS MANAC	SEMENT PI	LAN			
This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.								
Section 1 – Plan Description Effective May 25, 2021								
I. Operator: Mev	vbourne (Oil Co.	OGRID:	14744	Date:	5/2	2/22	
II. Type: 💢 Original 🛚	☐ Amendment	due to □ 19.15.27	7.9.D(6)(a) NMAC	C □ 19.15.27.9.D(6)(b) NMAC □	Other.		
If Other, please describe	»:							
III. Well(s): Provide the be recompleted from a s					vells proposed to	be dri	lled or proposed to	
Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Р	Anticipated roduced Water BBL/D	
QUERECHO 23/26 FED COM 527H		A 23 18S 32E	235' FNL x 1245' FE	L 1500	1000		2500	
				Y1-400 Y2-300 Y3-200	Y1-800 Y2-600 Y3-400	Y	1-500 Y2-400 Y3-250	
IV. Central Delivery P			RECHO 23/26 FED				7.9(D)(1) NMAC]	
V. Anticipated Schedu proposed to be recomple					ell or set of well	s propo	osed to be drilled or	
Well Name	API	Spud Date	TD Reached Date	Completion Commencement			First Production Date	
QUERECHO 23/26 FED COM 527H		7/2/22	8/2/22	9/2/22	9/17/2	2	9/17/22	
VI. Separation Equipment: ☐ Attach a complete description of how Operator will size separation equipment to optimize gas capture. VII. Operational Practices: ☐ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.								
VIII. Best Management during active and planned			ete description of	Operator's best m	anagement prac	tices to	o minimize venting	

Section 2 — Enhanced Pl	an
EFFECTIVE APRIL 1, 2022	

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

🗴 Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

W	fell	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF			
X. Natural Gas Gathering System (NGGS):							
Operator	System	ULSTR of Tie-in	Anticipated Gathering	Available Maximum Daily Capacity			

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. \square Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the
production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of
the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system	\square will \square will not have ca	spacity to gather 100% of	the anticipated natural gas
production volume from the well prior to the date of first	st production.		

XIII. Line Pressure. Operator \square does \square does not anticipate that its existing well(s) connected to the same segment.	or portion,	of the
natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by	the new we	ll(s).

Attach	Operator	e nlan te	managa	production	in 1	rechance	to th	a increased	line	nrecentre
Attach	Operator	s bian u) manage	broduction	ш	response	w ui	e increased	me	bressure

XIV. Confidentiality: Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provide	ed ir
Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information of the	atior
for which confidentiality is asserted and the basis for such assertion.	

Released to Imaging: 6/11/2025 10:54:53 AM

Section 3 - Certifications Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: 🖾 Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or ☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan.

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: power generation on lease; (a) (b) power generation for grid; compression on lease; (c) liquids removal on lease; (d) reinjection for underground storage; (e) reinjection for temporary storage; **(f)**

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

other alternative beneficial uses approved by the division.

reinjection for enhanced oil recovery;

fuel cell production; and

- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

(g)

(h)

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Bradley Bishop
BRADLEY BISHOP
REGULATORY MANAGER
BBISHOP@MEWBOURNE.COM
5/2/22
575-393-5905
OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)
approval:


Mewbourne Oil Company

Natural Gas Management Plan – Attachment

- VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Mewbourne Oil Company (MOC) will take following actions to comply with the regulations listed in 19.15.27.8:
 - A. MOC will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. MOC will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas. If there is no adequate takeaway for the gas, well(s) will be shut in until the natural gas gathering system is available.
 - B. All drilling operations will be equipped with a rig flare located at least 100 ft from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
 - C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flow will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, MOC will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner. MOC will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
 - D. Natural gas will not be flared with the exceptions and provisions listed in the 19.15.27.8 D.(1) through (4). If there is no adequate takeaway for the separator gas, well(s) will be shut in until the natural gas gathering system is available with exception of emergency or malfunction situations. Venting and/or flaring volumes will be estimated and reported appropriately.
 - E. MOC will comply with the performance standards requirements and provisions listed in 19.15.27.8 E.(1) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs in order to minimize the waste. Production storage tanks constructed after May 25, 2021 will be equipped with automatic gauging system. Flares constructed after May 25, 2021 will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. MOC will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
 - F. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared or beneficially used during production operations, will be measured or estimated. MOC will install equipment to measure

the volume of natural gas flared from existing process piping or a flowline piped from equipment such as high pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by an APD issued after May 25, 2021 that has an average daily production greater than 60 Mcf/day. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, MOC will estimate the volume of vented or flared natural gas. Measuring equipment will conform to industry standards and will not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.

VIII. For maintenance activities involving production equipment and compression, venting will be limited to the depressurization of the subject equipment to ensure safe working conditions. For maintenance of production and compression equipment the associated producing wells will be shut in to eliminate venting. For maintenance of VRUs all gas normally routed to the VRU will be routed to flare to eliminate venting.

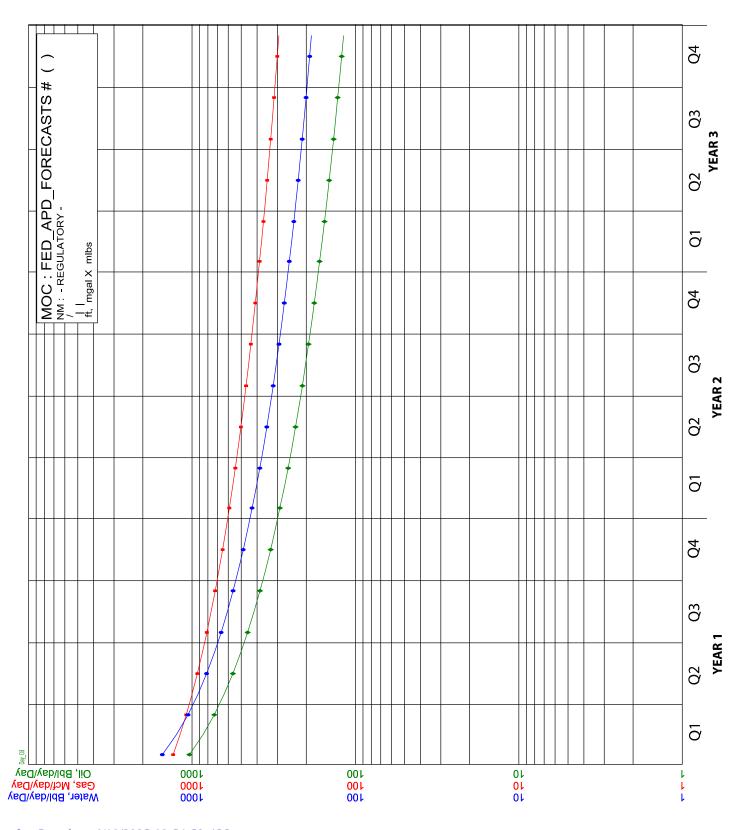



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report 05/19/2025

APD ID: 10400098769

Submission Date: 06/17/2024

Highlighted data reflects the most recent changes

Operator Name: MEWBOURNE OIL COMPANY

Well Number: 527H

Well Name: QUERECHO 23/26 FED COM

Well Work Type: Drill

Show Final Text

Well Type: OIL WELL

Section 1 - Geologic Formations

Formation			True Vertical	Measured		Mineral Resources	Producing
ID	Formation Name	Elevation	True vertical	Depth	Lithologies	Willieral IXesources	Formatio
15646840	RUSTLER	2415	1207	1207	ANHYDRITE, DOLOMITE	USEABLE WATER	N
15646841	TOP SALT	955	1460	1460	SALT	NONE	N
15646851	BASE OF SALT	-168	2583	2583	SALT	NATURAL GAS, OIL	N
15646852	YATES	-358	2773	2773	SANDSTONE	NATURAL GAS, OIL	N
15646844	SEVEN RIVERS	-851	3266	3266	DOLOMITE	NATURAL GAS, OIL	N
15646853	QUEEN	-1561	3976	3976	DOLOMITE, SANDSTONE	NATURAL GAS, OIL	N
15646845	GRAYBURG	-1867	4282	4282	DOLOMITE	NONE	N
15646846	SAN ANDRES	-2187	4602	4602	DOLOMITE	NATURAL GAS, OIL	N
15646854	LAMAR	-2509	4924	4924	DOLOMITE, LIMESTONE	NATURAL GAS, OIL	N
15646848	BONE SPRING	-4424	6839	6839	LIMESTONE	NATURAL GAS, OIL	N
15646849	BONE SPRING 1ST	-5926	8341	8341	SANDSTONE	NATURAL GAS, OIL	N
15646850	BONE SPRING 2ND	-6673	9088	9088	SANDSTONE	NATURAL GAS, OIL	Y
15646855	BONE SPRING 3RD	-7433	9848	9848	SANDSTONE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Well Name: QUERECHO 23/26 FED COM Well Number: 527H

Pressure Rating (PSI): 5M Rating Depth: 20189

Equipment: Annular, Pipe Rams, Blind Rams, Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics

Requesting Variance? YES

Variance request: A variance is requested for the use of a variable choke line from the BOP to the choke manifold. See attached for hydrostatic test chart. Anchors are not required by manufacturer. Variance is requested to use a multi bowl wellhead. Variance is requested to perform break testing according to attached procedure. If a breaktesting variance is approved & incorporated, API Standard 53 will be incorporated and testing annular BOP to 70% of RWP or 100% of MASP, whichever is greater, will be performed.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR Part 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Choke Diagram Attachment:

5M BOPE Choke Diagram 20240531091322.pdf

Flex_Line_Specs_API_16C_20241115135820.pdf

Multi_Bowl_WH_20241115135820.pdf

Cactus_5K_WH_20241115135821.pdf

BOP Diagram Attachment:

5M BOPE Schematic 20240531091409.pdf

Multi_Bowl_WH_20240531091420.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1295	0	1295	3794	2499	1295	H-40	48	ST&C	1.33	2.99	DRY	5.18	DRY	8.7
2	INTERMED IATE	12.2 5	9.625	NEW	API	N	0	2810	0	2810		984	2810	J-55	36	LT&C	1.32	2.29	DRY	4.48	DRY	5.58
3	PRODUCTI ON	8.75	7.0	NEW	API	N	0	8920	0	8837		-5043	8920	P- 110	26	LT&C	1.43	2.28	DRY	2.99	DRY	3.58
4	LINER	6.12 5	4.5	NEW	API	N	8720	20189	8642	9637	-4848	-5843	11469	P- 110	13.5	LT&C	1.85	2.15	DRY	2.18	DRY	2.73

Well Name: QUERECHO 23/26 FED COM Well Number: 527H

Casing ID: 1

String

SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Querecho_23_26_Fed_Com__527H_CsgAssumptions_20241115135907.pdf

Casing ID: 2

String

INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Querecho_23_26_Fed_Com__527H_CsgAssumptions_20241115140009.pdf

Casing ID: 3

String

PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Querecho_23_26_Fed_Com__527H_CsgAssumptions_20241115135957.pdf

Well Name: QUERECHO 23/26 FED COM Well Number: 527H

Casing Attachments

Casing ID: 4

String

LINER

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Querecho_23_26_Fed_Com__527H_CsgAssumptions_20241115140021.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1104	730	2.12	12.5	1550	100	Class C	Salt, Gel, Extender, LCM
SURFACE	Tail	6.	1104	1295	200	1.34	14.8	268	100	Class C	Retarder
INTERMEDIATE	Lead		0	2124	390	2.12	12.5	830	25	Class C	Salt, Gel, Extender, LCM
INTERMEDIATE	Tail		2124	2810	200	1.34	14.8	268	25	Class C	Retarder
PRODUCTION	Lead	4900	2610	4193	140	2.12	12.5	300	25	Class C	Salt, Gel, Extender, LCM, Defoamer
PRODUCTION	Tail		4193	4900	100	1.34	14.8	134	25	Class C	RETARDER, FLUID LOSS, DEFOAMER
PRODUCTION	Lead	4900	4900	6462	140	2.12	12.5	300	25	CLASS C	SALT, GEL, EXTENDER, LCM, DEFOAMER
PRODUCTION	Tail		6462	8920	400	1.18	15.6	472	25	CLASS H	RETARDER, FLUID LOSS, DEFAOMER
LINER	Lead		8720	2018 9	730	1.85	13.5	1360	25	Class H	Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-settling Agent

Well Name: QUERECHO 23/26 FED COM Well Number: 527H

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with 43 CFR 3172:

Diagram of the equipment for the circulating system in accordance with 43 CFR 3172:

Describe what will be on location to control well or mitigate other conditions: Formation integrity test will be performed per 43 CFR Part 3172. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR Part 3172.

Describe the mud monitoring system utilized: Pason/PVT/visual monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	Н	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1295	SPUD MUD	8.4	8.6		9					
1295	2810	SALT SATURATED	9.5	10.5							
2810	8920	WATER-BASED MUD	8.6	9.5							
8920	2018 9	OIL-BASED MUD	10	11.5							

Well Name: QUERECHO 23/26 FED COM Well Number: 527H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

No logs are planned based on well control or offset log information. Offset Well: Querecho 23/26 Fed Com #626H

List of open and cased hole logs run in the well:

MEASUREMENT WHILE DRILLING, MUD LOG/GEOLOGIC LITHOLOGY LOG,

Coring operation description for the well:

None

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 5763 Anticipated Surface Pressure: 3642

Anticipated Bottom Hole Temperature(F): 140

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

Contingency Plans geohazards

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations

Querecho_23_26_B3CN_Fed_Com_1H_H2S_Plan_20210728133152.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Querecho_23_26_Fed_Com_527H_MOC_Dir_Plan_20240531093402.pdf Querecho_23_26_Fed_Com_527H_MOC_Dir_Plot_20240531093406.pdf

Other proposed operations facets description:

Other proposed operations facets attachment:


Querecho_23_26_Fed_Com__527H_AddInfo_20240531093414.pdf
Querecho_23_26_Fed_Com__527H_Drlg_Program_20241115140044.pdf
Querecho_23_26_Fed_Com__527H_NGMP1_20241115141343.pdf

Other Variance request(s)?:

Other Variance attachment:

Mewbourne_Offline_Cementing_Variance_20240531093452.pdf Mewbourne_Break_Testing_Variance_20240531093500.pdf



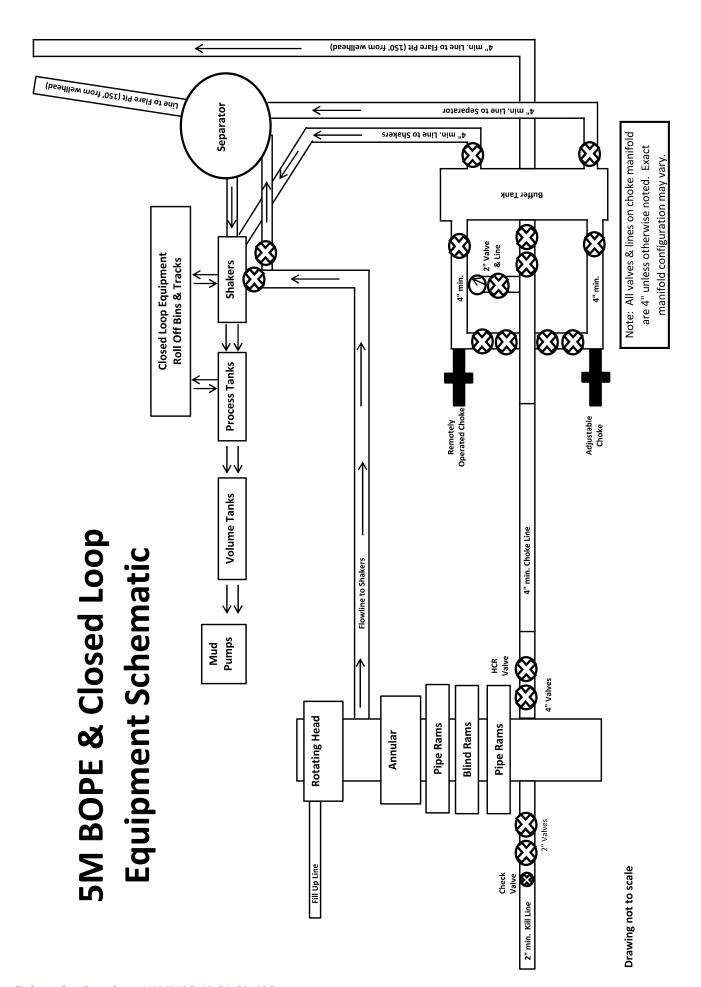



LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD

HYDROSTATIC TESTING REPORT

LTYY/QR-5.7.1-28

№: 230826015

Product Name					· · · · · · · · · · · · · · · · · · ·						
	Cho	ke And Kill Hose		Standard		API Spec 16C 3 rd edition					
Product Specification	3″×1000	0psi×60ft (18.29m))	Serial Num	ber	7660144					
Inspection Equipment	MTU	J-BS-1600-3200-E		Test mediu	ım	Water					
Inspection Department	Ç	.C. Department	Inspection I	Date	2023.08.26						
		Rate of len	ngth change	*	•						
Standard requirements	At working pro	essure, the rate of len	ngth change	should not m	ore than	±2%					
Testing result	10000psi (69.0	10000psi (69.0MPa) ,Rate of length change 0.7%									
///		Hydrostat	tic testing								
Standard requirements		orking pressure, the ssure-holding period				ot less than three minutes					
Testing result	15000psi (103	15000psi (103.5MPa), 3 min for the first time, 60 min for the second time, no leakage									
Graph of pressure testin	g:										
110			110								
100			110 100 90 83 70 66 17 84 15 10								
100 - 90 - 90 - 90 - 90 - 90 - 90 - 90 -	महंद्य महंद्य महंद्य महंद्य सह	N.21 22:00:21 22:00:21 22:00:21 22:00:21 22:00	50 - 50 - 50 - 50 - 50 - 50 - 50 - 50 -	SI 23×19-58 23-59:	- 2015 (2005)	001454 002454 003654 00:					
100 90 90 90 90 90 90 90	महंद्य महंद्य महंद्य महंद्य सह		50 - 50 - 50 - 50 - 50 - 50 - 50 - 50 -	SI 23×19-58 23-59:	S\$ 00:09:S\$	355000HC (100					



LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD

CERTIFICATE OF QUALITY

LTYY/QR-5.7.1-19B

№: LT2023-126-002

Customer Name	Austin Hose								
Product Name	Choke And Kill Hose								
Product Specification	3"×10000psi×60ft (18.29m)	Quantity	2PCS						
Serial Number	7660143~7660144	FSL	FSL3						
Temperature Range	-29℃~+121℃	Standard	API Spec 16C 3 rd edition						
Inspection Department	Q.C. Department	Inspection date	2023.08.26						

	Inspection	on Items	3			Inspection result	ds			
	Appearance (Checkin	g	In accordance with API Spec 16C 3 rd edition						
	Size and L	engths		In accordance with API Spec 16C 3 rd edition						
Γ	Dimensions and	d Tolerar	nces	In accordar	nce with API Spec	16C 3 rd edition				
End Connections: 4-	/16"×10000psi I	ntegral fla	ange for sour gas ser	vice	In accorda	nce with API Spec	6A 21st edition			
End Connections: 4-	1/16″×10000psi I	ntegral fla	ange for sour gas ser	vice	In accordance with API Spec 17D 3 rd edition					
	Hydrostatic	Testing			In accordance with API Spec 16C 3 rd edition					
	product M	arking			In accordance with API Spec 16C 3 rd edition					
Inspection con	nclusion		The inspected ite	ms m	eet standard requirer	ments of API Spec	16C 3 rd edition			
Remark	:s									
Approver	Jian long (Chen	Auditor	1/1	nging Dong	Inspector	Zhansheng Wang			



LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD

CERTIFICATE OF CONFORMANCE

№:LT230826016

Product Name: Choke And Kill Hose

Product Specification: 3"×10000psi×60ft (18.29m)

Serial Number: 7660143~7660144

End Connections: 4-1/16"×10000psi Integral flange for sour gas service

The Choke And Kill Hose assembly was produced by LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD. in Aug 2023, and inspected by LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD. according to API Spec 16C 3rd edition on Aug 26, 2023. The overall condition is good. This is to certify that the Choke And Kill Hose complies with all current standards and specifications for API Spec 16C 3rd edition.

Jian long Chen


QC Manager:


Date: Aug 26, 2023

Released to Imaging: 6/11/2025 10:54:53 AM



13-5/8" MN-DS Wellhead System

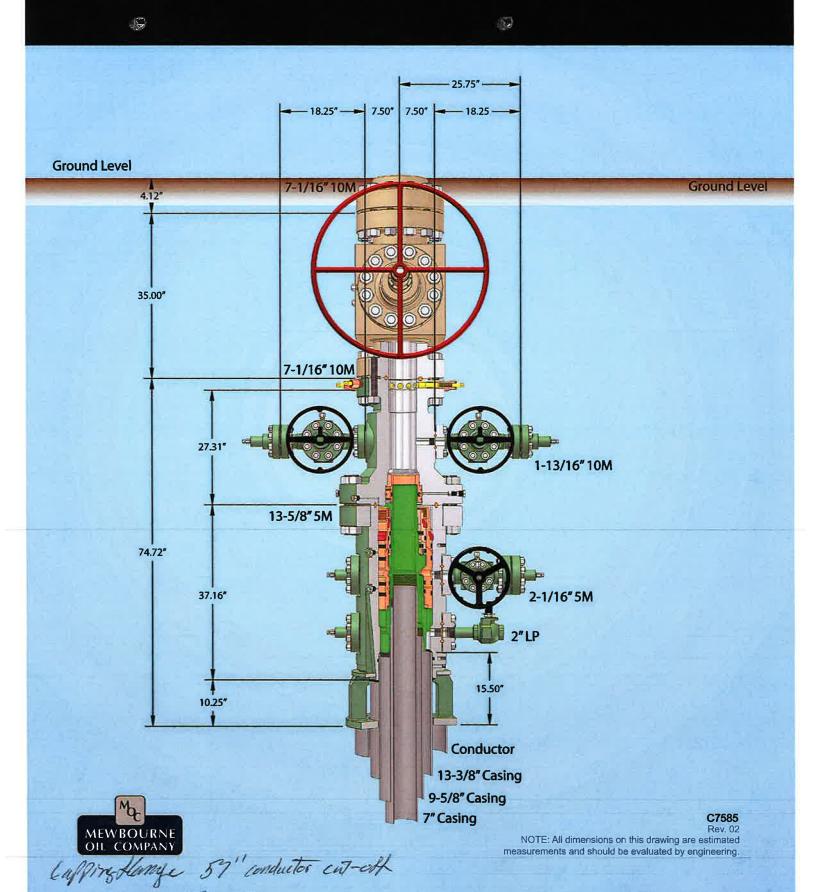

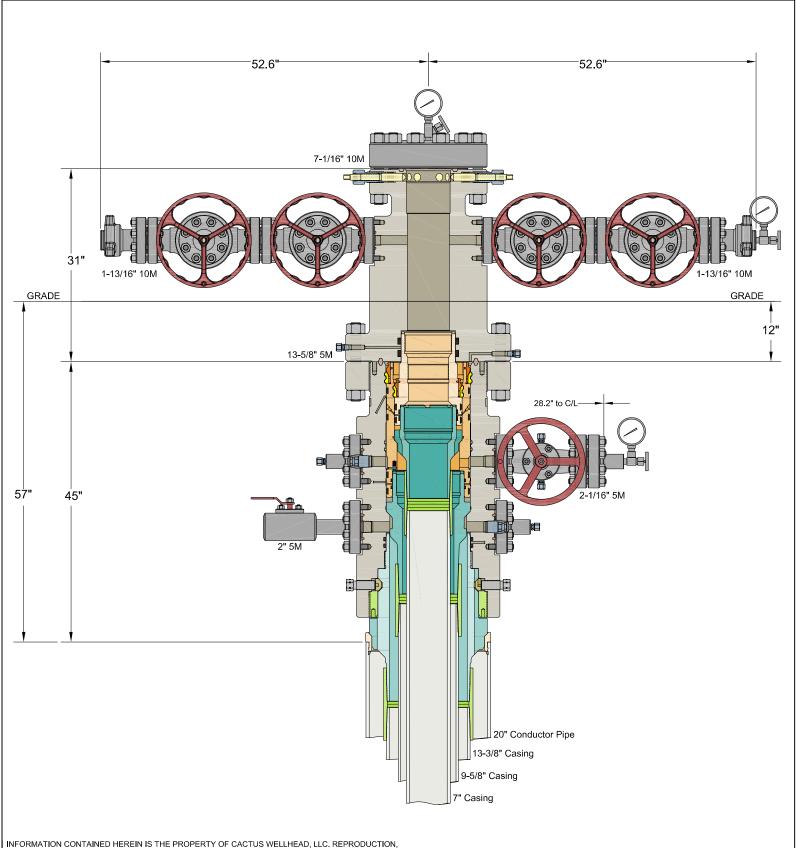

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.


CACTUS WELLHEAD LLC

20" x 13-3/8" x 9-5/8" x 7" MBU-3T-CFL-R-DBLO Wellhead System With 9-5/8" & 7" Fluted Mandrel Casing Hangers And 13-5/8" 5M x 7-1/16" 10M CTH-DBLHPS Tubing Head

ALL DIMENSIONS APPROXIMATE MEWBOURNE OIL COMPANY


DRAWN DLE 18APR22
APPRV

DRAWING NO. HBE0000660

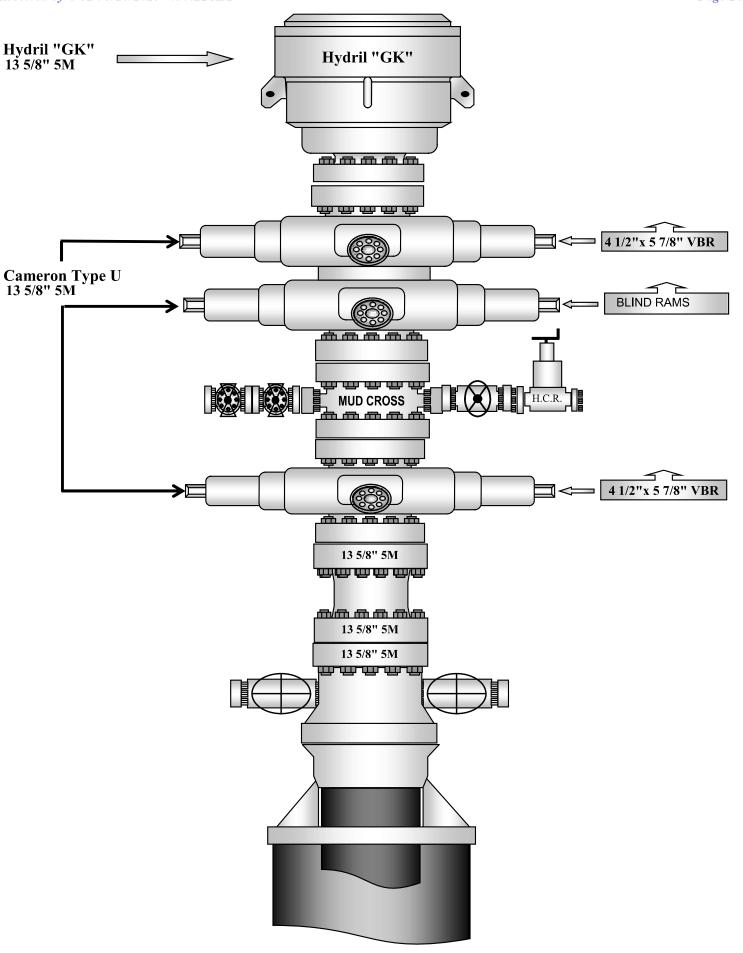



13-5/8" MN-DS Wellhead System

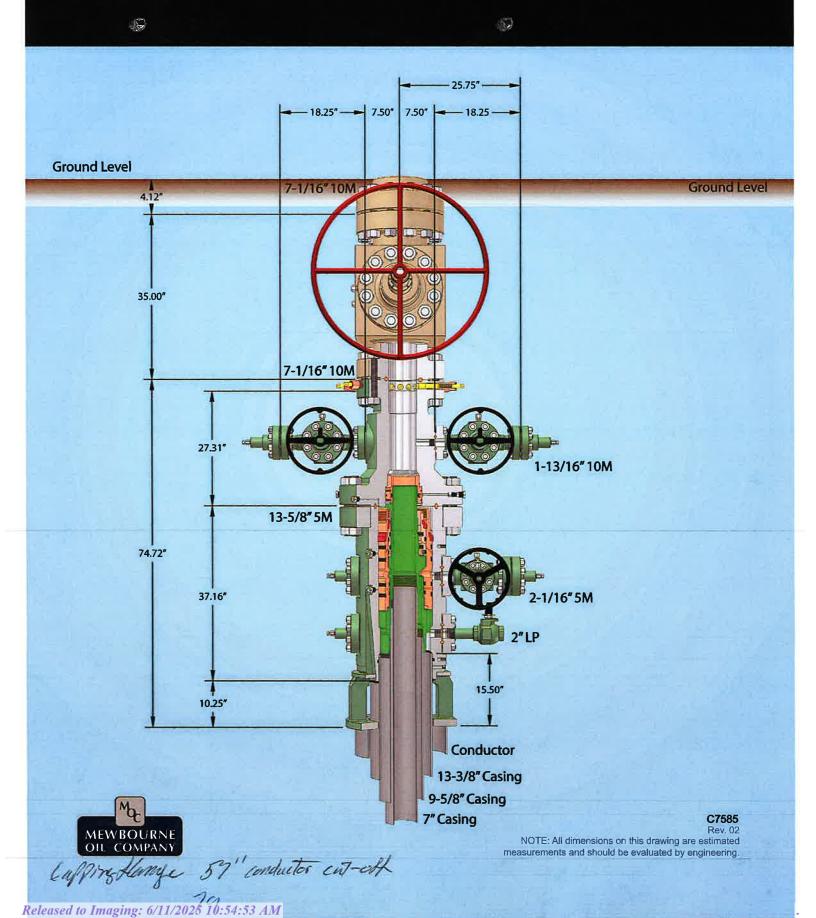

Mewbourne Oil Company, Querecho 23/26 Fed Com 527H Sec 23, T18S, R32E

SHL: 235' FNL 1245' FEL (Sec 23) BHL: 100' FSL 660' FEL (Sec 26)

		Casing Prog	ram Design A			BLM Minimum Safety Factors	1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	1295'	1295'	13.375" 48# H40 STC	1.33	2.99	5.18	8.70
Int	12.25"	0'	0'	2810'	2810'	9.625" 36# J55 LTC	1.32	2.29	4.48	5.58
Production	8.75"	0'	0'	8920'	8837'	7" 26# P110 LTC	1.43	2.28	2.99	3.58
Liner	6.125"	8720'	8642'	20189'	9637'	4.5" 13.5# P110 LTC	1.85	2.15	2.18	2.73

Cement Program

Casing		# Sacks	Wt. lb/gal	Yield ft ³ /sack	тос/вос	Volume ft ³	% Excess	Slurry Description
13,375 in	LEAD	730	12.5	2.12	0' - 1104'	1550	100%	Class C: Salt, Gel, Extender, LCM
15.575 III	TAIL	200	14.8	1.34	1104' - 1295'	268	100%	Class C: Retarder
9.625 in	LEAD	390	12.5	2.12	0' - 2124'	830	25%	Class C: Salt, Gel, Extender, LCM
9.025 m	TAIL	200	14.8	1.34	2124' - 2810'	268	2370	Class C: Retarder
1st Stg 7 in	LEAD	140	12.5	2.12	4900' - 6462'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
1st Stg / in	TAIL	400	15.6	1.18	6462' - 8920'	472	2376	Class H: Retarder, Fluid Loss, Defoamer
					7'' DV	Tool @ 4900'		
2nd Stg 7 in	LEAD	140	12.5	2.12	2610' - 4193'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
2lid Stg / Ili	TAIL	100	14.8	1.34	4193' - 4900'	134	23%	Class C: Retarder, Fluid Loss, Defoamer
4.5 in	LEAD	730	13.5	1.85	8720' - 20189'	1360	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti- settling Agent

Design A - Mud Program

Depth	Mud Wt	Mud Type
	8.4 - 8.6	
0' - 1295'	8.4 - 8.6	Fresh Water
1295' - 2810'	9.5 - 10.5	Brine
2810' - 8920'	8.6 - 9.5	Cut-Brine
8920' - 20189'	10.0 - 11.5	OBM

Geology

Formation	Est. Top (TVD)	Mineral Resources Formation		Est. Top (TVD)	Mineral Resources
Rustler	1207'	Usable Water	Usable Water Yeso		
Castile			Delaware (Lamar)	4924'	Oil/Natural Gas
Salt Top	1460'	None	Bell Canyon		
Salt Base	2583'	None	Cherry Canyon		
Yates	2773'	Oil/Natural Gas	Manzanita Marker		
Seven Rivers	3266'	Oil/Natural Gas	Basal Brushy Canyon		
Queen	3976'	Oil/Natural Gas	Bone Spring	6839'	Oil/Natural Gas
Capitan			1st Bone Spring	8341'	Oil/Natural Gas
Grayburg	4282'	None	2nd Bone Spring	9088'	Oil/Natural Gas
San Andres	4602'	Oil/Natural Gas	3rd Bone Spring	9848'	Oil/Natural Gas
Glorieta			Wolfcamp		

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Querecho 23/26 Fed Com 527H Sec 23, T18S, R32E SHL: 235' FNL 1245' FEL (Sec 23)

SHL: 235' FNL 1245' FEL (Sec 23) BHL: 100' FSL 660' FEL (Sec 26)

	Casing Program Design B						1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	1295'	1295'	13.375" 48# H40 STC	1.33	2.99	5.18	8.70
Int	12.25"	0'	0'	2810'	2810'	9.625" 36# J55 LTC	1.32	2.29	4.48	5.58
Production	8.75"	0'	0'	9820'	9414'	7" 26# P110 LTC	1.34	2.14	2.71	3.25
Liner	6.125"	8920'	8837'	20189'	9637'	4.5" 13.5# P110 LTC	1.85	2.15	2.22	2.77

Design B - Cement Program

Design B - Cement Frogran	•							
Casing		# Sacks	Wt. lb/gal	Yield ft ³ /sack	TOC/BOC	Volume ft ³	% Excess	Slurry Description
13,375 in	LEAD	730	12.5	2.12	0' - 1104'	1550	100%	Class C: Salt, Gel, Extender, LCM
13.575 III	TAIL	200	14.8	1.34	1104' - 1295'	268	100%	Class C: Retarder
9.625 in	LEAD	390	12.5	2.12	0' - 2124'	830	25%	Class C: Salt, Gel, Extender, LCM
9.025 III	TAIL	200	14.8	1.34	2124' - 2810'	268	23%	Class C: Retarder
1st Stg 7 in	LEAD	220	12.5	2.12	4900' - 7355'	470	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
1st Stg / III	TAIL	400	15.6	1.18	7355' - 9820'	472	2370	Class H: Retarder, Fluid Loss, Defoamer
					7" DV	Tool @ 4900'		
2nd Stg 7 in	LEAD	140	12.5	2.12	2610' - 4193'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
Ziiu Stg / III	TAIL	100	14.8	1.34	4193' - 4900'	134	23%	Class C: Retarder, Fluid Loss, Defoamer
4.5 in	LEAD	720	13.5	1.85	8920' - 20189'	1340	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-

Design B - Mud Program

Depth	Mud Wt	Mud Type
	8.4 - 8.6	
0' - 1295'	8.4 - 8.6	Fresh Water
1295' - 2810'	9.5 - 10.5	Brine
2810' - 9820'	8.6 - 9.5	Cut-Brine
9820' - 20189'	10.0 - 11.5	OBM

Geology

Geology					
Formation	Est. Top (TVD)	Mineral Resources Formation		Est. Top (TVD)	Mineral Resources
Rustler	1207'	Usable Water	Yeso		
Castile			Delaware (Lamar)	4924'	Oil/Natural Gas
Salt Top	1460'	None	Bell Canyon		
Salt Base	2583'	None	Cherry Canyon		
Yates	2773'	Oil/Natural Gas	Manzanita Marker		
Seven Rivers	3266'	Oil/Natural Gas	Basal Brushy Canyon		
Queen	3976'	Oil/Natural Gas	Bone Spring	6839'	Oil/Natural Gas
Capitan			1st Bone Spring	8341'	Oil/Natural Gas
Grayburg	4282'	None	2nd Bone Spring	9088'	Oil/Natural Gas
San Andres	4602'	Oil/Natural Gas	3rd Bone Spring	9848'	Oil/Natural Gas
Glorieta			Wolfcamp		

	Y or N						
Is casing new? If used, attach certification as required in Onshore Order #1	Y						
Is casing API approved? If no, attach casing specification sheet.	Y						
Is premium or uncommon casing planned? If yes attach casing specification sheet.							
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).							
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y						
Is well located within Capitan Reef?	N						
If yes, does production casing cement tie back a minimum of 50' above the Reef?							
Is well within the designated 4 string boundary.	N						
Is well located in SOPA but not in R-111-Q?	N						
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?							
Is well located in R-111-Q and SOPA?	N						
If yes, are the first three strings cemented to surface?							
Is 2 nd string set 100' to 600' below the base of salt?							
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.							
Is an engineered weak point used to satisfy R-111-Q?							
If yes, at what depth is the weak point planned?							
Is well located in high Cave/Karst?	N						
If yes, are there two strings cemented to surface?							
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?							
Is well located in critical Cave/Karst?	N						
If yes, are there three strings cemented to surface?							

Mewbourne Oil Company, Querecho 23/26 Fed Com 527H Sec 23, T18S, R32E

SHL: 235' FNL 1245' FEL (Sec 23) BHL: 100' FSL 660' FEL (Sec 26)

	Casing Program Design A						1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	1295'	1295'	13.375" 48# H40 STC	1.33	2.99	5.18	8.70
Int	12.25"	0'	0'	2810'	2810'	9.625" 36# J55 LTC	1.32	2.29	4.48	5.58
Production	8.75"	0'	0'	8920'	8837'	7" 26# P110 LTC	1.43	2.28	2.99	3.58
Liner	6.125"	8720'	8642'	20189'	9637'	4.5" 13.5# P110 LTC	1.85	2.15	2.18	2.73

Cement Program

Casing		# Sacks	Wt. lb/gal	Yield ft ³ /sack	тос/вос	Volume ft ³	% Excess	Slurry Description
13,375 in	LEAD	730	12.5	2.12	0' - 1104'	1550	100%	Class C: Salt, Gel, Extender, LCM
15.575 III	TAIL	200	14.8	1.34	1104' - 1295'	268	100%	Class C: Retarder
9.625 in	LEAD	390	12.5	2.12	0' - 2124'	830	25%	Class C: Salt, Gel, Extender, LCM
9.025 III	TAIL	200	14.8	1.34	2124' - 2810'	268	2370	Class C: Retarder
1st Stg 7 in	LEAD	140	12.5	2.12	4900' - 6462'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
1st Stg / III	TAIL	400	15.6	1.18	6462' - 8920'	472	2370	Class H: Retarder, Fluid Loss, Defoamer
					7" DV	Tool @ 4900'		
2nd Stg 7 in	LEAD	140	12.5	2.12	2610' - 4193'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
2nd Stg / m	TAIL	100	14.8	1.34	4193' - 4900'	134	2370	Class C: Retarder, Fluid Loss, Defoamer
4.5 in	LEAD	730	13.5	1.85	8720' - 20189'	1360	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti- settling Agent

Design A - Mud Program

Depth	Mud Wt	Mud Type
	8.4 - 8.6	
0' - 1295'	8.4 - 8.6	Fresh Water
1295' - 2810'	9.5 - 10.5	Brine
2810' - 8920'	8.6 - 9.5	Cut-Brine
8920' - 20189'	10.0 - 11.5	OBM

Geology

Formation	Est. Top (TVD)	Mineral Resources	Formation	Est. Top (TVD)	Mineral Resources
Rustler	1207'	Usable Water	Yeso		
Castile			Delaware (Lamar)	4924'	Oil/Natural Gas
Salt Top	1460'	None	Bell Canyon		
Salt Base	2583'	None	Cherry Canyon		
Yates	2773'	Oil/Natural Gas	Manzanita Marker		
Seven Rivers	3266'	Oil/Natural Gas	Basal Brushy Canyon		
Queen	3976'	Oil/Natural Gas	Bone Spring	6839'	Oil/Natural Gas
Capitan			1st Bone Spring	8341'	Oil/Natural Gas
Grayburg	4282'	None	2nd Bone Spring	9088'	Oil/Natural Gas
San Andres	4602'	Oil/Natural Gas	3rd Bone Spring	9848'	Oil/Natural Gas
Glorieta			Wolfcamp		

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Querecho 23/26 Fed Com 527H Sec 23, T18S, R32E SHL: 235' FNL 1245' FEL (Sec 23)

SHL: 235' FNL 1245' FEL (Sec 23) BHL: 100' FSL 660' FEL (Sec 26)

Casing Program Design B BLM Minim Factors						BLM Minimum Safety Factors	1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	1295'	1295'	13.375" 48# H40 STC	1.33	2.99	5.18	8.70
Int	12.25"	0'	0'	2810'	2810'	9.625" 36# J55 LTC	1.32	2.29	4.48	5.58
Production	8.75"	0'	0'	9820'	9414'	7" 26# P110 LTC	1.34	2.14	2.71	3.25
Liner	6.125"	8920'	8837'	20189'	9637'	4.5" 13.5# P110 LTC	1.85	2.15	2.22	2.77

Design B - Cement Program

Design B - Cement 110gran								
Casing		# Sacks	Wt. lb/gal	Yield ft ³ /sack	TOC/BOC	Volume ft ³	% Excess	Slurry Description
13,375 in	LEAD	730	12.5	2.12	0' - 1104'	1550	100%	Class C: Salt, Gel, Extender, LCM
13.375 III	TAIL	200	14.8	1.34	1104' - 1295'	268	10076	Class C: Retarder
9.625 in	LEAD	390	12.5	2.12	0' - 2124'	830	25%	Class C: Salt, Gel, Extender, LCM
9.025 III	TAIL	200	14.8	1.34	2124' - 2810'	268	2370	Class C: Retarder
1st Stg 7 in	LEAD	220	12.5	2.12	4900' - 7355'	470	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
1st Stg / III	TAIL	400	15.6	1.18	7355' - 9820'	472	2376	Class H: Retarder, Fluid Loss, Defoamer
					7" DV	Tool @ 4900'		
2nd Stg 7 in	LEAD	140	12.5	2.12	2610' - 4193'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
Znu otg / m	TAIL	100	14.8	1.34	4193' - 4900'	134	2370	Class C: Retarder, Fluid Loss, Defoamer
4.5 in	LEAD	720	13.5	1.85	8920' - 20189'	1340	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-

Design B - Mud Program

Depth	Mud Wt	Mud Type
	8.4 - 8.6	
0' - 1295'	8.4 - 8.6	Fresh Water
1295' - 2810'	9.5 - 10.5	Brine
2810' - 9820'	8.6 - 9.5	Cut-Brine
9820' - 20189'	10.0 - 11.5	OBM

Geology

Geology					
Formation	nation Est. Top (TVD) Mineral Resources Formation		Est. Top (TVD)	Mineral Resources	
Rustler	1207'	Usable Water	Yeso		
Castile			Delaware (Lamar)	4924'	Oil/Natural Gas
Salt Top	1460'	None	Bell Canyon		
Salt Base	2583'	None	Cherry Canyon		
Yates	2773'	Oil/Natural Gas	Manzanita Marker		
Seven Rivers	3266'	Oil/Natural Gas	Basal Brushy Canyon		
Queen	3976'	Oil/Natural Gas	Bone Spring	6839'	Oil/Natural Gas
Capitan			1st Bone Spring	8341'	Oil/Natural Gas
Grayburg	4282'	None	2nd Bone Spring	9088'	Oil/Natural Gas
San Andres	4602'	Oil/Natural Gas	3rd Bone Spring	9848'	Oil/Natural Gas
Glorieta			Wolfcamp		

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Querecho 23/26 Fed Com 527H Sec 23, T18S, R32E SHI : 235' FNI 1245' FFI (Sec 23)

SHL: 235' FNL 1245' FEL (Sec 23) BHL: 100' FSL 660' FEL (Sec 26)

Casing Program Design A					BLM Minimum Safety Factors	1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet	
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	1295'	1295'	13.375" 48# H40 STC	1.33	2.99	5.18	8.70
Int	12.25"	0'	0'	2810'	2810'	9.625" 36# J55 LTC	1.32	2.29	4.48	5.58
Production	8.75"	0'	0'	8920'	8837'	7" 26# P110 LTC	1.43	2.28	2.99	3.58
Liner	6.125"	8720'	8642'	20189'	9637'	4.5" 13.5# P110 LTC	1.85	2.15	2.18	2.73

Cement Program

Cement i rogram								
Casing		# Sacks	Wt. lb/gal	Yield ft ³ /sack	TOC/BOC	Volume ft ³	% Excess	Slurry Description
13,375 in	LEAD	730	12.5	2.12	0' - 1104'	1550	100%	Class C: Salt, Gel, Extender, LCM
13.373 III	TAIL	200	14.8	1.34	1104' - 1295'	268	100%	Class C: Retarder
9.625 in	LEAD	390	12.5	2.12	0' - 2124'	830	25%	Class C: Salt, Gel, Extender, LCM
9.025 III	TAIL	200	14.8	1.34	2124' - 2810'	268	2376	Class C: Retarder
1st Stg 7 in	LEAD	140	12.5	2.12	4900' - 6462'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
1st Stg / III	TAIL	400	15.6	1.18	6462' - 8920'	472	2376	Class H: Retarder, Fluid Loss, Defoamer
					7'' DV	Tool @ 4900'		
2nd Stg 7 in	LEAD	140	12.5	2.12	2610' - 4193'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
Ziiu Sig / iii	TAIL	100	14.8	1.34	4193' - 4900'	134	2370	Class C: Retarder, Fluid Loss, Defoamer
4.5 in	LEAD	730	13.5	1.85	8720' - 20189'	1360	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti- settling Agent

Design A - Mud Program

Depth	Mud Wt	Mud Type
	8.4 - 8.6	
0' - 1295'	8.4 - 8.6	Fresh Water
1295' - 2810'	9.5 - 10.5	Brine
2810' - 8920'	8.6 - 9.5	Cut-Brine
8920' - 20189'	10.0 - 11.5	OBM

Geology

Formation	Est. Top (TVD)	Mineral Resources	tesources Formation		Mineral Resources
Rustler	1207'	Usable Water	Yeso		
Castile			Delaware (Lamar)	4924'	Oil/Natural Gas
Salt Top	1460'	None	Bell Canyon		
Salt Base	2583'	None	Cherry Canyon		
Yates	2773'	Oil/Natural Gas	Manzanita Marker		
Seven Rivers	3266'	Oil/Natural Gas	Basal Brushy Canyon		
Queen	3976'	Oil/Natural Gas	Bone Spring	6839'	Oil/Natural Gas
Capitan			1st Bone Spring	8341'	Oil/Natural Gas
Grayburg	4282'	None	2nd Bone Spring	9088'	Oil/Natural Gas
San Andres	4602'	Oil/Natural Gas	3rd Bone Spring	9848'	Oil/Natural Gas
Glorieta			Wolfcamp		

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Querecho 23/26 Fed Com 527H Sec 23, T18S, R32E SHL: 235' FNL 1245' FEL (Sec 23)

SHL: 235' FNL 1245' FEL (Sec 23) BHL: 100' FSL 660' FEL (Sec 26)

	Casing Program Design B						1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	1295'	1295'	13.375" 48# H40 STC	1.33	2.99	5.18	8.70
Int	12.25"	0'	0'	2810'	2810'	9.625" 36# J55 LTC	1.32	2.29	4.48	5.58
Production	8.75"	0'	0'	9820'	9414'	7" 26# P110 LTC	1.34	2.14	2.71	3.25
Liner	6.125"	8920'	8837'	20189'	9637'	4.5" 13.5# P110 LTC	1.85	2.15	2.22	2.77

Design B - Cement Program

Design B - Cement 110gra	···							
Casing		# Sacks	Wt. lb/gal	Yield ft ³ /sack	TOC/BOC	Volume ft ³	% Excess	Slurry Description
13,375 in	LEAD	730	12.5	2.12	0' - 1104'	1550	100%	Class C: Salt, Gel, Extender, LCM
15.575 III	TAIL	200	14.8	1.34	1104' - 1295'	268	100%	Class C: Retarder
9.625 in	LEAD	390	12.5	2.12	0' - 2124'	830	25%	Class C: Salt, Gel, Extender, LCM
9.025 III	TAIL	200	14.8	1.34	2124' - 2810'	268		Class C: Retarder
1st Stg 7 in	LEAD	220	12.5	2.12	4900' - 7355'	470	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
1st Stg / iii	TAIL	400	15.6	1.18	7355' - 9820'	472	2376	Class H: Retarder, Fluid Loss, Defoamer
					7" DV	Tool @ 4900'		
2nd Stg 7 in	LEAD	140	12.5	2.12	2610' - 4193'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
Znu Stg / III	TAIL	100	14.8	1.34	4193' - 4900'	134	2370	Class C: Retarder, Fluid Loss, Defoamer
4.5 in	LEAD	720	13.5	1.85	8920' - 20189'	1340	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-

Design B - Mud Program

Depth	Mud Wt	Mud Type
	8.4 - 8.6	
0' - 1295'	8.4 - 8.6	Fresh Water
1295' - 2810'	9.5 - 10.5	Brine
2810' - 9820'	8.6 - 9.5	Cut-Brine
9820' - 20189'	10.0 - 11.5	OBM

Geology

Geology						
Formation	Est. Top (TVD)	Mineral Resources	Formation	Est. Top (TVD)	Mineral Resources	
Rustler	1207'	Usable Water	Yeso			
Castile			Delaware (Lamar)	4924'	Oil/Natural Gas	
Salt Top	1460'	None	Bell Canyon			
Salt Base	2583'	None	Cherry Canyon			
Yates	2773'	Oil/Natural Gas	Manzanita Marker			
Seven Rivers	3266'	Oil/Natural Gas	Basal Brushy Canyon			
Queen	3976'	Oil/Natural Gas	Bone Spring	6839'	Oil/Natural Gas	
Capitan			1st Bone Spring	8341'	Oil/Natural Gas	
Grayburg	4282'	None	2nd Bone Spring	9088'	Oil/Natural Gas	
San Andres	4602'	Oil/Natural Gas	3rd Bone Spring	9848'	Oil/Natural Gas	
Glorieta			Wolfcamp			

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach easing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the easing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50° above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Querecho 23/26 Fed Com 527H Sec 23, T18S, R32E SHL: 235' FNL 1245' FEL (Sec 23)

BHL: 235' FNL 1245' FEL (Sec 23)
BHL: 100' FSL 660' FEL (Sec 26)

	Casing Program Design A						1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	1295'	1295'	13.375" 48# H40 STC	1.33	2.99	5.18	8.70
Int	12.25"	0'	0'	2810'	2810'	9.625" 36# J55 LTC	1.32	2.29	4.48	5.58
Production	8.75"	0'	0'	8920'	8837'	7" 26# P110 LTC	1.43	2.28	2.99	3.58
Liner	6.125"	8720'	8642'	20189'	9637'	4.5" 13.5# P110 LTC	1.85	2.15	2.18	2.73

Cement Program

Casing		# Sacks	Wt. lb/gal	Yield ft ³ /sack	тос/вос	Volume ft ³	% Excess	Slurry Description
13,375 in	LEAD	730	12.5	2.12	0' - 1104'	1550	100%	Class C: Salt, Gel, Extender, LCM
15.575 III	TAIL	200	14.8	1.34	1104' - 1295'	268	100%	Class C: Retarder
9.625 in	LEAD	390	12.5	2.12	0' - 2124'	830	25%	Class C: Salt, Gel, Extender, LCM
9.025 m	TAIL	200	14.8	1.34	2124' - 2810'	268	2370	Class C: Retarder
1st Stg 7 in	LEAD	140	12.5	2.12	4900' - 6462'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
1st Stg / iii	TAIL	400	15.6	1.18	6462' - 8920'	472	2376	Class H: Retarder, Fluid Loss, Defoamer
					7" DV	Tool @ 4900'		
2nd Stg 7 in	LEAD	140	12.5	2.12	2610' - 4193'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
2nd Stg / m	TAIL	100	14.8	1.34	4193' - 4900'	134	2370	Class C: Retarder, Fluid Loss, Defoamer
4.5 in	LEAD	730	13.5	1.85	8720' - 20189'	1360	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti- settling Agent

Design A - Mud Program

Depth	Mud Wt	Mud Type
	8.4 - 8.6	
0' - 1295'	8.4 - 8.6	Fresh Water
1295' - 2810'	9.5 - 10.5	Brine
2810' - 8920'	8.6 - 9.5	Cut-Brine
8920' - 20189'	10.0 - 11.5	OBM

Geology

Formation	Est. Top (TVD)	Mineral Resources	Mineral Resources Formation		Mineral Resources
Rustler	1207'	Usable Water	Yeso		
Castile			Delaware (Lamar)	4924'	Oil/Natural Gas
Salt Top	1460'	None	Bell Canyon		
Salt Base	2583'	None	Cherry Canyon		
Yates	2773'	Oil/Natural Gas	Manzanita Marker		
Seven Rivers	3266'	Oil/Natural Gas	Basal Brushy Canyon		
Queen	3976'	Oil/Natural Gas	Bone Spring	6839'	Oil/Natural Gas
Capitan			1st Bone Spring	8341'	Oil/Natural Gas
Grayburg	4282'	None	2nd Bone Spring	9088'	Oil/Natural Gas
San Andres	4602'	Oil/Natural Gas	3rd Bone Spring	9848'	Oil/Natural Gas
Glorieta			Wolfcamp		

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Querecho 23/26 Fed Com 527H Sec 23, T18S, R32E SHL: 235' FNL 1245' FFL (Sec 23)

SHL: 235' FNL 1245' FEL (Sec 23) BHL: 100' FSL 660' FEL (Sec 26)

	Casing Program Design B						Casing Program Design B BLM Minimum Safety Factors						1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension						
Surface	17.5"	0'	0'	1295'	1295'	13.375" 48# H40 STC	1.33	2.99	5.18	8.70						
Int	12.25"	0'	0'	2810'	2810'	9.625" 36# J55 LTC	1.32	2.29	4.48	5.58						
Production	8.75"	0'	0'	9820'	9414'	7" 26# P110 LTC	1.34	2.14	2.71	3.25						
Liner	6.125"	8920'	8837'	20189'	9637'	4.5" 13.5# P110 LTC	1.85	2.15	2.22	2.77						

Design B - Cement Program

Design B - Cement 110gra								
Casing		# Sacks	Wt. lb/gal	Yield ft ³ /sack	TOC/BOC	Volume ft ³	% Excess	Slurry Description
13,375 in	LEAD	730	12.5	2.12	0' - 1104'	1550	100%	Class C: Salt, Gel, Extender, LCM
15.575 III	TAIL	200	14.8	1.34	1104' - 1295'	268	100%	Class C: Retarder
9.625 in	LEAD	390	12.5	2.12	0' - 2124'	830	25%	Class C: Salt, Gel, Extender, LCM
9.025 III	TAIL	200	14.8	1.34	2124' - 2810'	268		Class C: Retarder
1st Stg 7 in	LEAD	220	12.5	2.12	4900' - 7355'	470	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
1st Stg / iii	TAIL	400	15.6	1.18	7355' - 9820'	472	2376	Class H: Retarder, Fluid Loss, Defoamer
					7" DV	Tool @ 4900'		
2nd Stg 7 in	LEAD	140	12.5	2.12	2610' - 4193'	300	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
Znu Stg / III	TAIL	100	14.8	1.34	4193' - 4900'	134	2370	Class C: Retarder, Fluid Loss, Defoamer
4.5 in	LEAD	720	13.5	1.85	8920' - 20189'	1340	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-

Design B - Mud Program

Depth	Mud Wt	Mud Type
	8.4 - 8.6	
0' - 1295'	8.4 - 8.6	Fresh Water
1295' - 2810'	9.5 - 10.5	Brine
2810' - 9820'	8.6 - 9.5	Cut-Brine
9820' - 20189'	10.0 - 11.5	OBM

Geology

Geology					
Formation	Est. Top (TVD)	Mineral Resources	Formation	Est. Top (TVD)	Mineral Resources
Rustler	1207'	Usable Water	Yeso		
Castile			Delaware (Lamar)	4924'	Oil/Natural Gas
Salt Top	1460'	None	Bell Canyon		
Salt Base	2583'	None	Cherry Canyon		
Yates	2773'	Oil/Natural Gas	Manzanita Marker		
Seven Rivers	3266'	Oil/Natural Gas	Basal Brushy Canyon		
Queen	3976'	Oil/Natural Gas	Bone Spring	6839'	Oil/Natural Gas
Capitan			1st Bone Spring	8341'	Oil/Natural Gas
Grayburg	4282'	None	2nd Bone Spring	9088'	Oil/Natural Gas
San Andres	4602'	Oil/Natural Gas	3rd Bone Spring	9848'	Oil/Natural Gas
Glorieta			Wolfcamp		

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500° into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company

Lea County, New Mexico NAD 83 Querecho 23/26 Fed Com #527H

Sec 23, T18S, R32E

SHL: 235' FNL & 1245' FEL (Sec 23) BHL: 100' FSL & 660' FEL (Sec 26)

Plan: Design #1

Standard Planning Report

30 May, 2024

Planning Report

Hobbs Database:

Company: Mewbourne Oil Company Project: Lea County, New Mexico NAD 83

Site: Querecho 23/26 Fed Com #527H

Well: Sec 23, T18S, R32E

Wellbore: BHL: 100' FSL & 660' FEL (Sec 26)

Design #1 Design:

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Site Querecho 23/26 Fed Com #527H

WELL @ 3822.0usft (Original Well Elev) WELL @ 3822.0usft (Original Well Elev)

Minimum Curvature

Project Lea County, New Mexico NAD 83

Map System: US State Plane 1983 North American Datum 1983 Geo Datum: Map Zone:

New Mexico Eastern Zone

System Datum: Mean Sea Level

Querecho 23/26 Fed Com #527H Site

Northing: 633,310.20 usft Site Position: 32.7395673 Latitude: From: Мар Easting: 726,091.80 usft Longitude: -103.7324603

0.0 usft Slot Radius: 13-3/16 " **Position Uncertainty:**

Well Sec 23, T18S, R32E

Well Position +N/-S 0.0 usft 633,310.20 usft Latitude: 32.7395673 Northing: +E/-W 0.0 usft Easting: 726,091.80 usft Longitude: -103.7324603

0.0 usft Wellhead Elevation: 3,822.0 usft Ground Level: 3,794.0 usft **Position Uncertainty**

Grid Convergence: 0.32°

Wellbore BHL: 100' FSL & 660' FEL (Sec 26)

Magnetics **Model Name** Sample Date Declination Dip Angle Field Strength (°) (°) (nT) 7.26 48,551.31395228 IGRF2010 12/31/2014 60.55

Design Design #1

Audit Notes:

PROTOTYPE Version: Phase: Tie On Depth: 0.0

Depth From (TVD) +N/-S +E/-W Direction Vertical Section: (usft) (usft) (usft) (°) 176.33 0.0 0.0 0.0

5/30/2024 **Plan Survey Tool Program** Date

Depth From Depth To

> (usft) (usft) Survey (Wellbore) **Tool Name** Remarks

0.0 20,189.3 Design #1 (BHL: 100' FSL & 660'

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.00	0.00	0.00	0.00	
3,706.9	10.14	39.24	3,704.3	34.6	28.3	2.00	2.00	0.00	39.24	
8,412.9	10.14	39.24	8,336.7	676.2	552.3	0.00	0.00	0.00	0.00	
8,919.8	0.00	0.00	8,841.0	710.8	580.6	2.00	-2.00	0.00	180.00	KOP: 473' FSL & 660'
9,807.7	88.77	179.60	9,414.0	150.0	584.5	10.00	10.00	0.00	179.60	
20,189.3	88.77	179.60	9,637.0	-10,228.9	656.6	0.00	0.00	0.00	0.00	BHL: 100' FSL & 660'

Planning Report

Hobbs Database:

Company: Mewbourne Oil Company Lea County, New Mexico NAD 83 Project: Querecho 23/26 Fed Com #527H Site:

Well: Sec 23, T18S, R32E BHL: 100' FSL & 660' FEL (Sec 26)

Design: Design #1

Wellbore:

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Site Querecho 23/26 Fed Com #527H WELL @ 3822.0usft (Original Well Elev) WELL @ 3822.0usft (Original Well Elev)

Minimum Curvature

	Design #1								
d Survey									
Measured Depth (usft)	d Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
SHL: 235	5' FNL & 1245' FEL	•							
100		0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200		0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300		0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700		0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800		0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100		0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300		0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600		0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700		0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100		0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200		0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600		0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700		0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800		0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100		0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200		0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300		39.24	3,300.0	1.4	1.1	-1.3	2.00	2.00	0.00
3,400	0.0 4.00	39.24	3,399.8	5.4	4.4	-5.1	2.00	2.00	0.00
3,500	0.0 6.00	39.24	3,499.5	12.2	9.9	-11.5	2.00	2.00	0.00
3,600		39.24	3,598.7	21.6	17.6	-20.4	2.00	2.00	0.00
3,706		39.24	3,704.3	34.6	28.3	-32.8	2.00	2.00	0.00
3,800		39.24	3,795.9	47.3	38.7	-44.8 57.0	0.00	0.00	0.00
3,900	0.0 10.14	39.24	3,894.3	61.0	49.8	-57.6	0.00	0.00	0.00
4,000		39.24	3,992.8	74.6	60.9	-70.5	0.00	0.00	0.00
4,100		39.24	4,091.2	88.2	72.1	-83.4	0.00	0.00	0.00
4,200		39.24	4,189.7	101.9	83.2	-96.3	0.00	0.00	0.00
4,300		39.24	4,288.1	115.5	94.3	-109.2	0.00	0.00	0.00
4,400	0.0 10.14	39.24	4,386.5	129.1	105.5	-122.1	0.00	0.00	0.00
4,500		39.24	4,485.0	142.8	116.6	-135.0	0.00	0.00	0.00
4,600		39.24	4,583.4	156.4	127.7	-147.9	0.00	0.00	0.00
4,700		39.24	4,681.9	170.0	138.9	-160.8	0.00	0.00	0.00
4,800		39.24	4,780.3	183.7	150.0	-173.7	0.00	0.00	0.00
4,900	0.0 10.14	39.24	4,878.7	197.3	161.1	-186.6	0.00	0.00	0.00
5,000	0.0 10.14	39.24	4,977.2	210.9	172.3	-199.4	0.00	0.00	0.00
5,100		39.24	5,075.6	224.5	183.4	-212.3	0.00	0.00	0.00
5,200	0.0 10.14	39.24	5,174.0	238.2	194.6	-225.2	0.00	0.00	0.00

Database: Hobbs

Company:Mewbourne Oil CompanyProject:Lea County, New Mexico NAD 83Site:Querecho 23/26 Fed Com #527H

Well: Sec 23, T18S, R32E
Wellbore: BHL: 100' FSL & 660' FEL (Sec 26)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site Querecho 23/26 Fed Com #527H WELL @ 3822.0usft (Original Well Elev) WELL @ 3822.0usft (Original Well Elev)

Grid

lanned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,300.0 5,400.0	10.14 10.14	39.24 39.24	5,272.5 5,370.9	251.8 265.4	205.7 216.8	-238.1 -251.0	0.00 0.00	0.00 0.00	0.00 0.00
5,500.0	10.14	39.24	5,469.4	279.1	228.0	-263.9	0.00	0.00	0.00
5,600.0	10.14	39.24	5,567.8	292.7	239.1	-276.8	0.00	0.00	0.00
5,700.0	10.14	39.24	5,666.2	306.3	250.2	-289.7	0.00	0.00	0.00
5,800.0	10.14	39.24	5,764.7	320.0	261.4	-302.6	0.00	0.00	0.00
5,900.0	10.14	39.24	5,863.1	333.6	272.5	-315.5	0.00	0.00	0.00
6,000.0	10.14	39.24	5,961.6	347.2	283.6	-328.4	0.00	0.00	0.00
6,100.0	10.14	39.24	6,060.0	360.9	294.8	-341.2	0.00	0.00	0.00
6,200.0	10.14	39.24	6,158.4	374.5	305.9	-354.1	0.00	0.00	0.00
6,300.0	10.14	39.24	6,256.9	388.1	317.0	-367.0	0.00	0.00	0.00
6,400.0	10.14	39.24	6,355.3	401.8	328.2	-379.9	0.00	0.00	0.00
0.500.0	10.14	20.24	0.450.0	445.4		202.0	0.00	0.00	0.00
6,500.0	10.14	39.24	6,453.8	415.4	339.3	-392.8	0.00	0.00	0.00
6,600.0 6,700.0	10.14	39.24	6,552.2	429.0	350.4	-405.7	0.00	0.00	0.00
,	10.14	39.24	6,650.6	442.7	361.6	-418.6	0.00	0.00	0.00
6,800.0	10.14	39.24	6,749.1	456.3	372.7	-431.5	0.00	0.00	0.00
6,900.0	10.14	39.24	6,847.5	469.9	383.8	-444.4	0.00	0.00	0.00
7,000.0	10.14	39.24	6,945.9	483.6	395.0	-457.3	0.00	0.00	0.00
7,100.0	10.14	39.24	7,044.4	497.2	406.1	-470.2	0.00	0.00	0.00
7,200.0	10.14	39.24	7,142.8	510.8	417.3	-483.0	0.00	0.00	0.00
7,300.0	10.14	39.24	7,241.3	524.5	428.4	-495.9	0.00	0.00	0.00
7,400.0	10.14	39.24	7,339.7	538.1	439.5	-508.8	0.00	0.00	0.00
7,500.0	10.14	39.24	7,438.1	551.7	450.7	-521.7	0.00	0.00	0.00
7,600.0	10.14	39.24	7,536.6	565.3	461.8	-534.6	0.00	0.00	0.00
7,700.0	10.14	39.24	7,635.0	579.0	472.9	-547.5	0.00	0.00	0.00
7,800.0	10.14	39.24	7,733.5	592.6	484.1	-560.4	0.00	0.00	0.00
7,900.0	10.14	39.24	7,831.9	606.2	495.2	-573.3	0.00	0.00	0.00
8,000.0	10.14	39.24	7.930.3	619.9	506.3	-586.2	0.00	0.00	0.00
8,100.0	10.14	39.24	8,028.8	633.5	517.5	-599.1	0.00	0.00	0.00
8,200.0	10.14	39.24	8,127.2	647.1	528.6	-612.0	0.00	0.00	0.00
8,300.0	10.14	39.24	8,225.6	660.8	539.7	-624.8	0.00	0.00	0.00
8,400.0	10.14	39.24	8,324.1	674.4	550.9	-637.7	0.00	0.00	0.00
8,412.9	10.14	39.24	8,336.7	676.2	552.3	-639.4	0.00	0.00	0.00
8,500.0	8.40	39.24	8,422.7	687.0	561.2	-649.7	2.00	-2.00	0.00
8,600.0	6.40	39.24	8,521.9	697.0	569.3	-659.1	2.00	-2.00	0.00
8,700.0	4.40	39.24	8,621.5	704.3	575.3	-666.0	2.00	-2.00	0.00
8,800.0	2.40	39.24	8,721.3	708.9	579.0	-670.3	2.00	-2.00	0.00
8,900.0	0.40	39.24	8,821.2	710.7	580.6	-672.1	2.00	-2.00	0.00
8,919.8	0.00	0.00	8,841.0	710.8	580.6	-672.1	2.00	-2.00	0.00
KOP: 473' FS	L & 660' FEL (S	ec 14)							
8,950,0	3.02	179.60	8,871.2	710.0	580.6	-671.4	10.00	10.00	0.00
9,000.0	8.02	179.60	8,921.0	705.2	580.6	-666.5	10.00	10.00	0.00
9,050.0	13.02	179.60	8,970.1	696.1	580.7	-657.4	10.00	10.00	0.00
9,100.0	18.02	179.60	9,018.3	682.7	580.8	-644.1	10.00	10.00	0.00
9,150.0	23.02	179.60	9,065.1	665.2	580.9	-626.6	10.00	10.00	0.00
9,200.0	28.02	179.60	9,110.2	643.6	581.1	-605.1	10.00	10.00	0.00
9,250.0	33.01	179.60	9,153.3	618.3	581.2	-579.8	10.00	10.00	0.00
9,300.0	38.01	179.60	9,194.0	589.2	581.4	-550.8	10.00	10.00	0.00
9,350.0	43.01	179.60	9,232.0	556.8	581.7	-518.4	10.00	10.00	0.00
9,400.0	48.01	179.60	9,267.0	521.1	581.9	-310.4 -482.8	10.00	10.00	0.00
9,450.0	53.01	179.60	9,298.8	482.5	582.2	-462.6 -444.2	10.00	10.00	0.00
9,500.0	58.01	179.60	9,296.6	462.5 441.3	582.2 582.5	-444.2 -403.1	10.00	10.00	0.00
5.000.0	30.01	179.00	ا . ا ∠ی ق	441.3	J0Z.J	-403.1 -359.7	10.00	10.00	0.00

Database: Hobbs

Company: Mewbourne Oil Company
Project: Lea County, New Mexico NAD 83
Site: Querecho 23/26 Fed Com #527H

Well: Sec 23, T18S, R32E

 Wellbore:
 BHL: 100' FSL & 660' FEL (Sec 26)

 Design:
 Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site Querecho 23/26 Fed Com #527H WELL @ 3822.0usft (Original Well Elev) WELL @ 3822.0usft (Original Well Elev)

Grid

, o. g									
lanned Survey									
Measure Depth (usft)	ed Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
(usit)	()	()	(usit)	(usit)	(uSit)	(usit)	(/ 1000311)	(/ loodsit)	(/ Toousit)
9,60	0.0 68.00	179.60	9,372.4	352.3	583.1	-314.3	10.00	10.00	0.00
9,650	0.0 73.00	179.60	9,389.1	305.2	583.4	-267.2	10.00	10.00	0.00
9,70	0.0 78.00	179.60	9,401.6	256.8	583.8	-218.9	10.00	10.00	0.00
9,75	0.0 83.00	179.60	9,409.9	207.5	584.1	-169.7	10.00	10.00	0.00
9,80	0.0 88.00	179.60	9,413.8	157.7	584.4	-119.9	10.00	10.00	0.00
•									
9,80		179.60	9,414.0	150.0	584.5	-112.2	10.00	10.00	0.00
9,81	9.8 88.77	179.60	9,414.3	137.9	584.6	-100.2	0.00	0.00	0.00
FTP: 10	0' FNL & 660' FEL (S	Sec 23)							
9,90	0.0 88.77	179.60	9,416.0	57.7	585.1	-20.1	0.00	0.00	0.00
10,000	0.0 88.77	179.60	9,418.1	-42.2	585.8	79.7	0.00	0.00	0.00
10,10	0.0 88.77	179.60	9,420.3	-142.2	586.5	179.5	0.00	0.00	0.00
10,20		179.60	9,422.4	-242.2	587.2	279.3	0.00	0.00	0.00
10,30		179.60	9,424.6	-342.2	587.9	379.1	0.00	0.00	0.00
10,40		179.60	9,426.7	- 442.1	588.6	478.9	0.00	0.00	0.00
10,50	0.0 88.77	179.60	9,428.9	-542.1	589.3	578.8	0.00	0.00	0.00
10,60	0.0 88.77	179.60	9,431.0	-642.1	590.0	678.6	0.00	0.00	0.00
40.70	00 00 77	170.00	0.400.0	740.4	F00 7	770 4	0.00	0.00	0.00
10,70		179.60	9,433.2	-742.1	590.7	778.4	0.00	0.00	0.00
10,80		179.60	9,435.3	-842.0	591.4	878.2	0.00	0.00	0.00
10,90		179.60	9,437.5	-942.0	592.1	978.0	0.00	0.00	0.00
11,000		179.60	9,439.6	-1,042.0	592.8	1,077.8	0.00	0.00	0.00
11,100	0.0 88.77	179.60	9,441.8	-1,142.0	593.5	1,177.6	0.00	0.00	0.00
11,20	0.0 88.77	179.60	9,443.9	-1,241.9	594.2	1.277.4	0.00	0.00	0.00
11,30		179.60	9,446.1	-1,341.9	594.9	1,377.3	0.00	0.00	0.00
11,40		179.60	9,448.2	-1,441.9	595.6	1,477.1	0.00	0.00	0.00
11,500		179.60	9,450.4	-1,541.9	596.2	1,576.9	0.00	0.00	0.00
11,60	0.0 88.77	179.60	9,452.5	-1,641.8	596.9	1,676.7	0.00	0.00	0.00
11,70	0.0 88.77	179.60	9,454.6	-1,741.8	597.6	1,776.5	0.00	0.00	0.00
11,80	0.0 88.77	179.60	9,456.8	-1,841.8	598.3	1,876.3	0.00	0.00	0.00
11,90		179.60	9,458.9	-1,941.8	599.0	1,976.1	0.00	0.00	0.00
12,000		179.60	9,461.1	-2,041.7	599.7	2,076.0	0.00	0.00	0.00
12,100		179.60	9,463.2	-2,141.7	600.4	2,175.8	0.00	0.00	0.00
12,20	0.0 88.77	179.60	9,465.4	-2,241.7	601.1	2,275.6	0.00	0.00	0.00
12,30	0.0 88.77	179.60	9,467.5	-2,341.7	601.8	2,375.4	0.00	0.00	0.00
12,36	3.4 88.77	179.60	9,468.9	-2,405.0	602.2	2,438.6	0.00	0.00	0.00
PPP2: 2	2647' FSL & 657' FEL	. (Sec 23)							
12,400		179.60	9,469.7	-2,441.6	602.5	2,475.2	0.00	0.00	0.00
12,500		179.60	9,471.8	-2,541.6	603.2	2,575.0	0.00	0.00	0.00
,									
12,60		179.60	9,474.0	-2,641.6	603.9	2,674.8	0.00	0.00	0.00
12,70		179.60	9,476.1	-2,741.6	604.6	2,774.7	0.00	0.00	0.00
12,80		179.60	9,478.3	-2,841.5	605.3	2,874.5	0.00	0.00	0.00
12,90		179.60	9,480.4	-2,941.5	606.0	2,974.3	0.00	0.00	0.00
13,000	0.0 88.77	179.60	9,482.6	-3,041.5	606.7	3,074.1	0.00	0.00	0.00
13,10	0.0 88.77	179.60	9,484.7	2 1 1 1 5	607 4	3,173.9	0.00	0.00	0.00
				-3,141.5	607.4				
13,20		179.60	9,486.9	-3,241.4	608.1	3,273.7	0.00	0.00	0.00
13,30		179.60	9,489.0	-3,341.4	608.8	3,373.5	0.00	0.00	0.00
13,40		179.60	9,491.2	-3,441.4	609.4	3,473.3	0.00	0.00	0.00
13,50	0.0 88.77	179.60	9,493.3	-3,541.3	610.1	3,573.2	0.00	0.00	0.00
13,600	0.0 88.77	179.60	9,495.5	-3,641.3	610.8	3,673.0	0.00	0.00	0.00
13,70		179.60	9,497.6	-3,741.3	611.5	3,772.8	0.00	0.00	0.00
13,80		179.60	9,499.8	-3,841.3	612.2	3,872.6	0.00	0.00	0.00
10.00		179.00	5,455.0					0.00	
			0.504.0	3 0/1 3	6100				
13,90	0.0 88.77	179.60	9,501.9	-3,941.2	612.9	3,972.4	0.00		0.00
	0.0 88.77		9,501.9 9,504.1	-3,941.2 -4,041.2	612.9 613.6	3,972.4 4,072.2	0.00	0.00	0.00
13,90	0.0 88.77 0.0 88.77	179.60							

Database: Hobbs

Company:Mewbourne Oil CompanyProject:Lea County, New Mexico NAD 83Site:Querecho 23/26 Fed Com #527H

Well: Sec 23, T18S, R32E
Wellbore: BHL: 100' FSL & 660' FEL (Sec 26)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Site Querecho 23/26 Fed Com #527H WELL @ 3822.0usft (Original Well Elev) WELL @ 3822.0usft (Original Well Elev)

Grid

lanned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,300.0	88.77	179.60	9,510.5	-4,341.1	615.7	4,371.7	0.00	0.00	0.00
14,400.0	88.77	179.60	9,512.6	-4,441.1	616.4	4,471.5	0.00	0.00	0.00
14,500.0	88.77	179.60	9,514.8	-4,541.1	617.1	4,571.3	0.00	0.00	0.00
14,600.0	88.77	179.60	9,516.9	-4,641.1	617.8	4,671.1	0.00	0.00	0.00
14,700.0	88.77	179.60	9,519.1	-4,741.0	618.5	4,770.9	0.00	0.00	0.00
14,800.0	88.77	179.60	9,521.2	-4,841.0	619.2	4,870.7	0.00	0.00	0.00
14,900.0	88.77	179.60	9,523.4	-4,941.0	619.9	4,970.6	0.00	0.00	0.00
15,000.0	88.77	179.60	9,525.5	-5,041.0	620.6	5,070.4	0.00	0.00	0.00
15,010.8	88.77	179.60	9,525.8	-5,051.8	620.6	5,081.2	0.00	0.00	0.00
PPP3: 0' FN	L & 645' FEL (Se	c 26)							
15,100.0	88.77	179.60	9,527.7	-5,140.9	621.3	5,170.2	0.00	0.00	0.00
15,200.0	88.77	179.60	9,529.8	-5,240.9	621.9	5,270.0	0.00	0.00	0.00
15,300.0	88.77	179.60	9,532.0	-5,340.9	622.6	5,369.8	0.00	0.00	0.00
15,400.0	88.77	179.60	9,534.1	-5,440.9	623.3	5,469.6	0.00	0.00	0.00
15,500.0	88.77	179.60	9,536.3	-5,540.8	624.0	5,569.4	0.00	0.00	0.00
15,600.0	88.77	179.60	9,538.4	-5,640.8	624.7	5,669.2	0.00	0.00	0.00
15,700.0	88.77	179.60	9,540.6	-5,740.8	625.4	5,769.1	0.00	0.00	0.00
15,800.0	88.77	179.60	9,542.7	-5,840.8	626.1	5,868.9	0.00	0.00	0.00
15,900.0	88.77	179.60	9,544.9	-5,940.7	626.8	5,968.7	0.00	0.00	0.00
16,000.0	88.77	179.60	9,547.0	-6,040.7	627.5	6,068.5	0.00	0.00	0.00
16,100.0	88.77	179.60	9,549.2	-6,140.7	628.2	6,168.3	0.00	0.00	0.00
16,200.0	88.77	179.60	9,551.3	-6,240.7	628.9	6,268.1	0.00	0.00	0.00
16,300.0	88.77	179.60	9,553.5	-6,340.6	629.6	6,367.9	0.00	0.00	0.00
16,400.0 16,500.0 16,528.3	88.77 88.77 88.77 FNL & 649' FEL	179.60 179.60 179.60 (Sec 26)	9,555.6 9,557.8 9,558.4	-6,440.6 -6,540.6 -6,568.9	630.3 631.0 631.2	6,467.8 6,567.6 6,595.8	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00
16,600.0	88.77	179.60	9,559.9	-6,640.6	631.7	6,667.4	0.00	0.00	0.00
16,700.0	88.77	179.60	9,562.0	-6,740.5	632.4	6,767.2	0.00	0.00	0.00
16,800.0	88.77	179.60	9,564.2	-6,840.5	633.1	6,867.0	0.00	0.00	0.00
16,900.0 17,000.0 17,100.0 17,200.0	88.77 88.77 88.77	179.60 179.60 179.60 179.60	9,566.3 9,568.5 9,570.6 9,572.8	-6,940.5 -7,040.5 -7,140.4 -7,240.4	633.8 634.4 635.1 635.8	6,966.8 7,066.6 7,166.5 7,266.3	0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00
17,300.0	88.77	179.60	9,574.9	-7,340.4	636.5	7,366.1	0.00	0.00	0.00
17,400.0	88.77	179.60	9,577.1	-7,440.4	637.2	7,465.9	0.00	0.00	0.00
17,500.0	88.77	179.60	9,579.2	-7,540.3	637.9	7,565.7	0.00	0.00	0.00
17,600.0	88.77	179.60	9,581.4	-7,640.3	638.6	7,665.5	0.00	0.00	0.00
17,645.8	88.77	179.60	9,582.4	-7,686.1	638.9	7,711.2	0.00	0.00	0.00
·	FSL & 653' FEL		0,002.1	7,000.1	000.0	7,711.2	0.00	0.00	0.00
17,700.0	88.77	179.60	9,583.5	-7,740.3	639.3	7,765.3	0.00	0.00	0.00
17,800.0	88.77	179.60	9,585.7	-7,840.3	640.0	7,865.1	0.00	0.00	0.00
17,900.0	88.77	179.60	9,587.8	-7,940.2	640.7	7,965.0	0.00	0.00	0.00
18,000.0	88.77	179.60	9,590.0	-8,040.2	641.4	8,064.8	0.00	0.00	0.00
18,100.0	88.77	179.60	9,592.1	-8,140.2	642.1	8,164.6	0.00	0.00	0.00
18,200.0	88.77	179.60	9,594.3	-8,240.2	642.8	8,264.4	0.00	0.00	0.00
18,300.0	88.77	179.60	9,596.4	-8,340.1	643.5	8,364.2	0.00	0.00	0.00
18,400.0	88.77	179.60	9,598.6	-8,440.1	644.2	8,464.0	0.00	0.00	0.00
18,500.0	88.77	179.60	9,600.7	-8,540.1	644.9	8,563.8	0.00	0.00	0.00
18,600.0	88.77	179.60	9,602.9	-8,640.0	645.6	8,663.7	0.00	0.00	0.00
18,700.0	88.77	179.60	9,605.0	-8,740.0	646.3	8,763.5	0.00	0.00	0.00
18,800.0	88.77	179.60	9,607.2	-8,840.0	647.0	8,863.3	0.00	0.00	0.00
18,900.0	88.77	179.60	9,609.3	-8,940.0	647.6	8,963.1	0.00	0.00	0.00

Database:HobbsCompany:Mewbourne Oil CompanyProject:Lea County, New Mexico NAD 83Site:Querecho 23/26 Fed Com #527H

Well: Sec 23, T18S, R32E

Wellbore: BHL: 100' FSL & 660' FEL (Sec 26)

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:


Survey Calculation Method:

Site Querecho 23/26 Fed Com #527H WELL @ 3822.0usft (Original Well Elev) WELL @ 3822.0usft (Original Well Elev)

Grid

nned Survey Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
19,000.0	88.77	179.60	9,611.5	-9,039.9	648.3	9,062.9	0.00	0.00	0.00
19,100.0	88.77	179.60	9,613.6	-9,139.9	649.0	9,162.7	0.00	0.00	0.00
19,200.0	88.77	179.60	9,615.8	-9,239.9	649.7	9,262.5	0.00	0.00	0.00
19,300.0	88.77	179.60	9,617.9	-9,339.9	650.4	9,362.4	0.00	0.00	0.00
19,400.0	88.77	179.60	9,620.0	-9,439.8	651.1	9,462.2	0.00	0.00	0.00
19,500.0	88.77	179.60	9,622.2	-9,539.8	651.8	9,562.0	0.00	0.00	0.00
19,600.0	88.77	179.60	9,624.3	-9,639.8	652.5	9,661.8	0.00	0.00	0.00
19,700.0	88.77	179.60	9,626.5	-9,739.8	653.2	9,761.6	0.00	0.00	0.00
19,800.0	88.77	179.60	9,628.6	-9,839.7	653.9	9,861.4	0.00	0.00	0.00
19,900.0	88.77	179.60	9,630.8	-9,939.7	654.6	9,961.2	0.00	0.00	0.00
20,000.0	88.77	179.60	9,632.9	-10,039.7	655.3	10,061.0	0.00	0.00	0.00
20,100.0	88.77	179.60	9,635.1	-10,139.7	656.0	10,160.9	0.00	0.00	0.00
20,189.3	88.77	179.60	9,637.0	-10,228.9	656.6	10,250.0	0.00	0.00	0.00
BHL: 100' FS	SL & 660' FEL (S	ec 26)							

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SHL: 235' FNL & 1245' F - plan hits target cent - Point	0.00 er	0.00	0.0	0.0	0.0	633,310.20	726,091.80	32.7395673	-103.7324603
KOP: 473' FSL & 660' Ft - plan hits target cent - Point	0.00 er	0.00	8,841.0	710.8	580.6	634,021.00	726,672.40	32.7415119	-103.7305589
FTP: 100' FNL & 660' FE - plan hits target cent - Point	0.00 er	0.00	9,414.3	137 <u>.</u> 9	584.6	633,448.10	726,676.38	32.7399372	-103.7305566
PPP2: 2647' FSL & 657' - plan hits target cent - Point	0.00 er	0.00	9,468.9	-2,405.0	602.2	630,905.20	726,694.04	32.7329477	-103.7305462
PPP3: 0' FNL & 645' FEI - plan hits target cent - Point	0.00 er	0.00	9,525.8	-5,051.8	620.6	628,258.40	726,712.43	32.7256726	-103.7305353
PPP4: 1317' FNL & 649' - plan hits target cent - Point	0.00 er	0.00	9,558.4	-6,568.9	631.2	626,741.30	726,722.97	32.7215026	-103.7305291
PPP5: 2643' FSL & 653' - plan hits target cent - Point	0.00 er	0.00	9,582.4	-7,686.1	638.9	625,624.10	726,730.73	32.7184318	-103.7305246
BHL: 100' FSL & 660' FE - plan hits target cent - Point	0.00 er	0.00	9,637.0	-10,228.9	656.6	623,081.30	726,748.40	32.7114425	-103.7305141

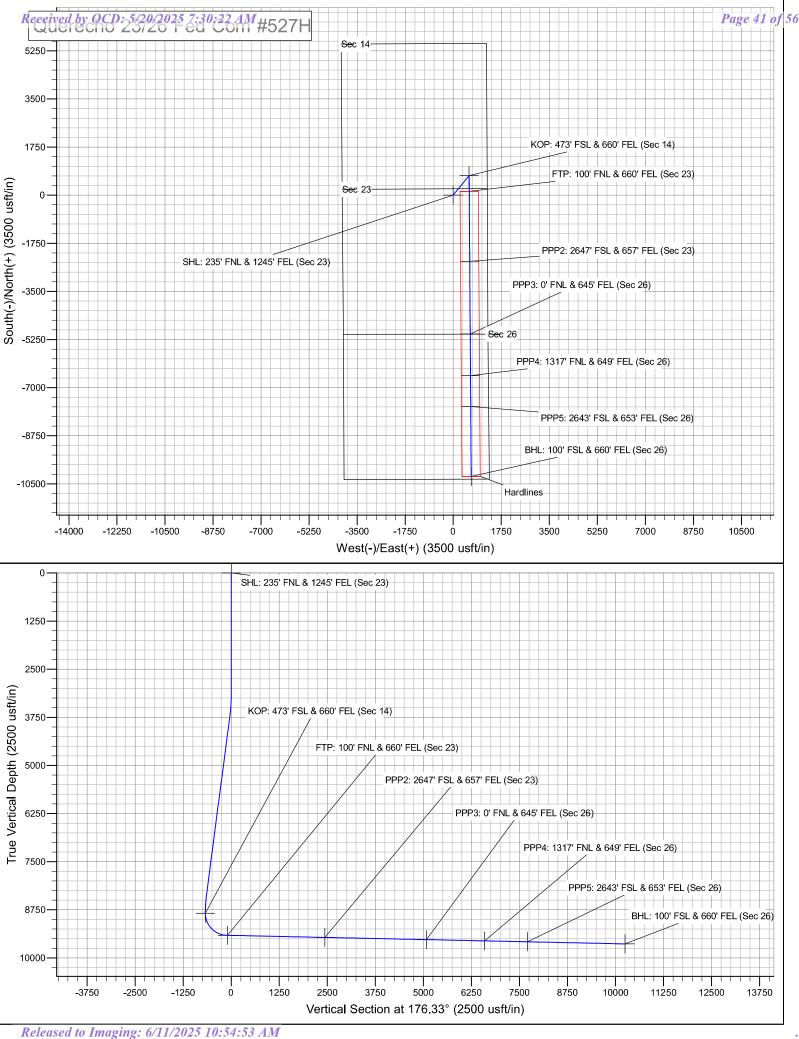

Mewbourne Oil Company, Querecho 23/26 Fed Com 527H Sec 23, T18S, R32E

SHL: 235' FNL 1245' FEL (Sec 23) BHL: 100' FSL 660' FEL (Sec 26)

Operator Name:	Property Name:	Well Number
Mewbourne Oil Company	Querecho 23/26 Fed Com	527H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
P	14	18	32	-	473'	FSL	660'	FEL	Lea
		Latitude				Long	itude		NAD
32.741511	7				-103.73055	590			83

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Α	23	18	32	_	100'	FNL	660'	FEL	Lea
		Latitude	-			Long	itude		NAD
32.7399372	2				-103.73055	81			83

Last Take Point (LTP)

Elect I terre I	CIIII (DII	,							
UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
P	26	18	32	_	100'	FSL	660'	FEL	Lea
	•	Latitude				Long	itude		NAD
32.7114425	5				-103.73051	43			83

Latitude	Longitude	NAD
32.7114425	-103.7305143	83
Is this well the defining well for the Horizontal Spac Is this well an infill well?	ing Unit? Y	
If infill is yes please provide API if available, Operat	or Name and well number for Defining well for Horizontal	
Spacing Unit.		
API#		
Operator Name: Prop	erty Name:	Well Number

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME: MEWBOURNE OIL COMPANY **WELL NAME & NO.:** QUERECHO 23/26 FED COM 527H

APD ID: 10400098769

LOCATION: Section 23, T.18 S., R.32 E. NMP.

COUNTY: Lea County, New Mexico

COA

H_2S	0	No	• Yes			
Potash /	None	Secretary	O R-111-Q	Open Annulus		
WIPP				□ WIPP		
Cave / Karst	• Low	O Medium	O High	Critical		
Wellhead	Conventional	• Multibowl	O Both	O Diverter		
Cementing	☐ Primary Squeeze	☐ Cont. Squeeze	☐ EchoMeter	DV Tool		
Special Req	☐ Capitan Reef	☐ Water Disposal	☑ COM	☐ Unit		
Waste Prev.	Self-Certification	• Waste Min. Plan	○ APD Submitted p	prior to 06/10/2024		
Additional	✓ Flex Hose	☐ Casing Clearance	☐ Pilot Hole	Break Testing		
Language	☐ Four-String	Offline Cementing	☐ Fluid-Filled			

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated **AT SPUD**. As a result, the Hydrogen Sulfide area must meet **43 CFR 3176** requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING DESIGN

Primary Casing Program

- 1. The 13-3/8 inch surface casing shall be set at approximately 1,295 ft. (a minimum of 25 feet (Lea County) into the Rustler Anhydrite and above the salt) and cemented to the surface. If salt is encountered, set casing at least 25 ft. above the salt.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8** hours or **500** psi compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 psi compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The 9-5/8 inch intermediate casing shall be set in a competent bed at approximately 2,810 ft. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.

Note: Excess cement is below CFO's recommendation of %25. More cement might be needed.

- **3.** Operator has proposed to set **7 inch** production casing at approximately **8,920 ft.** (8,837 ft. TVD). The minimum required fill of cement behind the **7 inch** production casing is:
 - Option 1 (Single Stage): Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification.
 - **Option 2 (Two-Stage):** Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.
 - a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
 - b. Second stage above DV tool: Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification. If cement does not circulate, contact the appropriate BLM office.
- 4. The minimum required fill of cement behind the 4-1/2 in. production liner is:
 - Cement should tie-back at least 100 feet into previous casing string. Operator shall provide method of verification.

Alternate Casing Program

- 1. The 13-3/8 inch surface casing shall be set at approximately 1,295 ft. (a minimum of 25 feet (Lea County) into the Rustler Anhydrite and above the salt) and cemented to the surface. If salt is encountered, set casing at least 25 ft. above the salt.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature

- survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of <u>8</u> hours or 500 psi compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 psi compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The 9-5/8 inch intermediate casing shall be set in a competent bed at approximately 2,810 ft. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
 - **Cement to surface.** If cement does not circulate see B.1.a, c-d above.

Note: Excess cement is below CFO's recommendation of %25. More cement might be needed.

- **3.** Operator has proposed to set **7 inch** production casing at approximately **9,820 ft.** (9,414 ft. TVD). The minimum required fill of cement behind the **7 inch** production casing is:
 - Option 1 (Single Stage): Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification.
 - **Option 2 (Two-Stage):** Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.
 - a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
 - b. Second stage above DV tool: Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification. If cement does not circulate, contact the appropriate BLM office.
- 4. The minimum required fill of cement behind the 4-1/2 in. production liner is:
 - Cement should tie-back at least 100 feet into previous casing string. Operator shall provide method of verification.

Offline Cementing

Operator has been (**Approved**) to pump the proposed cement program offline in the **Surface and intermediate(s) intervals**. Offline cementing should commence within 24 hours of landing the casing for the interval. Notify the BLM 4hrs prior to the commencement of any offline cementing procedure at **Lea County:** 575-689-5981.

C. PRESSURE CONTROL

- 1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
- 2. Operator has proposed a multi-bowl wellhead assembly. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 5000 (5M) psi. BOP and BOPE shall be tested in accordance with title 43 CFR 3172.
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - **ii.** If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - **iii.** Manufacturer representative shall install the test plug for the initial BOP test.
 - iv. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - v. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.

BOPE Break Testing Variance (Utilizing a 10M BOPE system)

- BOPE Break Testing is ONLY permitted for intervals requiring a 5M BOPE or less. (Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP.)
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (575-706-2779) prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).

- The BLM is to be contacted (575-689-5981 Lea County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per 43 CFR 3172.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Contact Lea County Petroleum Engineering Inspection Staff:

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981.

- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).

- b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the doghouse or stairway area.
- 3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

- 1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
- 2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing

- integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
- 5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
- 6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
- 7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- **8.** Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in 43 CFR 3172.
- 2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
- 3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
- 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- iii. Manufacturer representative shall install the test plug for the initial BOP test.
- iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
- v. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- **5.** The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (Only applies to single stage cement jobs, prior to the cement setting up.)
 - iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - iv. The test shall be run on a 5000-psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one-hour chart. A circular chart shall have a maximum 2-hour clock. If a twelve hour or twenty-four-

hour chart is used, tester shall make a notation that it is run with a two hour clock.

- v. The results of the test shall be reported to the appropriate BLM office.
- vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- vii. The BOP/BOPE test shall include a low-pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per 43 CFR 3172.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crewintensive operations.

SA 02/26/2025

Hydrogen Sulfide Drilling Operations Plan Mewbourne Oil Company

1. General Requirements

Rule 118 does not apply to this well because MOC has researched this area and no high concentrations of H2S were found. MOC will have on location and working all H2S safety equipment before the Delaware formation for purposes of safety and insurance requirements.

2. Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will have received training from a qualified instructor in the following areas prior to entering the drilling pad area of the well:

- 1. The hazards and characteristics of hydrogen sulfide gas.
- 2. The proper use of personal protective equipment and life support systems.
- 3. The proper use of hydrogen sulfide detectors, alarms, warning systems, briefing areas, evacuation procedures.
- 4. The proper techniques for first aid and rescue operations.

Additionally, supervisory personnel will be trained in the following areas:

- The effects of hydrogen sulfide on metal components. If high tensile tubular systems are utilized, supervisory personnel will be trained in their special maintenance requirements.
- 2 Corrective action and shut in procedures, blowout prevention, and well control procedures while drilling a well.
- The contents of the Hydrogen Sulfide Drilling Operations Plan.

There will be an initial training session prior to encountering a know hydrogen sulfide source. The initial training session shall include a review of the site specific Hydrogen Sulfide Drilling Operations Plan.

3. Hydrogen Sulfide Safety Equipment and Systems

All hydrogen sulfide safety equipment and systems will be installed, tested, and operational prior to drilling below the 9 5/8" intermediate casing.

1. Well Control Equipment

- A. Choke manifold with minimum of one adjustable choke/remote choke.
- B. Blowout preventers equipped with blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- C. Auxiliary equipment including annular type blowout preventer.
- 2. <u>Protective Equipment for Essential Personnel</u>

Thirty minute self contained work unit located in the dog house and at briefing areas.

Additionally: If H2S is encountered in concentrations less than 10 ppm, fans will be placed in work areas to prevent the accumulation of hazardous amounts of poisonous gas. If higher concentrations of H2S are detected the well will be shut in and a rotating head, mud/gas separator, remote choke and flare line with igniter will be installed.

3. <u>Hydrogen Sulfide Protection and Monitoring Equipment</u>

Two portable hydrogen sulfide monitors positioned on location for optimum coverage and detection. The units shall have audible sirens to notify personnel when hydrogen sulfide levels exceed 20 PPM.

4. Visual Warning Systems

- A. Wind direction indicators as indicated on the wellsite diagram.
- B. Caution signs shall be posted on roads providing access to location. Signs shall be painted a high visibility color with lettering of sufficient size to be readable at reasonable distances from potentially contaminated areas.

4. Mud Program

The mud program has been designed to minimize the amount of hydrogen sulfide entrained in the mud system. Proper mud weight, safe drilling practices, and the use of hydrogen sulfide scavengers will minimize hazards while drilling the well.

5. Metallurgy

All tubular systems, wellheads, blowout preventers, drilling spools, kill lines, choke manifolds, and valves shall be suitable for service in a hydrogen sulfide environment when chemically treated.

6. Communications

State & County Officials phone numbers are posted on rig floor and supervisors trailer. Communications in company vehicles and toolpushers are either two way radios or cellular phones.

7. Well Testing

Drill stem testing is not an anticipated requirement for evaluation of this well. If a drill stem test is required, it will be conducted with a minimum number of personnel in the immediate vicinity. The test will be conducted during daylight hours only.

8. Emergency Phone Numbers

Eddy County Sheriff's Office	911 or 575-887-7551
Ambulance Service	911 or 575-885-2111
Carlsbad Fire Dept	911 or 575-885-2111
Loco Hills Volunteer Fire Dept.	911 or 575-677-3266
Closest Medical Facility - Columbia Medical Cer	nter of Carlsbad 575-492-5000

Mewbourne Oil Company	Hobbs District Office	575-393-5905
	Fax	575-397-6252
	2 nd Fax	575-393-7259
District Manager	Robin Terrell	575-390-4816
Drilling Superintendent	Frosty Lathan	575-390-4103
	Bradley Bishop	575-390-6838
Drilling Foreman	Wesley Noseff	575-441-0729

Operator Name: MEWBOURNE OIL COMPANY

Well Name: QUERECHO 23/26 FED COM Well Number: 527H

Waste type: GARBAGE

Waste content description: Garbage & Trash

Amount of waste: 1500 pounds

Waste disposal frequency : One Time Only

Safe containment description: Enclosed trash trailer

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: PRIVATE

FACILITY

Disposal type description:

Disposal location description: Waste Management facility in Carlsbad.

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit? NO

Reserve pit length (ft.) Reserve pit width (ft.)

Reserve pit depth (ft.) Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? N

Description of cuttings location

Cuttings area length (ft.) Cuttings area width (ft.)

Cuttings area depth (ft.) Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

Cuttings area liner

Cuttings area liner specifications and installation description

Operator Name: MEWBOURNE OIL COMPANY

Well Name: QUERECHO 23/26 FED COM Well Number: 527H

Section 8 - Ancillary

Are you requesting any Ancillary Facilities?: N

Ancillary Facilities

Comments:

Section 9 - Well Site

Well Site Layout Diagram:

Querecho_23_26_Fed_Com__527H_WellSiteLayout_20240531093812.pdf

Comments: NONE

Section 10 - Plans for Surface

Type of disturbance: New Surface Disturbance Multiple Well Pad Name:

Multiple Well Pad Number:

Recontouring

Drainage/Erosion control construction: NONE Drainage/Erosion control reclamation: NONE

Well pad proposed disturbance

(acres): 5.9

Road proposed disturbance (acres):

0.15

Powerline proposed disturbance

(acres): 0

Pipeline proposed disturbance

(acres): 0

Well pad interim reclamation (acres): Well pad long term disturbance

Road interim reclamation (acres): 0

Powerline interim reclamation (acres): Powerline long term disturbance

Pipeline interim reclamation (acres): 0 Pipeline long term disturbance

Other proposed disturbance (acres): 0 Other interim reclamation (acres): 0

(acres): 0

Road long term disturbance (acres): 0

(acres): 4.23

(acres): 0

Other long term disturbance (acres): 0

Total proposed disturbance: 6.0500000000000001

Total interim reclamation: 1.67

Total long term disturbance: 4.23

Disturbance Comments: In areas to be heavily disturbed, the top 6 inches of soil material, will be stripped and stockpiled on the perimeter of the well location to keep topsoil viable, and to make redistribution of topsoil more efficient during interim reclamation. Stockpiled topsoil should include vegetative material. Topsoil will be clearly segregated and stored separately from subsoils. Contaminated soil will not be stockpiled, but properly treated and handled prior to topsoil salvaging.

Reconstruction method: The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ration, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.

Topsoil redistribution: Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations including cuts & fills. To see the area, the proper BLM seed mixture, free of noxious weeks, will be used.

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 464984

CONDITIONS

Operator:	OGRID:
MEWBOURNE OIL CO	14744
P.O. Box 5270	Action Number:
Hobbs, NM 88241	464984
	Action Type:
	[C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
mleal	Cement is required to circulate on both surface and intermediate1 strings of casing.	5/20/2025
mleal	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.	5/20/2025
matthew.gomez	Notify the OCD 24 hours prior to casing & cement.	6/11/2025
matthew.gomez	A [C-103] Sub. Drilling (C-103N) is required within (10) days of spud.	6/11/2025
matthew.gomez	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	6/11/2025
matthew.gomez	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	6/11/2025
matthew.gomez	File As Drilled C-102 and a directional Survey with C-104 completion packet.	6/11/2025