

U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Well Name: POKER LAKE UNIT 13-24 PC	Well Location: T24S / R29E / SEC 13 / SWNE / 32.218155 / -103.934466	County or Parish/State: EDDY / NM
Well Number: 806H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM05912	Unit or CA Name: POKER LAKE UNIT	Unit or CA Number: NMNM71016X
US Well Number:	Operator: XTO PERMIAN OPERATING LLC	

Notice of Intent

Sundry ID: 2855399

Type of Submission: Notice of Intent

Type of Action: APD Change

Date Sundry Submitted: 05/30/2025

Time Sundry Submitted: 10:54

Date proposed operation will begin: 06/13/2025

Procedure Description: XTO Permian Operating, LLC. respectfully requests approval to make the following changes to the approved APD. Changes to include KOP, FTP, LTP, BHL, proposed total depth, pool, and dedicated acreage. FROM: TO: KOP: 2420' FNL & 1536' FEL OF SECTION 13-T24S-R29E 1797' FSL & 991' FEL OF SECTION 13-T24S-R29E FTP: 1959' FNL & 1329' FEL OF SECTION 13-T24S-R29E 1993' FSL & 951' FEL OF SECTION 13-T24S-R29E LTP: 100' FNL & 990' FEL OF SECTION 1-T24S-R29E 101' FNL & 755' FEL OF SECTION 1-T24S-R29E BHL: 50' FNL & 990' FEL OF SECTION 1-T24S-R29E 50' FNL & 755' FEL OF SECTION 1-T24S-R29E The proposed total depth is changing FROM 22690' MD; 9739' TVD TO 23654' MD; 9730' TVD. Pool code is changing FROM PIERCE CROSSING; BONE SPRING, EAST(96473) TO CEDAR CANYON; BONE SPRING(11520); PIERCE CROSSING; BONE SPRING(96473); WILDCAT S243006B; LWR BONE SPRING(97753) Dedicated acreage is changing FROM 719.94 ac TO 439.94 ac There is no new surface disturbance.

NOI Attachments

Procedure Description

POKER_LAKE_UNIT_13_24_PC_806H_Sundry_Docs_20250530105335.pdf

Well Name: POKER LAKE UNIT 13-24
PC

Well Location: T24S / R29E / SEC 13 /
SWNE / 32.218155 / -103.934466

County or Parish/State: EDDY /
NM

Well Number: 806H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM05912

Unit or CA Name: POKER LAKE UNIT

Unit or CA Number:
NMNM71016X

US Well Number:

Operator: XTO PERMIAN OPERATING
LLC

Conditions of Approval

Additional

242913_Poker_Lake_Unit_13_24_PC_806H_06_09_2025_COAs_20250609081726.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: MANOJ VENKATESH

Signed on: MAY 30, 2025 10:54 AM

Name: XTO PERMIAN OPERATING LLC

Title: Regulatory Analyst

Street Address: 22777 SPRINGWOODS VILLAGE PARKWAY

City: SPRING

State: TX

Phone: (720) 539-1673

Email address: MANOJ.VENKATESH@EXXONMOBIL.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: CHRISTOPHER WALLS

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752342234

BLM POC Email Address: cwalls@blm.gov

Disposition: Approved

Disposition Date: 06/09/2025

Signature: Chris Walls

Form 3160-5
(June 2019)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2021

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.	NMNM05912
6. If Indian, Allottee or Tribe Name	

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		7. If Unit of CA/Agreement, Name and/or No. POKER LAKE UNIT/NMNM71016X
2. Name of Operator XTO PERMIAN OPERATING LLC		8. Well Name and No. POKER LAKE UNIT 13-24 PC/806H
3a. Address 6401 HOLIDAY HILL ROAD BLDG 5, MIDLAND,	3b. Phone No. (include area code) (432) 683-2277	9. API Well No.
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) SEC 13/T24S/R29E/NMP		10. Field and Pool or Exploratory Area PIERCE CROSSING/BONE SPRING, EAST
		11. Country or Parish, State EDDY/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input checked="" type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

XTO Permian Operating, LLC. respectfully requests approval to make the following changes to the approved APD. Changes to include KOP, FTP, LTP, BHL, proposed total depth, pool, and dedicated acreage.

FROM: TO:

KOP: 2420' FNL & 1536 FEL OF SECTION 13-T24S-R29E 1797' FSL & 991 FEL OF SECTION 13-T24S-R29E

FTP: 1959' FNL & 1329' FEL OF SECTION 13-T24S-R29E 1993' FSL & 951' FEL OF SECTION 13-T24S-R29E

LTP: 100' FNL & 990' FEL OF SECTION 1-T24S-R29E 101' FNL & 755' FEL OF SECTION 1-T24S-R29E

BHL: 50' FNL & 990' FEL OF SECTION 1-T24S-R29E 50' FNL & 755' FEL OF SECTION 1-T24S-R29E

The proposed total depth is changing FROM 22690 MD; 9739 TVD TO 23654 MD; 9730 TVD.

Pool code is changing FROM PIERCE CROSSING; BONE SPRING, EAST(96473) TO CEDAR CANYON; BONE SPRING(11520); PIERCE

Continued on page 3 additional information

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) MANOJ VENKATESH / Ph: (720) 539-1673	Regulatory Analyst Title
Signature (Electronic Submission)	Date 05/30/2025

THE SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by CHRISTOPHER WALLS / Ph: (575) 234-2234 / Approved	Petroleum Engineer Title	06/09/2025 Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office CARLSBAD	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Additional Remarks

CROSSING; BONE SPRING(96473); WILDCAT S243006B; LWR BONE SPRING(97753)

Dedicated acreage is changing FROM 719.94 ac TO 439.94 ac

There is no new surface disturbance.

Location of Well

0. SHL: SWNE / 2420 FNL / 1536 FEL / TWSP: 24S / RANGE: 29E / SECTION: 13 / LAT: 32.218155 / LONG: -103.934466 (TVD: 0 feet, MD: 0 feet)

PPP: SWNE / 1959 FNL / 1329 FEL / TWSP: 24S / RANGE: 29E / SECTION: 13 / LAT: 32.219419 / LONG: -103.933796 (TVD: 9739 feet, MD: 10200 feet)

BHL: LOT 1 / 50 FNL / 990 FEL / TWSP: 24S / RANGE: 29E / SECTION: 1 / LAT: 32.253811 / LONG: -103.932768 (TVD: 9739 feet, MD: 22690 feet)

CONFIDENTIAL

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	XTO Permian Operating LLC
WELL NAME & NO.:	Poker Lake Unit 13-24 PC 806H
LOCATION:	Section 13, T.24S., R.29E.
COUNTY:	Eddy County

COA

H2S	<input checked="" type="radio"/> Yes	<input type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Wellhead Variance	<input type="radio"/> Diverter		
Other	<input type="checkbox"/> 4 String	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input checked="" type="checkbox"/> Fluid Filled	<input type="checkbox"/> Pilot Hole	<input type="checkbox"/> Open Annulus
Cementing	<input checked="" type="checkbox"/> Contingency Cement Squeeze	<input type="checkbox"/> EchoMeter	<input type="checkbox"/> Primary Cement Squeeze
Special Requirements	<input type="checkbox"/> Water Disposal	<input type="checkbox"/> COM	<input checked="" type="checkbox"/> Unit
Special Requirements	<input type="checkbox"/> Batch Sundry		
Special Requirements Variance	<input checked="" type="checkbox"/> Break Testing	<input checked="" type="checkbox"/> Offline Cementing	<input type="checkbox"/> Casing Clearance

Possibility of water flows in the Rustler
Possibility of lost circulation in the Salado, Castile, and Delaware
Abnormal pressures may be encountered upon penetrating the 3rd Bone Spring Sandstone and all subsequent formations.

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet 43 CFR part 3170 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The **9-5/8** inch surface casing shall be set at approximately **400** feet (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface. The surface hole shall be **12-1/4** inch in diameter.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.

Operator has proposed to pump down 9-5/8" X 7-5/8" annulus after primary cementing stage. Operator must run Echo-meter to verify Cement Slurry/Fluid top in the annulus Or operator shall run a CBL from TD of the 7-5/8" casing to surface after the second stage BH to verify TOC.

Submit results to the BLM. No displacement fluid/wash out shall be utilized at the top of the cement slurry between second stage BH and top out. Operator must run one CBL per Well Pad.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

3. The minimum required fill of cement behind the **5-1/2** inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification. **Cement excess calculates to 21% - more cement may be needed.**

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the **9-5/8** inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in **43 CFR 3172** i must be followed.

D. SPECIAL REQUIREMENT (S)

Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

Commercial Well Determination

A commercial well determination shall be submitted after production has been established for at least six months.

E. SPECIAL REQUIREMENT (S)

BOPE Break Testing Variance

- BOPE Break Testing is ONLY permitted for 5M BOPE or less. (**Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP**)
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (**575-706-2779**) prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-361-2822 Eddy County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per **43 CFR 3172**.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

Offline Cementing

Contact the BLM prior to the commencement of any offline cementing procedure.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County
EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
BLM_NM_CFO_DrillingNotifications@BLM.GOV
 (575) 361-2822

Lea County
 Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
 (575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.

2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - iii. Manufacturer representative shall install the test plug for the initial BOP test.
 - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However,

- if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
- ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
 - iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - iv. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - v. The results of the test shall be reported to the appropriate BLM office.
 - vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 - vii. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
 - viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

JS 6/9/2025

C-102 Submit electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONVERSION DIVISION		Revised July, 09 2024
	Submittal Type:	<input type="checkbox"/> Initial Submittal	
		<input checked="" type="checkbox"/> Amended Report	
		<input type="checkbox"/> As Drilled	

WELL LOCATION INFORMATION

API Number 30-015-	Pool Code 11520	Pool Name CEDAR CANYON; BONE SPRING
Property Code	Property Name POKER LAKE UNIT 13-24 PC	Well Number 806H
OGRID No. 373075	Operator Name XTO PERMIAN OPERATING, LLC.	Ground Level Elevation 3,113'
Surface Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal		Mineral Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal

Surface Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
G	13	24S	29E		2,420 FNL	1,536 FEL	32.218155	-103.934466	EDDY

Bottom Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
	1	24S	29E	1	50 FNL	755 FEL	32.253810	-103.932008	EDDY

Dedicated Acres 159.94	Infill or Defining Well DEFINING	Defining Well API	Overlapping Spacing Unit (Y/N) Y	Consolidation Code U
Order Numbers.			Well Setbacks are under Common Ownership: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	13	24S	29E		1,797 FSL	991 FEL	32.215134	-103.932710	EDDY

First Take Point (FTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	13	24S	29E		1,993 FSL	951 FEL	32.215672	-103.932581	EDDY

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
	1	24S	29E	1	101 FNL	755 FEL	32.253670	-103.932009	EDDY

Unitized Area or Area of Interest NMNM105422429	Spacing Unit Type: <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical	Ground Elevation 3,113'
---	---	-----------------------------------

<p>OPERATOR CERTIFICATIONS</p> <p><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or a voluntary pooling agreement or a compulsory pooling order of heretofore entered by the division.</i></p> <p><i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or information) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i></p> <p> Signature</p> <p>05/29/2025 Date</p> <p>Manoj Venkatesh Printed Name</p> <p>manoj.venkatesh@exxonmobil.com Email Address</p>	<p>SURVEYOR CERTIFICATIONS</p> <p><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief</i></p> <p> Signature and Seal of Professional Surveyor</p> <p></p> <p>MARK DILLON HARP 23786 Certificate Number</p> <p>5/22/2025 Date of Survey</p> <p>YH 618.013003.04-29</p>
---	---

Note: No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

P:\618.013 XTO Energy - NM\003 Poker Lake Unit\04 - 13-1,13-24 PC - EDDY\Wells\29 - PLU Pierce Canyon 13-24 806H\DWG\13-24 PC 806H.dwg

C-102 Submit electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONVERSION DIVISION	Revised July, 09 2024	
		Submittal Type:	<input type="checkbox"/> Initial Submittal
		<input checked="" type="checkbox"/> Amended Report	
		<input type="checkbox"/> As Drilled	

WELL LOCATION INFORMATION

API Number 30-015-	Pool Code 96473	Pool Name PIERCE CROSSING; BONE SPRING
Property Code	Property Name POKER LAKE UNIT 13-24 PC	Well Number 806H
OGRID No. 373075	Operator Name XTO PERMIAN OPERATING, LLC.	Ground Level Elevation 3,113'
Surface Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal		Mineral Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal

Surface Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
G	13	24S	29E		2,420 FNL	1,536 FEL	32.218155	-103.934466	EDDY

Bottom Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
	1	24S	29E	1	50 FNL	755 FEL	32.253810	-103.932008	EDDY

Dedicated Acres 120.00	Infill or Defining Well DEFINING	Defining Well API	Overlapping Spacing Unit (Y/N) Y	Consolidation Code U
Order Numbers.			Well Setbacks are under Common Ownership: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	13	24S	29E		1,797 FSL	991 FEL	32.215134	-103.932710	EDDY

First Take Point (FTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	13	24S	29E		1,993 FSL	951 FEL	32.215672	-103.932581	EDDY

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
	1	24S	29E	1	101 FNL	755 FEL	32.253670	-103.932009	EDDY

Unitized Area or Area of Interest NMNM105422429	Spacing Unit Type: <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical	Ground Elevation 3,113'
---	---	-----------------------------------

<p>OPERATOR CERTIFICATIONS</p> <p><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or a voluntary pooling agreement or a compulsory pooling order of heretofore entered by the division.</i></p> <p><i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or information) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i></p> <div style="display: flex; justify-content: space-between; margin-top: 20px;"> <div style="text-align: center;">  Signature </div> <div style="text-align: center;"> 05/29/2025 Date </div> </div> <div style="margin-top: 10px;"> <p>Manoj Venkatesh Printed Name</p> <p>manoj.venkatesh@exxonmobil.com Email Address</p> </div>	<p>SURVEYOR CERTIFICATIONS</p> <p><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief</i></p> <div style="text-align: center; margin-top: 20px;">  Signature and Seal of Professional Surveyor </div> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <div style="text-align: center;"> MARK DILLON HARP 23786 Certificate Number </div> <div style="text-align: center;"> 5/22/2025 Date of Survey </div> </div>
---	--


Note: No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

P:\618.013 XTO Energy - NM\003 Poker Lake Unit\04 - 13-1,13-24 PC - EDDY\Wells\29 - PLU Pierce Canyon 13-24 806H\DWG\13-24 PC 806H.dwg

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated areage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well Locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be accepted.

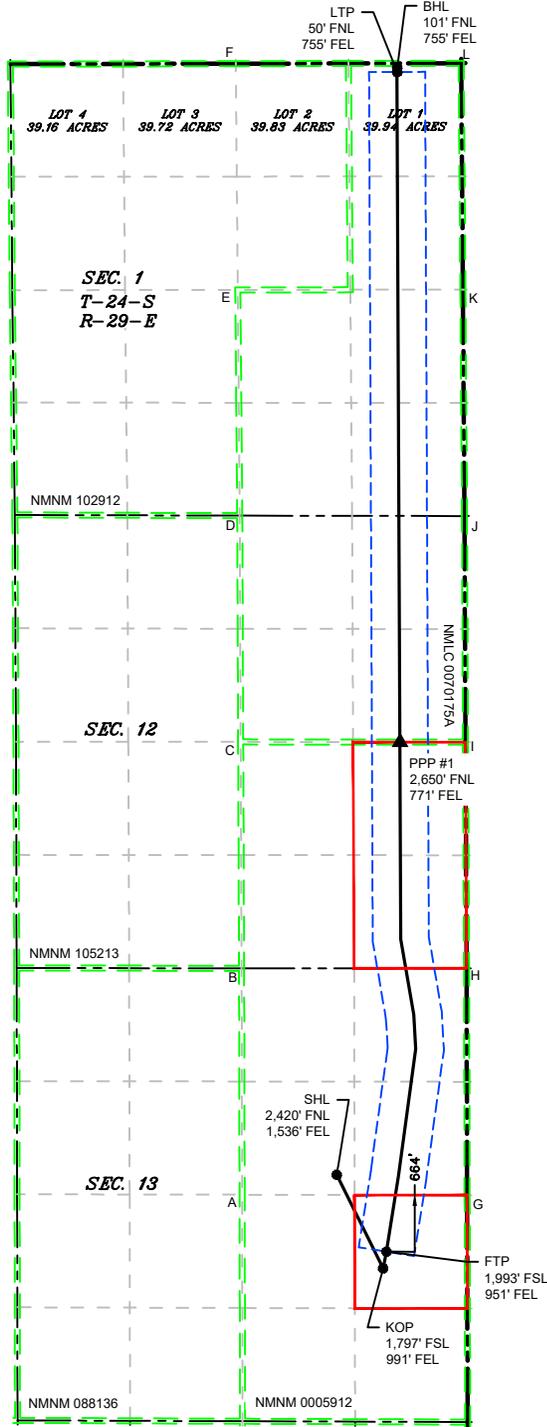

LEGEND

- SECTION LINE
- TOWNSHIP LINE
- DEDICATED ACREAGE
- 330' BUFFER
- MINERAL LEASE
- WELL BORE
- ▲ PPP
- WELL

WELL COORDINATE TABLE								
WELL	NAD 83 NME X	NAD 83 NME Y	NAD 83 LAT	NAD 83 LON	NAD 27 NME X	NAD 27 NME Y	NAD 27 LAT	NAD 27 LON
SHL	664,688.4	443,327.6	32.218155	-103.934466	623,504.9	443,268.3	32.218031	-103.933977
KOP	665,235.4	442,230.6	32.215134	-103.932710	624,051.9	442,171.3	32.215010	-103.932222
FTP	665,274.8	442,426.5	32.215672	-103.932581	624,091.3	442,367.2	32.215548	-103.932092
LTP	665,400.1	456,250.4	32.253670	-103.932009	624,217.0	456,190.7	32.253546	-103.931518
BHL	665,400.1	456,301.1	32.253810	-103.932008	624,217.0	456,241.4	32.253686	-103.931518
PPP #1	665,433.7	448,397.8	32.232084	-103.931995	624,250.3	448,338.3	32.231960	-103.931506

CORNER COORDINATE TABLE				
CORNER	NAD 83 NME X	NAD 83 NME Y	NAD 27 NME X	NAD 27 NME Y
A	663,576.0	443,093.9	622,392.5	443,034.6
B	663,570.2	445,748.2	622,386.8	445,688.8
C	663,559.1	448,399.9	622,375.8	448,340.4
D	663,547.9	451,051.0	622,364.7	450,991.4
E	663,524.5	453,696.5	622,341.4	453,636.9
F	663,501.0	456,347.1	622,318.0	456,287.4
G	666,224.6	443,088.1	625,041.0	443,028.8
H	666,218.3	445,746.5	625,034.9	445,687.1
I	666,205.3	448,396.9	625,022.0	448,337.4
J	666,193.9	451,046.7	625,010.6	450,987.1
K	666,174.6	453,699.9	624,991.5	453,640.3
L	666,154.8	456,352.9	624,971.7	456,293.2

D:\618.013 XTO Energy - NM\003 Poker Lake Unit\04 - 13-1,13-24 PC - EDDY\Wells\29 - PLU Pierce Canyon 13-24 806H\DWG\13-24 PC 806H.dwg

C-102 Submit electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONVERSION DIVISION		Revised July, 09 2024
	Submittal Type:	<input type="checkbox"/> Initial Submittal	
		<input checked="" type="checkbox"/> Amended Report	
		<input type="checkbox"/> As Drilled	

WELL LOCATION INFORMATION

API Number 30-015-	Pool Code 97753	Pool Name WILDCAT S24300B; LWR BONE SPRING
Property Code	Property Name POKER LAKE UNIT 13-24 PC	Well Number 806H
OGRID No. 373075	Operator Name XTO PERMIAN OPERATING, LLC.	Ground Level Elevation 3,113'
Surface Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal		Mineral Owner: <input type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal

Surface Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
G	13	24S	29E		2,420 FNL	1,536 FEL	32.218155	-103.934466	EDDY

Bottom Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
	1	24S	29E	1	50 FNL	755 FEL	32.253810	-103.932008	EDDY

Dedicated Acres 160.00	Infill or Defining Well DEFINING	Defining Well API	Overlapping Spacing Unit (Y/N) Y	Consolidation Code U
Order Numbers.			Well Setbacks are under Common Ownership: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	13	24S	29E		1,797 FSL	991 FEL	32.215134	-103.932710	EDDY

First Take Point (FTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
I	13	24S	29E		1,993 FSL	951 FEL	32.215672	-103.932581	EDDY

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
	1	24S	29E	1	101 FNL	755 FEL	32.253670	-103.932009	EDDY

Unitized Area or Area of Interest NMNM105422429	Spacing Unit Type: <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical	Ground Elevation 3,113'
---	---	-----------------------------------

<p>OPERATOR CERTIFICATIONS</p> <p><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or a voluntary pooling agreement or a compulsory pooling order of heretofore entered by the division.</i></p> <p><i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or information) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i></p> <p> Signature</p> <p>05/29/2025 Date</p> <p>Manoj Venkatesh Printed Name</p> <p>manoj.venkatesh@exxonmobil.com Email Address</p>	<p>SURVEYOR CERTIFICATIONS</p> <p><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief</i></p> <p> Signature and Seal of Professional Surveyor</p> <p>MARK DILLON HARP 23786 Certificate Number</p> <p>5/22/2025 Date of Survey</p> <p style="text-align: center;">YH</p> <p style="text-align: right;">618.013003.04-29</p>
---	--


Note: No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

P:\618.013 XTO Energy - NM\003 Poker Lake Unit\04 - 13-1,13-24 PC - EDDY\Wells\29 - PLU Pierce Canyon 13-24 806H\DWG\13-24 PC 806H.dwg

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated areage in a red box, clearly show the well surface location and bottom hole location, if it is directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well Locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be accepted.

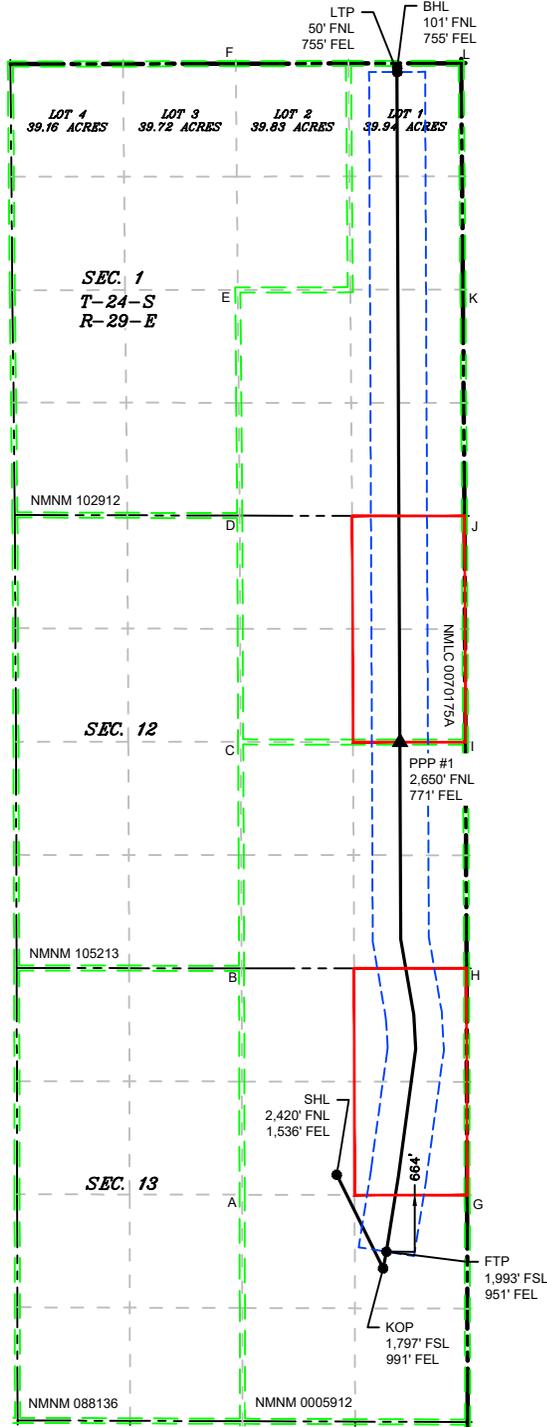

LEGEND

- SECTION LINE
- 330' BUFFER
- TOWNSHIP LINE
- MINERAL LEASE
- DEDICATED ACREAGE
- WELL BORE
- ▲ PPP
- WELL

WELL COORDINATE TABLE								
WELL	NAD 83 NME X	NAD 83 NME Y	NAD 83 LAT	NAD 83 LON	NAD 27 NME X	NAD 27 NME Y	NAD 27 LAT	NAD 27 LON
SHL	664,688.4	443,327.6	32.218155	-103.934466	623,504.9	443,268.3	32.218031	-103.933977
KOP	665,235.4	442,230.6	32.215134	-103.932710	624,051.9	442,171.3	32.215010	-103.932222
FTP	665,274.8	442,426.5	32.215672	-103.932581	624,091.3	442,367.2	32.215548	-103.932092
LTP	665,400.1	456,250.4	32.253670	-103.932009	624,217.0	456,190.7	32.253546	-103.931518
BHL	665,400.1	456,301.1	32.253810	-103.932008	624,217.0	456,241.4	32.253686	-103.931518
PPP #1	665,433.7	448,397.8	32.232084	-103.931995	624,250.3	448,338.3	32.231960	-103.931506



CORNER COORDINATE TABLE				
CORNER	NAD 83 NME X	NAD 83 NME Y	NAD 27 NME X	NAD 27 NME Y
A	663,576.0	443,093.9	622,392.5	443,034.6
B	663,570.2	445,748.2	622,386.8	445,688.8
C	663,559.1	448,399.9	622,375.8	448,340.4
D	663,547.9	451,051.0	622,364.7	450,991.4
E	663,524.5	453,696.5	622,341.4	453,636.9
F	663,501.0	456,347.1	622,318.0	456,287.4
G	666,224.6	443,088.1	625,041.0	443,028.8
H	666,218.3	445,746.5	625,034.9	445,687.1
I	666,205.3	448,396.9	625,022.0	448,337.4
J	666,193.9	451,046.7	625,010.6	450,987.1
K	666,174.6	453,699.9	624,991.5	453,640.3
L	666,154.8	456,352.9	624,971.7	456,293.2



Ground Elevation: 3105.0		RKB Elevation: 3105+30 @ 3135.0usft	
Rig Name:			
Northing	Easting	Latitude	Longitude
443234.97	623507.49	32° 13' 4.581 N	103° 56' 2.289 W

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
1350.0	0.00	0.00	1350.0	0.0	0.0	0.00	0.00	0.0	
2045.5	13.91	153.48	2038.7	-75.2	37.5	2.00	153.48	-73.0	
6447.2	13.91	153.48	6311.3	-1022.0	510.0	0.00	0.00	-992.5	
7142.7	0.00	0.00	7000.0	-1097.1	547.5	2.00	180.00	-1065.5	
9156.5	0.00	0.00	9013.8	-1097.1	547.5	0.00	0.00	-1065.5	KOP Pln 6 PLU 13-24 PC 806H
10281.5	90.00	9.00	9730.0	-389.8	659.5	8.00	9.00	-353.1	
11781.5	90.00	9.00	9730.0	1091.8	894.2	0.00	0.00	1139.1	
12956.5	90.00	345.50	9730.0	2257.2	838.2	2.00	-90.00	2299.7	
13670.9	90.00	359.79	9730.0	2963.9	746.9	2.00	90.00	3000.4	
23653.7	90.00	359.79	9730.0	12946.6	710.1	0.00	0.00	12966.1	PBHL PLU 13-24 PC 806H Pln 6

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
KOP Pln 6 PLU 13-24 PC 806H	9013.8	-1097.1	547.5	442137.83	624054.96	32° 12' 53.703 N	103° 55' 55.964 W
FTP/LP Pln 6 PLU 13-24 PC 806H	9730.0	-389.8	659.5	442845.21	624167.00	32° 13' 0.700 N	103° 55' 54.629 W
PBHL PLU 13-24 PC 806H Pln 6	9730.0	12946.6	710.1	456181.60	624217.60	32° 15' 12.676 N	103° 55' 53.459 W

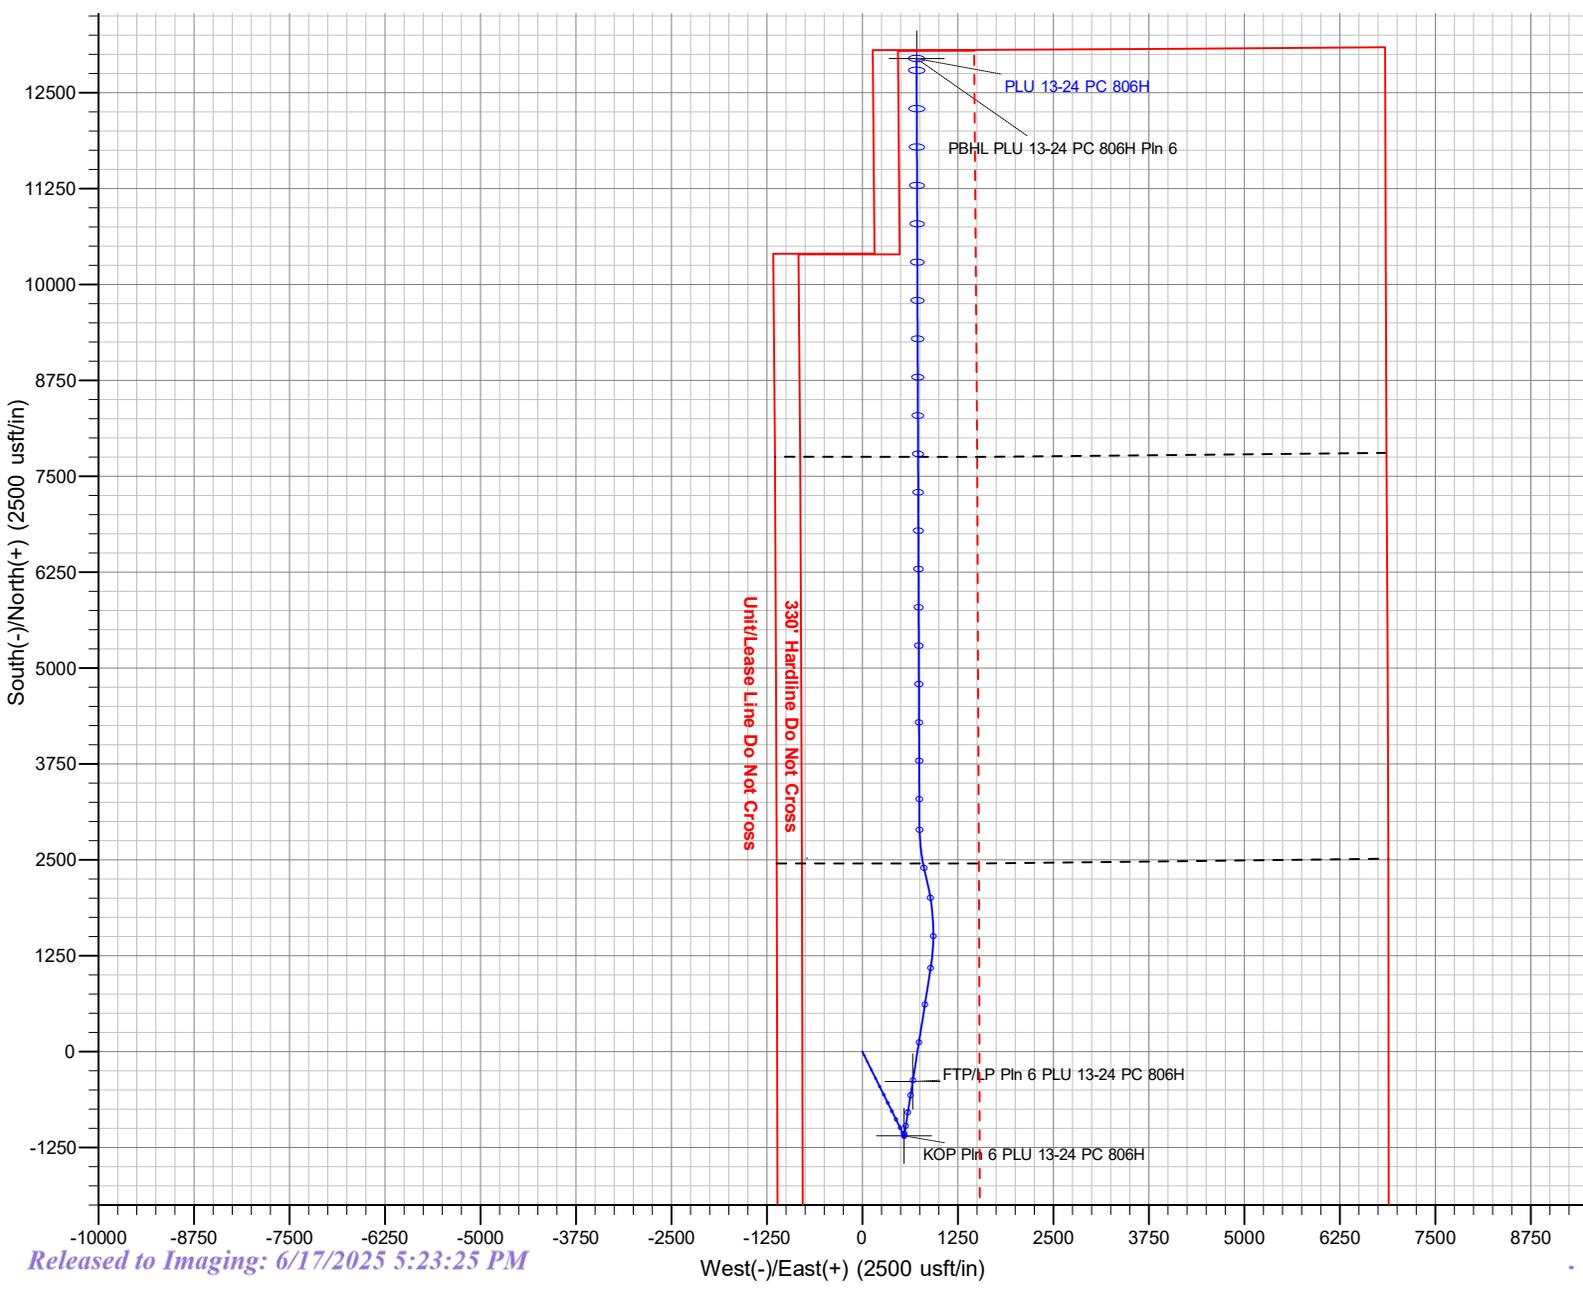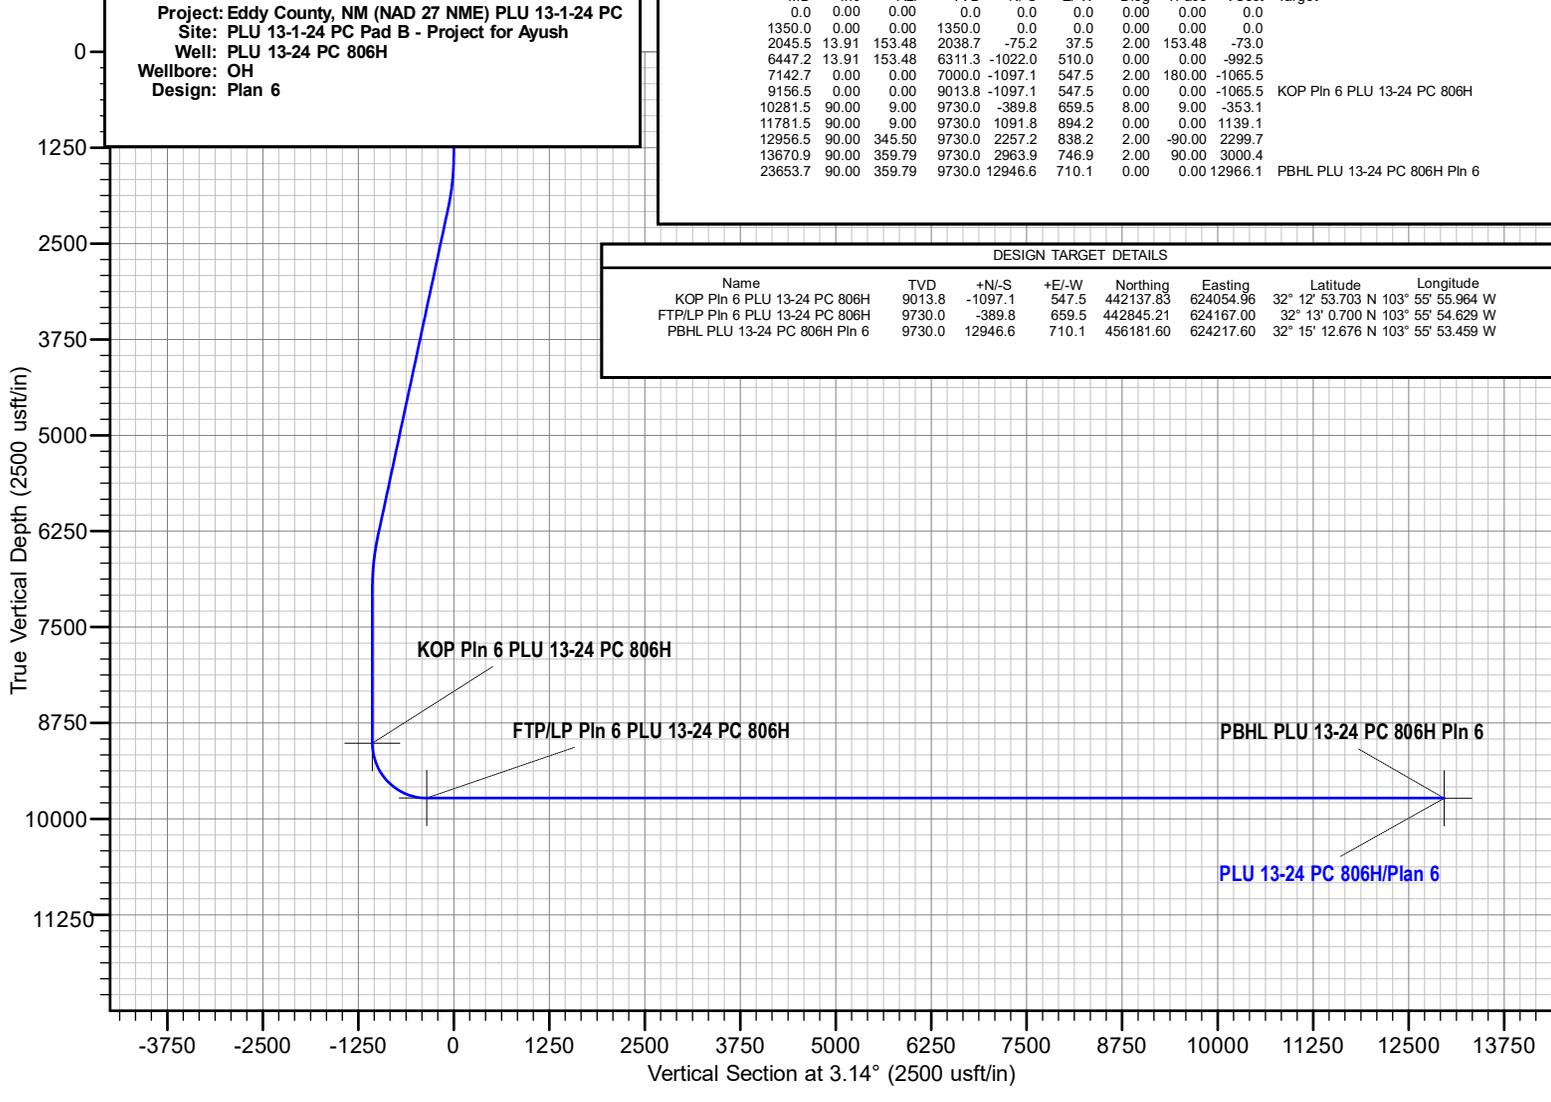

DRILLING PLAN: BLM COMPLIANCE
(Supplement to BLM 3160-3)



ExxonMobil
Poker Lake Unit 13-24 PC 806H
Projected TD: 23654' MD / 9730' TVD
SHL: 2420' FNL & 1536' FEL, Section 13, T24S, R29E
BHL: 50' FNL & 755' FEL, Section 1, T24S, R29E
Eddy County, NM

1. Geologic Name of Surface Formation

A. Quaternary

2. Estimated Tops of Geological Markers & Depths of Anticipated Fresh Water, Oil or Gas

Formation	Well Depth	Water/Oil/Gas
Salado	641'	Water
Base of Salt	3149'	Water
Delaware	3350'	Water
Cherry Canyon	4246'	Water/Oil/Gas
Brushy Canyon	5789'	Water/Oil/Gas
Bone Spring Lm.	7102'	Water/Oil/Gas
Avalon Shale	7228'	Water/Oil/Gas
Avalon Lower	7777'	Water/Oil/Gas
1st Bone Spring Lime	7940'	Water/Oil/Gas
1st Bone Spring Sand	8089'	Water/Oil/Gas
2nd Bone Spring Lime	8420'	Water/Oil/Gas
2nd Bone Spring Sand	8949'	Water/Oil/Gas
3rd Bone Spring Lime	9222'	Water/Oil/Gas
3rd Bone Spring Upper Shale	9599'	Water/Oil/Gas
3rd Bone Spring Upper Shale Base		
3rd Bone Spring Lower Shale		
rd Bone Spring Lower Shale Marke		
3rd Bone Spring Sand		
Warwink		
Red Hills		
Wolfcamp A		
Wolfcamp B		
Wolfcamp C		
Wolfcamp D		
Landing	9730'	Water/Oil/Gas

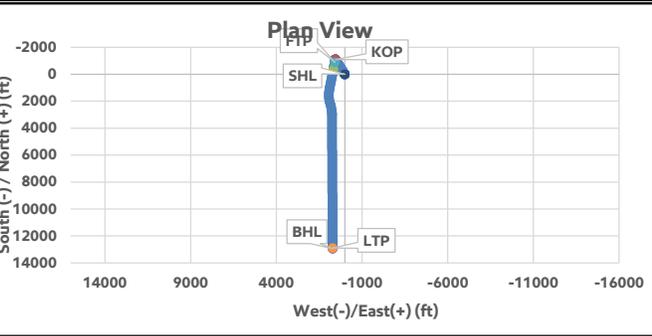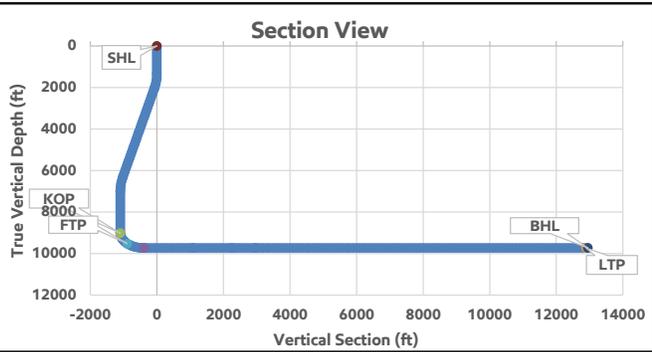

	Inclination (°)	Azimuth (°)	True Vertical Depth (ft)	Y Offset (ft)	X Offset (ft)
SHL	0	0	0	0	0
KOP	0	0	9014	-1097	547
LP	90	9	9730	-390	660
FTP	45	9	9520	-890	580
LTP	90	360	9730	12897	710
BHL	90	360	9730	12947	710

Section 2 Summary:

*** Deepest Expected Groundwater Depth: 40' (per NM State Engineers Office).
No other formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 9-5/8" inch casing at 616' and circulating cement back to surface.

3. Primary Casing Design

Primary Design:

Hole Size (in.)	MD	Casing TVD	OD Csg	Weight	Grade	Collar	New/Used	SF Burst	SF Collapse	SF Tension
12.25"	0' – 616'	616'	9-5/8"	40	J55	BTC	New	20.90	19.26	5.85
8.75"	0' – 4000'	3936'	7-5/8"	29.7	P110-ICY	Tenaris Wedge 511	New	6.01	8.63	3.34
8.75"	4000' – 9006'	8864'	7-5/8"	29.7	L80-IC	Tenaris Wedge 511	New	2.66	5.60	2.40
6.75"	0' – 8906'	8764'	5-1/2"	20	P110-CY	TPN	New	1.18	2.92	2.45
6.75"	8906' – 23654'	9730'	5-1/2"	20	P110-ICY	Tenaris Wedge 441	New	1.18	2.92	2.63

Section 3 Summary:

XTO will keep casing fluid filled to meet BLM's collapse requirement.
The planned kick off point is located at: 9156' MD / 9014' TVD.

Wellhead:

A multi-bowl wellhead system will be utilized. The well design chosen is: 3-String Slim Non-Potash

Wellhead will be installed by manufacturer's representatives.

Manufacturer will monitor welding process to ensure appropriate temperature of seal.

4. Cement Program

Primary Cementing								
Hole Section	Slurry Type	No. Sacks	Density (ppg)	Yield (ft3/sack)	TOC (ft)	Casing Setting Depth (MD)	Excess (%)	Slurry Description
Surface 1	Lead	94	12.4	2.11	0	616	100%	Surface 1 Class C Lead Cement
Surface 1	Tail	141	14.8	1.33	316	616	100%	Surface 1 Class C Tail Cement
Intermediate 1	Lead							
Intermediate 1	Tail	301	14.8	1.45	5789	9,006	35%	Intermediate 1 Class C Tail Cement
Production 1	Lead							
Production 1	Tail	1069	13.2	1.44	8506	23,654	25%	Production 1 Class C Tail Cement
Remedial Cementing								
Casing	Slurry Type	No. Sacks	Density (ppg)	Yield (ft3/sack)	Cemented Interval	Excess (%)	Slurry Description	
Intermediate 1	Bradenhead Squeeze	542	14.8	1.45	0 - 5789'	35%	Intermediate Class C Bradenhead Squeeze Cement	

Section 4 Summary:

*Bradenhead Squeeze 2nd Stage Offline

5. Pressure Control Equipment

Section 5 Summary:

Once the permanent WH is installed on the casing, the blow out preventer equipment (BOP) will consist of a minimum 5M Hydril and a minimum 10M triple Ram BOP.

All BOP testing will be done by an independent service company. Operator will Test as per 43CFR-3172

Requested Variances

4A) Offline Cementing Variance

XOM requests the option to offline cement and remediate (if needed) surface and intermediate casing strings where batch drilling is approved and if unplanned remediation is needed. XOM will ensure well is static with no pressure on the csg annulus, as with all other casing strings where batch drilling operations occur before moving off the rig. Offline cement operations will then be conducted after the rig is moved off the current well to the next well in the batch sequence. The TA cap will also be installed when applicable per wellhead manufacturer's procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.

5A) Break Test Variance

A break testing variance is requested to ONLY test broken pressure seals on the BOP equipment when moving from wellhead to wellhead for the intermediate hole sections which is in compliance with API Standard 53. The maximum anticipated surface pressure is less than 4800psi and the deepest intermediate casing point does not penetrate the Wolfcamp Formation.

5B) Flex Hose Variance

A variance is requested to allow use of a flex hose as the choke line from the BOP to the Choke Manifold. If this hose is used, a copy of the manufacturer's certification and pressure test chart will be kept on the rig. Attached is an example of a certification and pressure test chart. The manufacturer does not require anchors.

5C) 10M Annular Variance

XOM requests a variance to use a 5000 psi annular BOP with a 10,000 psi BOP stack. The component and compatibility tables attached along with the general well control plans demonstrate how the 5000 psi annular BOP will be protected from pressures that exceed its rated working pressure (RWP). The pressure at which the control of the wellbore is transferred from the annular preventer to another available preventer will not exceed 3500 psi (70% of the RWP of the 5000 psi annular BOP).

8A) Open Hole Logging Variance

Open hole logging will not be done on this well.

10A) Spudder Rig Variance

XOM requests the option to utilize a spudder rig (Atlas Copco RD20 or Equivalent) to set and cement surface casing.

10B) Batch Drilling Variance

XOM requests a variance to be able to batch drill this well. In doing so, XOM will set casing and ensure that the well is cemented properly (unless approval is given for offline cementing) and the well is static. XOM will contact the BLM to skid the rig to drill the remaining wells on the pad. Once surface and intermediate strings are all completed, XOM will begin drilling the production hole on each of the wells.

6. Proposed Mud Circulation System

INTERVAL	Hole Size	Mud Type	MW	Viscosity	Fluid Loss	Comments
			(ppg)	(sec/qt)	(cc)	
0' - 616'	12.25"	FW/Native	8.3 - 8.7	35-40	NC	Fresh Water or Native Water
616' - 9006'	8.75"	BDE/OBM or FW/Brine	9.5 - 10	30-32	NC	Fluid type will be based upon on well conditions. A fully saturated system will be used across the salt interval.
9006' - 23654'	6.75"	OBM	9 - 10.7	50-60	NC - 20	OBM or Cut Brine depending on Well Conditions

Section 6 Summary:

The necessary mud products for weight addition and fluid loss control will be on location at all times.

Pump viscous sweeps as needed for hole cleaning. Pump speed will be recorded on a daily drilling report after mudding up. An EDR (Electronic Drilling Recorder) will be used to detect changes in loss or gain of mud volume. A mud test will be performed every 24 hours to determine: density, viscosity, strength, filtration and pH as necessary. Use available solids controls equipment to help keep mud weight down after mud up. Rig up solids control equipment to operate as a closed loop system.

7. Auxiliary Well Control and Monitoring Equipment

Section 7 Summary:

A Kelly cock will be in the drill string at all times.

A full opening drill pipe stabbing valve having appropriate connections will be on the rig floor at all times.

H2S monitors will be on location when drilling below the 9-5/8" casing.

8. Logging, Coring and Testing Program

Section 8 Summary:

Open hole logging will not be done on this well.

9. Abnormal Pressures and Temperatures / Potential Hazards

Section 9 Summary:

The estimated bottom hole temperature of 163F to 183F. No H2S is expected but monitors will be in place to detect any H2S occurrences. Should these circumstances be encountered the operator and drilling contractor are prepared to take all necessary steps to ensure safety of all personnel and environment. Lost circulation is possible throughout the well.

10. Anticipated Starting Date and Duration of Operations

Section 10 Summary:

Anticipated spud date will be after BLM approval. Move in operations and drilling is expected to take 40 days.

COMPANY ROC

FIELD Eddy County, NM (NAD 27 NME) PLU 13-1-24 PC
 SITE PLU 13-1-24 PC Pad B - Project for Ayush
 WELL PLU 13-24 PC 806H
 WELLPATH OH
 DESIGN Plan 6
 DEPTHUNT (ft)

WELL INFO

MAP DATU NAD 1927 (NADCON CONUS)
 MAP SYSTE US State Plane 1927 (Exact solution)
 MAP ZONE New Mexico East 3001
 WELL LAT 32.21794
 WELL LON -103.934
 WELL EWM 623507.5
 WELL NSM 443235
 CONVERG 0.21
 MAGMODE IGRF2020
 DECLINATI 6.4
 NORTH RE Grid
 GROUND E 3105
 KB ELEVN 3135
 VS AZI 3.14

SURVEY TYPE INFORMATION

H07000.00 : 23653.70 : PLAN 6 : XOMR2_OWSG MWD+IFR1+MS

SURVEY LIST

Measured MD	Inclination INC	Azimuth AZI	Course CL	Ler TVD	True SSTVD	Vertic NS	SubSea EW	TV Local X	N/-S Easting Y	Northing
0	0	0	0	0	0	3135	0	0	623507.5	443235
100	0	0	0	100	100	3035	0	0	623507.5	443235
200	0	0	0	100	200	2935	0	0	623507.5	443235
300	0	0	0	100	300	2835	0	0	623507.5	443235
400	0	0	0	100	400	2735	0	0	623507.5	443235
500	0	0	0	100	500	2635	0	0	623507.5	443235
600	0	0	0	100	600	2535	0	0	623507.5	443235
700	0	0	0	100	700	2435	0	0	623507.5	443235
800	0	0	0	100	800	2335	0	0	623507.5	443235
900	0	0	0	100	900	2235	0	0	623507.5	443235
1000	0	0	0	100	1000	2135	0	0	623507.5	443235
1100	0	0	0	100	1100	2035	0	0	623507.5	443235
1200	0	0	0	100	1200	1935	0	0	623507.5	443235
1300	0	0	0	100	1300	1835	0	0	623507.5	443235

1350	0	0	50	1350	1785	0	0	623507.5	443235
1400	1	153.481	50	1399.997	1735.003	-0.39	0.195	623507.7	443234.6
1500	3	153.481	100	1499.931	1635.069	-3.513	1.753	623509.2	443231.5
1600	5	153.481	100	1599.683	1535.317	-9.754	4.867	623512.4	443225.2
1700	7	153.481	100	1699.13	1435.87	-19.107	9.534	623517	443215.9
1800	9	153.481	100	1798.152	1336.848	-31.559	15.748	623523.2	443203.4
1900	11	153.481	100	1896.628	1238.372	-47.096	23.501	623531	443187.9
2000	13	153.481	100	1994.437	1140.563	-65.699	32.784	623540.3	443169.3
2045.479	13.91	153.481	45.479	2038.668	1096.332	-75.168	37.508	623545	443159.8
2100	13.91	153.481	54.521	2091.59	1043.41	-86.895	43.36	623550.9	443148.1
2200	13.91	153.481	100	2188.657	946.343	-108.405	54.094	623561.6	443126.6
2300	13.91	153.481	100	2285.725	849.275	-129.914	64.827	623572.3	443105.1
2400	13.91	153.481	100	2382.793	752.207	-151.424	75.56	623583.1	443083.5
2500	13.91	153.481	100	2479.86	655.14	-172.934	86.294	623593.8	443062
2600	13.91	153.481	100	2576.928	558.072	-194.444	97.027	623604.5	443040.5
2700	13.91	153.481	100	2673.996	461.004	-215.954	107.76	623615.3	443019
2800	13.91	153.481	100	2771.063	363.937	-237.463	118.494	623626	442997.5
2900	13.91	153.481	100	2868.131	266.869	-258.973	129.227	623636.7	442976
3000	13.91	153.481	100	2965.199	169.801	-280.483	139.96	623647.5	442954.5
3100	13.91	153.481	100	3062.266	72.734	-301.993	150.694	623658.2	442933
3200	13.91	153.481	100	3159.334	-24.334	-323.503	161.427	623668.9	442911.5
3300	13.91	153.481	100	3256.401	-121.401	-345.012	172.16	623679.7	442890
3400	13.91	153.481	100	3353.469	-218.469	-366.522	182.894	623690.4	442868.4
3500	13.91	153.481	100	3450.537	-315.537	-388.032	193.627	623701.1	442846.9
3600	13.91	153.481	100	3547.604	-412.604	-409.542	204.36	623711.9	442825.4
3700	13.91	153.481	100	3644.672	-509.672	-431.051	215.094	623722.6	442803.9
3800	13.91	153.481	100	3741.74	-606.74	-452.561	225.827	623733.3	442782.4
3900	13.91	153.481	100	3838.807	-703.807	-474.071	236.56	623744.1	442760.9
4000	13.91	153.481	100	3935.875	-800.875	-495.581	247.294	623754.8	442739.4
4100	13.91	153.481	100	4032.942	-897.942	-517.091	258.027	623765.5	442717.9
4200	13.91	153.481	100	4130.01	-995.01	-538.6	268.76	623776.3	442696.4
4300	13.91	153.481	100	4227.078	-1092.08	-560.11	279.494	623787	442674.9
4400	13.91	153.481	100	4324.145	-1189.15	-581.62	290.227	623797.7	442653.4
4500	13.91	153.481	100	4421.213	-1286.21	-603.13	300.96	623808.5	442631.8
4600	13.91	153.481	100	4518.281	-1383.28	-624.64	311.694	623819.2	442610.3
4700	13.91	153.481	100	4615.348	-1480.35	-646.149	322.427	623829.9	442588.8
4800	13.91	153.481	100	4712.416	-1577.42	-667.659	333.16	623840.7	442567.3
4900	13.91	153.481	100	4809.483	-1674.48	-689.169	343.893	623851.4	442545.8
5000	13.91	153.481	100	4906.551	-1771.55	-710.679	354.627	623862.1	442524.3
5100	13.91	153.481	100	5003.619	-1868.62	-732.188	365.36	623872.9	442502.8
5200	13.91	153.481	100	5100.686	-1965.69	-753.698	376.093	623883.6	442481.3
5300	13.91	153.481	100	5197.754	-2062.75	-775.208	386.827	623894.3	442459.8
5400	13.91	153.481	100	5294.822	-2159.82	-796.718	397.56	623905.1	442438.3
5500	13.91	153.481	100	5391.889	-2256.89	-818.228	408.293	623915.8	442416.7

5600	13.91	153.481	100	5488.957	-2353.96	-839.737	419.027	623926.5	442395.2
5700	13.91	153.481	100	5586.025	-2451.03	-861.247	429.76	623937.3	442373.7
5800	13.91	153.481	100	5683.092	-2548.09	-882.757	440.493	623948	442352.2
5900	13.91	153.481	100	5780.16	-2645.16	-904.267	451.227	623958.7	442330.7
6000	13.91	153.481	100	5877.227	-2742.23	-925.777	461.96	623969.5	442309.2
6100	13.91	153.481	100	5974.295	-2839.3	-947.286	472.693	623980.2	442287.7
6200	13.91	153.481	100	6071.363	-2936.36	-968.796	483.427	623990.9	442266.2
6300	13.91	153.481	100	6168.43	-3033.43	-990.306	494.16	624001.7	442244.7
6400	13.91	153.481	100	6265.498	-3130.5	-1011.82	504.893	624012.4	442223.2
6447.219	13.91	153.481	47.219	6311.332	-3176.33	-1021.97	509.962	624017.5	442213
6500	12.854	153.481	52.781	6362.679	-3227.68	-1032.9	515.416	624022.9	442202.1
6600	10.854	153.481	100	6460.542	-3325.54	-1051.28	524.587	624032.1	442183.7
6700	8.854	153.481	100	6559.062	-3424.06	-1066.59	532.228	624039.7	442168.4
6800	6.854	153.481	100	6658.119	-3523.12	-1078.82	538.329	624045.8	442156.1
6900	4.854	153.481	100	6757.592	-3622.59	-1087.95	542.883	624050.4	442147
7000	2.854	153.481	100	6857.361	-3722.36	-1093.96	545.883	624053.4	442141
7100	0.854	153.481	100	6957.303	-3822.3	-1096.86	547.328	624054.8	442138.1
7142.698	0	0	42.698	7000	-3865	-1097.14	547.47	624055	442137.8
7200	0	0	57.302	7057.302	-3922.3	-1097.14	547.47	624055	442137.8
7300	0	0	100	7157.302	-4022.3	-1097.14	547.47	624055	442137.8
7400	0	0	100	7257.302	-4122.3	-1097.14	547.47	624055	442137.8
7500	0	0	100	7357.302	-4222.3	-1097.14	547.47	624055	442137.8
7600	0	0	100	7457.302	-4322.3	-1097.14	547.47	624055	442137.8
7700	0	0	100	7557.302	-4422.3	-1097.14	547.47	624055	442137.8
7800	0	0	100	7657.302	-4522.3	-1097.14	547.47	624055	442137.8
7900	0	0	100	7757.302	-4622.3	-1097.14	547.47	624055	442137.8
8000	0	0	100	7857.302	-4722.3	-1097.14	547.47	624055	442137.8
8100	0	0	100	7957.302	-4822.3	-1097.14	547.47	624055	442137.8
8200	0	0	100	8057.302	-4922.3	-1097.14	547.47	624055	442137.8
8300	0	0	100	8157.302	-5022.3	-1097.14	547.47	624055	442137.8
8400	0	0	100	8257.302	-5122.3	-1097.14	547.47	624055	442137.8
8500	0	0	100	8357.302	-5222.3	-1097.14	547.47	624055	442137.8
8600	0	0	100	8457.302	-5322.3	-1097.14	547.47	624055	442137.8
8700	0	0	100	8557.302	-5422.3	-1097.14	547.47	624055	442137.8
8800	0	0	100	8657.302	-5522.3	-1097.14	547.47	624055	442137.8
8900	0	0	100	8757.302	-5622.3	-1097.14	547.47	624055	442137.8
9000	0	0	100	8857.302	-5722.3	-1097.14	547.47	624055	442137.8
9100	0	0	100	8957.302	-5822.3	-1097.14	547.47	624055	442137.8
9156.498	0	0	56.498	9013.8	-5878.8	-1097.14	547.47	624055	442137.8
9200	3.48	9	43.502	9057.275	-5922.28	-1095.84	547.677	624055.2	442139.1
9250	7.48	9	50	9107.036	-5972.04	-1091.12	548.423	624055.9	442143.9
9300	11.48	9	50	9156.344	-6021.34	-1082.99	549.711	624057.2	442152
9350	15.48	9	50	9204.956	-6069.96	-1071.48	551.534	624059	442163.5
9400	19.48	9	50	9252.638	-6117.64	-1056.65	553.883	624061.4	442178.3

9450	23.48	9	50	9299.155	-6164.16	-1038.57	556.747	624064.2	442196.4
9500	27.48	9	50	9344.283	-6209.28	-1017.33	560.111	624067.6	442217.6
9550	31.48	9	50	9387.8	-6252.8	-993.029	563.96	624071.5	442241.9
9600	35.48	9	50	9429.496	-6294.5	-965.791	568.274	624075.8	442269.2
9650	39.48	9	50	9469.166	-6334.17	-935.748	573.032	624080.5	442299.2
9700	43.48	9	50	9506.618	-6371.62	-903.044	578.212	624085.7	442331.9
9750	47.48	9	50	9541.668	-6406.67	-867.84	583.788	624091.3	442367.1
9800	51.48	9	50	9574.147	-6439.15	-830.306	589.732	624097.2	442404.7
9850	55.48	9	50	9603.896	-6468.9	-790.627	596.017	624103.5	442444.3
9900	59.48	9	50	9630.77	-6495.77	-748.994	602.611	624110.1	442486
9950	63.48	9	50	9654.639	-6519.64	-705.611	609.482	624117	442529.4
10000	67.48	9	50	9675.385	-6540.39	-660.689	616.597	624124.1	442574.3
10050	71.48	9	50	9692.908	-6557.91	-614.448	623.921	624131.4	442620.5
10100	75.48	9	50	9707.123	-6572.12	-567.111	631.418	624138.9	442667.9
10150	79.48	9	50	9717.959	-6582.96	-518.911	639.052	624146.5	442716.1
10200	83.48	9	50	9725.365	-6590.37	-470.082	646.786	624154.3	442764.9
10250	87.48	9	50	9729.305	-6594.31	-420.861	654.582	624162.1	442814.1
10281.5	90	9	31.498	9729.997	-6595	-389.76	659.508	624167	442845.2
10300	90	9	18.502	9729.997	-6595	-371.486	662.402	624169.9	442863.5
10400	90	9	100	9729.997	-6595	-272.717	678.046	624185.5	442962.3
10500	90	9	100	9729.997	-6595	-173.949	693.689	624201.2	443061
10600	90	9	100	9729.997	-6595	-75.18	709.333	624216.8	443159.8
10700	90	9	100	9729.997	-6595	23.589	724.976	624232.5	443258.6
10800	90	9	100	9729.997	-6595	122.358	740.619	624248.1	443357.3
10900	90	9	100	9729.997	-6595	221.127	756.263	624263.8	443456.1
11000	90	9	100	9729.997	-6595	319.896	771.906	624279.4	443554.9
11100	90	9	100	9729.997	-6595	418.664	787.55	624295	443653.6
11200	90	9	100	9729.997	-6595	517.433	803.193	624310.7	443752.4
11300	90	9	100	9729.997	-6595	616.202	818.837	624326.3	443851.2
11400	90	9	100	9729.997	-6595	714.971	834.48	624342	443949.9
11500	90	9	100	9729.997	-6595	813.74	850.124	624357.6	444048.7
11600	90	9	100	9729.997	-6595	912.509	865.767	624373.3	444147.5
11700	90	9	100	9729.997	-6595	1011.277	881.411	624388.9	444246.2
11781.5	90	9	81.498	9729.997	-6595	1091.772	894.16	624401.7	444326.7
11800	90	8.63	18.502	9729.997	-6595	1110.055	896.995	624404.5	444345
11900	90	6.63	100	9729.997	-6595	1209.165	910.272	624417.8	444444.1
12000	90	4.63	100	9729.997	-6595	1308.678	920.082	624427.6	444543.6
12100	90	2.63	100	9729.997	-6595	1408.472	926.412	624433.9	444643.4
12200	90	0.63	100	9729.997	-6595	1508.426	929.257	624436.7	444743.4
12300	90	358.63	100	9729.997	-6595	1608.419	928.611	624436.1	444843.4
12400	90	356.63	100	9729.997	-6595	1708.329	924.476	624432	444943.3
12500	90	354.63	100	9729.997	-6595	1808.033	916.857	624424.3	445043
12600	90	352.63	100	9729.997	-6595	1907.41	905.762	624413.3	445142.4
12700	90	350.63	100	9729.997	-6595	2006.34	891.206	624398.7	445241.3

12800	90	348.63	100	9729.997	-6595	2104.702	873.207	624380.7	445339.7
12900	90	346.63	100	9729.997	-6595	2202.375	851.785	624359.3	445437.3
12956.5	90	345.5	56.498	9729.997	-6595	2257.21	838.18	624345.7	445492.2
13000	90	346.37	43.502	9729.997	-6595	2299.407	827.608	624335.1	445534.4
13100	90	348.37	100	9729.997	-6595	2396.982	805.744	624313.2	445632
13200	90	350.37	100	9729.997	-6595	2495.261	787.298	624294.8	445730.2
13300	90	352.37	100	9729.997	-6595	2594.124	772.294	624279.8	445829.1
13400	90	354.37	100	9729.997	-6595	2693.45	760.748	624268.2	445928.4
13500	90	356.37	100	9729.997	-6595	2793.119	752.677	624260.2	446028.1
13600	90	358.37	100	9729.997	-6595	2893.008	748.089	624255.6	446128
13670.93	90	359.789	70.926	9729.997	-6595	2963.924	746.949	624254.4	446198.9
13700	90	359.789	29.074	9729.997	-6595	2992.997	746.842	624254.3	446228
13800	90	359.789	100	9729.997	-6595	3092.997	746.473	624254	446328
13900	90	359.789	100	9729.997	-6595	3192.996	746.104	624253.6	446428
14000	90	359.789	100	9729.997	-6595	3292.995	745.735	624253.2	446528
14100	90	359.789	100	9729.997	-6595	3392.995	745.365	624252.9	446628
14200	90	359.789	100	9729.997	-6595	3492.994	744.996	624252.5	446728
14300	90	359.789	100	9729.998	-6595	3592.993	744.627	624252.1	446828
14400	90	359.789	100	9729.998	-6595	3692.993	744.258	624251.7	446928
14500	90	359.789	100	9729.998	-6595	3792.992	743.889	624251.4	447028
14600	90	359.789	100	9729.998	-6595	3892.991	743.52	624251	447128
14700	90	359.789	100	9729.998	-6595	3992.991	743.151	624250.6	447228
14800	90	359.789	100	9729.998	-6595	4092.99	742.782	624250.3	447328
14900	90	359.789	100	9729.998	-6595	4192.989	742.413	624249.9	447428
15000	90	359.789	100	9729.998	-6595	4292.988	742.044	624249.5	447528
15100	90	359.789	100	9729.998	-6595	4392.988	741.675	624249.2	447628
15200	90	359.789	100	9729.998	-6595	4492.987	741.306	624248.8	447728
15300	90	359.789	100	9729.998	-6595	4592.986	740.937	624248.4	447828
15400	90	359.789	100	9729.998	-6595	4692.986	740.568	624248.1	447928
15500	90	359.789	100	9729.998	-6595	4792.985	740.199	624247.7	448028
15600	90	359.789	100	9729.998	-6595	4892.984	739.83	624247.3	448128
15700	90	359.789	100	9729.998	-6595	4992.984	739.461	624247	448228
15800	90	359.789	100	9729.998	-6595	5092.983	739.092	624246.6	448328
15900	90	359.789	100	9729.998	-6595	5192.982	738.723	624246.2	448428
16000	90	359.789	100	9729.998	-6595	5292.982	738.354	624245.8	448528
16100	90	359.789	100	9729.998	-6595	5392.981	737.985	624245.5	448628
16200	90	359.789	100	9729.998	-6595	5492.98	737.616	624245.1	448728
16300	90	359.789	100	9729.998	-6595	5592.98	737.247	624244.7	448828
16400	90	359.789	100	9729.998	-6595	5692.979	736.878	624244.4	448927.9
16500	90	359.789	100	9729.998	-6595	5792.978	736.509	624244	449027.9
16600	90	359.789	100	9729.998	-6595	5892.978	736.14	624243.6	449127.9
16700	90	359.789	100	9729.998	-6595	5992.977	735.771	624243.3	449227.9
16800	90	359.789	100	9729.998	-6595	6092.976	735.402	624242.9	449327.9
16900	90	359.789	100	9729.998	-6595	6192.976	735.033	624242.5	449427.9

17000	90	359.789	100	9729.998	-6595	6292.975	734.664	624242.2	449527.9
17100	90	359.789	100	9729.998	-6595	6392.974	734.295	624241.8	449627.9
17200	90	359.789	100	9729.998	-6595	6492.973	733.926	624241.4	449727.9
17300	90	359.789	100	9729.998	-6595	6592.973	733.557	624241	449827.9
17400	90	359.789	100	9729.998	-6595	6692.972	733.188	624240.7	449927.9
17500	90	359.789	100	9729.998	-6595	6792.971	732.819	624240.3	450027.9
17600	90	359.789	100	9729.998	-6595	6892.971	732.45	624239.9	450127.9
17700	90	359.789	100	9729.998	-6595	6992.97	732.081	624239.6	450227.9
17800	90	359.789	100	9729.998	-6595	7092.969	731.712	624239.2	450327.9
17900	90	359.789	100	9729.998	-6595	7192.969	731.343	624238.8	450427.9
18000	90	359.789	100	9729.999	-6595	7292.968	730.974	624238.5	450527.9
18100	90	359.789	100	9729.999	-6595	7392.967	730.605	624238.1	450627.9
18200	90	359.789	100	9729.999	-6595	7492.967	730.235	624237.7	450727.9
18300	90	359.789	100	9729.999	-6595	7592.966	729.866	624237.4	450827.9
18400	90	359.789	100	9729.999	-6595	7692.965	729.497	624237	450927.9
18500	90	359.789	100	9729.999	-6595	7792.965	729.128	624236.6	451027.9
18600	90	359.789	100	9729.999	-6595	7892.964	728.759	624236.2	451127.9
18700	90	359.789	100	9729.999	-6595	7992.963	728.39	624235.9	451227.9
18800	90	359.789	100	9729.999	-6595	8092.963	728.021	624235.5	451327.9
18900	90	359.789	100	9729.999	-6595	8192.962	727.652	624235.1	451427.9
19000	90	359.789	100	9729.999	-6595	8292.961	727.283	624234.8	451527.9
19100	90	359.789	100	9729.999	-6595	8392.961	726.914	624234.4	451627.9
19200	90	359.789	100	9729.999	-6595	8492.96	726.545	624234	451727.9
19300	90	359.789	100	9729.999	-6595	8592.959	726.176	624233.7	451827.9
19400	90	359.789	100	9729.999	-6595	8692.959	725.807	624233.3	451927.9
19500	90	359.789	100	9729.999	-6595	8792.958	725.438	624232.9	452027.9
19600	90	359.789	100	9729.999	-6595	8892.957	725.069	624232.6	452127.9
19700	90	359.789	100	9729.999	-6595	8992.956	724.7	624232.2	452227.9
19800	90	359.789	100	9729.999	-6595	9092.956	724.331	624231.8	452327.9
19900	90	359.789	100	9729.999	-6595	9192.955	723.962	624231.5	452427.9
20000	90	359.789	100	9729.999	-6595	9292.954	723.593	624231.1	452527.9
20100	90	359.789	100	9729.999	-6595	9392.954	723.224	624230.7	452627.9
20200	90	359.789	100	9729.999	-6595	9492.953	722.855	624230.3	452727.9
20300	90	359.789	100	9729.999	-6595	9592.952	722.486	624230	452827.9
20400	90	359.789	100	9729.999	-6595	9692.952	722.117	624229.6	452927.9
20500	90	359.789	100	9729.999	-6595	9792.951	721.748	624229.2	453027.9
20600	90	359.789	100	9729.999	-6595	9892.95	721.379	624228.9	453127.9
20700	90	359.789	100	9729.999	-6595	9992.95	721.01	624228.5	453227.9
20800	90	359.789	100	9729.999	-6595	10092.95	720.641	624228.1	453327.9
20900	90	359.789	100	9729.999	-6595	10192.95	720.272	624227.8	453427.9
21000	90	359.789	100	9729.999	-6595	10292.95	719.903	624227.4	453527.9
21100	90	359.789	100	9729.999	-6595	10392.95	719.534	624227	453627.9
21200	90	359.789	100	9729.999	-6595	10492.95	719.165	624226.7	453727.9
21300	90	359.789	100	9729.999	-6595	10592.95	718.796	624226.3	453827.9

21400	90	359.789	100	9729.999	-6595	10692.95	718.427	624225.9	453927.9
21500	90	359.789	100	9729.999	-6595	10792.94	718.058	624225.5	454027.9
21600	90	359.789	100	9729.999	-6595	10892.94	717.689	624225.2	454127.9
21700	90	359.789	100	9729.999	-6595	10992.94	717.32	624224.8	454227.9
21800	90	359.789	100	9730	-6595	11092.94	716.951	624224.4	454327.9
21900	90	359.789	100	9730	-6595	11192.94	716.582	624224.1	454427.9
22000	90	359.789	100	9730	-6595	11292.94	716.213	624223.7	454527.9
22100	90	359.789	100	9730	-6595	11392.94	715.844	624223.3	454627.9
22200	90	359.789	100	9730	-6595	11492.94	715.475	624223	454727.9
22300	90	359.789	100	9730	-6595	11592.94	715.105	624222.6	454827.9
22400	90	359.789	100	9730	-6595	11692.94	714.736	624222.2	454927.9
22500	90	359.789	100	9730	-6595	11792.94	714.367	624221.9	455027.9
22600	90	359.789	100	9730	-6595	11892.94	713.998	624221.5	455127.9
22700	90	359.789	100	9730	-6595	11992.94	713.629	624221.1	455227.9
22800	90	359.789	100	9730	-6595	12092.94	713.26	624220.8	455327.9
22900	90	359.789	100	9730	-6595	12192.94	712.891	624220.4	455427.9
23000	90	359.789	100	9730	-6595	12292.93	712.522	624220	455527.9
23100	90	359.789	100	9730	-6595	12392.93	712.153	624219.6	455627.9
23200	90	359.789	100	9730	-6595	12492.93	711.784	624219.3	455727.9
23300	90	359.789	100	9730	-6595	12592.93	711.415	624218.9	455827.9
23400	90	359.789	100	9730	-6595	12692.93	711.046	624218.5	455927.9
23500	90	359.789	100	9730	-6595	12792.93	710.677	624218.2	456027.9
23600	90	359.789	100	9730	-6595	12892.93	710.308	624217.8	456127.9
23653.7	90	359.789	53.7	9730	-6595	12946.63	710.11	624217.6	456181.6

Latitude	Longitude	Dogleg Sev	Build Rate	Turn Rate	Vertical Section
LAT	LON	DLS	BLD	TRN	VS
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0
32.21794	-103.934	0	0	0	0


32.21794	-103.934	0	0	0	0
32.21794	-103.934	2	2	0	-0.379
32.21793	-103.934	2	2	0	-3.412
32.21791	-103.934	2	2	0	-9.473
32.21789	-103.934	2	2	0	-18.556
32.21785	-103.934	2	2	0	-30.65
32.21781	-103.934	2	2	0	-45.739
32.21776	-103.934	2	2	0	-63.805
32.21773	-103.934	2	2	0	-73.001
32.2177	-103.934	0	0	0	-84.39
32.21764	-103.934	0	0	0	-105.279
32.21758	-103.934	0	0	0	-126.169
32.21752	-103.934	0	0	0	-147.059
32.21746	-103.934	0	0	0	-167.948
32.2174	-103.934	0	0	0	-188.838
32.21734	-103.934	0	0	0	-209.728
32.21729	-103.934	0	0	0	-230.618
32.21723	-103.934	0	0	0	-251.507
32.21717	-103.934	0	0	0	-272.397
32.21711	-103.933	0	0	0	-293.287
32.21705	-103.933	0	0	0	-314.176
32.21699	-103.933	0	0	0	-335.066
32.21693	-103.933	0	0	0	-355.956
32.21687	-103.933	0	0	0	-376.845
32.21681	-103.933	0	0	0	-397.735
32.21675	-103.933	0	0	0	-418.625
32.21669	-103.933	0	0	0	-439.514
32.21663	-103.933	0	0	0	-460.404
32.21657	-103.933	0	0	0	-481.294
32.21652	-103.933	0	0	0	-502.183
32.21646	-103.933	0	0	0	-523.073
32.2164	-103.933	0	0	0	-543.963
32.21634	-103.933	0	0	0	-564.852
32.21628	-103.933	0	0	0	-585.742
32.21622	-103.933	0	0	0	-606.632
32.21616	-103.933	0	0	0	-627.521
32.2161	-103.933	0	0	0	-648.411
32.21604	-103.933	0	0	0	-669.301
32.21598	-103.933	0	0	0	-690.19
32.21592	-103.933	0	0	0	-711.08
32.21586	-103.933	0	0	0	-731.97
32.2158	-103.933	0	0	0	-752.859
32.21575	-103.933	0	0	0	-773.749
32.21569	-103.933	0	0	0	-794.639

32.21508	-103.932	8	8	0	-1006.52
32.21514	-103.932	8	8	0	-985.125
32.2152	-103.932	8	8	0	-960.652
32.21528	-103.932	8	8	0	-933.219
32.21536	-103.932	8	8	0	-902.96
32.21545	-103.932	8	8	0	-870.022
32.21555	-103.932	8	8	0	-834.565
32.21565	-103.932	8	8	0	-796.762
32.21576	-103.932	8	8	0	-756.798
32.21587	-103.932	8	8	0	-714.867
32.21599	-103.932	8	8	0	-671.173
32.21612	-103.932	8	8	0	-625.929
32.21624	-103.932	8	8	0	-579.355
32.21637	-103.932	8	8	0	-531.68
32.21651	-103.932	8	8	0	-483.133
32.21664	-103.932	8	8	0	-433.954
32.21678	-103.932	8	8	0	-384.38
32.21686	-103.932	8	8	0	-353.056
32.21691	-103.932	0	0	0	-334.651
32.21718	-103.932	0	0	0	-235.174
32.21745	-103.932	0	0	0	-135.696
32.21773	-103.932	0	0	0	-36.219
32.218	-103.932	0	0	0	63.258
32.21827	-103.932	0	0	0	162.736
32.21854	-103.932	0	0	0	262.213
32.21881	-103.931	0	0	0	361.69
32.21908	-103.931	0	0	0	461.168
32.21935	-103.931	0	0	0	560.645
32.21963	-103.931	0	0	0	660.122
32.2199	-103.931	0	0	0	759.6
32.22017	-103.931	0	0	0	859.077
32.22044	-103.931	0	0	0	958.554
32.22071	-103.931	0	0	0	1058.032
32.22093	-103.931	0	0	0	1139.104
32.22098	-103.931	2	0	-2	1157.515
32.22125	-103.931	2	0	-2	1257.203
32.22153	-103.931	2	0	-2	1357.103
32.2218	-103.931	2	0	-2	1457.095
32.22208	-103.931	2	0	-2	1557.055
32.22235	-103.931	2	0	-2	1656.862
32.22263	-103.931	2	0	-2	1756.395
32.2229	-103.931	2	0	-2	1855.532
32.22317	-103.931	2	0	-2	1954.153
32.22345	-103.931	2	0	-2	2052.137


32.22372	-103.931	2	0	-2	2149.366
32.22399	-103.931	2	0	-2	2245.719
32.22414	-103.931	2	0	-2	2299.726
32.22425	-103.931	2	0	2	2341.281
32.22452	-103.931	2	0	2	2437.513
32.22479	-103.931	2	0	2	2534.634
32.22506	-103.931	2	0	2	2632.527
32.22534	-103.931	2	0	2	2731.072
32.22561	-103.932	2	0	2	2830.149
32.22588	-103.932	2	0	2	2929.637
32.22608	-103.932	2	0	2	3000.384
32.22616	-103.932	0	0	0	3029.407
32.22643	-103.932	0	0	0	3129.236
32.22671	-103.932	0	0	0	3229.065
32.22698	-103.932	0	0	0	3328.895
32.22726	-103.932	0	0	0	3428.724
32.22753	-103.932	0	0	0	3528.553
32.22781	-103.932	0	0	0	3628.382
32.22808	-103.932	0	0	0	3728.211
32.22836	-103.932	0	0	0	3828.04
32.22863	-103.932	0	0	0	3927.869
32.22891	-103.932	0	0	0	4027.698
32.22918	-103.932	0	0	0	4127.527
32.22946	-103.932	0	0	0	4227.356
32.22973	-103.932	0	0	0	4327.185
32.23001	-103.932	0	0	0	4427.014
32.23028	-103.932	0	0	0	4526.843
32.23056	-103.932	0	0	0	4626.672
32.23083	-103.932	0	0	0	4726.501
32.23111	-103.932	0	0	0	4826.33
32.23138	-103.932	0	0	0	4926.159
32.23166	-103.932	0	0	0	5025.988
32.23193	-103.932	0	0	0	5125.817
32.23221	-103.932	0	0	0	5225.646
32.23248	-103.932	0	0	0	5325.475
32.23276	-103.932	0	0	0	5425.304
32.23303	-103.932	0	0	0	5525.133
32.23331	-103.932	0	0	0	5624.962
32.23358	-103.932	0	0	0	5724.791
32.23386	-103.932	0	0	0	5824.62
32.23413	-103.932	0	0	0	5924.449
32.23441	-103.932	0	0	0	6024.278
32.23468	-103.932	0	0	0	6124.107
32.23496	-103.932	0	0	0	6223.936

32.23523	-103.932	0	0	0	6323.765
32.23551	-103.932	0	0	0	6423.594
32.23578	-103.932	0	0	0	6523.423
32.23606	-103.932	0	0	0	6623.252
32.23633	-103.932	0	0	0	6723.081
32.23661	-103.932	0	0	0	6822.91
32.23688	-103.932	0	0	0	6922.739
32.23716	-103.932	0	0	0	7022.569
32.23743	-103.932	0	0	0	7122.398
32.23771	-103.932	0	0	0	7222.227
32.23798	-103.932	0	0	0	7322.056
32.23825	-103.932	0	0	0	7421.885
32.23853	-103.932	0	0	0	7521.714
32.2388	-103.932	0	0	0	7621.543
32.23908	-103.932	0	0	0	7721.372
32.23935	-103.932	0	0	0	7821.201
32.23963	-103.932	0	0	0	7921.03
32.2399	-103.932	0	0	0	8020.859
32.24018	-103.932	0	0	0	8120.688
32.24045	-103.932	0	0	0	8220.517
32.24073	-103.932	0	0	0	8320.346
32.241	-103.932	0	0	0	8420.175
32.24128	-103.932	0	0	0	8520.004
32.24155	-103.932	0	0	0	8619.833
32.24183	-103.932	0	0	0	8719.662
32.2421	-103.932	0	0	0	8819.491
32.24238	-103.932	0	0	0	8919.32
32.24265	-103.932	0	0	0	9019.149
32.24293	-103.932	0	0	0	9118.978
32.2432	-103.932	0	0	0	9218.807
32.24348	-103.932	0	0	0	9318.636
32.24375	-103.932	0	0	0	9418.465
32.24403	-103.932	0	0	0	9518.294
32.2443	-103.932	0	0	0	9618.123
32.24458	-103.932	0	0	0	9717.952
32.24485	-103.932	0	0	0	9817.781
32.24513	-103.932	0	0	0	9917.61
32.2454	-103.932	0	0	0	10017.44
32.24568	-103.932	0	0	0	10117.27
32.24595	-103.932	0	0	0	10217.1
32.24623	-103.932	0	0	0	10316.93
32.2465	-103.932	0	0	0	10416.76
32.24678	-103.932	0	0	0	10516.58
32.24705	-103.932	0	0	0	10616.41

32.24733	-103.932	0	0	0	10716.24
32.2476	-103.932	0	0	0	10816.07
32.24788	-103.932	0	0	0	10915.9
32.24815	-103.932	0	0	0	11015.73
32.24843	-103.932	0	0	0	11115.56
32.2487	-103.932	0	0	0	11215.39
32.24898	-103.932	0	0	0	11315.22
32.24925	-103.932	0	0	0	11415.05
32.24953	-103.932	0	0	0	11514.88
32.2498	-103.932	0	0	0	11614.7
32.25008	-103.932	0	0	0	11714.53
32.25035	-103.932	0	0	0	11814.36
32.25063	-103.932	0	0	0	11914.19
32.2509	-103.932	0	0	0	12014.02
32.25117	-103.932	0	0	0	12113.85
32.25145	-103.932	0	0	0	12213.68
32.25172	-103.932	0	0	0	12313.51
32.252	-103.932	0	0	0	12413.34
32.25227	-103.932	0	0	0	12513.17
32.25255	-103.932	0	0	0	12612.99
32.25282	-103.932	0	0	0	12712.82
32.2531	-103.932	0	0	0	12812.65
32.25337	-103.932	0	0	0	12912.48
32.25352	-103.932	0	0	0	12966.09

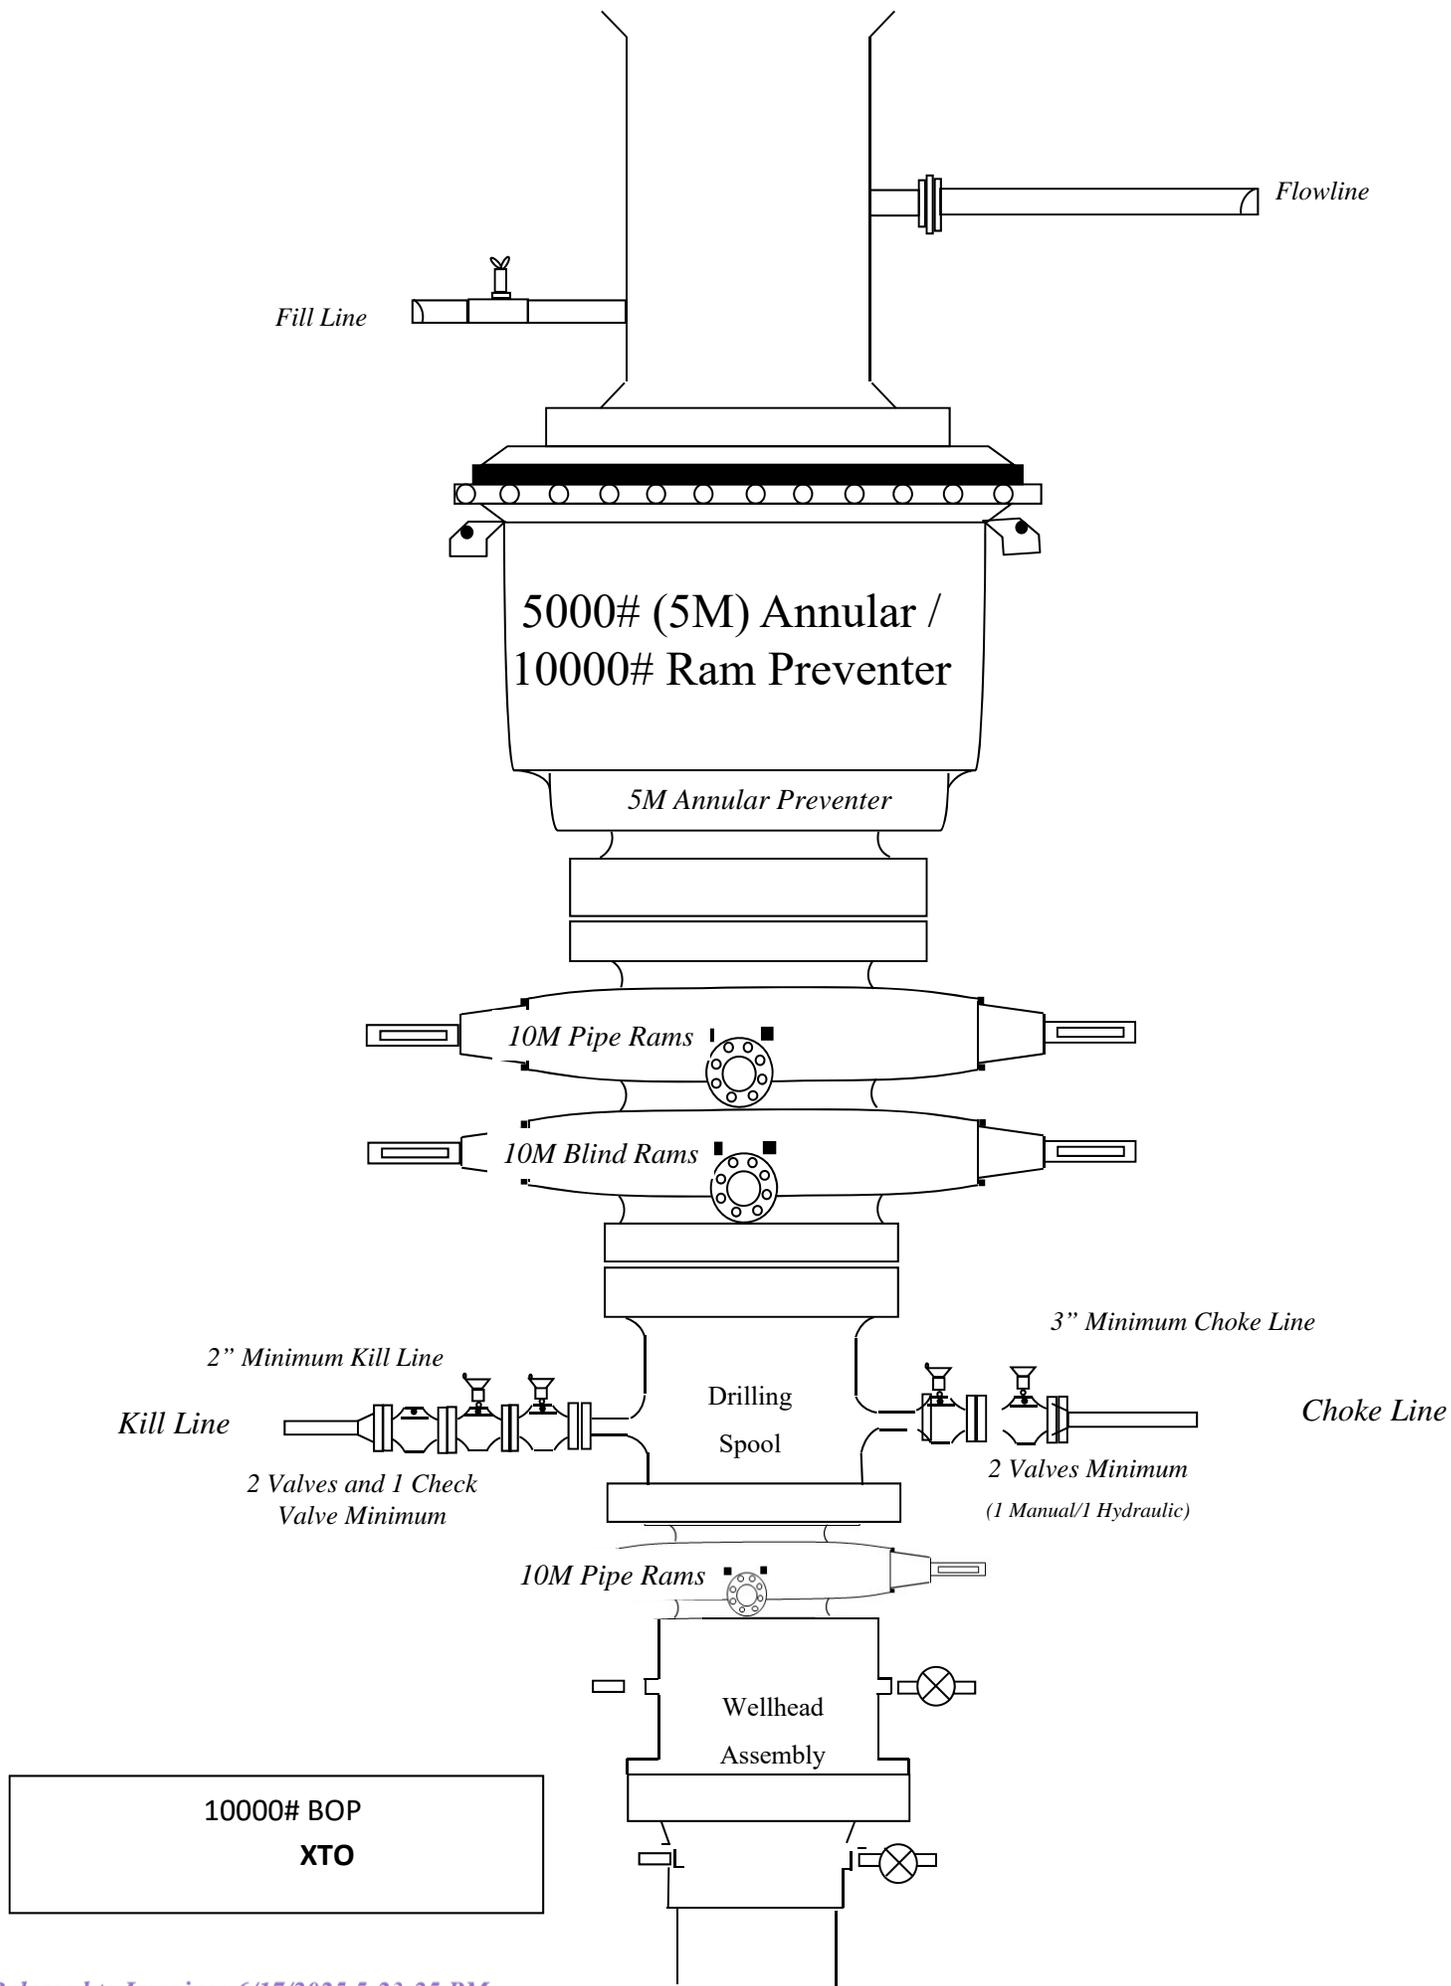

Bleed line will discharge 100' from wellhead for non-H2S situations and 150' from wellhead for H2S situations.

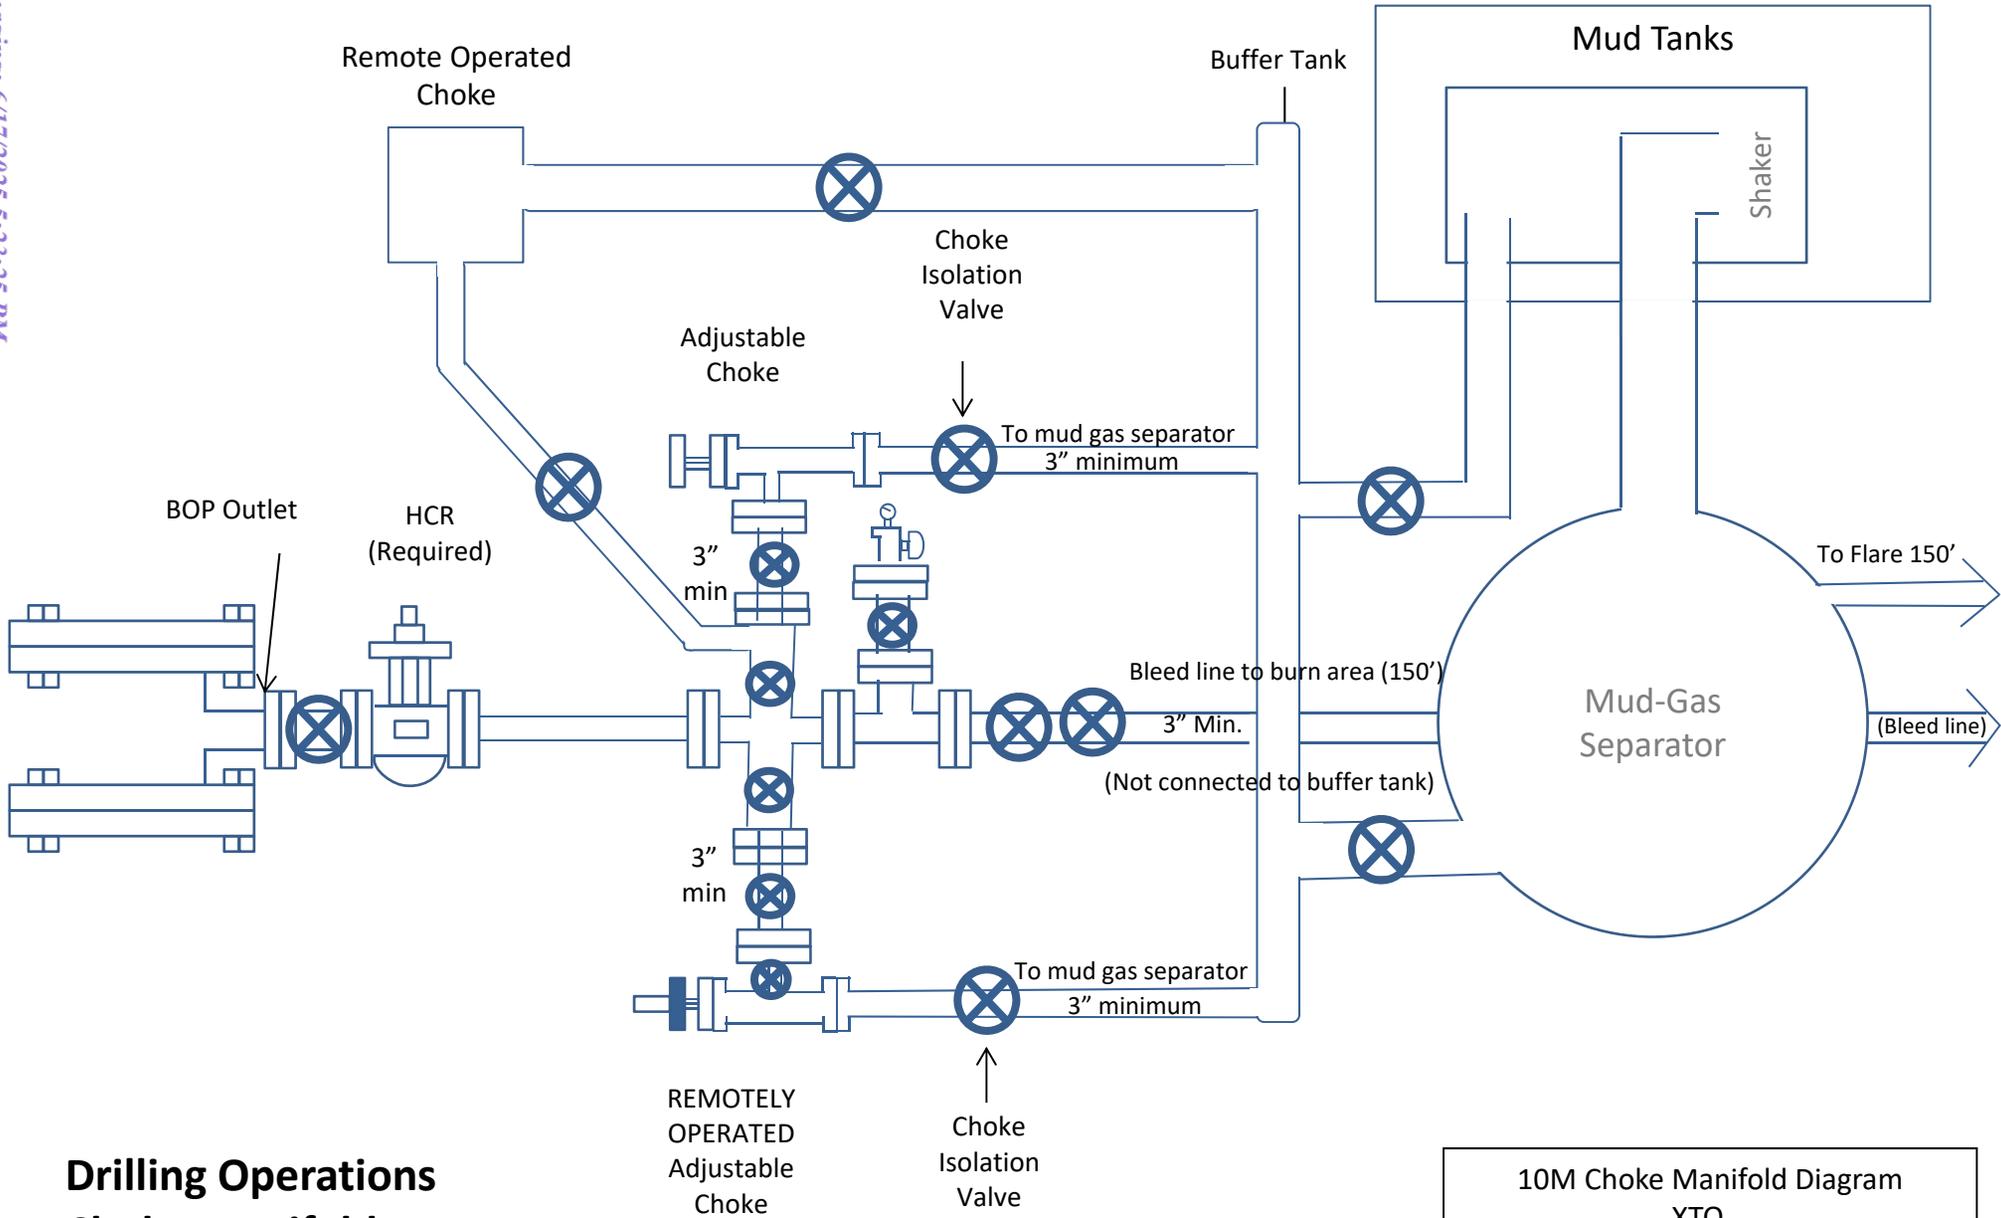

Drilling Operations
Choke Manifold
10M Service

10M Choke Manifold Diagram
 XTO



TenarisHydril Wedge 511



Coupling	Pipe Body
Grade: P110-ICY	Grade: P110-ICY
Body: White	1st Band: White
1st Band: Pale Green	2nd Band: Pale Green
2nd Band: -	3rd Band: Pale Green
3rd Band: -	4th Band: -
	5th Band: -
	6th Band: -

Outside Diameter	7.625 in.	Wall Thickness	0.375 in.	Grade	P110-ICY
Min. Wall Thickness	90.00 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	REGULAR				

Pipe Body Data

Geometry				Performance	
Nominal OD	7.625 in.	Wall Thickness	0.375 in.	Body Yield Strength	1068 x1000 lb
Nominal Weight	29.70 lb/ft	Plain End Weight	29.06 lb/ft	Min. Internal Yield Pressure	11,070 psi
Drift	6.750 in.	OD Tolerance	API	SMYS	125,000 psi
Nominal ID	6.875 in.			Collapse Pressure	7360 psi

Connection Data

Geometry		Performance		Make-Up Torques	
Connection OD	7.625 in.	Tension Efficiency	61.10 %	Minimum	5900 ft-lb
Connection ID	6.787 in.	Joint Yield Strength	653 x1000 lb	Optimum	7100 ft-lb
Make-up Loss	3.704 in.	Internal Pressure Capacity	11,070 psi	Maximum	10,300 ft-lb
Threads per inch	3.28	Compression Efficiency	73.80 %		
Connection OD Option	Regular	Compression Strength	788 x1000 lb	Operation Limit Torques	
		Max. Allowable Bending	45.83 °/100 ft	Operating Torque	55,000 ft-lb
		External Pressure Capacity	7360 psi	Yield Torque	82,000 ft-lb

Notes

For the latest performance data, always visit our website: www.tenaris.com
 For further information on concepts indicated in this datasheet, download the Datasheet Manual from www.tenaris.com

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any—provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. ©Tenaris 2025. All rights reserved.



TenarisHydril Wedge 511



Coupling	Pipe Body
Grade: L80-IC	Grade: L80-IC
Body: Red	1st Band: Red
1st Band: Brown	2nd Band: Brown
2nd Band: -	3rd Band: Pale Green
3rd Band: -	4th Band: -
	5th Band: -
	6th Band: -

Outside Diameter	7.625 in.	Wall Thickness	0.375 in.	Grade	L80-IC
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	REGULAR				

Pipe Body Data

Geometry				Performance	
Nominal OD	7.625 in.	Wall Thickness	0.375 in.	Body Yield Strength	683 x1000 lb
Nominal Weight	29.70 lb/ft	Plain End Weight	29.06 lb/ft	Min. Internal Yield Pressure	6890 psi
Drift	6.750 in.	OD Tolerance	API	SMYS	80,000 psi
Nominal ID	6.875 in.			Collapse Pressure	5900 psi

Connection Data

Geometry		Performance		Make-Up Torques	
Connection OD	7.625 in.	Tension Efficiency	61.10 %	Minimum	5900 ft-lb
Connection ID	6.787 in.	Joint Yield Strength	417 x1000 lb	Optimum	7100 ft-lb
Make-up Loss	3.704 in.	Internal Pressure Capacity	6890 psi	Maximum	10,300 ft-lb
Threads per inch	3.28	Compression Efficiency	73.80 %		
Connection OD Option	Regular	Compression Strength	504 x1000 lb	Operation Limit Torques	
		Max. Allowable Bending	29.33 °/100 ft	Operating Torque	35,000 ft-lb
		External Pressure Capacity	5900 psi	Yield Torque	52,000 ft-lb

Notes

For the latest performance data, always visit our website: www.tenaris.com
 For further information on concepts indicated in this datasheet, download the Datasheet Manual from www.tenaris.com

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any—provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. ©Tenaris 2024. All rights reserved.



TPN™



Coupling	Pipe Body
Grade: P110-CY	Grade: P110-CY
Body: White	1st Band: White
1st Band: Grey	2nd Band: Grey
2nd Band: -	3rd Band: -
3rd Band: -	4th Band: -
	5th Band: -
	6th Band: -

Outside Diameter	5.500 in.	Wall Thickness	0.361 in.	Grade	P110-CY
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	REGULAR				

Pipe Body Data

Geometry				Performance	
Nominal OD	5.500 in.	Wall Thickness	0.361 in.	Body Yield Strength	641 x1000 lb
Nominal Weight	20.00 lb/ft	Plain End Weight	19.83 lb/ft	Min. Internal Yield Pressure	12,640 psi
Drift	4.653 in.	OD Tolerance	API	SMYS	110,000 psi
Nominal ID	4.778 in.			Collapse Pressure	11,100 psi

Connection Data

Geometry		Performance		Make-Up Torques	
Connection OD	6.300 in.	Tension Efficiency	100 %	Minimum	13,860 ft-lb
Coupling Length	8.408 in.	Joint Yield Strength	641 x1000 lb	Optimum	15,400 ft-lb
Connection ID	4.778 in.	Internal Pressure Capacity	12,640 psi	Maximum	16,940 ft-lb
Make-up Loss	4.204 in.	Compression Efficiency	100 %		
Threads per inch	5	Compression Strength	641 x1000 lb	Operation Limit Torques	
Connection OD Option	Regular	Max. Allowable Bending	92 °/100 ft	Operating Torque	26,350 ft-lb
		External Pressure Capacity	11,100 psi	Yield Torque	29,300 ft-lb

Notes

For the latest performance data, always visit our website: www.tenaris.com
 For further information on concepts indicated in this datasheet, download the Datasheet Manual from www.tenaris.com

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any—provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. ©Tenaris 2023. All rights reserved.

PI/CIII



TenarisHydril Wedge 441®



Coupling	Pipe Body
Grade: P110-ICY	Grade: P110-ICY
Body: White	1st Band: White
1st Band: Pale Green	2nd Band: Pale Green
2nd Band: -	3rd Band: Pale Green
3rd Band: -	4th Band: -
	5th Band: -
	6th Band: -

Outside Diameter	5.500 in.	Wall Thickness	0.361 in.	Grade	P110-ICY
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	REGULAR				

Pipe Body Data

Geometry				Performance	
Nominal OD	5.500 in.	Wall Thickness	0.361 in.	Body Yield Strength	729 x1000 lb
Nominal Weight	20.00 lb/ft	Plain End Weight	19.83 lb/ft	Min. Internal Yield Pressure	14,360 psi
Drift	4.653 in.	OD Tolerance	API	SMYS	125,000 psi
Nominal ID	4.778 in.			Collapse Pressure	12,300 psi

Connection Data


Geometry		Performance		Make-Up Torques	
Connection OD	5.852 in.	Tension Efficiency	81.50 %	Minimum	15,000 ft-lb
Coupling Length	8.714 in.	Joint Yield Strength	594 x1000 lb	Optimum	16,000 ft-lb
Connection ID	4.778 in.	Internal Pressure Capacity	14,360 psi	Maximum	19,200 ft-lb
Make-up Loss	3.780 in.	Compression Efficiency	81.50 %		
Threads per inch	3.40	Compression Strength	594 x1000 lb	Operation Limit Torques	
Connection OD Option	Regular	Max. Allowable Bending	84.76 °/100 ft	Operating Torque	36,000 ft-lb
		External Pressure Capacity	12,300 psi	Yield Torque	42,000 ft-lb
				Buck-On	
				Minimum	19,200 ft-lb
				Maximum	20,700 ft-lb

Notes

This connection is fully interchangeable with:
 Wedge 441® - 5.5 in. - 0.304 (17.00) in. (lb/ft)
 Wedge 461® - 5.5 in. - 0.304 (17.00) / 0.361 (20.00) / 0.415 (23.00) in. (lb/ft)
 Connections with Dopeless® Technology are fully compatible with the same connection in its doped version

For the latest performance data, always visit our website: www.tenaris.com
 For further information on concepts indicated in this datasheet, download the Datasheet Manual from www.tenaris.com

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information –if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. ©Tenaris 2025. All rights reserved.

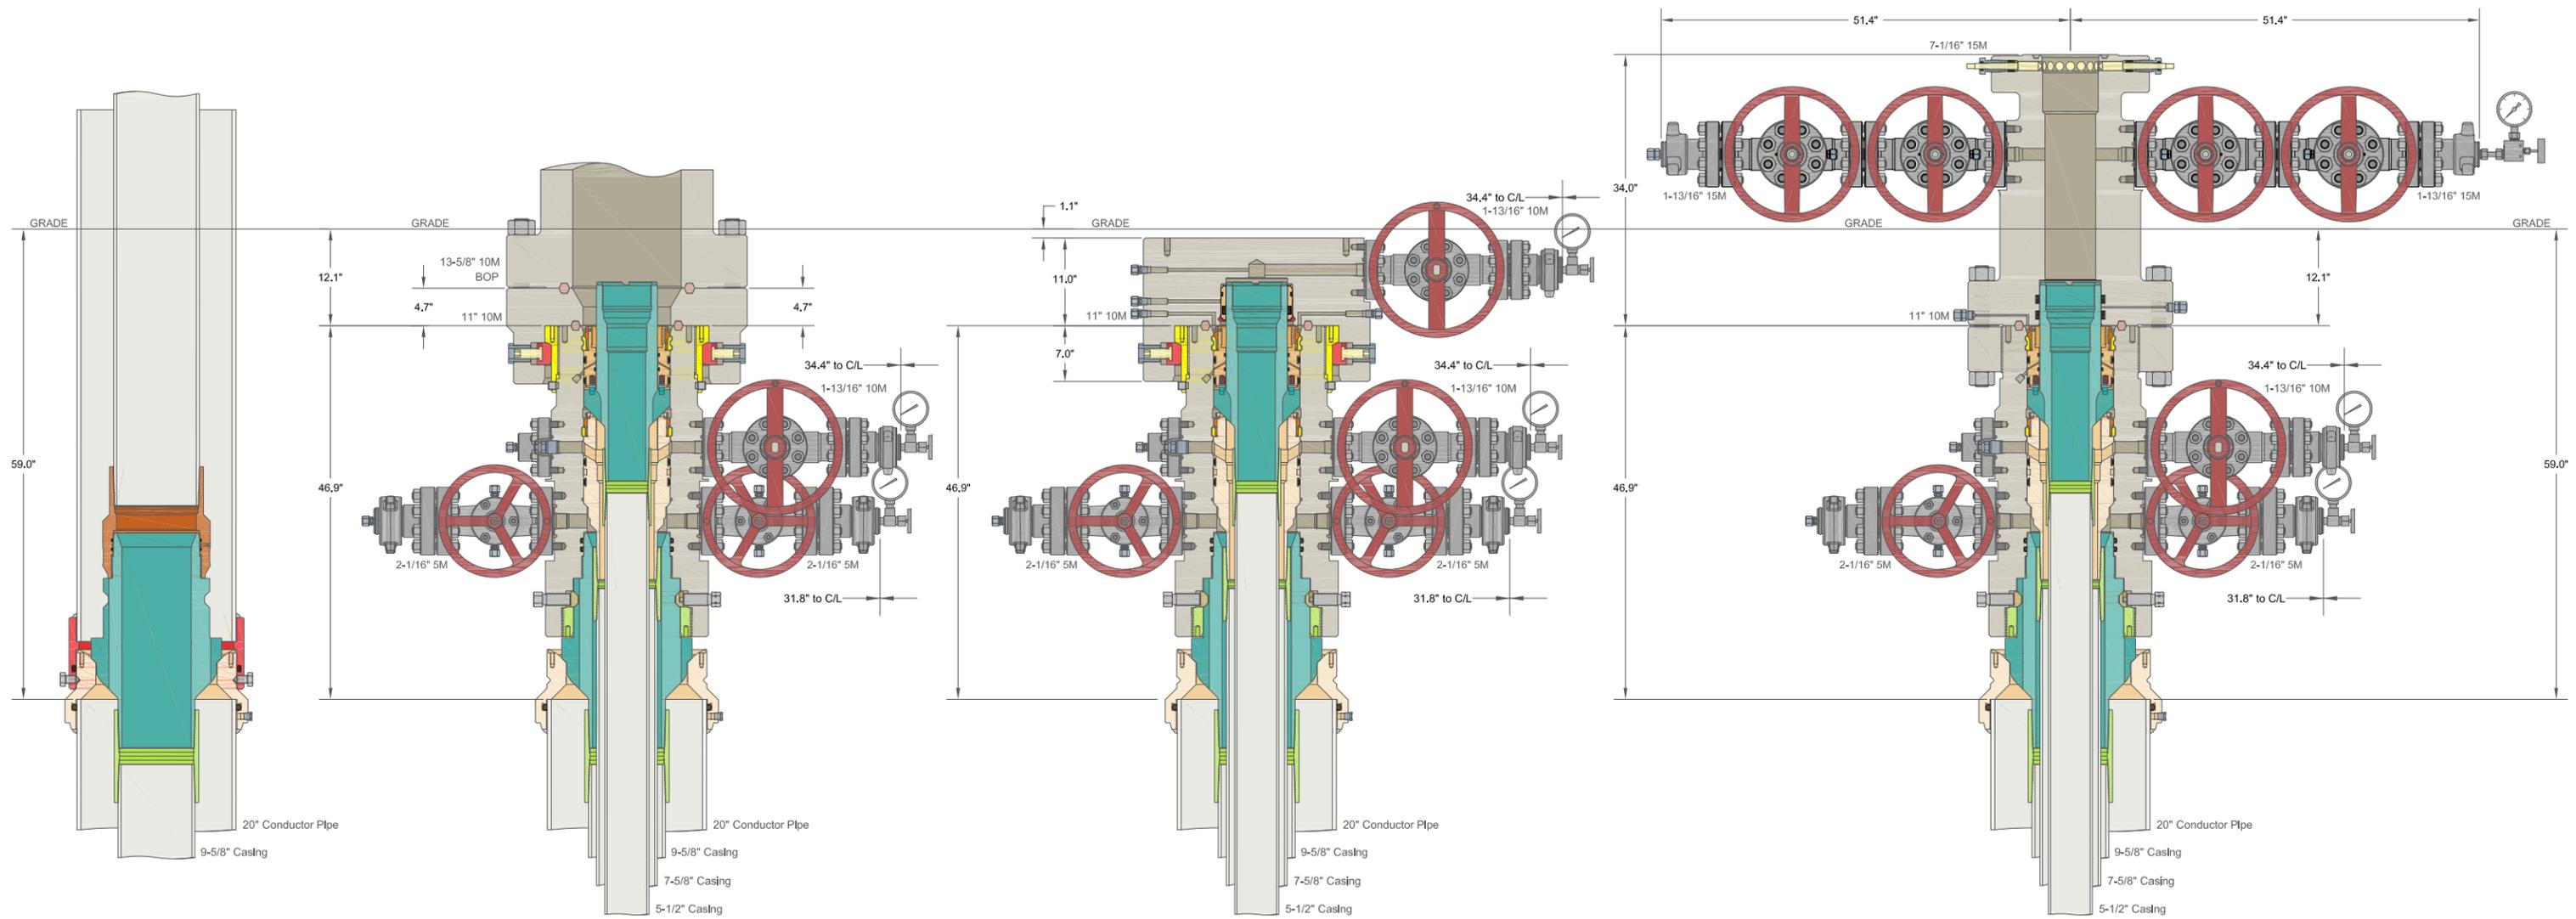

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

CACTUS WELLHEAD LLC		ALL DIMENSIONS APPROXIMATE	
20" x 9-5/8" x 7-5/8" x 5-1/2" MBU-T-CFL-R-DBLO Wellhead With 11" 10M x 7-1/16" 15M CTH-DBLHPS Tubing Head And 9-5/8", 7-5/8" & 5-1/2" Pin Bottom Mandrel Casing Hangers		XTO ENERGY INC DELAWARE BASIN	
DRAWN	VJK	31MAR22	
APPRV			
DRAWING NO.		HBE0000479	

XTO respectfully requests approval to utilize a spudder rig to pre-set surface casing.

Description of Operations:

1. Spudder rig will move in to drill the surface hole and pre-set surface casing on the well.
 - a. After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
 - b. The spudder rig will utilize fresh water-based mud to drill the surface hole to TD. Solids control will be handled entirely on a closed loop basis. No earth pits will be used.
2. The wellhead will be installed and tested as soon as the surface casing is cut off and WOC time has been reached.
3. A blind flange at the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with needle valves installed on two wing valves.
 - a. A means for intervention will be maintained while the drilling rig is not over the well.
4. Spudder rig operations are expected to take 2-3 days per well on the pad.
5. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
6. Drilling Operations will begin with a larger rig and a BOP stack equal to or greater than the pressure rating that was permitted will be nipped up and tested on the wellhead before drilling operations resume on each well.
 - a. The larger rig will move back onto the location within 90 days from the point at which the wells are secured and the spudder rig is moved off location.
 - b. The BLM will be notified 24 hours before the larger rig moves back on the pre-set locations
7. XTO will have supervision on the rig to ensure compliance with all BLM and NMOCD regulations and to oversee operations.
8. Once the rig is removed, XTO will secure the wellhead area by placing a guard rail around the cellar area.

Subject: Request for a Variance Allowing break Testing of the Blowout Preventer Equipment (BOPE)

XTO Energy requests a variance to ONLY test broken pressure seals on the BOPE and function test BOP when skidding a drilling rig between multiple wells on a pad.

Background

Onshore Oil and Gas Order CFR Title 43 Part 3170, Drilling Operations, Sections III.A.2.i.iv.B states that the BOP test must be performed whenever any seal subject to test pressure is broken. The current interpretation of the Bureau of Land Management (BLM) requires a complete BOP test and not just a test of the affected component. CFR Title 43 Part 3170 states, "Some situation may exist either on a well-by-well basis or field-wide basis whereby it is commonly accepted practice to vary a particular minimum standard(s) established in this order. This situation can be resolved by requesting a variance...". XTO Energy feels the break testing the BOPE is such a situation. Therefore, as per CFR Title 43 Part 3170, XTO Energy submits this request for the variance.

Supporting Documentation

CFR Title 43 Part 3170 became effective on December 19, 1988 and has remained the standard for regulating BLM onshore drilling operations for over 30 years. During this time there have been significant changes in drilling technology. BLM continues to use the variance request process to allow for the use of modern technology and acceptable engineering practices that have arisen since CFR Title 43 Part 3170 was originally released. The XTO Energy drilling rig fleet has many modern upgrades that allow the intact BOP stack to be moved between well slots on a multi-well pad, as well as, wellhead designs that incorporate quick connects facilitating release of the BOP from the wellhead without breaking any BOP stack components apart. These technologies have been used extensively offshore, and other regulators, API, and many operators around the world have endorsed break testing as safe and reliable.

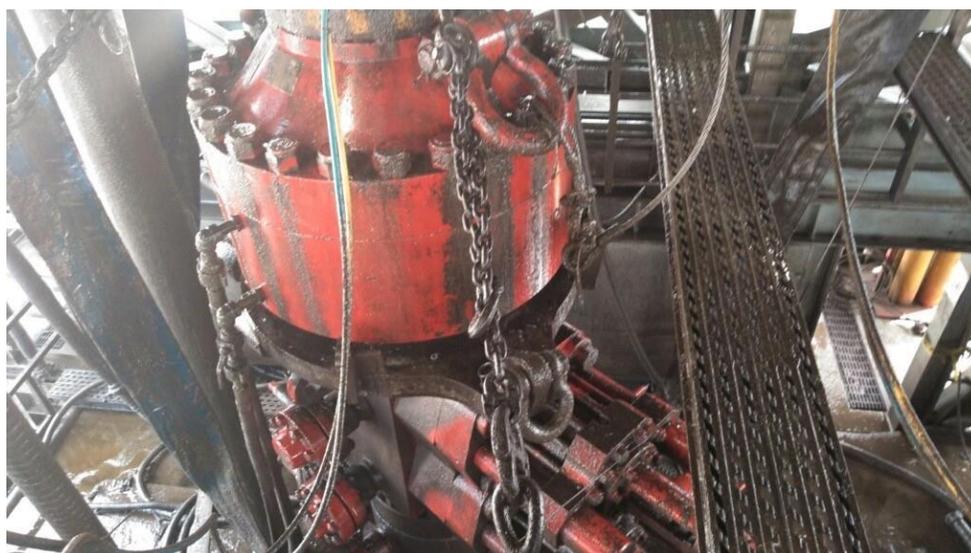


Figure 1: Winch System attached to BOP Stack

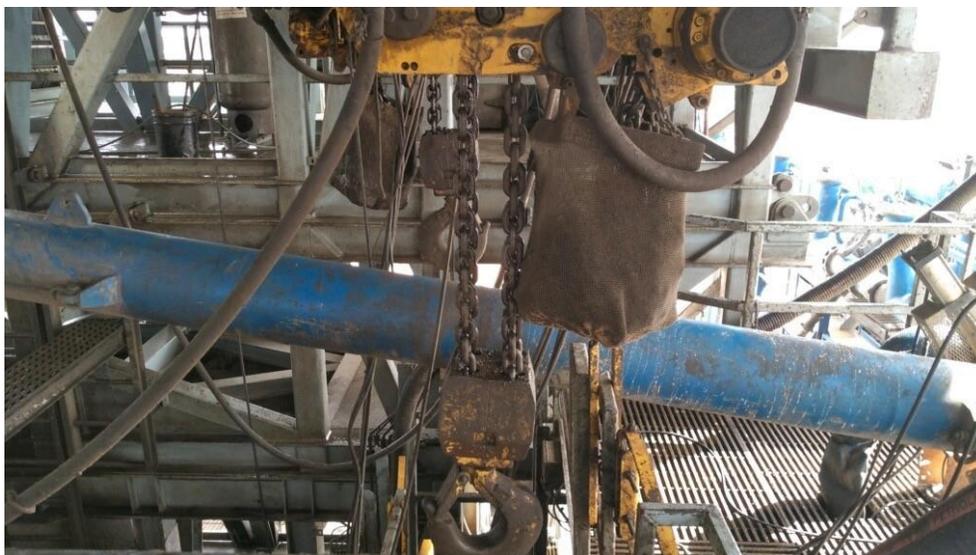


Figure 2: BOP Winch System

American Petroleum Institute (API) standards, specification and recommended practices are considered the industry standard and are consistently utilized and referenced by the industry. CFR Title 43 Part 3170 recognizes API recommended Practices (RP) 53 in its original development. API Standard 53, *Well Control Equipment Systems for Drilling Wells* (Fifth Edition, December 2018, Annex C, Table C.4) recognizes break testing as an acceptable practice. Specifically, API Standard 53, Section 5.3.7.1 states “A pressure test of the pressure containing component shall be performed following the disconnection or repair, limited to the affected component.” See Table C.4 below for reference.

API STANDARD 53			
Table C.4—Initial Pressure Testing, Surface BOP Stacks			
Component to be Pressure Tested	Pressure Test—Low Pressure ^{3c} psig (MPa)	Pressure Test—High Pressure ^{3c}	
		Change Out of Component, Elastomer, or Ring Gasket	No Change Out of Component, Elastomer, or Ring Gasket
Annular preventer ^b	250 to 350 (1.72 to 2.41)	RWP of annular preventer	MASP or 70% annular RWP, whichever is lower.
Fixed pipe, variable bore, blind, and BSR preventers ^{3d}	250 to 350 (1.72 to 2.41)	RWP of ram preventer or wellhead system, whichever is lower	ITP
Choke and kill line and BOP side outlet valves below ram preventers (both sides)	250 to 350 (1.72 to 2.41)	RWP of side outlet valve or wellhead system, whichever is lower	ITP
Choke manifold—upstream of chokes ^e	250 to 350 (1.72 to 2.41)	RWP of ram preventers or wellhead system, whichever is lower	ITP
Choke manifold—downstream of chokes ^e	250 to 350 (1.72 to 2.41)	RWP of valve(s), line(s), or MASP for the well program, whichever is lower	
Kelly, kelly valves, drill pipe safety valves, IBOPs	250 to 350 (1.72 to 2.41)	MASP for the well program	
³ Pressure test evaluation periods shall be a minimum of five minutes. No visible leaks. The pressure shall remain stable during the evaluation period. The pressure shall not decrease below the intended test pressure. ^b Annular(s) and VBR(s) shall be pressure tested on the largest and smallest OD drill pipe to be used in well program. ^c For pad drilling operations, moving from one wellhead to another within the 21 days, pressure testing is required for pressure-containing and pressure-controlling connections when the integrity of a pressure seal is broken. ^d For surface offshore operations, the ram BOPs shall be pressure tested with the ram locks engaged and the closing and locking pressure vented during the initial test. For land operations, the ram BOPs shall be pressure tested with the ram locks engaged and the closing and locking pressure vented at commissioning and annually. ^e Adjustable chokes are not required to be full sealing devices. Pressure testing against a closed choke is not required.			

The Bureau of Safety and Environmental Enforcement (BSEE), Department of Interior, has also utilized the API standards, specification and best practices in the development of its offshore oil and gas regulations and incorporates them by reference within its regulations.

Break testing has been approved by the BLM in the past with other operators based on the detailed information provided in this document.


XTO Energy feels break testing and our current procedures meet the intent of CFR Title 43 Part 317 0and often exceed it. There has been no evidence that break testing results in more components failing than seen on full BOP tests. XTO Energy's internal standards requires complete BOPE tests more often than that of CFR Title 43 Part 3170 (Every 21 days). In addition to function testing the annular, pipe rams and blind rams after each BOP nipple up, XTO Energy performs a choke drill with the rig crew prior to drilling out every casing shoe. This is additional training for the rig crew that exceeds the requirements of the CFR Title 43 Part 3170.

Procedures

1. XTO Energy will use this document for our break testing plan for New Mexico Delaware basin. The summary below will be referenced in the APD or Sundry Notice and receive approval prior to implementing this variance.
2. XTO Energy will perform BOP break testing on multi-wells pads where multiple intermediate sections can be drilled and cased within the 21-day BOP test window.
 - a. A full BOP test will be conducted on the first well on the pad.
 - b. The first intermediate hole section drilled on the pad will be the deepest. All of the remaining hole sections will be the same depth or shallower.
 - i. Our Lower WC targets set the intermediate casing shoe no deeper than the Wolfcamp B.
 - ii. Our Upper WC targets set the intermediate casing shoe shallower than the Wolfcamp B.
 - c. A Full BOP test will be required if the intermediate hole section being drilled has a MASP over 5M.
 - d. A full BOP test will be required prior to drilling any production hole.
3. After performing a complete BOP test on the first well, the intermediate hole section will be drilled and cased, two breaks would be made on the BOP equipment.
 - a. Between the HCV valve and choke line connection
 - b. Between the BOP quick connect and the wellhead
4. The BOP is then lifted and removed from the wellhead by a hydraulic system.
5. After skidding to the next well, the BOP is moved to the wellhead by the same hydraulic system and installed.
6. The connections mentioned in 3a and 3b will then be reconnected.
7. Install test plug into the wellhead using test joint or drill pipe.
8. A shell test is performed against the upper pipe rams testing the two breaks.
9. The shell test will consist of a 250 psi low test and a high test to the value submitted in the APD or Sundry (e.g. 5,000 psi or 10,000psi).
10. Function test will be performed on the following components: lower pipe rams, blind rams, and annular.

11. For a multi-well pad the same two breaks on the BOP would be made and on the next wells and steps 4 through 10 would be repeated.
12. A second break test would only be done if the intermediate hole section being drilled could not be completed within the 21 day BOP test window.

Note: Picture below highlights BOP components that will be tested during batch operations

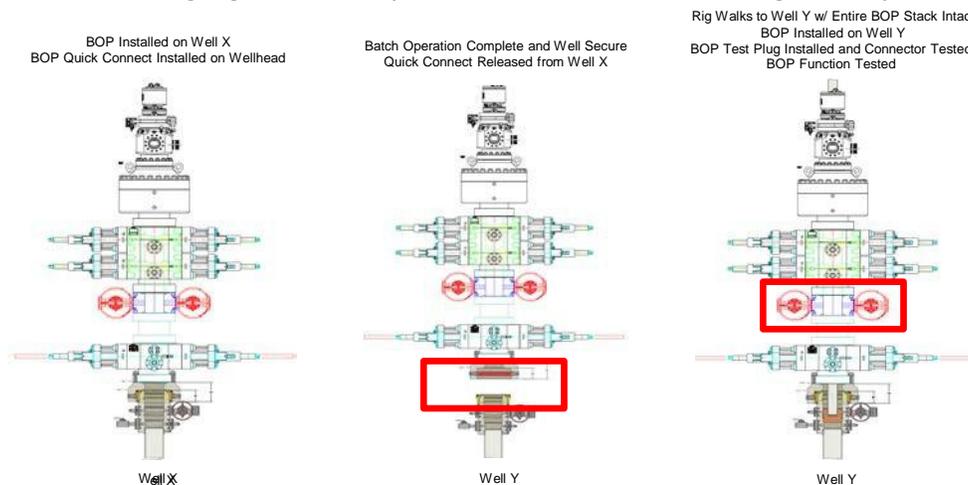

Summary

A variance is requested to **ONLY** test broken pressure seals on the BOP equipment when moving from wellhead to wellhead which is in compliance with API Standard 53. API Standard 53 states, that for pad drilling operation, moving from one wellhead to another within 21 days, pressure testing is required for pressure-containing and pressure-controlling connections when the integrity of a pressure seal is broken.


The BOP will be secured by a hydraulic carrier or cradle. The BLM will be contacted if a Well Control event occurs prior to the commencement of a BOPE Break Testing operation.

Based on discussions with the BLM on February 27th 2020 and the supporting documentation submitted to the BLM, we will request permission to **ONLY** retest broken pressure seals if the following conditions are met:

1. After a full BOP test is conducted on the first well on the pad.
2. The first intermediate hole section drilled on the pad will be the deepest. All of the remaining hole sections will be the same depth or shallower.
3. Full BOP test will be required if the intermediate hole section being drilled has a MASP over 5M.
4. Full BOP test will be required prior to drilling the production hole.

Only **ONE** test will occur during each break test procedure.

All valves in red including the upper pipe rams will be shut to test the broken connections.
** Each valve on choke manifold will alternate being tested against during each skid.

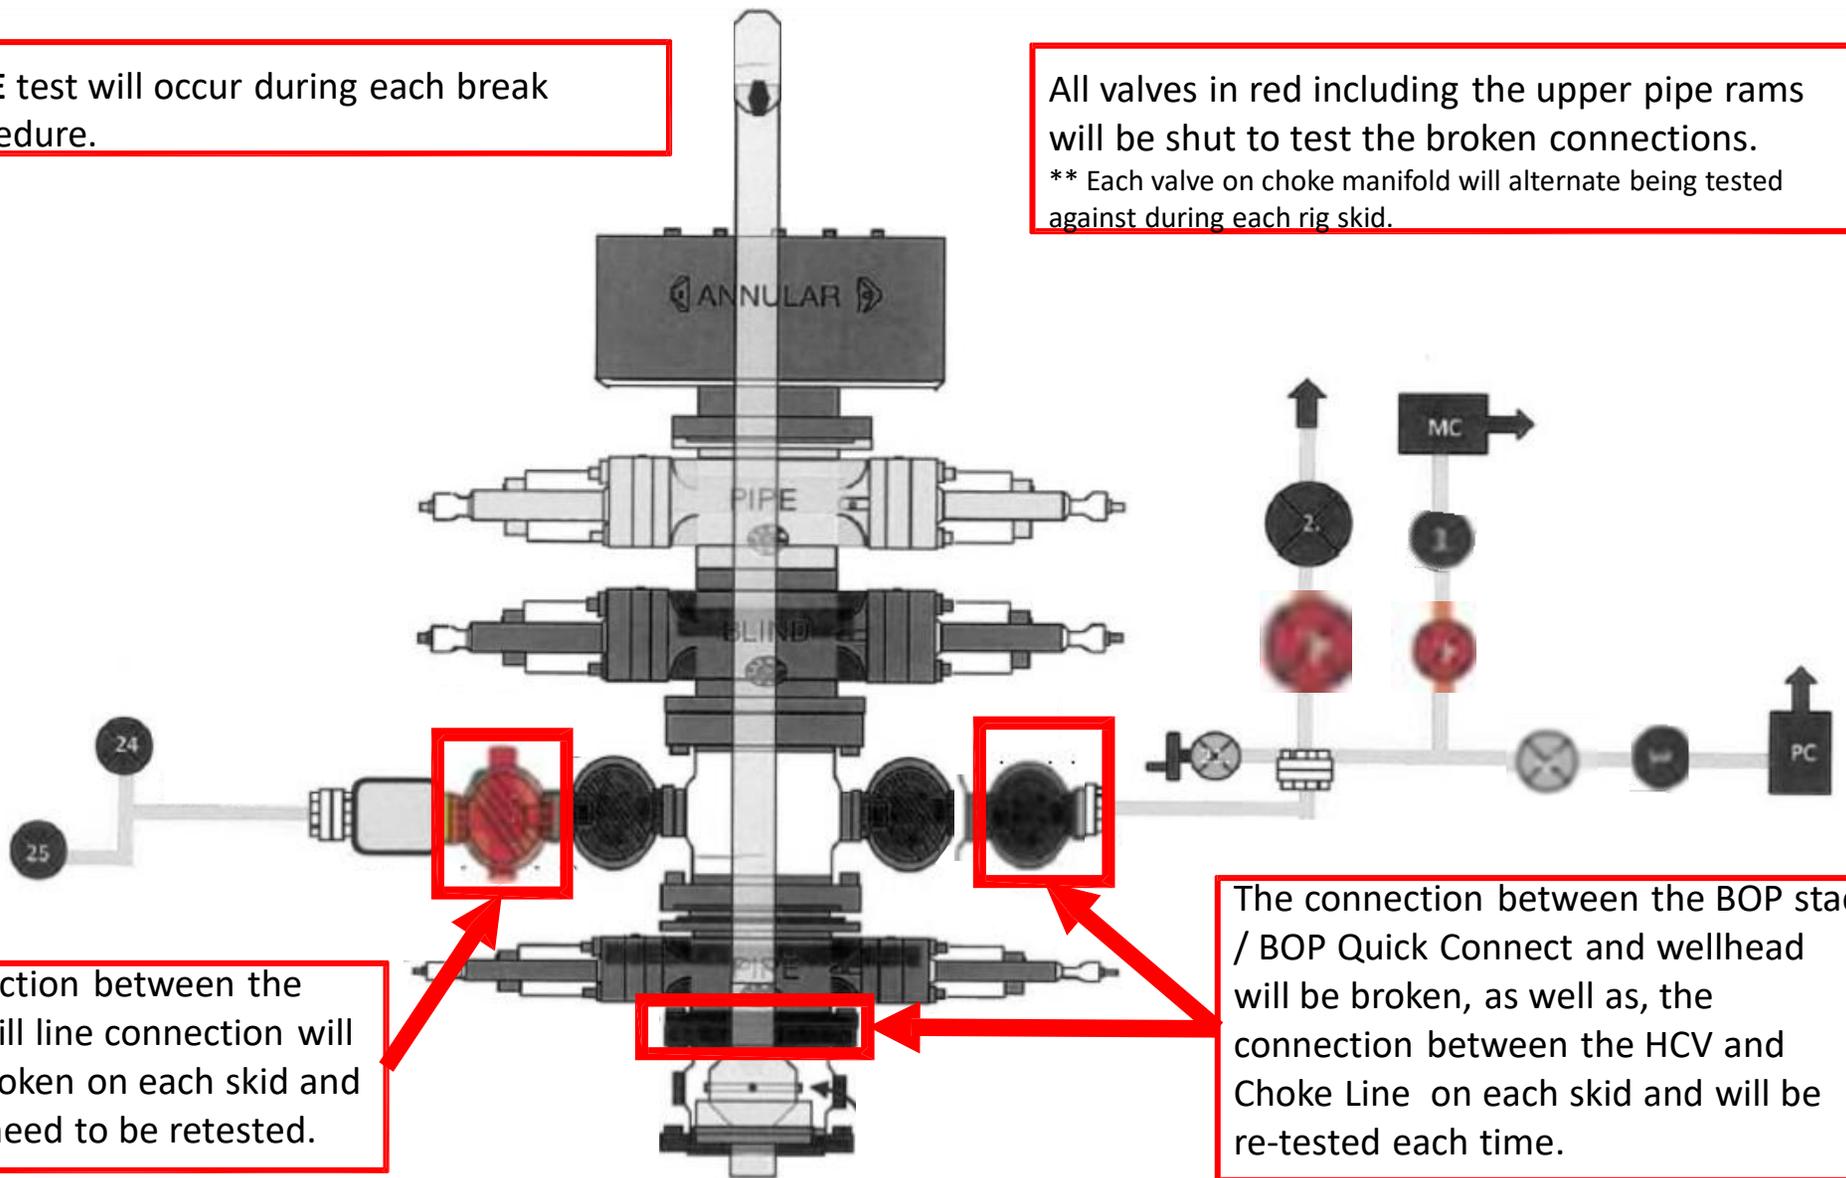

The connection between the HCV and kill line connection will **NOT** be broken on each skid and does not need to be retested.

The connection between the BOP stack / BOP Quick Connect and wellhead will be broken, as well as, the connection between the HCV and Choke Line on each skid and will be re-tested each time.



BLACK GOLD®

GATES ENGINEERING & SERVICES NORTH AMERICA
7603 Prairie Oak Dr.
Houston, TX. 77086

PHONE: +1 (281) 602-4100
FAX: +1 (281) 602-4147
EMAIL: gesna.quality@gates.com
WEB: www.gates.com/oilandgas

*NEW CHOKE HOSE
INSTALLED 02-10-2024*

CERTIFICATE OF CONFORMANCE

This is to verify that the items detailed below meet the requirements of the Customer's Purchase Order referenced herein, and are in Conformance with applicable specifications, and that Records of Required Tests are on file and subject to examination. The following items were inspected and hydrostatically tested at **Gates Engineering & Services North America** facilities in Houston, TX, USA.

CUSTOMER:	NABORS DRILLING TECHNOLOGIES USA DBA NABORS DRILLING USA
CUSTOMER P.O.#:	15582803 (TAG NABORS PO #15582803 SN 74621 ASSET 66-1531)
CUSTOMER P/N:	IMR RETEST SN 74621 ASSET #66-1531
PART DESCRIPTION:	RETEST OF CUSTOMER 3" X 45 FT 16C CHOKE & KILL HOSE ASSEMBLY C/W 4 1/16" 10K FLANGES
SALES ORDER #:	529480
QUANTITY:	1
SERIAL #:	74621 H3-012524-1

SIGNATURE: *F. OSMOS*

TITLE: QUALITY ASSURANCE

DATE: 1/25/2024



H3-15/16

1/25/2024 11:48:06 AM

TEST REPORT

CUSTOMER

Company: Nabors Industries Inc.
 Production description: 74621/66-1531
 Sales order #: 529480
 Customer reference: FG1213

TEST OBJECT

Serial number: H3-012524-1
 Lot number:
 Description: 74621/66-1531
 Hose ID: 3" 16C CK
 Part number:


TEST INFORMATION

Test procedure: GTS-04-053
 Test pressure: 15000.00 psi
 Test pressure hold: 3600.00 sec
 Work pressure: 10000.00 psi
 Work pressure hold: 900.00 sec
 Length difference: 0.00 %
 Length difference: 0.00 inch

Fitting 1: 3.0 x 4-1/16 10K
 Part number:
 Description:
 Fitting 2: 3.0 x 4-1/16 10K
 Part number:
 Description:

Visual check:
 Pressure test result: PASS
 Length measurement result: Length: 45 feet

Test operator: Travis

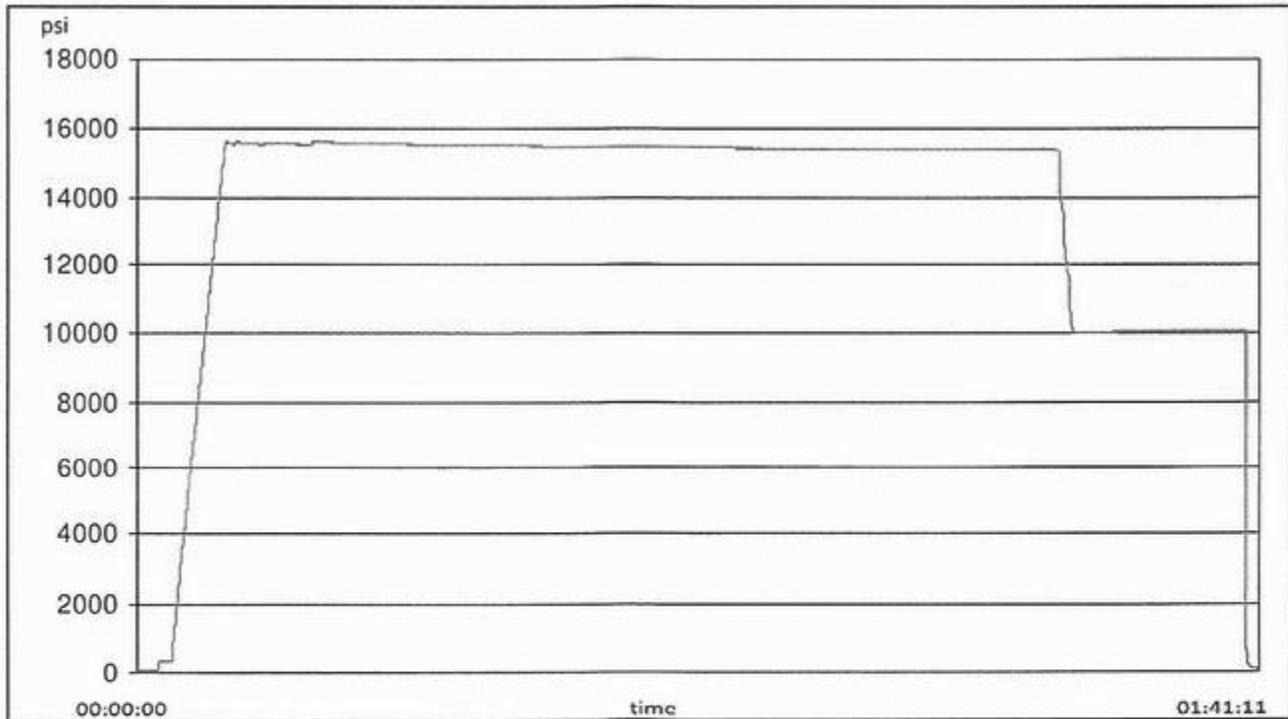



H3-15/16


1/25/2024 11:48:06 AM



TEST REPORT

GAUGE TRACEABILITY

Description	Serial number	Calibration date	Calibration due date
S-25-A-W	110D3PHO	2023-06-06	2024-06-06
S-25-A-W	110IQWDG	2023-05-16	2024-05-16

Comment

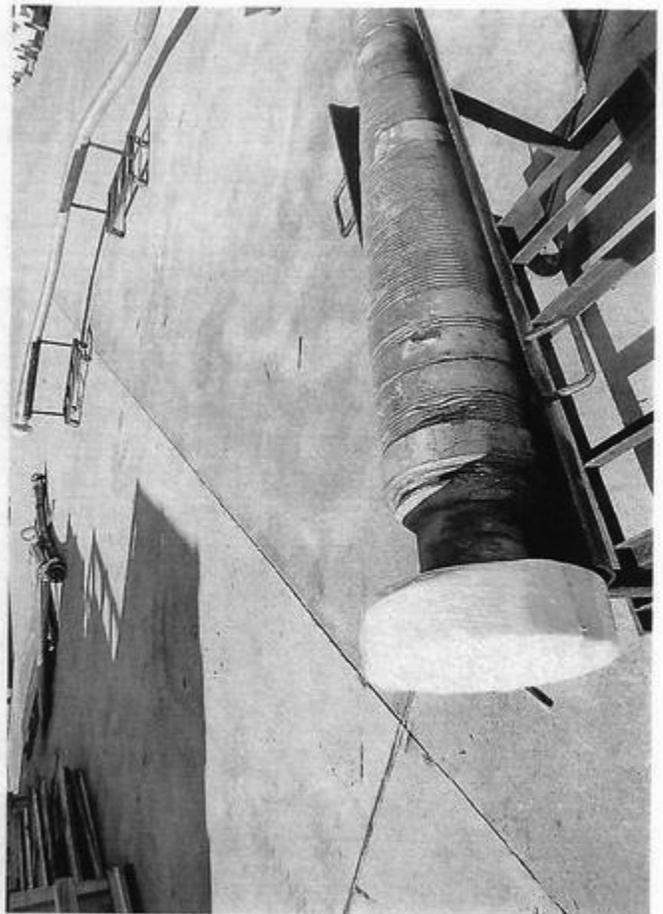

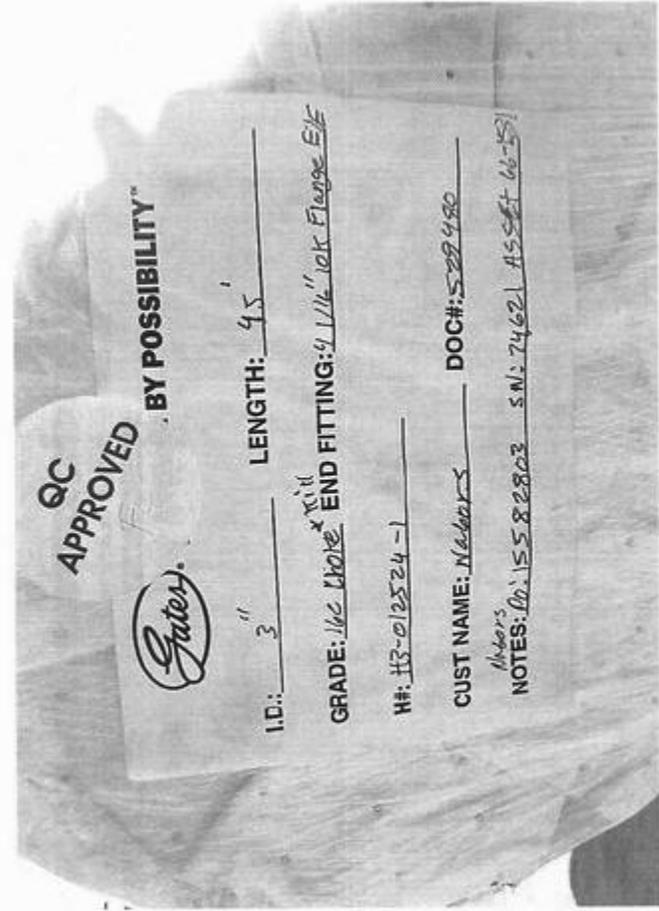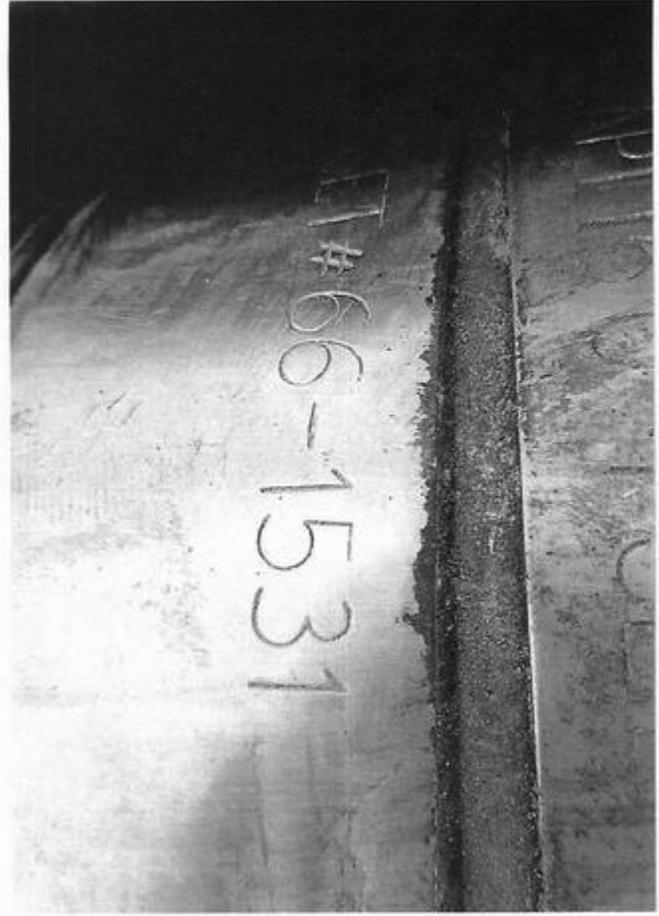

XTO Permian Operating, LLC Offline Cementing Variance Request

XTO requests the option to cement the surface and intermediate casing strings offline as a prudent batch drilling efficiency of acreage development.


1. Cement Program

No changes to the cement program will take place for offline cementing.

2. Offline Cementing Procedure


The operational sequence will be as follows. If a well control event occurs, the BLM will be contacted for approval prior to conducting offline cementing operations.

1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment (float collar and shoe)
2. Land casing with mandrel
3. Fill pipe with kill weight fluid, do not circulate through floats and confirm well is static
4. Set annular packoff shown below and pressure test to confirm integrity of the seal. Pressure ratings of wellhead components and valves is 5,000 psi.
5. After confirmation of both annular barriers and internal barriers, nipple down BOP and install cap flange.
 - a. If any barrier fails to test, the BOP stack will not be nipped down until after the cement job is completed with cement 500ft above the highest formation capable of flow with kill weight mud above or after it has achieved 50-psi compressive strength if kill weight fluid cannot be verified.

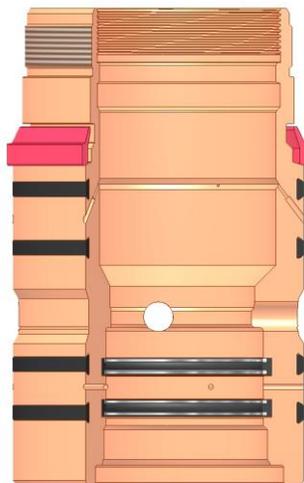

Annular packoff with both external and internal seals


XTO Permian Operating, LLC Offline Cementing Variance Request

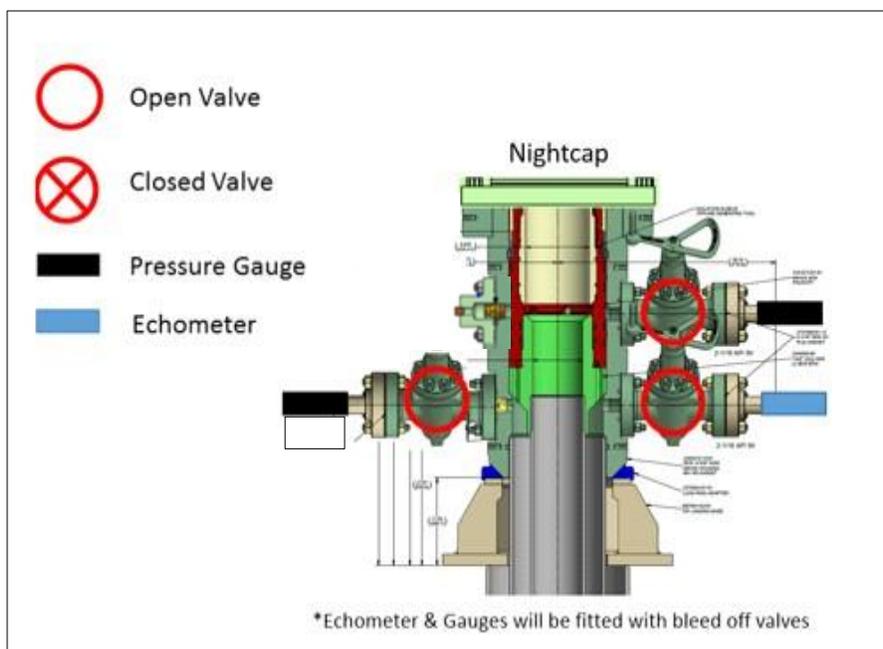

Wellhead diagram during skidding operations

6. Skid rig to next well on pad.
7. Confirm well is static before removing cap flange, flange will not be removed and offline cementing operations will not commence until well is under control. If well is not static, casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing or nipping up for further remediation.
 - a. Well Control Plan
 - i. The Drillers Method will be the primary well control method to regain control of the wellbore prior to cementing, if wellbore conditions do not permit the drillers method other methods of well control may be used
 - ii. Rig pumps or a 3rd party pump will be tied into the upper casing valve to pump down the casing ID
 - iii. A high pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
 - iv. Once influx is circulated out of the hole, kill weight mud will be circulated
 - v. Well will be confirmed static
 - vi. Once confirmed static, cap flange will be removed to allow for offline cementing operations to commence
8. Install offline cement tool
9. Rig up cement equipment

XTO Permian Operating, LLC Offline Cementing Variance Request

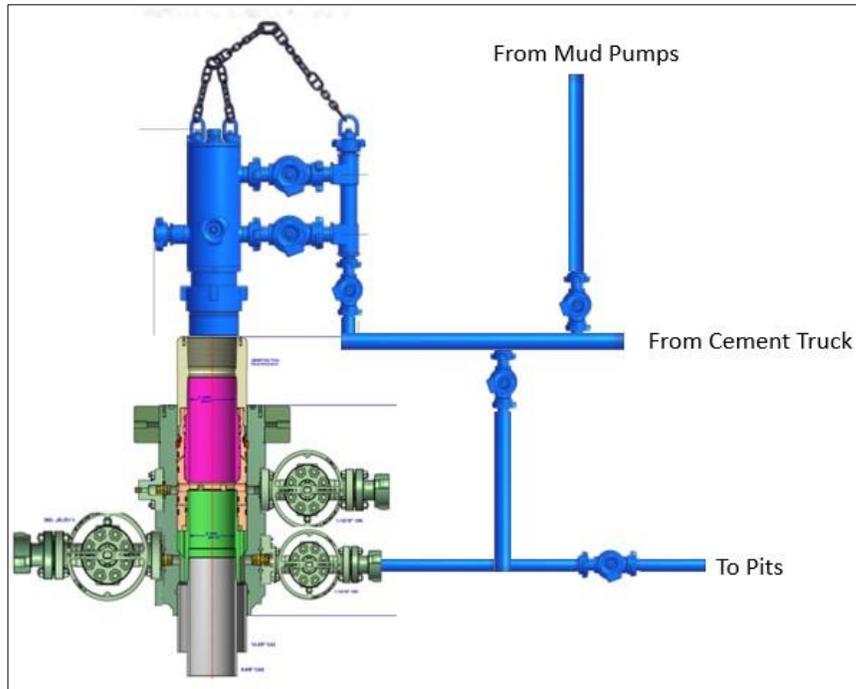

Wellhead diagram during offline cementing operations

10. Circulate bottoms up with cement truck
 - a. If gas is present on bottoms up, well will be shut in and returns rerouted through gas buster to handle entrained gas
 - b. Max anticipated time before circulating with cement truck is 6 hrs
11. Perform cement job taking returns from the annulus wellhead valve
12. Confirm well is static and floats are holding after cement job
13. Remove cement equipment, offline cement tools and install night cap with pressure gauge for monitoring.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 474012

CONDITIONS

Operator: XTO PERMIAN OPERATING LLC. 6401 HOLIDAY HILL ROAD MIDLAND, TX 79707	OGRID: 373075
	Action Number: 474012
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
ward.rikala	Any previous COA's not addressed within the updated COA's still apply.	6/17/2025