

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐  
well well  
2. NAME OF OPERATOR  
Petro Lewis Corporation  
3. ADDRESS OF OPERATOR P. O. Box 2250  
717 17th Street, Denver, CO 80201  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17  
below.) 2036  
AT SURFACE: 2000 FNL & 1000' FWL (SWNW)  
AT TOP PROD. INTERVAL: Same  
AT TOTAL DEPTH: Same


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE,  
REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) Production Casing

SUBSEQUENT REPORT OF:

☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐

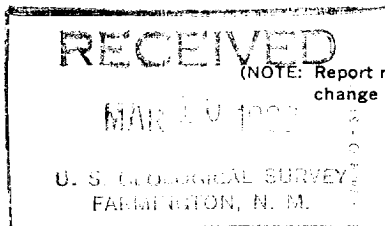

5. LEASE  
SP-080565  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
7. UNIT AGREEMENT NAME  
8. FARM OR LEASE NAME  
Florance  
9. WELL NO.  
800 71  
10. FIELD OR WILDCAT NAME  
Basin Dakota  
11. SEC., T., R., M., OR BLK. AND SURVEY OR  
AREA  
Section 5, T-25N, R-3W  
12. COUNTY OR PARISH  
Rio Arriba  
13. STATE  
New Mexico  
14. API NO.  
30-039-22865  
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
7340 GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates,  
including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and  
measured and true vertical depths for all markers and zones pertinent to this work.)\*

12-24-81: Reached total depth of 8436 feet.

12-25-81: Log with Schlumberger.

12-26-81: Ran the following production casing: 500 feet of 5-1/2" 17#  
K-55, 6845 feet of 5-1/2" 15.5# K-55 and 1087 feet of 5-1/2"  
17# K-55. Casing set at 8432 feet KB. Casing cemented with a  
total of 1075 sx Class B cement. Cemented in three stages:  
First Stage at 8432 feet cemented with 425 sx Class "B" cement;  
Second Stage DV tool at 6496 feet cemented with 225 sx Class B  
cement; Third Stage DV tool at 4506 feet cemented with 425 sx  
Class B cement. Top of the cement is 3000 feet.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_

Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Agent DATE March 5, 1982


(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

NMOCC



ACCEPTED FOR RECORD

MAR 15 1982

FARMINGTON DISTRICT

BY SNH