

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPPLICATE*
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 1004-0135
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐	7. UNIT AGREEMENT NAME
2. NAME OF OPERATOR Amoco Production Company	8. FARM OR LEASE NAME Oso Canyon Federal "B"
3. ADDRESS OF OPERATOR 501 Airport Drive, Farmington, New Mexico 87401	9. WELL NO. 1
10. FIELD AND POOL, OR WILDCAT 1660' FNL x 1840' FWL	11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA SE/NW Sec. 11, T24N, R2W
12. COUNTY OR PARISH Rio Arriba	13. STATE New Mexico
14. PERMIT NO.	15. ELEVATIONS (Show whether DF, RT, GR, etc.) 7275' GR

RECEIVED
DEC 19 1984

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF	☐	WATER SHUT-OFF	☐
FRACTURE TREAT	☐	FRACTURE TREATMENT	☐
SHOOT OR ACIDIZE	☐	SHOOTING OR ACIDIZING	☐
REPAIR WELL	☐	(Other) Spud and Set Casing	☐
(Other)	☐	(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)	

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Spud a 12-1/4" hole on 11-10-84 at 1745 hrs. Drilled to 296'. Set 8-5/8", 24#, K-55 casing at 289' and cemented with 236 cu. ft. Class B Ideal. Circulated cement to surface. Pressure tested casing to 1000 psi. Drilled a 7-7/8" hole to a TD of 8175' on 11-26-84. Set 5-1/2", 17#, K-55 casing at 8175'. Stage 1: cemented with 542 cu. ft. Class B Ideal and tailed in with 389 cu. ft. Class B Ideal. Circulated to surface. Stage 2: cemented with 1,180 cu. ft. Class B Ideal. Ran a temperature survey (attached) which indicated the top of the cement to be 1700'. The DV tool was set at 4996' and the rig was released on 11-27-84.

RECEIVED
JAN 04 1985
OIL CON. DIV.
DIST. 3

18. I hereby certify that the foregoing is true and correct

SIGNED Original Signed By
B. D. Shaw
(This space for Federal or State office use)

TITLE Administrative Supervisor DATE 12-14-84

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE DATE

FARMINGTON RESOURCE AREA
BY smm

*See Instructions on Reverse Side

NMOC



WILSON
SERVICE COMPANY

FORM 432-2

TEMPERATURE SURVEY

COMPANY Amoco Production
WELL 1 LEASE Oso Canyon Federal B
COUNTY Rio Arriba STATE New Mexico
SEC. TWP. RGE.

APPROX. TOP CEMENT 1700'

Survey Begins at 1000' Ft. Ends at 4170' Ft.
Approx. Fill-Up Max. Temp.
Log Measured From KB Run No. 1

Casing Size	Casing Depth	Diam of Hole	Depth
<u>5 1/2"</u> from <u> </u> to <u> </u>		from <u>7 7/8"</u> to <u> </u>	
from <u> </u> to <u> </u>		from <u> </u> to <u> </u>	


Date of Cementing 11/26/84 Time 1:45 PM
Date of Survey 11/26/84 Time 9:00 PM
Amount of Cement As Per Report


Recorded by Mahaffey Witnessed by

REMARKS OR OTHER DATA

By Tool 4999'

TEMPERATURE IN DEGREES FAHRENHEIT

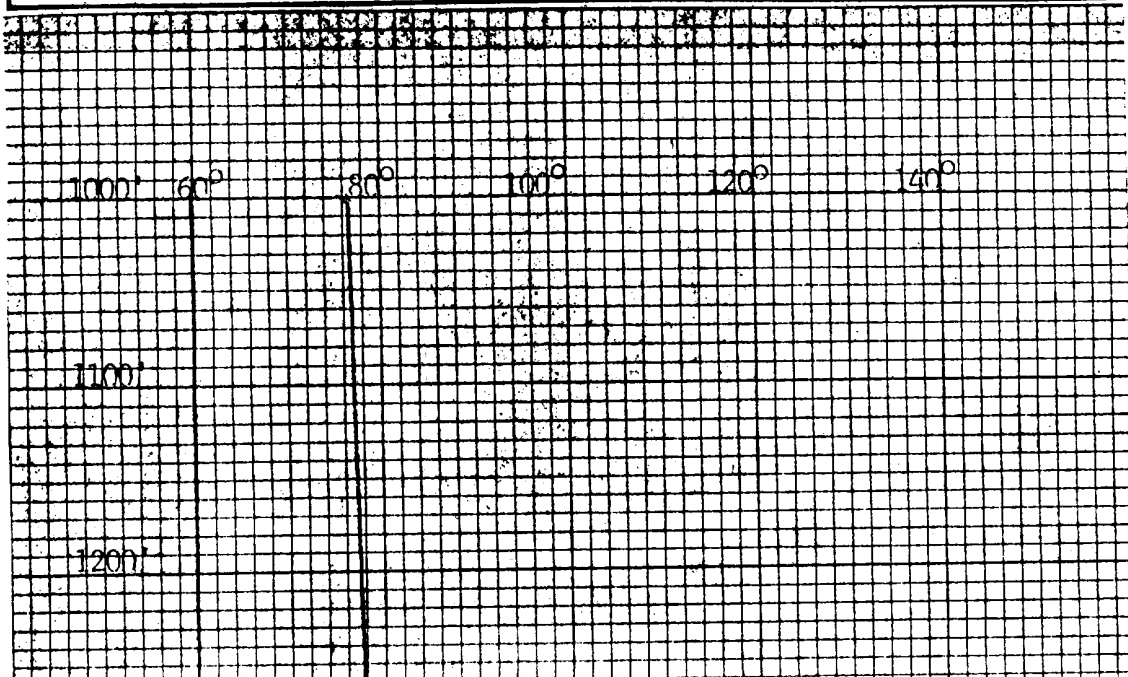

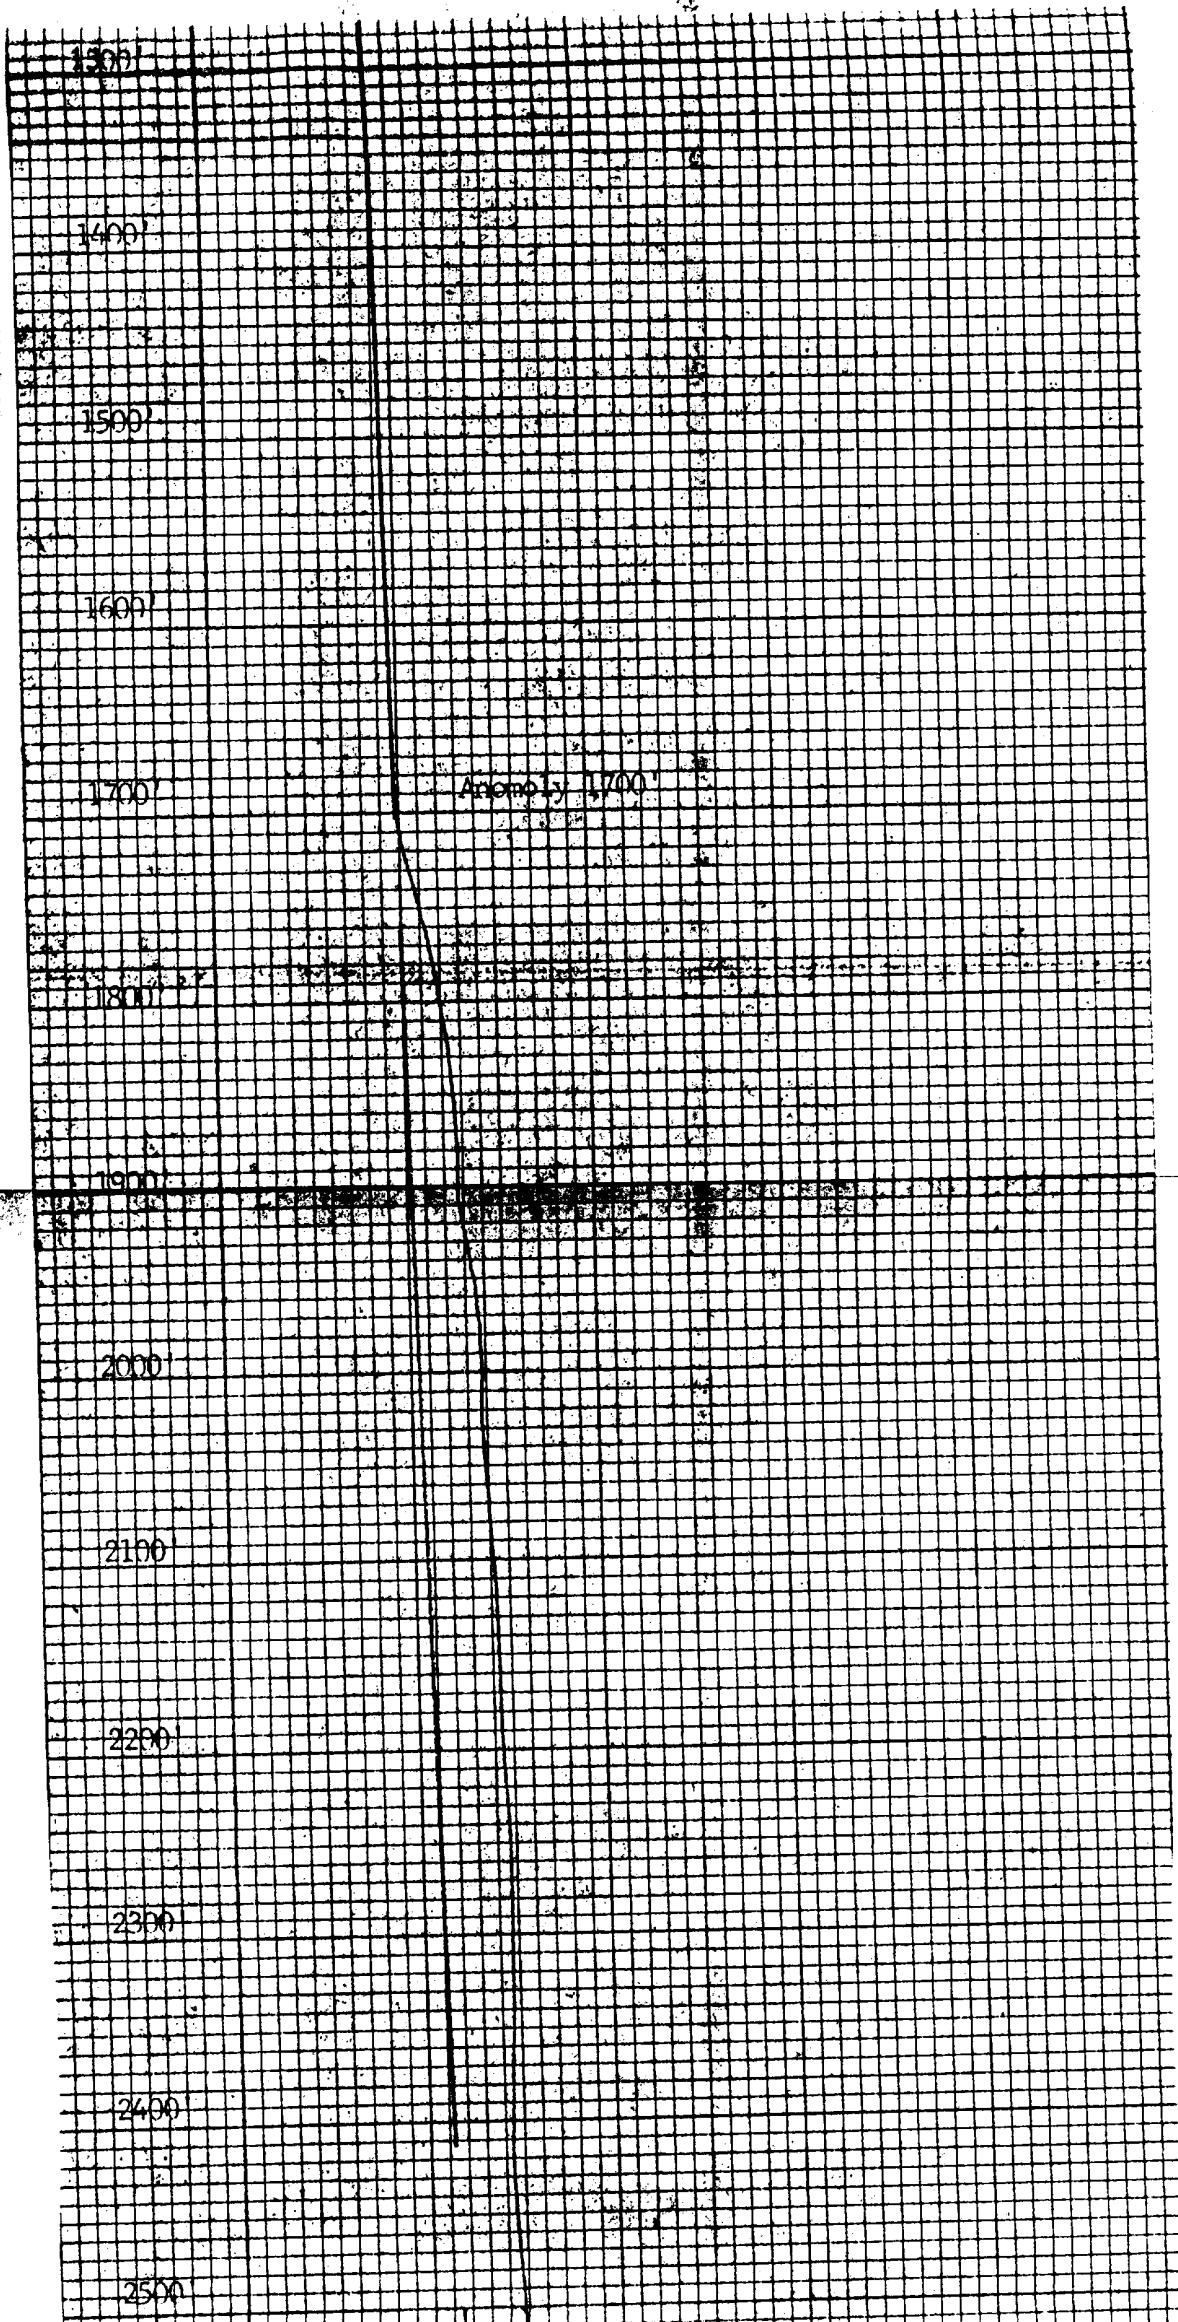

2600'

2700'

2800'

2900'

3000'

3100'

3200'

3300'

3400'

3500'

3600'

3700'

