



U.S. Department of the Interior  
Bureau of Land Management

*Application for Permit to Drill*

**APD Package Report**

Date Printed: 07/15/2025 02:10 PM

|                                        |                                    |
|----------------------------------------|------------------------------------|
| APD ID: 10400097948                    | Well Status: AAPD                  |
| APD Received Date: 04/11/2024 09:18 AM | Well Name: GRACKLE 26 EAST FED COM |
| Operator: EOG RESOURCES INCORPORATED   | Well Number: 502H                  |

APD Package Report Contents

- Form 3160-3
- Operator Certification Report
- Application Report
- Application Attachments
  - Well Plat: 1 file(s)
- Drilling Plan Report
- Drilling Plan Attachments
  - Blowout Prevention Choke Diagram Attachment: 2 file(s)
  - Blowout Prevention BOP Diagram Attachment: 7 file(s)
  - Casing Design Assumptions and Worksheet(s): 3 file(s)
  - Hydrogen sulfide drilling operations plan: 1 file(s)
  - Proposed horizontal/directional/multi-lateral plan submission: 2 file(s)
  - Other Facets: 9 file(s)
  - Other Variances: 8 file(s)
- SUPO Report
- SUPO Attachments
  - Existing Road Map: 1 file(s)
  - New Road Map: 2 file(s)
  - Attach Well map: 1 file(s)
  - Production Facilities map: 11 file(s)
  - Water source and transportation map: 2 file(s)
  - Construction Materials source location attachment: 1 file(s)
  - Well Site Layout Diagram: 4 file(s)
  - Recontouring attachment: 1 file(s)
  - Other SUPO Attachment: 2 file(s)
- PWD Report
- PWD Attachments
  - None

- Bond Report
- Bond Attachments
  - None

Form 3160-3  
(June 2015)FORM APPROVED  
OMB No. 1004-0137  
Expires: January 31, 2018

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
**APPLICATION FOR PERMIT TO DRILL OR REENTER**

|                                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER<br>1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other<br>1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone |  | 5. Lease Serial No.<br><b>NMNM15684</b><br>6. If Indian, Allottee or Tribe Name<br><br>7. If Unit or CA Agreement, Name and No.<br><br>8. Lease Name and Well No.<br><br><b>GRACKLE 26 EAST FED COM</b><br><br><b>502H</b><br>9. API Well No.<br><br><b>30-025-55230</b> |
| 2. Name of Operator<br><b>EOG RESOURCES INCORPORATED</b><br>3a. Address<br><b>1111 BAGBY SKY LOBBY 2, HOUSTON, TX 77002</b><br>3b. Phone No. (include area code)<br><b>(713) 651-7000</b>                                                                                                                                                                                                       |  | 10. Field and Pool, or Exploratory<br><b>RED HILLS/BONE SPRING, NORTH</b><br>11. Sec., T. R. M. or Blk. and Survey or Area<br><b>SEC 26/T24S/R34E/NMP</b>                                                                                                                |
| 4. Location of Well (Report location clearly and in accordance with any State requirements. *)<br>At surface <b>TR P / 876 FSL / 808 FEL / LAT 32.183595 / LONG -103.434825</b><br>At proposed prod. zone <b>TR A / 100 FNL / 1311 FEL / LAT 32.209996 / LONG -103.436442</b>                                                                                                                   |  | 12. County or Parish<br><b>LEA</b><br>13. State<br><b>NM</b>                                                                                                                                                                                                             |
| 14. Distance in miles and direction from nearest town or post office*<br><br>15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>100 feet</b><br>16. No of acres in lease<br><br>17. Spacing Unit dedicated to this well<br><br><b>640.0</b>                                                                               |  | 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>33 feet</b><br>19. Proposed Depth<br><b>10791 feet / 21069 feet</b><br>20. BLM/BIA Bond No. in file<br><b>FED: NM2308</b>                                  |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.)<br><b>3429 feet</b><br>22. Approximate date work will start*<br><b>12/31/2024</b>                                                                                                                                                                                                                                                           |  | 23. Estimated duration<br><b>25 days</b>                                                                                                                                                                                                                                 |
| 24. Attachments                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                                                                                                                                                                                                                                          |

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- |                                                                                                                                                                                                                           |                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Well plat certified by a registered surveyor.<br>2. A Drilling Plan.<br>3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).<br>5. Operator certification.<br>6. Such other site specific information and/or plans as may be requested by the BLM. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                                                                                                                        |                                                                                                               |                           |
|------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------|
| 25. Signature<br>(Electronic Submission)<br><br>Title<br><b>Regulatory Contractor</b>                                  | Name (Printed/Typed)<br><b>SHEA BAILEY / Ph: (713) 651-7000</b>                                               | Date<br><b>04/11/2024</b> |
| Approved by (Signature)<br>(Electronic Submission)<br><br>Title<br><b>Assistant Field Manager Lands &amp; Minerals</b> | Name (Printed/Typed)<br><b>CODY LAYTON / Ph: (575) 234-5959</b><br><br>Office<br><b>Carlsbad Field Office</b> | Date<br><b>04/25/2025</b> |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

\*(Instructions on page 2)



## INSTRUCTIONS

**GENERAL:** This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

**ITEM I:** If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

**ITEM 4:** Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

**ITEM 14:** Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

**ITEMS 15 AND 18:** If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

**ITEM 22:** Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

**ITEM 24:** If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

## NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48( d) provide that you be furnished the following information in connection with information required by this application.

**AUTHORITY:** 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

**PRINCIPAL PURPOSES:** The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

**ROUTINE USE:** Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

**EFFECT OF NOT PROVIDING INFORMATION:** Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to an evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.



## Additional Operator Remarks

### Location of Well

0. SHL: TR P / 876 FSL / 808 FEL / TWSP: 24S / RANGE: 34E / SECTION: 26 / LAT: 32.183595 / LONG: -103.434825 ( TVD: 0 feet, MD: 0 feet )

PPP: TR P / 100 FSL / 1311 FEL / TWSP: 24S / RANGE: 34E / SECTION: 26 / LAT: 32.181481 / LONG: -103.436448 ( TVD: 10526 feet, MD: 10593 feet )

PPP: TR P / 0 FNL / 1311 FEL / TWSP: 24S / RANGE: 34E / SECTION: 23 / LAT: 32.195768 / LONG: -103.436443 ( TVD: 10791 feet, MD: 11122 feet )

BHL: TR A / 100 FNL / 1311 FEL / TWSP: 24S / RANGE: 34E / SECTION: 23 / LAT: 32.209996 / LONG: -103.436442 ( TVD: 10791 feet, MD: 21069 feet )

### BLM Point of Contact

Name: JANET D ESTES

Title: ADJUDICATOR

Phone: (575) 234-6233

Email: JESTES@BLM.GOV

### **Review and Appeal Rights**

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

## PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

|                  |                              |
|------------------|------------------------------|
| OPERATOR'S NAME: | EOG Resources Incorporated   |
| WELL NAME & NO.: | GRACKLE 26 EAST FED COM 502H |
| LOCATION:        | Section 26, T.24 S., R.34 E. |
| COUNTY:          | Lea County, New Mexico       |

COA

|                                  |                                                        |                                                          |                                                               |
|----------------------------------|--------------------------------------------------------|----------------------------------------------------------|---------------------------------------------------------------|
| H2S                              | <input checked="" type="radio"/> Yes                   | <input type="radio"/> No                                 |                                                               |
| Potash                           | <input checked="" type="radio"/> None                  | <input type="radio"/> Secretary                          | <input type="radio"/> R-111-P                                 |
| Cave/Karst Potential             | <input checked="" type="radio"/> Low                   | <input type="radio"/> Medium                             | <input type="radio"/> High                                    |
| Cave/Karst Potential             | <input type="radio"/> Critical                         |                                                          |                                                               |
| Variance                         | <input type="radio"/> None                             | <input checked="" type="radio"/> Flex Hose               | <input type="radio"/> Other                                   |
| Wellhead                         | <input type="radio"/> Conventional                     | <input checked="" type="radio"/> Multibowl               | <input type="radio"/> Both                                    |
| Wellhead Variance                | <input type="radio"/> Diverter                         |                                                          |                                                               |
| Other                            | <input type="checkbox"/> 4 String                      | <input type="checkbox"/> Capitan Reef                    | <input type="checkbox"/> WIPP                                 |
| Other                            | <input type="checkbox"/> Fluid Filled                  | <input type="checkbox"/> Pilot Hole                      | <input type="checkbox"/> Open Annulus                         |
| Cementing                        | <input type="checkbox"/> Contingency<br>Cement Squeeze | <input type="checkbox"/> EchoMeter                       | <input checked="" type="checkbox"/> Primary Cement<br>Squeeze |
| Special Requirements             | <input type="checkbox"/> Water Disposal                | <input checked="" type="checkbox"/> COM                  | <input type="checkbox"/> Unit                                 |
| Special Requirements             | <input type="checkbox"/> Batch Sundry                  |                                                          |                                                               |
| Special Requirements<br>Variance | <input checked="" type="checkbox"/> Break Testing      | <input checked="" type="checkbox"/> Offline<br>Cementing | <input checked="" type="checkbox"/> Casing<br>Clearance       |

### A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

### B. CASING

The above well is approved for the primary design and 5 Designs listed in the "EOG BLM Variance 5a - Alternate Shallow Casing Designs" document. The casing set points and directional plans for the wells in the batch are within the boundary conditions reviewed in the blanket design. The COA is written for the deepest well on the pad. Operator is responsible to review the cement volumes based on the set points, design executed and to achieve the TOC requirements listed in the COA.

**Primary(Design E: )**

1. The **10-3/4** inch surface casing shall be set at approximately **1120** feet **TVD** (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **8-5/8** inch intermediate casing shall be set at approximately **5080** feet **TVD**.
  - a. **Mud weight could brine up to 10.2ppg. Reviewed and OK**
  - b. **Keep casing half full during run for collapse SF**

The minimum required fill of cement behind the **8-5/8** inch intermediate casing is:

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
3. The **6** inch x **5.5** inch tapered production casing shall be set at approximately **21,069** feet. Operator has also proposed **ONLY** running **6** inch casing for the production string. Reviewed and is OK. The minimum required fill of cement behind the **5-1/2** inch production casing is:
    - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

**Shallow Design A:**

1. The **13-3/8** inch surface casing shall be set at approximately **1120** feet **TVD** (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature

survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **9-5/8** inch intermediate casing shall be set at approximately **5080** feet **TVD**.
    - a. **Mud weight could brine up to 10.2ppg. Reviewed and OK**
    - b. **Keep casing half full during run for collapse SF**

The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
3. The **5-1/2** inch production casing shall be set at approximately **21,069** feet. The minimum required fill of cement behind the **5-1/2** inch production casing is:
    - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

### **Shallow Design B:**

1. The **10-3/4** inch surface casing shall be set at approximately **1120** feet **TVD** (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
  - e. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - f. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
  - g. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength,

whichever is greater.

If cement falls back, remedial cementing will be done prior to drilling out that string.

2. The **8-5/8** inch intermediate casing shall be set at approximately **5080** feet **TVD**.
  - a. **Mud weight could brine up to 10.2ppg. Reviewed and OK**
  - b. **Keep casing half full during run for collapse SF**

The minimum required fill of cement behind the **8-5/8** inch intermediate casing is:

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
3. The **5-1/2** inch production casing shall be set at approximately **21,069** feet. The minimum required fill of cement behind the **5-1/2** inch production casing is:
    - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

#### **Shallow Design C:**

1. The **13-3/8** inch surface casing shall be set at approximately **1120** feet **TVD** (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
  - h. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - i. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
  - j. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - k. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **9-5/8** inch intermediate casing shall be set at approximately **5080** feet **TVD**.
  - a. **Mud weight could brine up to 10.2ppg. Reviewed and OK**
  - b. **Keep casing half full during run for collapse SF**

The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

3. The **6** inch production casing shall be set at approximately **21,069** feet. The minimum required fill of cement behind the **6** inch production casing is:
  - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

#### **Shallow Design D:**

1. The **13-3/8** inch surface casing shall be set at approximately **1120** feet **TVD** (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
  - l. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - m. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
  - n. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - o. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **9-5/8** inch intermediate casing shall be set at approximately **5080** feet **TVD**.
  - a. **Mud weight could brine up to 10.2ppg. Reviewed and OK**
  - b. **Keep casing half full during run for collapse SF**

The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
3. The **6** inch x **5.5** inch tapered production casing shall be set at approximately **21,069** feet. The minimum required fill of cement behind the **6** inch x **5.5** inch tapered production casing is:
    - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.



**C. PRESSURE CONTROL**

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the **13-3/8** inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 3500 (70% Working Pressure) psi.**
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
  - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

**D. SPECIAL REQUIREMENT (S)****Communitization Agreement**

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

**(Note: For a minimum 5M BOPE or less (Utilizing a 10M BOPE system)****BOPE Break Testing Variance**

- BOPE Break Testing is ONLY permitted for 5M BOPE or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP)**
- BOPE Break Testing is NOT permitted to drilling the production hole section.

- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (575-706-2779) prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-689-5981 Lea County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per Onshore Oil and Gas Order No. 2.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

#### **Casing Clearance:**

- Variance in place for production interval as long as the 500' overlap into the previous casing meets the requirement
- Variance in place for salt interval clearance based on caliper data study

#### **Offline Cementing**

Operator is approved for offline cementing for surface and intermediate intervals. Notify the BLM prior to the commencement of any offline cementing procedure.

## **GENERAL REQUIREMENTS**

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

**EMAIL** or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

[BLM\\_NM\\_CFO\\_DrillingNotifications@BLM.GOV](mailto:BLM_NM_CFO_DrillingNotifications@BLM.GOV)

(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,  
(575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.

- a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
- b. When the operator proposes to set surface casing with Spudder Rig
  - Notify the BLM when moving in and removing the Spudder Rig.
  - Notify the BLM when moving in the 2<sup>nd</sup> Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
  - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

#### A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours.

WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172** and **API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.

4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. Whenever any seal subject to test pressure is broken, all the tests in **43 CFR part 3170 Subpart 3172** must be followed.
  - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
  - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
  - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).

- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

#### C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

#### D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI 4/19/2025



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

# Operator Certification Data Report

07/15/2025

## Operator

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

**NAME:** SHEA BAILEY

**Signed on:** 09/24/2024

**Title:** Regulatory Contractor

**Street Address:** 5509 CHAMPIONS BLVD

**City:** MIDLAND

**State:** TX

**Zip:** 79707

**Phone:** (432)214-9797

**Email address:** SHEA\_BAILEY@EOGRESOURCES.COM

## Field

**Representative Name:**

**Street Address:**

**City:**

**State:**

**Zip:**

**Phone:**

**Email address:**





U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

## Application Data

07/15/2025

APD ID: 10400097948

Submission Date: 04/11/2024

Operator Name: EOG RESOURCES INCORPORATED

Well Name: GRACKLE 26 EAST FED COM

Well Number: 502H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data  
reflects the most  
recent changes  
[Show Final Text](#)

### Section 1 - General

APD ID: 10400097948

Tie to previous NOS?

Submission Date: 04/11/2024

BLM Office: Carlsbad

User: SHEA BAILEY

Title: Regulatory Contractor

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM15684

Lease Acres:

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? N

Permitting Agent? NO

APD Operator: EOG RESOURCES INCORPORATED

Operator letter of

### Operator Info

Operator Organization Name: EOG RESOURCES INCORPORATED

Operator Address: 600 17TH STREET, SUITE 1000 N

Zip: 80202

Operator PO Box:

Operator City: DENVER

State: CO

Operator Phone: (303)262-9894

Operator Internet Address:

### Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: GRACKLE 26 EAST FED COM

Well Number: 502H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: RED HILLS

Pool Name: BONE SPRING,  
NORTH



**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H**Is the proposed well in an area containing other mineral resources?** NATURAL GAS,OIL**Is the proposed well in a Helium production area?** N**Use Existing Well Pad?** N**New surface disturbance?****Type of Well Pad:** MULTIPLE WELL**Multiple Well Pad Name:**  
GRACKLE 26 EAST FED COM**Number:** 402H, 403H, 502H,  
503H**Well Class:** HORIZONTAL**Number of Legs:** 1**Well Work Type:** Drill**Well Type:** OIL WELL**Describe Well Type:****Well sub-Type:** INFILL**Describe sub-type:****Distance to town:****Distance to nearest well:** 33 FT**Distance to lease line:** 100 FT**Reservoir well spacing assigned acres Measurement:** 640 Acres**Well plat:** REV\_Grackle\_26\_East\_Fed\_Com\_C102\_502H\_S\_20240409124118.pdf**Well work start Date:** 12/31/2024**Duration:** 25 DAYS**Section 3 - Well Location Table****Survey Type:** RECTANGULAR**Describe Survey Type:****Datum:** NAD83**Vertical Datum:** NAVD88**Survey number:****Reference Datum:** KELLY BUSHING

| Wellbore     | NS-Foot | NS Indicator | EW-Foot | EW Indicator | Twsp | Range | Section | Aliquot/Lot/Tract | Latitude  | Longitude   | County | State      | Meridian   | Lease Type | Lease Number | Elevation | MD    | TVD   | Will this well produce from this |
|--------------|---------|--------------|---------|--------------|------|-------|---------|-------------------|-----------|-------------|--------|------------|------------|------------|--------------|-----------|-------|-------|----------------------------------|
| SHL Leg #1   | 876     | FSL          | 808     | FEL          | 24S  | 34E   | 26      | Tract P           | 32.183595 | -103.434825 | LEA    | NEW MEXICO | NEW MEXICO | F          | FEE          | 3429      |       |       | Y                                |
| KOP Leg #1   | 50      | FSL          | 1311    | FEL          | 24S  | 34E   | 26      | Tract P           | 32.18133  | -103.436448 | LEA    | NEW MEXICO | NEW MEXICO | F          | FEE          | -6885     | 10372 | 10314 | Y                                |
| PPP Leg #1-1 | 100     | FSL          | 1311    | FEL          | 24S  | 34E   | 26      | Tract P           | 32.181481 | -103.436448 | LEA    | NEW MEXICO | NEW MEXICO | F          | FEE          | -7097     | 10593 | 10526 | Y                                |

**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H

| Wellbore     | NS-Foot | NS Indicator | EW-Foot | EW Indicator | Twsp | Range | Section | Aliquot/Lot/Tract | Latitude  | Longitude    | County | State      | Meridian   | Lease Type | Lease Number | Elevation | MD    | TVD   | Will this well produce from this |
|--------------|---------|--------------|---------|--------------|------|-------|---------|-------------------|-----------|--------------|--------|------------|------------|------------|--------------|-----------|-------|-------|----------------------------------|
| PPP Leg #1-2 | 0       | FNL          | 1311    | FEL          | 24S  | 34E   | 23      | Tract P           | 32.195768 | - 103.436443 | LEA    | NEW MEXICO | NEW MEXICO | F          | NMNM 15684   | - 7362    | 11122 | 10791 | Y                                |
| EXIT Leg #1  | 100     | FNL          | 1311    | FEL          | 24S  | 34E   | 23      | Tract A           | 32.209996 | - 103.436442 | LEA    | NEW MEXICO | NEW MEXICO | F          | NMNM 117125  | - 7362    | 21069 | 10791 | Y                                |
| BHL Leg #1   | 100     | FNL          | 1311    | FEL          | 24S  | 34E   | 23      | Tract A           | 32.209996 | - 103.436442 | LEA    | NEW MEXICO | NEW MEXICO | F          | NMNM 117125  | - 7362    | 21069 | 10791 | Y                                |

Form C-102  
Revised August 1, 2011  
Submit one copy to appropriate  
District Office  
☐ AMENDED REPORT



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

# Drilling Plan Data Report

07/15/2025

APD ID: 10400097948

Submission Date: 04/11/2024

Highlighted data  
reflects the most  
recent changes

Operator Name: EOG RESOURCES INCORPORATED

Well Name: GRACKLE 26 EAST FED COM

Well Number: 502H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

## Section 1 - Geologic Formations

| Formation ID | Formation Name   | Elevation | True Vertical | Measured Depth | Lithologies | Mineral Resources | Producing Formatio |
|--------------|------------------|-----------|---------------|----------------|-------------|-------------------|--------------------|
| 15501254     | PERMIAN          | 3429      | 0             | 0              | ALLUVIUM    | NONE              | N                  |
| 15501255     | RUSTLER          | 2440      | 989           | 989            | ANHYDRITE   | NONE              | N                  |
| 15501256     | TOP SALT         | 1870      | 1559          | 1559           | SALT        | NONE              | N                  |
| 15501257     | BASE OF SALT     | -1547     | 4976          | 4976           | SALT        | NONE              | N                  |
| 15501258     | LAMAR            | -1815     | 5244          | 5244           | LIMESTONE   | NONE              | N                  |
| 15501260     | BELL CANYON      | -1843     | 5272          | 5272           | SANDSTONE   | NATURAL GAS, OIL  | N                  |
| 15501261     | CHERRY CANYON    | -2780     | 6209          | 6209           | SANDSTONE   | NATURAL GAS, OIL  | N                  |
| 15501262     | BRUSHY CANYON    | -4273     | 7702          | 7702           | SANDSTONE   | NATURAL GAS, OIL  | N                  |
| 15501263     | BONE SPRING LIME | -5649     | 9078          | 9078           | LIMESTONE   | NATURAL GAS, OIL  | N                  |
| 15501264     | AVALON SAND      | -6000     | 9429          | 9429           | SANDSTONE   | NATURAL GAS, OIL  | N                  |
| 15501265     | BONE SPRING 1ST  | -7032     | 10461         | 10461          | SANDSTONE   | NATURAL GAS, OIL  | Y                  |
| 15501266     | BONE SPRING 2ND  | -7555     | 10984         | 10984          | SANDSTONE   | NATURAL GAS, OIL  | Y                  |
| 15501268     | BONE SPRING 3RD  | -8590     | 12019         | 12019          | SANDSTONE   | NATURAL GAS, OIL  | Y                  |

## Section 2 - Blowout Prevention

**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H**Pressure Rating (PSI):** 10M**Rating Depth:** 11400

**Equipment:** The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5,000 psi WP). Both units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top. EOG will utilize wing unions on BOPE connections that can be isolated from wellbore pressure through means of a choke. All wing unions will be rated to a pressure that meets or exceeds the pressure rating of the BOPE system. A multi-bowl wellhead system will be utilized. After running the 13-3/8 surface casing, a 13-3/8 BOP/BOPE system with a minimum working pressure of 10,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 10,000 psi pressure test. This pressure test will be repeated at least every 30 days, as per Onshore Order No. 2. The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 10,000 psi. The multi-bowl wellhead will be installed by vendors representative(s). A copy of the installation instructions for the Cactus Multi-Bowl WH system has been sent to the NM BLM office in Carlsbad, NM. The wellhead will be installed by a third party welder while being monitored by WH vendors representative. All BOP equipment will be tested utilizing a conventional test plug. Not a cup or Jpacker type. EOG Resources reserves the option to conduct BOPE testing during wait on cement periods provided a test plug is utilized. A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi. Casing strings will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1,500 psi, whichever is greater.

**Requesting Variance?** YES

**Variance request:** SEE VARIANCE REQUEST LIST FOR FULL LIST OF VARIANCES REQUESTED Variance is requested to waive the centralizer requirements for the 9-5/8" casing in the 11" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 11" hole interval to maximize cement bond and zonal isolation. Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation. EOG requests permission to allow deviation from the 0.422" annulus clearance requirement for the intermediate (salt) section from Onshore Order #2 under the following conditions: - The variance is not applicable within the Potash Boundaries or Capitan Reef areas. - Operator takes responsibility to get casing to set point in the event that the clearance causes stuck pipe issues. Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line). Variance is requested to use a 5,000 psi annular BOP with the 10,000 psi BOP stack. EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.a.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with Batch Drilling & Offline cement operations to include the following: • Full BOPE test at first installation on the pad. • Full BOPE test every 21 days per Onshore Order No. 2. • Function test BOP elements per Onshore Order No. 2. • Break testing BOP and BOPE coupled with batch drilling operations and option to offline cement and/or remediate (if needed) any surface or intermediate sections, according to attached offline cementing support documentation. • After the well section is secured, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad. • TA cap will also be installed per Wellhead vendor procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops. • See attached "EOG BLM Variance 3a -Offline Cement Intermediate Operational Procedure" Variance is requested to waive the centralizer requirements for the 8-5/8" casing in the 9-7/8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 9-7/8" hole interval to maximize cement bond and zonal isolation. Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation. EOG requests permission to allow deviation from the 0.422" annulus clearance requirement for the intermediate (salt) section from Onshore Order #2 under the following conditions: - The variance is not applicable within the Potash Boundaries or Capitan Reef areas. - Operator takes responsibility to get casing to set point in the event that the clearance causes stuck pipe issues.

**Testing Procedure:** Pipe rams and blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe. EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program. EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

**Choke Diagram Attachment:**

Operator Name: EOG RESOURCES INCORPORATED

Well Name: GRACKLE 26 EAST FED COMWell Number: 502H

10\_M\_Choke\_Manifold\_20211227095328.pdf

Gates\_Co\_Flex\_Hose\_Test\_Chart\_and\_Certifications\_20250326090655.pdf

BOP Diagram Attachment:

Wellhead\_3\_string\_10.750x8.625x5.500\_SDT\_3141\_20230227071046.pdf

EOG\_BLM\_Variance\_3a\_\_\_Offline\_Cement\_Intermediate\_Operational\_Procedure\_20230227071046.pdf

EOG\_BLM\_Variance\_5a\_\_\_Alternate\_Shallow\_Casing\_Designs\_20240229085523.pdf

EOG\_BLM\_Variance\_4a\_\_\_Salt\_Section\_Annular\_Clearance\_11.8.2022\_20230307144721.pdf

Grackle\_26\_East\_Fed\_Com\_101H\_VariANCES\_20240402070240.pdf

EOG\_BLM\_Variance\_1c\_\_\_10M\_Annular\_Variance\_\_\_3\_String\_Large\_surface\_hole\_20230227071046.pdf

10\_M\_BOP\_Diagram\_13.625\_in\_20230227071101.pdf

Section 3 - Casing

| Casing ID | String Type  | Hole Size | Csg Size | Condition | Standard | Tapered String | Top Set MD | Bottom Set MD | Top Set TVD | Bottom Set TVD | Top Set MSL | Bottom Set MSL | Calculated casing length MD | Grade | Weight | Joint Type          | Collapse SF | Burst SF | Joint SF Type | Joint SF | Body SF Type | Body SF |
|-----------|--------------|-----------|----------|-----------|----------|----------------|------------|---------------|-------------|----------------|-------------|----------------|-----------------------------|-------|--------|---------------------|-------------|----------|---------------|----------|--------------|---------|
| 1         | SURFACE      | 13.5      | 10.75    | NEW       | API      | N              | 0          | 1120          | 0           | 1120           | 3429        | 2309           | 1120                        | J-55  | 40.5   | ST&C                | 1.125       | 1.25     | BUOY          | 1.6      | BUOY         | 1.6     |
| 2         | INTERMEDIATE | 9.875     | 8.625    | NEW       | API      | N              | 0          | 5149          | 0           | 5080           | 3411        | -1651          | 5149                        | J-55  | 32     | OTHER - BTC-SC      | 1.125       | 1.25     | BUOY          | 1.6      | BUOY         | 1.6     |
| 3         | PRODUCTION   | 6.75      | 5.5      | NEW       | API      | N              | 0          | 21686         | 0           | 11400          | 3319        | -7971          | 21686                       | P-110 | 20     | OTHER - DWC/C IS MS | 1.125       | 1.25     | BUOY          | 1.6      | BUOY         | 1.6     |

Casing Attachments

Operator Name: EOG RESOURCES INCORPORATED

Well Name: GRACKLE 26 EAST FED COMWell Number: 502H

Casing Attachments

Casing ID: 1StringSURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Grackle\_26\_East\_Fed\_Com\_502H\_Permit\_Info\_20240409124800.pdf

Casing ID: 2StringINTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

8.625in\_32ppf\_J55\_BTC\_SC\_20240409124742.pdf

Casing ID: 3StringPRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

5.500in\_20.00ppf\_VST\_P110EC\_DWC\_C\_IS\_MS\_CDS\_AB\_20240409124724.pdf

Section 4 - Cement



**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H

| String Type  | Lead/Tail | Stage Tool Depth | Top MD | Bottom MD | Quantity(sx) | Yield | Density | Cu Ft  | Excess% | Cement type | Additives                                                                                                                         |
|--------------|-----------|------------------|--------|-----------|--------------|-------|---------|--------|---------|-------------|-----------------------------------------------------------------------------------------------------------------------------------|
| SURFACE      | Lead      |                  | 0      | 920       | 290          | 1.73  | 13.5    | 501.7  | 25      | Class C     | Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl <sub>2</sub> + 0.25 lb/sk Cello- Flake (TOC @ Surface)                             |
| SURFACE      | Tail      |                  | 920    | 1120      | 140          | 1.34  | 14.8    | 187.6  | 25      | Class C     | Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 920')                                       |
| INTERMEDIATE | Lead      |                  | 0      | 4119      | 310          | 2.22  | 12.7    | 688.2  | 25      | Class C     | Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx (TOC @ Surface)                                                            |
| INTERMEDIATE | Tail      |                  | 4119   | 5250      | 140          | 1.32  | 14.8    | 184.8  | 25      | Class C     | Tail: Class C + 10% NaCl + 3% MagOx (TOC @ 4084)                                                                                  |
| PRODUCTION   | Lead      |                  | 4650   | 10990     | 370          | 3.21  | 10.5    | 1187.7 | 25      | CLASS H     | Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @4650)                                                          |
| PRODUCTION   | Tail      |                  | 10990  | 21686     | 750          | 1.52  | 13.2    | 1140   | 25      | CLASS H     | Tail: Class H + 5% NEX-020 + 0.2% NAC-102 + 0.15% NAS-725 + 0.5% NFL-549 + 0.2% NFP-703 + 1% NBE-737 + 0.3% NRT-241 (TOC @ 10990) |

### Section 5 - Circulating Medium

**Mud System Type:** Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with 43 CFR 3172:****Diagram of the equipment for the circulating system in accordance with 43 CFR 3172:**

**Describe what will be on location to control well or mitigate other conditions:** (A) A kelly cock will be kept in the drill string at all times. (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times. (C) H<sub>2</sub>S monitoring and detection equipment will be utilized from surface casing point to TD.

**Describe the mud monitoring system utilized:** The highest mud weight needed to balance formation is expected to be 11.5 ppg. In order to maintain hole stability, mud weights up to 14.0 ppg may be utilized. An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate. Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.



**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H**Circulating Medium Table**

| Top Depth | Bottom Depth | Mud Type        | Min Weight (lbs/gal) | Max Weight (lbs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | PH | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics |
|-----------|--------------|-----------------|----------------------|----------------------|---------------------|-----------------------------|----|----------------|----------------|-----------------|----------------------------|
| 0         | 1120         | WATER-BASED MUD | 8.6                  | 8.8                  |                     |                             |    |                |                |                 |                            |
| 1120      | 5150         | SALT SATURATED  | 9                    | 10.5                 |                     |                             |    |                |                |                 |                            |
| 5140      | 11400        | OIL-BASED MUD   | 8.8                  | 9.5                  |                     |                             |    |                |                |                 |                            |

**Section 6 - Test, Logging, Coring****List of production tests including testing procedures, equipment and safety measures:**

Open-hole logs are not planned for this well.

GRCCCL will be run in cased hole during completions phase of operations.

**List of open and cased hole logs run in the well:**

DIRECTIONAL SURVEY,

**Coring operation description for the well:**

None

**Section 7 - Pressure****Anticipated Bottom Hole Pressure:** 5335**Anticipated Surface Pressure:** 2960**Anticipated Bottom Hole Temperature(F):** 184**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations**

Grackle\_26\_East\_Fed\_Com\_502H\_H2S\_Plan\_Summary\_20240409125015.pdf

**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H

## Section 8 - Other Information

**Proposed horizontal/directional/multi-lateral plan submission:**

Grackle\_26\_East\_Fed\_Com\_502H\_Planning\_Report\_20240409125034.pdf

Grackle\_26\_East\_Fed\_Com\_502H\_Wall\_Plot\_20240409125034.pdf

**Other proposed operations facets description:**

The drilling operation should be finished in approximately one month. If the well is productive, an additional 60-90 days will be required for completion and testing before a decision is made to install permanent facilities.

EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and Cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both A and B sections). The weld will be tested to 1,000 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

**Other proposed operations facets attachment:**

Grackle\_26\_East\_Fed\_Com\_502H\_Permit\_Info\_20240409125049.pdf

Grackle\_26\_East\_Fed\_Com\_502H\_Rig\_Layout\_20240409125049.pdf

10.750in\_40.5ppf\_J55\_STC\_20230227072935.pdf

10\_M\_BOP\_Diagram\_13.625\_in\_20230227072935.pdf

10\_M\_Choke\_Manifold\_20230227072936.pdf

8.625in\_32ppf\_J55\_BTC\_SC\_20230227072935.pdf

8.625in\_32ppf\_P110EC\_BTC\_SC\_20230227072935.pdf

EOG\_Cameron\_3\_String\_13in\_10M\_MNDS\_20230227072935.PDF

Wellhead\_3\_string\_10.750x8.625x5.500\_SDT\_3141\_20230227072935.pdf

**Other Variance request(s)?:** Y**Other Variance attachment:**

10M\_BOP\_Diagram\_13.625in\_20230208150436.pdf

10\_M\_Choke\_Manifold\_20211227132831.pdf

EOG\_BLM\_Variance\_1c\_\_\_10M\_Annular\_Variance\_\_\_3\_String\_Large\_surface\_hole\_20230227073050.pdf

EOG\_Cameron\_3\_String\_13in\_10M\_MNDS\_20230227073051.PDF

EOG\_BLM\_10M\_Annular\_Variance\_\_\_9.625\_in\_20230113071033.pdf



EOG\_BLM\_Variance\_3a\_\_\_Offline\_Cement\_Intermediate\_Operational\_Procedure\_20230113071034.pdf

Grackle\_26\_East\_Fed\_Com\_101H\_Variations\_20240402071027.pdf

OO\_II\_Replacement\_Language\_1\_20250326090718.pdf







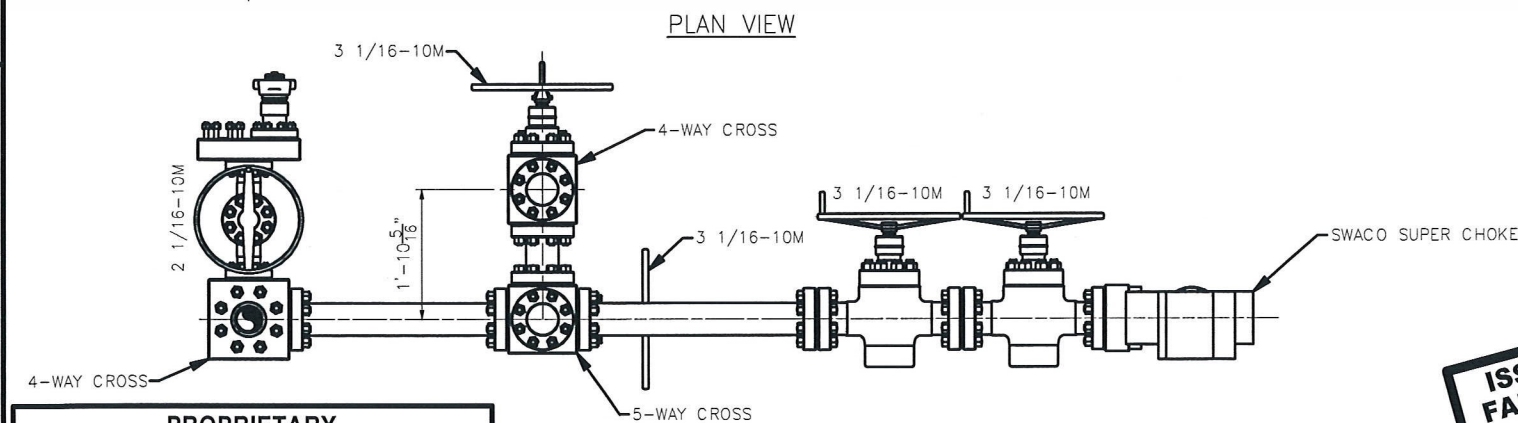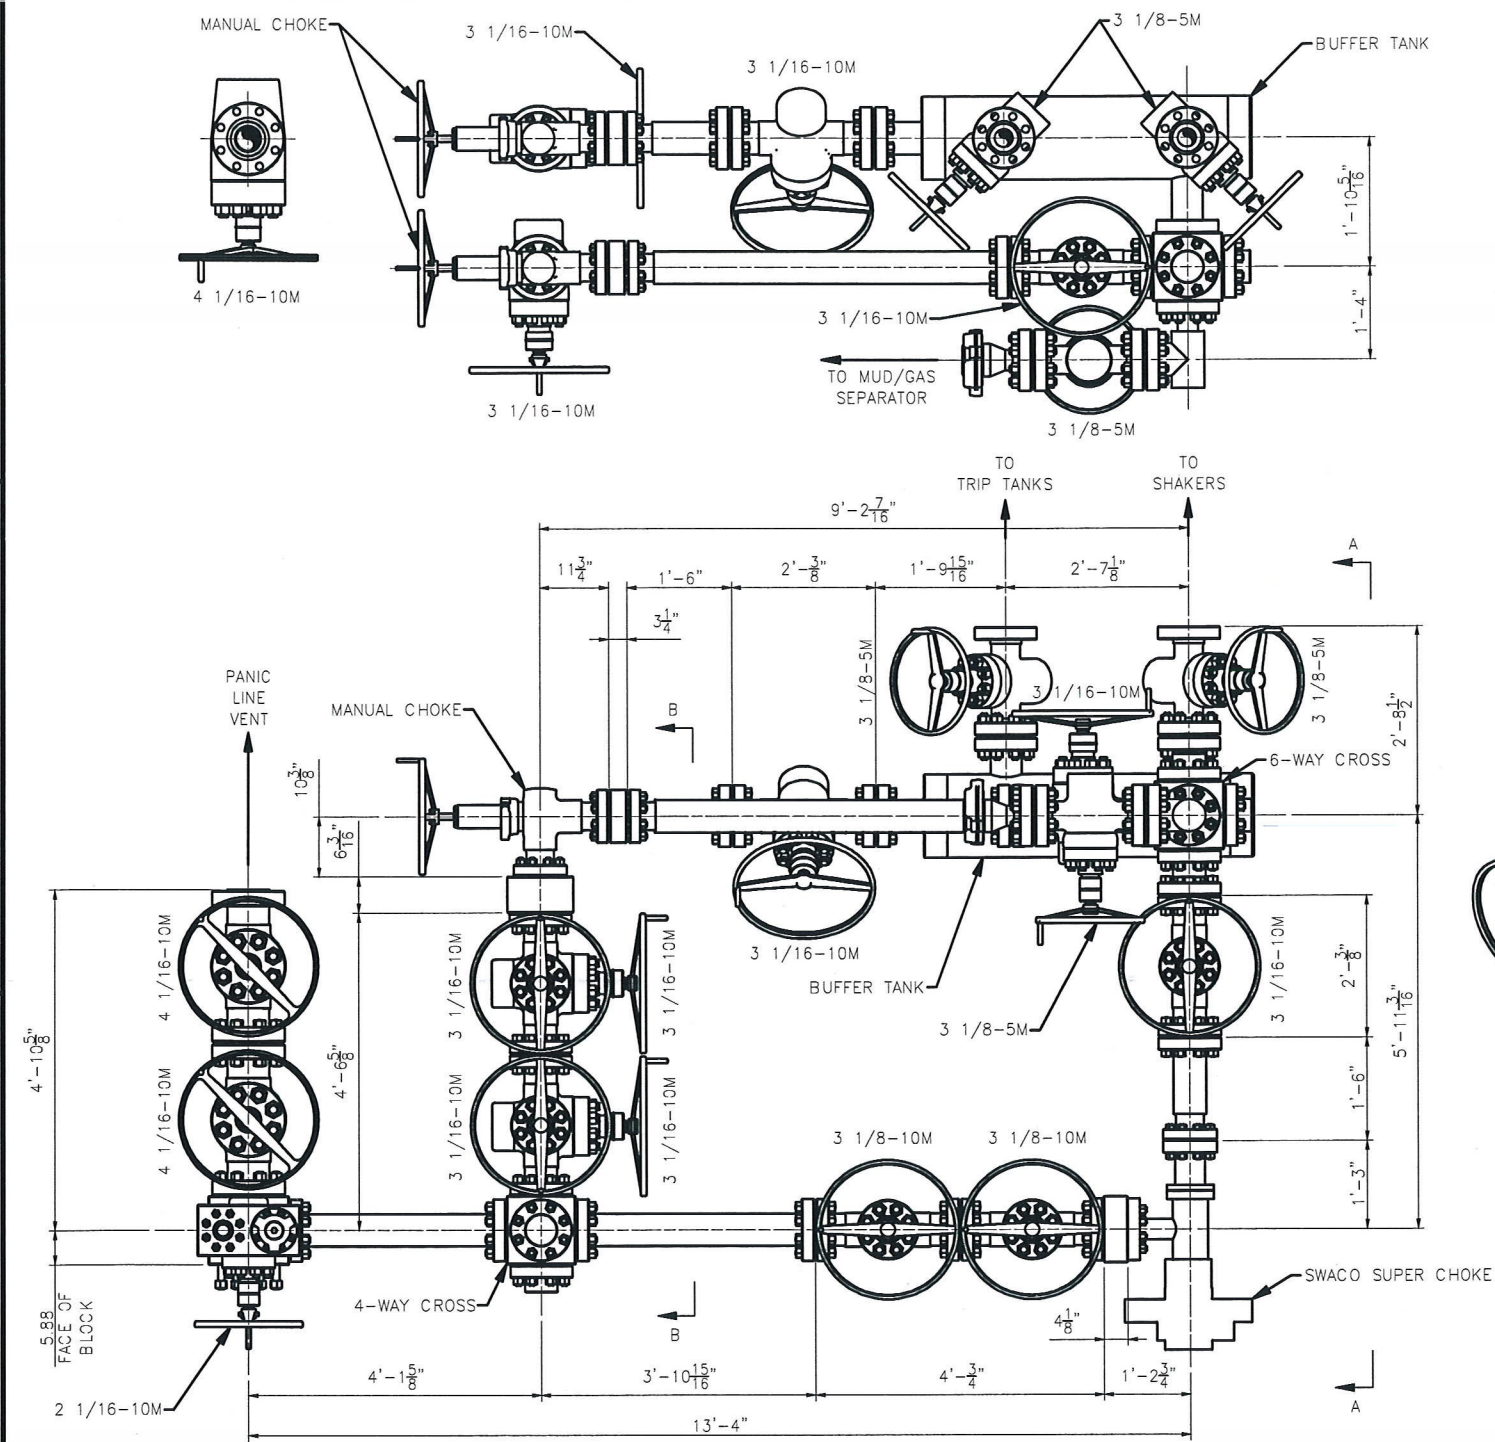

**PROPRIETARY**

THIS DRAWING AND THE IDEAS AND INFORMATION INCLUDED IN THIS DRAWING ARE PROPRIETARY AND ARE NOT TO BE REPRODUCED, DISTRIBUTED OR DISCLOSED IN ANY MANNER, WITHOUT THE PRIOR, WRITTEN CONSENT OF A DULY AUTHORIZED OFFICER OF HELMERICH & PAYNE INT'L DRILLING CO.

**ISSUED FOR FABRICATION**  
February-10-2014  
DRAFTSMAN *MWL*  
ENGINEER *[Signature]*

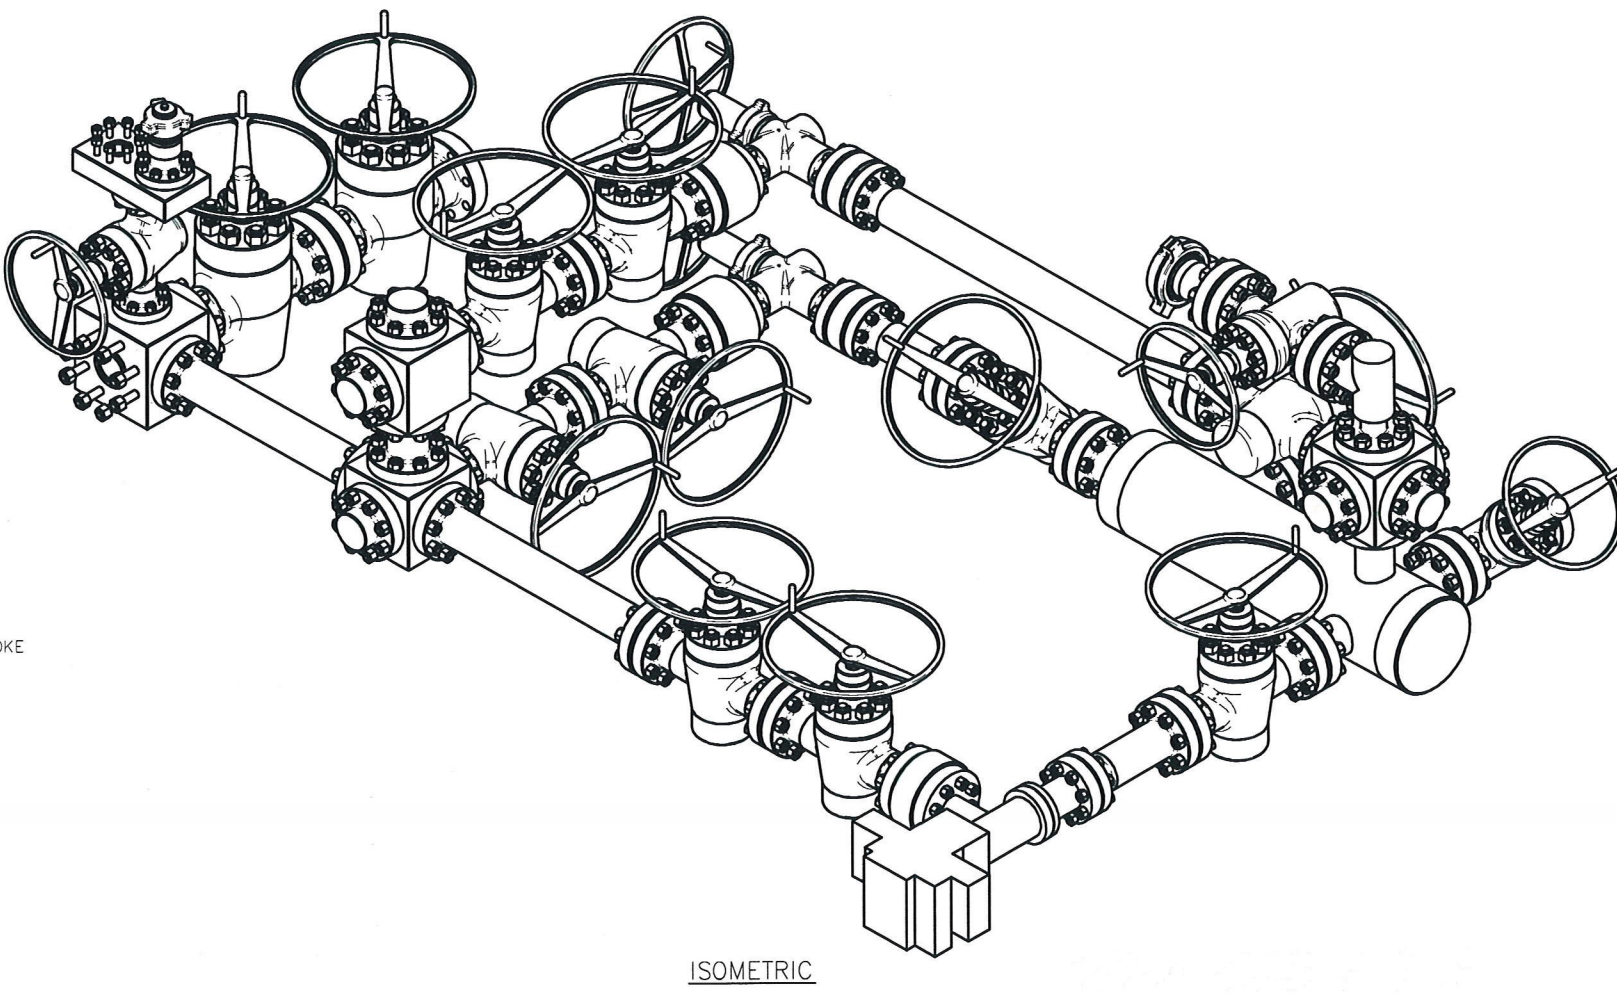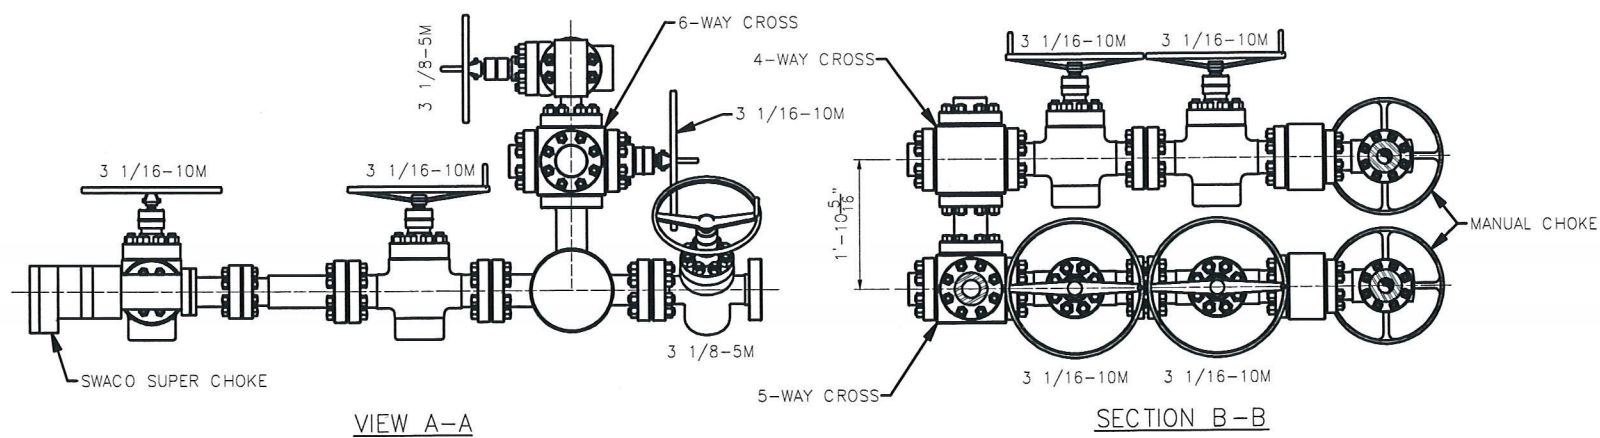

</



**BLACK GOLD®**

Nabors 1210  
Choke hose  
10-28-22

**GATES ENGINEERING & SERVICES NORTH AMERICA**  
7603 Prairie Oak Dr.  
Houston, TX. 77086

**PHONE:** +1 (281) 602-4100  
**FAX:** +1 (281) 602-4147  
**EMAIL:** gesna.quality@gates.com  
**WEB:** www.gates.com/oilandgas

## CERTIFICATE OF CONFORMANCE

This is to verify that the items detailed below meet the requirements of the Customer's Purchase Order referenced herein, and are in Conformance with applicable specifications, and that Records of Required Tests are on file and subject to examination. The following items were inspected and hydrostatically tested at **Gates Engineering & Services North America** facilities in Houston, TX, USA.

**CUSTOMER:** NABORS DRILLING TECHNOLOGIES USA DBA NABORS DRILLING USA  
**CUSTOMER P.O.#:** 15485579 (NABORS PO#15485579 SN 73981ASSET 66-1486)  
**CUSTOMER P/N:** IMR RETEST SN 73981 ASSET #66-1486

**PART DESCRIPTION:** RETEST OF CUSTOMER 3" X 45 FT 16C CHOKE & KILL HOSE ASSEMBLY C/W 4 1/16" 10K FLANGES

**SALES ORDER #:** 525500  
**QUANTITY:** 1  
**SERIAL #:** 73981 H3-101822-15

**SIGNATURE:** \_\_\_\_\_

**TITLE:** \_\_\_\_\_

**QUALITY ASSURANCE**

**DATE:** \_\_\_\_\_

10/18/2022



H3-10667

10/18/2022 11:48:25 AM

## TEST REPORT

**CUSTOMER**

Company: Nabors Industries Inc.

Production description:

Sales order #: 525500

Customer reference: FG0144  
NABORS PO#15485579 SN 73981  
ASSET 66-1486**TEST INFORMATION**Test procedure: GTS-04-053  
Test pressure: 15000.00 psi  
Test pressure hold: 3600.00 sec  
Work pressure: 10000.00 psi  
Work pressure hold: 900.00 sec  
Length difference: 0.00 %  
Length difference: 0.00 inch**TEST OBJECT**

Serial number: H3-101822-15

Lot number:

Description:

Hose ID: 3.0 CK03 16C 10K

Part number:

Fitting 1: 3.0 x 4-1/16 10K

Part number:

Description:

Fitting 2: 3.0 x 4-1/16 10K

Part number:

Description:


Visual check:

Pressure test result: PASS

Length measurement result:

Length: 45 feet

Test operator: Martin

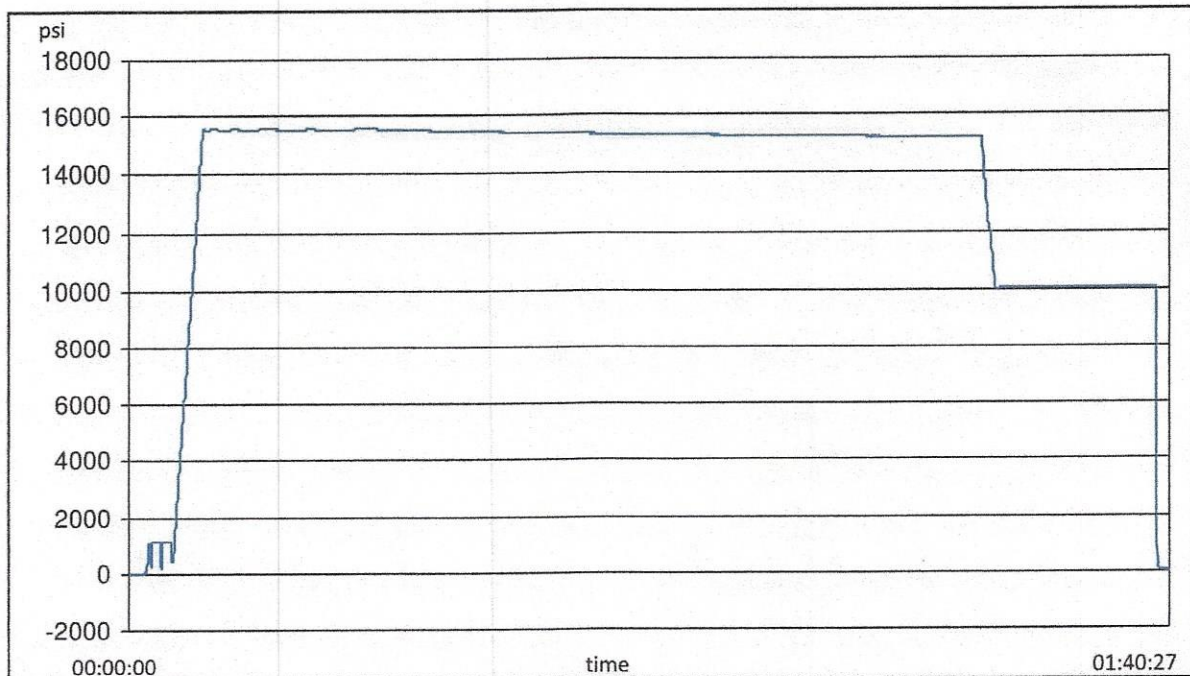



H3-10667

10/18/2022 11:48:25 AM

**TEST REPORT****GAUGE TRACEABILITY**

| Description | Serial number | Calibration date | Calibration due date |
|-------------|---------------|------------------|----------------------|
| S-25-A-W    | 110AMCL2      | 2022-01-10       | 2023-01-10           |
| S-25-A-W    | 110APO2K      | 2022-01-10       | 2023-01-10           |

Comment

|  |
|--|
|  |
|--|



®

**American  
Petroleum  
Institute**



2018-151 | Digital

## Certificate of Authority to use the Official API Monogram

**License Number: 7K-0519**

**ORIGINAL**

The American Petroleum Institute hereby grants to

**GATES ENGINEERING AND SERVICES**  
**7603 Prairie Oak Drive, Suite 190**  
**Houston, TX**  
**United States**

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and **API-7K** and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram shall be used in conjunction with this certificate number: **7K-0519**

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following: High Pressure Mud and Cement Hoses at FSL 0, at FSL 1, at FSL 2

QMS Exclusions: Servicing

**Effective Date: DECEMBER 18, 2021**

**Expiration Date: DECEMBER 18, 2024**

To verify the authenticity of this license, go to [www.api.org/compositelist](http://www.api.org/compositelist).

Vice President of Product Management





®

**American  
Petroleum  
Institute**



2018-151 | Digital

## Certificate of Authority to use the Official API Monogram

**License Number: 16C-0485**

**ORIGINAL**

The American Petroleum Institute hereby grants to

**GATES ENGINEERING AND SERVICES**  
**7603 Prairie Oak Drive, Suite 190**  
**Houston, TX**  
**United States**

the right to use the Official API Monogram® on manufactured products under the conditions in the official publications of the American Petroleum Institute entitled API Spec Q1® and **API-16C** and in accordance with the provisions of the License Agreement.

In all cases where the Official API Monogram is applied, the API Monogram shall be used in conjunction with this certificate number: **16C-0485**

The American Petroleum Institute reserves the right to revoke this authorization to use the Official API Monogram for any reason satisfactory to the Board of Directors of the American Petroleum Institute.

The scope of this license includes the following: Flexible Choke and Kill Lines at FSL 0, FSL 1, FSL 2, FSL 3

QMS Exclusions: Servicing

**Effective Date: DECEMBER 18, 2021**

**Expiration Date: DECEMBER 18, 2024**

To verify the authenticity of this license, go to [www.api.org/compositelist](http://www.api.org/compositelist).

Vice President of Product Management



REGISTRATION NO. Q1-3650

# Certificate of Registration

The American Petroleum Institute certifies that the quality management system of

**GATES ENGINEERING AND SERVICES**  
**7603 Prairie Oak Drive, Suite 190**  
**Houston, TX**  
**United States**

has been assessed by the American Petroleum Institute and found to be in conformance with the following:

## API Spec Q1, 9th Edition

The scope of this registration and the approved quality management system applies to the:

**Assembly and Pressure Test of High Pressure Mud and Cement Hoses, Flexible Choke and Kill Lines, and General Rubber Hydraulic Hose Assemblies**

API approves the organization's justification for excluding:

**Servicing**




**Effective Date: DECEMBER 18, 2021**  
**Expiration Date: DECEMBER 18, 2024**  
**Registered Since: DECEMBER 18, 2018**

Vice President of Product Management

This certificate is valid for the period specified herein. The registered organization must continually meet all requirements of API Spec Q1, *Specification for Quality Management System Requirements for Manufacturing Organizations for the Petroleum and Natural Gas Industry*, and the requirements of the Registration Agreement. Registration is maintained and regularly monitored through annual full system audits. This certificate has been issued from API offices located at 200 Massachusetts Avenue, NW Suite 1100, Washington, DC 20001-5571, U.S.A. It is the property of API, and must be returned upon request. **To verify the authenticity of this certificate, go to [www.api.org/compositelist](http://www.api.org/compositelist).**

® 2021-164 | 10.21 | Digital

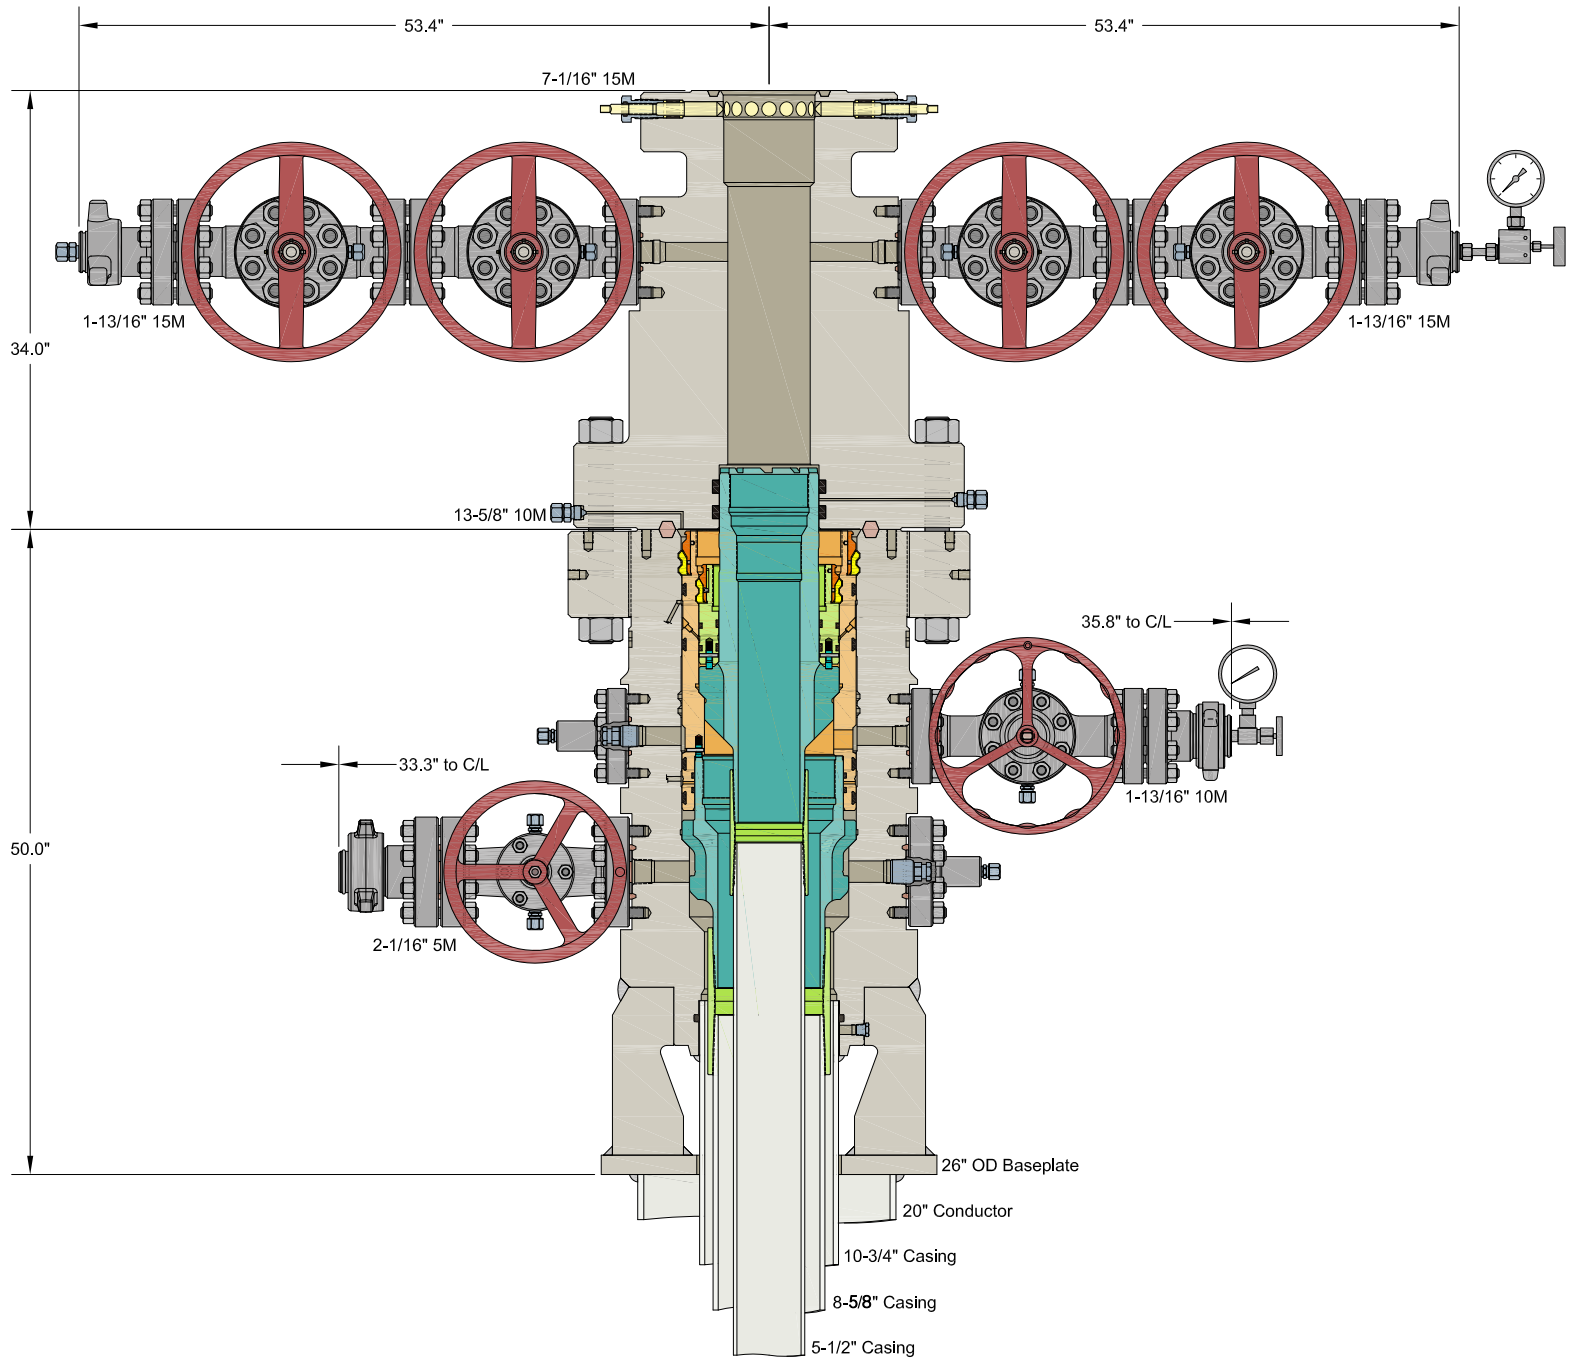

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

ALL DIMENSIONS APPROXIMATE

## CACTUS WELLHEAD LLC

## EOG RESOURCES

10-3/4" x 8-5/8" x 5-1/2" MBU-3T-SF-SOW Wellhead System  
With 8-5/8" & 5-1/2" Pin Bottom Mandrel Casing Hangers  
And 13-5/8" 10M x 7-1/16" 15M CTH-DBLHPS Tubing Head

|             |          |         |
|-------------|----------|---------|
| DRAWN       | DLE      | 14APR21 |
| APPRV       |          |         |
| DRAWING NO. | SDT-3141 |         |



## Offline Intermediate Cementing Procedure

2/24/2022

**Cement Program**

1. No changes to the cement program will take place for offline cementing.

**Summarized Operational Procedure for Intermediate Casing**

1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment back pressure valves.
  - a. Float equipment is equipped with two back pressure valves rated to a minimum of 5,000 psi.
2. Land production casing on mandrel hanger through BOP.
  - a. If casing is unable to be landed with a mandrel hanger, then the **casing will be cemented online**.
3. Break circulation and confirm no restrictions.
  - a. Ensure no blockage of float equipment and appropriate annular returns.
  - b. Perform flow check to confirm well is static.
4. Set pack-off
  - a. If utilizing a fluted/ported mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid, remove landing joint, and set annular packoff through BOP. Pressure test to 5,000 psi for 10 min.
  - b. If utilizing a solid mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid. Pressure test seals to 5,000 psi for 10 min. Remove landing joint through BOP.
5. After confirmation of both annular barriers and the two casing barriers, install TA plug and pressure test to 5,000 psi for 10 min. Notify the BLM with intent to proceed with nipple down and offline cementing.
  - a. Minimum 4 hrs notice.
6. With the well secured and BLM notified, nipple down BOP and secure on hydraulic carrier or cradle.
  - a. **Note, if any of the barriers fail to test, the BOP stack will not be nipped down until after the cement job has concluded and both lead and tail slurry have reached 500 psi.**
7. Skid/Walk rig off current well.
8. Confirm well is static before removing TA Plug.
  - a. Cementing operations will not proceed until well is under control. (If well is not static, notify BLM and proceed to kill)
  - b. Casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing.
  - c. Well control plan can be seen in Section B, Well Control Procedures.
  - d. If need be, rig can be moved back over well and BOP nipped back up for any further remediation.



## Offline Intermediate Cementing Procedure

2/24/2022

- e. Diagram for rig positioning relative to offline cementing can be seen in Figure 4.
9. Rig up return lines to take returns from wellhead to pits and rig choke.
  - a. Test all connections and lines from wellhead to choke manifold to 5,000 psi high for 10 min.
  - b. If either test fails, perform corrections and retest before proceeding.
  - c. Return line schematics can be seen in Figure 3.
10. Remove TA Plug from the casing.
11. Install offline cement tool.
  - a. Current offline cement tool schematics can be seen in Figure 1 (Cameron) and Figure 2 (Cactus).
12. Rig up cement head and cementing lines.
  - a. Pressure test cement lines against cement head to 80% of casing burst for 10 min.
13. Break circulation on well to confirm no restrictions.
  - a. If gas is present on circulation, well will be shut in and returns rerouted through gas buster.
  - b. Max anticipated time before circulating with cement truck is 6 hrs.
14. Pump cement job as per plan.
  - a. At plug bump, test casing to 0.22 psi/ft or 1500 psi, whichever is greater.
  - b. If plug does not bump on calculated, shut down and wait 8 hrs or 500 psi compressive strength, whichever is greater before testing casing.
15. Confirm well is static and floats are holding after cement job.
  - a. With floats holding and backside static:
    - i. Remove cement head.
  - b. If floats are leaking:
    - i. Shut-in well and WOC (Wait on Cement) until tail slurry reaches 500 psi compressive strength and the casing is static prior to removing cement head.
  - c. If there is flow on the backside:
    - i. Shut in well and WOC until tail slurry reaches 500 psi compressive strength. Ensure that the casing is static prior to removing cement head.
16. Remove offline cement tool.
17. Install night cap with pressure gauge for monitoring.
18. Test night cap to 5,000 psi for 10 min.



Offline Intermediate Cementing Procedure

2/24/2022

## Example Well Control Plan Content

### A. Well Control Component Table

The table below, which covers the cementing of the **5M MASP (Maximum Allowable Surface Pressure) portion of the well**, outlines the well control component rating in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the BOP nipped up to the wellhead.

Intermediate hole section, 5M requirement

| Component                | RWP |
|--------------------------|-----|
| Pack-off                 | 10M |
| Casing Wellhead Valves   | 10M |
| Annular Wellhead Valves  | 5M  |
| TA Plug                  | 10M |
| Float Valves             | 5M  |
| 2" 1502 Lo-Torque Valves | 15M |

### B. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while circulating and cementing through the Offline Cement Adapter.

#### General Procedure While Circulating

1. Sound alarm (alert crew).
2. Shut down pumps.
3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
4. Confirm shut-in.
5. Notify tool pusher/company representative.





## Offline Intermediate Cementing Procedure

2/24/2022

6. Read and record the following:
  - a. SICP (Shut in Casing Pressure) and AP (Annular Pressure)
  - b. Pit gain
  - c. Time
  - d. Regroup and identify forward plan to continue circulating out kick via rig choke and mud/gas separator. Circulate and adjust mud density as needed to control well.

### General Procedure While Cementing

1. Sound alarm (alert crew).
2. Shut down pumps.
3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
4. Confirm shut-in.
5. Notify tool pusher/company representative.
6. Open rig choke and begin pumping again taking returns through choke manifold and mud/gas separator.
7. Continue to place cement until plug bumps.
8. At plug bump close rig choke and cement head.
9. Read and record the following
  - a. SICP and AP
  - b. Pit gain
  - c. Time
  - d. Shut-in annulus valves on wellhead

### General Procedure After Cementing


1. Sound alarm (alert crew).
2. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
3. Confirm shut-in.
4. Notify tool pusher/company representative.
5. Read and record the following:
  - a. SICP and AP
  - b. Pit gain
  - c. Time
  - d. Shut-in annulus valves on wellhead



## Offline Intermediate Cementing Procedure

2/24/2022

Figure 1: Cameron TA Plug and Offline Adapter Schematic

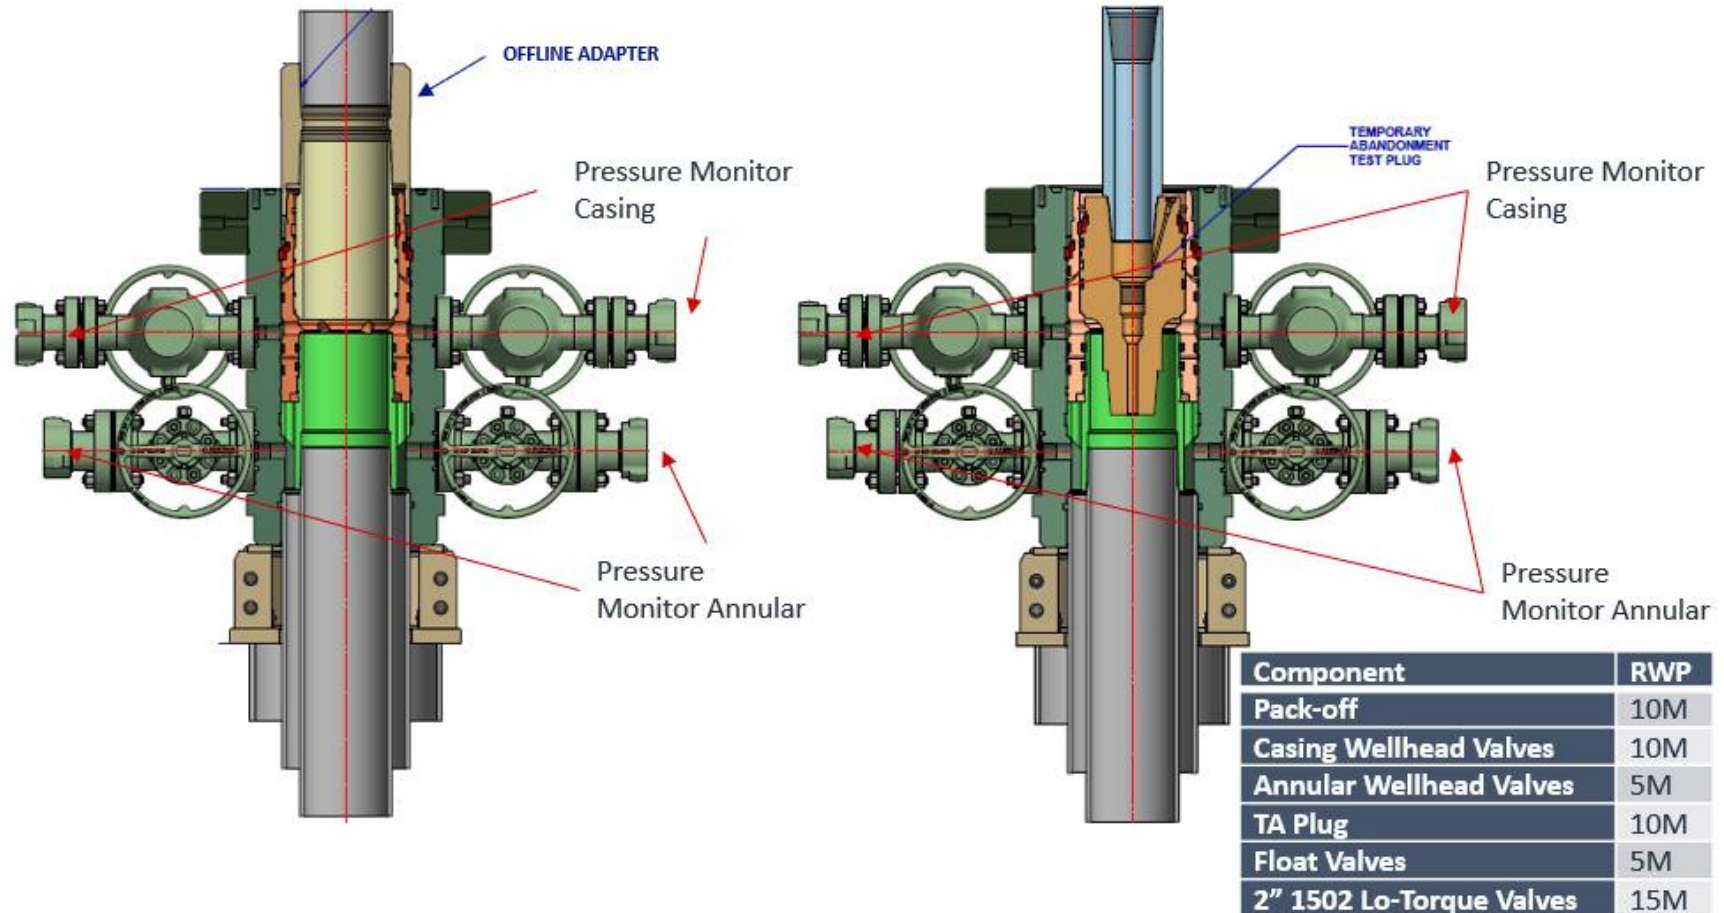




## Offline Intermediate Cementing Procedure

2/24/2022

Figure 2: Cactus TA Plug and Offline Adapter Schematic

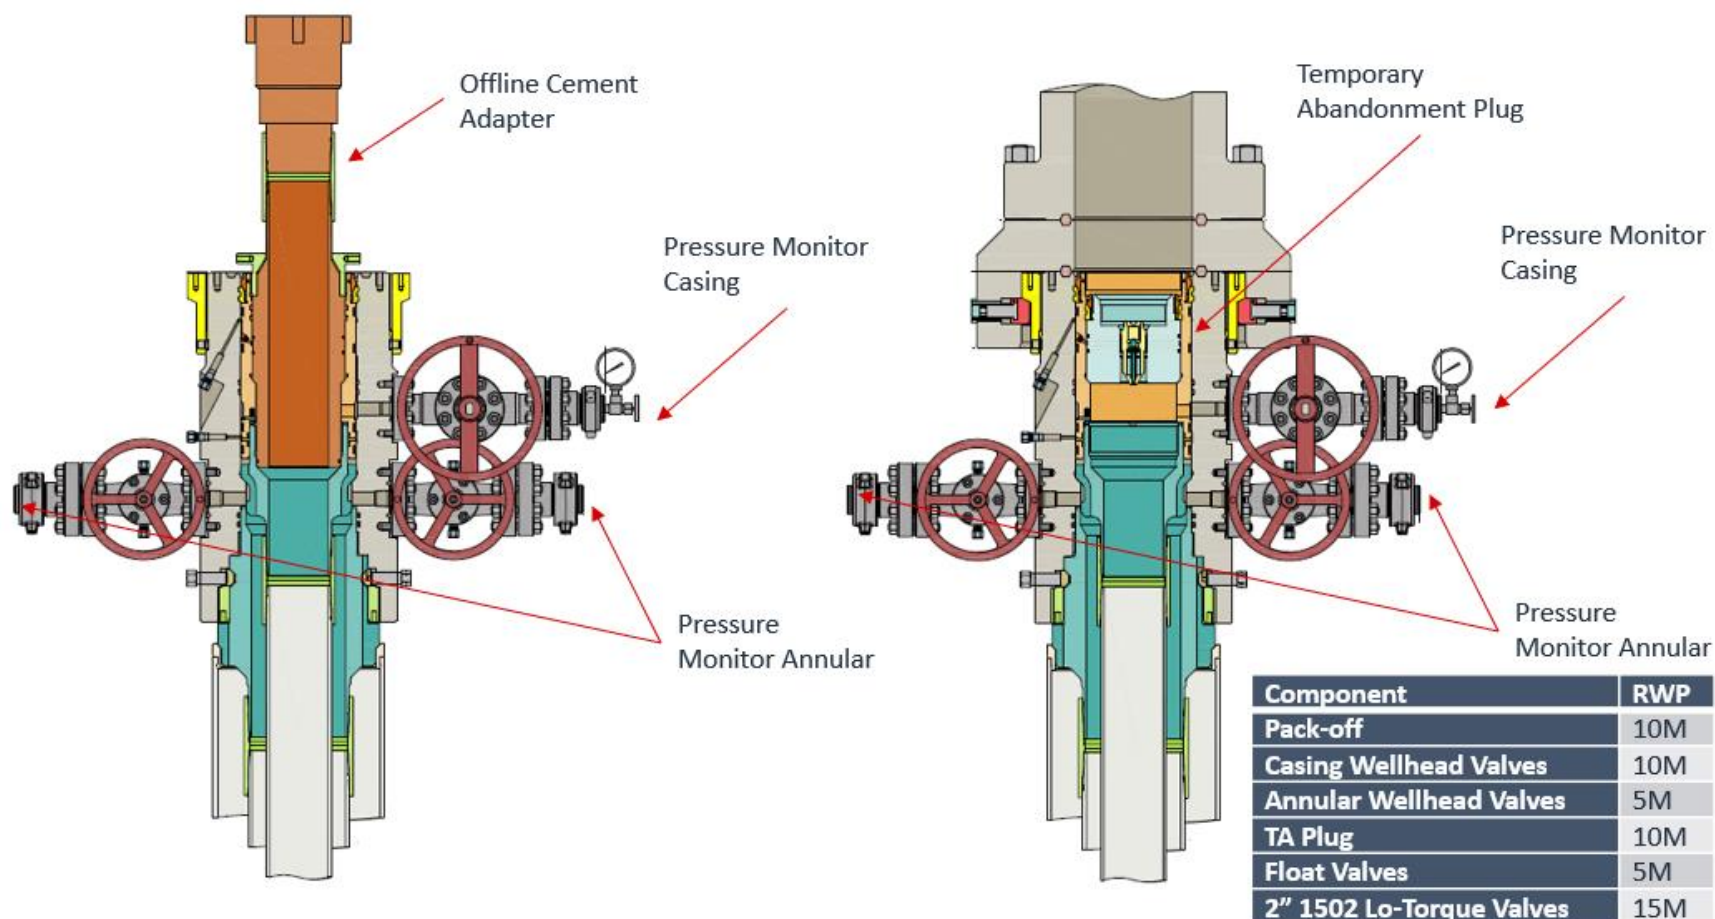




## Offline Intermediate Cementing Procedure

2/24/2022

Figure 3: Back Yard Rig Up

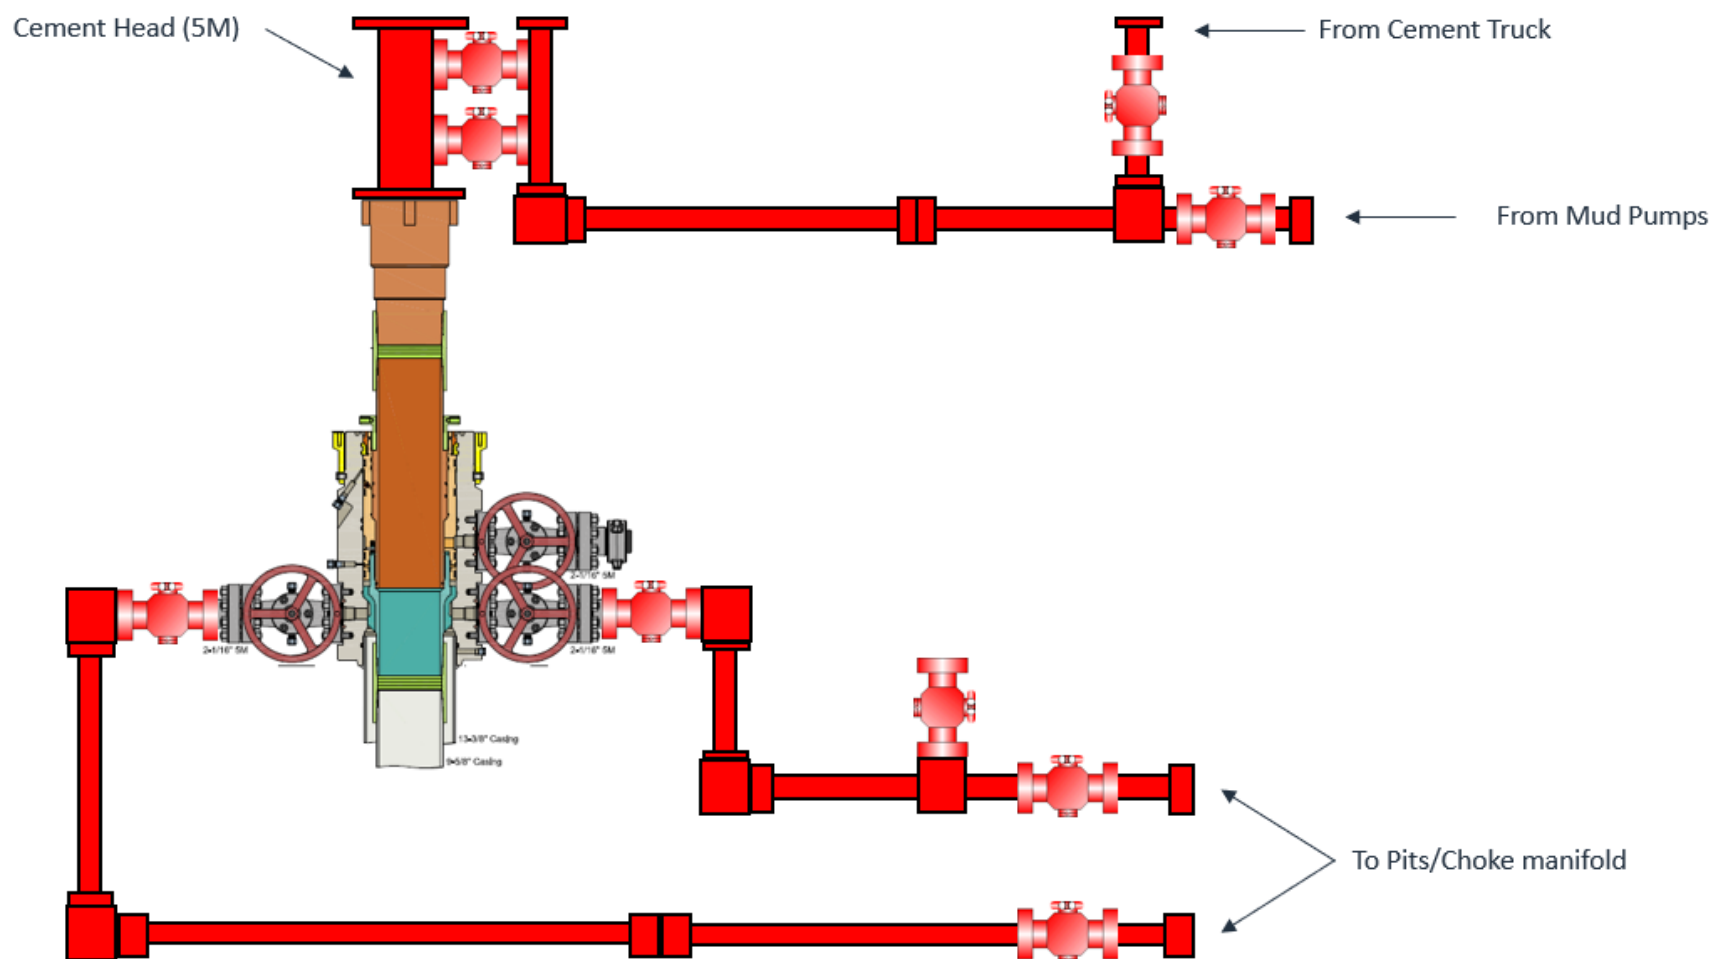


\*\*\* All Lines 10M rated working pressure



Offline Intermediate Cementing Procedure

2/24/2022

Figure 4: Rig Placement Diagram

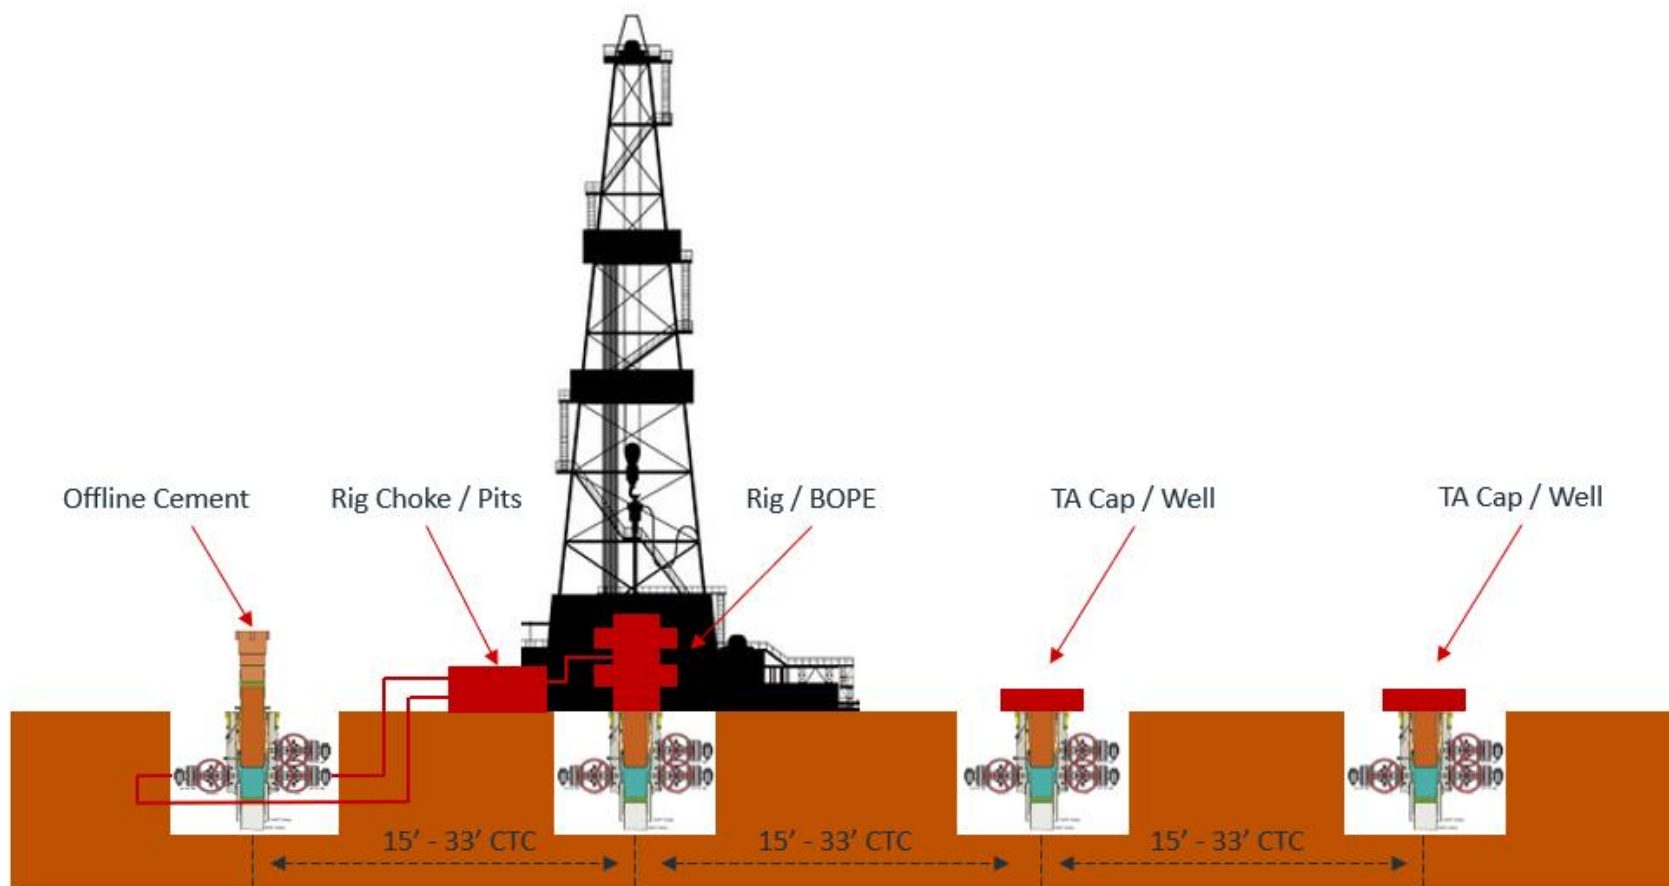



## EOG BLANKET CASING DESIGN VARIANCE

EOG respectfully requests the drill plans in the attached document 'EOG Alternate Casing Designs – BLM APPROVED' be added to the COA's for this well. These designs have been approved by the BLM down to the TVDs listed below and will allow EOG to run alternate casing designs for this well if necessary.

The designs and associated details listed are the "worst case scenario" boundaries for design safety factors. Location and lithology have NOT been accounted for in these designs. The specific well details will be based on the APD/Sundry package and the information listed in the COA.

The mud program will not change from the original design for this well. Summary of the mud programs for both shallow and deep targets are listed at the end of this document. If the target is changing, a sundry will be filed to update the casing design and mud/cement programs.

Cement volumes listed in this document are for reference only. The cement volumes for the specific well will be adjusted to ensure cement tops meet BLM requirements as listed in the COA and to allow bradenhead cementing when applicable.

This blanket document only applies to wells with three string designs outside of Potash and Capitan Reef boundaries.

| <b>Shallow Design Boundary Conditions</b> |                 |                  |               |                     |
|-------------------------------------------|-----------------|------------------|---------------|---------------------|
|                                           | Deepest MD (ft) | Deepest TVD (ft) | Max Inc (deg) | Max DLS (°/100usft) |
| Surface                                   | 2030            | 2030             | 0             | 0                   |
| Intermediate                              | 7793            | 5650             | 40            | 8                   |
| Production                                | 28578           | 11225            | 90            | 25                  |





## Shallow Design A

### 1. CASING PROGRAM

| Hole Size | Interval MD |         | Interval TVD |         | Csg OD  | Weight | Grade   | Conn        |
|-----------|-------------|---------|--------------|---------|---------|--------|---------|-------------|
|           | From (ft)   | To (ft) | From (ft)    | To (ft) |         |        |         |             |
| 16"       | 0           | 2,030   | 0            | 2,030   | 13-3/8" | 54.5#  | J-55    | STC         |
| 11"       | 0           | 7,793   | 0            | 5,650   | 9-5/8"  | 40#    | J-55    | LTC         |
| 6-3/4"    | 0           | 28,578  | 0            | 11,225  | 5-1/2"  | 20#    | P110-EC | DWC/C IS MS |

Hole will be full during casing run for well control and tensile SF factor. Casing will be kept at least half full during run for this design to meet BLM collapse SF requirement. External pressure will be reviewed prior to conducting casing pressure tests to ensure that 70% of the yield is not exceeded.

Variance is requested to waive the centralizer requirements for the 9-5/8" casing in the 11" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 11" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement for the intermediate (salt) section from Title 43 CFR Part 3170 under the following conditions:

- The variance is not applicable within the Potash Boundaries or Capitan Reef areas.
- Operator takes responsibility to get casing to set point in the event that the clearance causes stuck pipe issues.

### 2. CEMENTING PROGRAM:

| Depth             | No. Sacks | Wt. ppg | Yld Ft3/sk | Slurry Description                                                                                                                 |
|-------------------|-----------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------|
| 2,030'<br>13-3/8" | 570       | 13.5    | 1.73       | Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl <sub>2</sub> + 0.25 lb/sk Cello-Flake (TOC @ Surface)                               |
|                   | 160       | 14.8    | 1.34       | Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 1830')                                       |
| 7,793'<br>9-5/8"  | 770       | 12.7    | 2.22       | Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx (TOC @ Surface)                                                             |
|                   | 250       | 14.8    | 1.32       | Tail: Class C + 10% NaCl + 3% MagOx (TOC @ 6238')                                                                                  |
| 28,578'<br>5-1/2" | 410       | 10.5    | 3.21       | Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 7300')                                                         |
|                   | 1110      | 13.2    | 1.52       | Tail: Class H + 5% NEX-020 + 0.2% NAC-102 + 0.15% NAS-725 + 0.5% NFL-549 + 0.2% NFP-703 + 1% NBE-737 + 0.3% NRT-241 (TOC @ 12730') |




## Shallow Design A

## Proposed Wellbore

KB: 3558'

GL: 3533'

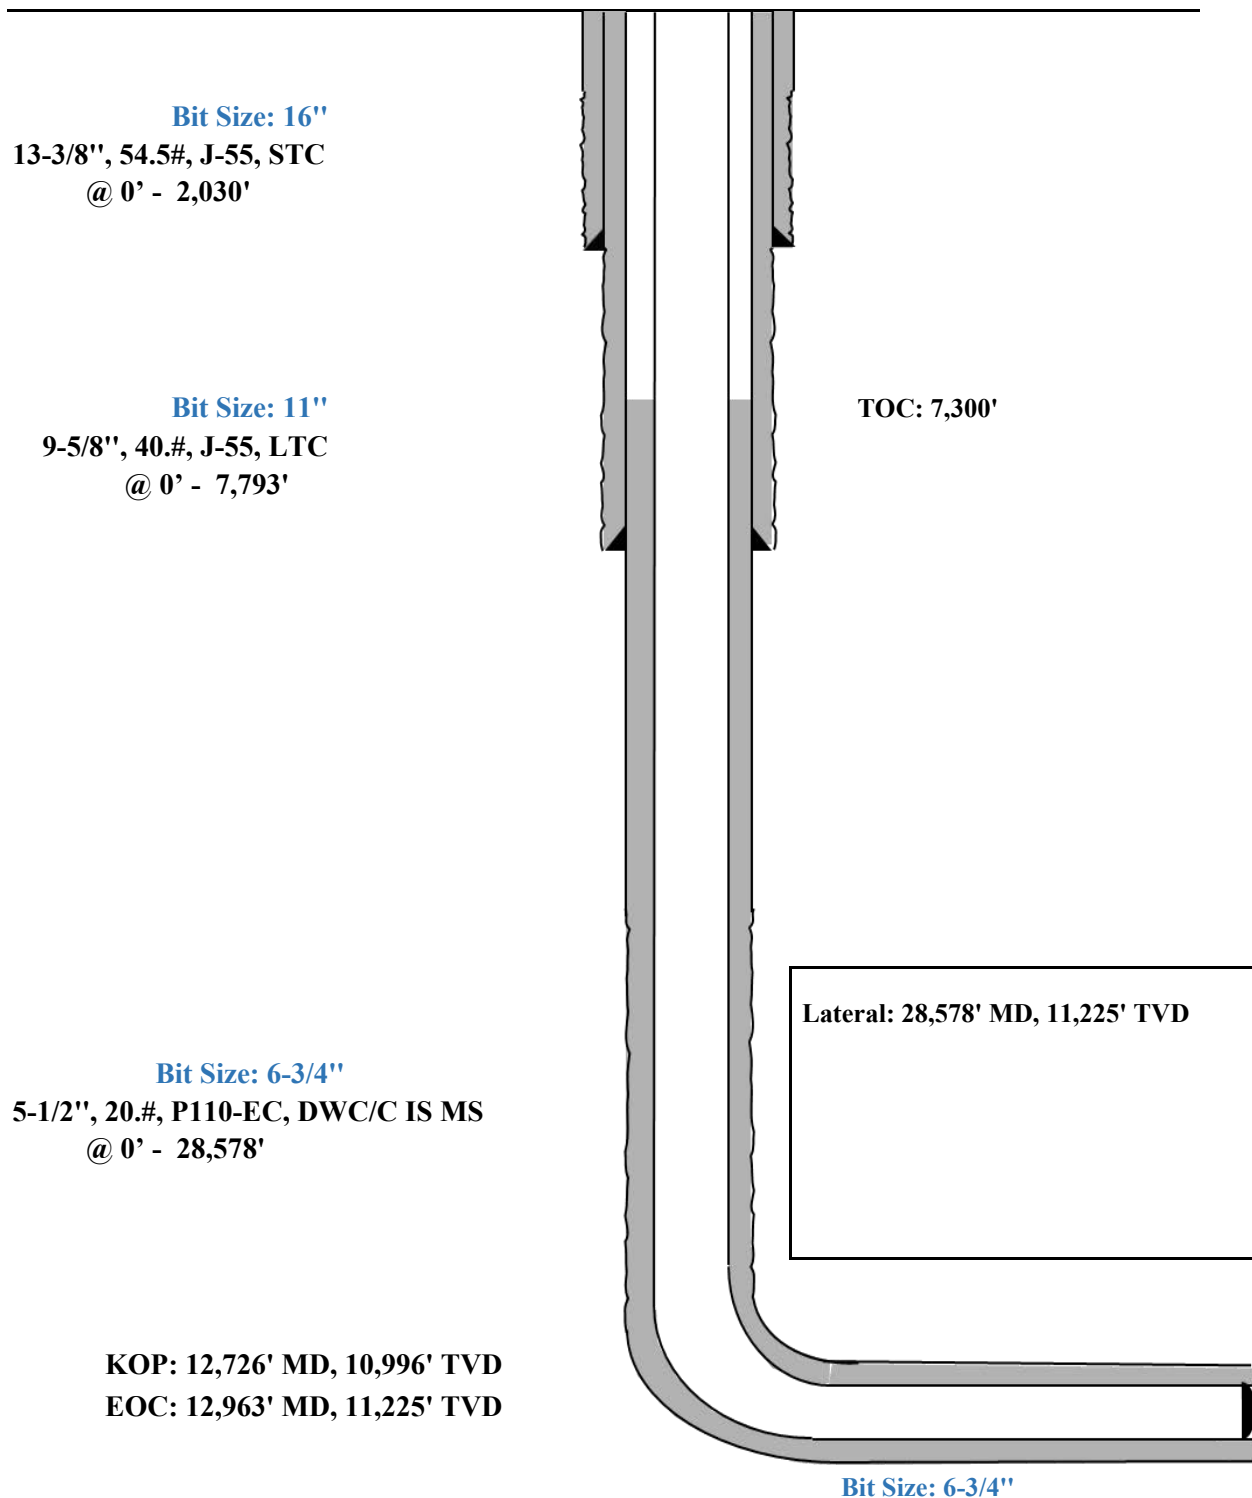


| Triaxial Results |                      |                         |                               |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
|------------------|----------------------|-------------------------|-------------------------------|--------------------------------|-------------------------------|------------------------|-------|--------------|---------|---------------------|----------------|----------|----------------------------------------|--------------------------|
|                  | Depth (MD)<br>(usft) | Axial Force (lbf)       |                               | Equivalent<br>Axial Load (lbf) | Bending Stress<br>at OD (psi) | Absolute Safety Factor |       |              |         | Temperature<br>(°F) | Pressure (psi) |          | Addtl Pickup To<br>Prevent Buck. (lbf) | Buckled<br>Length (usft) |
|                  |                      | Apparent<br>(w/Bending) | Actual<br>(w/o Bending)       |                                |                               | Triaxial               | Burst | Collapse (V) | Axial   |                     | Internal       | External |                                        |                          |
| 1                | 0                    | 252987                  | 228954                        | 253140                         | 2098.2                        | 1.69                   | 1.58  | N/A          | 2.82 F  | 70.00               | 2500.00        | 0.00     | N/A                                    | N/A                      |
| 2                | 100                  | 247735                  | 223702                        | 248466                         | 2098.2                        | 1.69                   | 1.58  | N/A          | 2.88 F  | 71.10               | 2543.63        | 43.63    |                                        |                          |
| 3                | 100                  | 234996                  | 223701                        | 235716                         | 986.2                         | 1.71                   | 1.58  | N/A          | 3.04 F  | 71.10               | 2543.64        | 43.64    |                                        |                          |
| 4                | 1700                 | 341565                  | 139667                        | 352253                         | 17627.2                       | 1.53                   | 1.57  | N/A          | 2.09 F  | 88.70               | 3241.64        | 741.64   |                                        |                          |
| 5                | 1700                 | 312979                  | 139666                        | 323488                         | 15131.5                       | 1.58                   | 1.57  | N/A          | 2.28 F  | 88.70               | 3241.65        | 741.65   |                                        |                          |
| 6                | 1850                 | 336881                  | 132027                        | 348440                         | 17885.2                       | 1.51                   | 1.57  | N/A          | 2.12 F  | 90.29               | 3305.05        | 805.05   |                                        |                          |
| 7                | 1850                 | 318549                  | 132027                        | 329984                         | 16284.8                       | 1.54                   | 1.57  | N/A          | 2.24 F  | 90.29               | 3305.06        | 805.06   |                                        |                          |
| 8                | 1950                 | 320468                  | 127243                        | 332475                         | 16869.9                       | 1.52                   | 1.57  | N/A          | 2.23 F  | 91.30               | 3344.87        | 844.87   |                                        |                          |
| 9                | 1950                 | 312802                  | 127243                        | 324756                         | 16200.7                       | 1.53                   | 1.57  | N/A          | 2.28 F  | 91.30               | 3344.87        | 844.87   |                                        |                          |
| 10               | 2050                 | 307858                  | 122773                        | 320295                         | 16159.3                       | 1.52                   | 1.57  | N/A          | 2.32 F  | 92.23               | 3381.89        | 881.89   |                                        |                          |
| 11               | 2050                 | 303560                  | 122772                        | 315965                         | 15784.1                       | 1.53                   | 1.57  | N/A          | 2.35 F  | 92.23               | 3381.89        | 881.89   |                                        |                          |
| 12               | 2300                 | 151294                  | 112633                        | 163658                         | 3375.4                        | 1.71                   | 1.57  | N/A          | 4.72 F  | 94.35               | 3466.13        | 966.13   |                                        |                          |
| 13               | 2300                 | 132741                  | 112633                        | 144956                         | 1755.6                        | 1.72                   | 1.57  | N/A          | 5.38 F  | 94.35               | 3466.14        | 966.14   |                                        |                          |
| 14               | 2370                 | 129966                  | 109858                        | 142452                         | 1755.6                        | 1.72                   | 1.57  | N/A          | 5.49 F  | 94.94               | 3489.28        | 989.28   |                                        |                          |
| 15               | 2370                 | 127909                  | 107800                        | 140922                         | 1755.6                        | 1.75                   | 1.60  | N/A          | 5.58 F  | 94.94               | 3489.29        | 1036.40  |                                        |                          |
| 16               | 2700                 | 105515                  | 94232                         | 119785                         | 985.1                         | 1.75                   | 1.60  | N/A          | 6.77 F  | 97.73               | 3599.97        | 1152.35  |                                        |                          |
| 17               | 2700                 | 111680                  | 94231                         | 126006                         | 1523.4                        | 1.75                   | 1.60  | N/A          | 6.39 F  | 97.73               | 3599.97        | 1152.35  |                                        |                          |
| 18               | 3100                 | 110766                  | 77783                         | 126839                         | 2879.6                        | 1.71                   | 1.60  | N/A          | 6.44 F  | 101.11              | 3734.23        | 1293.00  |                                        |                          |
| 19               | 3100                 | 97392                   | 77783                         | 113331                         | 1712.1                        | 1.73                   | 1.60  | N/A          | 7.33 F  | 101.11              | 3734.23        | 1293.01  |                                        |                          |
| 20               | 3700                 | 71565                   | 53303                         | 89806                          | 1594.4                        | 1.70                   | 1.61  | N/A          | 9.97 F  | 106.15              | 3934.24        | 1502.54  |                                        |                          |
| 21               | 3700                 | 60887                   | 53302                         | 79004                          | 662.3                         | 1.71                   | 1.61  | N/A          | 11.72 F | 106.16              | 3934.25        | 1502.55  |                                        |                          |
| 22               | 4650                 | 34671                   | 14219                         | 56495                          | 1785.6                        | 1.64                   | 1.61  | N/A          | 20.59 F | 114.20              | 4253.37        | 1836.86  |                                        |                          |
| 23               | 4900                 | 44595                   | 4828                          | 67626                          | 3472.0                        | 1.59                   | 1.61  | N/A          | 16.01 F | 116.32              | 4337.37        | 1924.87  |                                        |                          |
| 24               | 4900                 | 28975                   | 4828                          | 51775                          | 2108.2                        | 1.62                   | 1.61  | N/A          | 24.64 F | 116.32              | 4337.38        | 1924.87  |                                        |                          |
| 25               | 5029                 | 22103                   | 34                            | 45340                          | 1926.8                        | 1.61                   | 1.61  | N/A          | 32.30 F | 117.40              | 4380.40        | 1969.94  |                                        |                          |
| 26               | 5029                 | 22102                   | 33                            | 45339                          | 1926.8                        | 1.61                   | 1.61  | N/A          | 32.30 F | 117.40              | 4380.41        | 1969.95  |                                        |                          |
| 27               | 5600                 | -45329                  | -21341                        | -20805                         | 2094.3                        | 1.57                   | 1.62  | N/A          | (13.67) | 122.23              | 4572.11        | 2170.78  |                                        |                          |
| 28               | 5650                 | -40465                  | -23210                        | -15657                         | 1506.5                        | 1.58                   | 1.62  | N/A          | (15.31) | 122.66              | 4588.87        | 2188.34  |                                        |                          |
| 29               |                      |                         |                               |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 30               |                      | F                       | Conn Fracture                 |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 31               |                      | ( )                     | Compression                   |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 32               |                      | (V)                     | Vector Collapse Safety Factor |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 33               |                      |                         |                               |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |

9-5/8" Intermediate Casing Pressure Test:

Internal Profile based off Surface Pressure + Hydrostatic: 4589 psi

External Profile based off Pore Pressure: 2188 psi

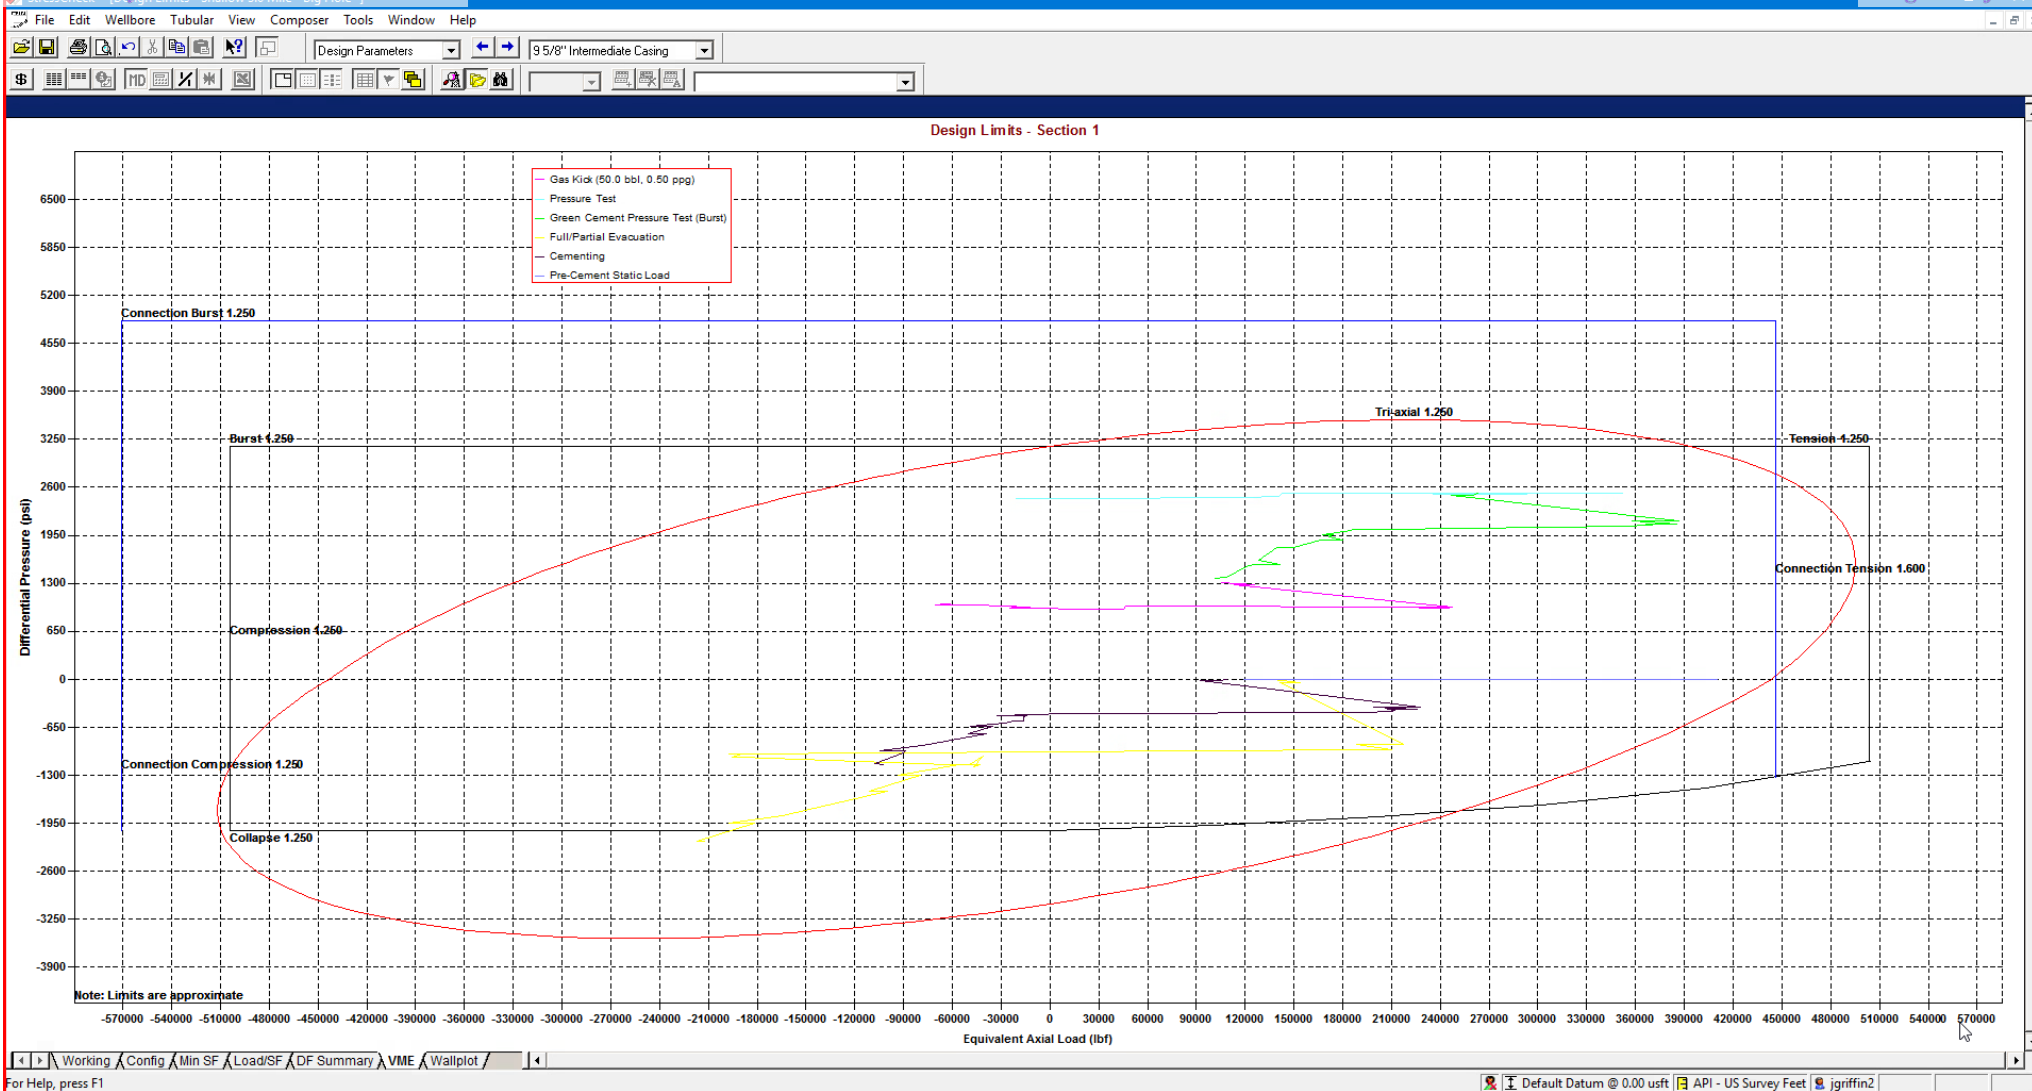


StressCheck - [String Summary - Shallow 3.0 Mile - Big Hole \*]

String Summary

|   | String                            | OD/Weight/Grade          | Connection | MD Interval (usft) | Drift Dia. (") | Minimum Safety Factor (Abs) |              |        |          | Design Cost (\$) |
|---|-----------------------------------|--------------------------|------------|--------------------|----------------|-----------------------------|--------------|--------|----------|------------------|
|   |                                   |                          |            |                    |                | Burst                       | Collapse (V) | Axial  | Triaxial |                  |
| 1 | Intermediate Casing               | 9 5/8", 40.000 ppf, J-55 | BTC, J-55  | 0.0-5650.0         | 8.750 A        | 1.57                        | 1.59         | 1.80 F | 1.35     | 98,141           |
| 2 |                                   |                          |            |                    |                |                             |              |        |          | Total = 98,141   |
| 3 |                                   |                          |            |                    |                |                             |              |        |          |                  |
| 4 | F Conn Fracture                   |                          |            |                    |                |                             |              |        |          |                  |
| 5 | A Alternate Drift                 |                          |            |                    |                |                             |              |        |          |                  |
| 6 | (V) Vector Collapse Safety Factor |                          |            |                    |                |                             |              |        |          |                  |
| 7 |                                   |                          |            |                    |                |                             |              |        |          |                  |

\*Modelling done with 9-5/8" 40# Intermediate Casing. Passes all Burst, Collapse and Tensile design criteria.

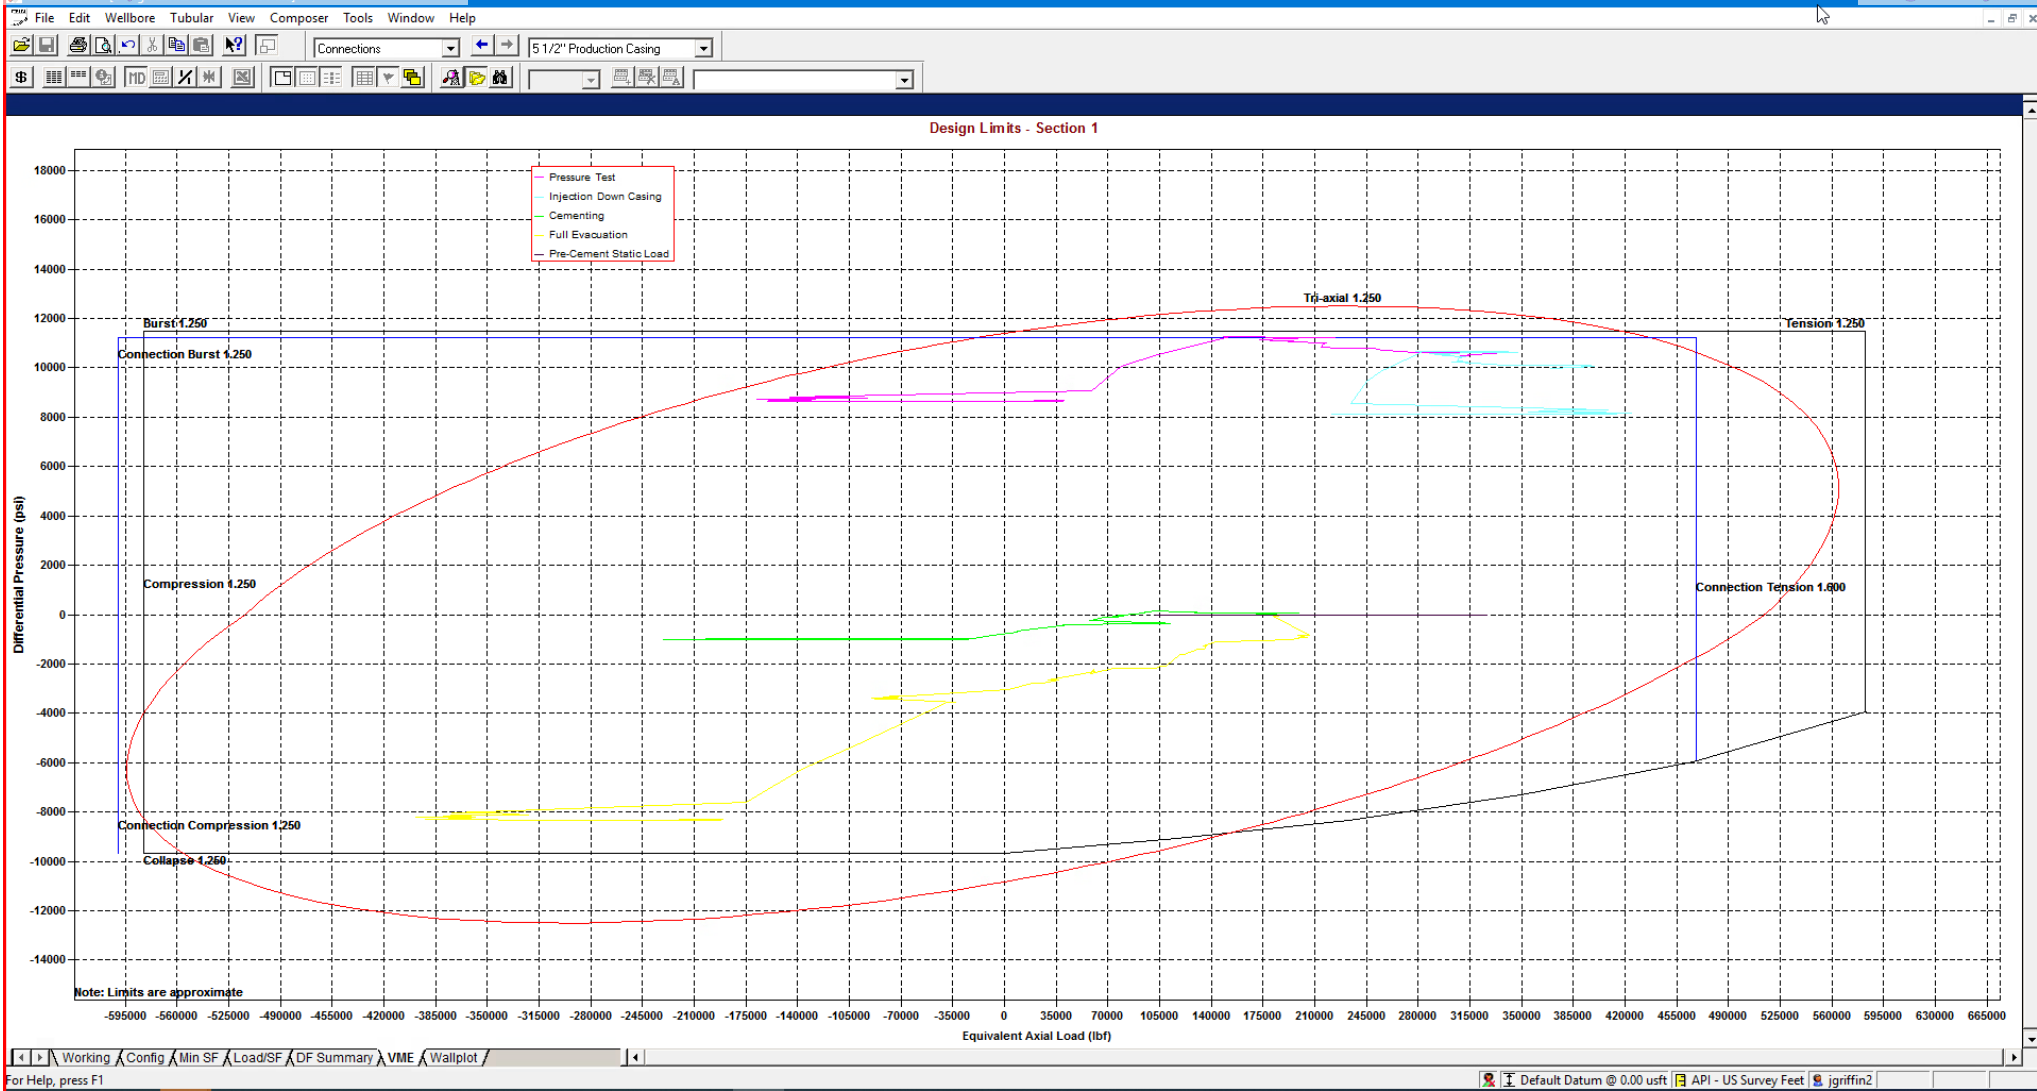

String Summary

|   | String                            | OD/Weight/Grade              | Connection    | MD Interval (usft) | Drift Dia. (") | Minimum Safety Factor (Abs) |              |        |          | Design Cost (\$) |
|---|-----------------------------------|------------------------------|---------------|--------------------|----------------|-----------------------------|--------------|--------|----------|------------------|
|   |                                   |                              |               |                    |                | Burst                       | Collapse (V) | Axial  | Triaxial |                  |
| 1 | Production Casing                 | 5 1/2", 20.000 ppf, P110 ICY | BTC, P110 ICY | 0.0-28578.0        | 4.653          | 1.27                        | 1.47         | 1.90 F | 1.35     | 446,902          |
| 2 |                                   |                              |               |                    |                |                             |              |        |          |                  |
| 3 |                                   |                              |               |                    |                |                             |              |        |          |                  |
| 4 | F Conn Fracture                   |                              |               |                    |                |                             |              |        |          |                  |
| 5 | ( ) Compression                   |                              |               |                    |                |                             |              |        |          |                  |
| 6 | (V) Vector Collapse Safety Factor |                              |               |                    |                |                             |              |        |          |                  |
| 7 |                                   |                              |               |                    |                |                             |              |        |          |                  |
|   |                                   |                              |               |                    |                |                             |              |        |          | Total = 446,902  |

\*Modelling done with 5-1/2" 20# Production Casing with a 125ksi Control Yield. Passes all Burst, Collapse and Tensile design criteria.



## Shallow Design B

### 1. CASING PROGRAM

| Hole Size | Interval MD |         | Interval TVD |         | Csg OD  | Weight | Grade   | Conn        |
|-----------|-------------|---------|--------------|---------|---------|--------|---------|-------------|
|           | From (ft)   | To (ft) | From (ft)    | To (ft) |         |        |         |             |
| 13-1/2"   | 0           | 2,030   | 0            | 2,030   | 10-3/4" | 40.5#  | J-55    | STC         |
| 9-7/8"    | 0           | 7,793   | 0            | 5,650   | 8-5/8"  | 32#    | J-55    | BTC-SC      |
| 6-3/4"    | 0           | 28,578  | 0            | 11,225  | 5-1/2"  | 20#    | P110-EC | DWC/C IS MS |

Hole will be full during casing run for well control and tensile SF factor. Casing will be kept at least half full during run for this design to meet BLM collapse SF requirement. External pressure will be reviewed prior to conducting casing pressure tests to ensure that 70% of the yield is not exceeded.

Variance is requested to waive the centralizer requirements for the 8-5/8" casing in the 9-7/8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 9-7/8" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement for the intermediate (salt) section from Title 43 CFR Part 3170 under the following conditions:

- The variance is not applicable within the Potash Boundaries or Capitan Reef areas.
- Operator takes responsibility to get casing to set point in the event that the clearance causes stuck pipe issues.

### 2. CEMENTING PROGRAM:

| Depth             | No. Sacks | Wt. ppg | Yld Ft3/sk | Slurry Description                                                                                                                 |
|-------------------|-----------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------|
| 2,030'<br>10-3/4" | 530       | 13.5    | 1.73       | Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl <sub>2</sub> + 0.25 lb/sk Cello-Flake (TOC @ Surface)                               |
|                   | 140       | 14.8    | 1.34       | Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 1830')                                       |
| 7,793'<br>8-5/8"  | 460       | 12.7    | 2.22       | Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx (TOC @ Surface)                                                             |
|                   | 210       | 14.8    | 1.32       | Tail: Class C + 10% NaCl + 3% MagOx (TOC @ 6238')                                                                                  |
| 28,578'<br>5-1/2" | 400       | 10.5    | 3.21       | Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 7300')                                                         |
|                   | 1110      | 13.2    | 1.52       | Tail: Class H + 5% NEX-020 + 0.2% NAC-102 + 0.15% NAS-725 + 0.5% NFL-549 + 0.2% NFP-703 + 1% NBE-737 + 0.3% NRT-241 (TOC @ 12730') |






## Shallow Design B

## Proposed Wellbore

KB: 3558'

GL: 3533'

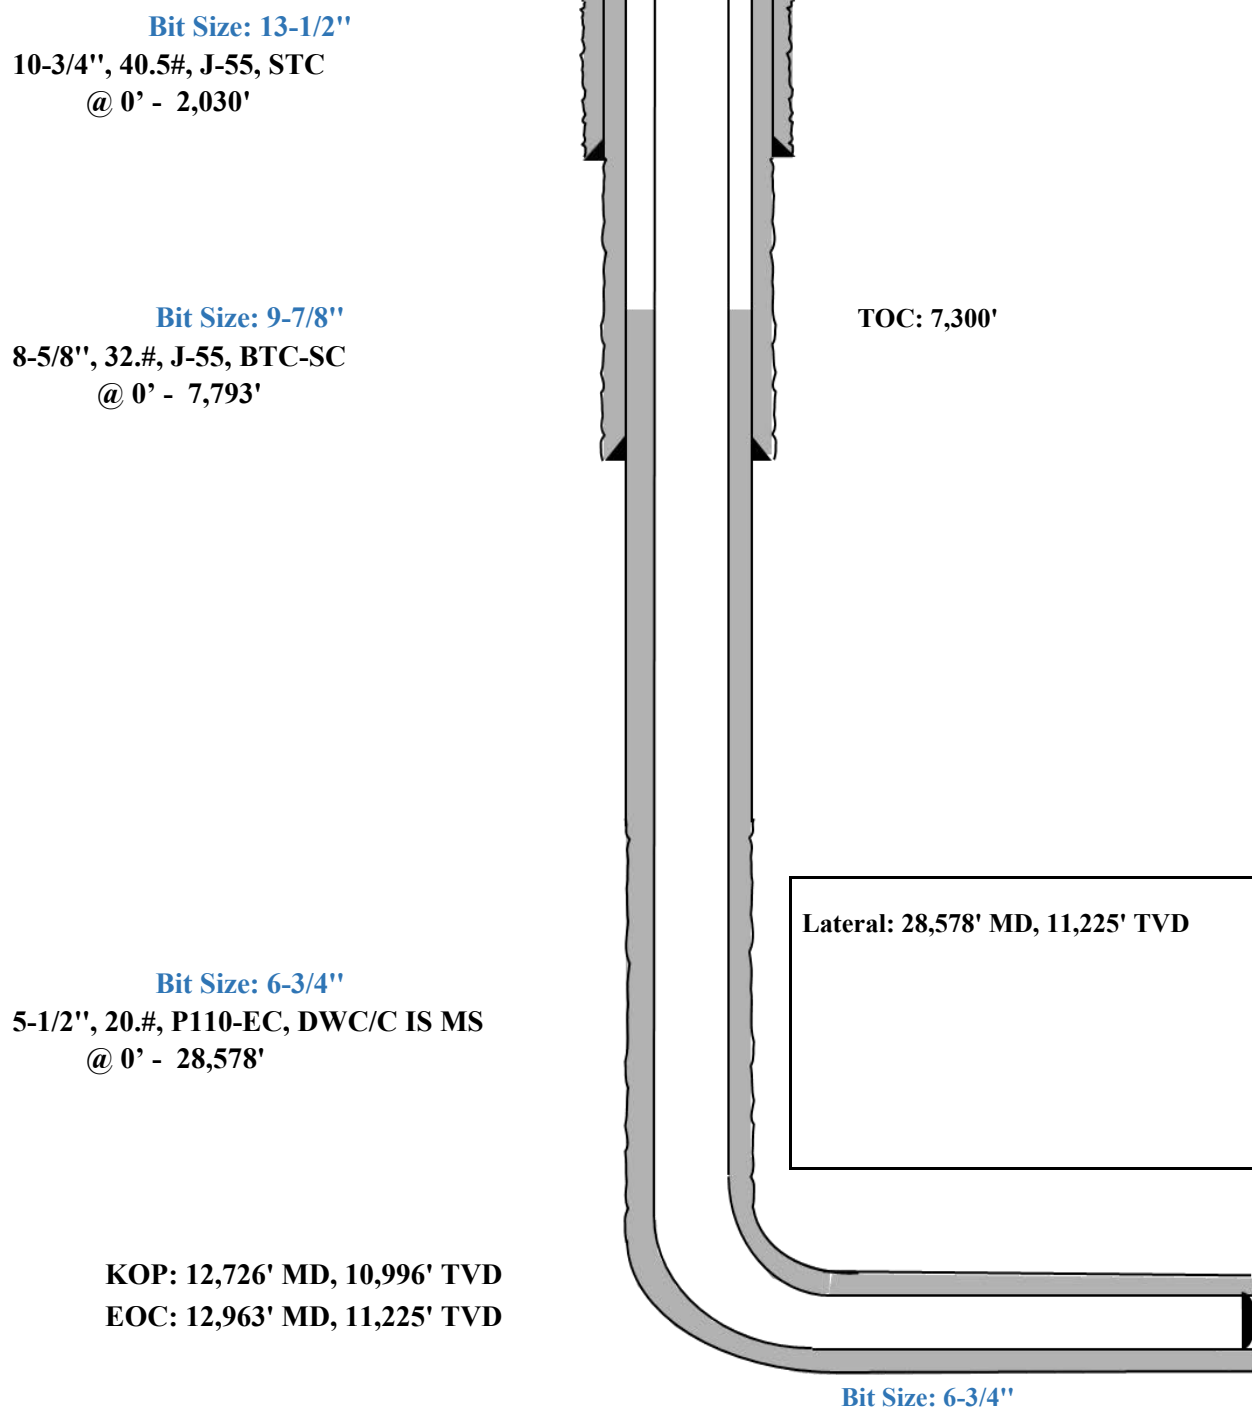

| StressCheck - [Triaxial Results - Shallow 3.0 Mile *]      |                      |                                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
|------------------------------------------------------------|----------------------|-----------------------------------|-------------------------|--------------------------------|-------------------------------|------------------------|-------|--------------|---------|---------------------|----------------|----------|----------------------------------------|--------------------------|
| File Edit Wellbore Tubular View Composer Tools Window Help |                      |                                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| Burst Design 8 5/8" Intermediate Casing Pressure Test      |                      |                                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| Triaxial Results                                           |                      |                                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
|                                                            | Depth (MD)<br>(usft) | Axial Force (lbf)                 |                         | Equivalent<br>Axial Load (lbf) | Bending Stress<br>at OD (psi) | Absolute Safety Factor |       |              |         | Temperature<br>(°F) | Pressure (psi) |          | Addtl Pickup To<br>Prevent Buck. (lbf) | Buckled<br>Length (usft) |
|                                                            |                      | Apparent<br>(w/Bending)           | Actual<br>(w/o Bending) |                                |                               | Triaxial               | Burst | Collapse (V) | Axial   |                     | Internal       | External |                                        |                          |
| 1                                                          | 0                    | 200426                            | 183224                  | 200546                         | 1880.2                        | 1.68                   | 1.57  | N/A          | 2.89 F  | 70.00               | 2500.00        | 0.00     | N/A                                    | N/A                      |
| 2                                                          | 100                  | 196229                            | 179028                  | 196812                         | 1880.2                        | 1.69                   | 1.57  | N/A          | 2.95 F  | 71.10               | 2543.63        | 43.63    |                                        |                          |
| 3                                                          | 100                  | 187111                            | 179027                  | 187686                         | 883.7                         | 1.70                   | 1.57  | N/A          | 3.10 F  | 71.10               | 2543.64        | 43.64    |                                        |                          |
| 4                                                          | 1700                 | 256401                            | 111891                  | 264835                         | 15795.8                       | 1.56                   | 1.56  | N/A          | 2.26 F  | 88.70               | 3241.64        | 741.64   |                                        |                          |
| 5                                                          | 1700                 | 235940                            | 111891                  | 244247                         | 13559.4                       | 1.60                   | 1.56  | N/A          | 2.45 F  | 88.70               | 3241.65        | 741.65   |                                        |                          |
| 6                                                          | 1850                 | 252413                            | 105788                  | 261533                         | 16027.0                       | 1.54                   | 1.56  | N/A          | 2.29 F  | 90.29               | 3305.05        | 805.05   |                                        |                          |
| 7                                                          | 1850                 | 239292                            | 105787                  | 248323                         | 14592.9                       | 1.56                   | 1.56  | N/A          | 2.42 F  | 90.29               | 3305.06        | 805.06   |                                        |                          |
| 8                                                          | 1950                 | 240267                            | 101966                  | 249748                         | 15117.2                       | 1.54                   | 1.56  | N/A          | 2.41 F  | 91.30               | 3344.87        | 844.87   |                                        |                          |
| 9                                                          | 1950                 | 234781                            | 101965                  | 244223                         | 14517.5                       | 1.56                   | 1.56  | N/A          | 2.47 F  | 91.30               | 3344.87        | 844.87   |                                        |                          |
| 10                                                         | 2050                 | 230871                            | 98395                   | 240694                         | 14480.4                       | 1.55                   | 1.56  | N/A          | 2.51 F  | 92.23               | 3381.89        | 881.89   |                                        |                          |
| 11                                                         | 2050                 | 227794                            | 98394                   | 237594                         | 14144.2                       | 1.55                   | 1.56  | N/A          | 2.54 F  | 92.23               | 3381.89        | 881.89   |                                        |                          |
| 12                                                         | 2300                 | 117966                            | 90294                   | 127818                         | 3024.7                        | 1.70                   | 1.56  | N/A          | 4.91 F  | 94.35               | 3466.13        | 966.13   |                                        |                          |
| 13                                                         | 2300                 | 104686                            | 90293                   | 114432                         | 1573.2                        | 1.71                   | 1.56  | N/A          | 5.53 F  | 94.35               | 3466.14        | 966.14   |                                        |                          |
| 14                                                         | 2370                 | 102469                            | 88077                   | 112431                         | 1573.2                        | 1.71                   | 1.56  | N/A          | 5.65 F  | 94.94               | 3489.28        | 989.28   |                                        |                          |
| 15                                                         | 2370                 | 100817                            | 86424                   | 111200                         | 1573.2                        | 1.75                   | 1.59  | N/A          | 5.75 F  | 94.94               | 3489.29        | 1036.40  |                                        |                          |
| 16                                                         | 2700                 | 83660                             | 75583                   | 95052                          | 882.8                         | 1.74                   | 1.59  | N/A          | 6.92 F  | 97.73               | 3599.97        | 1152.35  |                                        |                          |
| 17                                                         | 2700                 | 88072                             | 75583                   | 99504                          | 1365.1                        | 1.74                   | 1.59  | N/A          | 6.58 F  | 97.73               | 3599.97        | 1152.35  |                                        |                          |
| 18                                                         | 3100                 | 86049                             | 62442                   | 98863                          | 2580.4                        | 1.71                   | 1.59  | N/A          | 6.73 F  | 101.11              | 3734.23        | 1293.00  |                                        |                          |
| 19                                                         | 3100                 | 76477                             | 62441                   | 89195                          | 1534.2                        | 1.72                   | 1.59  | N/A          | 7.57 F  | 101.11              | 3734.23        | 1293.01  |                                        |                          |
| 20                                                         | 3700                 | 55953                             | 42882                   | 70509                          | 1428.8                        | 1.69                   | 1.60  | N/A          | 10.35 F | 106.15              | 3934.24        | 1502.54  |                                        |                          |
| 21                                                         | 3700                 | 48311                             | 42881                   | 62778                          | 593.5                         | 1.71                   | 1.60  | N/A          | 11.99 F | 106.16              | 3934.25        | 1502.55  |                                        |                          |
| 22                                                         | 4000                 | 41458                             | 33043                   | 56865                          | 919.9                         | 1.69                   | 1.60  | N/A          | 13.97 F | 108.69              | 4034.82        | 1607.91  |                                        |                          |
| 23                                                         | 4650                 | 26293                             | 11655                   | 43706                          | 1600.1                        | 1.63                   | 1.60  | N/A          | 22.03 F | 114.20              | 4253.37        | 1836.86  |                                        |                          |
| 24                                                         | 4900                 | 32619                             | 4156                    | 50970                          | 3111.2                        | 1.59                   | 1.60  | N/A          | 17.76 F | 116.32              | 4337.37        | 1924.87  |                                        |                          |
| 25                                                         | 4900                 | 21439                             | 4155                    | 39625                          | 1889.2                        | 1.61                   | 1.60  | N/A          | 27.02 F | 116.32              | 4337.38        | 1924.87  |                                        |                          |
| 26                                                         | 5039                 | 15822                             | 26                      | 34389                          | 1726.6                        | 1.61                   | 1.61  | N/A          | 36.61 F | 117.49              | 4383.77        | 1973.48  |                                        |                          |
| 27                                                         | 5039                 | 15822                             | 26                      | 34388                          | 1726.6                        | 1.61                   | 1.61  | N/A          | 36.61 F | 117.49              | 4383.78        | 1973.49  |                                        |                          |
| 28                                                         | 5600                 | -33912                            | -16743                  | -14286                         | 1876.7                        | 1.57                   | 1.61  | N/A          | (14.60) | 122.23              | 4572.11        | 2170.78  |                                        |                          |
| 29                                                         | 5650                 | -30585                            | -18235                  | -10742                         | 1350.0                        | 1.58                   | 1.61  | N/A          | (16.18) | 122.66              | 4588.87        | 2188.34  |                                        |                          |
| 30                                                         |                      |                                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 31                                                         |                      | F Conn Fracture                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 32                                                         |                      | ( ) Compression                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 33                                                         |                      | (V) Vector Collapse Safety Factor |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 34                                                         |                      |                                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |


Working Config Min SF Load/SF DF Summary VME Wallplot

For Help, press F1 Default Datum @ 0.00 usft API - US Survey Feet jgriffin2

8-5/8" Intermediate Casing Pressure Test:

Internal Profile based off Surface Pressure + Hydrostatic: 4589 psi

External Profile based off Pore Pressure: 2188 psi

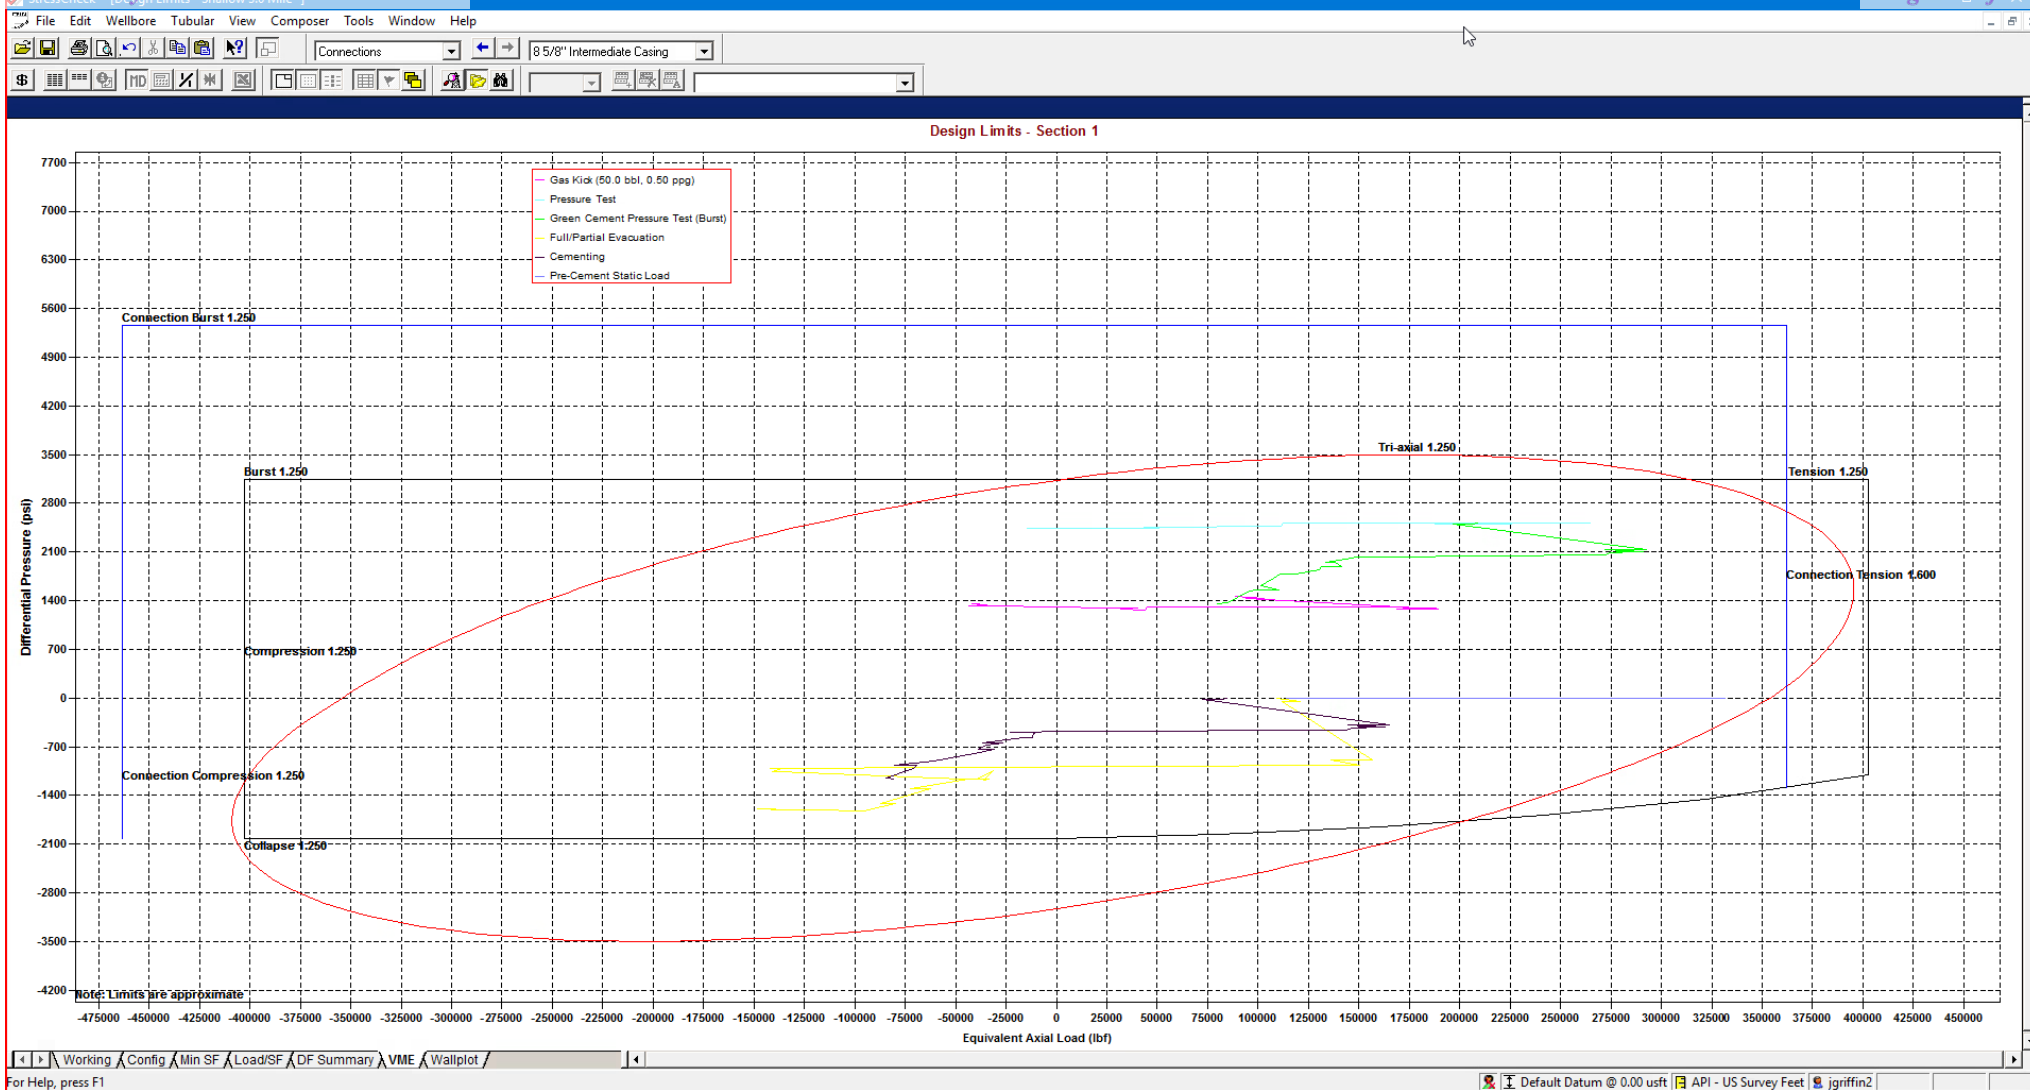


StressCheck - [String Summary - Shallow 3.0 Mile \*]

String Summary

|   | String                            | OD/Weight/Grade          | Connection | MD Interval (usft) | Drift Dia. (") | Minimum Safety Factor (Abs) |              |        |          | Design Cost (\$) |
|---|-----------------------------------|--------------------------|------------|--------------------|----------------|-----------------------------|--------------|--------|----------|------------------|
|   |                                   |                          |            |                    |                | Burst                       | Collapse (V) | Axial  | Triaxial |                  |
| 1 | Intermediate Casing               | 8 5/8", 32.000 ppg, J-55 | BTC, J-55  | 0.0-5650.0         | 7.875 A        | 1.56                        | 1.57         | 1.81 F | 1.34     | 80,117           |
| 2 |                                   |                          |            |                    |                |                             |              |        |          | Total = 80,117   |
| 3 |                                   |                          |            |                    |                |                             |              |        |          |                  |
| 4 | F Conn Fracture                   |                          |            |                    |                |                             |              |        |          |                  |
| 5 | A Alternate Drift                 |                          |            |                    |                |                             |              |        |          |                  |
| 6 | (V) Vector Collapse Safety Factor |                          |            |                    |                |                             |              |        |          |                  |
| 7 |                                   |                          |            |                    |                |                             |              |        |          |                  |

\*Modelling done with 8-5/8" 32# Intermediate Casing. Passes all Burst, Collapse and Tensile design criteria.

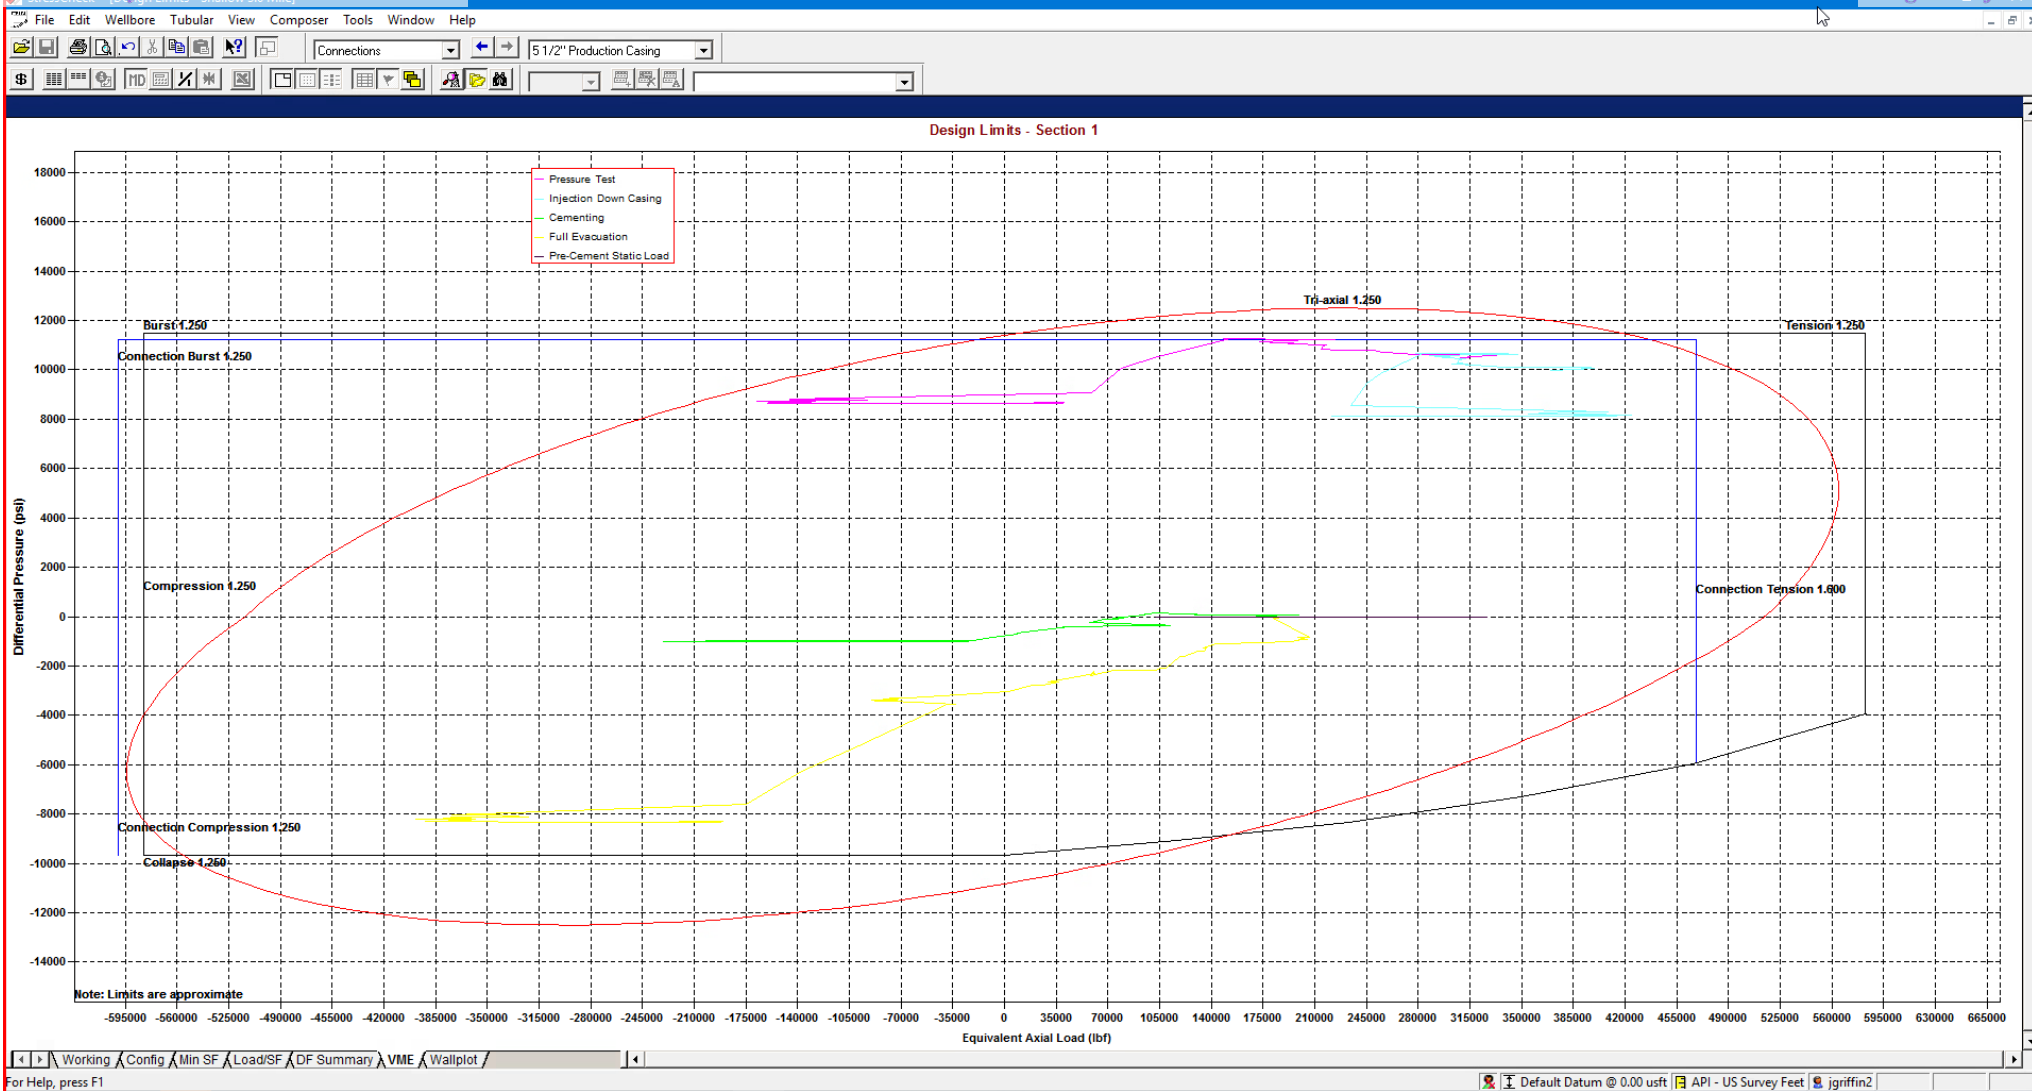

StressCheck - [String Summary - Shallow 3.0 Mile]

|   | String                            | OD/Weight/Grade              | Connection    | MD Interval (usft) | Drift Dia. (") | Minimum Safety Factor (Abs) |              |        |          | Design Cost (\$) |
|---|-----------------------------------|------------------------------|---------------|--------------------|----------------|-----------------------------|--------------|--------|----------|------------------|
|   |                                   |                              |               |                    |                | Burst                       | Collapse (V) | Axial  | Triaxial |                  |
| 1 | Production Casing                 | 5 1/2", 20.000 ppf, P110 ICY | BTC, P110 ICY | 0.0-28578.0        | 4.653          | 1.27                        | 1.47         | 1.90 F | 1.35     | 446,902          |
| 2 |                                   |                              |               |                    |                |                             |              |        |          |                  |
| 3 |                                   |                              |               |                    |                |                             |              |        |          |                  |
| 4 | F Conn Fracture                   |                              |               |                    |                |                             |              |        |          |                  |
| 5 | ( ) Compression                   |                              |               |                    |                |                             |              |        |          |                  |
| 6 | (V) Vector Collapse Safety Factor |                              |               |                    |                |                             |              |        |          |                  |
| 7 |                                   |                              |               |                    |                |                             |              |        |          |                  |
|   |                                   |                              |               |                    |                |                             |              |        |          | Total = 446,902  |

\*Modelling done with 5-1/2" 20# Production Casing with a 125ksi Control Yield. Passes all Burst, Collapse and Tensile design criteria.



## Shallow Design C

## 1. CASING PROGRAM

| Hole Size | Interval MD |         | Interval TVD |         | Csg OD  | Weight | Grade   | Conn          |
|-----------|-------------|---------|--------------|---------|---------|--------|---------|---------------|
|           | From (ft)   | To (ft) | From (ft)    | To (ft) |         |        |         |               |
| 16"       | 0           | 2,030   | 0            | 2,030   | 13-3/8" | 54.5#  | J-55    | STC           |
| 11"       | 0           | 7,793   | 0            | 5,650   | 9-5/8"  | 40#    | J-55    | LTC           |
| 7-7/8"    | 0           | 28,578  | 0            | 11,225  | 6"      | 24.5#  | P110-EC | VAM Sprint-SF |

Hole will be full during casing run for well control and tensile SF factor. Casing will be kept at least half full during run for this design to meet BLM collapse SF requirement. External pressure will be reviewed prior to conducting casing pressure tests to ensure that 70% of the yield is not exceeded.

Variance is requested to waive the centralizer requirements for the 9-5/8" casing in the 11" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 11" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 6" casing in the 7-7/8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 7-7/8" hole interval to maximize cement bond and zonal isolation.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement for the intermediate (salt) section from Title 43 CFR Part 3170 under the following conditions:

- The variance is not applicable within the Potash Boundaries or Capitan Reef areas.
- Operator takes responsibility to get casing to set point in the event that the clearance causes stuck pipe issues.

## 2. CEMENTING PROGRAM:

| Depth             | No. Sacks | Wt. ppg | Yld Ft3/sk | Slurry Description                                                                                                                 |
|-------------------|-----------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------|
| 2,030'<br>13-3/8" | 570       | 13.5    | 1.73       | Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl <sub>2</sub> + 0.25 lb/sk Cello-Flake (TOC @ Surface)                               |
|                   | 160       | 14.8    | 1.34       | Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 1830')                                       |
| 7,793'<br>9-5/8"  | 770       | 12.7    | 2.22       | Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx (TOC @ Surface)                                                             |
|                   | 250       | 14.8    | 1.32       | Tail: Class C + 10% NaCl + 3% MagOx (TOC @ 6238')                                                                                  |
| 28,578'<br>6"     | 650       | 10.5    | 3.21       | Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 7300')                                                         |
|                   | 1870      | 13.2    | 1.52       | Tail: Class H + 5% NEX-020 + 0.2% NAC-102 + 0.15% NAS-725 + 0.5% NFL-549 + 0.2% NFP-703 + 1% NBE-737 + 0.3% NRT-241 (TOC @ 12730') |




## Shallow Design C

## Proposed Wellbore

KB: 3558'

GL: 3533'

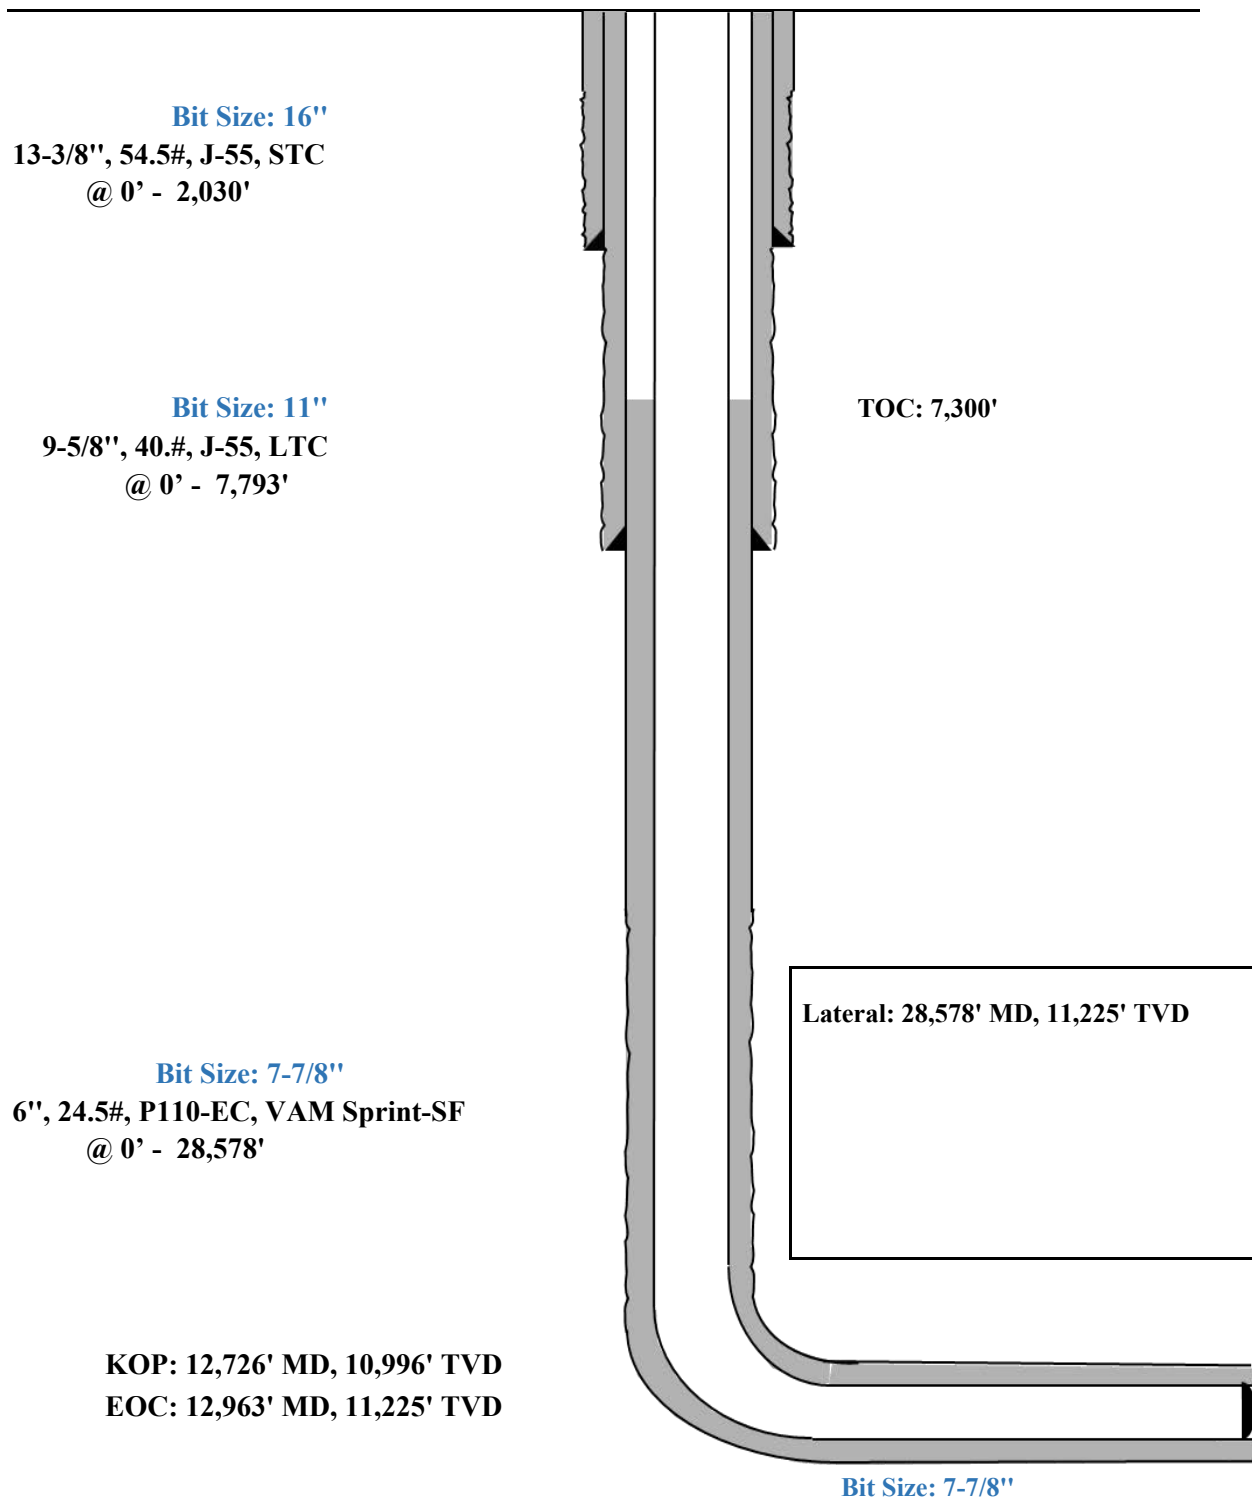




| Triaxial Results |                      |                                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
|------------------|----------------------|-----------------------------------|-------------------------|--------------------------------|-------------------------------|------------------------|-------|--------------|---------|---------------------|----------------|----------|----------------------------------------|--------------------------|
|                  | Depth (MD)<br>(usft) | Axial Force (lbf)                 |                         | Equivalent<br>Axial Load (lbf) | Bending Stress<br>at OD (psi) | Absolute Safety Factor |       |              |         | Temperature<br>(°F) | Pressure (psi) |          | Addtl Pickup To<br>Prevent Buck. (lbf) | Buckled<br>Length (usft) |
|                  |                      | Apparent<br>(w/Bending)           | Actual<br>(w/o Bending) |                                |                               | Triaxial               | Burst | Collapse (V) | Axial   |                     | Internal       | External |                                        |                          |
| 1                | 0                    | 252987                            | 228954                  | 253140                         | 2098.2                        | 1.69                   | 1.58  | N/A          | 2.82 F  | 70.00               | 2500.00        | 0.00     | N/A                                    | N/A                      |
| 2                | 100                  | 247735                            | 223702                  | 248466                         | 2098.2                        | 1.69                   | 1.58  | N/A          | 2.88 F  | 71.10               | 2543.63        | 43.63    |                                        |                          |
| 3                | 100                  | 234996                            | 223701                  | 235716                         | 986.2                         | 1.71                   | 1.58  | N/A          | 3.04 F  | 71.10               | 2543.64        | 43.64    |                                        |                          |
| 4                | 1700                 | 341565                            | 139667                  | 352253                         | 17627.2                       | 1.53                   | 1.57  | N/A          | 2.09 F  | 88.70               | 3241.64        | 741.64   |                                        |                          |
| 5                | 1700                 | 312979                            | 139666                  | 323488                         | 15131.5                       | 1.58                   | 1.57  | N/A          | 2.28 F  | 88.70               | 3241.65        | 741.65   |                                        |                          |
| 6                | 1850                 | 336881                            | 132027                  | 348440                         | 17885.2                       | 1.51                   | 1.57  | N/A          | 2.12 F  | 90.29               | 3305.05        | 805.05   |                                        |                          |
| 7                | 1850                 | 318549                            | 132027                  | 329984                         | 16284.8                       | 1.54                   | 1.57  | N/A          | 2.24 F  | 90.29               | 3305.06        | 805.06   |                                        |                          |
| 8                | 1950                 | 320468                            | 127243                  | 332475                         | 16869.9                       | 1.52                   | 1.57  | N/A          | 2.23 F  | 91.30               | 3344.87        | 844.87   |                                        |                          |
| 9                | 1950                 | 312802                            | 127243                  | 324756                         | 16200.7                       | 1.53                   | 1.57  | N/A          | 2.28 F  | 91.30               | 3344.87        | 844.87   |                                        |                          |
| 10               | 2050                 | 307858                            | 122773                  | 320295                         | 16159.3                       | 1.52                   | 1.57  | N/A          | 2.32 F  | 92.23               | 3381.89        | 881.89   |                                        |                          |
| 11               | 2050                 | 303560                            | 122772                  | 315965                         | 15784.1                       | 1.53                   | 1.57  | N/A          | 2.35 F  | 92.23               | 3381.89        | 881.89   |                                        |                          |
| 12               | 2300                 | 151294                            | 112633                  | 163658                         | 3375.4                        | 1.71                   | 1.57  | N/A          | 4.72 F  | 94.35               | 3466.13        | 966.13   |                                        |                          |
| 13               | 2300                 | 132741                            | 112633                  | 144956                         | 1755.6                        | 1.72                   | 1.57  | N/A          | 5.38 F  | 94.35               | 3466.14        | 966.14   |                                        |                          |
| 14               | 2370                 | 129966                            | 109858                  | 142452                         | 1755.6                        | 1.72                   | 1.57  | N/A          | 5.49 F  | 94.94               | 3489.28        | 989.28   |                                        |                          |
| 15               | 2370                 | 127909                            | 107800                  | 140922                         | 1755.6                        | 1.75                   | 1.60  | N/A          | 5.58 F  | 94.94               | 3489.29        | 1036.40  |                                        |                          |
| 16               | 2700                 | 105515                            | 94232                   | 119785                         | 985.1                         | 1.75                   | 1.60  | N/A          | 6.77 F  | 97.73               | 3599.97        | 1152.35  |                                        |                          |
| 17               | 2700                 | 111680                            | 94231                   | 126006                         | 1523.4                        | 1.75                   | 1.60  | N/A          | 6.39 F  | 97.73               | 3599.97        | 1152.35  |                                        |                          |
| 18               | 3100                 | 110766                            | 77783                   | 126839                         | 2879.6                        | 1.71                   | 1.60  | N/A          | 6.44 F  | 101.11              | 3734.23        | 1293.00  |                                        |                          |
| 19               | 3100                 | 97392                             | 77783                   | 113331                         | 1712.1                        | 1.73                   | 1.60  | N/A          | 7.33 F  | 101.11              | 3734.23        | 1293.01  |                                        |                          |
| 20               | 3700                 | 71565                             | 53303                   | 89806                          | 1594.4                        | 1.70                   | 1.61  | N/A          | 9.97 F  | 106.15              | 3934.24        | 1502.54  |                                        |                          |
| 21               | 3700                 | 60887                             | 53302                   | 79004                          | 662.3                         | 1.71                   | 1.61  | N/A          | 11.72 F | 106.16              | 3934.25        | 1502.55  |                                        |                          |
| 22               | 4650                 | 34671                             | 14219                   | 56495                          | 1785.6                        | 1.64                   | 1.61  | N/A          | 20.59 F | 114.20              | 4253.37        | 1836.86  |                                        |                          |
| 23               | 4900                 | 44595                             | 4828                    | 67626                          | 3472.0                        | 1.59                   | 1.61  | N/A          | 16.01 F | 116.32              | 4337.37        | 1924.87  |                                        |                          |
| 24               | 4900                 | 28975                             | 4828                    | 51775                          | 2108.2                        | 1.62                   | 1.61  | N/A          | 24.64 F | 116.32              | 4337.38        | 1924.87  |                                        |                          |
| 25               | 5029                 | 22103                             | 34                      | 45340                          | 1926.8                        | 1.61                   | 1.61  | N/A          | 32.30 F | 117.40              | 4380.40        | 1969.94  |                                        |                          |
| 26               | 5029                 | 22102                             | 33                      | 45339                          | 1926.8                        | 1.61                   | 1.61  | N/A          | 32.30 F | 117.40              | 4380.41        | 1969.95  |                                        |                          |
| 27               | 5600                 | -45329                            | -21341                  | -20805                         | 2094.3                        | 1.57                   | 1.62  | N/A          | (13.67) | 122.23              | 4572.11        | 2170.78  |                                        |                          |
| 28               | 5650                 | -40465                            | -23210                  | -15657                         | 1506.5                        | 1.58                   | 1.62  | N/A          | (15.31) | 122.66              | 4588.87        | 2188.34  |                                        |                          |
| 29               |                      |                                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 30               |                      | F Conn Fracture                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 31               |                      | ( ) Compression                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 32               |                      | (V) Vector Collapse Safety Factor |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 33               |                      |                                   |                         |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |

9-5/8" Intermediate Casing Pressure Test:

Internal Profile based off Surface Pressure + Hydrostatic: 4589 psi

External Profile based off Pore Pressure: 2188 psi

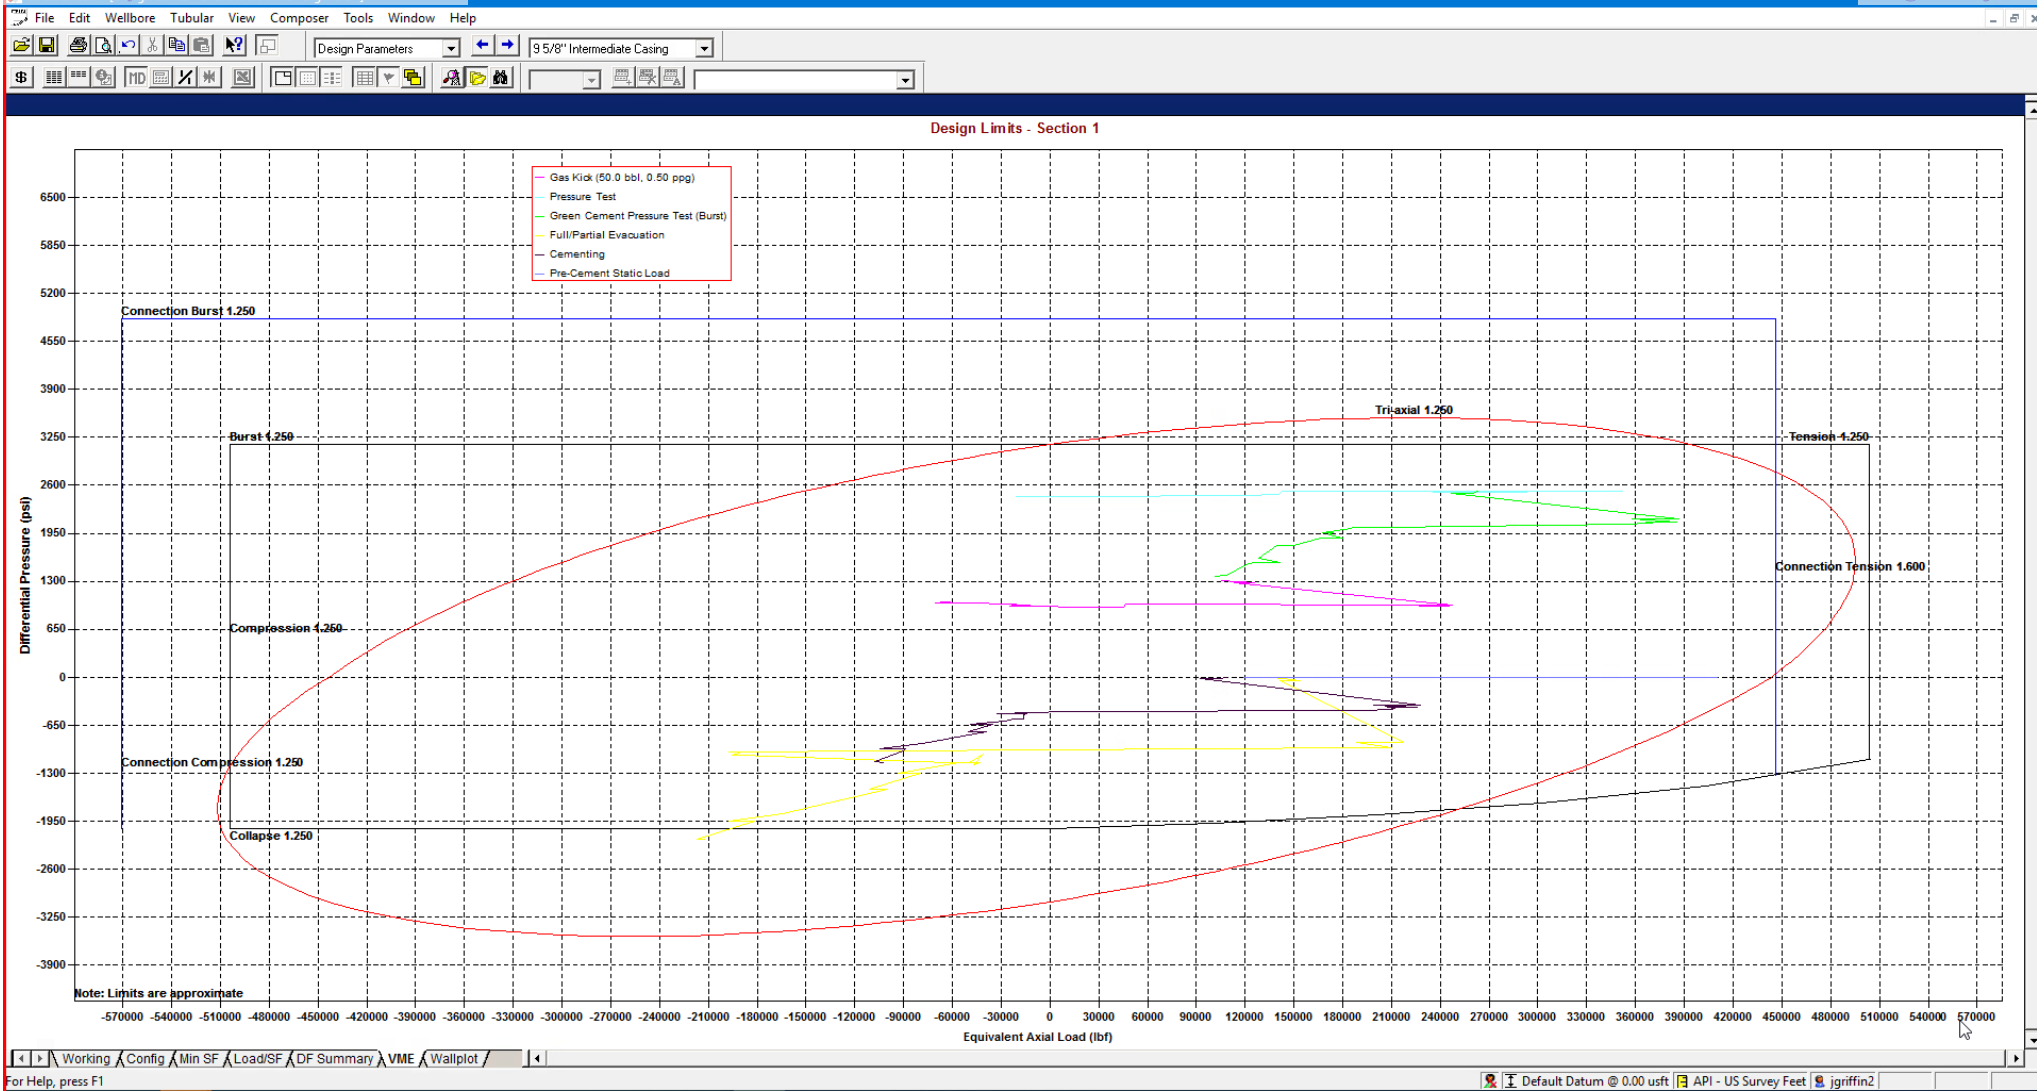


StressCheck - [String Summary - Shallow 3.0 Mile - Big Hole \*]

String Summary

|   | String                            | OD/Weight/Grade          | Connection | MD Interval (usft) | Drift Dia. (") | Minimum Safety Factor (Abs) |              |        |          | Design Cost (\$) |
|---|-----------------------------------|--------------------------|------------|--------------------|----------------|-----------------------------|--------------|--------|----------|------------------|
|   |                                   |                          |            |                    |                | Burst                       | Collapse (V) | Axial  | Triaxial |                  |
| 1 | Intermediate Casing               | 9 5/8", 40.000 ppf, J-55 | BTC, J-55  | 0.0-5650.0         | 8.750 A        | 1.57                        | 1.59         | 1.80 F | 1.35     | 98,141           |
| 2 |                                   |                          |            |                    |                |                             |              |        |          | Total = 98,141   |
| 3 |                                   |                          |            |                    |                |                             |              |        |          |                  |
| 4 | F Conn Fracture                   |                          |            |                    |                |                             |              |        |          |                  |
| 5 | A Alternate Drift                 |                          |            |                    |                |                             |              |        |          |                  |
| 6 | (V) Vector Collapse Safety Factor |                          |            |                    |                |                             |              |        |          |                  |
| 7 |                                   |                          |            |                    |                |                             |              |        |          |                  |

\*Modelling done with 9-5/8" 40# Intermediate Casing. Passes all Burst, Collapse and Tensile design criteria.

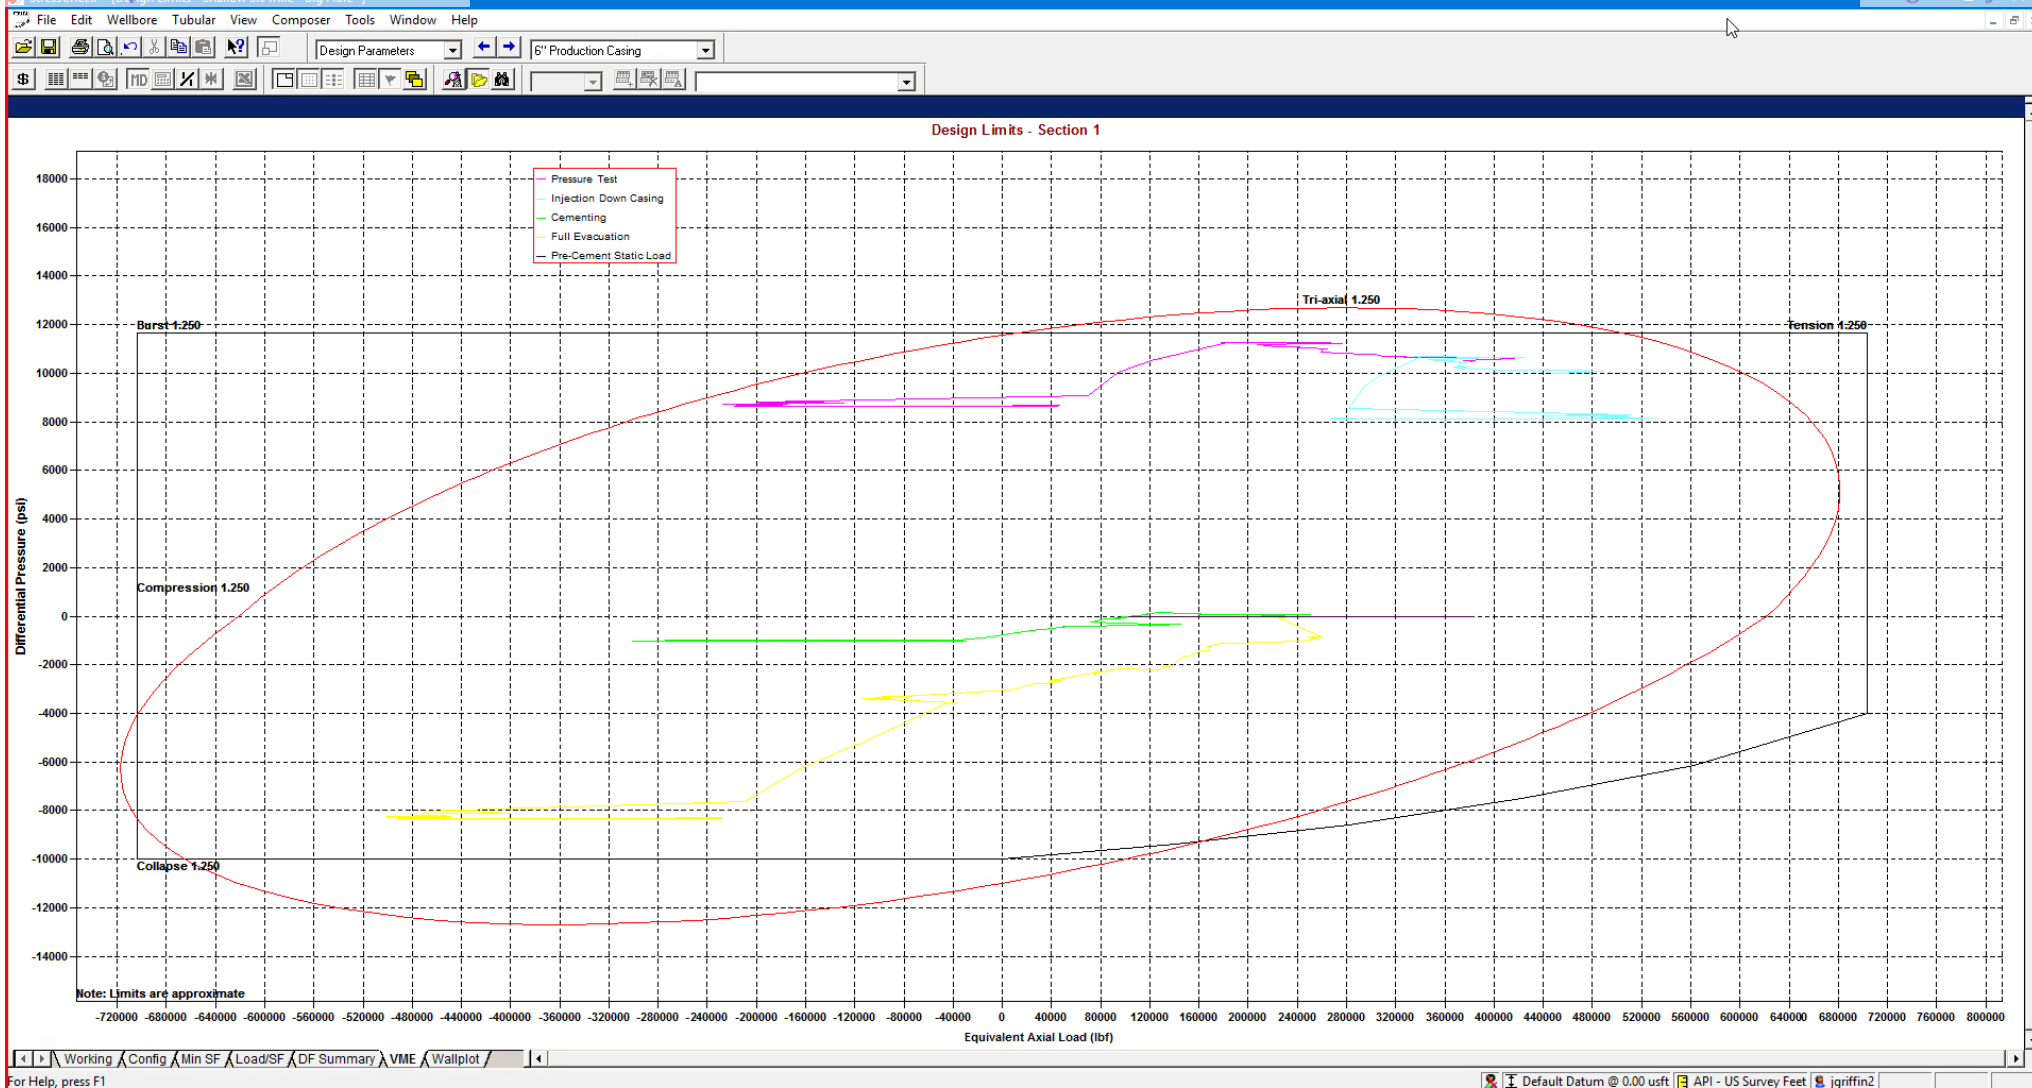

StressCheck - [String Summary - Shallow 3.0 Mile - Big Hole]\*

String Summary

|   | String                            | OD/Weight/Grade          | Connection    | MD Interval (usft) | Drift Dia. (") | Minimum Safety Factor (Abs) |              |              |          | Design Cost (\$) |
|---|-----------------------------------|--------------------------|---------------|--------------------|----------------|-----------------------------|--------------|--------------|----------|------------------|
|   |                                   |                          |               |                    |                | Burst                       | Collapse (V) | Axial (1.75) | Triaxial |                  |
| 1 | Production Casing                 | 6", 24.500 ppf, P110 ICY | BTC, P110 ICY | 0.0-28578.0        | 5.075          | 1.29                        | 1.52         | (1.75)       | 1.37     | 541,493          |
| 2 |                                   |                          |               |                    |                |                             |              |              |          |                  |
| 3 |                                   |                          |               |                    |                |                             |              |              |          |                  |
| 4 | ( ) Compression                   |                          |               |                    |                |                             |              |              |          |                  |
| 5 | (V) Vector Collapse Safety Factor |                          |               |                    |                |                             |              |              |          |                  |
| 6 |                                   |                          |               |                    |                |                             |              |              |          |                  |
|   |                                   |                          |               |                    |                |                             |              |              |          | Total = 541,493  |

\*Modelling done with 6" Production Casing with a 125ksi Control Yield. Passes all Burst, Collapse and Tensile design criteria.



## Shallow Design D

## 4. CASING PROGRAM

| Hole Size | Interval MD |         | Interval TVD |         | Csg OD  | Weight | Grade   | Conn        |
|-----------|-------------|---------|--------------|---------|---------|--------|---------|-------------|
|           | From (ft)   | To (ft) | From (ft)    | To (ft) |         |        |         |             |
| 16"       | 0           | 2,030   | 0            | 2,030   | 13-3/8" | 54.5#  | J-55    | STC         |
| 11"       | 0           | 7,793   | 0            | 5,650   | 9-5/8"  | 40#    | J-55    | LTC         |
| 7-7/8"    | 0           | 12,626  | 0            | 10,896  | 6"      | 22.3#  | P110-EC | DWC/C IS    |
| 6-3/4"    | 12,626      | 28,578  | 10,896       | 11,225  | 5-1/2"  | 20#    | P110-EC | DWC/C IS MS |

Hole will be full during casing run for well control and tensile SF factor. Casing will be kept at least half full during run for this design to meet BLM collapse SF requirement. External pressure will be reviewed prior to conducting casing pressure tests to ensure that 70% of the yield is not exceeded.

Variance is requested to waive the centralizer requirements for the 9-5/8" casing in the 11" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 11" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 6" and 5-1/2" casings in the 7-7/8" and 6-3/4" hole sizes. An expansion additive will be utilized in the cement slurry for the entire length of the 7-7/8" and 6-3/4" hole intervals to maximize cement bond and zonal isolation.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement for the intermediate (salt) section from Title 43 CFR Part 3170 under the following conditions:

- The variance is not applicable within the Potash Boundaries or Capitan Reef areas.
- Operator takes responsibility to get casing to set point in the event that the clearance causes stuck pipe issues.

## 5. CEMENTING PROGRAM:

| Depth             | No. Sacks | Wt. ppg | Yld Ft3/sk | Slurry Description                                                                                                                 |
|-------------------|-----------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------|
| 2,030'<br>13-3/8" | 570       | 13.5    | 1.73       | Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl <sub>2</sub> + 0.25 lb/sk Cello-Flake (TOC @ Surface)                               |
|                   | 160       | 14.8    | 1.34       | Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 1830')                                       |
| 7,793'<br>9-5/8"  | 770       | 12.7    | 2.22       | Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx (TOC @ Surface)                                                             |
|                   | 250       | 14.8    | 1.32       | Tail: Class C + 10% NaCl + 3% MagOx (TOC @ 6238')                                                                                  |
| 28,578'<br>6"     | 650       | 10.5    | 3.21       | Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 7300')                                                         |
|                   | 1870      | 13.2    | 1.52       | Tail: Class H + 5% NEX-020 + 0.2% NAC-102 + 0.15% NAS-725 + 0.5% NFL-549 + 0.2% NFP-703 + 1% NBE-737 + 0.3% NRT-241 (TOC @ 12730') |




Shallow Design D

Proposed Wellbore

KB: 3558'

GL: 3533'

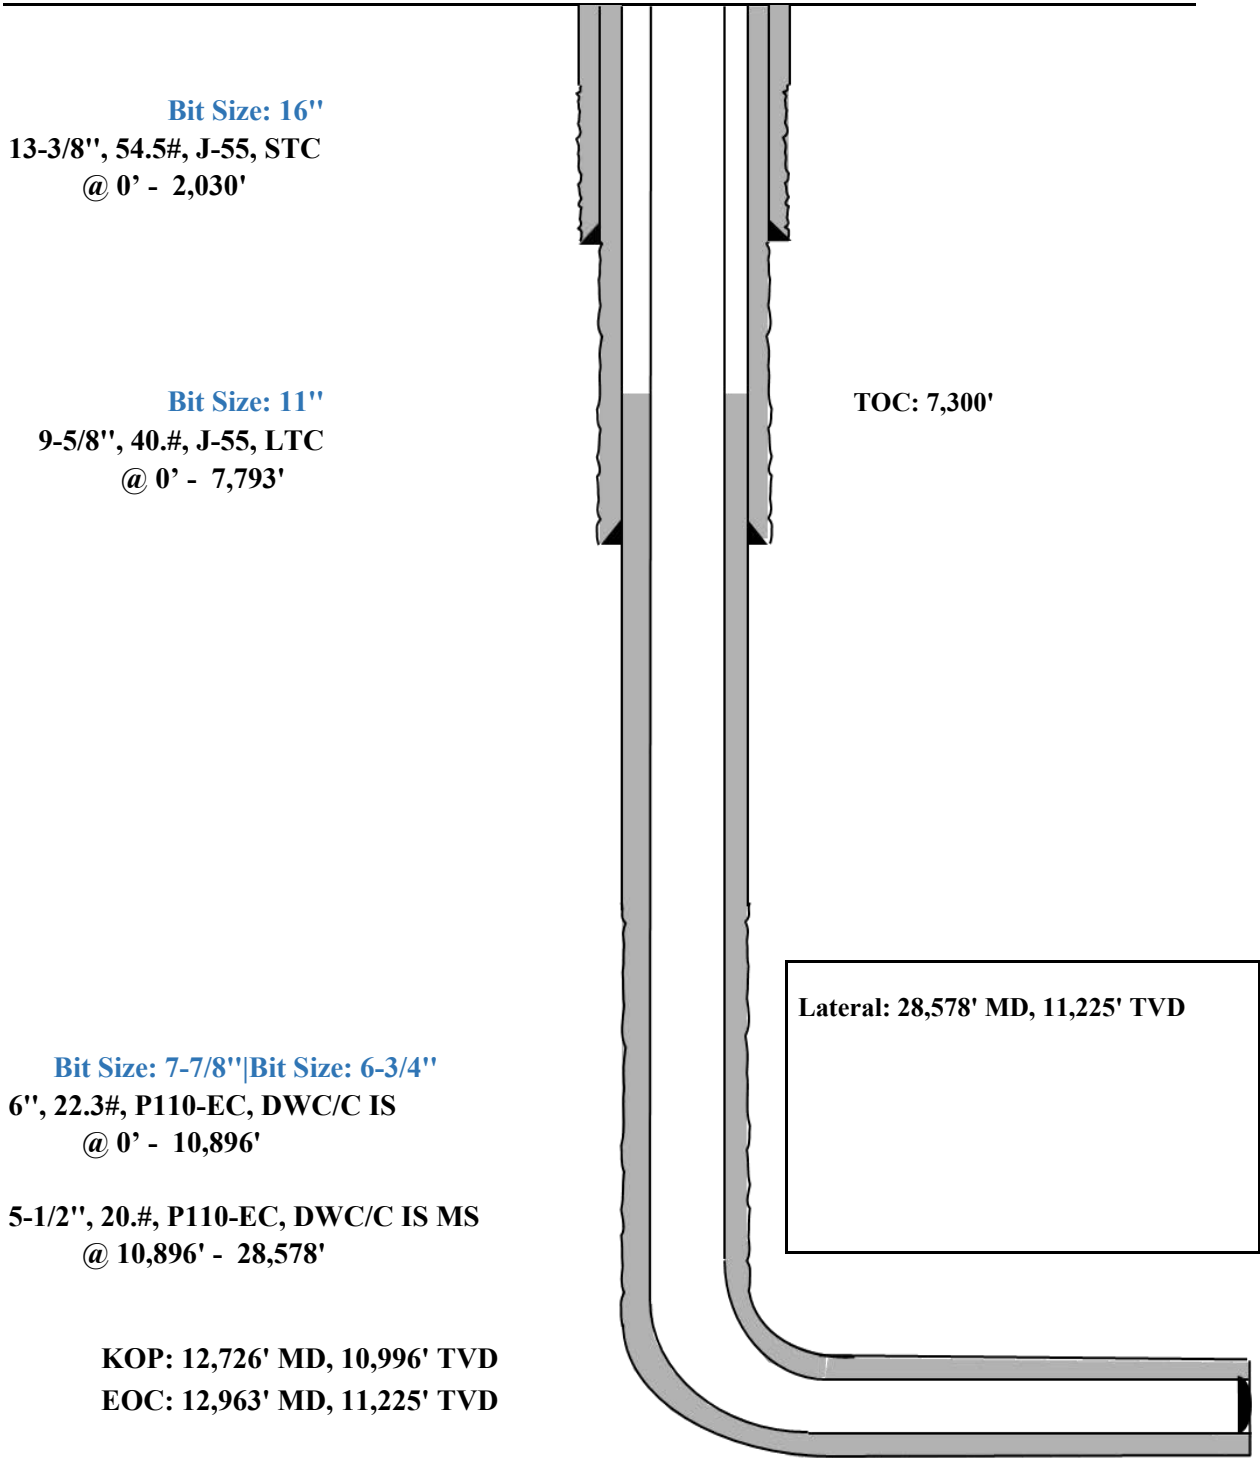

| Triaxial Results |                      |                         |                               |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
|------------------|----------------------|-------------------------|-------------------------------|--------------------------------|-------------------------------|------------------------|-------|--------------|---------|---------------------|----------------|----------|----------------------------------------|--------------------------|
|                  | Depth (MD)<br>(usft) | Axial Force (lbf)       |                               | Equivalent<br>Axial Load (lbf) | Bending Stress<br>at OD (psi) | Absolute Safety Factor |       |              |         | Temperature<br>(°F) | Pressure (psi) |          | Addtl Pickup To<br>Prevent Buck. (lbf) | Buckled<br>Length (usft) |
|                  |                      | Apparent<br>(w/Bending) | Actual<br>(w/o Bending)       |                                |                               | Triaxial               | Burst | Collapse (V) | Axial   |                     | Internal       | External |                                        |                          |
| 1                | 0                    | 252987                  | 228954                        | 253140                         | 2098.2                        | 1.69                   | 1.58  | N/A          | 2.82 F  | 70.00               | 2500.00        | 0.00     | N/A                                    | N/A                      |
| 2                | 100                  | 247735                  | 223702                        | 248466                         | 2098.2                        | 1.69                   | 1.58  | N/A          | 2.88 F  | 71.10               | 2543.63        | 43.63    |                                        |                          |
| 3                | 100                  | 234996                  | 223701                        | 235716                         | 986.2                         | 1.71                   | 1.58  | N/A          | 3.04 F  | 71.10               | 2543.64        | 43.64    |                                        |                          |
| 4                | 1700                 | 341565                  | 139667                        | 352253                         | 17627.2                       | 1.53                   | 1.57  | N/A          | 2.09 F  | 88.70               | 3241.64        | 741.64   |                                        |                          |
| 5                | 1700                 | 312979                  | 139666                        | 323488                         | 15131.5                       | 1.58                   | 1.57  | N/A          | 2.28 F  | 88.70               | 3241.65        | 741.65   |                                        |                          |
| 6                | 1850                 | 336881                  | 132027                        | 348440                         | 17885.2                       | 1.51                   | 1.57  | N/A          | 2.12 F  | 90.29               | 3305.05        | 805.05   |                                        |                          |
| 7                | 1850                 | 318549                  | 132027                        | 329984                         | 16284.8                       | 1.54                   | 1.57  | N/A          | 2.24 F  | 90.29               | 3305.06        | 805.06   |                                        |                          |
| 8                | 1950                 | 320468                  | 127243                        | 332475                         | 16869.9                       | 1.52                   | 1.57  | N/A          | 2.23 F  | 91.30               | 3344.87        | 844.87   |                                        |                          |
| 9                | 1950                 | 312802                  | 127243                        | 324756                         | 16200.7                       | 1.53                   | 1.57  | N/A          | 2.28 F  | 91.30               | 3344.87        | 844.87   |                                        |                          |
| 10               | 2050                 | 307858                  | 122773                        | 320295                         | 16159.3                       | 1.52                   | 1.57  | N/A          | 2.32 F  | 92.23               | 3381.89        | 881.89   |                                        |                          |
| 11               | 2050                 | 303560                  | 122772                        | 315965                         | 15784.1                       | 1.53                   | 1.57  | N/A          | 2.35 F  | 92.23               | 3381.89        | 881.89   |                                        |                          |
| 12               | 2300                 | 151294                  | 112633                        | 163658                         | 3375.4                        | 1.71                   | 1.57  | N/A          | 4.72 F  | 94.35               | 3466.13        | 966.13   |                                        |                          |
| 13               | 2300                 | 132741                  | 112633                        | 144956                         | 1755.6                        | 1.72                   | 1.57  | N/A          | 5.38 F  | 94.35               | 3466.14        | 966.14   |                                        |                          |
| 14               | 2370                 | 129966                  | 109858                        | 142452                         | 1755.6                        | 1.72                   | 1.57  | N/A          | 5.49 F  | 94.94               | 3489.28        | 989.28   |                                        |                          |
| 15               | 2370                 | 127909                  | 107800                        | 140922                         | 1755.6                        | 1.75                   | 1.60  | N/A          | 5.58 F  | 94.94               | 3489.29        | 1036.40  |                                        |                          |
| 16               | 2700                 | 105515                  | 94232                         | 119785                         | 985.1                         | 1.75                   | 1.60  | N/A          | 6.77 F  | 97.73               | 3599.97        | 1152.35  |                                        |                          |
| 17               | 2700                 | 111680                  | 94231                         | 126006                         | 1523.4                        | 1.75                   | 1.60  | N/A          | 6.39 F  | 97.73               | 3599.97        | 1152.35  |                                        |                          |
| 18               | 3100                 | 110766                  | 77783                         | 126839                         | 2879.6                        | 1.71                   | 1.60  | N/A          | 6.44 F  | 101.11              | 3734.23        | 1293.00  |                                        |                          |
| 19               | 3100                 | 97392                   | 77783                         | 113331                         | 1712.1                        | 1.73                   | 1.60  | N/A          | 7.33 F  | 101.11              | 3734.23        | 1293.01  |                                        |                          |
| 20               | 3700                 | 71565                   | 53303                         | 89806                          | 1594.4                        | 1.70                   | 1.61  | N/A          | 9.97 F  | 106.15              | 3934.24        | 1502.54  |                                        |                          |
| 21               | 3700                 | 60887                   | 53302                         | 79004                          | 662.3                         | 1.71                   | 1.61  | N/A          | 11.72 F | 106.16              | 3934.25        | 1502.55  |                                        |                          |
| 22               | 4650                 | 34671                   | 14219                         | 56495                          | 1785.6                        | 1.64                   | 1.61  | N/A          | 20.59 F | 114.20              | 4253.37        | 1836.86  |                                        |                          |
| 23               | 4900                 | 44595                   | 4828                          | 67626                          | 3472.0                        | 1.59                   | 1.61  | N/A          | 16.01 F | 116.32              | 4337.37        | 1924.87  |                                        |                          |
| 24               | 4900                 | 28975                   | 4828                          | 51775                          | 2108.2                        | 1.62                   | 1.61  | N/A          | 24.64 F | 116.32              | 4337.38        | 1924.87  |                                        |                          |
| 25               | 5029                 | 22103                   | 34                            | 45340                          | 1926.8                        | 1.61                   | 1.61  | N/A          | 32.30 F | 117.40              | 4380.40        | 1969.94  |                                        |                          |
| 26               | 5029                 | 22102                   | 33                            | 45339                          | 1926.8                        | 1.61                   | 1.61  | N/A          | 32.30 F | 117.40              | 4380.41        | 1969.95  |                                        |                          |
| 27               | 5600                 | -45329                  | -21341                        | -20805                         | 2094.3                        | 1.57                   | 1.62  | N/A          | (13.67) | 122.23              | 4572.11        | 2170.78  |                                        |                          |
| 28               | 5650                 | -40465                  | -23210                        | -15657                         | 1506.5                        | 1.58                   | 1.62  | N/A          | (15.31) | 122.66              | 4588.87        | 2188.34  |                                        |                          |
| 29               |                      |                         |                               |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 30               |                      | F                       | Conn Fracture                 |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 31               |                      | ( )                     | Compression                   |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 32               |                      | (V)                     | Vector Collapse Safety Factor |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |
| 33               |                      |                         |                               |                                |                               |                        |       |              |         |                     |                |          |                                        |                          |

Working / Config / Min SF / Load/SF / DF Summary / VME / Wallplot


For Help, press F1

Default Datum @ 0.00 usft | API - US Survey Feet | jgriffin2

9-5/8" Intermediate Casing Pressure Test:

Internal Profile based off Surface Pressure + Hydrostatic: 4589 psi

External Profile based off Pore Pressure: 2188 psi

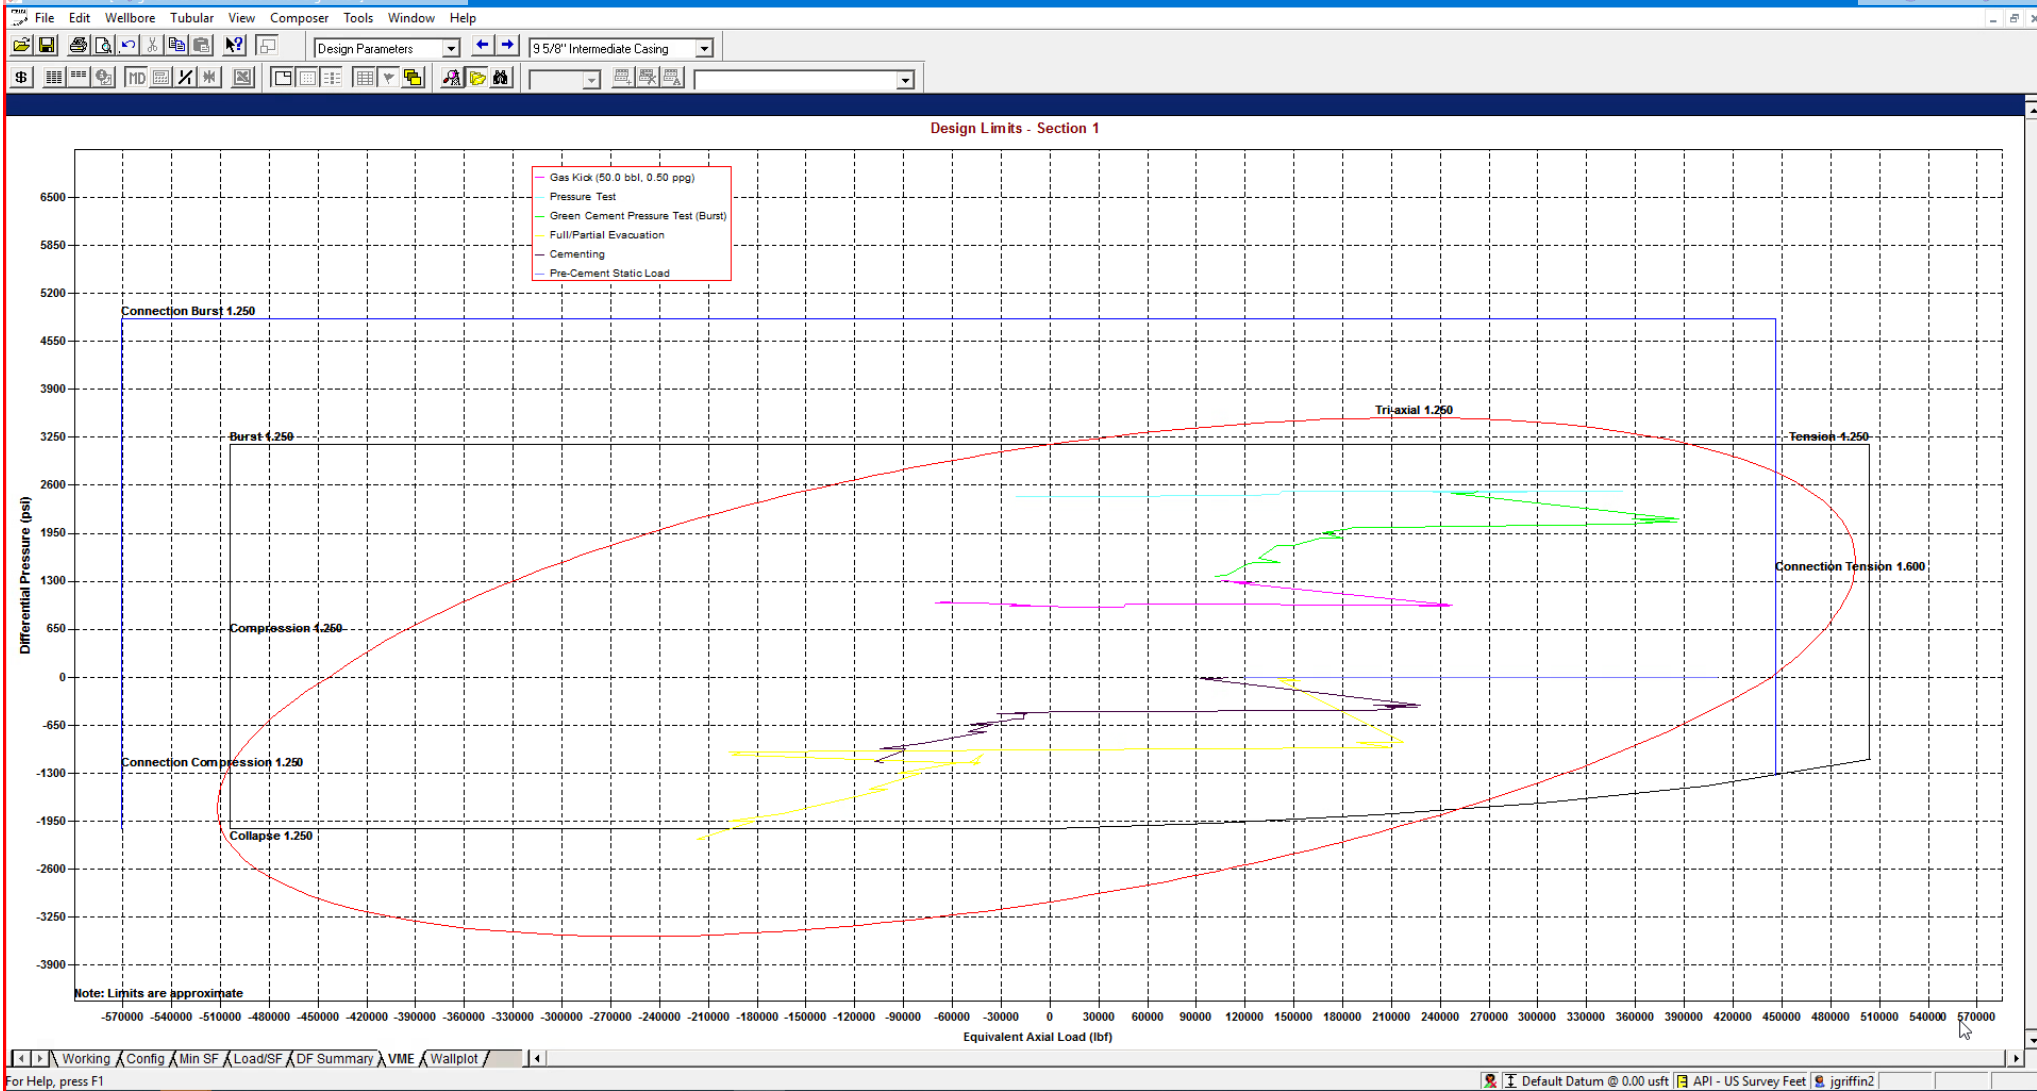


StressCheck - [String Summary - Shallow 3.0 Mile - Big Hole \*]

String Summary

|   | String                            | OD/Weight/Grade          | Connection | MD Interval (usft) | Drift Dia. (") | Minimum Safety Factor (Abs) |              |        |          | Design Cost (\$) |
|---|-----------------------------------|--------------------------|------------|--------------------|----------------|-----------------------------|--------------|--------|----------|------------------|
|   |                                   |                          |            |                    |                | Burst                       | Collapse (V) | Axial  | Triaxial |                  |
| 1 | Intermediate Casing               | 9 5/8", 40.000 ppg, J-55 | BTC, J-55  | 0.0-5650.0         | 8.750 A        | 1.57                        | 1.59         | 1.80 F | 1.35     | 98,141           |
| 2 |                                   |                          |            |                    |                |                             |              |        |          | Total = 98,141   |
| 3 |                                   |                          |            |                    |                |                             |              |        |          |                  |
| 4 | F Conn Fracture                   |                          |            |                    |                |                             |              |        |          |                  |
| 5 | A Alternate Drift                 |                          |            |                    |                |                             |              |        |          |                  |
| 6 | (V) Vector Collapse Safety Factor |                          |            |                    |                |                             |              |        |          |                  |
| 7 |                                   |                          |            |                    |                |                             |              |        |          |                  |

\*Modelling done with 9-5/8" 40# Intermediate Casing. Passes all Burst, Collapse and Tensile design criteria.



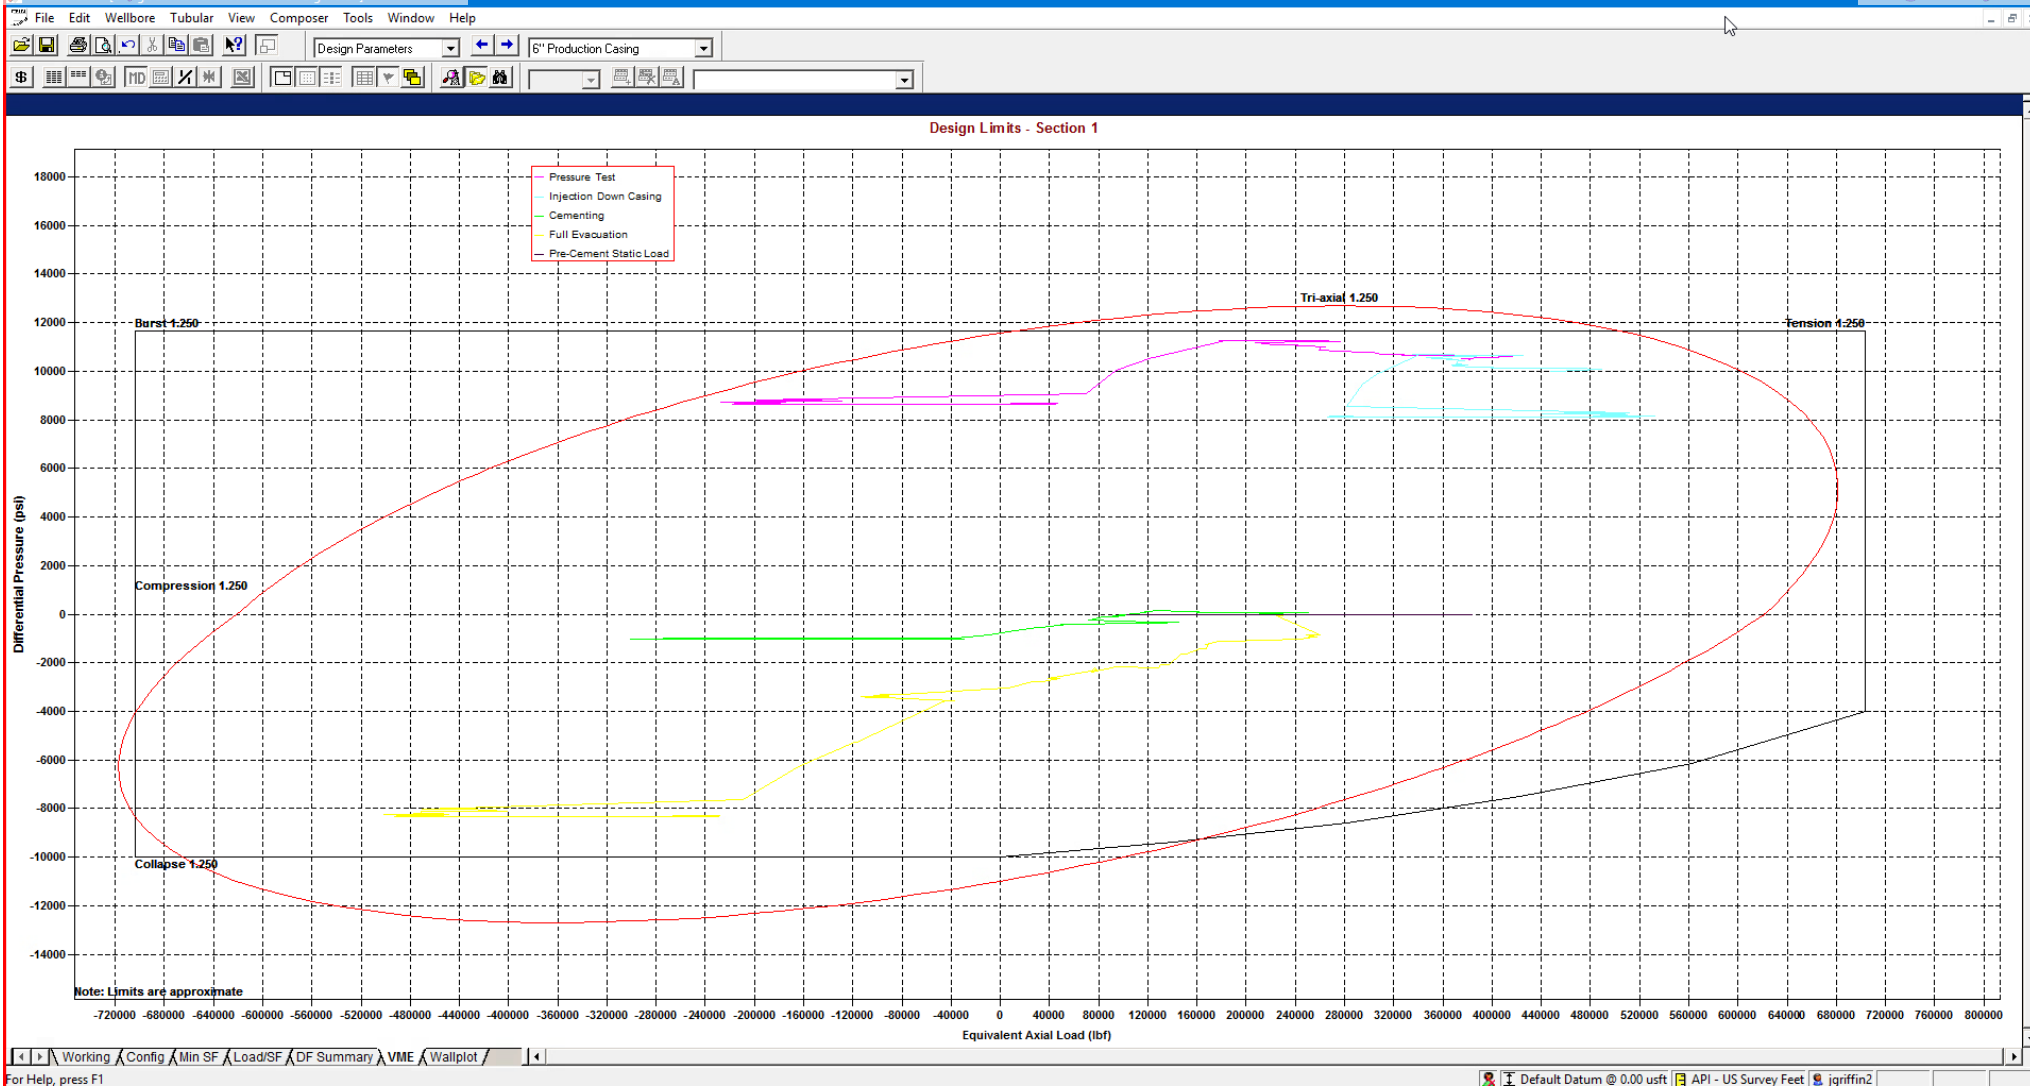


StressCheck - [String Summary - Shallow 3.0 Mile - Big Hole]\*

String Summary

|   | String                            | OD/Weight/Grade          | Connection    | MD Interval (usft) | Drift Dia. (") | Minimum Safety Factor (Abs) |              |              |          | Design Cost (\$) |
|---|-----------------------------------|--------------------------|---------------|--------------------|----------------|-----------------------------|--------------|--------------|----------|------------------|
|   |                                   |                          |               |                    |                | Burst                       | Collapse (V) | Axial (1.75) | Triaxial |                  |
| 1 | Production Casing                 | 6", 24.500 ppf, P110 ICY | BTC, P110 ICY | 0.0-28578.0        | 5.075          | 1.29                        | 1.52         | (1.75)       | 1.37     | 541,493          |
| 2 |                                   |                          |               |                    |                |                             |              |              |          |                  |
| 3 |                                   |                          |               |                    |                |                             |              |              |          |                  |
| 4 | ( ) Compression                   |                          |               |                    |                |                             |              |              |          |                  |
| 5 | (V) Vector Collapse Safety Factor |                          |               |                    |                |                             |              |              |          |                  |
| 6 |                                   |                          |               |                    |                |                             |              |              |          |                  |
|   |                                   |                          |               |                    |                |                             |              |              |          | Total = 541,493  |

\*Modelling done with 6" Production Casing with a 125ksi Control Yield. Passes all Burst, Collapse and Tensile design criteria.

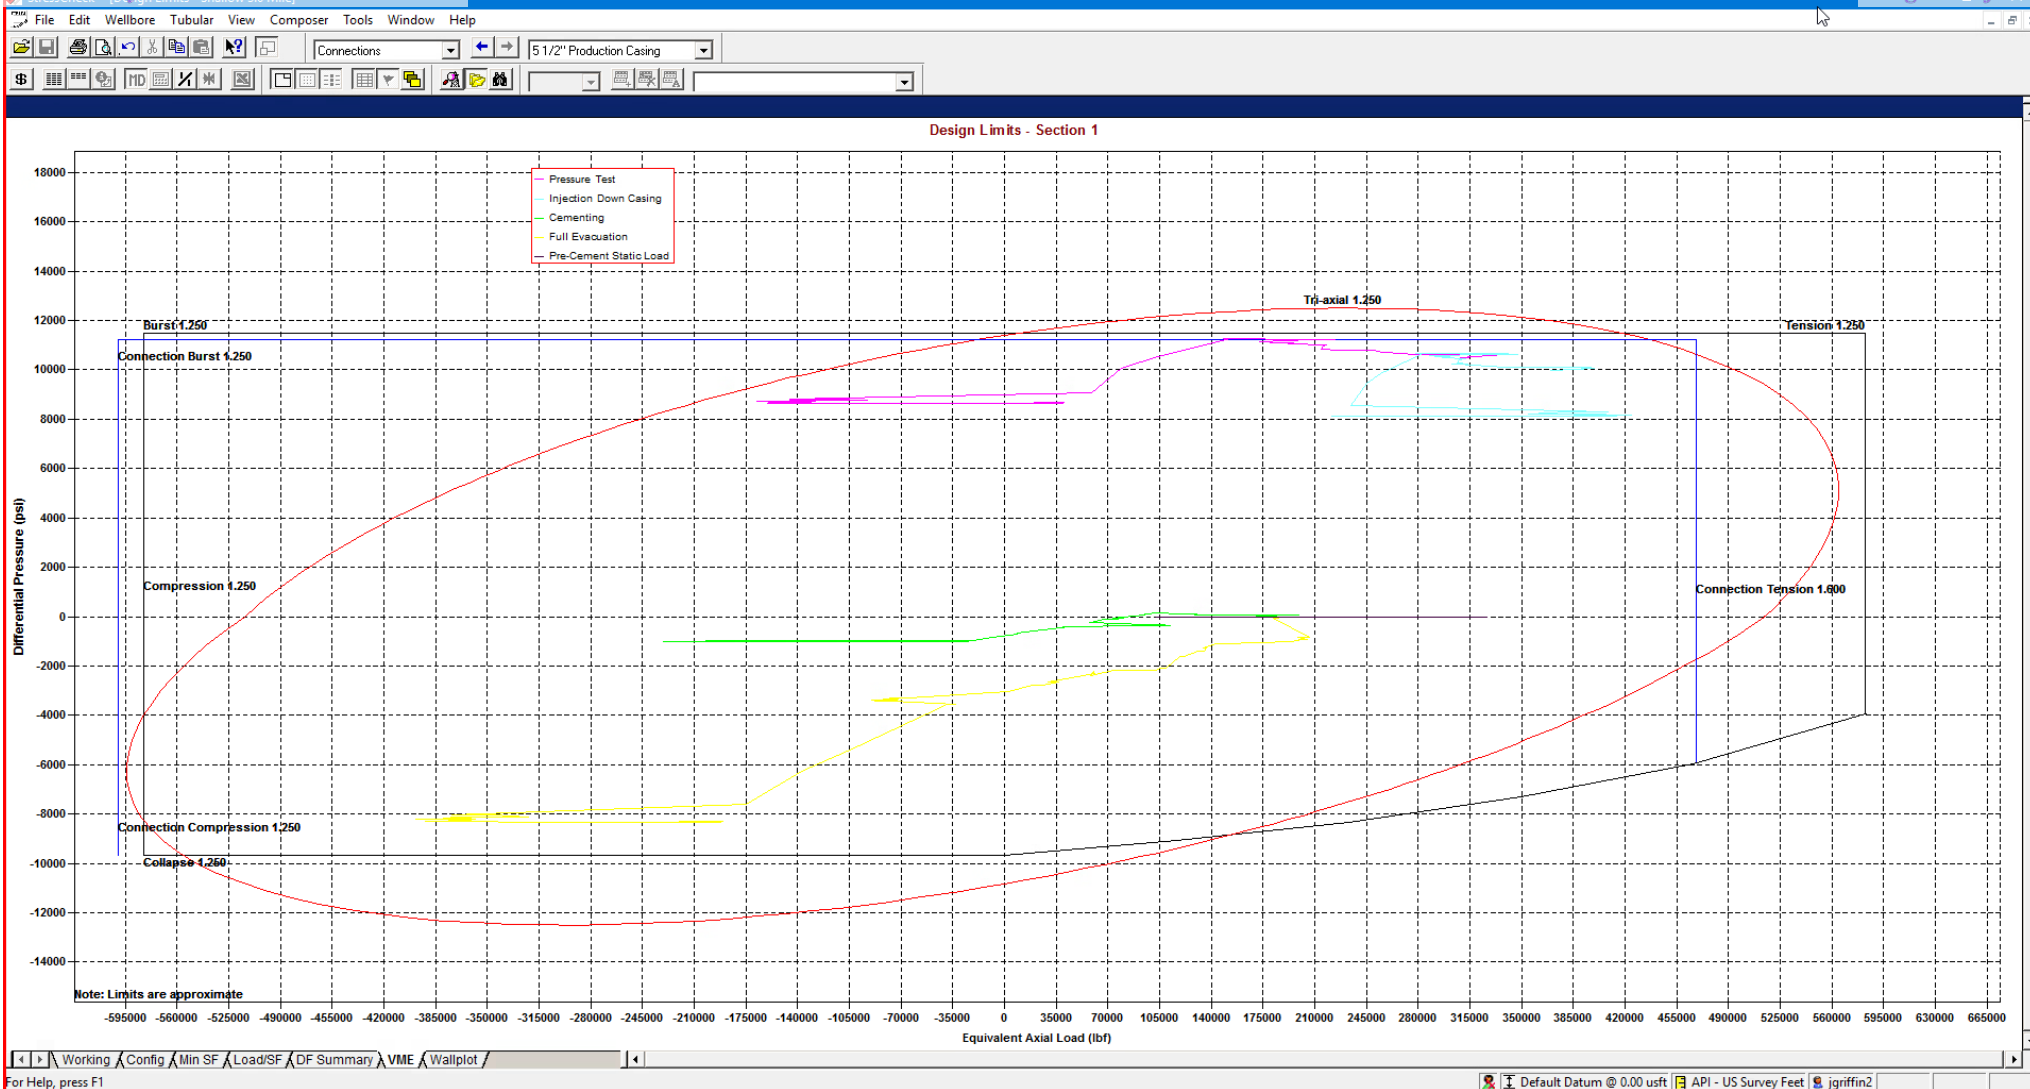

StressCheck - [String Summary - Shallow 3.0 Mile]

|   | String                            | OD/Weight/Grade              | Connection    | MD Interval (usft) | Drift Dia. (") | Minimum Safety Factor (Abs) |              |        |          | Design Cost (\$) |
|---|-----------------------------------|------------------------------|---------------|--------------------|----------------|-----------------------------|--------------|--------|----------|------------------|
|   |                                   |                              |               |                    |                | Burst                       | Collapse (V) | Axial  | Triaxial |                  |
| 1 | Production Casing                 | 5 1/2", 20.000 ppf, P110 ICY | BTC, P110 ICY | 0.0-28578.0        | 4.653          | 1.27                        | 1.47         | 1.90 F | 1.35     | 446,902          |
| 2 |                                   |                              |               |                    |                |                             |              |        |          |                  |
| 3 |                                   |                              |               |                    |                |                             |              |        |          |                  |
| 4 | F Conn Fracture                   |                              |               |                    |                |                             |              |        |          |                  |
| 5 | ( ) Compression                   |                              |               |                    |                |                             |              |        |          |                  |
| 6 | (V) Vector Collapse Safety Factor |                              |               |                    |                |                             |              |        |          |                  |
| 7 |                                   |                              |               |                    |                |                             |              |        |          |                  |
|   |                                   |                              |               |                    |                |                             |              |        |          | Total = 446,902  |

\*Modelling done with 5-1/2" 20# Production Casing with a 125ksi Control Yield. Passes all Burst, Collapse and Tensile design criteria.

**MUD PROGRAM:**

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal. The applicable depths and properties of the drilling fluid systems are as follows:

| Measured Depth              | Type        | Weight (ppg) | Viscosity | Water Loss |
|-----------------------------|-------------|--------------|-----------|------------|
| 0 – 2,030'                  | Fresh - Gel | 8.6-8.8      | 28-34     | N/c        |
| 2,030' – 7,793'             | Brine       | 9-10.5       | 28-34     | N/c        |
| 5,450' – 28,578'<br>Lateral | Oil Base    | 8.8-9.5      | 58-68     | N/c - 6    |

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

**CEMENTING ADDITIVES:**

| Additive            | Purpose                                 |
|---------------------|-----------------------------------------|
| Bentonite Gel       | Lightweight/Lost circulation prevention |
| Calcium Chloride    | Accelerator                             |
| Cello-flake         | Lost circulation prevention             |
| Sodium Metasilicate | Accelerator                             |
| MagOx               | Expansive agent                         |
| Pre-Mag-M           | Expansive agent                         |
| Sodium Chloride     | Accelerator                             |
| FL-62               | Fluid loss control                      |
| Halad-344           | Fluid loss control                      |
| Halad-9             | Fluid loss control                      |
| HR-601              | Retarder                                |
| Microbond           | Expansive Agent                         |

Cement integrity tests will be performed immediately following plug bump.

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

New Search »

« Back to Previous List

USC ☒ Metric

6/8/2015 10:04:37 AM

| Mechanical Properties            | Pipe   | BTC    | LTC | STC    |          |
|----------------------------------|--------|--------|-----|--------|----------|
| Minimum Yield Strength           | 55,000 | --     | --  | --     | psi      |
| Maximum Yield Strength           | 80,000 | --     | --  | --     | psi      |
| Minimum Tensile Strength         | 75,000 | --     | --  | --     | psi      |
| Dimenstons                       | Pipe   | BTC    | LTC | STC    |          |
| Outside Diameter                 | 13.375 | 14.375 | --  | 14.375 | in.      |
| Wall Thickness                   | 0.380  | --     | --  | --     | in.      |
| Inside Diameter                  | 12.615 | 12.615 | --  | 12.615 | in.      |
| Standard Drift                   | 12.459 | 12.459 | --  | 12.459 | in.      |
| Alternate Drift                  | --     | --     | --  | --     | in.      |
| Nominal Linear Weight, T&C       | 54.50  | --     | --  | --     | lbs/ft   |
| Plain End Weight                 | 52.79  | --     | --  | --     | lbs/ft   |
| Performance                      | Pipe   | BTC    | LTC | STC    |          |
| Minimum Collapse Pressure        | 1,130  | 1,130  | --  | 1,130  | psi      |
| Minimum Internal Yield Pressure  | 2,740  | 2,740  | --  | 2,740  | psi      |
| Minimum Pipe Body Yield Strength | 853.00 | --     | --  | --     | 1000 lbs |
| Joint Strength                   | --     | 909    | --  | 514    | 1000 lbs |
| Reference Length                 | --     | 11,125 | --  | 6,290  | ft       |
| Make-Up Data                     | Pipe   | BTC    | LTC | STC    |          |
| Make-Up Loss                     | --     | 4.81   | --  | 3.50   | in.      |
| Minimum Make-Up Torque           | --     | --     | --  | 3,860  | ft-lbs   |
| Maximum Make-Up Torque           |        | --     | --  | 6,430  | ft-lbs   |

New Search »

« Back to Previous List

USC ☒ Metric

6/8/2015 10:23:27 AM

| Mechanical Properties            | Pipe   | BTC    | LTC    | STC    |          |
|----------------------------------|--------|--------|--------|--------|----------|
| Minimum Yield Strength           | 55,000 | --     | --     | --     | psi      |
| Maximum Yield Strength           | 80,000 | --     | --     | --     | psi      |
| Minimum Tensile Strength         | 75,000 | --     | --     | --     | psi      |
| Dimenstons                       | Pipe   | BTC    | LTC    | STC    |          |
| Outside Diameter                 | 9.625  | 10.625 | 10.625 | 10.625 | in.      |
| Wall Thickness                   | 0.395  | --     | --     | --     | in.      |
| Inside Diameter                  | 8.835  | 8.835  | 8.835  | 8.835  | in.      |
| Standard Drift                   | 8.679  | 8.679  | 8.679  | 8.679  | in.      |
| Alternate Drift                  | 8.750  | 8.750  | 8.750  | 8.750  | in.      |
| Nominal Linear Weight, T&C       | 40.00  | --     | --     | --     | lbs/ft   |
| Plain End Weight                 | 38.97  | --     | --     | --     | lbs/ft   |
| Performance                      | Pipe   | BTC    | LTC    | STC    |          |
| Minimum Collapse Pressure        | 2,570  | 2,570  | 2,570  | 2,570  | psi      |
| Minimum Internal Yield Pressure  | 3,950  | 3,950  | 3,950  | 3,950  | psi      |
| Minimum Pipe Body Yield Strength | 630.00 | --     | --     | --     | 1000 lbs |
| Joint Strength                   | --     | 714    | 520    | 452    | 1000 lbs |
| Reference Length                 | --     | 11,898 | 8,665  | 7,529  | ft       |
| Make-Up Data                     | Pipe   | BTC    | LTC    | STC    |          |
| Make-Up Loss                     | --     | 4.81   | 4.75   | 3.38   | in.      |
| Minimum Make-Up Torque           | --     | --     | 3,900  | 3,390  | ft-lbs   |
| Maximum Make-Up Torque           | --     | --     | 6,500  | 5,650  | ft-lbs   |





## Connection Data Sheet

| OD (in.) | WEIGHT (lbs./ft.)                  | WALL (in.) | GRADE      | API DRIFT (in.) | RBW% | CONNECTION  |
|----------|------------------------------------|------------|------------|-----------------|------|-------------|
| 5.500    | Nominal: 20.00<br>Plain End: 19.83 | 0.361      | VST P110EC | 4.653           | 87.5 | DWC/C-IS MS |

| PIPE PROPERTIES       |         |        | CONNECTION PROPERTIES        |                  |         |
|-----------------------|---------|--------|------------------------------|------------------|---------|
| Outside Diameter      | 5.500   | in.    | Connection Type              | Semi-Premium T&C |         |
| Inside Diameter       | 4.778   | in.    | Connection O.D. (nom)        | 6.115            | in.     |
| Nominal Area          | 5.828   | sq.in. | Connection I.D. (nom)        | 4.778            | in.     |
| Grade Type            | API 5CT |        | Make-Up Loss                 | 4.125            | in.     |
| Min. Yield Strength   | 125     | ksi    | Coupling Length              | 9.250            | in.     |
| Max. Yield Strength   | 140     | ksi    | Critical Cross Section       | 5.828            | sq.in.  |
| Min. Tensile Strength | 135     | ksi    | Tension Efficiency           | 100.0%           | of pipe |
| Yield Strength        | 729     | klb    | Compression Efficiency       | 100.0%           | of pipe |
| Ultimate Strength     | 787     | klb    | Internal Pressure Efficiency | 100.0%           | of pipe |
| Min. Internal Yield   | 14,360  | psi    | External Pressure Efficiency | 100.0%           | of pipe |
| Collapse              | 12,090  | psi    |                              |                  |         |

| CONNECTION PERFORMANCES                     |        |          | FIELD END TORQUE VALUES       |        |       |
|---------------------------------------------|--------|----------|-------------------------------|--------|-------|
| Yield Strength                              | 729    | klb      | Min. Make-up torque           | 16,100 | ft.lb |
| Parting Load                                | 787    | klb      | Opti. Make-up torque          | 17,350 | ft.lb |
| Compression Rating                          | 729    | klb      | Max. Make-up torque           | 18,600 | ft.lb |
| Min. Internal Yield                         | 14,360 | psi      | Min. Shoulder Torque          | 1,610  | ft.lb |
| External Pressure                           | 12,090 | psi      | Max. Shoulder Torque          | 12,880 | ft.lb |
| Maximum Uniaxial Bend Rating                | 104.2  | °/100 ft | Min. Delta Turn               | -      | Turns |
| Reference String Length w 1.4 Design Factor | 26,040 | ft       | Max. Delta Turn               | 0.200  | Turns |
|                                             |        |          | Maximum Operational Torque    | 21,100 | ft.lb |
|                                             |        |          | Maximum Torsional Value (MTV) | 23,210 | ft.lb |

Need Help? Contact: [tech.support@vam-usa.com](mailto:tech.support@vam-usa.com)

Reference Drawing: 8136PP Rev.01 & 8136BP Rev.01

Date: 12/03/2019

Time: 06:19:27 PM

For detailed information on performance properties, refer to DWC Connection Data Notes on following page(s).

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.

**VAM USA**

2107 CityWest Boulevard Suite 1300

Houston, TX 77042

Phone: 713-479-3200

Fax: 713-479-3234

VAM® USA Sales E-mail: [VAMUSAsales@vam-usa.com](mailto:VAMUSAsales@vam-usa.com)Tech Support Email: [tech.support@vam-usa.com](mailto:tech.support@vam-usa.com)**DWC Connection Data Sheet Notes:**

1. DWC connections are available with a seal ring (SR) option.
2. All standard DWC/C connections are interchangeable for a given pipe OD. DWC connections are interchangeable with DWC/C-SR connections of the same OD and wall.
3. Connection performance properties are based on nominal pipe body and connection dimensions.
4. DWC connection internal and external pressure resistance is calculated using the API rating for buttress connections. API Internal pressure resistance is calculated from formulas 31, 32, and 35 in the API Bulletin 5C3.
5. DWC joint strength is the minimum pipe body yield strength multiplied by the connection critical area.
6. API joint strength is for reference only. It is calculated from formulas 42 and 43 in the API Bulletin 5C3.
7. Bending efficiency is equal to the compression efficiency.
8. The torque values listed are recommended. The actual torque required may be affected by field conditions such as temperature, thread compound, speed of make-up, weather conditions, etc.
9. Connection yield torque is not to be exceeded.
10. Reference string length is calculated by dividing the joint strength by both the nominal weight in air and a design factor (DF) of 1.4. These values are offered for reference only and do not include load factors such as bending, buoyancy, temperature, load dynamics, etc.
11. DWC connections will accommodate API standard drift diameters.
12. DWC/C family of connections are compatible with API Buttress BTC connections. Please contact [tech.support@vam-usa.com](mailto:tech.support@vam-usa.com) for details on connection ratings and make-up.

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.



New Search »

« Back to Previous List

USC ☒ Metric

6/8/2015 10:14:05 AM

| Mechanical Properties            | Pipe          | BTC    | LTC | STC    |          |
|----------------------------------|---------------|--------|-----|--------|----------|
| Minimum Yield Strength           | 55,000        | --     | --  | --     | psi      |
| Maximum Yield Strength           | 80,000        | --     | --  | --     | psi      |
| Minimum Tensile Strength         | 75,000        | --     | --  | --     | psi      |
| Dimenstons                       | Pipe          | BTC    | LTC | STC    |          |
| Outside Diameter                 | 10.750        | 11.750 | --  | 11.750 | in.      |
| Wall Thickness                   | 0.350         | --     | --  | --     | in.      |
| Inside Diameter                  | 10.050        | 10.050 | --  | 10.050 | in.      |
| Standard Drift                   | 9.894         | 9.894  | --  | 9.894  | in.      |
| Alternate Drift                  | --            | --     | --  | --     | in.      |
| Nominal Linear Weight, T&C       | 40.50         | --     | --  | --     | lbs/ft   |
| Plain End Weight                 | 38.91         | --     | --  | --     | lbs/ft   |
| Performance                      | Pipe          | BTC    | LTC | STC    |          |
| Minimum Collapse Pressure        | 1,580         | 1,580  | --  | 1,580  | psi      |
| Minimum Internal Yield Pressure  | 3,130         | 3,130  | --  | 3,130  | psi      |
| Minimum Pipe Body Yield Strength | 629.00        | --     | --  | --     | 1000 lbs |
| Joint Strength                   | --            | 700    | --  | 420    | 1000 lbs |
| Reference Length                 | --            | 11,522 | --  | 6,915  | ft       |
| Make-Up Data                     | Pipe          | BTC    | LTC | STC    |          |
| Make-Up Loss                     | --            | 4.81   | --  | 3.50   | in.      |
| Minimum Make-Up Torque           | --            | --     | --  | 3,150  | ft-lbs   |
| Maximum Make-Up Torque           | Page 28 of 32 | --     | --  | 5,250  | ft-lbs   |



## API 5CT, 10th Ed. Connection Data Sheet

| O.D. (in) | WEIGHT (lb/ft)                     | WALL (in) | GRADE | *API DRIFT (in) | RBW % |
|-----------|------------------------------------|-----------|-------|-----------------|-------|
| 8.625     | Nominal: 32.00<br>Plain End: 31.13 | 0.352     | J55   | 7.796           | 87.5  |

## Material Properties (PE)

| Pipe                      |        |
|---------------------------|--------|
| Minimum Yield Strength:   | 55 ksi |
| Maximum Yield Strength:   | 80 ksi |
| Minimum Tensile Strength: | 75 ksi |
| Coupling                  |        |
| Minimum Yield Strength:   | 55 ksi |
| Maximum Yield Strength:   | 80 ksi |
| Minimum Tensile Strength: | 75 ksi |

## Pipe Body Data (PE)

| Geometry                                     |                       |
|----------------------------------------------|-----------------------|
| Nominal ID:                                  | 7.92 inch             |
| Nominal Area:                                | 9.149 in <sup>2</sup> |
| *Special/Alt. Drift:                         | 7.875 inch            |
| Performance                                  |                       |
| Pipe Body Yield Strength:                    | 503 kips              |
| Collapse Resistance:                         | 2,530 psi             |
| Internal Yield Pressure:<br>(API Historical) | 3,930 psi             |

## API Connection Data

Coupling OD: 9.625"

| STC Performance                       |           |
|---------------------------------------|-----------|
| STC Internal Pressure:                | 3,930 psi |
| STC Joint Strength:                   | 372 kips  |
| LTC Performance                       |           |
| LTC Internal Pressure:                | 3,930 psi |
| LTC Joint Strength:                   | 417 kips  |
| SC-BTC Performance - Cplg OD = 9.125" |           |
| BTC Internal Pressure:                | 3,930 psi |
| BTC Joint Strength:                   | 503 kips  |

## API Connection Torque

| STC Torque (ft-lbs)                                |       |       |       |
|----------------------------------------------------|-------|-------|-------|
| Min:                                               | 2,793 | Opti: | 3,724 |
|                                                    |       | Max:  | 4,655 |
| LTC Torque (ft-lbs)                                |       |       |       |
| Min:                                               | 3,130 | Opti: | 4,174 |
|                                                    |       | Max:  | 5,217 |
| BTC Torque (ft-lbs)                                |       |       |       |
| follow API guidelines regarding positional make up |       |       |       |

\*Alt. Drift will be used unless API Drift is specified on order.

\*\*If above API connections do not suit your needs, VAM® premium connections are available up to 100% of pipe body ratings.

ALL INFORMATION IS PROVIDED BY VALLOUREC OR ITS AFFILIATES AT USER'S SOLE RISK, WITHOUT LIABILITY FOR LOSS, DAMAGE OR INJURY RESULTING FROM THE USE THEREOF; AND ON AN "AS IS" BASIS WITHOUT WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR PURPOSE, ACCURACY OR COMPLETENESS. THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED FOR INFORMATIONAL PURPOSES ONLY AND IS BASED ON ESTIMATES THAT HAVE NOT BEEN VERIFIED OR TESTED. IN NO EVENT SHALL VALLOUREC OR ITS AFFILIATES BE RESPONSIBLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, EXEMPLARY OR CONSEQUENTIAL LOSS OR DAMAGE (INCLUDING WITHOUT LIMITATION, LOSS OF USE, LOSS OF BARGAIN, LOSS OF REVENUE, PROFIT OR ANTICIPATED PROFIT) HOWEVER CAUSED OR ARISING, AND WHETHER SUCH LOSSES OR DAMAGES WERE FORESEEABLE OR VALLOUREC OR ITS AFFILIATES WERE ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Rev 3, 7/30/2021

10/21/2022 15:24

VALLOUREC STAR 8.625 32# J55 S S2L2 DA 7.875 W/O# SLN# PO# MADE IN USA FT LB

Issued on: 10 Feb. 2021 by Wesley Ott

VAM® SPRINT-SF  
Connection Data Sheet

|             |                                                      |                       |                 |                         |                              |
|-------------|------------------------------------------------------|-----------------------|-----------------|-------------------------|------------------------------|
| OD<br>6 in. | Weight (lb/ft)<br>Nominal: 24.50<br>Plain End: 23.95 | Wall Th.<br>0.400 in. | Grade<br>P110EC | API Drift:<br>5.075 in. | Connection<br>VAM® SPRINT-SF |
|-------------|------------------------------------------------------|-----------------------|-----------------|-------------------------|------------------------------|

| PIPE PROPERTIES                |            |       |
|--------------------------------|------------|-------|
| Nominal OD                     | 6.000      | in.   |
| Nominal ID                     | 5.200      | in.   |
| Nominal Cross Section Area     | 7.037      | sqin. |
| Grade Type                     | High Yield |       |
| Min. Yield Strength            | 125        | ksi   |
| Max. Yield Strength            | 140        | ksi   |
| Min. Ultimate Tensile Strength | 135        | ksi   |


| CONNECTION PROPERTIES        |                     |           |
|------------------------------|---------------------|-----------|
| Connection Type              | Integral Semi-Flush |           |
| Connection OD (nom):         | 6.277               | in.       |
| Connection ID (nom):         | 5.146               | in.       |
| Make-Up Loss                 | 5.386               | in.       |
| Critical Cross Section       | 6.417               | sqin.     |
| Tension Efficiency           | 91.0                | % of pipe |
| Compression Efficiency       | 91.0                | % of pipe |
| Internal Pressure Efficiency | 100                 | % of pipe |
| External Pressure Efficiency | 100                 | % of pipe |

| CONNECTION PERFORMANCES               |        |         |
|---------------------------------------|--------|---------|
| Tensile Yield Strength                | 801    | klb     |
| Compression Resistance                | 801    | klb     |
| Internal Yield Pressure               | 14,580 | psi     |
| Collapse Resistance                   | 12,500 | psi     |
| Max. Structural Bending               | 83     | °/100ft |
| Max. Bending with ISO/API Sealability | 30     | °/100ft |

\* 87.5% RBW

| TORQUE VALUES                      |        |       |
|------------------------------------|--------|-------|
| Min. Make-up torque                | 21,750 | ft.lb |
| Opt. Make-up torque                | 24,250 | ft.lb |
| Max. Make-up torque                | 26,750 | ft.lb |
| Max. Torque with Sealability (MTS) | 53,000 | ft.lb |

VAM® SPRINT-SF is a semi-flush connection innovatively designed for extreme shale applications. Its high tension rating and ultra high torque capacity make it ideal to run a fill string length as production casing in shale wells with extended horizontal sections and tight clearance requirements.

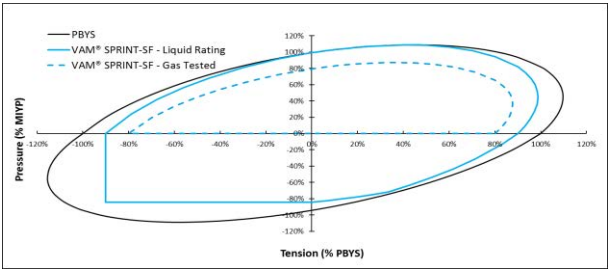

canada@vamfieldservice.com  
usa@vamfieldservice.com  
mexico@vamfieldservice.com  
brazil@vamfieldservice.com

Do you need help on this product? - Remember no one knows VAM® like VAM®

uk@vamfieldservice.com  
dubai@vamfieldservice.com  
nigeria@vamfieldservice.com  
angola@vamfieldservice.com

china@vamfieldservice.com  
baku@vamfieldservice.com  
singapore@vamfieldservice.com  
australia@vamfieldservice.com

Over 140 VAM® Specialists available worldwide 24/7 for Rig Site Assistance





# Connection Data Sheet

| OD (in.) | WEIGHT (lbs./ft.)                  | WALL (in.) | GRADE      | API DRIFT (in.) | RBW% | CONNECTION |
|----------|------------------------------------|------------|------------|-----------------|------|------------|
| 6.000    | Nominal: 22.30<br>Plain End: 21.70 | 0.360      | VST P110EC | 5.155           | 92.5 | DWC/C-IS   |

## PIPE PROPERTIES

|                              |         |        |
|------------------------------|---------|--------|
| Nominal OD                   | 6.000   | in.    |
| Nominal ID                   | 5.280   | in.    |
| Nominal Area                 | 6.379   | sq.in. |
| Grade Type                   | API 5CT |        |
| Min. Yield Strength          | 125     | ksi    |
| Max. Yield Strength          | 140     | ksi    |
| Min. Tensile Strength        | 135     | ksi    |
| Yield Strength               | 797     | klb    |
| Ultimate Strength            | 861     | klb    |
| Min. Internal Yield Pressure | 13,880  | psi    |
| Collapse Pressure            | 9,800   | psi    |

## CONNECTION PERFORMANCES

|                                             |        |          |
|---------------------------------------------|--------|----------|
| Yield Strength                              | 797    | klb      |
| Parting Load                                | 861    | klb      |
| Compression Rating                          | 797    | klb      |
| Min. Internal Yield                         | 13,880 | psi      |
| External Pressure                           | 9,800  | psi      |
| Maximum Uniaxial Bend Rating                | 47.7   | °/100 ft |
| Reference String Length w 1.4 Design Factor | 25,530 | ft.      |

## CONNECTION PROPERTIES

|                              |                  |
|------------------------------|------------------|
| Connection Type              | Semi-Premium T&C |
| Connection OD (nom)          | 6.650 in.        |
| Connection ID (nom)          | 5.280 in.        |
| Make-Up Loss                 | 4.313 in.        |
| Coupling Length              | 9.625 in.        |
| Critical Cross Section       | 6.379 sq.in.     |
| Tension Efficiency           | 100.0% of pipe   |
| Compression Efficiency       | 100.0% of pipe   |
| Internal Pressure Efficiency | 100.0% of pipe   |
| External Pressure Efficiency | 100.0% of pipe   |

## FIELD END TORQUE VALUES

|                               |        |       |
|-------------------------------|--------|-------|
| Min. Make-up torque           | 17,000 | ft.lb |
| Opti. Make-up torque          | 18,250 | ft.lb |
| Max. Make-up torque           | 19,500 | ft.lb |
| Min. Shoulder Torque          | 1,700  | ft.lb |
| Max. Shoulder Torque          | 13,600 | ft.lb |
| Min. Delta Turn               | -      | Turns |
| Max. Delta Turn               | 0.200  | Turns |
| Maximum Operational Torque    | 24,200 | ft.lb |
| Maximum Torsional Value (MTV) | 26,620 | ft.lb |

Need Help? Contact: [tech.support@vam-usa.com](mailto:tech.support@vam-usa.com)

Reference Drawing: 8135PP Rev.02 & 8135BP Rev.02

Date: 07/30/2020

Time: 07:50:47 PM

For detailed information on performance properties, refer to DWC Connection Data Notes on following page(s).

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.



VAM USA  
2107 CityWest Boulevard Suite 1300  
Houston, TX 77042  
Phone: 713-479-3200  
Fax: 713-479-3234  
VAM® USA Sales E-mail: [VAMUSAsales@vam-usa.com](mailto:VAMUSAsales@vam-usa.com)  
Tech Support Email: [tech.support@vam-usa.com](mailto:tech.support@vam-usa.com)

**DWC Connection Data Sheet Notes:**

1. DWC connections are available with a seal ring (SR) option.
2. All standard DWC/C connections are interchangeable for a given pipe OD. DWC connections are interchangeable with DWC/C-SR connections of the same OD and wall.
3. Connection performance properties are based on nominal pipe body and connection dimensions.
4. DWC connection internal and external pressure resistance is calculated using the API rating for buttress connections. API Internal pressure resistance is calculated from formulas 31, 32, and 35 in the API Bulletin 5C3.
5. DWC joint strength is the minimum pipe body yield strength multiplied by the connection critical area.
6. API joint strength is for reference only. It is calculated from formulas 42 and 43 in the API Bulletin 5C3.
7. Bending efficiency is equal to the compression efficiency.
8. The torque values listed are recommended. The actual torque required may be affected by field conditions such as temperature, thread compound, speed of make-up, weather conditions, etc.
9. Connection yield torque is not to be exceeded.
10. Reference string length is calculated by dividing the joint strength by both the nominal weight in air and a design factor (DF) of 1.4. These values are offered for reference only and do not include load factors such as bending, buoyancy, temperature, load dynamics, etc.
11. DWC connections will accommodate API standard drift diameters.
12. DWC/C family of connections are compatible with API Buttress BTC connections. Please contact [tech.support@vam-usa.com](mailto:tech.support@vam-usa.com) for details on connection ratings and make-up.

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.





# Salt Section Annular Clearance Variance Request

---

---

Daniel Moose



# Current Design (Salt Strings)

## 0.422" Annular clearance requirement

- Casing collars shall have a minimum clearance of 0.422 inches on all sides in the hole/casing annulus, with recognition that variances can be granted for justified exceptions.

- 12.25" Hole x 9.625" 40# J55/HCK55 LTC Casing
  - 1.3125" Clearance to casing OD
  - 0.8125" Clearance to coupling OD
- 9.875" Hole x 8.75" 38.5# P110 Sprint-SF Casing
  - 0.5625" Clearance to casing OD
  - 0.433" Clearance to coupling OD

# Annular Clearance Variance Request

**EOG request permission to allow deviation from the 0.422" annulus clearance requirement for the intermediate (salt) section from Onshore Order #2 under the following conditions:**

- The variance is not applicable within the Potash Boundaries or Capitan Reef areas.
- Operator takes responsibility to get casing to set point in the event that the clearance causes stuck pipe issues


# Volumetric Hole Size Calculation

## Hole Size Calculations Off Cement Volumes

- Known volume of cement pumped
- Known volume of cement returned to surface
- Must not have had any losses
- Must have bumped plug

## Average Hole Size


- 12.25" Hole
  - 12.88" Hole
    - 5.13% diameter increase
    - 10.52% area increase
  - 0.63" Average enlargement
  - 0.58" Median enlargement
  - 179 Well Count
- 9.875" Hole
  - 10.30" Hole
    - 4.24% diameter increase
    - 9.64% area increase
  - 0.42" Average enlargement
  - 0.46" Median enlargement
  - 11 Well Count

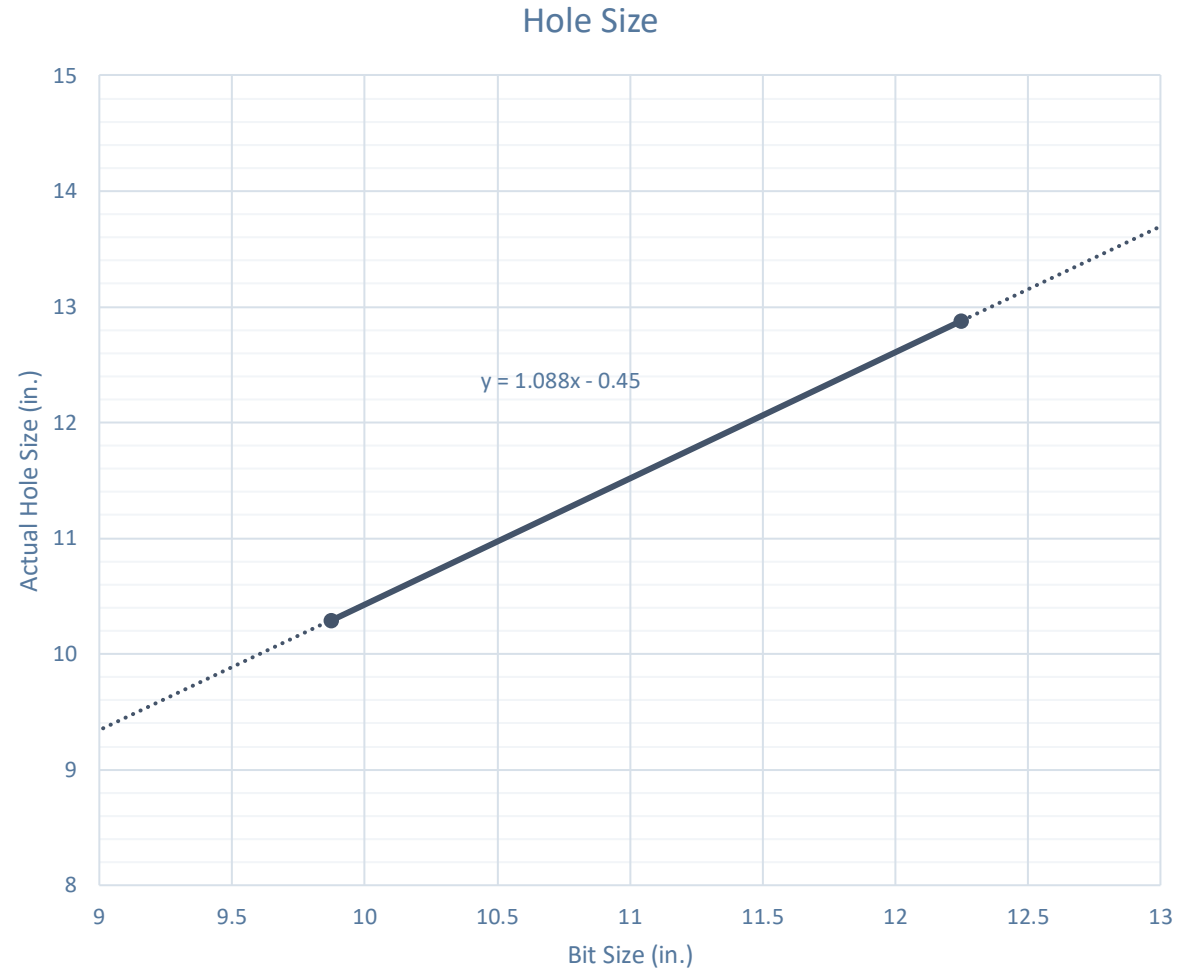

# Caliper Hole Size (12.25")

## Average Hole Size

- 12.25" Bit
  - 12.76" Hole
    - 4.14% diameter increase
    - 8.44% area increase
  - 0.51" Average enlargement
  - 0.52" Median enlargement
  - Brine

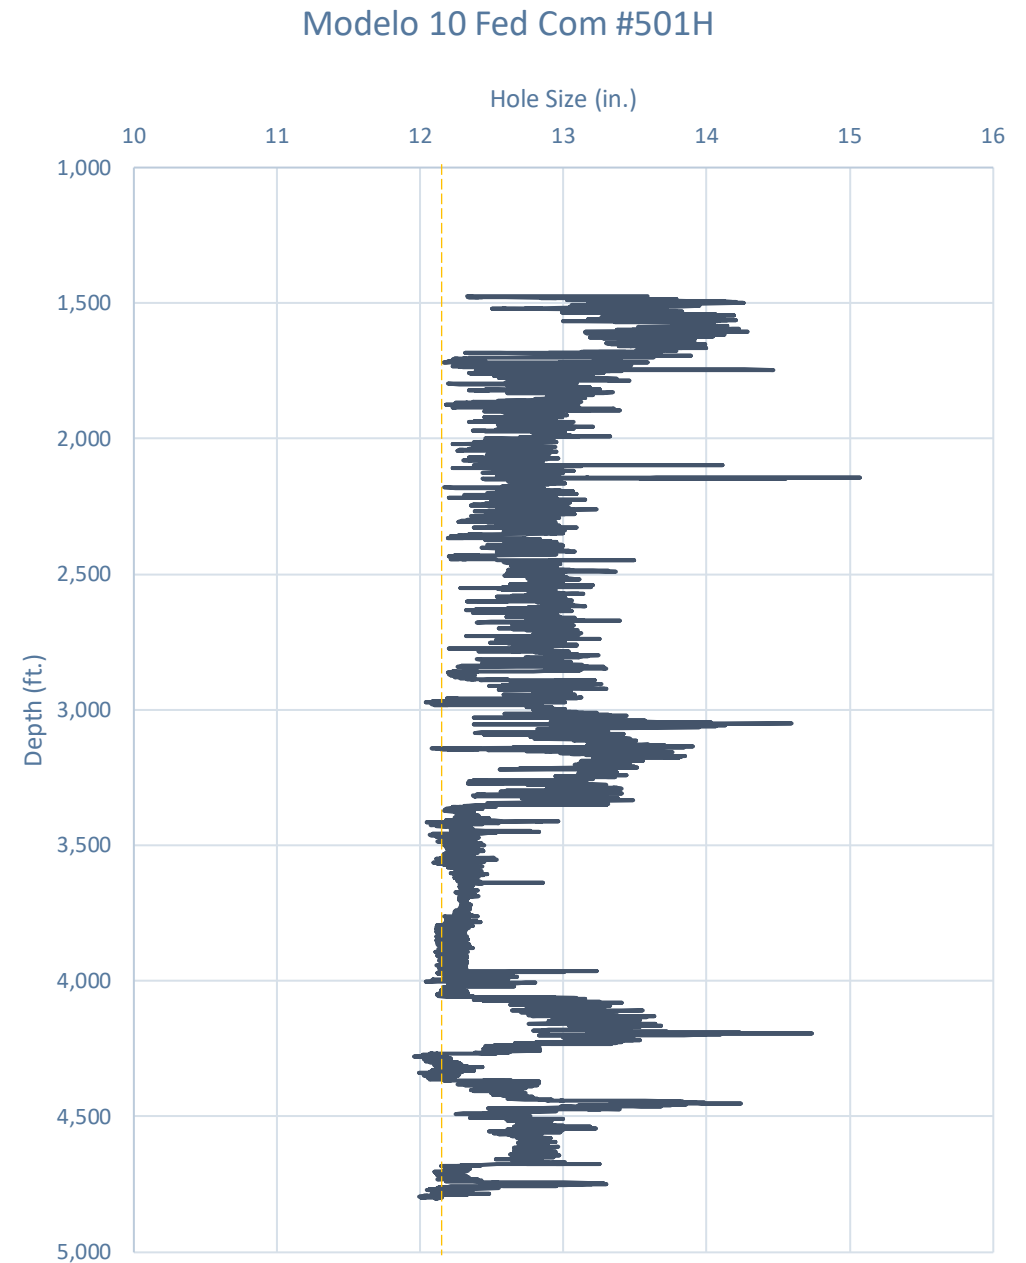


# Caliper Hole Size (9.875")

## Average Hole Size

- 9.875" Hole
  - 11.21" Hole
    - 13.54% diameter increase
    - 28.92% area increase
  - 1.33" Average enlargement
  - 1.30" Median enlargement
  - EnerLite


Whirling Wind 11 Fed Com #744H

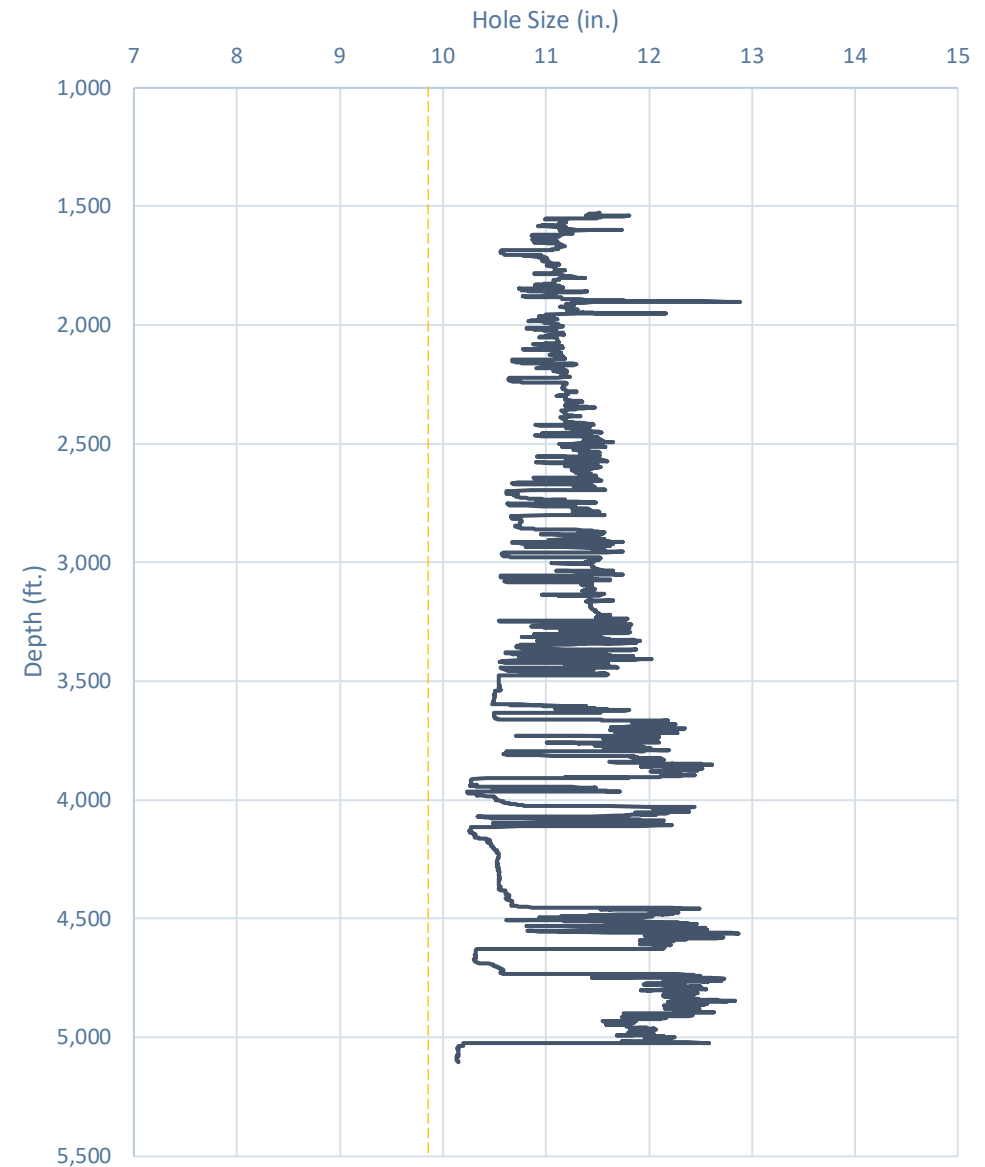

# Design A

## Proposed 11" Hole with 9.625" 40# J55/HCK55 LTC Casing


- 11" Bit + 0.52" Average hole enlargement = 11.52" Hole Size
  - 0.9475" Clearance to casing OD
 
$$= \frac{11.52 - 9.625}{2}$$
  - 0.4475" Clearance to coupling OD
 
$$= \frac{11.52 - 10.625}{2}$$
- Previous Shoe – 13.375" 54.5# J55 STC
  - 0.995" Clearance to coupling OD (~1,200' overlap)
 
$$= \frac{12.615 - 10.625}{2}$$

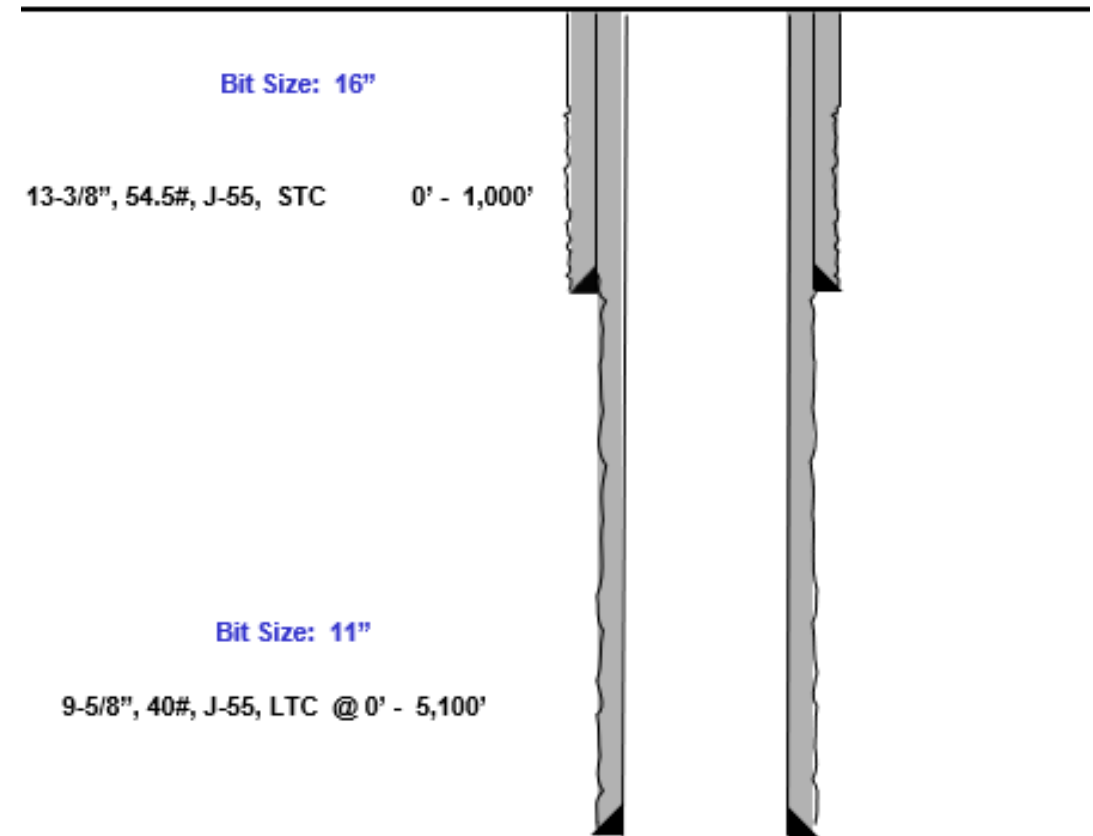

# Design B

## Proposed 9.875" Hole with 8.625" 32# J55/P110 BTC-SC Casing

- 9.875" Bit + 0.42" Average hole enlargement = 10.295" Hole Size
  - 0.835" Clearance to casing OD
 
$$= \frac{10.295 - 8.625}{2}$$
  - 0.585" Clearance to coupling OD
 
$$= \frac{10.295 - 9.125}{2}$$
- Previous Shoe – 10.75" 40.5# J55 STC
  - 0.4625" Clearance to coupling OD (~1,200' overlap)
 
$$= \frac{10.05 - 9.125}{2}$$

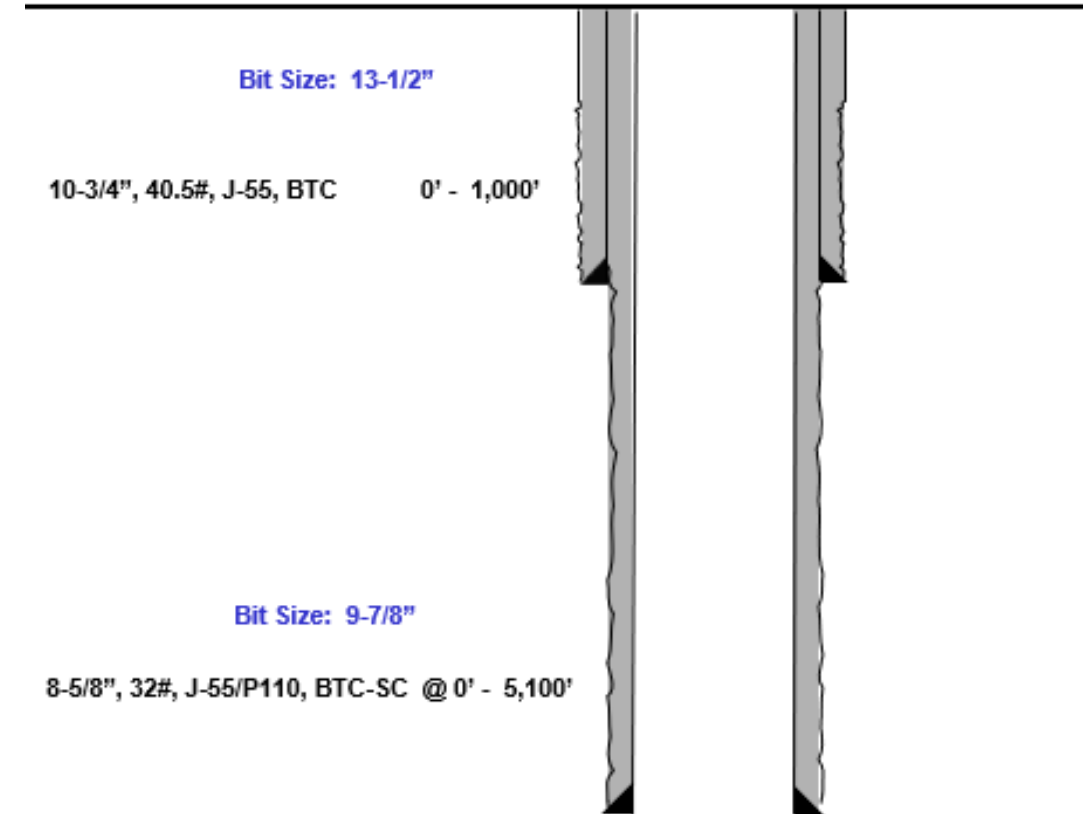





# Index

---

# Casing Spec Sheets

## PERFORMANCE DATA

API LTC

Technical Data Sheet

9.625 in

40.00 lbs/ft

K55 HC

### Tubular Parameters

|                     |        |        |                              |       |      |
|---------------------|--------|--------|------------------------------|-------|------|
| Size                | 9.625  | in     | Minimum Yield                | 55    | ksi  |
| Nominal Weight      | 40.00  | lbs/ft | Minimum Tensile              | 95    | ksi  |
| Grade               | K55 HC |        | Yield Load                   | 629   | kips |
| PE Weight           | 38.94  | lbs/ft | Tensile Load                 | 1088  | kips |
| Wall Thickness      | 0.395  | in     | Min. Internal Yield Pressure | 3,950 | psi  |
| Nominal ID          | 8.835  | in     | Collapse Pressure            | 3600  | psi  |
| Drift Diameter      | 8.750  | in     |                              |       |      |
| Nom. Pipe Body Area | 11.454 | in²    |                              |       |      |

### Connection Parameters

|                              |        |       |
|------------------------------|--------|-------|
| Connection OD                | 10.625 | in    |
| Coupling Length              | 10.500 | in    |
| Threads Per Inch             | 8      | tpi   |
| Standoff Thread Turns        | 3.50   | turns |
| Make-Up Loss                 | 4.750  | in    |
| Min. Internal Yield Pressure | 3,950  | psi   |

### Pipe Body and API Connections Performance Data

13.375 54.50/0.380 J55

PDF

New Search »

« Back to Previous List

USC ☒ Metric

6/8/2015 10:04:37 AM

| Mechanical Properties            | Pipe   | BTC    | LTC | STC    |          |
|----------------------------------|--------|--------|-----|--------|----------|
| Minimum Yield Strength           | 55,000 | --     | --  | --     | psi      |
| Maximum Yield Strength           | 80,000 | --     | --  | --     | psi      |
| Minimum Tensile Strength         | 75,000 | --     | --  | --     | psi      |
| Dimensions                       | Pipe   | BTC    | LTC | STC    |          |
| Outside Diameter                 | 13.375 | 14.375 | --  | 14.375 | in.      |
| Wall Thickness                   | 0.380  | --     | --  | --     | in.      |
| Inside Diameter                  | 12.615 | 12.615 | --  | 12.615 | in.      |
| Standard Drift                   | 12.459 | 12.459 | --  | 12.459 | in.      |
| Alternate Drift                  | --     | --     | --  | --     | in.      |
| Nominal Linear Weight, T&C       | 54.50  | --     | --  | --     | lbs/ft   |
| Plain End Weight                 | 52.79  | --     | --  | --     | lbs/ft   |
| Performance                      | Pipe   | BTC    | LTC | STC    |          |
| Minimum Collapse Pressure        | 1,130  | 1,130  | --  | 1,130  | psi      |
| Minimum Internal Yield Pressure  | 2,740  | 2,740  | --  | 2,740  | psi      |
| Minimum Pipe Body Yield Strength | 853.00 | --     | --  | --     | 1000 lbs |
| Joint Strength                   | --     | 909    | --  | 514    | 1000 lbs |
| Reference Length                 | --     | 11,125 | --  | 6,290  | ft       |
| Make-Up Data                     | Pipe   | BTC    | LTC | STC    |          |
| Make-Up Loss                     | --     | 4.81   | --  | 3.50   | in.      |
| Minimum Make-Up Torque           | --     | --     | --  | 3,860  | ft-lbs   |
| Maximum Make-Up Torque           | --     | --     | --  | 6,430  | ft-lbs   |



# Casing Spec Sheets

## Pipe Body and API Connections Performance Data

10.750 40.50/0.350 J55

PDF

New Search »

« Back to Previous List

USC ☒ Metric

6/8/2015 10:14:05 AM

| Mechanical Properties            | Pipe   | BTC    | LTC | STC    |          |
|----------------------------------|--------|--------|-----|--------|----------|
| Minimum Yield Strength           | 55,000 | --     | --  | --     | psi      |
| Maximum Yield Strength           | 80,000 | --     | --  | --     | psi      |
| Minimum Tensile Strength         | 75,000 | --     | --  | --     | psi      |
| Dimensions                       | Pipe   | BTC    | LTC | STC    |          |
| Outside Diameter                 | 10.750 | 11.750 | --  | 11.750 | in.      |
| Wall Thickness                   | 0.350  | --     | --  | --     | in.      |
| Inside Diameter                  | 10.050 | 10.050 | --  | 10.050 | in.      |
| Standard Drift                   | 9.894  | 9.894  | --  | 9.894  | in.      |
| Alternate Drift                  | --     | --     | --  | --     | in.      |
| Nominal Linear Weight, T&C       | 40.50  | --     | --  | --     | lbs/ft   |
| Plain End Weight                 | 38.91  | --     | --  | --     | lbs/ft   |
| Performance                      | Pipe   | BTC    | LTC | STC    |          |
| Minimum Collapse Pressure        | 1,580  | 1,580  | --  | 1,580  | psi      |
| Minimum Internal Yield Pressure  | 3,130  | 3,130  | --  | 3,130  | psi      |
| Minimum Pipe Body Yield Strength | 629.00 | --     | --  | --     | 1000 lbs |
| Joint Strength                   | --     | 700    | --  | 420    | 1000 lbs |
| Reference Length                 | --     | 11,522 | --  | 6,915  | ft       |
| Make-Up Data                     | Pipe   | BTC    | LTC | STC    |          |
| Make-Up Loss                     | --     | 4.81   | --  | 3.50   | in.      |
| Minimum Make-Up Torque           | --     | --     | --  | 3,150  | ft-lbs   |
| Maximum Make-Up Torque           | --     | --     | --  | 5,250  | ft-lbs   |



### API 5CT, 10th Ed. Connection Data Sheet

| O.D. (in) | WEIGHT (lb/ft)                     | WALL (in) | GRADE | *API DRIFT (in) | RBW % |
|-----------|------------------------------------|-----------|-------|-----------------|-------|
| 8.625     | Nominal: 32.00<br>Plain End: 31.13 | 0.352     | J55   | 7.796           | 87.5  |

| Material Properties (PE)  |        | Pipe Body Data (PE)                          |                       |
|---------------------------|--------|----------------------------------------------|-----------------------|
| Pipe                      |        | Geometry                                     |                       |
| Minimum Yield Strength:   | 55 ksi | Nominal ID:                                  | 7.92 inch             |
| Maximum Yield Strength:   | 80 ksi | Nominal Area:                                | 9.149 in <sup>2</sup> |
| Minimum Tensile Strength: | 75 ksi | *Special/Alt. Drift:                         | 7.875 inch            |
| Coupling                  |        | Performance                                  |                       |
| Minimum Yield Strength:   | 55 ksi | Pipe Body Yield Strength:                    | 503 kips              |
| Maximum Yield Strength:   | 80 ksi | Collapse Resistance:                         | 2,530 psi             |
| Minimum Tensile Strength: | 75 ksi | Internal Yield Pressure:<br>(API Historical) | 3,930 psi             |

| API Connection Data                   |  | API Connection Torque                              |  |
|---------------------------------------|--|----------------------------------------------------|--|
| Coupling OD: 9.625"                   |  | STC Torque (ft-lbs)                                |  |
| STC Performance                       |  | Min: 2,793 Opti: 3,724 Max: 4,655                  |  |
| STC Internal Pressure:                |  | LTC Torque (ft-lbs)                                |  |
| STC Joint Strength:                   |  | Min: 3,130 Opti: 4,174 Max: 5,217                  |  |
| LTC Performance                       |  | BTC Torque (ft-lbs)                                |  |
| LTC Internal Pressure:                |  | follow API guidelines regarding positional make up |  |
| LTC Joint Strength:                   |  |                                                    |  |
| SC-BTC Performance - Cplg OD = 9.125" |  |                                                    |  |
| BTC Internal Pressure:                |  |                                                    |  |
| BTC Joint Strength:                   |  |                                                    |  |

\*Alt. Drift will be used unless API Drift is specified on order.

\*\*If above API connections do not suit your needs, VAM® premium connections are available up to 100% of pipe body ratings.

ALL INFORMATION IS PROVIDED BY VALLOUREC OR ITS AFFILIATES AT USER'S SOLE RISK, WITHOUT LIABILITY FOR LOSS, DAMAGE OR INJURY RESULTING FROM THE USE THEREOF, AND ON AN "AS IS" BASIS WITHOUT WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR PURPOSE, ACCURACY OR COMPLETENESS. THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED FOR INFORMATIONAL PURPOSES ONLY AND IS BASED ON ESTIMATES THAT HAVE NOT BEEN VERIFIED OR TESTED. IN NO EVENT SHALL VALLOUREC OR ITS AFFILIATES BE RESPONSIBLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, EXEMPLARY OR CONSEQUENTIAL LOSS OR DAMAGE (INCLUDING WITHOUT LIMITATION, LOSS OF USE, LOSS OF BARGAIN, LOSS OF REVENUE, PROFIT OR ANTICIPATED PROFIT) HOWEVER CAUSED OR ARISING, AND WHETHER SUCH LOSSES OR DAMAGES WERE FORESEEABLE OR VALLOUREC OR ITS AFFILIATES WERE ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Rev 3, 7/30/2021

10/21/2022 15:24



Annular Clearance Variance

**Grackle 26 East Fed Com 101H API #: 30-025-\*\*\*\*\* Variances**

EOG respectfully requests the below variances to be applied to the above well:

- Variance is requested to waive the centralizer requirements for the intermediate casing in the intermediate hole. An expansion additive will be utilized, in the cement slurry, for the entire length of the intermediate interval to maximize cement bond and zonal isolation.

- Variance is also requested to waive the centralizer requirements for the production casing in the production hole. An expansion additive will be utilized, in the cement slurry, for the entire length of the production interval to maximize cement bond and zonal isolation.

- Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

- Variance is requested to use a 5,000 psi annular BOP with the 10,000 psi BOP stack.

- EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and Cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both "A" and "B" sections). The weld will be tested to 1,500 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

EOG requests the additional variance(s) in the attached document(s):

- EOG BLM Variance 3a\_b - BOP Break-test and Offline Intermediate Cement
- EOG BLM Variance 4a - Salt Section Annular Clearance
- EOG BLM Variance 5a - Alternate Shallow Casing Designs

## 10,000 PSI BOP Annular Variance Request (EOG Variance 1c)

EOG Resources request a variance to use a 5000 psi annular BOP with a 10,000 psi BOP stack. The component and compatibility tables along with the general well control plans demonstrate how the 5000 psi annular BOP will be protected from pressures that exceed its rated working pressure (RWP). The pressure at which the control of the wellbore is transferred from the annular preventer to another available preventer will not exceed 3500 psi (70% of the RWP of the 5000 psi annular BOP).

### 1. Component and Preventer Compatibility Tables


The tables below outlines the tubulars and the compatible preventers in use. This table, combined with the drilling fluid, documents that two barriers to flow will be maintained at all times.

| 12-1/4" Intermediate Hole Section<br>10M psi requirement |                  |                   |     |                                              |            |
|----------------------------------------------------------|------------------|-------------------|-----|----------------------------------------------|------------|
| Component                                                | OD               | Primary Preventer | RWP | Alternate Preventer(s)                       | RWP        |
| Drillpipe                                                | 5.000" or 4.500" | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| HWDP                                                     | 5.000" or 4.500" | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| Jars                                                     | 6.500"           | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| DCs and MWD tools                                        | 6.500" – 8.000"  | Annular           | 5M  | -                                            | -          |
| Mud Motor                                                | 8.000" – 9.625"  | Annular           | 5M  | -                                            | -          |
| 1 <sup>st</sup> Intermediate casing                      | 9.625"           | Annular           | 5M  | -                                            | -          |
| Open-hole                                                | -                | Blind Rams        | 10M | -                                            | -          |

| 8-3/4" Production Hole Section<br>10M psi requirement |                  |                   |     |                                              |            |
|-------------------------------------------------------|------------------|-------------------|-----|----------------------------------------------|------------|
| Component                                             | OD               | Primary Preventer | RWP | Alternate Preventer(s)                       | RWP        |
| Drillpipe                                             | 5.000" or 4.500" | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| HWDP                                                  | 5.000" or 4.500" | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| Jars                                                  | 6.500"           | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| DCs and MWD tools                                     | 6.500" – 8.000"  | Annular           | 5M  | -                                            | -          |
| Mud Motor                                             | 6.750" – 8.000"  | Annular           | 5M  | -                                            | -          |
| 2 <sup>nd</sup> Intermediate casing                   | 7.625"           | Annular           | 5M  | -                                            | -          |
| Open-hole                                             | -                | Blind Rams        | 10M | -                                            | -          |

VBR = Variable Bore Ram

## EOG Resources 13-5/8" 10M PSI BOP Stack

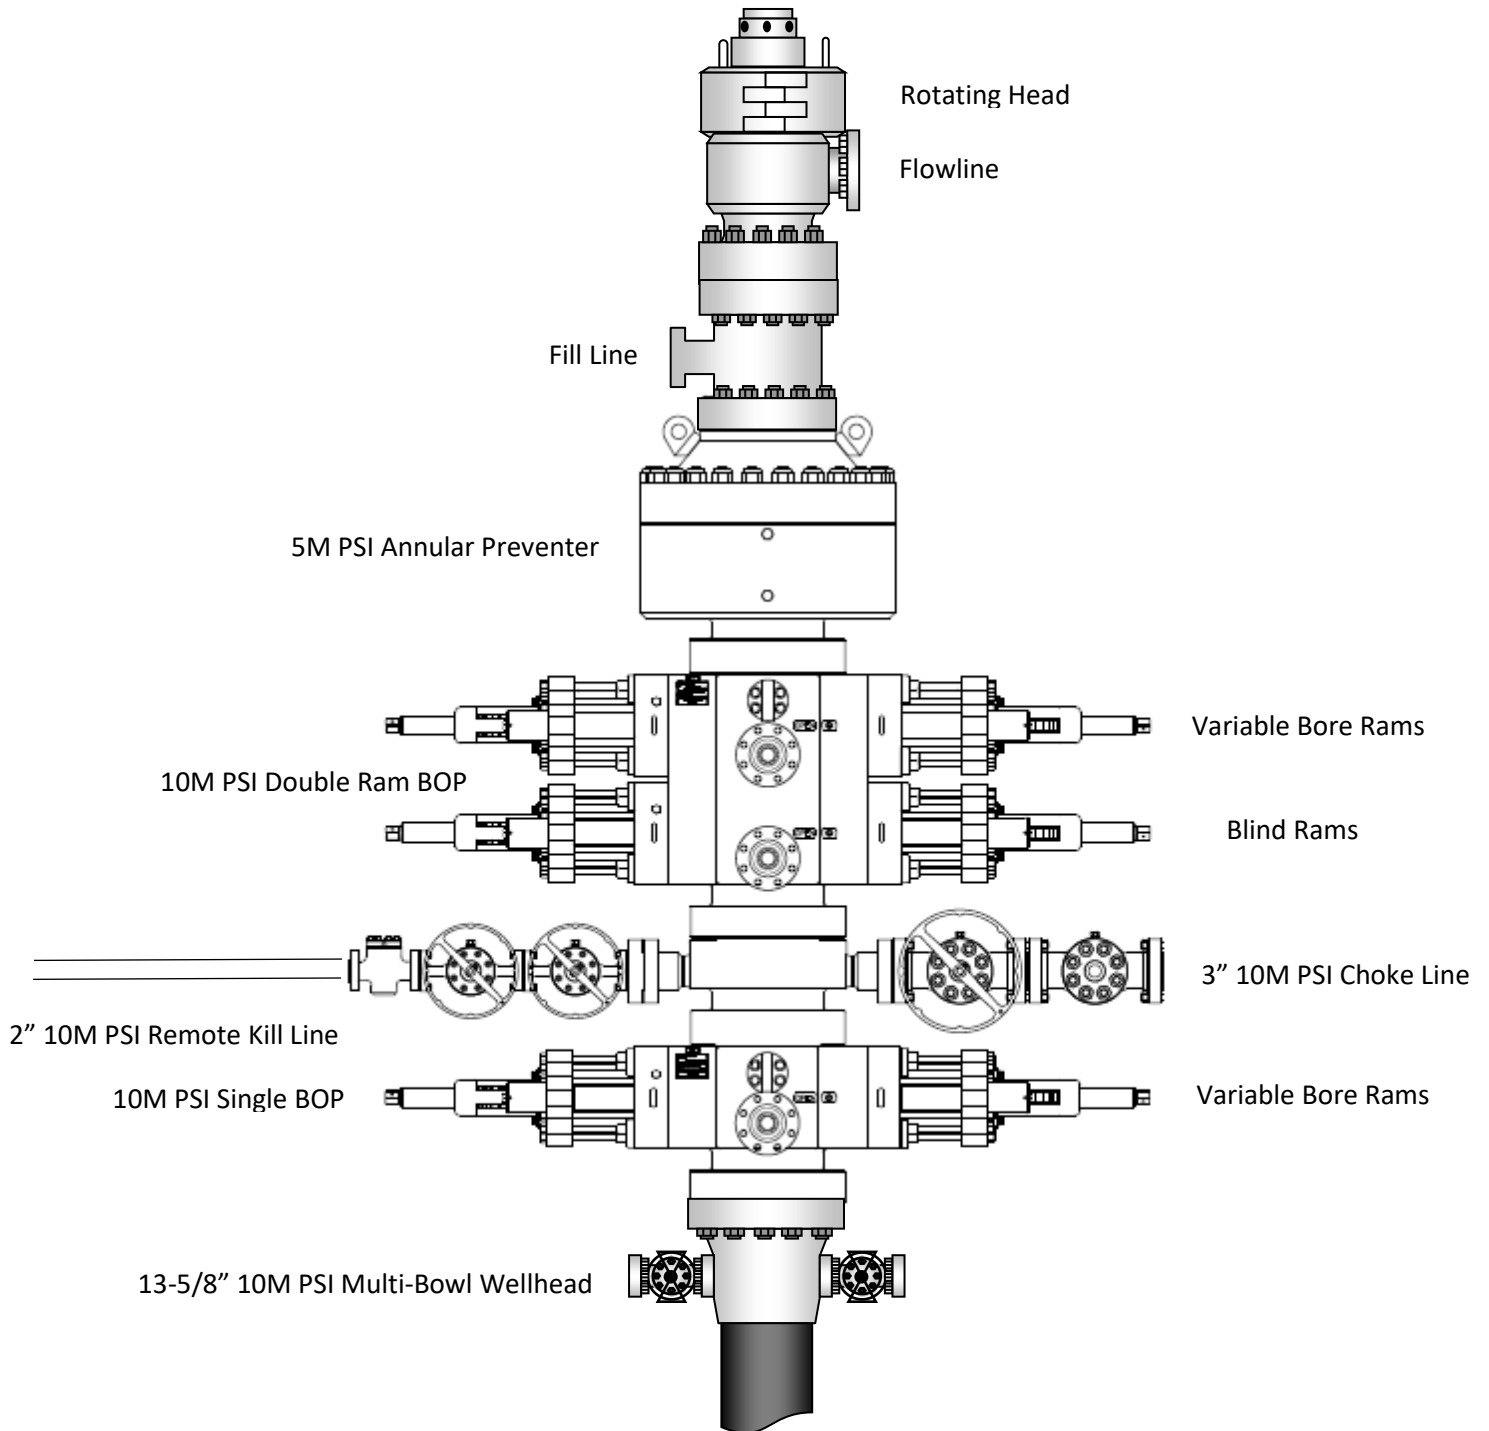

## 2. Well Control Procedures

Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the BHA through the BOPs. At least one well control drill will be performed weekly per crew to demonstrate compliance with the procedure and well control plan. The well control drill will be recorded in the daily drilling log. The type of drill will be determined by the ongoing operations, but reasonable attempts will be made to vary the type of drill conducted (pit, trip, open hole, choke, etc.). This well control plan will be available for review by rig personnel in the EOG Resources drilling supervisor's office on location, and on the rig floor. All BOP equipment will be tested as per Onshore O&G Order No. 2 with the exception of the 5000 psi annular which will be tested to 100% of its RWP.

### General Procedure While Drilling

1. Sound alarm (alert crew)
2. Space out drill string
3. Shut down pumps (stop pumps and rotary)
4. Shut-in Well (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

### General Procedure While Tripping

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out drill string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.



General Procedure While Running Production Casing

1. Sound alarm (alert crew)
2. Stab crossover and full opening safety valve and close
3. Space out string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure With No Pipe In Hole (Open Hole)

1. Sound alarm (alert crew)
2. Shut-in with blind rams. (HCR and choke will already be in the closed position.)
3. Confirm shut-in
4. Notify toolpusher/company representative
5. Read and record the following:
  - a. SICP
  - b. Pit gain
  - c. Time
6. Regroup and identify forward plan

General Procedures While Pulling BHA thru Stack


1. PRIOR to pulling last joint of drillpipe thru the stack.
  - a. Perform flowcheck, if flowing:
  - b. Sound alarm (alert crew)
  - c. Stab full opening safety valve and close
  - d. Space out drill string with tool joint just beneath the upper variable bore rams.
  - e. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
  - f. Confirm shut-in
  - g. Notify toolpusher/company representative
  - h. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
  - i. Regroup and identify forward plan

2. With BHA in the stack and compatible ram preventer and pipe combo immediately available.
  - a. Sound alarm (alert crew)
  - b. Stab crossover and full opening safety valve and close
  - c. Space out drill string with upset just beneath the upper variable bore rams.
  - d. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
  - e. Confirm shut-in
  - f. Notify toolpusher/company representative
  - g. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
  - h. Regroup and identify forward plan
3. With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.
  - a. Sound alarm (alert crew)
  - b. If possible to pick up high enough, pull string clear of the stack and follow "Open Hole" scenario.
  - c. If impossible to pick up high enough to pull the string clear of the stack:
  - d. Stab crossover, make up one joint/stand of drillpipe, and full opening safety valve and close
  - e. Space out drill string with tooljoint just beneath the upper variable bore ram.
  - f. Shut-in using upper variable bore ram. (HCR and choke will already be in the closed position.)
  - g. Confirm shut-in
  - h. Notify toolpusher/company representative
  - i. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
  - j. Regroup and identify forward plan

# Exhibit 1

## EOG Resources

### 13-5/8" 10M PSI BOP Stack

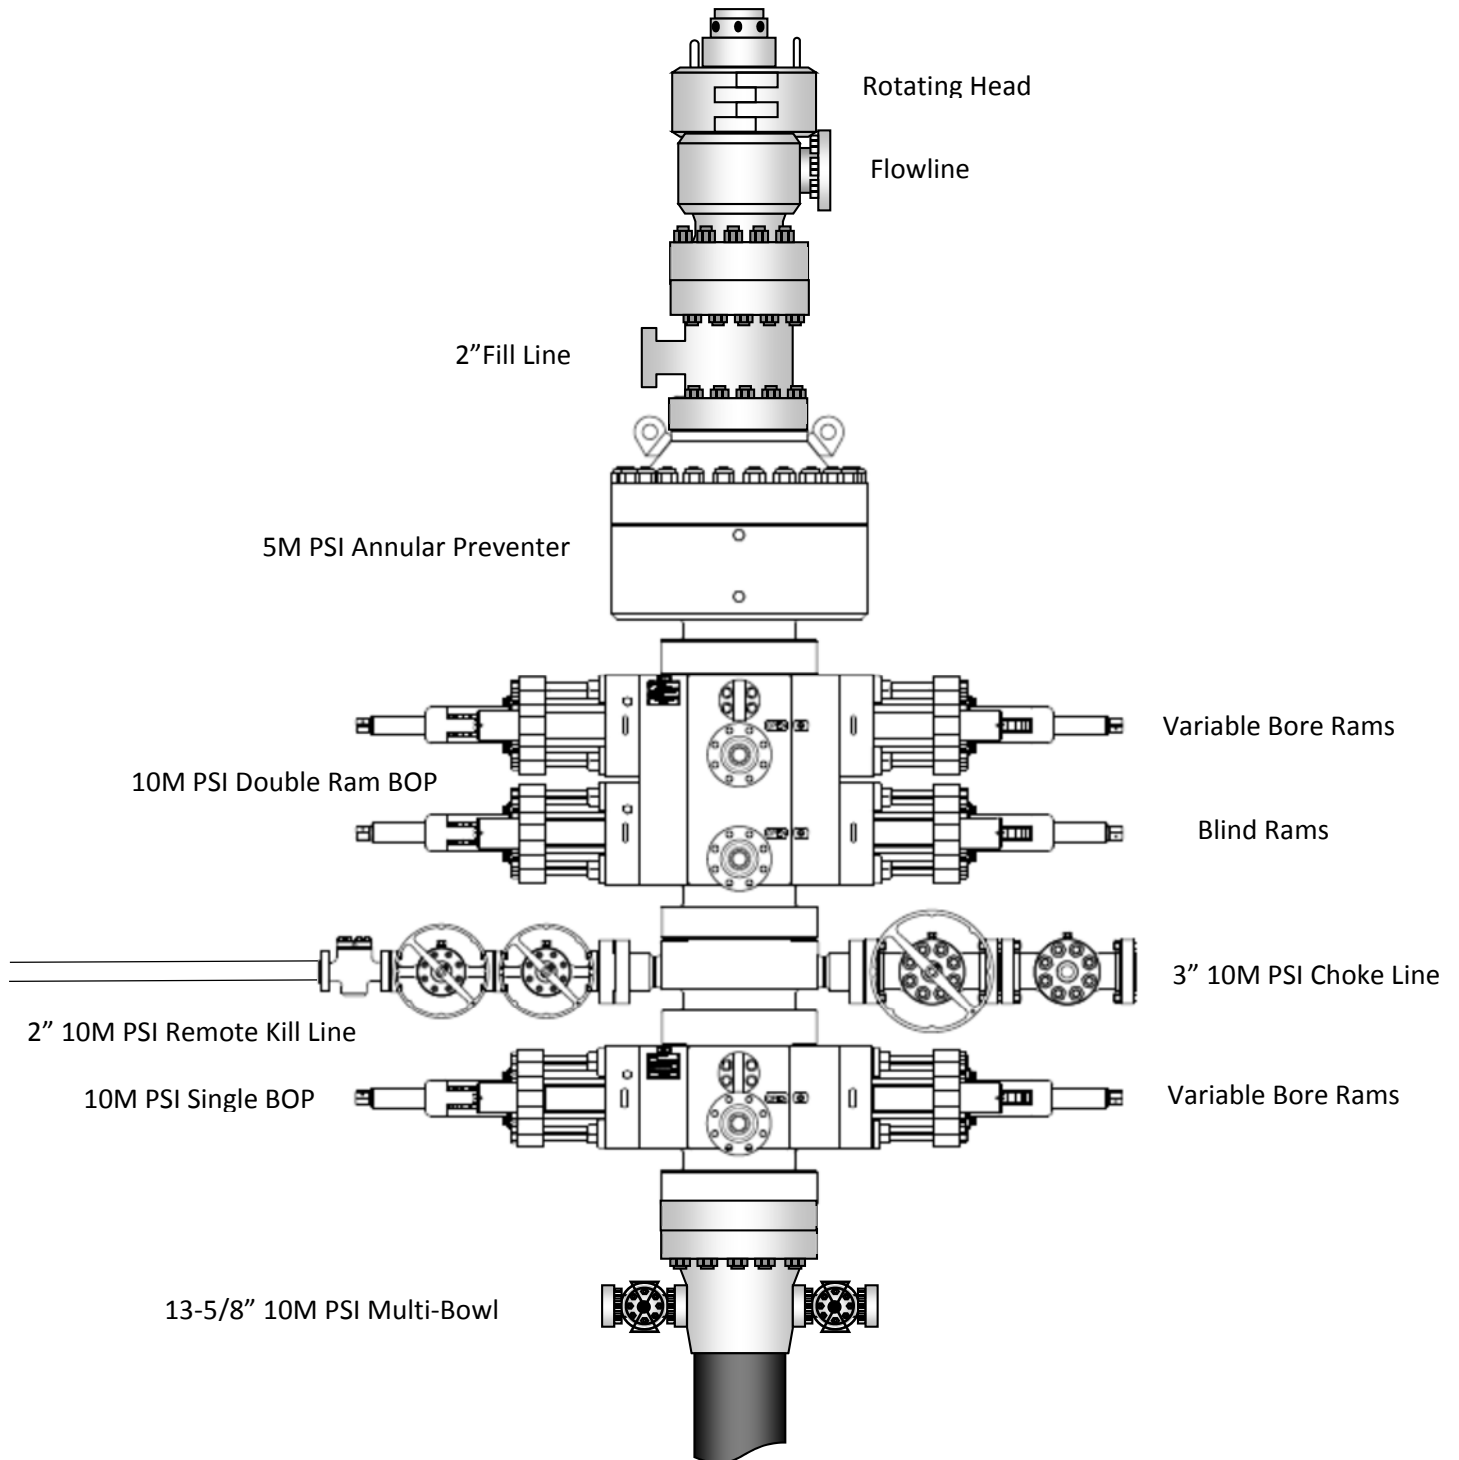



## API 5CT, 10th Ed. Connection Data Sheet

| O.D. (in) | WEIGHT (lb/ft)                     | WALL (in) | GRADE | *API DRIFT (in) | RBW % |
|-----------|------------------------------------|-----------|-------|-----------------|-------|
| 8.625     | Nominal: 32.00<br>Plain End: 31.13 | 0.352     | J55   | 7.796           | 87.5  |

## Material Properties (PE)

| Pipe                      |        |
|---------------------------|--------|
| Minimum Yield Strength:   | 55 ksi |
| Maximum Yield Strength:   | 80 ksi |
| Minimum Tensile Strength: | 75 ksi |
| Coupling                  |        |
| Minimum Yield Strength:   | 55 ksi |
| Maximum Yield Strength:   | 80 ksi |
| Minimum Tensile Strength: | 75 ksi |

## Pipe Body Data (PE)

| Geometry                                     |                       |
|----------------------------------------------|-----------------------|
| Nominal ID:                                  | 7.92 inch             |
| Nominal Area:                                | 9.149 in <sup>2</sup> |
| *Special/Alt. Drift:                         | 7.875 inch            |
| Performance                                  |                       |
| Pipe Body Yield Strength:                    | 503 kips              |
| Collapse Resistance:                         | 2,530 psi             |
| Internal Yield Pressure:<br>(API Historical) | 3,930 psi             |

## API Connection Data

Coupling OD: 9.625"

| STC Performance                       |           |
|---------------------------------------|-----------|
| STC Internal Pressure:                | 3,930 psi |
| STC Joint Strength:                   | 372 kips  |
| LTC Performance                       |           |
| LTC Internal Pressure:                | 3,930 psi |
| LTC Joint Strength:                   | 417 kips  |
| SC-BTC Performance - Cplg OD = 9.125" |           |
| BTC Internal Pressure:                | 3,930 psi |
| BTC Joint Strength:                   | 503 kips  |

## API Connection Torque

| STC Torque (ft-lbs)                                |       |       |       |
|----------------------------------------------------|-------|-------|-------|
| Min:                                               | 2,793 | Opti: | 3,724 |
|                                                    |       | Max:  | 4,655 |
| LTC Torque (ft-lbs)                                |       |       |       |
| Min:                                               | 3,130 | Opti: | 4,174 |
|                                                    |       | Max:  | 5,217 |
| BTC Torque (ft-lbs)                                |       |       |       |
| follow API guidelines regarding positional make up |       |       |       |

\*Alt. Drift will be used unless API Drift is specified on order.

\*\*If above API connections do not suit your needs, VAM® premium connections are available up to 100% of pipe body ratings.

ALL INFORMATION IS PROVIDED BY VALLOUREC OR ITS AFFILIATES AT USER'S SOLE RISK, WITHOUT LIABILITY FOR LOSS, DAMAGE OR INJURY RESULTING FROM THE USE THEREOF; AND ON AN "AS IS" BASIS WITHOUT WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR PURPOSE, ACCURACY OR COMPLETENESS. THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED FOR INFORMATIONAL PURPOSES ONLY AND IS BASED ON ESTIMATES THAT HAVE NOT BEEN VERIFIED OR TESTED. IN NO EVENT SHALL VALLOUREC OR ITS AFFILIATES BE RESPONSIBLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, EXEMPLARY OR CONSEQUENTIAL LOSS OR DAMAGE (INCLUDING WITHOUT LIMITATION, LOSS OF USE, LOSS OF BARGAIN, LOSS OF REVENUE, PROFIT OR ANTICIPATED PROFIT) HOWEVER CAUSED OR ARISING, AND WHETHER SUCH LOSSES OR DAMAGES WERE FORESEEABLE OR VALLOUREC OR ITS AFFILIATES WERE ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Rev 3, 7/30/2021

10/21/2022 15:24

VALLOUREC STAR 8.625 32# J55 S S2L2 DA 7.875 W/O# SLN# PO# MADE IN USA FT LB



## Grackle 26 East Fed Com 502H

**1. GEOLOGIC NAME OF SURFACE FORMATION:**

Permian

**2. ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:**

|                        |         |
|------------------------|---------|
| Rustler                | 989'    |
| Tamarisk Anhydrite     | 1,094'  |
| Top of Salt            | 1,559'  |
| Base of Salt           | 4,976'  |
| Lamar                  | 5,244'  |
| Bell Canyon            | 5,272'  |
| Cherry Canyon          | 6,209'  |
| Brushy Canyon          | 7,702'  |
| Bone Spring Lime       | 9,078'  |
| Leonard (Avalon) Shale | 9,429'  |
| 1st Bone Spring Sand   | 10,461' |
| 2nd Bone Spring Shale  | 10,692' |
| 2nd Bone Spring Sand   | 10,984' |
| 3rd Bone Spring Carb   | 11,492' |
| 3rd Bone Spring Sand   | 12,019' |
| Wolfcamp               | 12,320' |
| TD                     | 11,400' |

**3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:**

|                        |         |             |
|------------------------|---------|-------------|
| Upper Permian Sands    | 0- 400' | Fresh Water |
| Bell Canyon            | 5,272'  | Oil         |
| Cherry Canyon          | 6,209'  | Oil         |
| Brushy Canyon          | 7,702'  | Oil         |
| Leonard (Avalon) Shale | 9,429'  | Oil         |
| 1st Bone Spring Sand   | 10,461' | Oil         |
| 2nd Bone Spring Shale  | 10,692' | Oil         |
| 2nd Bone Spring Sand   | 10,984' | Oil         |

No other Formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 10-3/4" casing at 1,120' and circulating cement back to surface.



## Grackle 26 East Fed Com 502H

## 4. CASING PROGRAM

| Hole Size | Interval MD |         | Interval TVD |         | Csg OD  | Weight | Grade   | Conn        |
|-----------|-------------|---------|--------------|---------|---------|--------|---------|-------------|
|           | From (ft)   | To (ft) | From (ft)    | To (ft) |         |        |         |             |
| 13-1/2"   | 0           | 1,120   | 0            | 1,120   | 10-3/4" | 40.5#  | J-55    | STC         |
| 9-7/8"    | 0           | 5,149   | 0            | 5,080   | 8-5/8"  | 32#    | J-55    | BTC-SC      |
| 6-3/4"    | 0           | 21,686  | 0            | 11,400  | 5-1/2"  | 20#    | P110-EC | DWC/C IS MS |

Hole will be full during casing run for well control and tensile SF factor. Casing will be kept at least half full during run for this design to meet BLM collapse SF requirement. External pressure will be reviewed prior to conducting casing pressure tests to ensure that 70% of the yield is not exceeded.

Variance is requested to waive the centralizer requirements for the 8-5/8" casing in the 9-7/8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 9-7/8" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement for the intermediate (salt) section from Title 43 CFR Part 3170 under the following conditions:

- The variance is not applicable within the Potash Boundaries or Capitan Reef areas.
- Operator takes responsibility to get casing to set point in the event that the clearance causes stuck pipe issues.

## 5. CEMENTING PROGRAM:

| Depth             | No. Sacks | Wt. ppg | Yld Ft3/sk | Slurry Description                                                                                                                 |
|-------------------|-----------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------|
| 1,120'<br>10-3/4" | 290       | 13.5    | 1.73       | Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl <sub>2</sub> + 0.25 lb/sk Cello-Flake (TOC @ Surface)                               |
|                   | 140       | 14.8    | 1.34       | Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 920')                                        |
| 5,250'<br>8-5/8"  | 310       | 12.7    | 2.22       | Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx (TOC @ Surface)                                                             |
|                   | 140       | 14.8    | 1.32       | Tail: Class C + 10% NaCl + 3% MagOx (TOC @ 4119')                                                                                  |
| 21,686'<br>5-1/2" | 370       | 10.5    | 3.21       | Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 4650')                                                         |
|                   | 750       | 13.2    | 1.52       | Tail: Class H + 5% NEX-020 + 0.2% NAC-102 + 0.15% NAS-725 + 0.5% NFL-549 + 0.2% NFP-703 + 1% NBE-737 + 0.3% NRT-241 (TOC @ 10990') |



### Grackle 26 East Fed Com 502H

| Additive            | Purpose                                 |
|---------------------|-----------------------------------------|
| Bentonite Gel       | Lightweight/Lost circulation prevention |
| Calcium Chloride    | Accelerator                             |
| Cello-flake         | Lost circulation prevention             |
| Sodium Metasilicate | Accelerator                             |
| MagOx               | Expansive agent                         |
| Pre-Mag-M           | Expansive agent                         |
| Sodium Chloride     | Accelerator                             |
| FL-62               | Fluid loss control                      |
| Halad-344           | Fluid loss control                      |
| Halad-9             | Fluid loss control                      |
| HR-601              | Retarder                                |
| Microbond           | Expansive Agent                         |

Cement integrity tests will be performed immediately following plug bump.

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

#### 6. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5,000-psi WP). Both units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top. All BOPE will be tested in accordance with Onshore Oil & Gas order No. 2.

EOG will utilize wing unions on BOPE connections that can be isolated from wellbore pressure through means of a choke. All wing unions will be rated to a pressure that meets or exceeds the pressure rating of the BOPE system.

Variance is requested to use a 5,000 psi annular BOP with the 10,000 psi BOP stack.

Before drilling out of the surface casing, the ram-type BOP and accessory equipment will be tested to 10,000/ 250 psig and the annular preventer to 5,000/ 250 psig.

Pipe rams and blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.





## Grackle 26 East Fed Com 502H

### 7. TYPES AND CHARACTERISTICS OF THE PROPOSED MUD SYSTEM:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal.

The applicable depths and properties of the drilling fluid systems are as follows:

| Depth                       | Type        | Weight (ppg) | Viscosity | Water Loss |
|-----------------------------|-------------|--------------|-----------|------------|
| 0 – 1,120'                  | Fresh - Gel | 8.6-8.8      | 28-34     | N/c        |
| 1,120' – 5,150'             | Brine       | 9-10.5       | 28-34     | N/c        |
| 5,150' – 21,686'<br>Lateral | Oil Base    | 8.8-9.5      | 58-68     | N/c - 6    |

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

### 8. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) H<sub>2</sub>S monitoring and detection equipment will be utilized from surface casing point to TD.

### 9. LOGGING, TESTING AND CORING PROGRAM:

- (A) Open-hole logs are not planned for this well.
- (B) GR-CCL will be run in cased hole during completions phase of operations.

### 10. ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES AND POTENTIAL HAZARDS:

The estimated bottom-hole temperature (BHT) at TD is 184 degrees F with an estimated maximum bottom-hole pressure (BHP) at TD of 5,335 psig and a maximum anticipated surface pressure of 2,827 psig (based on 9.0 ppg MW). No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. Severe loss circulation is expected from 7,702' to intermediate casing point.

**Grackle 26 East Fed Com 502H****11. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:**

The drilling operation should be finished in approximately one month. If the well is productive, an additional 60-90 days will be required for completion and testing before a decision is made to install permanent facilities.

EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and Cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both "A" and "B" sections). The weld will be tested to 1,500 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

**12. WELLHEAD:**

A multi-bowl wellhead system will be utilized.

After running the surface casing, a BOP/BOPE system with a minimum working pressure of 10,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 10,000 psi pressure test. This pressure test will be repeated at least every 30 days, as per Title 43 CFR Part 3170.

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 10,000 psi.

The multi-bowl wellhead will be installed by vendor's representative(s). A copy of the installation instructions for the Cactus Multi-Bowl WH system has been sent to the NM BLM office in Carlsbad, NM.

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type. EOG Resources reserves the option to conduct BOPE testing during wait on cement periods provided a test plug is utilized.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi.

Casing strings will be tested as per Title 43 CFR Part 3170 to at least 0.22 psi/ft or 1,500 psi, whichever is greater.



**Grackle 26 East Fed Com 502H**

**13. VARIANCE REQUESTS:**

EOG requests the additional variance(s) in the attached document(s):

- EOG BLM Variance 3a\_b - BOP Break-test and Offline Intermediate Cement
- EOG BLM Variance 4a - Salt Section Annular Clearance
- EOG BLM Variance 5a - Alternate Shallow Casing Designs



**Grackle 26 East Fed Com 502H**

**14. TUBING REQUIREMENTS:**

EOG respectfully requests an exception to the following NMOCD rule:

- 19.15.16.10 Casing AND TUBING REQUIREMENTS:  
J (3): "The operator shall set tubing as near the bottom as practical and tubing perforations shall not be more than 250 feet above top of pay zone."

With horizontal flowing and gas lifted wells an end of tubing depth placed at or slightly above KOP is a conservative way to ensure the tubing stays clean from debris, plugging, and allows for fewer well interventions post offset completion. The deeper the tubulars are run into the curve, the higher the probability is that the tubing will become stuck in sand and or well debris as the well produces over time. An additional consideration for EOT placement during artificial lift installations is avoiding the high dog leg severity and inclinations found in the curve section of the wellbore to help improve reliability and performance. Dog leg severity and inclinations tend not to hamper gas lifted or flowing wells, but they do effect other forms of artificial lift like rod pump or ESP (electric submersible pump). Keeping the EOT above KOP is an industry best practice for those respective forms of artificial lift.



Grackle 26 East Fed Com 502H

876' FSL  
808' FEL  
Section 26  
T-24-S, R-34-E

Proposed Wellbore  
  
API: 30-025-\*\*\*\*\*

KB: 3454'  
GL: 3429'

Bit Size: 13-1/2"  
10-3/4", 40.5#, J-55, STC  
@ 0' - 1,120'

Bit Size: 9-7/8"  
8-5/8", 32.#, J-55, BTC-SC  
@ 0' - 5,150'

Bit Size: 6-3/4"  
5-1/2", 20.#, P110-EC, DWC/C IS MS  
@ 0' - 21,686'

KOP: 10,989' MD, 9,338' TVD  
EOC: 11,739' MD, 9,911' TVD

Lateral: 21,686' MD, 11,400' TVD  
Upper Most Perf:  
100' FSL & 1311' FEL Sec. 26  
Lower Most Perf:  
100' FNL & 1311' FEL Sec. 23  
BH Location: 100' FNL & 1311' FEL  
Sec. 23, T-24-S, R-34-E

Bit Size: 6-3/4"



Grackle 26 East Fed Com #502H

## Hydrogen Sulfide Plan Summary

**A. All personnel shall receive proper H2S training in accordance with Onshore Order III.C.3.a.**

**B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.**

**C. Required Emergency Equipment:**

■ **Well control equipment**

- a. Flare line 150' from wellhead to be ignited by flare gun.
- b. Choke manifold with a remotely operated choke.
- c. Mud/gas separator

■ **Protective equipment for essential personnel:**

- a. Breathing Apparatus:
  - i. Rescue Packs (SCBA) — 1 unit shall be placed at each breathing area, 2 shall be stored in the safety trailer.
  - ii. Work/Escape packs — 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
  - iii. Emergency Escape Packs — 4 packs shall be stored in the doghouse for emergency evacuation.
- b. Auxiliary Rescue Equipment:
  - i. Stretcher
  - ii. Two OSHA full body harness
  - iii. 100 ft 5/8 inch OSHA approved rope
  - iv. 1-20# class ABC fire extinguisher

■ **H2S Detection and Monitoring Equipment:**

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged. (Gas sample tubes will be stored in the safety trailer)

■ **Visual Warning System:**

- a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
- b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
- c. Two wind socks will be placed in strategic locations, visible from all angles.



Grackle 26 East Fed Com #502H

■ **Mud Program:**

The mud program has been designed to minimize the volume of H<sub>2</sub>S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H<sub>2</sub>S bearing zones.

■ **Metallurgy:**

All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H<sub>2</sub>S service.

■ **Communication:**

Communication will be via cell phones and land lines where available.





Grackle 26 East Fed Com #502H

## Emergency Assistance Telephone List

| <b>PUBLIC SAFETY:</b>                                 | <b>911 or</b>  |
|-------------------------------------------------------|----------------|
| <b>Lea County Sheriff's Department</b>                | (575) 396-3611 |
| Corey Helton                                          |                |
| <b>Fire Department</b>                                |                |
| Carlsbad                                              | (575) 885-3125 |
| Artesia                                               | (575) 746-5050 |
| <b>Hospitals</b>                                      |                |
| Carlsbad                                              | (575) 887-4121 |
| Artesia                                               | (575) 748-3333 |
| Hobbs                                                 | (575) 392-1979 |
| <b>Dept. of Public Safety/Carlsbad</b>                | (575) 748-9718 |
| <b>Highway Department</b>                             | (575) 885-3281 |
| <b>U.S. Department of Labor</b>                       | (575) 887-1174 |
| <b>Bureau of Land Management - Hobbs (Lea Co)</b>     | (575) 393-3612 |
| PET On Call - Hobbs                                   | (575) 706-2779 |
| <b>Bureau of Land Management - Carlsbad (Eddy Co)</b> | (575) 234-5972 |
| PET On Call - Carlsbad                                | (575) 706-2779 |
| <b>New Mexico Oil Conservation Division - Artesia</b> | (575) 748-1283 |
| Inspection Group South - Gilbert Gordero              | (575) 626-0830 |
| <b>EOG Resources, Inc.</b>                            |                |
| EOG Midland                                           | (432) 686-3600 |
| <b>Company Drilling Consultants:</b>                  |                |
| Jett Dueitt                                           | (432) 230-4840 |
| Blake Burney                                          |                |
| <b>Drilling Engineers</b>                             |                |
| Stephen Davis                                         | (432) 235-9789 |
| Matt Day                                              | (210) 296-4456 |
| <b>Drilling Managers</b>                              |                |
| Branden Keener                                        | (210) 294-3729 |
| <b>Drilling Superintendents</b>                       |                |
| Lance Hardy                                           | (432) 215-8152 |
| Ryan Reynolds                                         | (432) 215-5978 |
| Steve Kelly                                           | (210) 416-7894 |
| <b>H&amp;P Drilling</b>                               |                |
| H&P Drilling                                          | (432) 563-5757 |
| <b>Nabors Drilling</b>                                |                |
| Nabors Drilling                                       | (432) 363-8180 |
| <b>Patterson UTI</b>                                  |                |
| Patterson UTI                                         | (432) 561-9382 |
| <b>EOG Safety</b>                                     |                |
| Brian Chandler (HSE Manager)                          | (817) 239-0251 |

# Midland

Lea County, NM (NAD 83 NME)

Grackle 26 East Fed Com #

#502H

OH

Plan: Plan #0.1 RT

## Standard Planning Report

01 April, 2024

Planning Report

|           |                             |                              |                       |
|-----------|-----------------------------|------------------------------|-----------------------|
| Database: | PEDMB                       | Local Co-ordinate Reference: | Well #502H            |
| Company:  | Midland                     | TVD Reference:               | kb = 26' @ 3455.0usft |
| Project:  | Lea County, NM (NAD 83 NME) | MD Reference:                | kb = 26' @ 3455.0usft |
| Site:     | Grackle 26 East Fed Com #   | North Reference:             | Grid                  |
| Well:     | #502H                       | Survey Calculation Method:   | Minimum Curvature     |
| Wellbore: | OH                          |                              |                       |
| Design:   | Plan #0.1 RT                |                              |                       |

|             |                             |               |                |
|-------------|-----------------------------|---------------|----------------|
| Project     | Lea County, NM (NAD 83 NME) |               |                |
| Map System: | US State Plane 1983         | System Datum: | Mean Sea Level |
| Geo Datum:  | North American Datum 1983   |               |                |
| Map Zone:   | New Mexico Eastern Zone     |               |                |

|                       |                           |              |                   |
|-----------------------|---------------------------|--------------|-------------------|
| Site                  | Grackle 26 East Fed Com # |              |                   |
| Site Position:        |                           | Northing:    | 430,017.00 usft   |
| From:                 | Map                       | Easting:     | 817,955.00 usft   |
| Position Uncertainty: | 0.0 usft                  | Slot Radius: | 13-3/16 "         |
|                       |                           | Latitude:    | 32° 10' 44.525 N  |
|                       |                           | Longitude:   | 103° 26' 21.331 W |

|                      |          |                     |                  |
|----------------------|----------|---------------------|------------------|
| Well                 | #502H    |                     |                  |
| Well Position        | +N/-S    | 0.0 usft            | Northing:        |
|                      | +E/-W    | 0.0 usft            | Easting:         |
| Position Uncertainty | 0.0 usft | Wellhead Elevation: |                  |
| Grid Convergence:    | 0.48 °   |                     |                  |
|                      |          | Latitude:           | 32° 11' 0.363 N  |
|                      |          | Longitude:          | 103° 26' 5.374 W |
|                      |          | Ground Level:       | 3,429.0 usft     |

|           |            |             |                 |               |                     |
|-----------|------------|-------------|-----------------|---------------|---------------------|
| Wellbore  | OH         |             |                 |               |                     |
| Magnetics | Model Name | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
|           | IGRF2020   | 4/1/2024    | 6.15            | 59.79         | 47,191.72848116     |

|                   |                         |              |               |               |
|-------------------|-------------------------|--------------|---------------|---------------|
| Design            | Plan #0.1 RT            |              |               |               |
| Audit Notes:      |                         |              |               |               |
| Version:          | Phase:                  | PLAN         | Tie On Depth: | 0.0           |
| Vertical Section: | Depth From (TVD) (usft) | +N/-S (usft) | +E/-W (usft)  | Direction (°) |
|                   | 0.0                     | 0.0          | 0.0           | 356.56        |

|                          |                 |                   |                   |              |
|--------------------------|-----------------|-------------------|-------------------|--------------|
| Plan Survey Tool Program | Date            | 4/1/2024          |                   |              |
| Depth From (usft)        | Depth To (usft) | Survey (Wellbore) | Tool Name         | Remarks      |
| 1                        | 0.0             | 21,685.7          | Plan #0.1 RT (OH) | EOG MWD+IFR1 |
|                          |                 |                   |                   | MWD + IFR1   |

Planning Report

|           |                             |                              |                       |
|-----------|-----------------------------|------------------------------|-----------------------|
| Database: | PEDMB                       | Local Co-ordinate Reference: | Well #502H            |
| Company:  | Midland                     | TVD Reference:               | kb = 26' @ 3455.0usft |
| Project:  | Lea County, NM (NAD 83 NME) | MD Reference:                | kb = 26' @ 3455.0usft |
| Site:     | Grackle 26 East Fed Com #   | North Reference:             | Grid                  |
| Well:     | #502H                       | Survey Calculation Method:   | Minimum Curvature     |
| Wellbore: | OH                          |                              |                       |
| Design:   | Plan #0.1 RT                |                              |                       |

| Plan Sections         |                 |             |                       |              |              |                         |                        |                       |         |                     |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|------------------------|-----------------------|---------|---------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) | TFO (°) | Target              |
| 0.0                   | 0.00            | 0.00        | 0.0                   | 0.0          | 0.0          | 0.00                    | 0.00                   | 0.00                  | 0.00    |                     |
| 1,200.0               | 0.00            | 0.00        | 1,200.0               | 0.0          | 0.0          | 0.00                    | 0.00                   | 0.00                  | 0.00    |                     |
| 1,626.5               | 8.53            | 212.91      | 1,625.0               | -26.6        | -17.2        | 2.00                    | 2.00                   | 0.00                  | 212.91  |                     |
| 7,341.8               | 8.53            | 212.91      | 7,277.0               | -738.4       | -477.8       | 0.00                    | 0.00                   | 0.00                  | 0.00    |                     |
| 7,768.4               | 0.00            | 0.00        | 7,702.0               | -765.0       | -495.0       | 2.00                    | -2.00                  | 0.00                  | 180.00  |                     |
| 10,988.9              | 0.00            | 0.00        | 10,922.5              | -765.0       | -495.0       | 0.00                    | 0.00                   | 0.00                  | 0.00    | KOP(Grackle 26 East |
| 11,209.3              | 26.46           | 358.85      | 11,135.2              | -715.0       | -496.0       | 12.00                   | 12.00                  | -0.52                 | 358.85  | FTP(Grackle 26 East |
| 11,738.8              | 90.00           | 359.54      | 11,399.9              | -287.6       | -501.0       | 12.00                   | 12.00                  | 0.13                  | 0.77    |                     |
| 21,685.7              | 90.00           | 359.54      | 11,400.0              | 9,659.0      | -581.0       | 0.00                    | 0.00                   | 0.00                  | 0.00    | PBHL(Grackle 26 Eas |

## Planning Report

|                  |                             |                                     |                       |
|------------------|-----------------------------|-------------------------------------|-----------------------|
| <b>Database:</b> | PEDMB                       | <b>Local Co-ordinate Reference:</b> | Well #502H            |
| <b>Company:</b>  | Midland                     | <b>TVD Reference:</b>               | kb = 26' @ 3455.0usft |
| <b>Project:</b>  | Lea County, NM (NAD 83 NME) | <b>MD Reference:</b>                | kb = 26' @ 3455.0usft |
| <b>Site:</b>     | Grackle 26 East Fed Com #   | <b>North Reference:</b>             | Grid                  |
| <b>Well:</b>     | #502H                       | <b>Survey Calculation Method:</b>   | Minimum Curvature     |
| <b>Wellbore:</b> | OH                          |                                     |                       |
| <b>Design:</b>   | Plan #0.1 RT                |                                     |                       |

| Planned Survey        |                 |             |                       |              |              |                         |                         |                        |                       |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |
| 0.0                   | 0.00            | 0.00        | 0.0                   | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 100.0                 | 0.00            | 0.00        | 100.0                 | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 200.0                 | 0.00            | 0.00        | 200.0                 | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 300.0                 | 0.00            | 0.00        | 300.0                 | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 400.0                 | 0.00            | 0.00        | 400.0                 | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 500.0                 | 0.00            | 0.00        | 500.0                 | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 600.0                 | 0.00            | 0.00        | 600.0                 | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 700.0                 | 0.00            | 0.00        | 700.0                 | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 800.0                 | 0.00            | 0.00        | 800.0                 | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 900.0                 | 0.00            | 0.00        | 900.0                 | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 1,000.0               | 0.00            | 0.00        | 1,000.0               | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 1,100.0               | 0.00            | 0.00        | 1,100.0               | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 1,200.0               | 0.00            | 0.00        | 1,200.0               | 0.0          | 0.0          | 0.0                     | 0.00                    | 0.00                   | 0.00                  |
| 1,300.0               | 2.00            | 212.91      | 1,300.0               | -1.5         | -0.9         | -1.4                    | 2.00                    | 2.00                   | 0.00                  |
| 1,400.0               | 4.00            | 212.91      | 1,399.8               | -5.9         | -3.8         | -5.6                    | 2.00                    | 2.00                   | 0.00                  |
| 1,500.0               | 6.00            | 212.91      | 1,499.5               | -13.2        | -8.5         | -12.6                   | 2.00                    | 2.00                   | 0.00                  |
| 1,600.0               | 8.00            | 212.91      | 1,598.7               | -23.4        | -15.1        | -22.5                   | 2.00                    | 2.00                   | 0.00                  |
| 1,626.5               | 8.53            | 212.91      | 1,625.0               | -26.6        | -17.2        | -25.5                   | 2.00                    | 2.00                   | 0.00                  |
| 1,700.0               | 8.53            | 212.91      | 1,697.6               | -35.8        | -23.1        | -34.3                   | 0.00                    | 0.00                   | 0.00                  |
| 1,800.0               | 8.53            | 212.91      | 1,796.5               | -48.2        | -31.2        | -46.3                   | 0.00                    | 0.00                   | 0.00                  |
| 1,900.0               | 8.53            | 212.91      | 1,895.4               | -60.7        | -39.3        | -58.2                   | 0.00                    | 0.00                   | 0.00                  |
| 2,000.0               | 8.53            | 212.91      | 1,994.3               | -73.1        | -47.3        | -70.1                   | 0.00                    | 0.00                   | 0.00                  |
| 2,100.0               | 8.53            | 212.91      | 2,093.2               | -85.6        | -55.4        | -82.1                   | 0.00                    | 0.00                   | 0.00                  |
| 2,200.0               | 8.53            | 212.91      | 2,192.1               | -98.0        | -63.4        | -94.0                   | 0.00                    | 0.00                   | 0.00                  |
| 2,300.0               | 8.53            | 212.91      | 2,291.0               | -110.5       | -71.5        | -106.0                  | 0.00                    | 0.00                   | 0.00                  |
| 2,400.0               | 8.53            | 212.91      | 2,389.9               | -122.9       | -79.5        | -117.9                  | 0.00                    | 0.00                   | 0.00                  |
| 2,500.0               | 8.53            | 212.91      | 2,488.8               | -135.4       | -87.6        | -129.9                  | 0.00                    | 0.00                   | 0.00                  |
| 2,600.0               | 8.53            | 212.91      | 2,587.7               | -147.8       | -95.7        | -141.8                  | 0.00                    | 0.00                   | 0.00                  |
| 2,700.0               | 8.53            | 212.91      | 2,686.5               | -160.3       | -103.7       | -153.8                  | 0.00                    | 0.00                   | 0.00                  |
| 2,800.0               | 8.53            | 212.91      | 2,785.4               | -172.8       | -111.8       | -165.7                  | 0.00                    | 0.00                   | 0.00                  |
| 2,900.0               | 8.53            | 212.91      | 2,884.3               | -185.2       | -119.8       | -177.7                  | 0.00                    | 0.00                   | 0.00                  |
| 3,000.0               | 8.53            | 212.91      | 2,983.2               | -197.7       | -127.9       | -189.6                  | 0.00                    | 0.00                   | 0.00                  |
| 3,100.0               | 8.53            | 212.91      | 3,082.1               | -210.1       | -136.0       | -201.6                  | 0.00                    | 0.00                   | 0.00                  |
| 3,200.0               | 8.53            | 212.91      | 3,181.0               | -222.6       | -144.0       | -213.5                  | 0.00                    | 0.00                   | 0.00                  |
| 3,300.0               | 8.53            | 212.91      | 3,279.9               | -235.0       | -152.1       | -225.5                  | 0.00                    | 0.00                   | 0.00                  |
| 3,400.0               | 8.53            | 212.91      | 3,378.8               | -247.5       | -160.1       | -237.4                  | 0.00                    | 0.00                   | 0.00                  |
| 3,500.0               | 8.53            | 212.91      | 3,477.7               | -259.9       | -168.2       | -249.4                  | 0.00                    | 0.00                   | 0.00                  |
| 3,600.0               | 8.53            | 212.91      | 3,576.6               | -272.4       | -176.2       | -261.3                  | 0.00                    | 0.00                   | 0.00                  |
| 3,700.0               | 8.53            | 212.91      | 3,675.5               | -284.8       | -184.3       | -273.3                  | 0.00                    | 0.00                   | 0.00                  |
| 3,800.0               | 8.53            | 212.91      | 3,774.4               | -297.3       | -192.4       | -285.2                  | 0.00                    | 0.00                   | 0.00                  |
| 3,900.0               | 8.53            | 212.91      | 3,873.3               | -309.7       | -200.4       | -297.2                  | 0.00                    | 0.00                   | 0.00                  |
| 4,000.0               | 8.53            | 212.91      | 3,972.2               | -322.2       | -208.5       | -309.1                  | 0.00                    | 0.00                   | 0.00                  |
| 4,100.0               | 8.53            | 212.91      | 4,071.1               | -334.7       | -216.5       | -321.0                  | 0.00                    | 0.00                   | 0.00                  |
| 4,200.0               | 8.53            | 212.91      | 4,170.0               | -347.1       | -224.6       | -333.0                  | 0.00                    | 0.00                   | 0.00                  |
| 4,300.0               | 8.53            | 212.91      | 4,268.8               | -359.6       | -232.7       | -344.9                  | 0.00                    | 0.00                   | 0.00                  |
| 4,400.0               | 8.53            | 212.91      | 4,367.7               | -372.0       | -240.7       | -356.9                  | 0.00                    | 0.00                   | 0.00                  |
| 4,500.0               | 8.53            | 212.91      | 4,466.6               | -384.5       | -248.8       | -368.8                  | 0.00                    | 0.00                   | 0.00                  |
| 4,600.0               | 8.53            | 212.91      | 4,565.5               | -396.9       | -256.8       | -380.8                  | 0.00                    | 0.00                   | 0.00                  |
| 4,700.0               | 8.53            | 212.91      | 4,664.4               | -409.4       | -264.9       | -392.7                  | 0.00                    | 0.00                   | 0.00                  |
| 4,800.0               | 8.53            | 212.91      | 4,763.3               | -421.8       | -272.9       | -404.7                  | 0.00                    | 0.00                   | 0.00                  |
| 4,900.0               | 8.53            | 212.91      | 4,862.2               | -434.3       | -281.0       | -416.6                  | 0.00                    | 0.00                   | 0.00                  |
| 5,000.0               | 8.53            | 212.91      | 4,961.1               | -446.7       | -289.1       | -428.6                  | 0.00                    | 0.00                   | 0.00                  |
| 5,100.0               | 8.53            | 212.91      | 5,060.0               | -459.2       | -297.1       | -440.5                  | 0.00                    | 0.00                   | 0.00                  |
| 5,200.0               | 8.53            | 212.91      | 5,158.9               | -471.6       | -305.2       | -452.5                  | 0.00                    | 0.00                   | 0.00                  |

## Planning Report

|                  |                             |                                     |                       |
|------------------|-----------------------------|-------------------------------------|-----------------------|
| <b>Database:</b> | PEDMB                       | <b>Local Co-ordinate Reference:</b> | Well #502H            |
| <b>Company:</b>  | Midland                     | <b>TVD Reference:</b>               | kb = 26' @ 3455.0usft |
| <b>Project:</b>  | Lea County, NM (NAD 83 NME) | <b>MD Reference:</b>                | kb = 26' @ 3455.0usft |
| <b>Site:</b>     | Grackle 26 East Fed Com #   | <b>North Reference:</b>             | Grid                  |
| <b>Well:</b>     | #502H                       | <b>Survey Calculation Method:</b>   | Minimum Curvature     |
| <b>Wellbore:</b> | OH                          |                                     |                       |
| <b>Design:</b>   | Plan #0.1 RT                |                                     |                       |

| Planned Survey        |                 |             |                       |              |              |                         |                         |                        |                       |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |
| 5,300.0               | 8.53            | 212.91      | 5,257.8               | -484.1       | -313.2       | -464.4                  | 0.00                    | 0.00                   | 0.00                  |
| 5,400.0               | 8.53            | 212.91      | 5,356.7               | -496.6       | -321.3       | -476.4                  | 0.00                    | 0.00                   | 0.00                  |
| 5,500.0               | 8.53            | 212.91      | 5,455.6               | -509.0       | -329.4       | -488.3                  | 0.00                    | 0.00                   | 0.00                  |
| 5,600.0               | 8.53            | 212.91      | 5,554.5               | -521.5       | -337.4       | -500.3                  | 0.00                    | 0.00                   | 0.00                  |
| 5,700.0               | 8.53            | 212.91      | 5,653.4               | -533.9       | -345.5       | -512.2                  | 0.00                    | 0.00                   | 0.00                  |
| 5,800.0               | 8.53            | 212.91      | 5,752.3               | -546.4       | -353.5       | -524.2                  | 0.00                    | 0.00                   | 0.00                  |
| 5,900.0               | 8.53            | 212.91      | 5,851.1               | -558.8       | -361.6       | -536.1                  | 0.00                    | 0.00                   | 0.00                  |
| 6,000.0               | 8.53            | 212.91      | 5,950.0               | -571.3       | -369.7       | -548.1                  | 0.00                    | 0.00                   | 0.00                  |
| 6,100.0               | 8.53            | 212.91      | 6,048.9               | -583.7       | -377.7       | -560.0                  | 0.00                    | 0.00                   | 0.00                  |
| 6,200.0               | 8.53            | 212.91      | 6,147.8               | -596.2       | -385.8       | -571.9                  | 0.00                    | 0.00                   | 0.00                  |
| 6,300.0               | 8.53            | 212.91      | 6,246.7               | -608.6       | -393.8       | -583.9                  | 0.00                    | 0.00                   | 0.00                  |
| 6,400.0               | 8.53            | 212.91      | 6,345.6               | -621.1       | -401.9       | -595.8                  | 0.00                    | 0.00                   | 0.00                  |
| 6,500.0               | 8.53            | 212.91      | 6,444.5               | -633.5       | -409.9       | -607.8                  | 0.00                    | 0.00                   | 0.00                  |
| 6,600.0               | 8.53            | 212.91      | 6,543.4               | -646.0       | -418.0       | -619.7                  | 0.00                    | 0.00                   | 0.00                  |
| 6,700.0               | 8.53            | 212.91      | 6,642.3               | -658.5       | -426.1       | -631.7                  | 0.00                    | 0.00                   | 0.00                  |
| 6,800.0               | 8.53            | 212.91      | 6,741.2               | -670.9       | -434.1       | -643.6                  | 0.00                    | 0.00                   | 0.00                  |
| 6,900.0               | 8.53            | 212.91      | 6,840.1               | -683.4       | -442.2       | -655.6                  | 0.00                    | 0.00                   | 0.00                  |
| 7,000.0               | 8.53            | 212.91      | 6,939.0               | -695.8       | -450.2       | -667.5                  | 0.00                    | 0.00                   | 0.00                  |
| 7,100.0               | 8.53            | 212.91      | 7,037.9               | -708.3       | -458.3       | -679.5                  | 0.00                    | 0.00                   | 0.00                  |
| 7,200.0               | 8.53            | 212.91      | 7,136.8               | -720.7       | -466.4       | -691.4                  | 0.00                    | 0.00                   | 0.00                  |
| 7,300.0               | 8.53            | 212.91      | 7,235.7               | -733.2       | -474.4       | -703.4                  | 0.00                    | 0.00                   | 0.00                  |
| 7,341.8               | 8.53            | 212.91      | 7,277.0               | -738.4       | -477.8       | -708.4                  | 0.00                    | 0.00                   | 0.00                  |
| 7,400.0               | 7.37            | 212.91      | 7,334.6               | -745.1       | -482.2       | -714.8                  | 2.00                    | -2.00                  | 0.00                  |
| 7,500.0               | 5.37            | 212.91      | 7,434.0               | -754.5       | -488.2       | -723.8                  | 2.00                    | -2.00                  | 0.00                  |
| 7,600.0               | 3.37            | 212.91      | 7,533.7               | -760.8       | -492.3       | -729.9                  | 2.00                    | -2.00                  | 0.00                  |
| 7,700.0               | 1.37            | 212.91      | 7,633.6               | -764.3       | -494.6       | -733.2                  | 2.00                    | -2.00                  | 0.00                  |
| 7,768.4               | 0.00            | 0.00        | 7,702.0               | -765.0       | -495.0       | -733.9                  | 2.00                    | -2.00                  | 0.00                  |
| 7,800.0               | 0.00            | 0.00        | 7,733.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 7,900.0               | 0.00            | 0.00        | 7,833.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 8,000.0               | 0.00            | 0.00        | 7,933.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 8,100.0               | 0.00            | 0.00        | 8,033.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 8,200.0               | 0.00            | 0.00        | 8,133.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 8,300.0               | 0.00            | 0.00        | 8,233.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 8,400.0               | 0.00            | 0.00        | 8,333.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 8,500.0               | 0.00            | 0.00        | 8,433.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 8,600.0               | 0.00            | 0.00        | 8,533.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 8,700.0               | 0.00            | 0.00        | 8,633.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 8,800.0               | 0.00            | 0.00        | 8,733.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 8,900.0               | 0.00            | 0.00        | 8,833.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 9,000.0               | 0.00            | 0.00        | 8,933.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 9,100.0               | 0.00            | 0.00        | 9,033.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 9,200.0               | 0.00            | 0.00        | 9,133.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 9,300.0               | 0.00            | 0.00        | 9,233.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 9,400.0               | 0.00            | 0.00        | 9,333.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 9,500.0               | 0.00            | 0.00        | 9,433.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 9,600.0               | 0.00            | 0.00        | 9,533.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 9,700.0               | 0.00            | 0.00        | 9,633.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 9,800.0               | 0.00            | 0.00        | 9,733.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 9,900.0               | 0.00            | 0.00        | 9,833.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 10,000.0              | 0.00            | 0.00        | 9,933.6               | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 10,100.0              | 0.00            | 0.00        | 10,033.6              | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 10,200.0              | 0.00            | 0.00        | 10,133.6              | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 10,300.0              | 0.00            | 0.00        | 10,233.6              | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 10,400.0              | 0.00            | 0.00        | 10,333.6              | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |

## Planning Report

|                  |                             |                                     |                       |
|------------------|-----------------------------|-------------------------------------|-----------------------|
| <b>Database:</b> | PEDMB                       | <b>Local Co-ordinate Reference:</b> | Well #502H            |
| <b>Company:</b>  | Midland                     | <b>TVD Reference:</b>               | kb = 26' @ 3455.0usft |
| <b>Project:</b>  | Lea County, NM (NAD 83 NME) | <b>MD Reference:</b>                | kb = 26' @ 3455.0usft |
| <b>Site:</b>     | Grackle 26 East Fed Com #   | <b>North Reference:</b>             | Grid                  |
| <b>Well:</b>     | #502H                       | <b>Survey Calculation Method:</b>   | Minimum Curvature     |
| <b>Wellbore:</b> | OH                          |                                     |                       |
| <b>Design:</b>   | Plan #0.1 RT                |                                     |                       |

| Planned Survey        |                 |             |                       |              |              |                         |                         |                        |                       |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |
| 10,500.0              | 0.00            | 0.00        | 10,433.6              | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 10,600.0              | 0.00            | 0.00        | 10,533.6              | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 10,700.0              | 0.00            | 0.00        | 10,633.6              | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 10,800.0              | 0.00            | 0.00        | 10,733.6              | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 10,900.0              | 0.00            | 0.00        | 10,833.6              | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 10,988.9              | 0.00            | 0.00        | 10,922.5              | -765.0       | -495.0       | -733.9                  | 0.00                    | 0.00                   | 0.00                  |
| 11,000.0              | 1.34            | 358.85      | 10,933.6              | -764.9       | -495.0       | -733.8                  | 12.00                   | 12.00                  | 0.00                  |
| 11,025.0              | 4.34            | 358.85      | 10,958.6              | -763.6       | -495.0       | -732.5                  | 12.00                   | 12.00                  | 0.00                  |
| 11,050.0              | 7.34            | 358.85      | 10,983.5              | -761.1       | -495.1       | -730.0                  | 12.00                   | 12.00                  | 0.00                  |
| 11,075.0              | 10.34           | 358.85      | 11,008.2              | -757.3       | -495.2       | -726.2                  | 12.00                   | 12.00                  | 0.00                  |
| 11,100.0              | 13.34           | 358.85      | 11,032.6              | -752.1       | -495.3       | -721.0                  | 12.00                   | 12.00                  | 0.00                  |
| 11,125.0              | 16.34           | 358.85      | 11,056.8              | -745.7       | -495.4       | -714.6                  | 12.00                   | 12.00                  | 0.00                  |
| 11,150.0              | 19.34           | 358.85      | 11,080.6              | -738.1       | -495.5       | -707.0                  | 12.00                   | 12.00                  | 0.00                  |
| 11,175.0              | 22.34           | 358.85      | 11,103.9              | -729.2       | -495.7       | -698.1                  | 12.00                   | 12.00                  | 0.00                  |
| 11,200.0              | 25.34           | 358.85      | 11,126.8              | -719.1       | -495.9       | -688.0                  | 12.00                   | 12.00                  | 0.00                  |
| 11,209.3              | 26.46           | 358.85      | 11,135.2              | -715.0       | -496.0       | -683.9                  | 12.00                   | 12.00                  | 0.00                  |
| 11,225.0              | 28.34           | 358.91      | 11,149.1              | -707.8       | -496.1       | -676.7                  | 12.00                   | 12.00                  | 0.34                  |
| 11,250.0              | 31.34           | 358.98      | 11,170.8              | -695.4       | -496.4       | -664.3                  | 12.00                   | 12.00                  | 0.29                  |
| 11,275.0              | 34.34           | 359.04      | 11,191.8              | -681.8       | -496.6       | -650.8                  | 12.00                   | 12.00                  | 0.24                  |
| 11,300.0              | 37.34           | 359.09      | 11,212.1              | -667.2       | -496.8       | -636.1                  | 12.00                   | 12.00                  | 0.21                  |
| 11,325.0              | 40.34           | 359.14      | 11,231.5              | -651.5       | -497.1       | -620.5                  | 12.00                   | 12.00                  | 0.18                  |
| 11,350.0              | 43.34           | 359.18      | 11,250.2              | -634.8       | -497.3       | -603.8                  | 12.00                   | 12.00                  | 0.16                  |
| 11,375.0              | 46.34           | 359.21      | 11,267.9              | -617.2       | -497.6       | -586.2                  | 12.00                   | 12.00                  | 0.14                  |
| 11,400.0              | 49.34           | 359.25      | 11,284.7              | -598.7       | -497.8       | -567.7                  | 12.00                   | 12.00                  | 0.13                  |
| 11,425.0              | 52.34           | 359.28      | 11,300.4              | -579.3       | -498.1       | -548.3                  | 12.00                   | 12.00                  | 0.12                  |
| 11,450.0              | 55.34           | 359.30      | 11,315.2              | -559.1       | -498.3       | -528.2                  | 12.00                   | 12.00                  | 0.11                  |
| 11,475.0              | 58.34           | 359.33      | 11,328.9              | -538.2       | -498.6       | -507.3                  | 12.00                   | 12.00                  | 0.10                  |
| 11,500.0              | 61.34           | 359.35      | 11,341.4              | -516.6       | -498.8       | -485.7                  | 12.00                   | 12.00                  | 0.10                  |
| 11,525.0              | 64.34           | 359.38      | 11,352.8              | -494.3       | -499.1       | -463.5                  | 12.00                   | 12.00                  | 0.09                  |
| 11,550.0              | 67.34           | 359.40      | 11,363.1              | -471.5       | -499.3       | -440.7                  | 12.00                   | 12.00                  | 0.09                  |
| 11,575.0              | 70.34           | 359.42      | 11,372.1              | -448.2       | -499.6       | -417.4                  | 12.00                   | 12.00                  | 0.08                  |
| 11,600.0              | 73.34           | 359.44      | 11,379.9              | -424.5       | -499.8       | -393.7                  | 12.00                   | 12.00                  | 0.08                  |
| 11,625.0              | 76.34           | 359.46      | 11,386.4              | -400.3       | -500.0       | -369.6                  | 12.00                   | 12.00                  | 0.08                  |
| 11,650.0              | 79.34           | 359.48      | 11,391.7              | -375.9       | -500.3       | -345.2                  | 12.00                   | 12.00                  | 0.07                  |
| 11,675.0              | 82.34           | 359.49      | 11,395.7              | -351.2       | -500.5       | -320.5                  | 12.00                   | 12.00                  | 0.07                  |
| 11,700.0              | 85.34           | 359.51      | 11,398.3              | -326.4       | -500.7       | -295.7                  | 12.00                   | 12.00                  | 0.07                  |
| 11,725.0              | 88.34           | 359.53      | 11,399.7              | -301.4       | -500.9       | -270.8                  | 12.00                   | 12.00                  | 0.07                  |
| 11,738.8              | 90.00           | 359.54      | 11,399.9              | -287.6       | -501.0       | -257.0                  | 12.00                   | 12.00                  | 0.07                  |
| 11,800.0              | 90.00           | 359.54      | 11,399.9              | -226.4       | -501.5       | -195.9                  | 0.00                    | 0.00                   | 0.00                  |
| 11,900.0              | 90.00           | 359.54      | 11,399.9              | -126.4       | -502.3       | -96.0                   | 0.00                    | 0.00                   | 0.00                  |
| 12,000.0              | 90.00           | 359.54      | 11,399.9              | -26.4        | -503.1       | 3.8                     | 0.00                    | 0.00                   | 0.00                  |
| 12,100.0              | 90.00           | 359.54      | 11,399.9              | 73.6         | -503.9       | 103.7                   | 0.00                    | 0.00                   | 0.00                  |
| 12,200.0              | 90.00           | 359.54      | 11,399.9              | 173.6        | -504.7       | 203.6                   | 0.00                    | 0.00                   | 0.00                  |
| 12,300.0              | 90.00           | 359.54      | 11,399.9              | 273.6        | -505.5       | 303.4                   | 0.00                    | 0.00                   | 0.00                  |
| 12,400.0              | 90.00           | 359.54      | 11,399.9              | 373.6        | -506.3       | 403.3                   | 0.00                    | 0.00                   | 0.00                  |
| 12,500.0              | 90.00           | 359.54      | 11,399.9              | 473.6        | -507.1       | 503.2                   | 0.00                    | 0.00                   | 0.00                  |
| 12,600.0              | 90.00           | 359.54      | 11,399.9              | 573.6        | -507.9       | 603.0                   | 0.00                    | 0.00                   | 0.00                  |
| 12,700.0              | 90.00           | 359.54      | 11,399.9              | 673.6        | -508.7       | 702.9                   | 0.00                    | 0.00                   | 0.00                  |
| 12,800.0              | 90.00           | 359.54      | 11,399.9              | 773.6        | -509.5       | 802.8                   | 0.00                    | 0.00                   | 0.00                  |
| 12,900.0              | 90.00           | 359.54      | 11,399.9              | 873.6        | -510.4       | 902.6                   | 0.00                    | 0.00                   | 0.00                  |
| 13,000.0              | 90.00           | 359.54      | 11,399.9              | 973.5        | -511.2       | 1,002.5                 | 0.00                    | 0.00                   | 0.00                  |
| 13,100.0              | 90.00           | 359.54      | 11,399.9              | 1,073.5      | -512.0       | 1,102.3                 | 0.00                    | 0.00                   | 0.00                  |
| 13,200.0              | 90.00           | 359.54      | 11,399.9              | 1,173.5      | -512.8       | 1,202.2                 | 0.00                    | 0.00                   | 0.00                  |
| 13,300.0              | 90.00           | 359.54      | 11,399.9              | 1,273.5      | -513.6       | 1,302.1                 | 0.00                    | 0.00                   | 0.00                  |



## Planning Report

|                  |                             |                                     |                       |
|------------------|-----------------------------|-------------------------------------|-----------------------|
| <b>Database:</b> | PEDMB                       | <b>Local Co-ordinate Reference:</b> | Well #502H            |
| <b>Company:</b>  | Midland                     | <b>TVD Reference:</b>               | kb = 26' @ 3455.0usft |
| <b>Project:</b>  | Lea County, NM (NAD 83 NME) | <b>MD Reference:</b>                | kb = 26' @ 3455.0usft |
| <b>Site:</b>     | Grackle 26 East Fed Com #   | <b>North Reference:</b>             | Grid                  |
| <b>Well:</b>     | #502H                       | <b>Survey Calculation Method:</b>   | Minimum Curvature     |
| <b>Wellbore:</b> | OH                          |                                     |                       |
| <b>Design:</b>   | Plan #0.1 RT                |                                     |                       |

| Planned Survey        |                 |             |                       |              |              |                         |                         |                        |                       |  |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|--|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |  |
| 13,400.0              | 90.00           | 359.54      | 11,399.9              | 1,373.5      | -514.4       | 1,401.9                 | 0.00                    | 0.00                   | 0.00                  |  |
| 13,500.0              | 90.00           | 359.54      | 11,399.9              | 1,473.5      | -515.2       | 1,501.8                 | 0.00                    | 0.00                   | 0.00                  |  |
| 13,600.0              | 90.00           | 359.54      | 11,399.9              | 1,573.5      | -516.0       | 1,601.7                 | 0.00                    | 0.00                   | 0.00                  |  |
| 13,700.0              | 90.00           | 359.54      | 11,399.9              | 1,673.5      | -516.8       | 1,701.5                 | 0.00                    | 0.00                   | 0.00                  |  |
| 13,800.0              | 90.00           | 359.54      | 11,399.9              | 1,773.5      | -517.6       | 1,801.4                 | 0.00                    | 0.00                   | 0.00                  |  |
| 13,900.0              | 90.00           | 359.54      | 11,399.9              | 1,873.5      | -518.4       | 1,901.3                 | 0.00                    | 0.00                   | 0.00                  |  |
| 14,000.0              | 90.00           | 359.54      | 11,399.9              | 1,973.5      | -519.2       | 2,001.1                 | 0.00                    | 0.00                   | 0.00                  |  |
| 14,100.0              | 90.00           | 359.54      | 11,399.9              | 2,073.5      | -520.0       | 2,101.0                 | 0.00                    | 0.00                   | 0.00                  |  |
| 14,200.0              | 90.00           | 359.54      | 11,399.9              | 2,173.5      | -520.8       | 2,200.9                 | 0.00                    | 0.00                   | 0.00                  |  |
| 14,300.0              | 90.00           | 359.54      | 11,399.9              | 2,273.5      | -521.6       | 2,300.7                 | 0.00                    | 0.00                   | 0.00                  |  |
| 14,400.0              | 90.00           | 359.54      | 11,399.9              | 2,373.5      | -522.4       | 2,400.6                 | 0.00                    | 0.00                   | 0.00                  |  |
| 14,500.0              | 90.00           | 359.54      | 11,399.9              | 2,473.5      | -523.2       | 2,500.5                 | 0.00                    | 0.00                   | 0.00                  |  |
| 14,600.0              | 90.00           | 359.54      | 11,399.9              | 2,573.5      | -524.0       | 2,600.3                 | 0.00                    | 0.00                   | 0.00                  |  |
| 14,700.0              | 90.00           | 359.54      | 11,399.9              | 2,673.5      | -524.8       | 2,700.2                 | 0.00                    | 0.00                   | 0.00                  |  |
| 14,800.0              | 90.00           | 359.54      | 11,399.9              | 2,773.5      | -525.6       | 2,800.0                 | 0.00                    | 0.00                   | 0.00                  |  |
| 14,900.0              | 90.00           | 359.54      | 11,399.9              | 2,873.5      | -526.4       | 2,899.9                 | 0.00                    | 0.00                   | 0.00                  |  |
| 15,000.0              | 90.00           | 359.54      | 11,399.9              | 2,973.5      | -527.2       | 2,999.8                 | 0.00                    | 0.00                   | 0.00                  |  |
| 15,100.0              | 90.00           | 359.54      | 11,399.9              | 3,073.5      | -528.0       | 3,099.6                 | 0.00                    | 0.00                   | 0.00                  |  |
| 15,200.0              | 90.00           | 359.54      | 11,399.9              | 3,173.5      | -528.8       | 3,199.5                 | 0.00                    | 0.00                   | 0.00                  |  |
| 15,300.0              | 90.00           | 359.54      | 11,399.9              | 3,273.5      | -529.6       | 3,299.4                 | 0.00                    | 0.00                   | 0.00                  |  |
| 15,400.0              | 90.00           | 359.54      | 11,399.9              | 3,373.5      | -530.5       | 3,399.2                 | 0.00                    | 0.00                   | 0.00                  |  |
| 15,500.0              | 90.00           | 359.54      | 11,399.9              | 3,473.5      | -531.3       | 3,499.1                 | 0.00                    | 0.00                   | 0.00                  |  |
| 15,600.0              | 90.00           | 359.54      | 11,399.9              | 3,573.5      | -532.1       | 3,599.0                 | 0.00                    | 0.00                   | 0.00                  |  |
| 15,700.0              | 90.00           | 359.54      | 11,399.9              | 3,673.5      | -532.9       | 3,698.8                 | 0.00                    | 0.00                   | 0.00                  |  |
| 15,800.0              | 90.00           | 359.54      | 11,399.9              | 3,773.5      | -533.7       | 3,798.7                 | 0.00                    | 0.00                   | 0.00                  |  |
| 15,900.0              | 90.00           | 359.54      | 11,399.9              | 3,873.5      | -534.5       | 3,898.6                 | 0.00                    | 0.00                   | 0.00                  |  |
| 16,000.0              | 90.00           | 359.54      | 11,400.0              | 3,973.5      | -535.3       | 3,998.4                 | 0.00                    | 0.00                   | 0.00                  |  |
| 16,100.0              | 90.00           | 359.54      | 11,400.0              | 4,073.4      | -536.1       | 4,098.3                 | 0.00                    | 0.00                   | 0.00                  |  |
| 16,200.0              | 90.00           | 359.54      | 11,400.0              | 4,173.4      | -536.9       | 4,198.2                 | 0.00                    | 0.00                   | 0.00                  |  |
| 16,300.0              | 90.00           | 359.54      | 11,400.0              | 4,273.4      | -537.7       | 4,298.0                 | 0.00                    | 0.00                   | 0.00                  |  |
| 16,400.0              | 90.00           | 359.54      | 11,400.0              | 4,373.4      | -538.5       | 4,397.9                 | 0.00                    | 0.00                   | 0.00                  |  |
| 16,500.0              | 90.00           | 359.54      | 11,400.0              | 4,473.4      | -539.3       | 4,497.7                 | 0.00                    | 0.00                   | 0.00                  |  |
| 16,600.0              | 90.00           | 359.54      | 11,400.0              | 4,573.4      | -540.1       | 4,597.6                 | 0.00                    | 0.00                   | 0.00                  |  |
| 16,700.0              | 90.00           | 359.54      | 11,400.0              | 4,673.4      | -540.9       | 4,697.5                 | 0.00                    | 0.00                   | 0.00                  |  |
| 16,800.0              | 90.00           | 359.54      | 11,400.0              | 4,773.4      | -541.7       | 4,797.3                 | 0.00                    | 0.00                   | 0.00                  |  |
| 16,900.0              | 90.00           | 359.54      | 11,400.0              | 4,873.4      | -542.5       | 4,897.2                 | 0.00                    | 0.00                   | 0.00                  |  |
| 17,000.0              | 90.00           | 359.54      | 11,400.0              | 4,973.4      | -543.3       | 4,997.1                 | 0.00                    | 0.00                   | 0.00                  |  |
| 17,100.0              | 90.00           | 359.54      | 11,400.0              | 5,073.4      | -544.1       | 5,096.9                 | 0.00                    | 0.00                   | 0.00                  |  |
| 17,200.0              | 90.00           | 359.54      | 11,400.0              | 5,173.4      | -544.9       | 5,196.8                 | 0.00                    | 0.00                   | 0.00                  |  |
| 17,300.0              | 90.00           | 359.54      | 11,400.0              | 5,273.4      | -545.7       | 5,296.7                 | 0.00                    | 0.00                   | 0.00                  |  |
| 17,400.0              | 90.00           | 359.54      | 11,400.0              | 5,373.4      | -546.5       | 5,396.5                 | 0.00                    | 0.00                   | 0.00                  |  |
| 17,500.0              | 90.00           | 359.54      | 11,400.0              | 5,473.4      | -547.3       | 5,496.4                 | 0.00                    | 0.00                   | 0.00                  |  |
| 17,600.0              | 90.00           | 359.54      | 11,400.0              | 5,573.4      | -548.1       | 5,596.3                 | 0.00                    | 0.00                   | 0.00                  |  |
| 17,700.0              | 90.00           | 359.54      | 11,400.0              | 5,673.4      | -548.9       | 5,696.1                 | 0.00                    | 0.00                   | 0.00                  |  |
| 17,800.0              | 90.00           | 359.54      | 11,400.0              | 5,773.4      | -549.8       | 5,796.0                 | 0.00                    | 0.00                   | 0.00                  |  |
| 17,900.0              | 90.00           | 359.54      | 11,400.0              | 5,873.4      | -550.6       | 5,895.9                 | 0.00                    | 0.00                   | 0.00                  |  |
| 18,000.0              | 90.00           | 359.54      | 11,400.0              | 5,973.4      | -551.4       | 5,995.7                 | 0.00                    | 0.00                   | 0.00                  |  |
| 18,100.0              | 90.00           | 359.54      | 11,400.0              | 6,073.4      | -552.2       | 6,095.6                 | 0.00                    | 0.00                   | 0.00                  |  |
| 18,200.0              | 90.00           | 359.54      | 11,400.0              | 6,173.4      | -553.0       | 6,195.4                 | 0.00                    | 0.00                   | 0.00                  |  |
| 18,300.0              | 90.00           | 359.54      | 11,400.0              | 6,273.4      | -553.8       | 6,295.3                 | 0.00                    | 0.00                   | 0.00                  |  |
| 18,400.0              | 90.00           | 359.54      | 11,400.0              | 6,373.4      | -554.6       | 6,395.2                 | 0.00                    | 0.00                   | 0.00                  |  |
| 18,500.0              | 90.00           | 359.54      | 11,400.0              | 6,473.4      | -555.4       | 6,495.0                 | 0.00                    | 0.00                   | 0.00                  |  |
| 18,600.0              | 90.00           | 359.54      | 11,400.0              | 6,573.4      | -556.2       | 6,594.9                 | 0.00                    | 0.00                   | 0.00                  |  |
| 18,700.0              | 90.00           | 359.54      | 11,400.0              | 6,673.4      | -557.0       | 6,694.8                 | 0.00                    | 0.00                   | 0.00                  |  |

Planning Report

|           |                             |                              |                       |
|-----------|-----------------------------|------------------------------|-----------------------|
| Database: | PEDMB                       | Local Co-ordinate Reference: | Well #502H            |
| Company:  | Midland                     | TVD Reference:               | kb = 26' @ 3455.0usft |
| Project:  | Lea County, NM (NAD 83 NME) | MD Reference:                | kb = 26' @ 3455.0usft |
| Site:     | Grackle 26 East Fed Com #   | North Reference:             | Grid                  |
| Well:     | #502H                       | Survey Calculation Method:   | Minimum Curvature     |
| Wellbore: | OH                          |                              |                       |
| Design:   | Plan #0.1 RT                |                              |                       |

| Planned Survey        |                 |             |                       |              |              |                         |                         |                        |                       |  |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|--|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |  |
| 18,800.0              | 90.00           | 359.54      | 11,400.0              | 6,773.4      | -557.8       | 6,794.6                 | 0.00                    | 0.00                   | 0.00                  |  |
| 18,900.0              | 90.00           | 359.54      | 11,400.0              | 6,873.4      | -558.6       | 6,894.5                 | 0.00                    | 0.00                   | 0.00                  |  |
| 19,000.0              | 90.00           | 359.54      | 11,400.0              | 6,973.4      | -559.4       | 6,994.4                 | 0.00                    | 0.00                   | 0.00                  |  |
| 19,100.0              | 90.00           | 359.54      | 11,400.0              | 7,073.4      | -560.2       | 7,094.2                 | 0.00                    | 0.00                   | 0.00                  |  |
| 19,200.0              | 90.00           | 359.54      | 11,400.0              | 7,173.3      | -561.0       | 7,194.1                 | 0.00                    | 0.00                   | 0.00                  |  |
| 19,300.0              | 90.00           | 359.54      | 11,400.0              | 7,273.3      | -561.8       | 7,294.0                 | 0.00                    | 0.00                   | 0.00                  |  |
| 19,400.0              | 90.00           | 359.54      | 11,400.0              | 7,373.3      | -562.6       | 7,393.8                 | 0.00                    | 0.00                   | 0.00                  |  |
| 19,500.0              | 90.00           | 359.54      | 11,400.0              | 7,473.3      | -563.4       | 7,493.7                 | 0.00                    | 0.00                   | 0.00                  |  |
| 19,600.0              | 90.00           | 359.54      | 11,400.0              | 7,573.3      | -564.2       | 7,593.6                 | 0.00                    | 0.00                   | 0.00                  |  |
| 19,700.0              | 90.00           | 359.54      | 11,400.0              | 7,673.3      | -565.0       | 7,693.4                 | 0.00                    | 0.00                   | 0.00                  |  |
| 19,800.0              | 90.00           | 359.54      | 11,400.0              | 7,773.3      | -565.8       | 7,793.3                 | 0.00                    | 0.00                   | 0.00                  |  |
| 19,900.0              | 90.00           | 359.54      | 11,400.0              | 7,873.3      | -566.6       | 7,893.1                 | 0.00                    | 0.00                   | 0.00                  |  |
| 20,000.0              | 90.00           | 359.54      | 11,400.0              | 7,973.3      | -567.4       | 7,993.0                 | 0.00                    | 0.00                   | 0.00                  |  |
| 20,100.0              | 90.00           | 359.54      | 11,400.0              | 8,073.3      | -568.2       | 8,092.9                 | 0.00                    | 0.00                   | 0.00                  |  |
| 20,200.0              | 90.00           | 359.54      | 11,400.0              | 8,173.3      | -569.1       | 8,192.7                 | 0.00                    | 0.00                   | 0.00                  |  |
| 20,300.0              | 90.00           | 359.54      | 11,400.0              | 8,273.3      | -569.9       | 8,292.6                 | 0.00                    | 0.00                   | 0.00                  |  |
| 20,400.0              | 90.00           | 359.54      | 11,400.0              | 8,373.3      | -570.7       | 8,392.5                 | 0.00                    | 0.00                   | 0.00                  |  |
| 20,500.0              | 90.00           | 359.54      | 11,400.0              | 8,473.3      | -571.5       | 8,492.3                 | 0.00                    | 0.00                   | 0.00                  |  |
| 20,600.0              | 90.00           | 359.54      | 11,400.0              | 8,573.3      | -572.3       | 8,592.2                 | 0.00                    | 0.00                   | 0.00                  |  |
| 20,700.0              | 90.00           | 359.54      | 11,400.0              | 8,673.3      | -573.1       | 8,692.1                 | 0.00                    | 0.00                   | 0.00                  |  |
| 20,800.0              | 90.00           | 359.54      | 11,400.0              | 8,773.3      | -573.9       | 8,791.9                 | 0.00                    | 0.00                   | 0.00                  |  |
| 20,900.0              | 90.00           | 359.54      | 11,400.0              | 8,873.3      | -574.7       | 8,891.8                 | 0.00                    | 0.00                   | 0.00                  |  |
| 21,000.0              | 90.00           | 359.54      | 11,400.0              | 8,973.3      | -575.5       | 8,991.7                 | 0.00                    | 0.00                   | 0.00                  |  |
| 21,100.0              | 90.00           | 359.54      | 11,400.0              | 9,073.3      | -576.3       | 9,091.5                 | 0.00                    | 0.00                   | 0.00                  |  |
| 21,200.0              | 90.00           | 359.54      | 11,400.0              | 9,173.3      | -577.1       | 9,191.4                 | 0.00                    | 0.00                   | 0.00                  |  |
| 21,300.0              | 90.00           | 359.54      | 11,400.0              | 9,273.3      | -577.9       | 9,291.2                 | 0.00                    | 0.00                   | 0.00                  |  |
| 21,400.0              | 90.00           | 359.54      | 11,400.0              | 9,373.3      | -578.7       | 9,391.1                 | 0.00                    | 0.00                   | 0.00                  |  |
| 21,500.0              | 90.00           | 359.54      | 11,400.0              | 9,473.3      | -579.5       | 9,491.0                 | 0.00                    | 0.00                   | 0.00                  |  |
| 21,600.0              | 90.00           | 359.54      | 11,400.0              | 9,573.3      | -580.3       | 9,590.8                 | 0.00                    | 0.00                   | 0.00                  |  |
| 21,685.7              | 90.00           | 359.54      | 11,400.0              | 9,659.0      | -581.0       | 9,676.5                 | 0.00                    | 0.00                   | 0.00                  |  |

| Design Targets            |               |              |            |              |              |                 |                |                  |                   |  |
|---------------------------|---------------|--------------|------------|--------------|--------------|-----------------|----------------|------------------|-------------------|--|
| Target Name               | Dip Angle (°) | Dip Dir. (°) | TVD (usft) | +N/-S (usft) | +E/-W (usft) | Northing (usft) | Easting (usft) | Latitude         | Longitude         |  |
| - hit/miss target         |               |              |            |              |              |                 |                |                  |                   |  |
| - Shape                   |               |              |            |              |              |                 |                |                  |                   |  |
| KOP(Grackle 26 East Fe    | 0.00          | 0.00         | 10,922.5   | -765.0       | -495.0       | 430,864.00      | 818,818.00     | 32° 10' 52.835 N | 103° 26' 11.208 W |  |
| - plan hits target center |               |              |            |              |              |                 |                |                  |                   |  |
| - Point                   |               |              |            |              |              |                 |                |                  |                   |  |
| FTP(Grackle 26 East Fe    | 0.00          | 0.00         | 11,135.2   | -715.0       | -496.0       | 430,914.00      | 818,817.00     | 32° 10' 53.329 N | 103° 26' 11.215 W |  |
| - plan hits target center |               |              |            |              |              |                 |                |                  |                   |  |
| - Point                   |               |              |            |              |              |                 |                |                  |                   |  |
| PBHL(Grackle 26 East F    | 0.00          | 0.00         | 11,400.0   | 9,659.0      | -581.0       | 441,288.00      | 818,732.00     | 32° 12' 35.986 N | 103° 26' 11.197 W |  |
| - plan hits target center |               |              |            |              |              |                 |                |                  |                   |  |
| - Point                   |               |              |            |              |              |                 |                |                  |                   |  |



Lea County, NM (NAD 83 NME)

Grackle 26 East Fed Com # #502H

Plan #0.1 RT



To convert a Magnetic Direction to a Grid Direction, Add 5.67°  
To convert a Magnetic Direction to a True Direction, Add 6.15° East  
To convert a True Direction to a Grid Direction, Subtract 0.48°

PROJECT DETAILS: Lea County, NM (NAD 83 NME)

Geodetic System: US State Plane 1983  
Datum: North American Datum 1983  
Ellipsoid: GRS 1980  
Zone: New Mexico Eastern Zone  
System Datum: Mean Sea Level

WELL DETAILS: #502H

3429.0  
kb = 26' @ 3455.0usft  
Northing 431629.00 Easting 819313.00 Latitude 32° 11' 0.363 N Longitude 103° 26' 5.374 W

SECTION DETAILS



| Sec | MD      | Inc   | Azi    | TVD     | +N/-S  | +E/-W  | Dleg  | TFace  | VSect  | Target                              |
|-----|---------|-------|--------|---------|--------|--------|-------|--------|--------|-------------------------------------|
| 1   | 0.0     | 0.00  | 0.00   | 0.0     | 0.0    | 0.0    | 0.00  | 0.00   | 0.0    |                                     |
| 2   | 1200.0  | 0.00  | 0.00   | 1200.0  | 0.0    | 0.0    | 0.00  | 0.00   | 0.0    |                                     |
| 3   | 1626.5  | 8.53  | 212.91 | 1625.0  | -26.6  | -17.2  | 2.00  | 212.91 | -25.5  |                                     |
| 4   | 7341.8  | 8.53  | 212.91 | 7277.0  | -738.4 | -477.8 | 0.00  | 0.00   | -708.4 |                                     |
| 5   | 7768.4  | 0.00  | 0.00   | 7702.0  | -765.0 | -495.0 | 2.00  | 180.00 | -733.9 |                                     |
| 6   | 10988.9 | 0.00  | 0.00   | 10922.5 | -765.0 | -495.0 | 0.00  | 0.00   | -733.9 | KOP(Grackle 26 East Fed Com #502H)  |
| 7   | 11209.3 | 26.46 | 358.85 | 11135.2 | -715.0 | -496.0 | 12.00 | 358.85 | -683.9 | FTP(Grackle 26 East Fed Com #502H)  |
| 8   | 11738.8 | 90.00 | 359.54 | 11399.9 | -287.6 | -501.0 | 12.00 | 0.77   | -257.0 |                                     |
| 9   | 21685.7 | 90.00 | 359.54 | 11400.0 | 9659.0 | -581.0 | 0.00  | 0.00   | 9676.5 | PBHL(Grackle 26 East Fed Com #502H) |

CASING DETAILS

No casing data is available

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

| Name                                | TVD     | +N/-S  | +E/-W  | Northing  | Easting   |
|-------------------------------------|---------|--------|--------|-----------|-----------|
| KOP(Grackle 26 East Fed Com #502H)  | 10922.5 | -765.0 | -495.0 | 430864.00 | 818818.00 |
| FTP(Grackle 26 East Fed Com #502H)  | 11135.2 | -715.0 | -496.0 | 430914.00 | 818817.00 |
| PBHL(Grackle 26 East Fed Com #502H) | 11400.0 | 9659.0 | -581.0 | 441288.00 | 818732.00 |

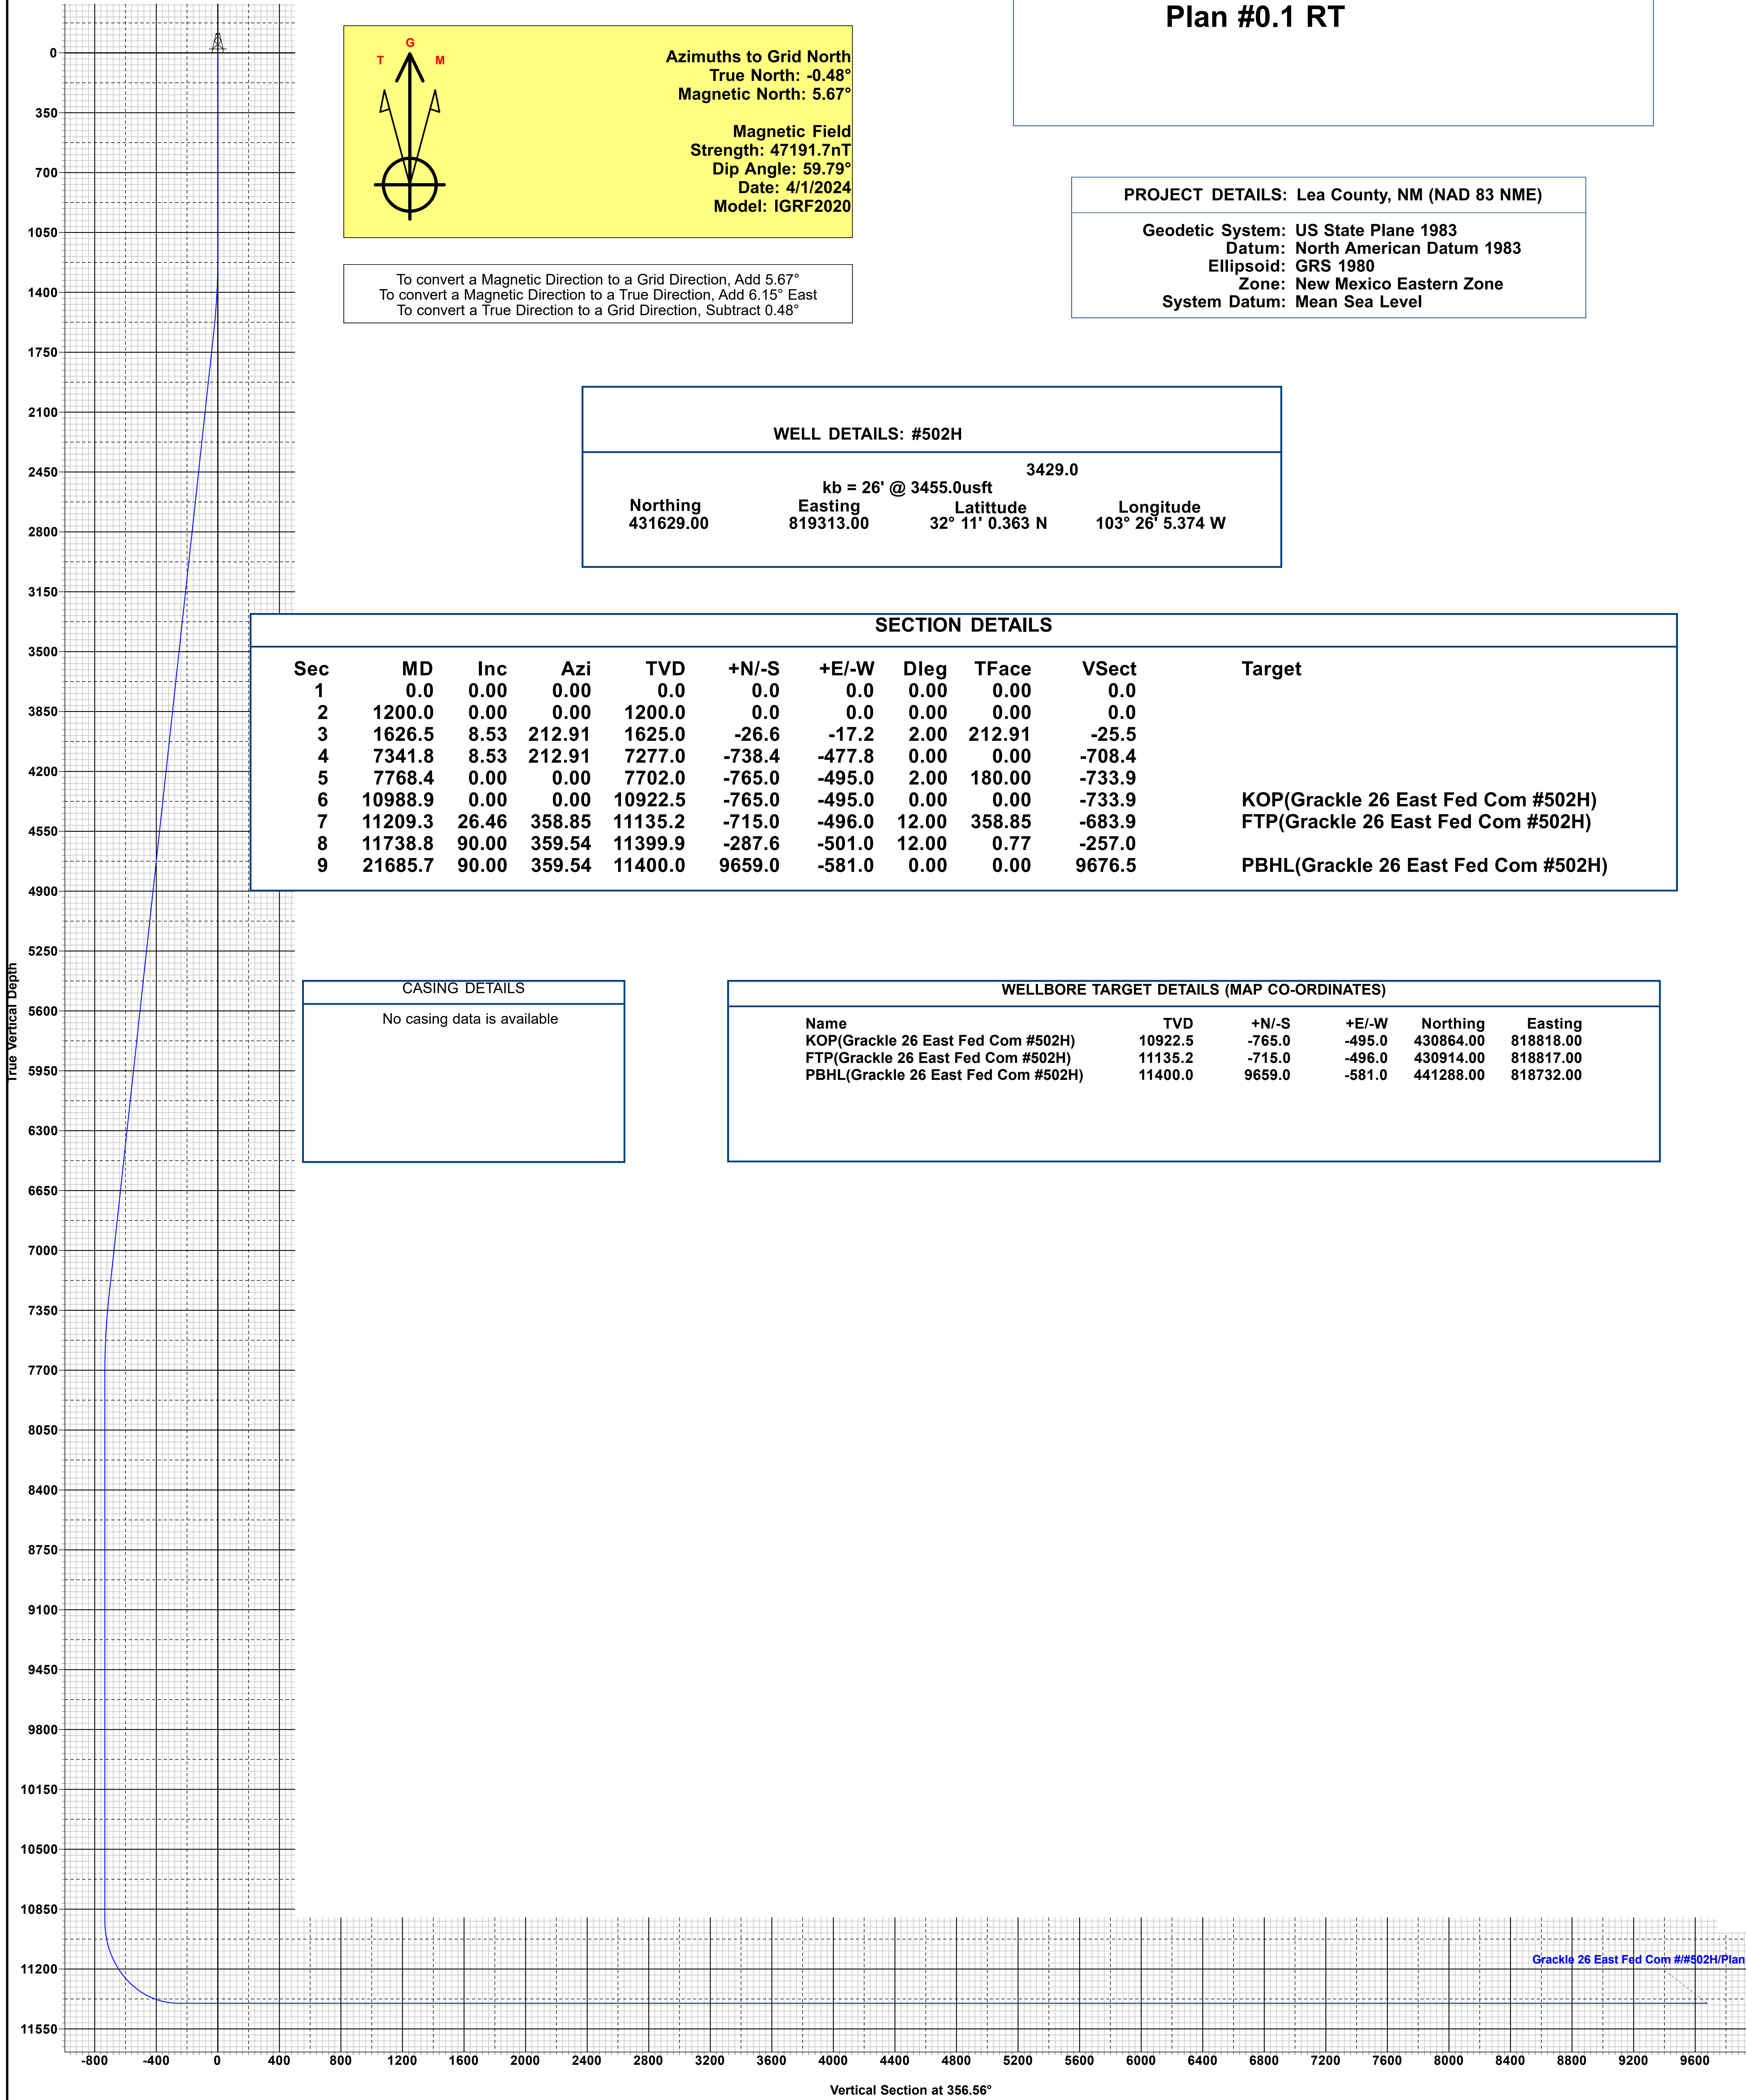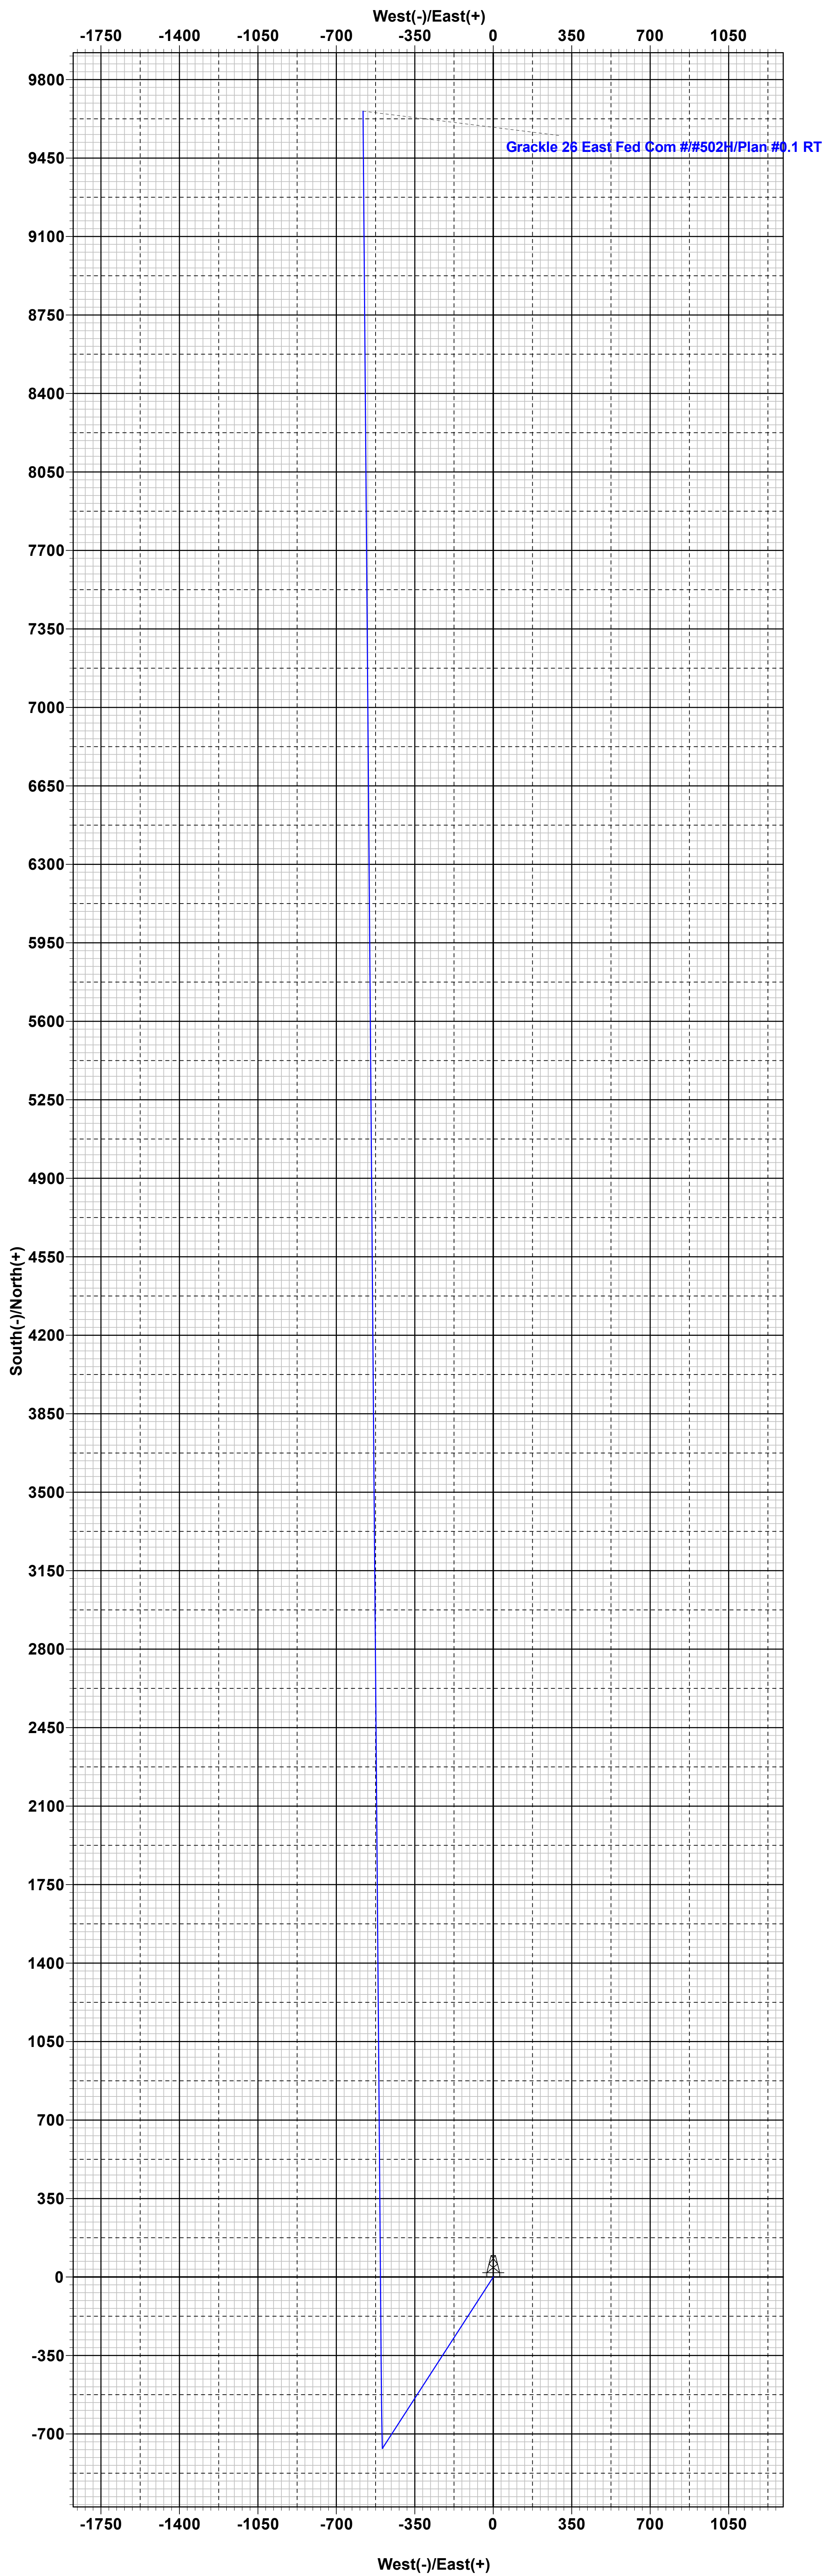





## Grackle 26 East Fed Com 502H

**1. GEOLOGIC NAME OF SURFACE FORMATION:**

Permian

**2. ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:**

|                        |         |
|------------------------|---------|
| Rustler                | 989'    |
| Tamarisk Anhydrite     | 1,094'  |
| Top of Salt            | 1,559'  |
| Base of Salt           | 4,976'  |
| Lamar                  | 5,244'  |
| Bell Canyon            | 5,272'  |
| Cherry Canyon          | 6,209'  |
| Brushy Canyon          | 7,702'  |
| Bone Spring Lime       | 9,078'  |
| Leonard (Avalon) Shale | 9,429'  |
| 1st Bone Spring Sand   | 10,461' |
| 2nd Bone Spring Shale  | 10,692' |
| 2nd Bone Spring Sand   | 10,984' |
| 3rd Bone Spring Carb   | 11,492' |
| 3rd Bone Spring Sand   | 12,019' |
| Wolfcamp               | 12,320' |
| TD                     | 11,400' |

**3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:**

|                        |         |             |
|------------------------|---------|-------------|
| Upper Permian Sands    | 0- 400' | Fresh Water |
| Bell Canyon            | 5,272'  | Oil         |
| Cherry Canyon          | 6,209'  | Oil         |
| Brushy Canyon          | 7,702'  | Oil         |
| Leonard (Avalon) Shale | 9,429'  | Oil         |
| 1st Bone Spring Sand   | 10,461' | Oil         |
| 2nd Bone Spring Shale  | 10,692' | Oil         |
| 2nd Bone Spring Sand   | 10,984' | Oil         |

No other Formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 10-3/4" casing at 1,120' and circulating cement back to surface.





## Grackle 26 East Fed Com 502H

## 4. CASING PROGRAM

| Hole Size | Interval MD |         | Interval TVD |         | Csg OD  | Weight | Grade   | Conn        |
|-----------|-------------|---------|--------------|---------|---------|--------|---------|-------------|
|           | From (ft)   | To (ft) | From (ft)    | To (ft) |         |        |         |             |
| 13-1/2"   | 0           | 1,120   | 0            | 1,120   | 10-3/4" | 40.5#  | J-55    | STC         |
| 9-7/8"    | 0           | 5,149   | 0            | 5,080   | 8-5/8"  | 32#    | J-55    | BTC-SC      |
| 6-3/4"    | 0           | 21,686  | 0            | 11,400  | 5-1/2"  | 20#    | P110-EC | DWC/C IS MS |

Hole will be full during casing run for well control and tensile SF factor. Casing will be kept at least half full during run for this design to meet BLM collapse SF requirement. External pressure will be reviewed prior to conducting casing pressure tests to ensure that 70% of the yield is not exceeded.

Variance is requested to waive the centralizer requirements for the 8-5/8" casing in the 9-7/8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 9-7/8" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement for the intermediate (salt) section from Title 43 CFR Part 3170 under the following conditions:

- The variance is not applicable within the Potash Boundaries or Capitan Reef areas.
- Operator takes responsibility to get casing to set point in the event that the clearance causes stuck pipe issues.

## 5. CEMENTING PROGRAM:

| Depth             | No. Sacks | Wt. ppg | Yld Ft3/sk | Slurry Description                                                                                                                 |
|-------------------|-----------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------|
| 1,120'<br>10-3/4" | 290       | 13.5    | 1.73       | Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl <sub>2</sub> + 0.25 lb/sk Cello-Flake (TOC @ Surface)                               |
|                   | 140       | 14.8    | 1.34       | Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 920')                                        |
| 5,250'<br>8-5/8"  | 310       | 12.7    | 2.22       | Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx (TOC @ Surface)                                                             |
|                   | 140       | 14.8    | 1.32       | Tail: Class C + 10% NaCl + 3% MagOx (TOC @ 4119')                                                                                  |
| 21,686'<br>5-1/2" | 370       | 10.5    | 3.21       | Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 4650')                                                         |
|                   | 750       | 13.2    | 1.52       | Tail: Class H + 5% NEX-020 + 0.2% NAC-102 + 0.15% NAS-725 + 0.5% NFL-549 + 0.2% NFP-703 + 1% NBE-737 + 0.3% NRT-241 (TOC @ 10990') |



### Grackle 26 East Fed Com 502H

| Additive            | Purpose                                 |
|---------------------|-----------------------------------------|
| Bentonite Gel       | Lightweight/Lost circulation prevention |
| Calcium Chloride    | Accelerator                             |
| Cello-flake         | Lost circulation prevention             |
| Sodium Metasilicate | Accelerator                             |
| MagOx               | Expansive agent                         |
| Pre-Mag-M           | Expansive agent                         |
| Sodium Chloride     | Accelerator                             |
| FL-62               | Fluid loss control                      |
| Halad-344           | Fluid loss control                      |
| Halad-9             | Fluid loss control                      |
| HR-601              | Retarder                                |
| Microbond           | Expansive Agent                         |

Cement integrity tests will be performed immediately following plug bump.

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

#### 6. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5,000-psi WP). Both units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top. All BOPE will be tested in accordance with Onshore Oil & Gas order No. 2.

EOG will utilize wing unions on BOPE connections that can be isolated from wellbore pressure through means of a choke. All wing unions will be rated to a pressure that meets or exceeds the pressure rating of the BOPE system.

Variance is requested to use a 5,000 psi annular BOP with the 10,000 psi BOP stack.

Before drilling out of the surface casing, the ram-type BOP and accessory equipment will be tested to 10,000/ 250 psig and the annular preventer to 5,000/ 250 psig.

Pipe rams and blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.



## Grackle 26 East Fed Com 502H

### 7. TYPES AND CHARACTERISTICS OF THE PROPOSED MUD SYSTEM:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal.

The applicable depths and properties of the drilling fluid systems are as follows:

| Depth                       | Type        | Weight (ppg) | Viscosity | Water Loss |
|-----------------------------|-------------|--------------|-----------|------------|
| 0 – 1,120'                  | Fresh - Gel | 8.6-8.8      | 28-34     | N/c        |
| 1,120' – 5,150'             | Brine       | 9-10.5       | 28-34     | N/c        |
| 5,150' – 21,686'<br>Lateral | Oil Base    | 8.8-9.5      | 58-68     | N/c - 6    |

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

### 8. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) H2S monitoring and detection equipment will be utilized from surface casing point to TD.

### 9. LOGGING, TESTING AND CORING PROGRAM:

- (A) Open-hole logs are not planned for this well.
- (B) GR-CCL will be run in cased hole during completions phase of operations.

### 10. ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES AND POTENTIAL HAZARDS:

The estimated bottom-hole temperature (BHT) at TD is 184 degrees F with an estimated maximum bottom-hole pressure (BHP) at TD of 5,335 psig and a maximum anticipated surface pressure of 2,827 psig (based on 9.0 ppg MW). No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. Severe loss circulation is expected from 7,702' to intermediate casing point.



**Grackle 26 East Fed Com 502H****11. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:**

The drilling operation should be finished in approximately one month. If the well is productive, an additional 60-90 days will be required for completion and testing before a decision is made to install permanent facilities.

EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and Cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both "A" and "B" sections). The weld will be tested to 1,500 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

**12. WELLHEAD:**

A multi-bowl wellhead system will be utilized.

After running the surface casing, a BOP/BOPE system with a minimum working pressure of 10,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 10,000 psi pressure test. This pressure test will be repeated at least every 30 days, as per Title 43 CFR Part 3170.

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 10,000 psi.

The multi-bowl wellhead will be installed by vendor's representative(s). A copy of the installation instructions for the Cactus Multi-Bowl WH system has been sent to the NM BLM office in Carlsbad, NM.

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type. EOG Resources reserves the option to conduct BOPE testing during wait on cement periods provided a test plug is utilized.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi.

Casing strings will be tested as per Title 43 CFR Part 3170 to at least 0.22 psi/ft or 1,500 psi, whichever is greater.



**Grackle 26 East Fed Com 502H**

**13. VARIANCE REQUESTS:**

EOG requests the additional variance(s) in the attached document(s):

- EOG BLM Variance 3a\_b - BOP Break-test and Offline Intermediate Cement
- EOG BLM Variance 4a - Salt Section Annular Clearance
- EOG BLM Variance 5a - Alternate Shallow Casing Designs



**Grackle 26 East Fed Com 502H**

**14. TUBING REQUIREMENTS:**

EOG respectfully requests an exception to the following NMOCD rule:

- 19.15.16.10 Casing AND TUBING REQUIREMENTS:  
J (3): "The operator shall set tubing as near the bottom as practical and tubing perforations shall not be more than 250 feet above top of pay zone."

With horizontal flowing and gas lifted wells an end of tubing depth placed at or slightly above KOP is a conservative way to ensure the tubing stays clean from debris, plugging, and allows for fewer well interventions post offset completion. The deeper the tubulars are run into the curve, the higher the probability is that the tubing will become stuck in sand and or well debris as the well produces over time. An additional consideration for EOT placement during artificial lift installations is avoiding the high dog leg severity and inclinations found in the curve section of the wellbore to help improve reliability and performance. Dog leg severity and inclinations tend not to hamper gas lifted or flowing wells, but they do effect other forms of artificial lift like rod pump or ESP (electric submersible pump). Keeping the EOT above KOP is an industry best practice for those respective forms of artificial lift.



Grackle 26 East Fed Com 502H

876' FSL  
808' FEL  
Section 26  
T-24-S, R-34-E

Proposed Wellbore  
  
API: 30-025-\*\*\*\*\*

KB: 3454'  
GL: 3429'

Bit Size: 13-1/2"  
10-3/4", 40.5#, J-55, STC  
@ 0' - 1,120'

Bit Size: 9-7/8"  
8-5/8", 32.#, J-55, BTC-SC  
@ 0' - 5,150'


Bit Size: 6-3/4"  
5-1/2", 20.#, P110-EC, DWC/C IS MS  
@ 0' - 21,686'

KOP: 10,989' MD, 9,338' TVD  
EOC: 11,739' MD, 9,911' TVD

Lateral: 21,686' MD, 11,400' TVD  
Upper Most Perf:  
100' FSL & 1311' FEL Sec. 26  
Lower Most Perf:  
100' FNL & 1311' FEL Sec. 23  
BH Location: 100' FNL & 1311' FEL  
Sec. 23, T-24-S, R-34-E

Bit Size: 6-3/4"

Exhibit 4  
EOG Resources  
Grackle 26 East Fed Com #502H

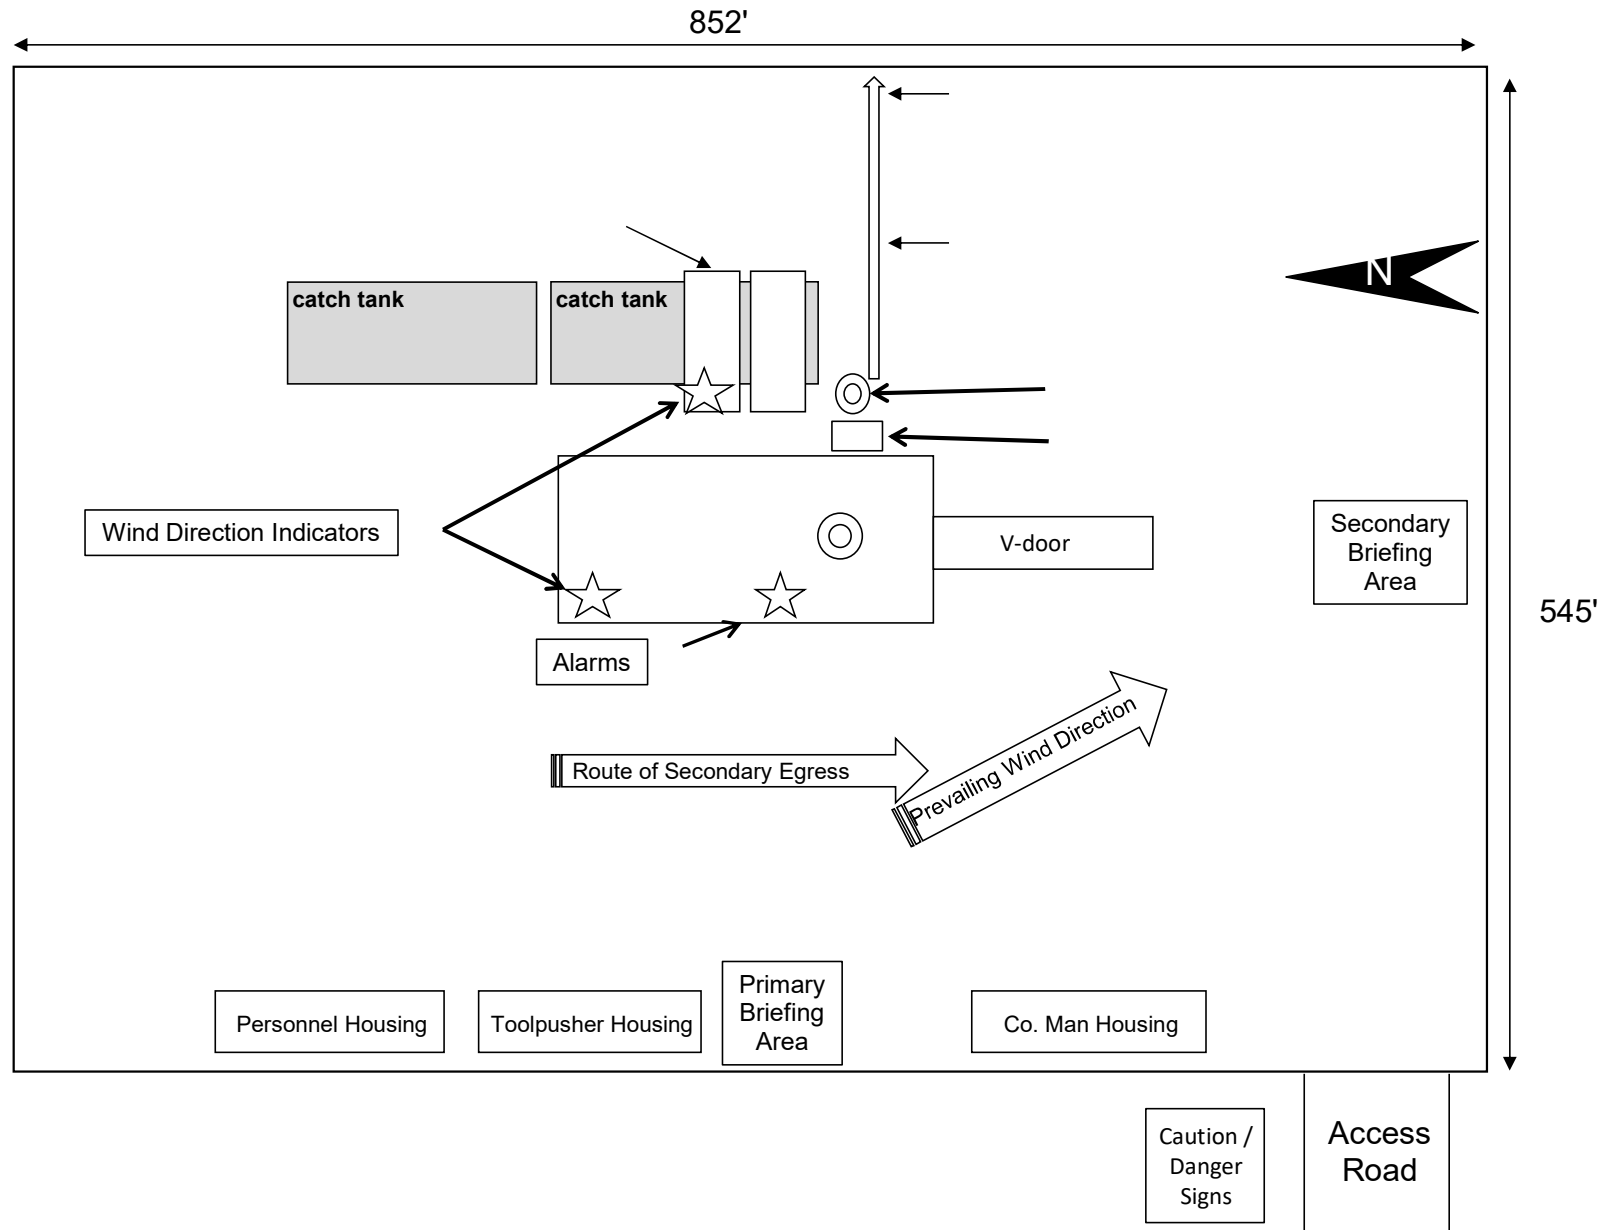

New Search »

« Back to Previous List

USC



Metric


6/8/2015 10:14:05 AM

| Mechanical Properties            | Pipe   | BTC    | LTC | STC    |          |
|----------------------------------|--------|--------|-----|--------|----------|
| Minimum Yield Strength           | 55,000 | --     | --  | --     | psi      |
| Maximum Yield Strength           | 80,000 | --     | --  | --     | psi      |
| Minimum Tensile Strength         | 75,000 | --     | --  | --     | psi      |
| Dimenstons                       | Pipe   | BTC    | LTC | STC    |          |
| Outside Diameter                 | 10.750 | 11.750 | --  | 11.750 | in.      |
| Wall Thickness                   | 0.350  | --     | --  | --     | in.      |
| Inside Diameter                  | 10.050 | 10.050 | --  | 10.050 | in.      |
| Standard Drift                   | 9.894  | 9.894  | --  | 9.894  | in.      |
| Alternate Drift                  | --     | --     | --  | --     | in.      |
| Nominal Linear Weight, T&C       | 40.50  | --     | --  | --     | lbs/ft   |
| Plain End Weight                 | 38.91  | --     | --  | --     | lbs/ft   |
| Performance                      | Pipe   | BTC    | LTC | STC    |          |
| Minimum Collapse Pressure        | 1,580  | 1,580  | --  | 1,580  | psi      |
| Minimum Internal Yield Pressure  | 3,130  | 3,130  | --  | 3,130  | psi      |
| Minimum Pipe Body Yield Strength | 629.00 | --     | --  | --     | 1000 lbs |
| Joint Strength                   | --     | 700    | --  | 420    | 1000 lbs |
| Reference Length                 | --     | 11,522 | --  | 6,915  | ft       |
| Make-Up Data                     | Pipe   | BTC    | LTC | STC    |          |
| Make-Up Loss                     | --     | 4.81   | --  | 3.50   | in.      |
| Minimum Make-Up Torque           | --     | --     | --  | 3,150  | ft-lbs   |
| Maximum Make-Up Torque           | --     | --     | --  | 5,250  | ft-lbs   |



# Exhibit 1

## EOG Resources

### 13-5/8" 10M PSI BOP Stack

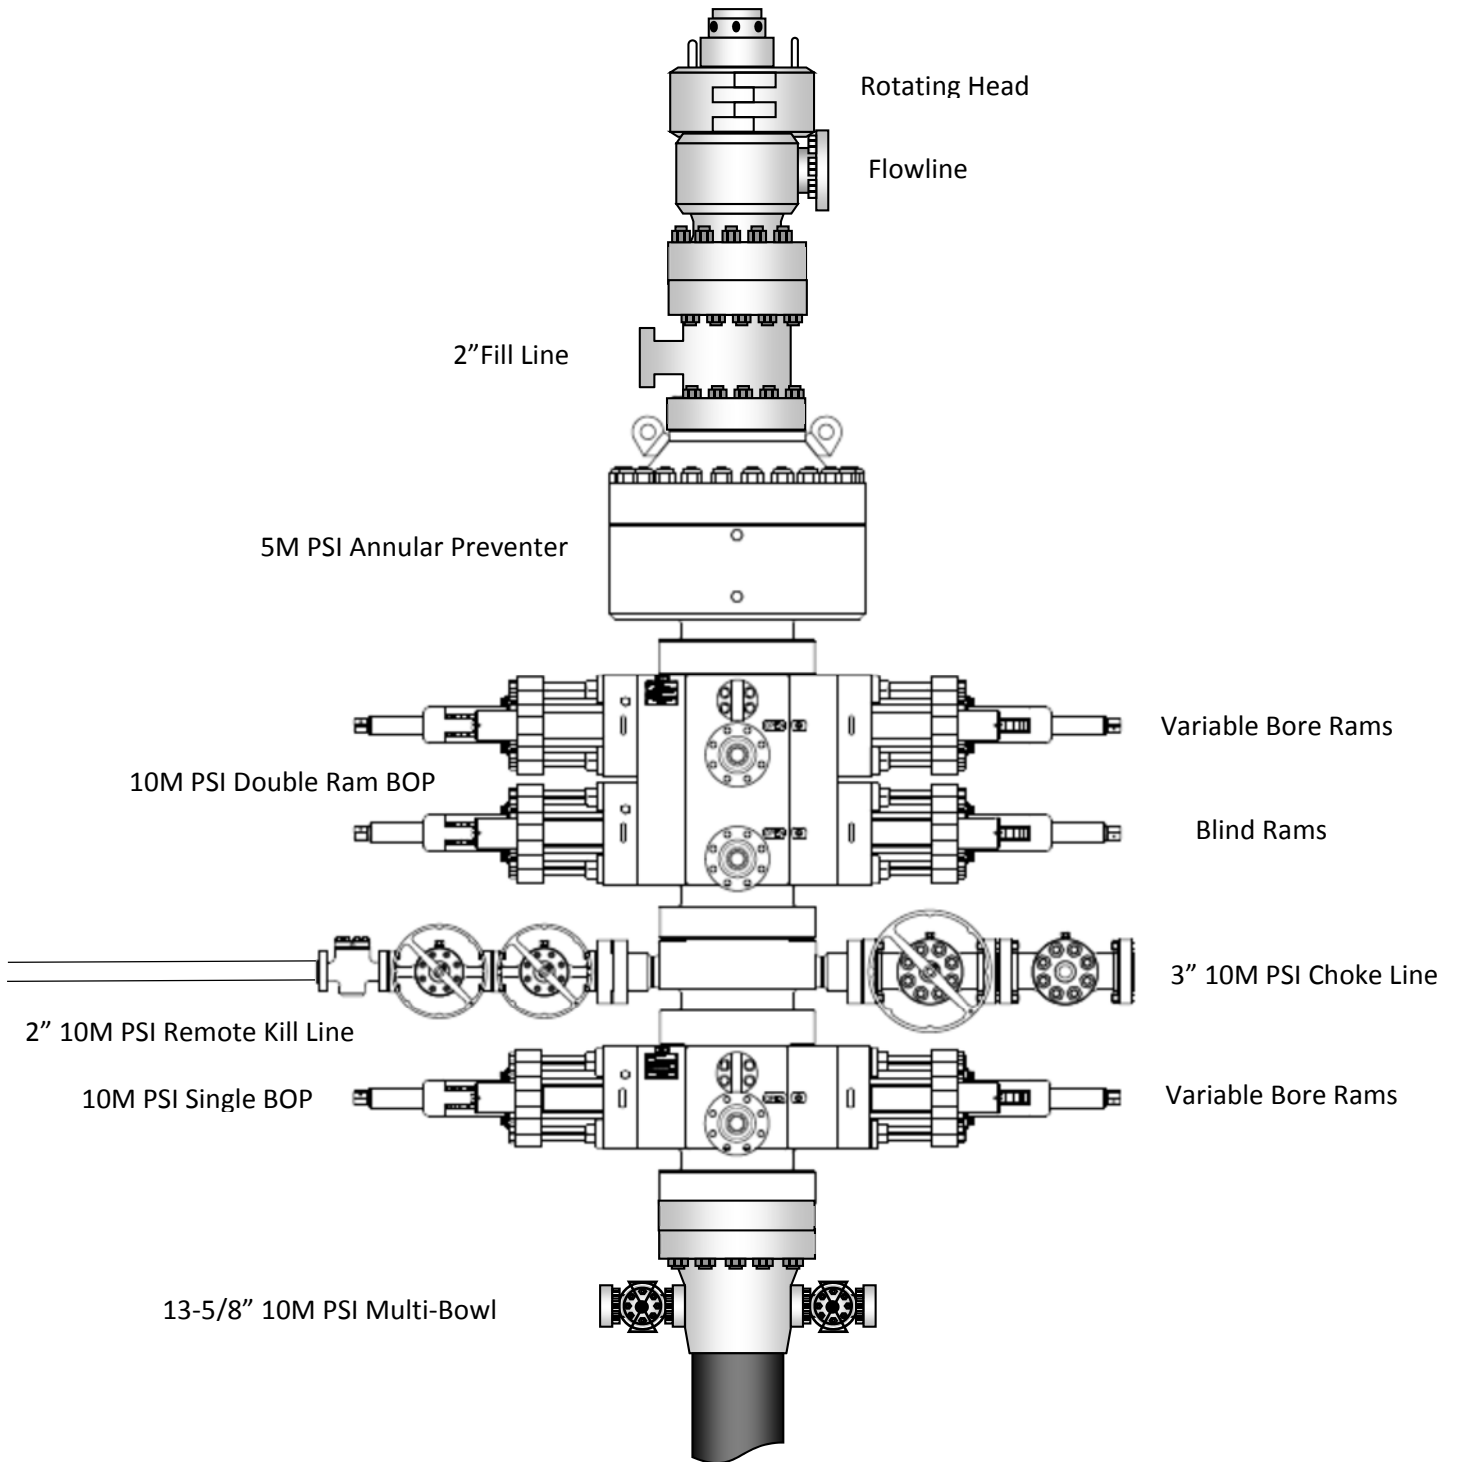





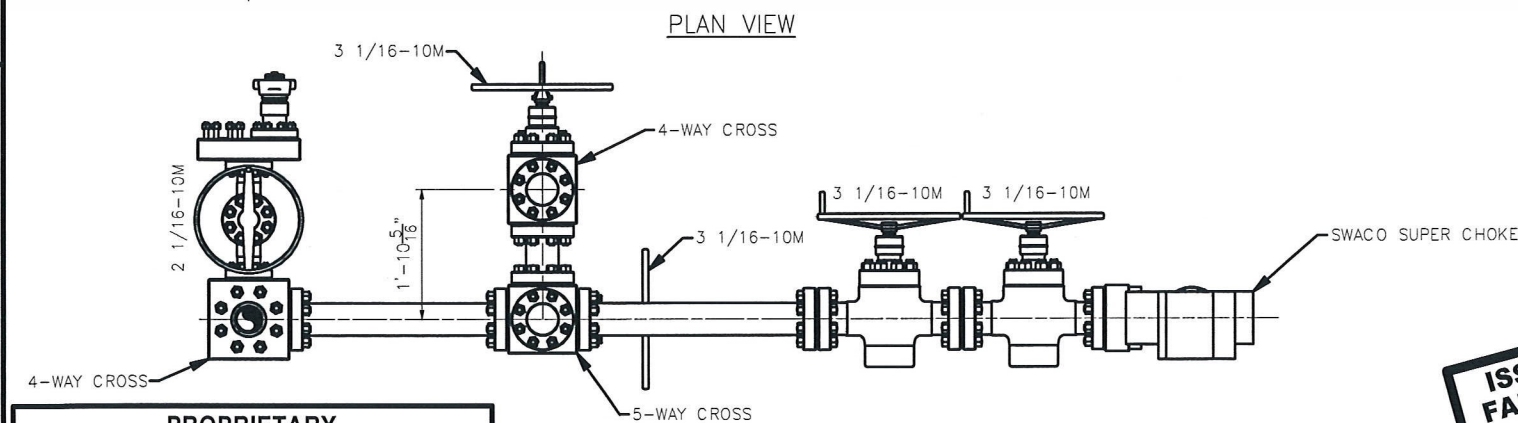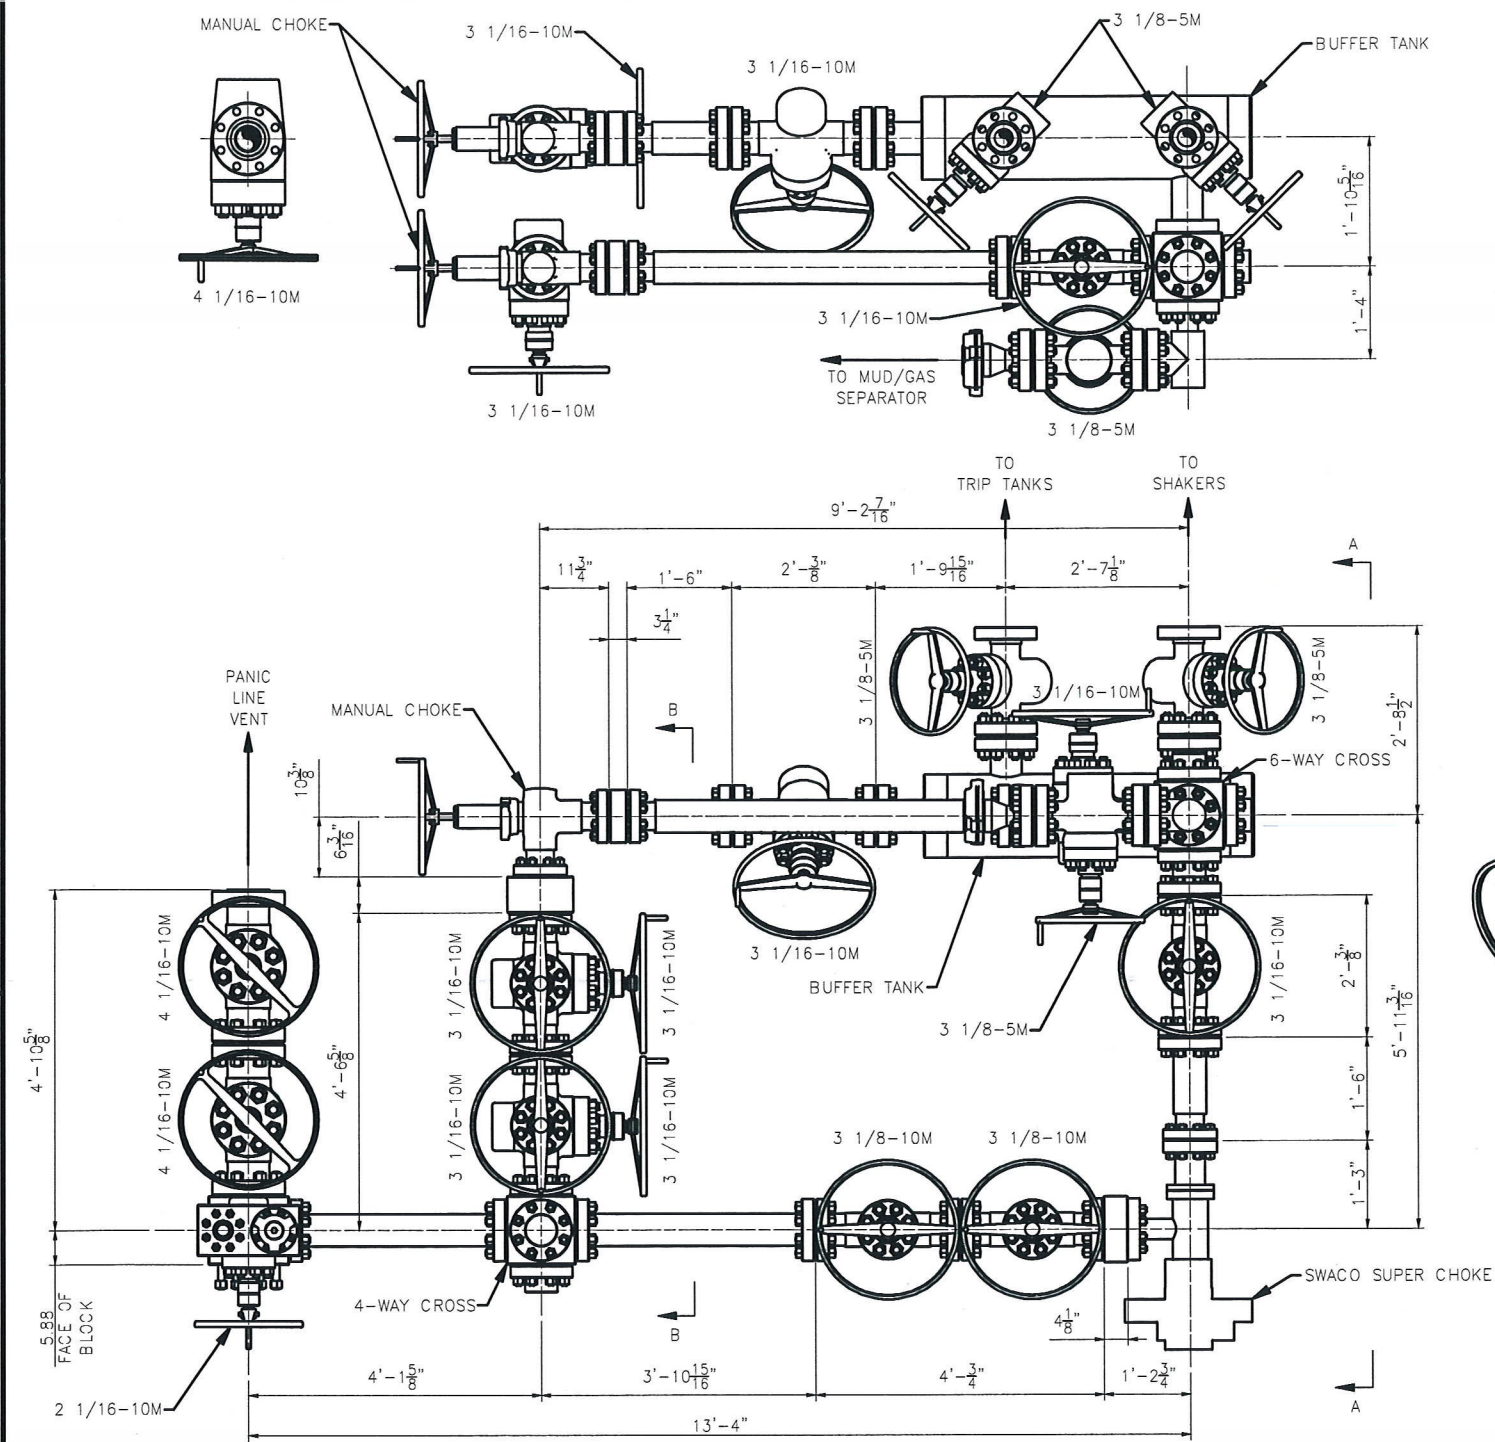

**PROPRIETARY**

THIS DRAWING AND THE IDEAS AND INFORMATION INCLUDED IN THIS DRAWING ARE PROPRIETARY AND ARE NOT TO BE REPRODUCED, DISTRIBUTED OR DISCLOSED IN ANY MANNER, WITHOUT THE PRIOR, WRITTEN CONSENT OF A DULY AUTHORIZED OFFICER OF HELMERICH & PAYNE INT'L DRILLING CO.

**ISSUED FOR FABRICATION**  
February-10-2014  
DRAFTSMAN *MWL*  
ENGINEER *ELC*

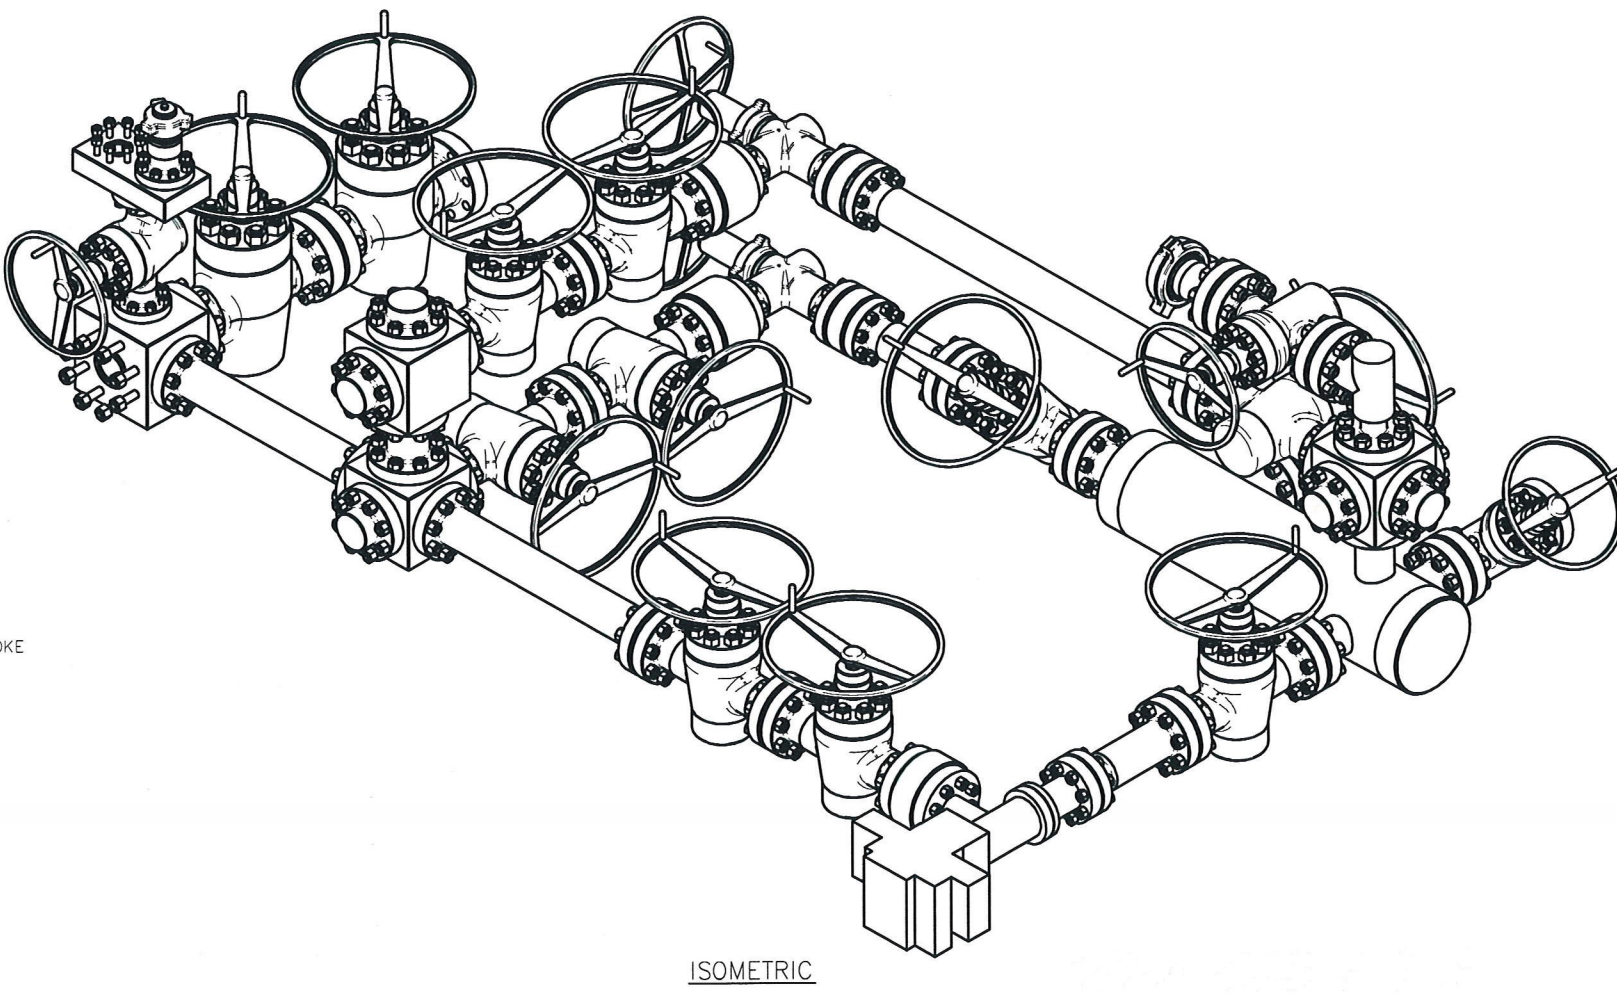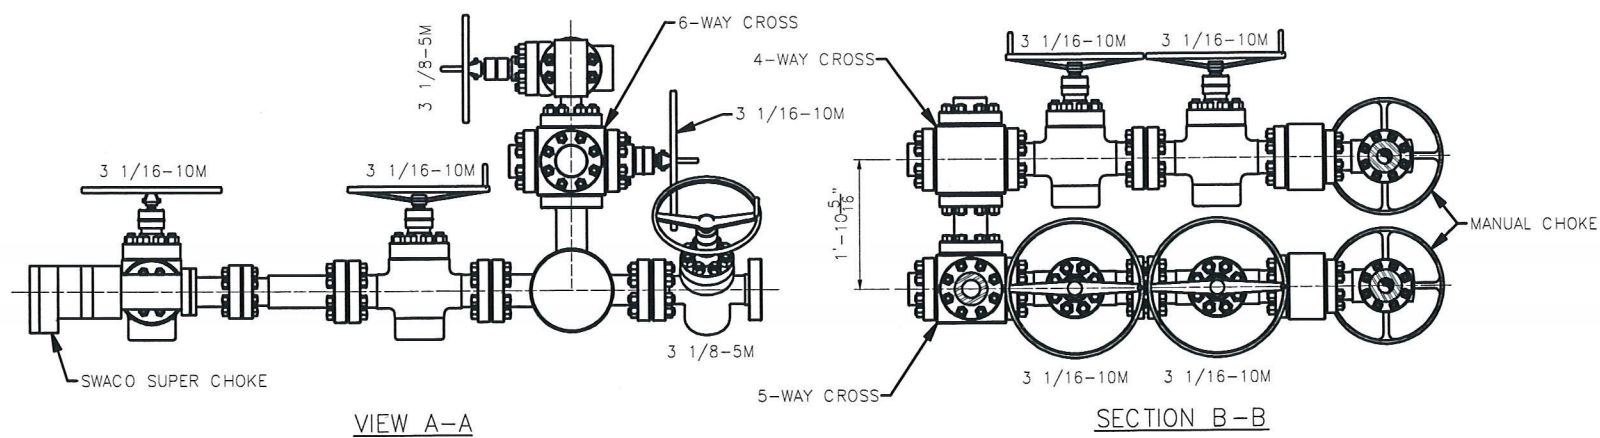





## API 5CT, 10th Ed. Connection Data Sheet

| O.D. (in) | WEIGHT (lb/ft)                     | WALL (in) | GRADE | *API DRIFT (in) | RBW % |
|-----------|------------------------------------|-----------|-------|-----------------|-------|
| 8.625     | Nominal: 32.00<br>Plain End: 31.13 | 0.352     | J55   | 7.796           | 87.5  |

## Material Properties (PE)

| Pipe                      |        |
|---------------------------|--------|
| Minimum Yield Strength:   | 55 ksi |
| Maximum Yield Strength:   | 80 ksi |
| Minimum Tensile Strength: | 75 ksi |
| Coupling                  |        |
| Minimum Yield Strength:   | 55 ksi |
| Maximum Yield Strength:   | 80 ksi |
| Minimum Tensile Strength: | 75 ksi |

## Pipe Body Data (PE)

| Geometry                                     |                       |
|----------------------------------------------|-----------------------|
| Nominal ID:                                  | 7.92 inch             |
| Nominal Area:                                | 9.149 in <sup>2</sup> |
| *Special/Alt. Drift:                         | 7.875 inch            |
| Performance                                  |                       |
| Pipe Body Yield Strength:                    | 503 kips              |
| Collapse Resistance:                         | 2,530 psi             |
| Internal Yield Pressure:<br>(API Historical) | 3,930 psi             |

## API Connection Data

Coupling OD: 9.625"

| STC Performance                       |           |
|---------------------------------------|-----------|
| STC Internal Pressure:                | 3,930 psi |
| STC Joint Strength:                   | 372 kips  |
| LTC Performance                       |           |
| LTC Internal Pressure:                | 3,930 psi |
| LTC Joint Strength:                   | 417 kips  |
| SC-BTC Performance - Cplg OD = 9.125" |           |
| BTC Internal Pressure:                | 3,930 psi |
| BTC Joint Strength:                   | 503 kips  |

## API Connection Torque

| STC Torque (ft-lbs)                                |       |       |       |
|----------------------------------------------------|-------|-------|-------|
| Min:                                               | 2,793 | Opti: | 3,724 |
|                                                    |       | Max:  | 4,655 |
| LTC Torque (ft-lbs)                                |       |       |       |
| Min:                                               | 3,130 | Opti: | 4,174 |
|                                                    |       | Max:  | 5,217 |
| BTC Torque (ft-lbs)                                |       |       |       |
| follow API guidelines regarding positional make up |       |       |       |

\*Alt. Drift will be used unless API Drift is specified on order.

\*\*If above API connections do not suit your needs, VAM® premium connections are available up to 100% of pipe body ratings.

ALL INFORMATION IS PROVIDED BY VALLOUREC OR ITS AFFILIATES AT USER'S SOLE RISK, WITHOUT LIABILITY FOR LOSS, DAMAGE OR INJURY RESULTING FROM THE USE THEREOF; AND ON AN "AS IS" BASIS WITHOUT WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR PURPOSE, ACCURACY OR COMPLETENESS. THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED FOR INFORMATIONAL PURPOSES ONLY AND IS BASED ON ESTIMATES THAT HAVE NOT BEEN VERIFIED OR TESTED. IN NO EVENT SHALL VALLOUREC OR ITS AFFILIATES BE RESPONSIBLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, EXEMPLARY OR CONSEQUENTIAL LOSS OR DAMAGE (INCLUDING WITHOUT LIMITATION, LOSS OF USE, LOSS OF BARGAIN, LOSS OF REVENUE, PROFIT OR ANTICIPATED PROFIT) HOWEVER CAUSED OR ARISING, AND WHETHER SUCH LOSSES OR DAMAGES WERE FORESEEABLE OR VALLOUREC OR ITS AFFILIATES WERE ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Rev 3, 7/30/2021

10/21/2022 15:24

VALLOUREC STAR 8.625 32# J55 S S2L2 DA 7.875 W/O# SLN# PO# MADE IN USA FT LB

VALLOUREC STAR 8.625 32# P110EC S S2L2 DA 7.875 W/O# SLN# PO# MADE IN USA FT LB



## API 5CT, 10th Ed. Connection Data Sheet

| O.D. (in) | WEIGHT (lb/ft)                     | WALL (in) | GRADE  | *API DRIFT (in) | RBW % |
|-----------|------------------------------------|-----------|--------|-----------------|-------|
| 8.625     | Nominal: 32.00<br>Plain End: 31.13 | 0.352     | P110EC | 7.796           | 87.5  |

## Material Properties (PE)

## Pipe

|                           |         |
|---------------------------|---------|
| Minimum Yield Strength:   | 125 ksi |
| Maximum Yield Strength:   | 140 ksi |
| Minimum Tensile Strength: | 135 ksi |

## Coupling

|                           |         |
|---------------------------|---------|
| Minimum Yield Strength:   | 125 ksi |
| Maximum Yield Strength:   | 140 ksi |
| Minimum Tensile Strength: | 135 ksi |

## Pipe Body Data (PE)

## Geometry

|                      |                       |
|----------------------|-----------------------|
| Nominal ID:          | 7.92 inch             |
| Nominal Area:        | 9.149 in <sup>2</sup> |
| *Special/Alt. Drift: | 7.875 inch            |

## Performance

|                                              |            |
|----------------------------------------------|------------|
| Pipe Body Yield Strength:                    | 1,144 kips |
| Collapse Resistance:                         | 4,000 psi  |
| Internal Yield Pressure:<br>(API Historical) | 8,930 psi  |

**THIS SIZE/GRADE IS NOT VALIDATED BY API TO HAVE AN API CONNECTION**

## API Connection Data

Coupling OD: 9.625"

## STC Performance

|                        |           |
|------------------------|-----------|
| STC Internal Pressure: | 8,930 psi |
| STC Joint Strength:    | 793 kips  |

## LTC Performance

|                        |           |
|------------------------|-----------|
| LTC Internal Pressure: | 8,930 psi |
| LTC Joint Strength:    | 887 kips  |

## SC-BTC Performance - Cplg OD = 9.125"

|                        |            |
|------------------------|------------|
| BTC Internal Pressure: | 6,340 psi  |
| BTC Joint Strength:    | 1,120 kips |

## API Connection Torque

## STC Torque (ft-lbs)

|      |       |       |       |      |       |
|------|-------|-------|-------|------|-------|
| Min: | 5,948 | Opti: | 7,930 | Max: | 9,913 |
|------|-------|-------|-------|------|-------|

## LTC Torque (ft-lbs)

|      |       |       |       |      |        |
|------|-------|-------|-------|------|--------|
| Min: | 6,653 | Opti: | 8,870 | Max: | 11,088 |
|------|-------|-------|-------|------|--------|

## BTC Torque (ft-lbs)

follow API guidelines regarding positional make up

\*Alt. Drift will be used unless API Drift is specified on order.


\*\*If above API connections do not suit your needs, VAM® premium connections are available up to 100% of pipe body ratings.


ALL INFORMATION IS PROVIDED BY VALLOUREC OR ITS AFFILIATES AT USER'S SOLE RISK, WITHOUT LIABILITY FOR LOSS, DAMAGE OR INJURY RESULTING FROM THE USE THEREOF; AND ON AN "AS IS" BASIS WITHOUT WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR PURPOSE, ACCURACY OR COMPLETENESS. THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED FOR INFORMATIONAL PURPOSES ONLY AND IS BASED ON ESTIMATES THAT HAVE NOT BEEN VERIFIED OR TESTED. IN NO EVENT SHALL VALLOUREC OR ITS AFFILIATES BE RESPONSIBLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, EXEMPLARY OR CONSEQUENTIAL LOSS OR DAMAGE (INCLUDING WITHOUT LIMITATION, LOSS OF USE, LOSS OF BARGAIN, LOSS OF REVENUE, PROFIT OR ANTICIPATED PROFIT) HOWEVER CAUSED OR ARISING, AND WHETHER SUCH LOSSES OR DAMAGES WERE FORESEEABLE OR VALLOUREC OR ITS AFFILIATES WERE ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Rev 3, 7/30/2021


10/26/2022 14:52



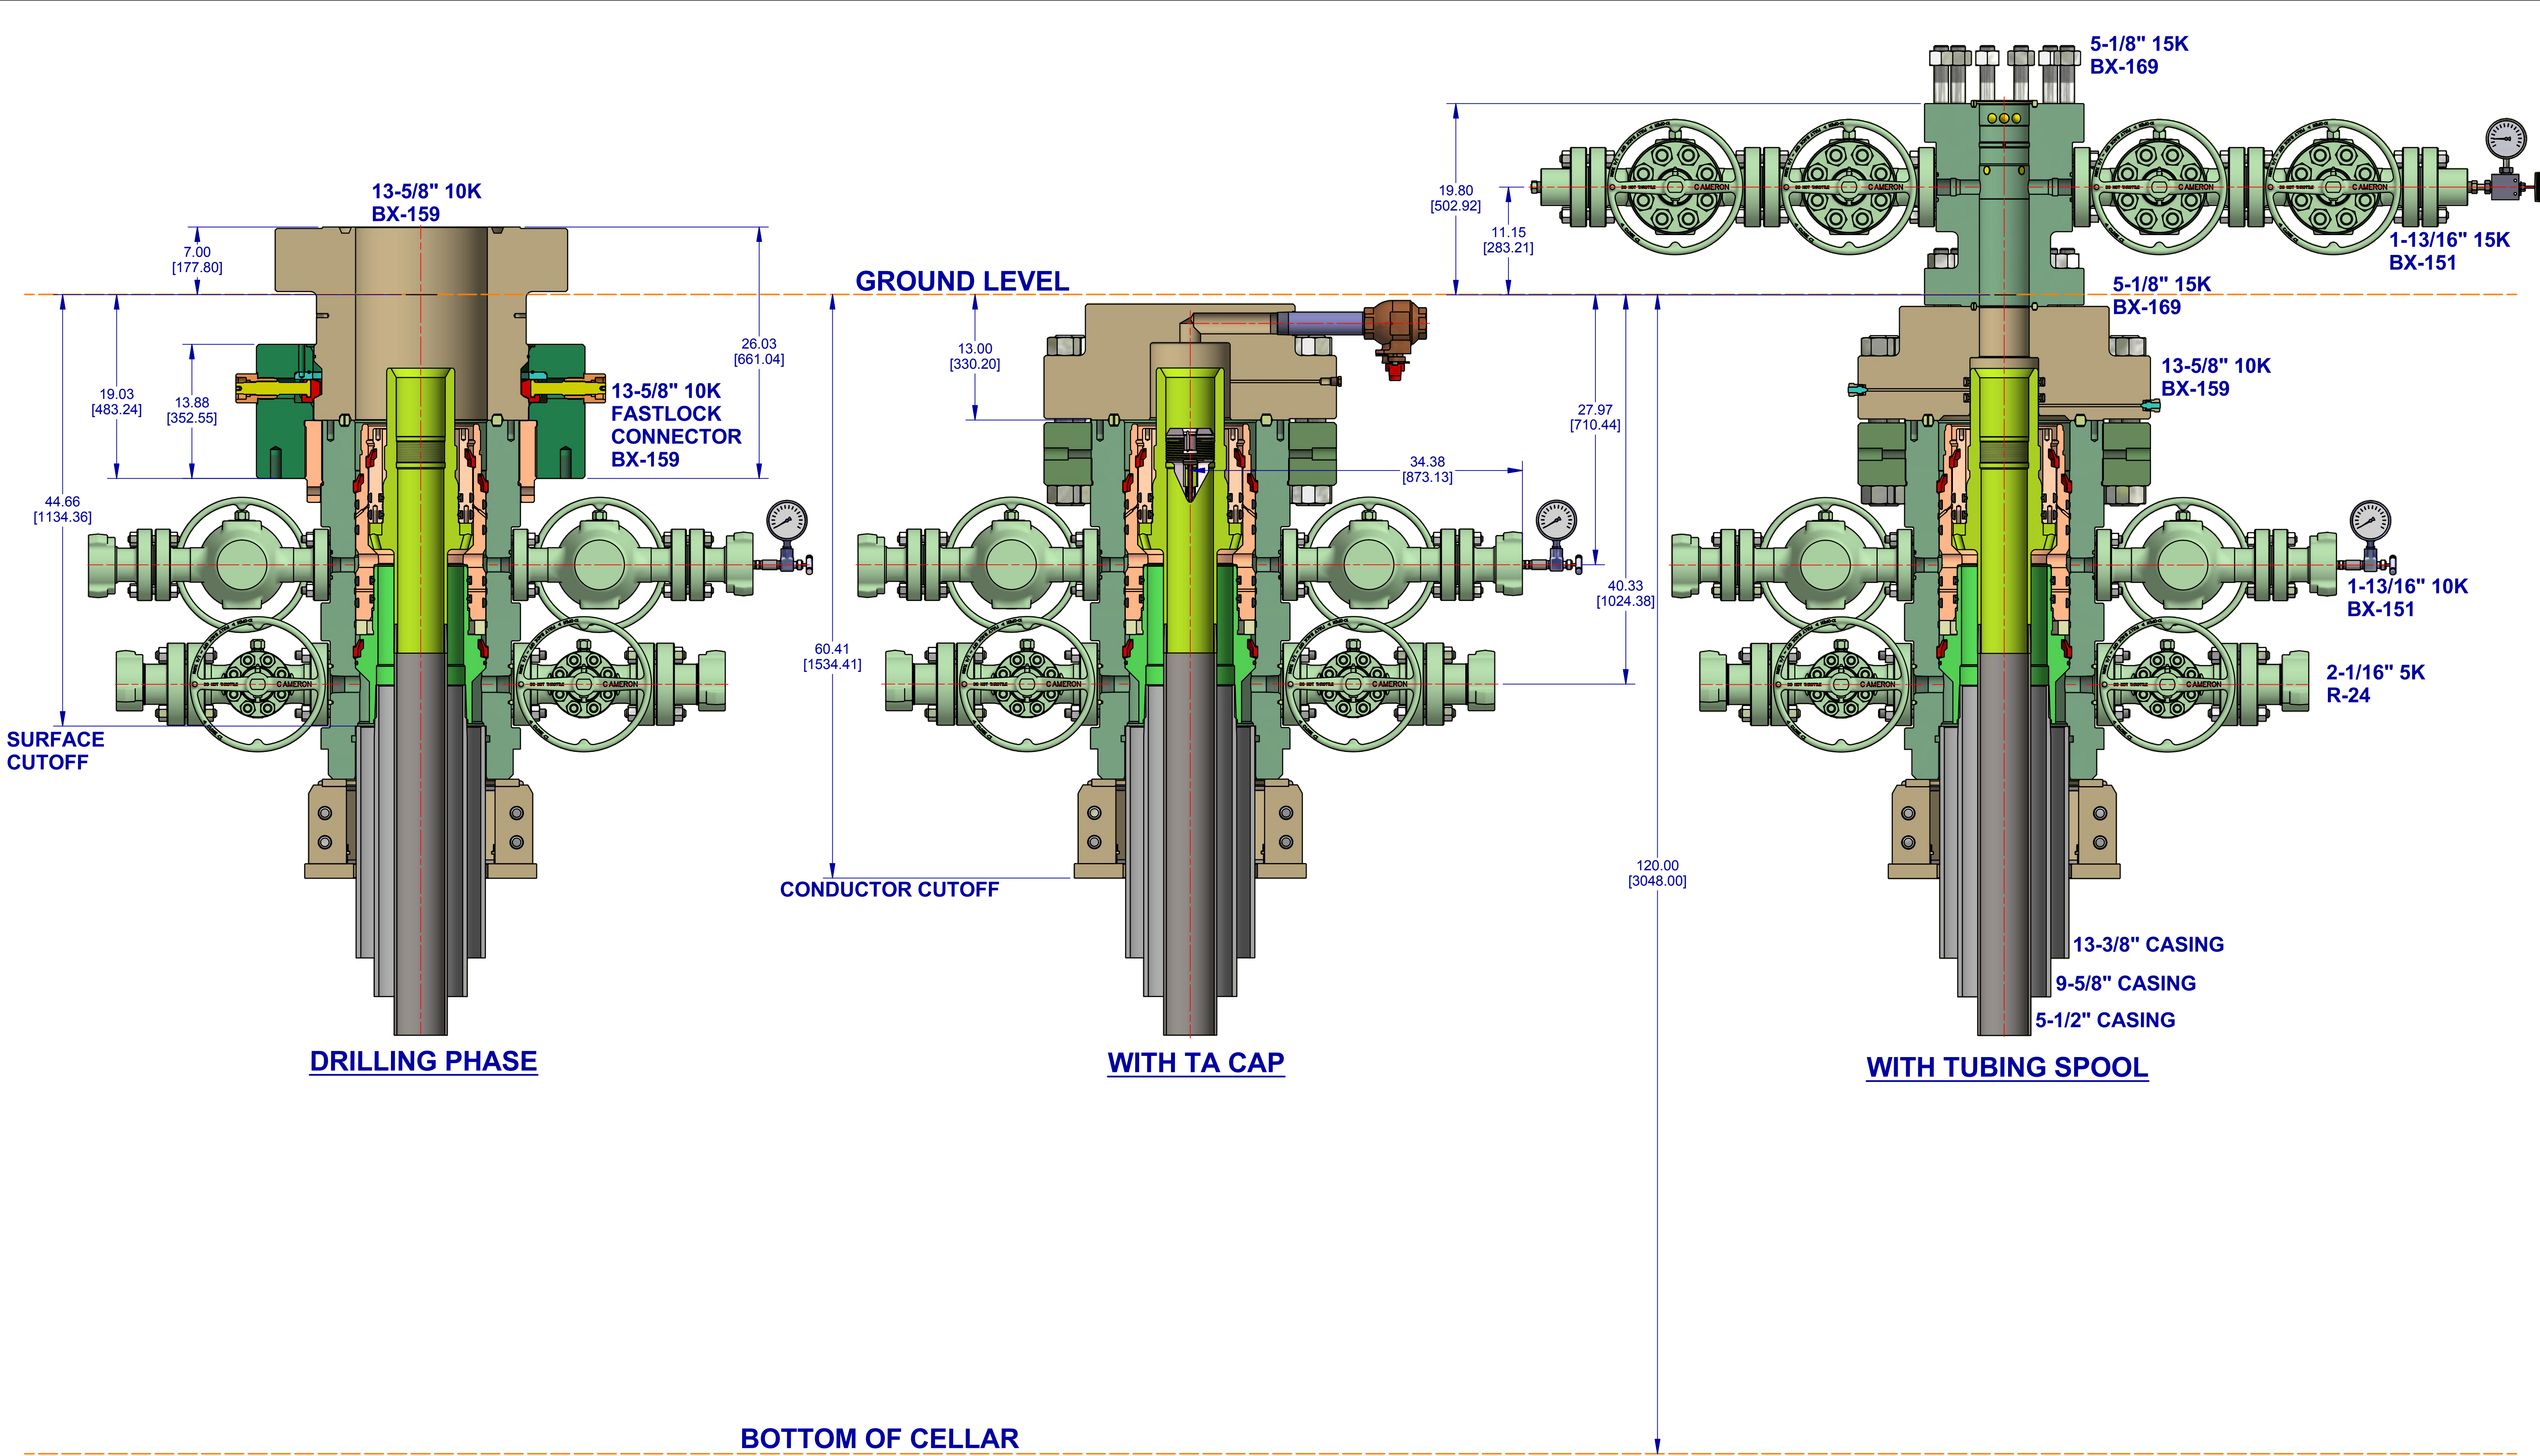

|                                                                                                      |                                                                                                                                                                                                                                                                                                                   |  |                                                                                             |  |                          |  |                                                  |  |                                                                                                                                |                 |
|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------|--|--------------------------|--|--------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------|-----------------|
| CONFIDENTIAL                                                                                         |                                                                                                                                                                                                                                                                                                                   |  |                                                                                             |  |                          |  |                                                  |  |                                                                                                                                |                 |
| <br>THIRD ANGLE | DESIGNED IN INCHES                                                                                                                                                                                                                                                                                                |  | MACHINING TOLERANCES UNLESS OTHERWISE SPECIFIED                                             |  | SURFACE TREATMENT        |  | DO NOT SCALE                                     |  |  <b>CAMERON</b><br>A Schlumberger Company | SURFACE SYSTEMS |
|                                                                                                      | DIMENSIONAL UNITS                                                                                                                                                                                                                                                                                                 |  |                                                                                             |  | MATERIAL & HEAT TREAT    |  | DRAWN BY:<br><b>KEN REED</b>                     |  |                                                                                                                                |                 |
|                                                                                                      | INCHES [MILLIMETERS]                                                                                                                                                                                                                                                                                              |  | X [D.] ± = [ ]                                                                              |  | CHECKED BY:<br><b>PA</b> |  | DATE<br><b>6 Nov 18</b>                          |  |                                                                                                                                |                 |
|                                                                                                      | ANGLES ± °                                                                                                                                                                                                                                                                                                        |  | APPROVED BY:<br><b>APPROVER NAME</b>                                                        |  | DATE<br><b>6 Nov 18</b>  |  | EOG RESOURCES, INC<br>13-5/8" 10K MN-DS WELLHEAD |  |                                                                                                                                |                 |
|                                                                                                      | RA ON ALL MACHINED SURFACES                                                                                                                                                                                                                                                                                       |  | ESTIMATED WEIGHT:<br><b>8147.2 LBS</b> [INITIAL USE BIM:<br><b>3895.5 KG</b> EWR:650353762] |  | SHEET<br><b>1 OF 1</b>   |  | 13-3/8" X 9-5/8" X 5-1/2"                        |  |                                                                                                                                |                 |
|                                                                                                      | MACHINED FILLET RADII .015-.050 [0.38-1.27]. BREAK ALL SHARP EDGES .01-.03 [0.2-0.8] RADII OR 45°. SURFACE FINISH IN MICRO (μ) INCHES (Ra). INTERPRET DRAWING PER ASME Y14.5, ASME Y14.36, AND AWS A2.4 STANDARDS. SEE BIM FOR MATERIAL AND SPECIAL REQUIREMENTS. ITEM NUMBERS NOT APPEARING ON BIM DO NOT APPLY. |  |                                                                                             |  |                          |  | REV:<br><b>01</b>                                |  |                                                                                                                                |                 |
|                                                                                                      |                                                                                                                                                                                                                                                                                                                   |  |                                                                                             |  |                          |  | SD-052491-19-07                                  |  |                                                                                                                                |                 |
| INVENTOR: _____                                                                                      |                                                                                                                                                                                                                                                                                                                   |  |                                                                                             |  |                          |  |                                                  |  |                                                                                                                                |                 |



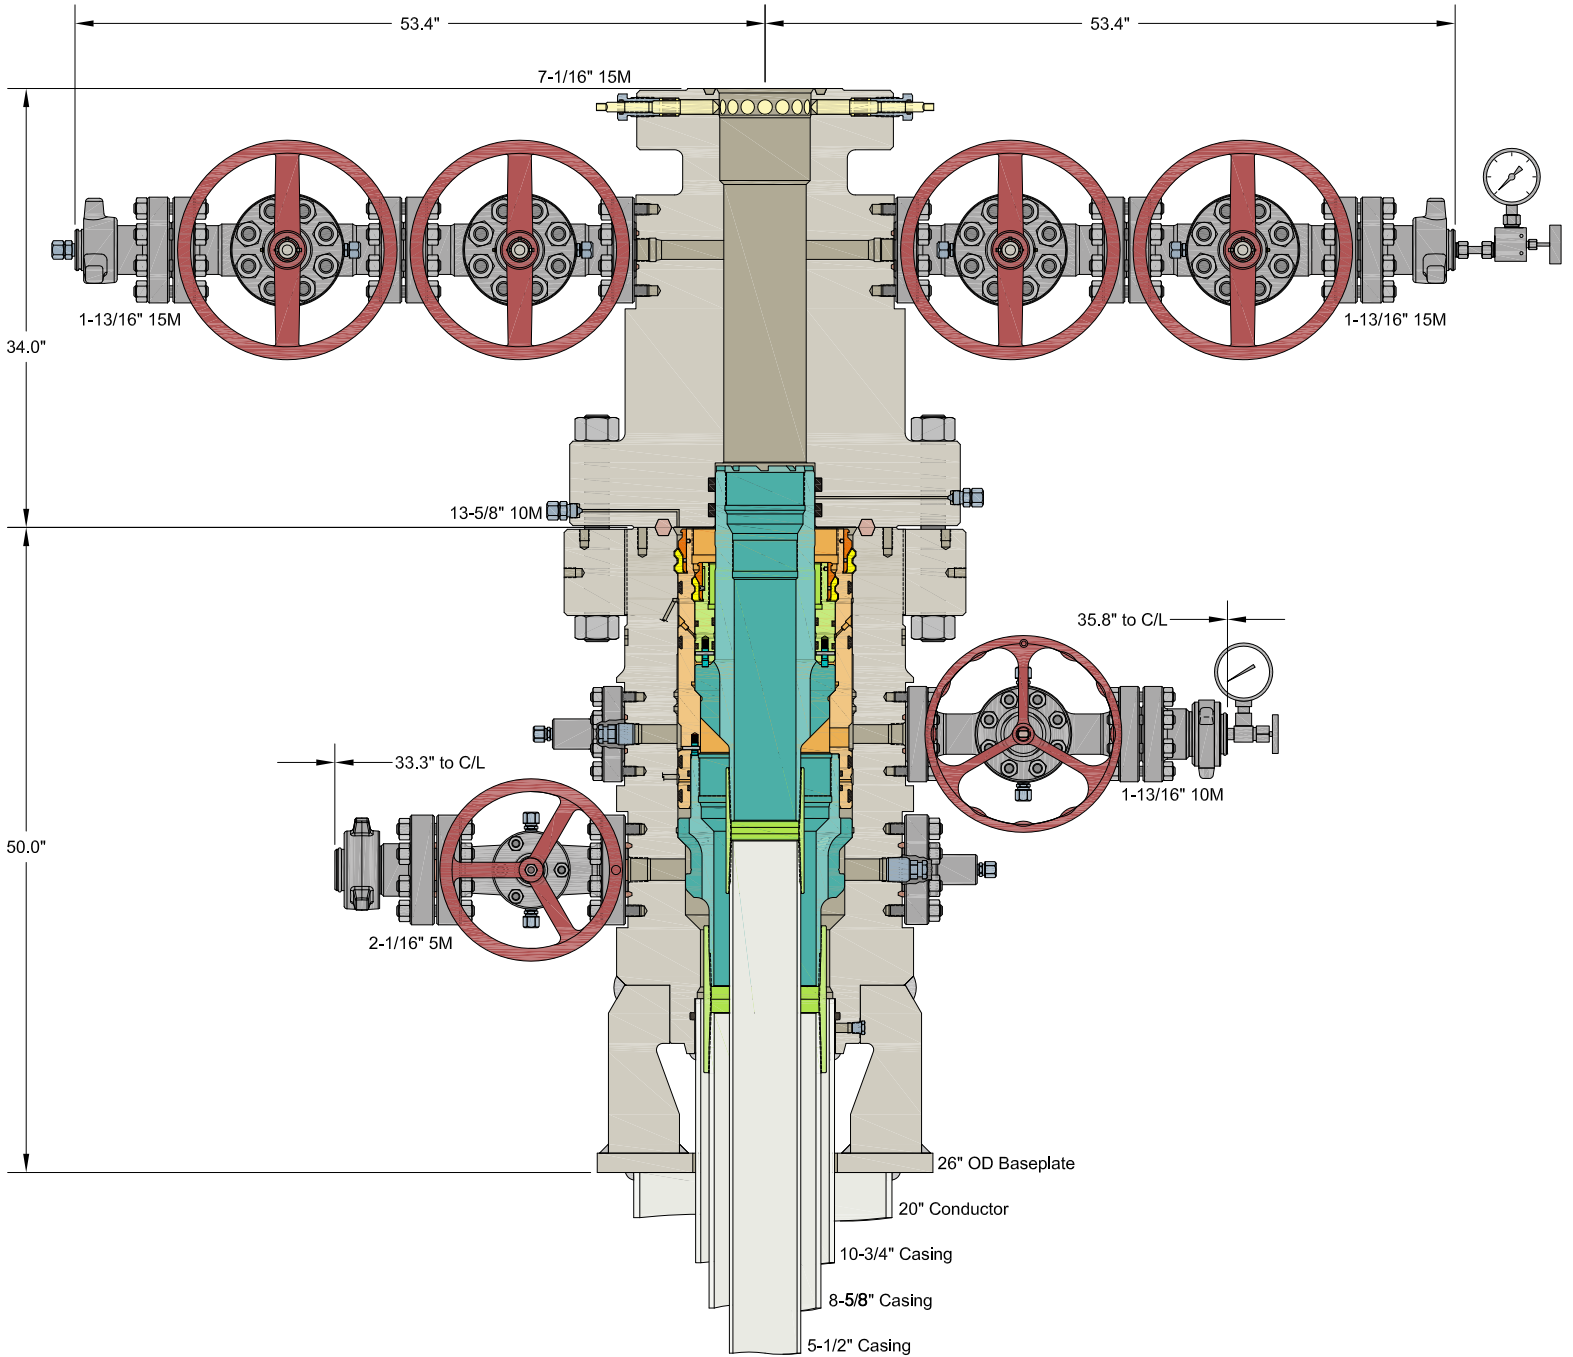

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

ALL DIMENSIONS APPROXIMATE

CACTUS WELLHEAD LLC

EOG RESOURCES


10-3/4" x 8-5/8" x 5-1/2" MBU-3T-SF-SOW Wellhead System  
With 8-5/8" & 5-1/2" Pin Bottom Mandrel Casing Hangers  
And 13-5/8" 10M x 7-1/16" 15M CTH-DBLHPS Tubing Head

|             |          |         |
|-------------|----------|---------|
| DRAWN       | DLE      | 14APR21 |
| APPRV       |          |         |
| DRAWING NO. | SDT-3141 |         |



# Exhibit 1

## EOG Resources

### 13-5/8" 10M PSI BOP Stack

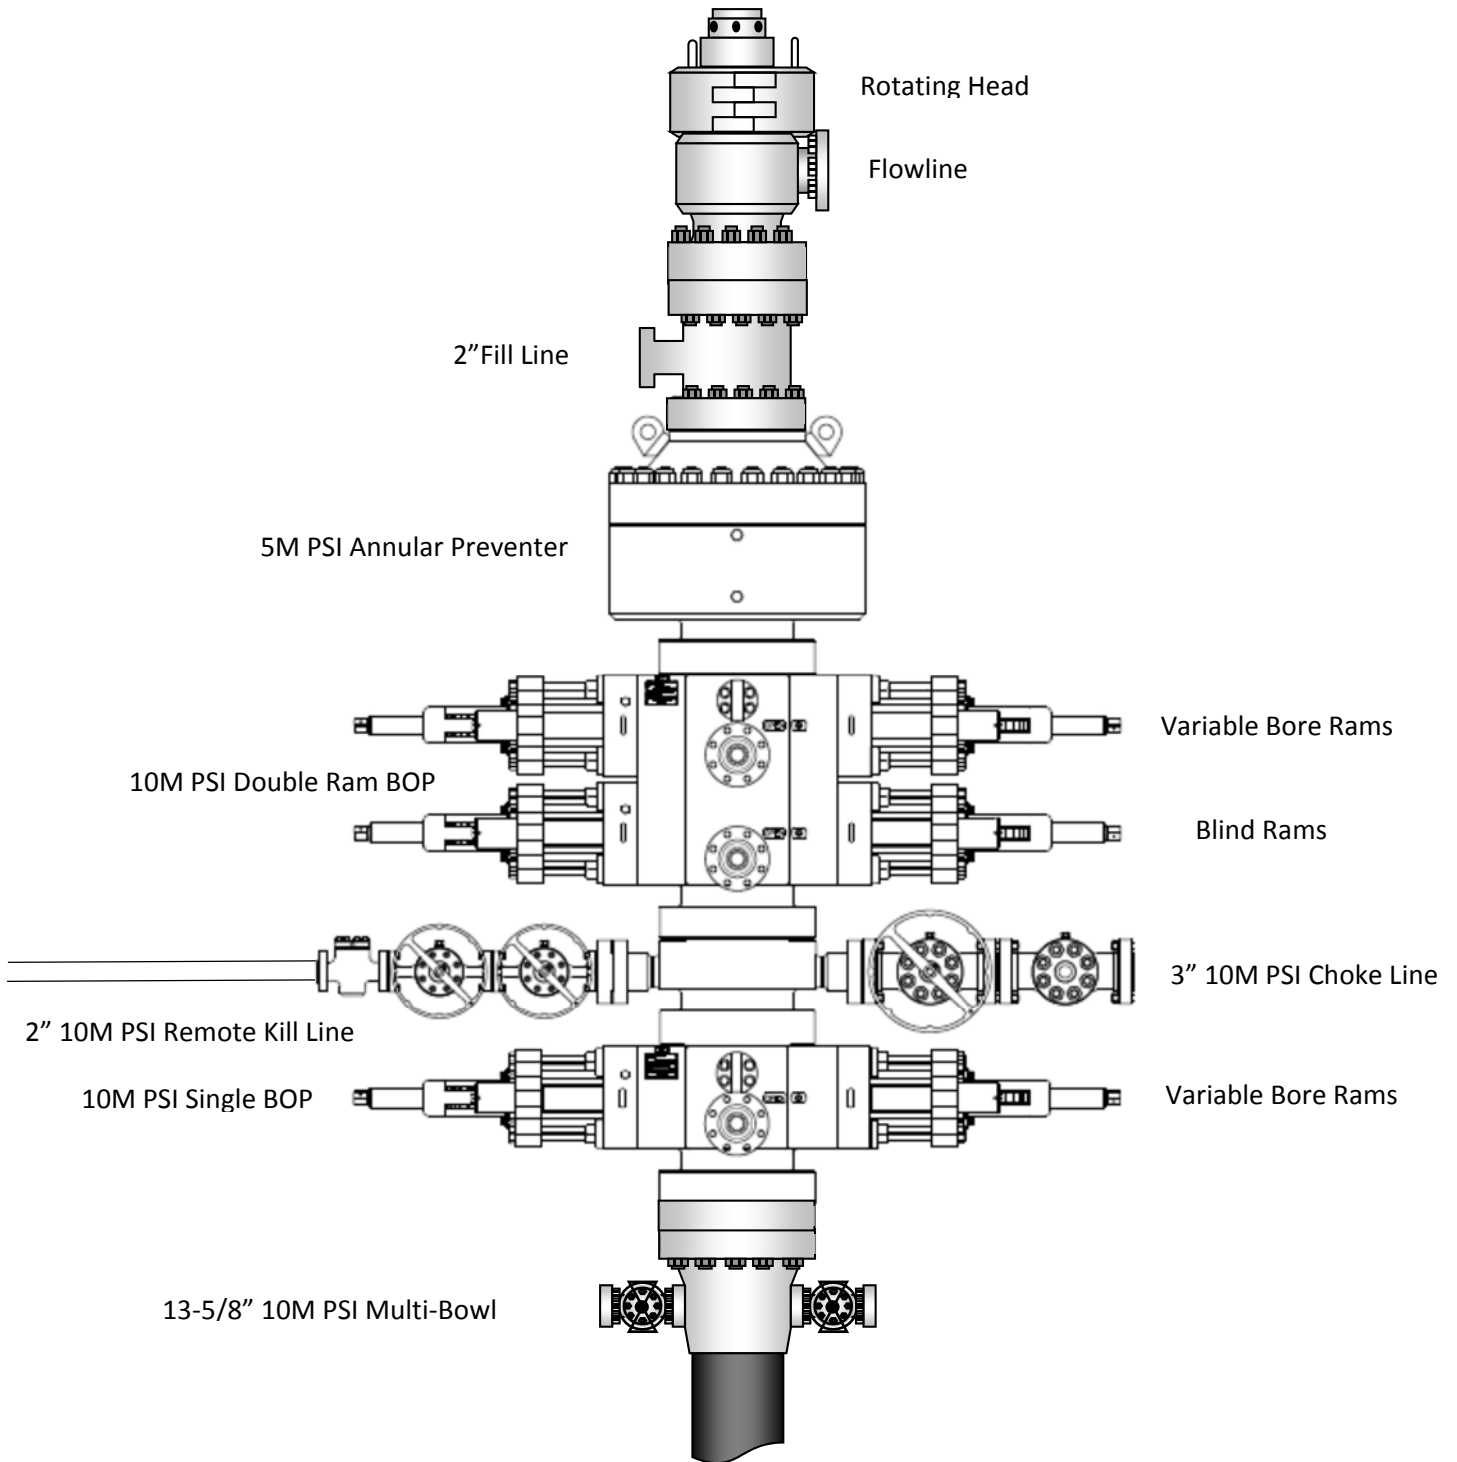





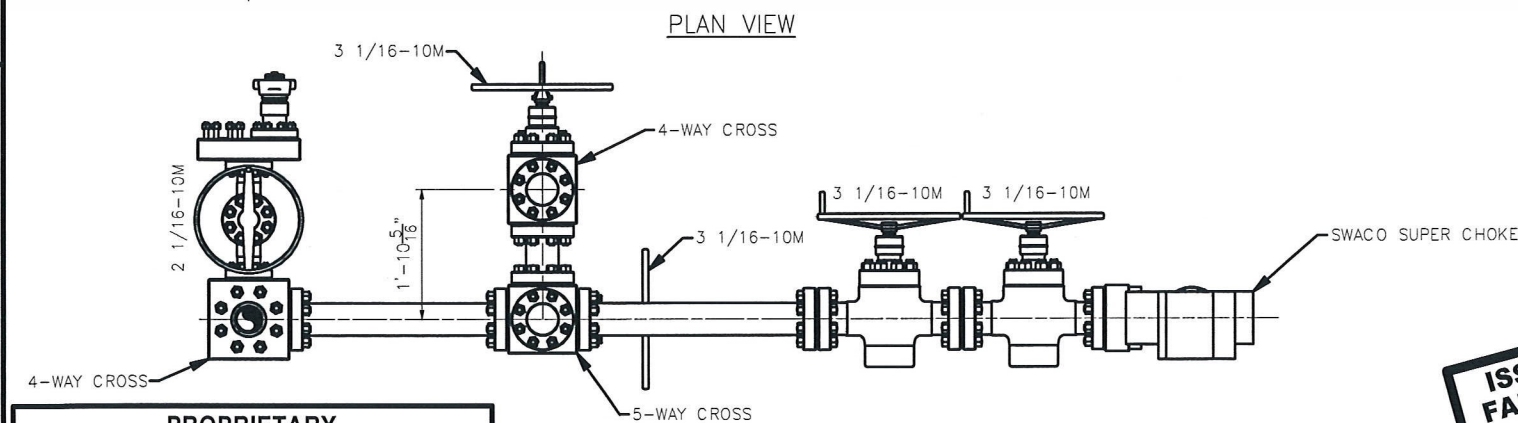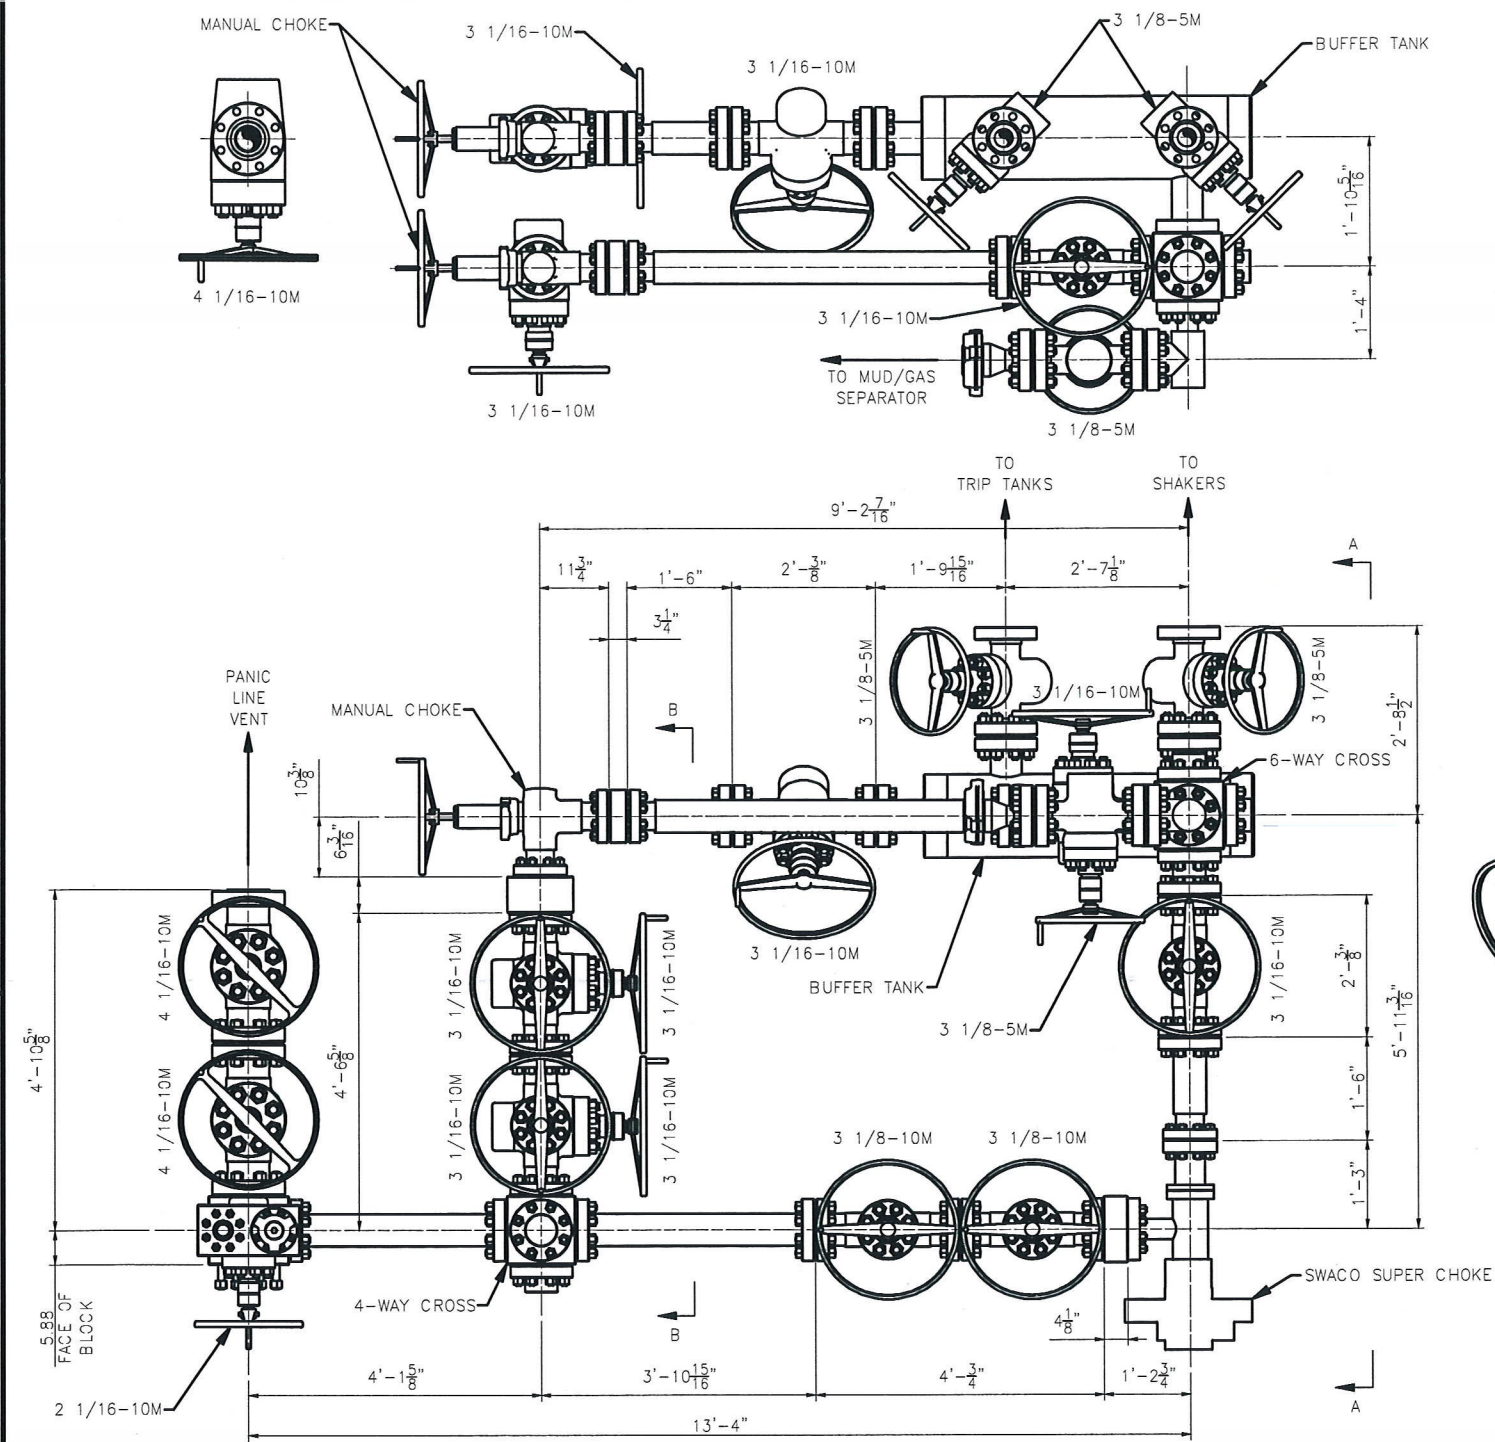

**PROPRIETARY**

THIS DRAWING AND THE IDEAS AND INFORMATION INCLUDED IN THIS DRAWING ARE PROPRIETARY AND ARE NOT TO BE REPRODUCED, DISTRIBUTED OR DISCLOSED IN ANY MANNER, WITHOUT THE PRIOR, WRITTEN CONSENT OF A DULY AUTHORIZED OFFICER OF HELMERICH & PAYNE INT'L DRILLING CO.

**ISSUED FOR FABRICATION**  
February-10-2014  
DRAFTSMAN *MWL*  
ENGINEER *ELC*

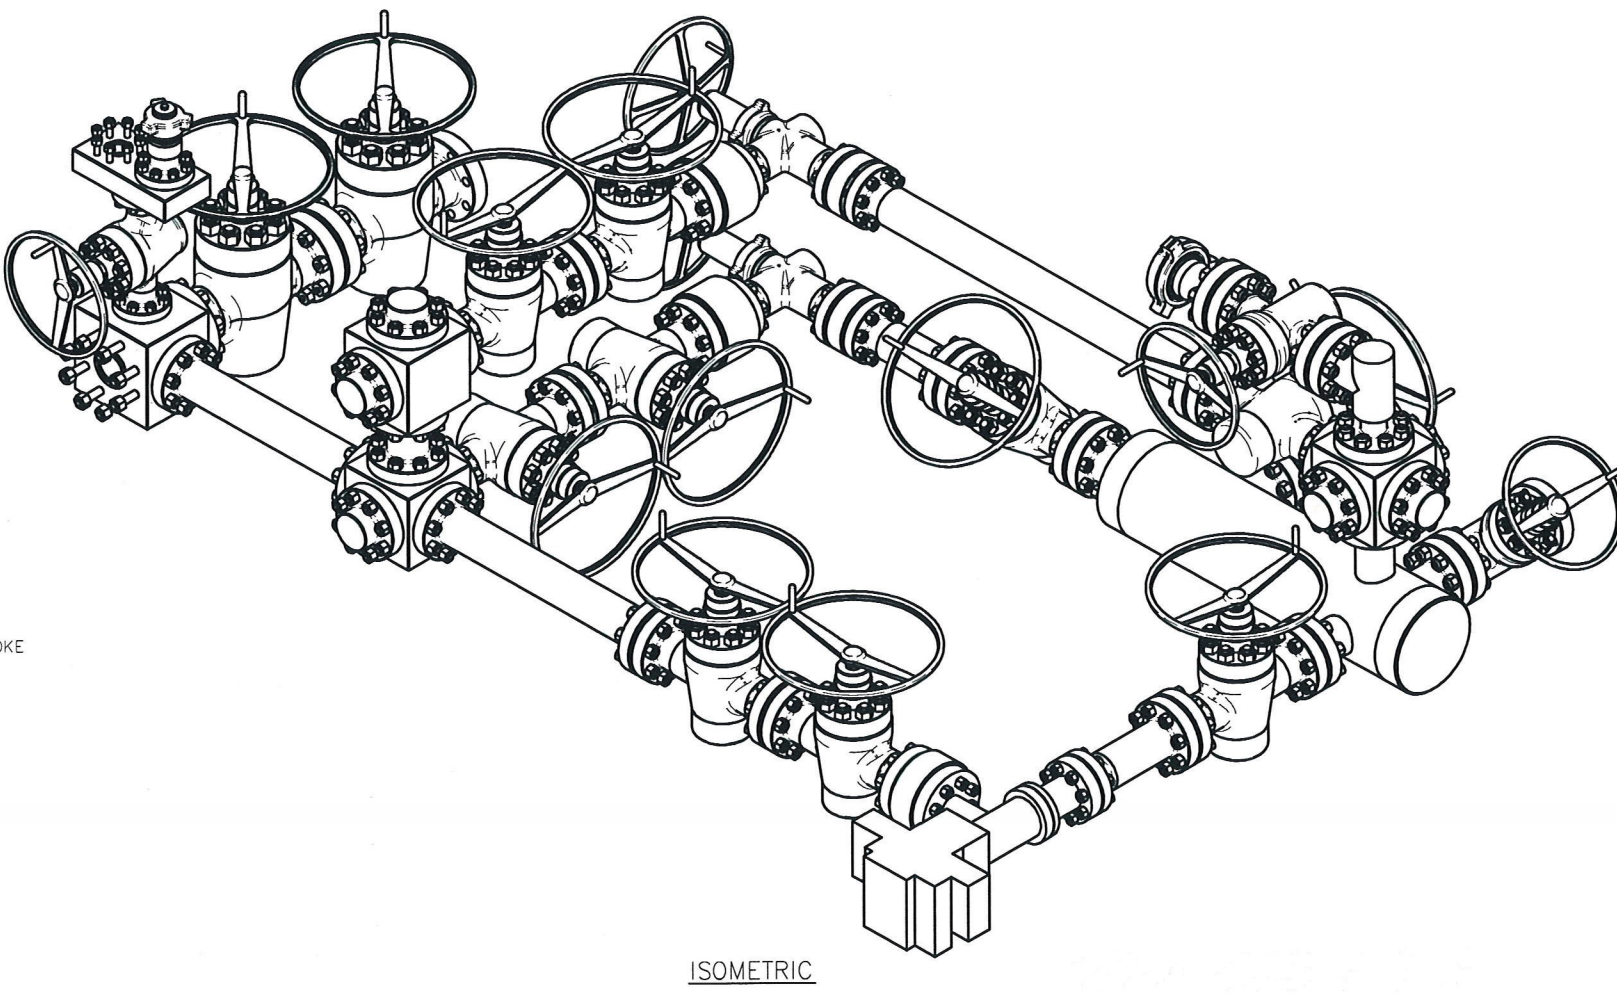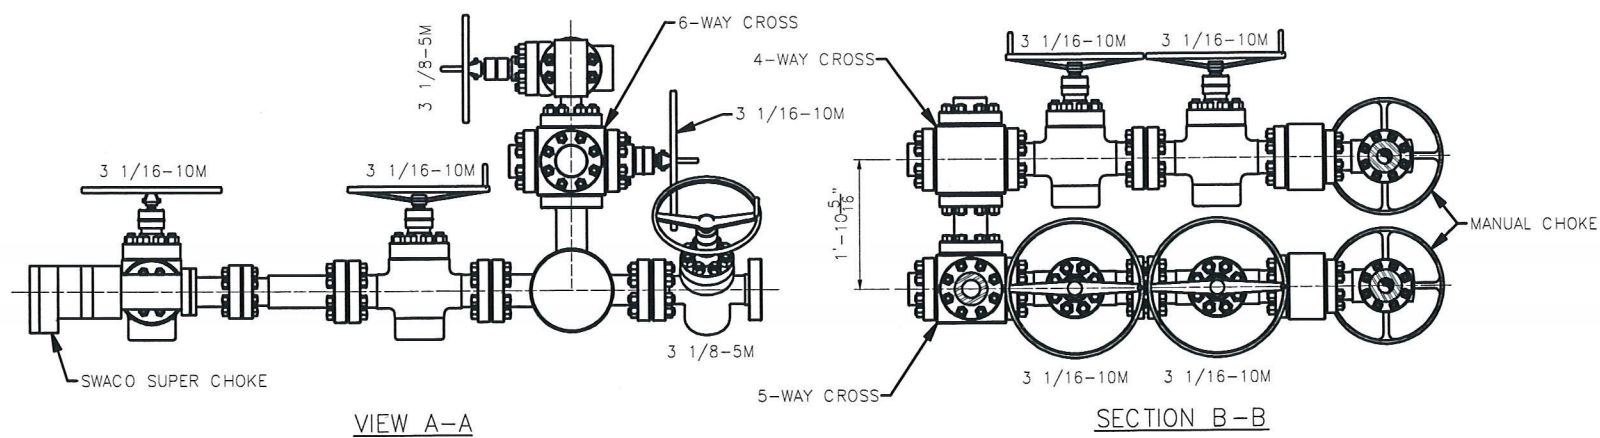

| STANDARD TOLERANCES<br>(UNLESS NOTED) |                                        |         |  |
|---------------------------------------|----------------------------------------|---------|--|
| 1. FABRICATION DIMENSIONS:            | A-0" TO 24"                            | ± 1/16" |  |
|                                       | B-24" TO 120"                          | ± 1/8"  |  |
|                                       | C-OVER 120"                            | ± 1/4"  |  |
| 2. MACHINED DIMENSIONS:               | A-ANGULAR                              | ± .30"  |  |
|                                       | B-LINEAR (EXPRESSED AS FRACTION)       | ± .015  |  |
|                                       | C-LINEAR (EXPRESSED TO ONE DECIMAL)    | ± .1    |  |
|                                       | D-LINEAR (EXPRESSED TO TWO DECIMALS)   | ± .015  |  |
|                                       | E-LINEAR (EXPRESSED TO THREE DECIMALS) | ± .005  |  |

|     |  |      |             |    |
|-----|--|------|-------------|----|
| REV |  | DATE | DESCRIPTION | BY |
|     |  |      |             |    |
|     |  |      |             |    |
|     |  |      |             |    |
|     |  |      |             |    |

|           |            |                                                 |           |           |
|-----------|------------|-------------------------------------------------|-----------|-----------|
| TITLE:    |            | HELMERICH & PAYNE<br>INTERNATIONAL DRILLING CO. |           |           |
| CUSTOMER: |            | H&P                                             |           |           |
| PROJECT:  |            | 3 CHOKE, 3 LEVEL, 10M<br>CHOKE MANIFOLD G.A.    |           |           |
| DRAWN:    | MWL        | DATE:                                           | 2/10/2014 | DWG. NO.: |
| SCALE:    | 3/4"=1'-0" | SHEET:                                          | 1 OF 1    | HP-D1254  |



## 10,000 PSI BOP Annular Variance Request (EOG Variance 1c)

EOG Resources request a variance to use a 5000 psi annular BOP with a 10,000 psi BOP stack. The component and compatibility tables along with the general well control plans demonstrate how the 5000 psi annular BOP will be protected from pressures that exceed its rated working pressure (RWP). The pressure at which the control of the wellbore is transferred from the annular preventer to another available preventer will not exceed 3500 psi (70% of the RWP of the 5000 psi annular BOP).

### 1. Component and Preventer Compatibility Tables


The tables below outlines the tubulars and the compatible preventers in use. This table, combined with the drilling fluid, documents that two barriers to flow will be maintained at all times.

| 12-1/4" Intermediate Hole Section<br>10M psi requirement |                  |                   |     |                                              |            |
|----------------------------------------------------------|------------------|-------------------|-----|----------------------------------------------|------------|
| Component                                                | OD               | Primary Preventer | RWP | Alternate Preventer(s)                       | RWP        |
| Drillpipe                                                | 5.000" or 4.500" | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| HWDP                                                     | 5.000" or 4.500" | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| Jars                                                     | 6.500"           | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| DCs and MWD tools                                        | 6.500" – 8.000"  | Annular           | 5M  | -                                            | -          |
| Mud Motor                                                | 8.000" – 9.625"  | Annular           | 5M  | -                                            | -          |
| 1 <sup>st</sup> Intermediate casing                      | 9.625"           | Annular           | 5M  | -                                            | -          |
| Open-hole                                                | -                | Blind Rams        | 10M | -                                            | -          |

| 8-3/4" Production Hole Section<br>10M psi requirement |                  |                   |     |                                              |            |
|-------------------------------------------------------|------------------|-------------------|-----|----------------------------------------------|------------|
| Component                                             | OD               | Primary Preventer | RWP | Alternate Preventer(s)                       | RWP        |
| Drillpipe                                             | 5.000" or 4.500" | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| HWDP                                                  | 5.000" or 4.500" | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| Jars                                                  | 6.500"           | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| DCs and MWD tools                                     | 6.500" – 8.000"  | Annular           | 5M  | -                                            | -          |
| Mud Motor                                             | 6.750" – 8.000"  | Annular           | 5M  | -                                            | -          |
| 2 <sup>nd</sup> Intermediate casing                   | 7.625"           | Annular           | 5M  | -                                            | -          |
| Open-hole                                             | -                | Blind Rams        | 10M | -                                            | -          |

VBR = Variable Bore Ram

## EOG Resources 13-5/8" 10M PSI BOP Stack

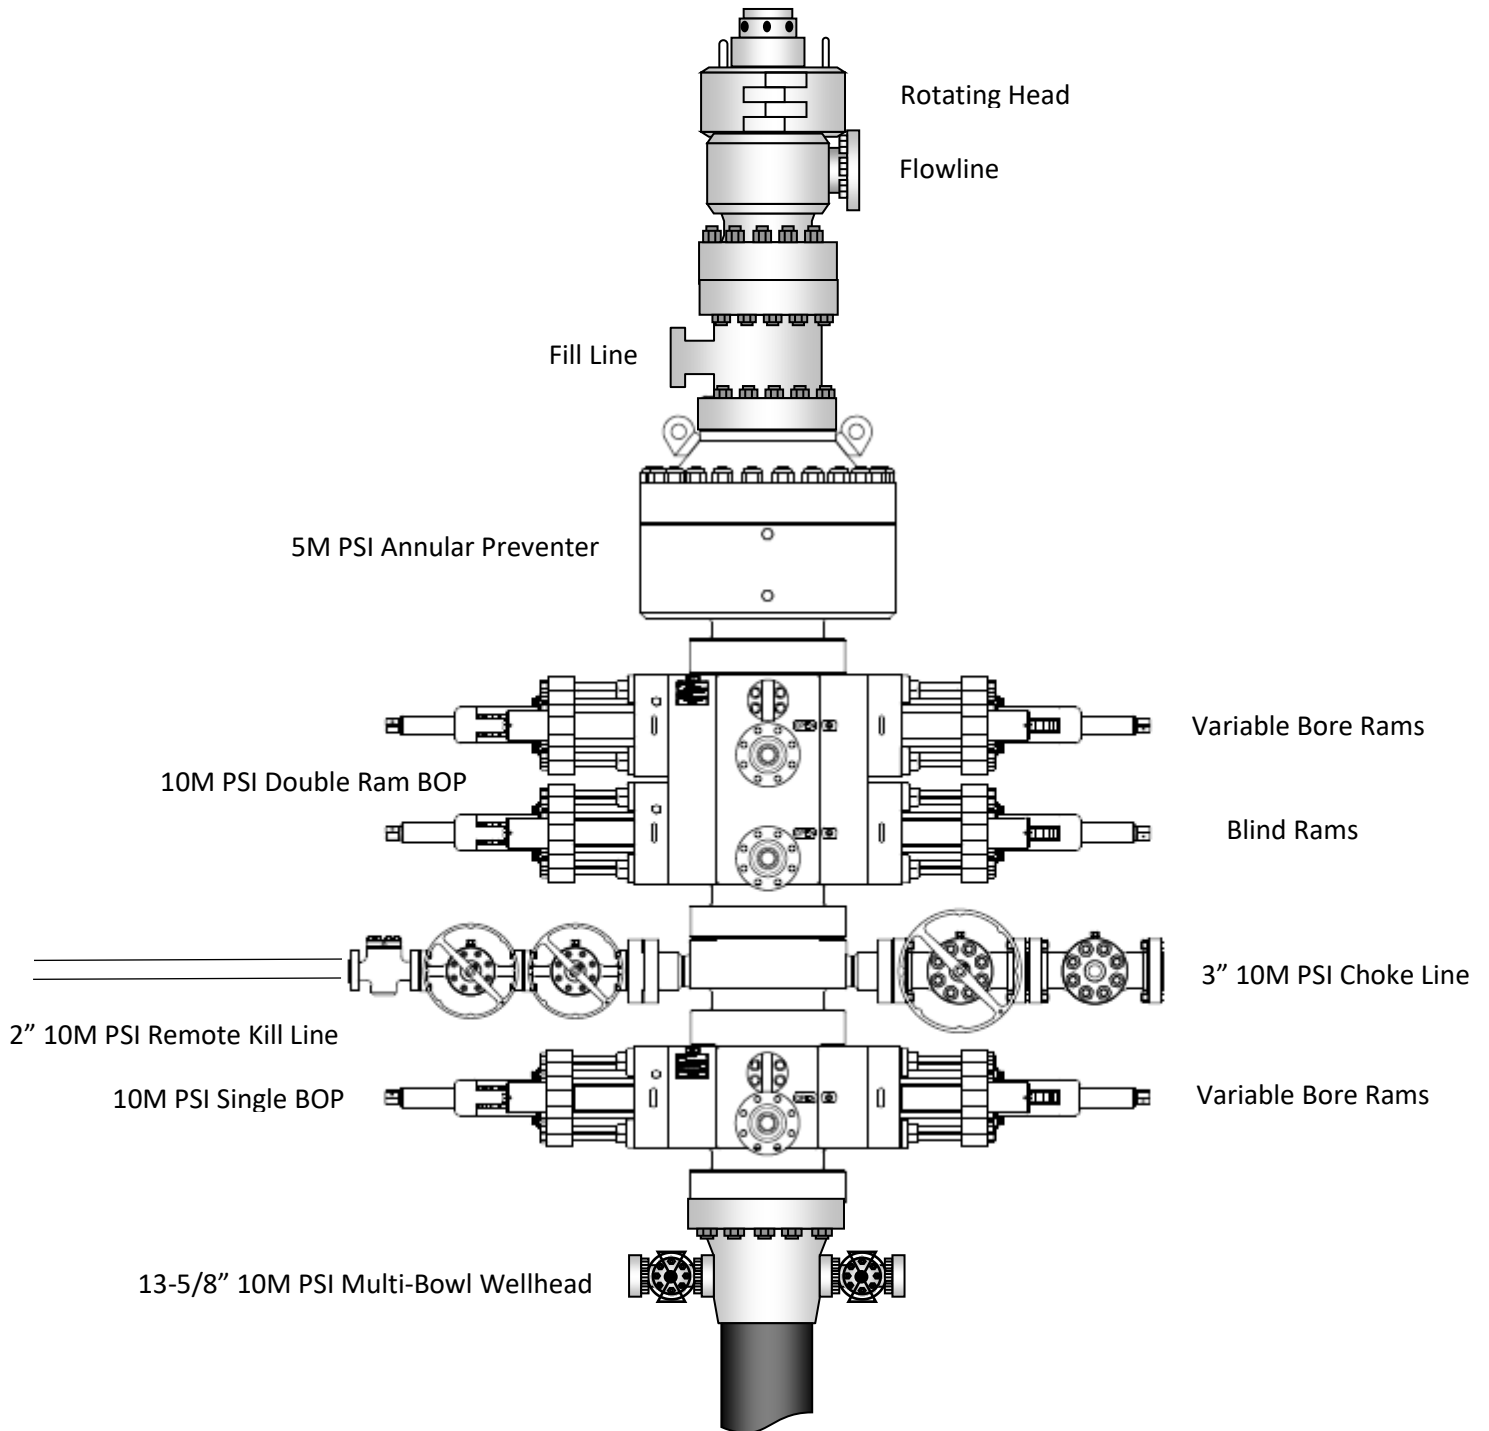

## 2. Well Control Procedures

Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the BHA through the BOPs. At least one well control drill will be performed weekly per crew to demonstrate compliance with the procedure and well control plan. The well control drill will be recorded in the daily drilling log. The type of drill will be determined by the ongoing operations, but reasonable attempts will be made to vary the type of drill conducted (pit, trip, open hole, choke, etc.). This well control plan will be available for review by rig personnel in the EOG Resources drilling supervisor's office on location, and on the rig floor. All BOP equipment will be tested as per Onshore O&G Order No. 2 with the exception of the 5000 psi annular which will be tested to 100% of its RWP.

### General Procedure While Drilling

1. Sound alarm (alert crew)
2. Space out drill string
3. Shut down pumps (stop pumps and rotary)
4. Shut-in Well (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

### General Procedure While Tripping

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out drill string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure While Running Production Casing

1. Sound alarm (alert crew)
2. Stab crossover and full opening safety valve and close
3. Space out string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure With No Pipe In Hole (Open Hole)


1. Sound alarm (alert crew)
2. Shut-in with blind rams. (HCR and choke will already be in the closed position.)
3. Confirm shut-in
4. Notify toolpusher/company representative
5. Read and record the following:
  - a. SICP
  - b. Pit gain
  - c. Time
6. Regroup and identify forward plan


General Procedures While Pulling BHA thru Stack

1. PRIOR to pulling last joint of drillpipe thru the stack.
  - a. Perform flowcheck, if flowing:
  - b. Sound alarm (alert crew)
  - c. Stab full opening safety valve and close
  - d. Space out drill string with tool joint just beneath the upper variable bore rams.
  - e. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
  - f. Confirm shut-in
  - g. Notify toolpusher/company representative
  - h. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
  - i. Regroup and identify forward plan

2. With BHA in the stack and compatible ram preventer and pipe combo immediately available.
  - a. Sound alarm (alert crew)
  - b. Stab crossover and full opening safety valve and close
  - c. Space out drill string with upset just beneath the upper variable bore rams.
  - d. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
  - e. Confirm shut-in
  - f. Notify toolpusher/company representative
  - g. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
  - h. Regroup and identify forward plan
3. With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.
  - a. Sound alarm (alert crew)
  - b. If possible to pick up high enough, pull string clear of the stack and follow "Open Hole" scenario.
  - c. If impossible to pick up high enough to pull the string clear of the stack:
  - d. Stab crossover, make up one joint/stand of drillpipe, and full opening safety valve and close
  - e. Space out drill string with tooljoint just beneath the upper variable bore ram.
  - f. Shut-in using upper variable bore ram. (HCR and choke will already be in the closed position.)
  - g. Confirm shut-in
  - h. Notify toolpusher/company representative
  - i. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
  - j. Regroup and identify forward plan



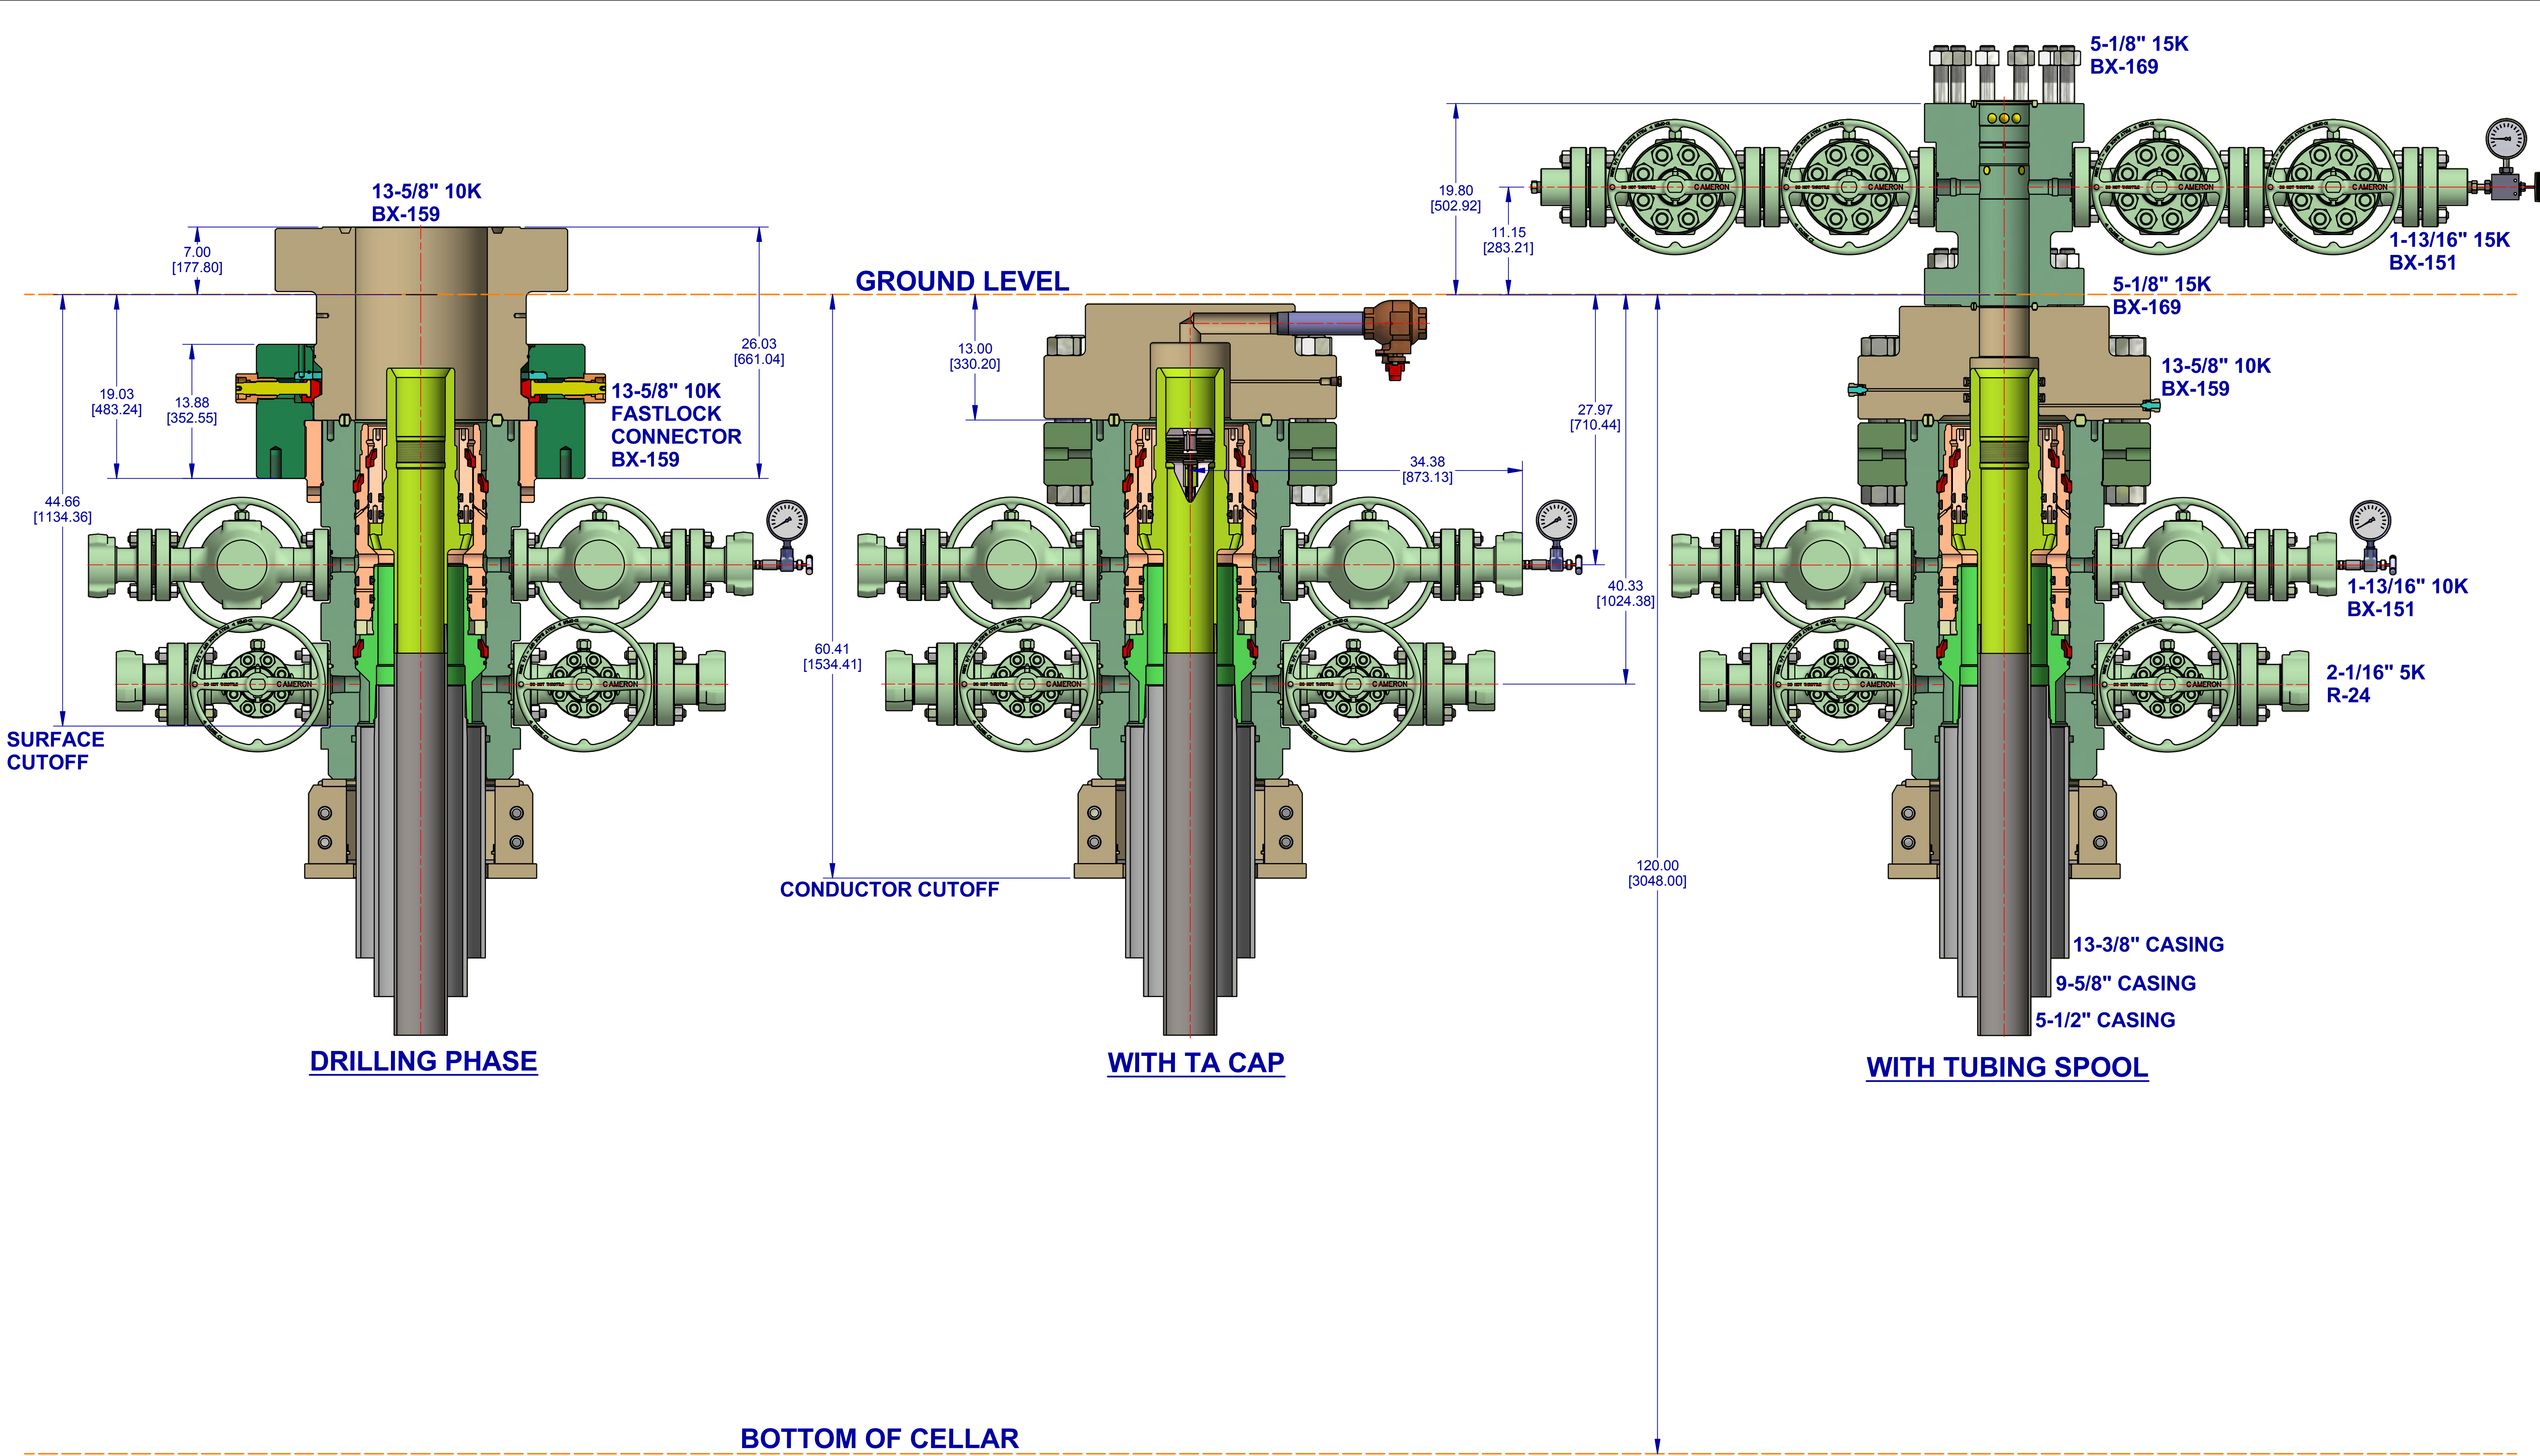

|                                                                                                                                                                                                                                                                                                                   |                      |  |                                                 |  |                       |  |                               |  |                                                                                                                                |                 |  |                                                    |  |                                          |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--|-------------------------------------------------|--|-----------------------|--|-------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------|-----------------|--|----------------------------------------------------|--|------------------------------------------|--|
| CONFIDENTIAL                                                                                                                                                                                                                                                                                                      |                      |  |                                                 |  |                       |  |                               |  |                                                                                                                                |                 |  |                                                    |  |                                          |  |
| <br>THIRD ANGLE                                                                                                                                                                                                              | DESIGNED IN INCHES   |  | MACHINING TOLERANCES UNLESS OTHERWISE SPECIFIED |  | SURFACE TREATMENT     |  | DO NOT SCALE                  |  |  <b>CAMERON</b><br>A Schlumberger Company | SURFACE SYSTEMS |  |                                                    |  |                                          |  |
|                                                                                                                                                                                                                                                                                                                   | DIMENSIONAL UNITS    |  |                                                 |  | MATERIAL & HEAT TREAT |  | DRAWN BY:<br><b>KEN REED</b>  |  |                                                                                                                                |                 |  | DATE<br><b>6 Nov 18</b>                            |  |                                          |  |
|                                                                                                                                                                                                                                                                                                                   | INCHES [MILLIMETERS] |  | CHECKED BY:<br><b>PA</b>                        |  |                       |  | DATE<br><b>6 Nov 18</b>       |  |                                                                                                                                |                 |  |                                                    |  |                                          |  |
|                                                                                                                                                                                                                                                                                                                   | X [D.] ± = [ ]       |  | APPROVED BY:<br><b>APPROVER NAME</b>            |  |                       |  | DATE<br><b>6 Nov 18</b>       |  |                                                                                                                                |                 |  |                                                    |  |                                          |  |
|                                                                                                                                                                                                                                                                                                                   | XX [D.X] ± = [ ]     |  | ANGLES<br>± °                                   |  |                       |  | ✓ RA ON ALL MACHINED SURFACES |  |                                                                                                                                |                 |  | ESTIMATED WEIGHT:<br><b>8147.2 LBS [3695.5 KG]</b> |  | INITIAL USE BIM:<br><b>EWR:650353762</b> |  |
| MACHINED FILLET RADII .015-.050 [0.38-1.27]. BREAK ALL SHARP EDGES .01-.03 [0.2-0.8] RADII OR 45°. SURFACE FINISH IN MICRO (μ) INCHES (Ra). INTERPRET DRAWING PER ASME Y14.5, ASME Y14.36, AND AWS A2.4 STANDARDS. SEE BIM FOR MATERIAL AND SPECIAL REQUIREMENTS. ITEM NUMBERS NOT APPEARING ON BIM DO NOT APPLY. |                      |  |                                                 |  |                       |  |                               |  |                                                                                                                                |                 |  |                                                    |  |                                          |  |
| EOG RESOURCES, INC<br>13-5/8" 10K MN-DS WELLHEAD<br>13-3/8" X 9-5/8" X 5-1/2"                                                                                                                                                                                                                                     |                      |  |                                                 |  |                       |  |                               |  |                                                                                                                                |                 |  |                                                    |  |                                          |  |
|                                                                                                                                                                                                                                                                                                                   |                      |  |                                                 |  |                       |  |                               |  |                                                                                                                                |                 |  | SD-052491-19-07                                    |  | INVENTOR: <b>01</b>                      |  |



## 10,000 PSI BOP Annular Variance Request

EOG Resources request a variance to use a 5000 psi annular BOP with a 10,000 psi BOP stack. The component and compatibility tables along with the general well control plans demonstrate how the 5000 psi annular BOP will be protected from pressures that exceed its rated working pressure (RWP). The pressure at which the control of the wellbore is transferred from the annular preventer to another available preventer will not exceed 3500 psi (70% of the RWP of the 5000 psi annular BOP).

### 1. Component and Preventer Compatibility Tables


The tables below outlines the tubulars and the compatible preventers in use. This table, combined with the drilling fluid, documents that two barriers to flow will be maintained at all times.

| 9-7/8" & 8-3/4" Intermediate Hole Section<br>10M psi requirement |                |                   |     |                                              |            |
|------------------------------------------------------------------|----------------|-------------------|-----|----------------------------------------------|------------|
| Component                                                        | OD             | Primary Preventer | RWP | Alternate Preventer(s)                       | RWP        |
| Drillpipe                                                        | 4.500"         | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| HWDP                                                             | 4.500"         | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| Jars                                                             | 4.500"         | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| DCs and MWD tools                                                | 6.500 – 8.000" | Annular           | 5M  | -                                            | -          |
| Mud Motor                                                        | 6.750 – 8.000" | Annular           | 5M  | -                                            | -          |
| Intermediate casing                                              | 7.625"         | Annular           | 5M  | -                                            | -          |
| Open-hole                                                        | -              | Blind Rams        | 10M | -                                            | -          |

| 6-3/4" Production Hole Section<br>10M psi requirement |                |                   |     |                                              |            |
|-------------------------------------------------------|----------------|-------------------|-----|----------------------------------------------|------------|
| Component                                             | OD             | Primary Preventer | RWP | Alternate Preventer(s)                       | RWP        |
| Drillpipe                                             | 4.500"         | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| HWDP                                                  | 4.500"         | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| DCs and MWD tools                                     | 4.750 – 5.500" | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| Mud Motor                                             | 4.750 – 5.500" | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| Mud Motor                                             | 5.500 – 5.750" | Annular           | 5M  | -                                            | -          |
| Production casing                                     | 5.500"         | Annular           | 5M  | Upper 3.5 - 5.5" VBR<br>Lower 3.5 - 5.5" VBR | 10M<br>10M |
| Open-hole                                             | -              | Blind Rams        | 10M | -                                            | -          |

VBR = Variable Bore Ram

## EOG Resources 11" 10M PSI BOP Stack

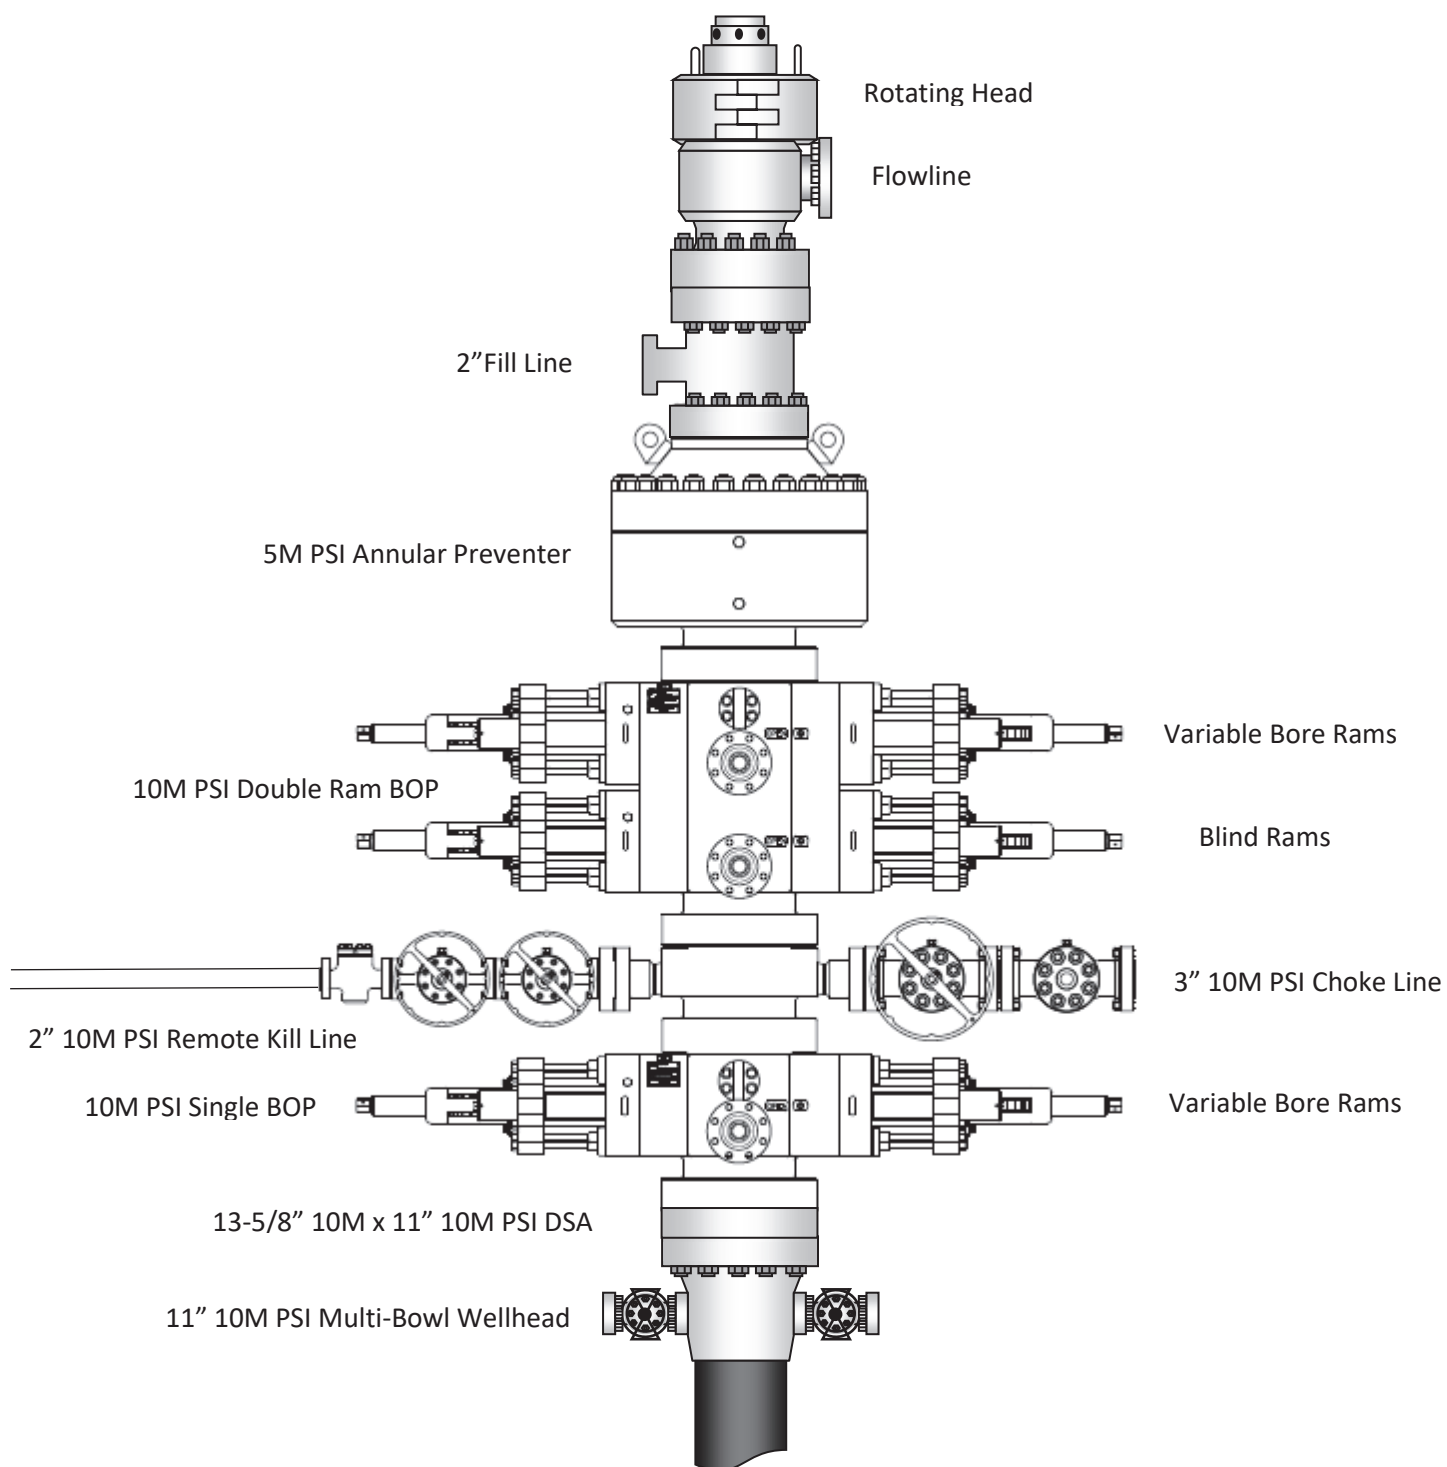

## 2. Well Control Procedures

Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the BHA through the BOPs. At least one well control drill will be performed weekly per crew to demonstrate compliance with the procedure and well control plan. The well control drill will be recorded in the daily drilling log. The type of drill will be determined by the ongoing operations, but reasonable attempts will be made to vary the type of drill conducted (pit, trip, open hole, choke, etc.). This well control plan will be available for review by rig personnel in the EOG Resources drilling supervisor's office on location, and on the rig floor. All BOP equipment will be tested as per Onshore O&G Order No. 2 with the exception of the 5000 psi annular which will be tested to 100% of its RWP.

### General Procedure While Drilling

1. Sound alarm (alert crew)
2. Space out drill string
3. Shut down pumps (stop pumps and rotary)
4. Shut-in Well (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

### General Procedure While Tripping

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out drill string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

### General Procedure While Running Production Casing

1. Sound alarm (alert crew)
2. Stab crossover and full opening safety valve and close
3. Space out string

4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

#### General Procedure With No Pipe In Hole (Open Hole)

1. Sound alarm (alert crew)
2. Shut-in with blind rams. (HCR and choke will already be in the closed position.)
3. Confirm shut-in
4. Notify toolpusher/company representative
5. Read and record the following:
  - a. SICP
  - b. Pit gain
  - c. Time
6. Regroup and identify forward plan

#### General Procedures While Pulling BHA thru Stack

1. PRIOR to pulling last joint of drillpipe thru the stack.
  - a. Perform flowcheck, if flowing:
  - b. Sound alarm (alert crew)
  - c. Stab full opening safety valve and close
  - d. Space out drill string with tool joint just beneath the upper variable bore rams.
  - e. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
  - f. Confirm shut-in
  - g. Notify toolpusher/company representative
  - h. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
  - i. Regroup and identify forward plan
2. With BHA in the stack and compatible ram preventer and pipe combo immediately available.
  - a. Sound alarm (alert crew)
  - b. Stab crossover and full opening safety valve and close
  - c. Space out drill string with upset just beneath the upper variable bore rams.
  - d. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
  - e. Confirm shut-in
  - f. Notify toolpusher/company representative
  - g. Read and record the following:
    - i. SIDPP and SICP

- ii. Pit gain
    - iii. Time
  - h. Regroup and identify forward plan
- 3. With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.
  - a. Sound alarm (alert crew)
  - b. If possible to pick up high enough, pull string clear of the stack and follow “Open Hole” scenario.
  - c. If impossible to pick up high enough to pull the string clear of the stack:
  - d. Stab crossover, make up one joint/stand of drillpipe, and full opening safety valve and close
  - e. Space out drill string with tooljoint just beneath the upper variable bore ram.
  - f. Shut-in using upper variable bore ram. (HCR and choke will already be in the closed position.)
  - g. Confirm shut-in
  - h. Notify toolpusher/company representative
  - i. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
  - j. Regroup and identify forward plan



## Offline Intermediate Cementing Procedure

2/24/2022

**Cement Program**

1. No changes to the cement program will take place for offline cementing.

**Summarized Operational Procedure for Intermediate Casing**

1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment back pressure valves.
  - a. Float equipment is equipped with two back pressure valves rated to a minimum of 5,000 psi.
2. Land production casing on mandrel hanger through BOP.
  - a. If casing is unable to be landed with a mandrel hanger, then the **casing will be cemented online**.
3. Break circulation and confirm no restrictions.
  - a. Ensure no blockage of float equipment and appropriate annular returns.
  - b. Perform flow check to confirm well is static.
4. Set pack-off
  - a. If utilizing a fluted/ported mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid, remove landing joint, and set annular packoff through BOP. Pressure test to 5,000 psi for 10 min.
  - b. If utilizing a solid mandrel hanger, ensure well is static on the annulus and inside the casing by filling the pipe with kill weight fluid. Pressure test seals to 5,000 psi for 10 min. Remove landing joint through BOP.
5. After confirmation of both annular barriers and the two casing barriers, install TA plug and pressure test to 5,000 psi for 10 min. Notify the BLM with intent to proceed with nipple down and offline cementing.
  - a. Minimum 4 hrs notice.
6. With the well secured and BLM notified, nipple down BOP and secure on hydraulic carrier or cradle.
  - a. **Note, if any of the barriers fail to test, the BOP stack will not be nipped down until after the cement job has concluded and both lead and tail slurry have reached 500 psi.**
7. Skid/Walk rig off current well.
8. Confirm well is static before removing TA Plug.
  - a. Cementing operations will not proceed until well is under control. (If well is not static, notify BLM and proceed to kill)
  - b. Casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing.
  - c. Well control plan can be seen in Section B, Well Control Procedures.
  - d. If need be, rig can be moved back over well and BOP nipped back up for any further remediation.





## Offline Intermediate Cementing Procedure

2/24/2022

- e. Diagram for rig positioning relative to offline cementing can be seen in Figure 4.
9. Rig up return lines to take returns from wellhead to pits and rig choke.
  - a. Test all connections and lines from wellhead to choke manifold to 5,000 psi high for 10 min.
  - b. If either test fails, perform corrections and retest before proceeding.
  - c. Return line schematics can be seen in Figure 3.
10. Remove TA Plug from the casing.
11. Install offline cement tool.
  - a. Current offline cement tool schematics can be seen in Figure 1 (Cameron) and Figure 2 (Cactus).
12. Rig up cement head and cementing lines.
  - a. Pressure test cement lines against cement head to 80% of casing burst for 10 min.
13. Break circulation on well to confirm no restrictions.
  - a. If gas is present on circulation, well will be shut in and returns rerouted through gas buster.
  - b. Max anticipated time before circulating with cement truck is 6 hrs.
14. Pump cement job as per plan.
  - a. At plug bump, test casing to 0.22 psi/ft or 1500 psi, whichever is greater.
  - b. If plug does not bump on calculated, shut down and wait 8 hrs or 500 psi compressive strength, whichever is greater before testing casing.
15. Confirm well is static and floats are holding after cement job.
  - a. With floats holding and backside static:
    - i. Remove cement head.
  - b. If floats are leaking:
    - i. Shut-in well and WOC (Wait on Cement) until tail slurry reaches 500 psi compressive strength and the casing is static prior to removing cement head.
  - c. If there is flow on the backside:
    - i. Shut in well and WOC until tail slurry reaches 500 psi compressive strength. Ensure that the casing is static prior to removing cement head.
16. Remove offline cement tool.
17. Install night cap with pressure gauge for monitoring.
18. Test night cap to 5,000 psi for 10 min.



Offline Intermediate Cementing Procedure

2/24/2022

## Example Well Control Plan Content

### A. Well Control Component Table

The table below, which covers the cementing of the **5M MASP (Maximum Allowable Surface Pressure) portion of the well**, outlines the well control component rating in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the BOP nipped up to the wellhead.

Intermediate hole section, 5M requirement

| Component                | RWP |
|--------------------------|-----|
| Pack-off                 | 10M |
| Casing Wellhead Valves   | 10M |
| Annular Wellhead Valves  | 5M  |
| TA Plug                  | 10M |
| Float Valves             | 5M  |
| 2" 1502 Lo-Torque Valves | 15M |

### B. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while circulating and cementing through the Offline Cement Adapter.

#### General Procedure While Circulating

1. Sound alarm (alert crew).
2. Shut down pumps.
3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
4. Confirm shut-in.
5. Notify tool pusher/company representative.



## Offline Intermediate Cementing Procedure

2/24/2022

6. Read and record the following:
  - a. SICP (Shut in Casing Pressure) and AP (Annular Pressure)
  - b. Pit gain
  - c. Time
  - d. Regroup and identify forward plan to continue circulating out kick via rig choke and mud/gas separator. Circulate and adjust mud density as needed to control well.

### General Procedure While Cementing

1. Sound alarm (alert crew).
2. Shut down pumps.
3. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
4. Confirm shut-in.
5. Notify tool pusher/company representative.
6. Open rig choke and begin pumping again taking returns through choke manifold and mud/gas separator.
7. Continue to place cement until plug bumps.
8. At plug bump close rig choke and cement head.
9. Read and record the following
  - a. SICP and AP
  - b. Pit gain
  - c. Time
  - d. Shut-in annulus valves on wellhead

### General Procedure After Cementing


1. Sound alarm (alert crew).
2. Shut-in Well (close valves to rig pits and open valve to rig choke line. Rig choke will already be in the closed position).
3. Confirm shut-in.
4. Notify tool pusher/company representative.
5. Read and record the following:
  - a. SICP and AP
  - b. Pit gain
  - c. Time
  - d. Shut-in annulus valves on wellhead



## Offline Intermediate Cementing Procedure

2/24/2022

Figure 1: Cameron TA Plug and Offline Adapter Schematic

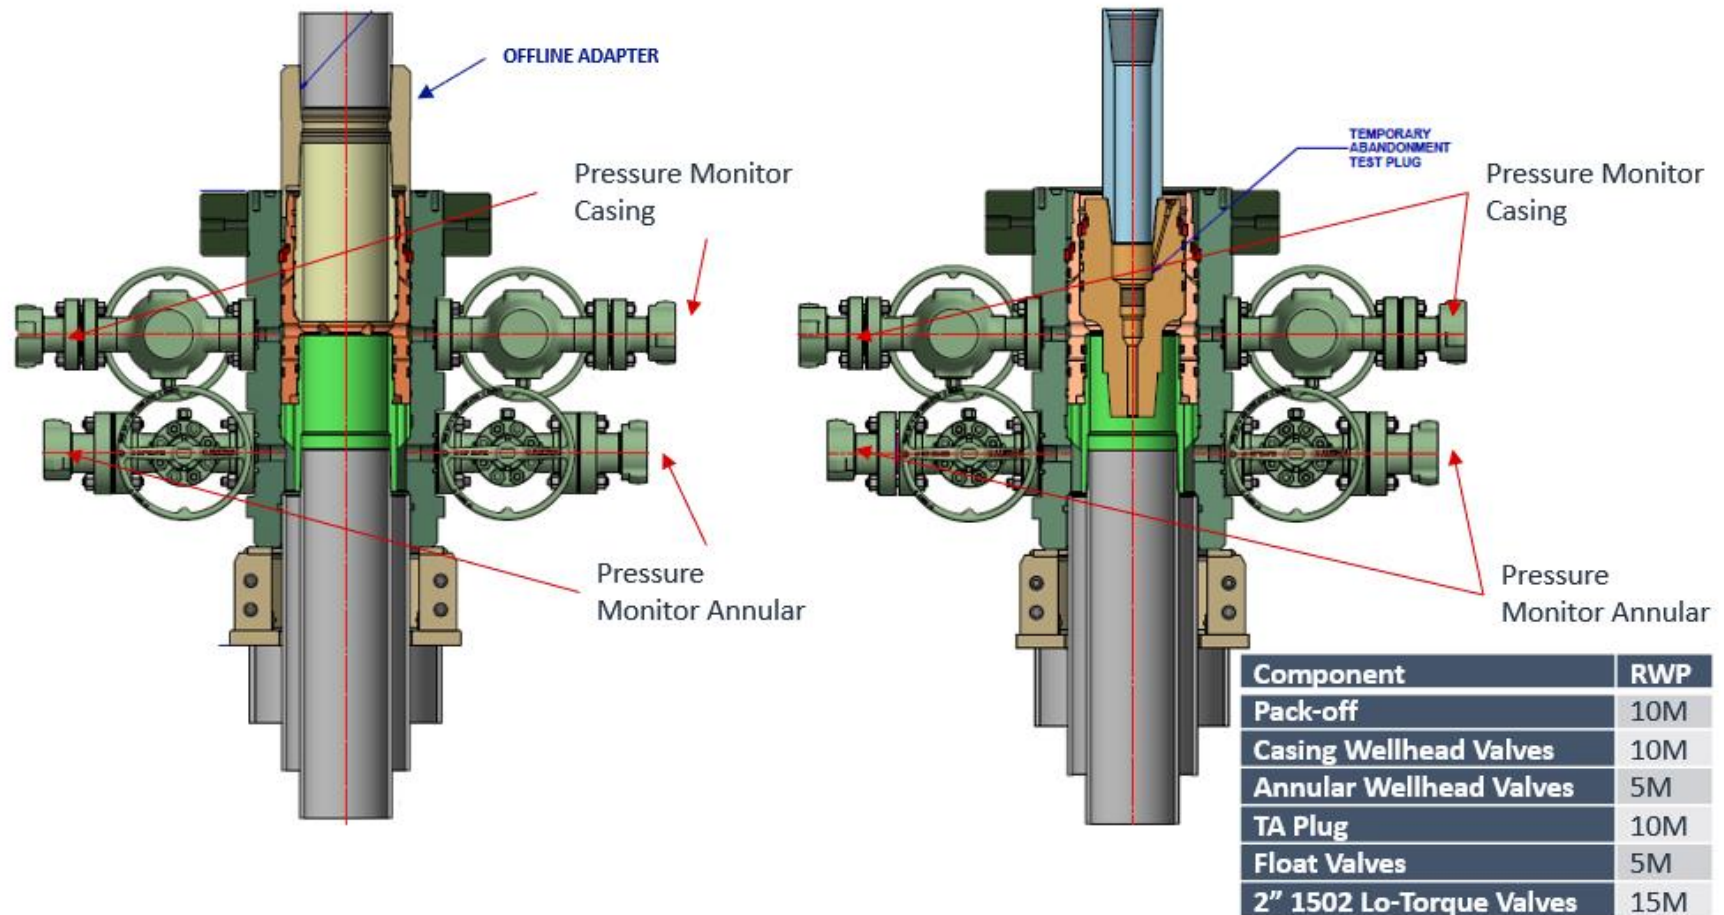




## Offline Intermediate Cementing Procedure

2/24/2022

Figure 2: Cactus TA Plug and Offline Adapter Schematic

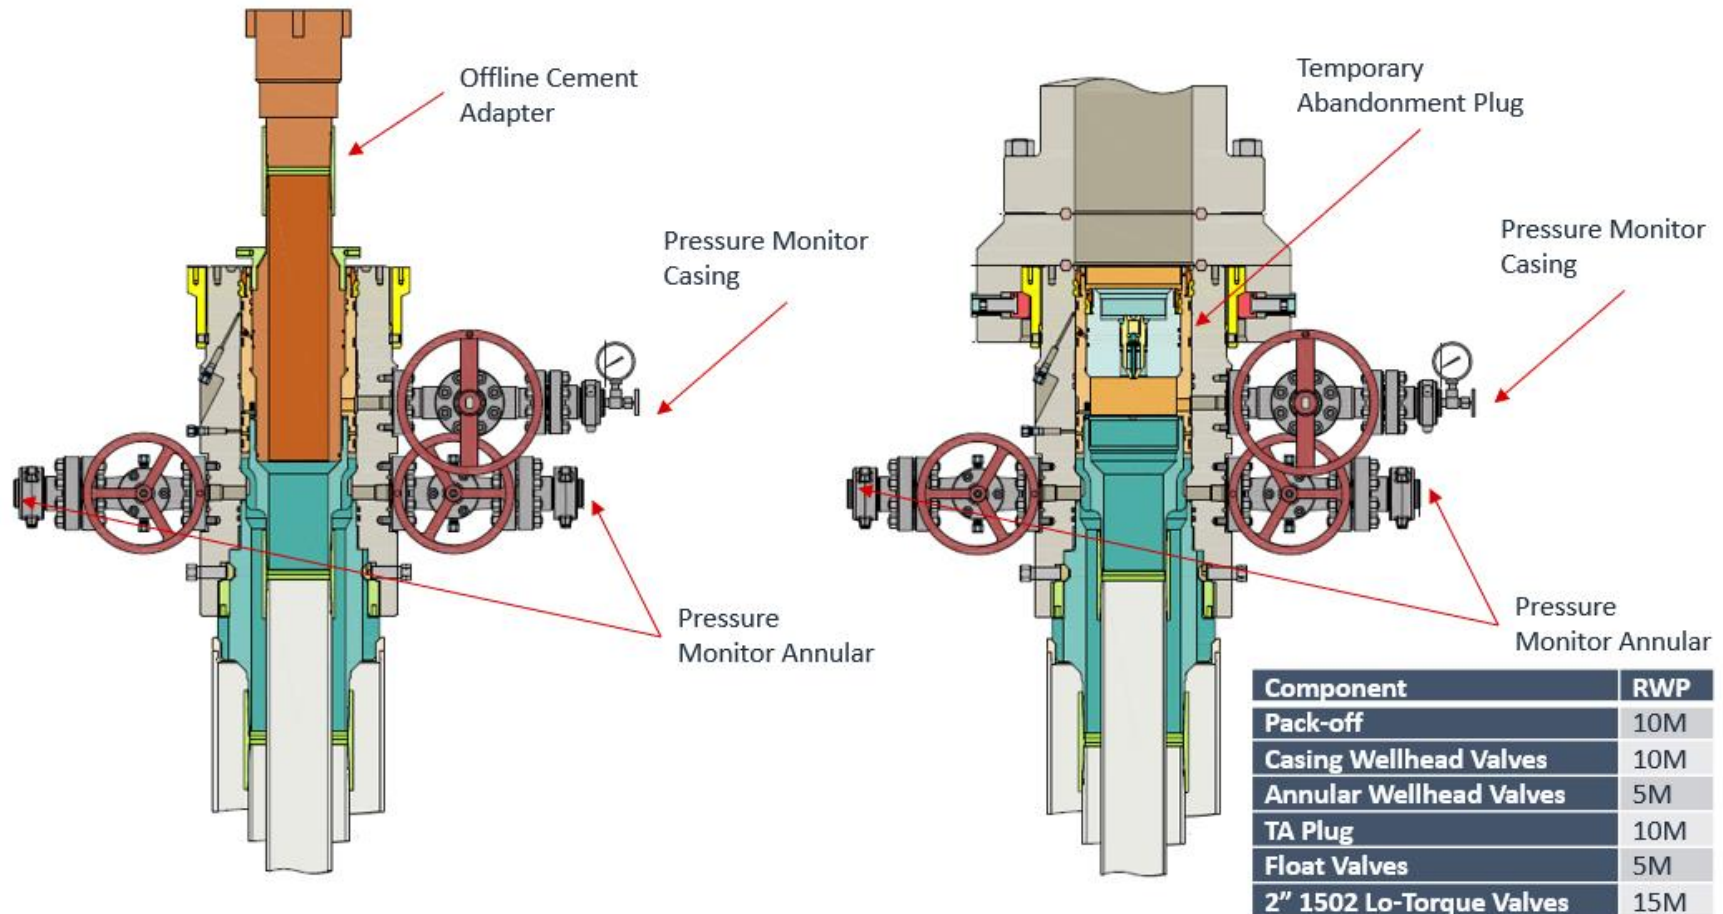




## Offline Intermediate Cementing Procedure

2/24/2022

Figure 3: Back Yard Rig Up

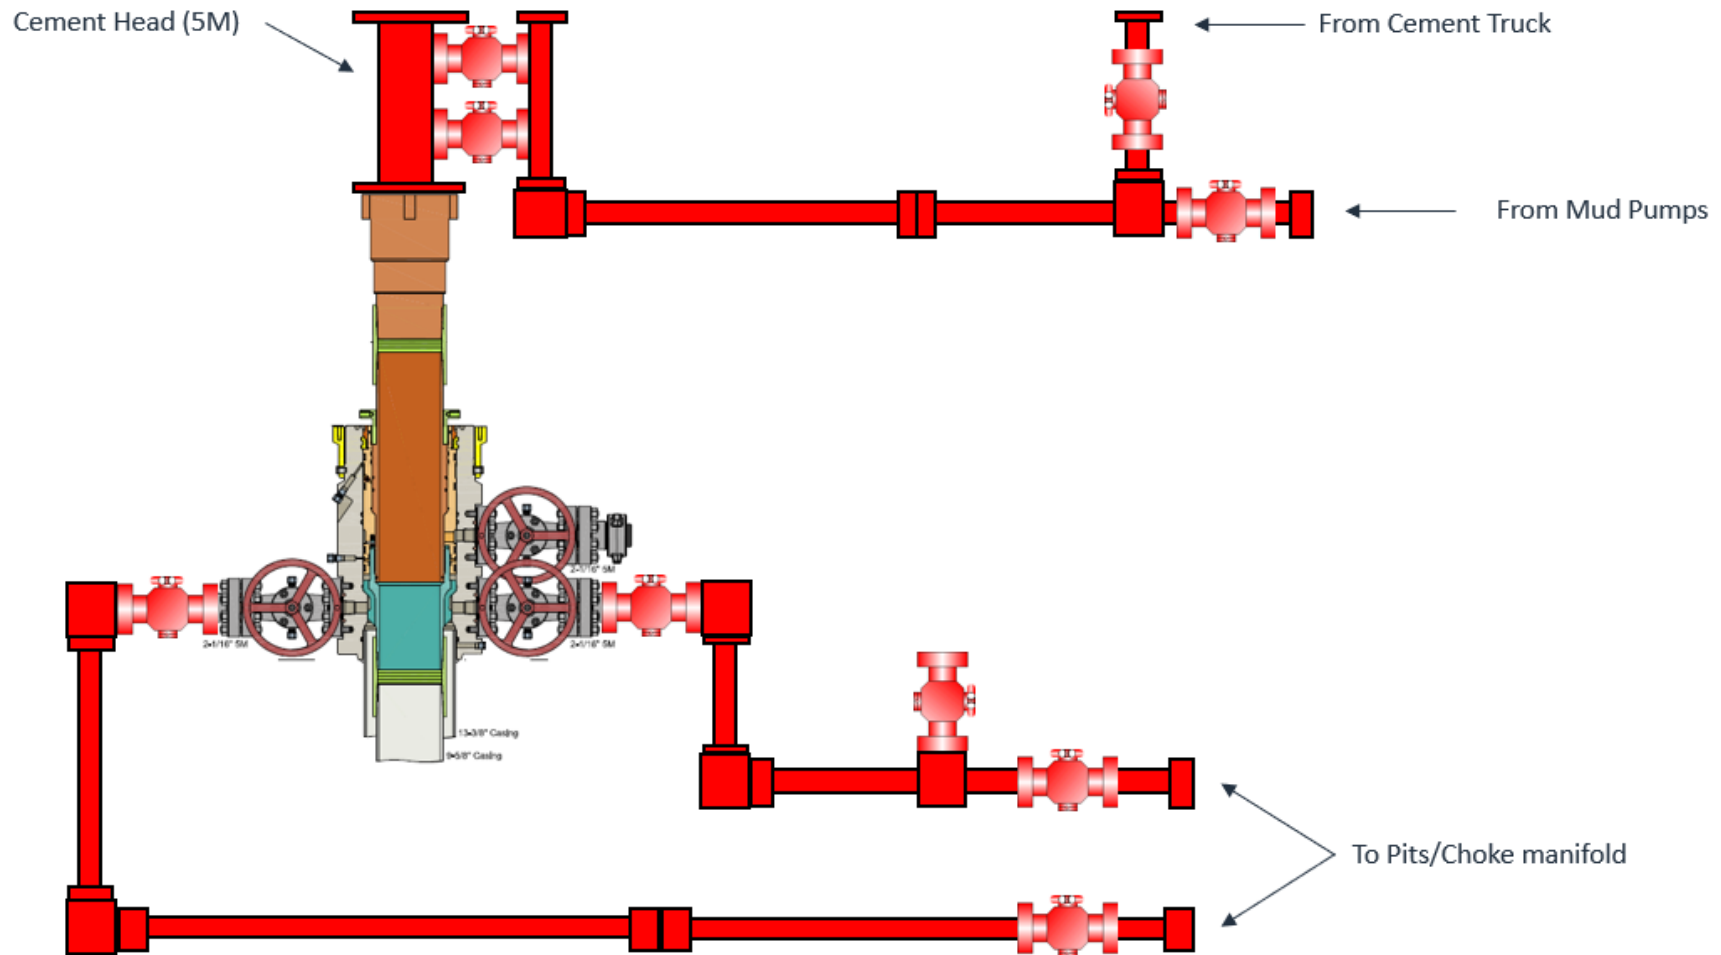

\*\*\* All Lines 10M rated working pressure






Offline Intermediate Cementing Procedure

2/24/2022

Figure 4: Rig Placement Diagram

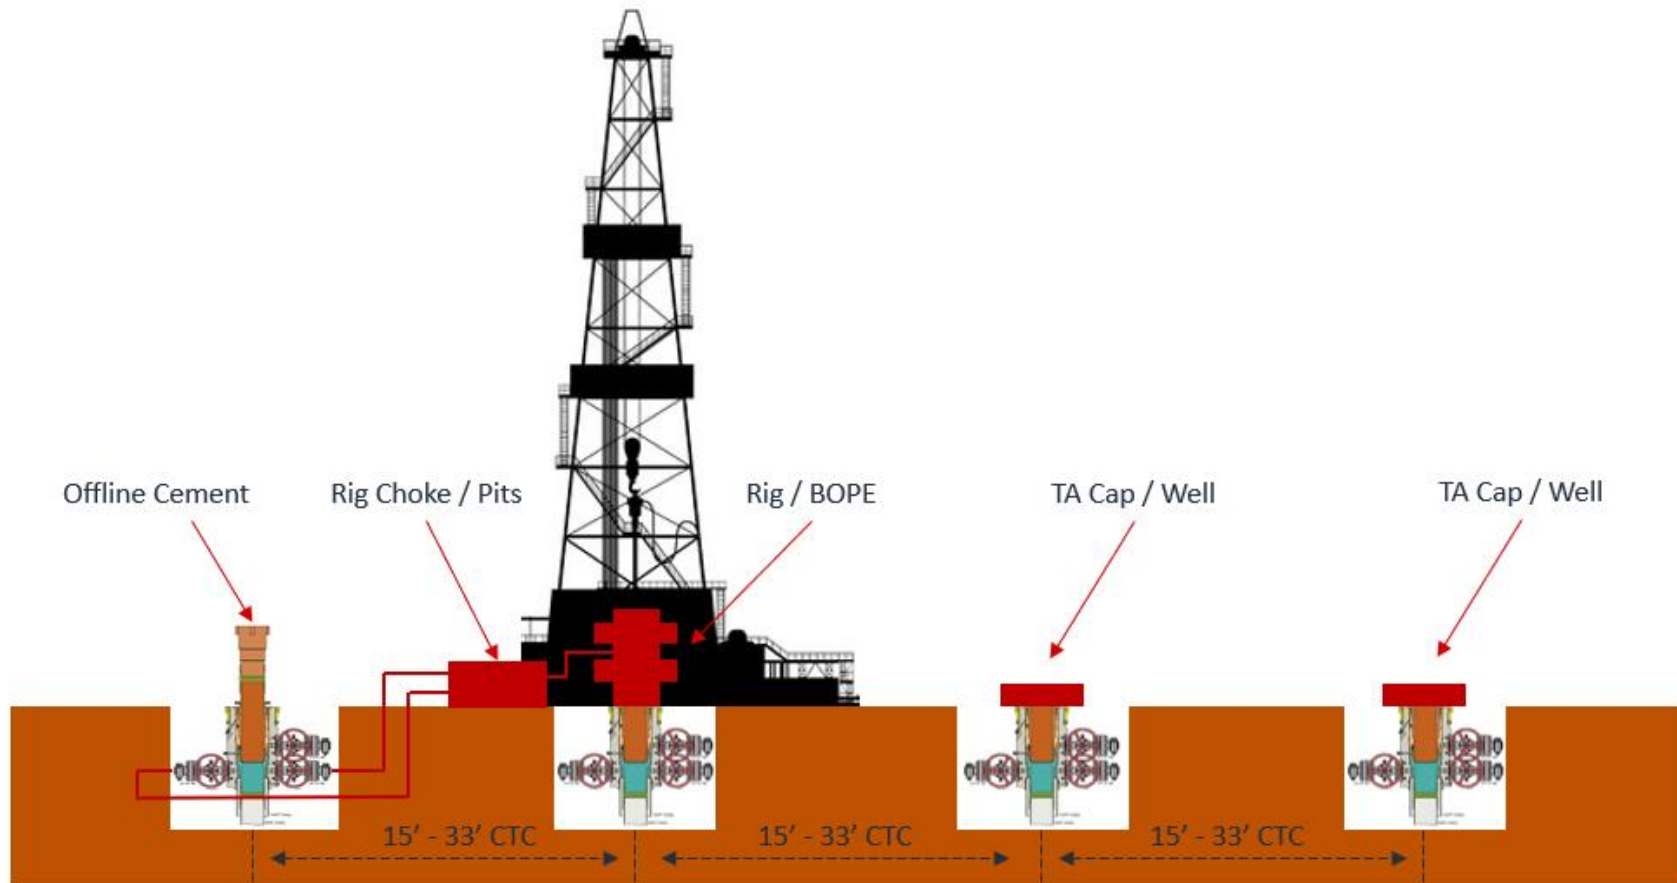

**Grackle 26 East Fed Com 101H API #: 30-025-\*\*\*\*\* Variances**

EOG respectfully requests the below variances to be applied to the above well:

- Variance is requested to waive the centralizer requirements for the intermediate casing in the intermediate hole. An expansion additive will be utilized, in the cement slurry, for the entire length of the intermediate interval to maximize cement bond and zonal isolation.

- Variance is also requested to waive the centralizer requirements for the production casing in the production hole. An expansion additive will be utilized, in the cement slurry, for the entire length of the production interval to maximize cement bond and zonal isolation.

- Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

- Variance is requested to use a 5,000 psi annular BOP with the 10,000 psi BOP stack.

- EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and Cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both "A" and "B" sections). The weld will be tested to 1,500 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

EOG requests the additional variance(s) in the attached document(s):

- EOG BLM Variance 3a\_b - BOP Break-test and Offline Intermediate Cement
- EOG BLM Variance 4a - Salt Section Annular Clearance
- EOG BLM Variance 5a - Alternate Shallow Casing Designs



## **Title 43 CFR Part 3170 - OO II Language Replacement**

Any language referencing Onshore Order II (OO II) in any document associated with this well now references Title 43 CFR Part 3170.



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

# SUPO Data Report

07/15/2025

APD ID: 10400097948

Submission Date: 04/11/2024

Operator Name: EOG RESOURCES INCORPORATED

Well Name: GRACKLE 26 EAST FED COM

Well Number: 502H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data  
reflects the most  
recent changes  
[Show Final Text](#)

## Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

2\_Grackle\_26\_East\_Fed\_Com\_Vicinity\_502H\_20240409125101.pdf

Existing Road Purpose: ACCESS

Row(s) Exist? NO

**ROW ID(s)**

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

## Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

EP\_GRACKLE\_26\_EAST\_FED\_COM\_ACCESS\_ROADS\_SEC35\_1OF2\_REV1\_20240402071327.pdf

EP\_GRACKLE\_26\_EAST\_FED\_COM\_ACCESS\_ROADS\_SEC35\_2OF2\_REV1\_20240402071327.pdf

New road type: RESOURCE

Length: 1834

Feet

Width (ft.): 30

Max slope (%): 20

Max grade (%): 2

Army Corp of Engineers (ACOE) permit required? N

ACOE Permit Number(s):

New road travel width: 24

**New road access erosion control:** Newly constructed or reconstructed roads will be constructed as outlined in the BLM "Gold Book" and to meet the standards of the anticipated traffic flow and all anticipated weather requirements as needed. Construction will include ditching, draining, crowning and capping or sloping and dipping the roadbed as necessary to provide a well-constructed and safe road. We plan to grade and water twice a year.

New road access plan or profile prepared? N

**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H**New road access plan****Access road engineering design?** N**Access road engineering design****Turnout?** N**Access surfacing type:** OTHER**Access topsoil source:** OFFSITE**Access surfacing type description:** 6" compacted caliche**Access onsite topsoil source depth:****Offsite topsoil source description:** see attached SUPO**Onsite topsoil removal process:****Access other construction information:****Access miscellaneous information:****Number of access turnouts:****Access turnout map:**

### Drainage Control

**New road drainage crossing:** CULVERT,OTHER**Other Description:** Crown and ditched**Drainage Control comments:** n/a**Road Drainage Control Structures (DCS) description:** n/a**Road Drainage Control Structures (DCS) attachment:**

### Access Additional Attachments

### Section 3 - Location of Existing Wells

**Existing Wells Map?** YES**Existing Well map Attachment:**

3\_Grackle\_26\_East\_Fed\_Com\_Radius\_502H\_20240409125121.pdf

### Section 4 - Location of Existing and/or Proposed Production Facilities

**Submit or defer a Proposed Production Facilities plan?** SUBMIT**Production Facilities description:** SECTION 35, TOWNSHIP 24 SOUTH, RANGE 34 EAST, LEA COUNTY, NEW MEXICO**Production Facilities map:**

Operator Name: EOG RESOURCES INCORPORATED

Well Name: GRACKLE 26 EAST FED COMWell Number: 502H

EOG\_GRACKLE\_26\_EAST\_FED\_COM\_FLOWLINE\_DETAIL\_EXHIBIT\_5\_20240402080519.pdf  
EP\_GRACKLE\_26\_EAST\_FED\_COM\_GAS\_LINE\_1OF2\_20240402081408.pdf  
EP\_GRACKLE\_26\_EAST\_FED\_COM\_GAS\_LINE\_2OF2\_20240402081408.pdf  
EP\_GRACKLE\_26\_EAST\_FED\_COM\_LGL\_LINE\_1OF2\_20240402081408.pdf  
EP\_GRACKLE\_26\_EAST\_FED\_COM\_LGL\_LINE\_2OF2\_20240402081408.pdf  
EP\_GRACKLE\_26\_EAST\_FED\_COM\_OIL\_LINE\_BLM\_20240402081409.pdf  
EP\_GRACKLE\_26\_EAST\_FED\_COM\_OIL\_LINE\_PRIVATE\_1OF2\_20240402081408.pdf  
EP\_GRACKLE\_26\_EAST\_FED\_COM\_OIL\_LINE\_PRIVATE\_2OF2\_20240402081409.pdf  
EP\_GRACKLE\_26\_EAST\_FED\_COM\_PAD\_A\_FL\_R1\_20240402081409.pdf  
EP\_GRACKLE\_26\_EAST\_FED\_COM\_PAD\_B\_FL\_R1\_SEC\_26\_20240402081409.pdf  
EP\_GRACKLE\_26\_EAST\_FED\_COM\_PAD\_B\_FL\_R1\_SEC\_35\_NM\_20240402081409.pdf

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: RECYCLED

Water source use type: OTHER

**Describe use type:** The source and location of the water location will be drilled using a combination of water muc program. (i) Water will be obtained from commercial wa to the location by trucks using existing and proposed ro attached. (ii) Water may be supplied from frac ponds an temporary above-ground surface lines a shown on the r 4-inch polyethylene or layflat lines and up to six 12-inch water. Freshwater is defined as containing less than 10 (TDS), exhibiting no petroleum sheen when standing, an mechanical processes that expose it to heavy metals or to utilize up to six 4-inch polyethylene or layflat lines and transport treated produced water is defined as the recor reusable form and may include mechanical and chemical FRESHWATER PIT, SECTION 18, TOWNSHIP 24 SOU Produced Water Source: REUSE PIT, SECTION 23, TC EAST Temporary surface lines would originate from a s locations in the surrounding area of the proposed action ground with minimal disturbance. Temporary surface lin feet from the edge of the existing disturbance (i.e., edge or two-track road, or other man-made addition to the lar mechanism will be used. All vehicle equipment will rema Map or maps showing the locations of the temporary su APD and included in the Environmental Assessment. An KMZ file) shall be submitted with the Environmental Ass

Source latitude:

Source longitude:

Source datum:

City:

Water source permit type:

WATER RIGHT

Water source transport method:

TRUCKING



Operator Name: EOG RESOURCES INCORPORATED

Well Name: GRACKLE 26 EAST FED COMWell Number: 502H

PIPELINE

Source land ownership: FEDERAL

Source transportation land ownership: FEDERAL

Water source volume (barrels): 1Source volume (acre-feet): 0.00012889

Source volume (gal): 42

Water source and transportation

EP\_GRACKLE\_26\_EAST\_FED\_COM\_WATER\_LINE\_20240402072437.pdf  
Grackle\_Water\_Map\_20240402072443\_20250326090738.pdf

Water source comments: see SUPO

New water well? N

New Water Well Info

Well latitude:Well Longitude:Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):Well casing type:

Well casing outside diameter (in.):Well casing inside diameter (in.):

New water well casing?Used casing source:

Drilling method:Drill material:

Grout material:Grout depth:

Casing length (ft.):Casing top depth (ft.):

Well Production type:Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Using any construction materials: YES

**Construction Materials description:** Caliche will be supplied from pits shown on the attached caliche source map. Caliche utilized for the drilling pad will be obtained either from an existing approved mineral pit, or by benching into a hill, which will allow the pad to be level with existing caliche from the cut or extracted by Flipping the well location. A mineral material permit will be obtained from BLM prior to excavating any caliche on Federal Lands. Amount will vary for each pad. The procedure for Flipping a well location is as follows: \* -An adequate amount of topsoil/root zone (usually top 6 inches of soil) will be stripped from the

**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H

proposed well location and stockpiled along the side of the well location as depicted on the well site diagram/survey plat. -An area within the proposed well site dimensions will be used to excavate caliche. Subsoil will be removed and stockpiled within the surveyed well pad dimensions. -Once caliche/surfacing mineral is found, the mineral material will be excavated and stockpiled within the approved drilling pad dimensions. -Then, subsoil will be pushed back in the excavated hole, and caliche will be spread accordingly across the entire well pad and road (if available). -Neither caliche nor subsoil will be stockpiled outside the well pad dimensions. Topsoil will be stockpiled along the edge of the pad as depicted in the Well Site Layout or survey plat. \* If no caliche is found onsite, caliche will be hauled in from a BLM-approved caliche pit or other established mineral pit. A BLM mineral material permit will be acquired before obtaining mineral material from BLM pits or federal land.

**Construction Materials source location**

Grackle\_26\_Caliche\_Map\_20240402072723\_20250326090800.pdf

**Section 7 - Methods for Handling****Waste type:** SEWAGE**Waste content description:** GREY WATER**Amount of waste:** 1 barrels**Waste disposal frequency :** Weekly

&lt;/style isBold=&quot;true&quot;&gt;Safe containment description:&lt;/style&gt; Human waste managed by third-party vendors. ROW construction waste contained in on-site portable toilets maintained by third party vendor. During drilling activities waste is managed by third party vendor utilizing onsite aerobic (treatment) wastewater management. Liquids treated through the aerobic system are transferred to via water line to CTBs for reuse by EOG. All solid waste remaining after treatment process are pumped into an enclosed waste transfer truck at the time of rig down and taken to one of the following disposal facilities by the third party vendor: Qual Run Services LLC (a Licensed Waste Management Service Facility in Reeves County, Texas) or ReUse OilField Services (a Licensed Waste Management Facility in Mentone, TX)

**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY**Disposal location ownership:** COMMERCIAL**Disposal type description:****Disposal location description:** Qual Run Services LLC (a Licensed Waste Management Service Facility in Reeves County, Texas) or ReUse OilField Services (a Licensed Waste Management Facility in Mentone, TX)**Waste type:** DRILLING

**Waste content description:** Drilling fluids and produced oil and water from the well during drilling and completion operations will be stored onsite in frac tanks and disposed of at the time of rig down. Primary disposal location for EOGs NM operations is the North Delaware Basin Disposal facility in Jal, New Mexico which is a privately owned commercial facility. Some EOG locations within New Mexico may require transportation of cuttings to other licensed commercial disposal facilities based on geographic location.

**Amount of waste:** 0 barrels**Waste disposal frequency :** Daily**Safe containment description:** STEEL TANKS**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY**Disposal location ownership:** COMMERCIAL**Disposal type description:**

**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H**Disposal location description:** North Delaware Basin Disposal facility in Jal, New Mexico**Waste type:** GARBAGE**Waste content description:** TRASH GENERATED ONSITE**Amount of waste:** 1 pounds**Waste disposal frequency :** Weekly**Safe containment description:** ENCLOSED DUMPSTERS**Safe containmant attachment:****Waste disposal type:** OTHER**Disposal location ownership:** OTHER**Disposal type description:** LEA COUNTY, NM**Disposal location description:** Trash dumpsters are utilized to contain garbage onsite. Dumpsters are maintained by a third- party vendor. All trash is hauled to Lea County, NM landfill.

### Reserve Pit

**Reserve Pit being used?** NO**Temporary disposal of produced water into reserve pit?** NO**Reserve pit length (ft.)**      **Reserve pit width (ft.)****Reserve pit depth (ft.)**      **Reserve pit volume (cu. yd.)****Is at least 50% of the reserve pit in cut?****Reserve pit liner****Reserve pit liner specifications and installation description**

### Cuttings Area

**Cuttings Area being used?** NO**Are you storing cuttings on location?** Y

**Description of cuttings location** EOG utilizes a Closed Loop System, cuttings leave the rig and enter low/highwall cuttings bin. Cuttings are then transferred to trucks for transportation to a State of New Mexico approved disposal facility. Primary disposal location for EOGs NM operations is the North Delaware Basin Disposal Facility in Jal, New Mexico which is a privately owned commercial facility. Some EOG locations within New Mexico may require transportation of cuttings to other licensed commercial disposal facilities based on geographic location.

**Cuttings area length (ft.)**      **Cuttings area width (ft.)****Cuttings area depth (ft.)**      **Cuttings area volume (cu. yd.)****Is at least 50% of the cuttings area in cut?****Cuttings area liner****Cuttings area liner specifications and installation description**

Operator Name: EOG RESOURCES INCORPORATED

Well Name: GRACKLE 26 EAST FED COM

Well Number: 502H

Section 8 - Ancillary

Are you requesting any Ancillary Facilities?: N

Ancillary Facilities

Comments:

Section 9 - Well Site

Well Site Layout Diagram:

Grackle\_26\_East\_Fed\_Com\_502H\_Rig\_Layout\_20240409125317.pdf

5\_Grackle\_26\_East\_Fed\_Com\_Padsite\_502H\_1\_20240409125317.pdf

4\_Grackle\_26\_East\_Fed\_Com\_WLE\_502H\_20240409125318.pdf

EOG\_GRACKLE\_26\_EAST\_FED\_COM\_FLOWLINE\_DETAIL\_EXHIBIT\_5\_20240404141222.pdf

Comments: Exhibit 2A-Wellsite, Exhibit 2B-Padsite, Exhibit 4-Rig Layout

Section 10 - Plans for Surface

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: GRACKLE 26 EAST FED COM

Multiple Well Pad Number: 402H, 403H, 502H, 503H

Recontouring

7\_Grackle\_26\_East\_Fed\_Com\_Reclamation\_Diagram\_502H\_20240409125334.pdf

**Drainage/Erosion control construction:** Proper erosion control methods will be used on the area to control erosion, runoff, and siltation of the surrounding area.

**Drainage/Erosion control reclamation:** The interim reclamation will be monitored periodically to ensure that vegetation has reestablished and that erosion is controlled.

|                                           |                                          |                                            |
|-------------------------------------------|------------------------------------------|--------------------------------------------|
| Well pad proposed disturbance (acres): 0  | Well pad interim reclamation (acres): 0  | Well pad long term disturbance (acres): 0  |
| Road proposed disturbance (acres): 0      | Road interim reclamation (acres): 0      | Road long term disturbance (acres): 0      |
| Powerline proposed disturbance (acres): 0 | Powerline interim reclamation (acres): 0 | Powerline long term disturbance (acres): 0 |
| Pipeline proposed disturbance (acres): 0  | Pipeline interim reclamation (acres): 0  | Pipeline long term disturbance (acres): 0  |
| Other proposed disturbance (acres): 0     | Other interim reclamation (acres): 0     | Other long term disturbance (acres): 0     |
| Total proposed disturbance: 0             | Total interim reclamation: 0             | Total long term disturbance: 0             |

**Disturbance Comments:** All Interim and Final reclamation must be within 6 months. Interim must be within 6 months of completion and final within 6 months of abandonment plugging. Dual pad operations may alter timing.

**Reconstruction method:** In areas planned for interim reclamation, all the surfacing material will be removed and returned to the original mineral pit or recycled to repair or build roads and well pads. Areas planned for interim reclamation will be recontoured to the original contour if feasible, or if not feasible, to an

**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H

interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.

**Topsoil redistribution:** Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations including cuts and fills. To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used. Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.

**Soil treatment:** Re-seed according to BLM standards. All reclaimed areas will be monitored periodically to ensure that revegetation occurs, that the area is not redistributed, and that erosion is controlled.

**Existing Vegetation at the well pad:** Grass, forbs, and small woody vegetation, such as mesquite will be excavated as the topsoil is removed. Large woody vegetation will be stripped and stored separately and respreads evenly on the site following topsoil resspreading. Topsoil depth is defined as the top layer of soil that contains 80% of the roots. In areas to be heavily disturbed, the top 6 inches of soil material, will be stripped and stockpiled on the perimeter of the well location and along the perimeter of the access road to control run-on and run-off, to keep topsoil viable, and to make redistribution of topsoil more efficient during interim reclamation. Stockpiled topsoil should include vegetative material. Topsoil will be clearly segregated and stored separately from subsoils.

#### **Existing Vegetation at the well pad**

**Existing Vegetation Community at the road:** All disturbed areas, including roads, pipelines, pads, will be recontoured to the contour existing prior to the initial construction or a contour that blends indistinguishably with the surrounding landscape. Topsoil that was spread over the interim reclamation areas will be stockpiled prior to recontouring. The topsoil will be redistributed evenly over the entire disturbed site to ensure successful revegetation.

#### **Existing Vegetation Community at the road**

**Existing Vegetation Community at the pipeline:** All disturbed areas, including roads, pipelines, pads, will be recontoured to the contour existing prior to the initial construction or a contour that blends indistinguishably with the surrounding landscape. Topsoil that was spread over the interim reclamation areas will be stockpiled prior to recontouring. The topsoil will be redistributed evenly over the entire disturbed site to ensure successful revegetation.

#### **Existing Vegetation Community at the pipeline**

**Existing Vegetation Community at other disturbances:** All disturbed areas, including roads, pipelines, pads, will be recontoured to the contour existing prior to the initial construction or a contour that blends indistinguishably with the surrounding landscape. Topsoil that was spread over the interim reclamation areas will be stockpiled prior to recontouring. The topsoil will be redistributed evenly over the entire disturbed site to ensure successful revegetation.

#### **Existing Vegetation Community at other disturbances**

**Non native seed used?** N

**Non native seed description:**

**Seedling transplant description:**

**Will seedlings be transplanted for this project?** N

**Seedling transplant description attachment:**

**Will seed be harvested for use in site reclamation?** N

**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H**Seed harvest description:****Seed harvest description attachment:****Seed****Seed Table****Seed Summary****Total pounds/Acre:****Seed Type****Pounds/Acre****Seed reclamation****Operator Contact/Responsible Official****First Name:****Last Name:****Phone:****Email:****Seedbed prep:****Seed BMP:****Seed method:****Existing invasive species?** N**Existing invasive species treatment description:****Existing invasive species treatment**

**Weed treatment plan description:** All reclaimed areas will be monitored periodically to ensure that revegetation occurs, that the area is not redisturbed, erosion is controlled, and free of noxious weeds. Weeds will be treated if found.

**Weed treatment plan**

**Monitoring plan description:** Reclamation will be completed within 6 months of well plugging. All reclaimed areas will be monitored periodically to ensure that revegetation occurs, that the area is not redisturbed, erosion is controlled, and free of noxious weeds.

**Monitoring plan****Success standards:** N/A**Pit closure description:** N/A**Pit closure attachment:****Section 11 - Surface**



**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H**Disturbance type:** WELL PAD**Describe:****Surface Owner:** PRIVATE OWNERSHIP**Other surface owner description:****BIA Local Office:****BOR Local Office:****COE Local Office:****DOD Local Office:****NPS Local Office:****State Local Office:****Military Local Office:****USFWS Local Office:****Other Local Office:****USFS Region:****USFS Forest/Grassland:****USFS Ranger District:****Surface use plan certification:** NO**Surface use plan certification document:****Surface access agreement or bond:** AGREEMENT**Surface Access Agreement Need description:** SUA - Quail Ranch, LLC**Surface Access Bond BLM or Forest Service:****BLM Surface Access Bond number:****USFS Surface access bond number:**

## Section 12 - Other

**Right of Way needed?** N**Use APD as ROW?****ROW Type(s):****ROW**

**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H

**SUPO Additional Information:** Onsite meeting was conducted on 12/19/2023 We plan to use eight 12-inch lay flat hoses to transport water and eight 4-inch polylines or layflay for drilling and frac operations. The well will be produced using gas lift as the artificial lift method. Produced water will be transported via pipeline to the EOG produced water gathering system. Roads: Pad A 102-103, 202-203, 302-305, 402-403, 502-503, 592-593, PH1-2: 1,834.30 or 111.17 rods Pad B 101, 201, 301, 401, 501, 591, PH3-4: 6,752.30 or 409.20 rods Grackle 26 CTB 1,557.70 or 94.41 rods 6-inch Flowlines, Gas Lift and Fiber Optic: Pad A 102-103, 202-203, 302-305, 402-403, 502-503, 592-593, PH1-2: 1,408.85 or 85.38 rods Pad B Fee 101, 201, 301, 401, 501, 591, PH3-4: 3,627.70 or 219.86 rods Pad B State 101, 201, 301, 401, 501, 591, PH3-4: 864.18 or 52.37 rods 24-inch Produced Water: Total length 1,386.5 or 84.00 rods Section 26, T24-S, R34-E, on lease portion 1,386.5 or 84.00 rods rods Fee Surface 20-inch Gas Sales: Total length 9,246.13 or 560.38 rods Section 4, T24-S, R34-E, on lease portion 3,588.37 or 217.48 rods Fed Surface Section 33, T25-S, R34-E 347.45 or 21.06 rods Fed Surface Section 32, T25-S, R34-E 5310.31 or 321.84 rods State Surface 3 Phase 14.4 Primary Voltage Overhead Electric Lines: Total length 93.6 or 5.70 Section 26, T24-S, R34-E, on lease portion 93.6 or 5.70 rods Fee Surface 8 Gas Lift Pipeline: Total length 7,263.00 or 440.20 rods Section 26, T24-S, R34-E, on lease portion 7,263.00 or 440.20 rods Fee Surface 8 Crude Oil Pipeline: Total length 6,549.70 or 397.00 rods Section 26, T24-S, R34-E, on lease portion 6,507.40 or 394.4 rods Fee Surface Section 26, T24-S, R34-E, on lease portion 42.3 or 2.6 rods Fed Surface Caliche Pit Options: Quail Ranch Battle Axe Pit- SE/4 Section 26, Range 34E, Township 24 South, Lea County, NM. Fresh and Reuse Options: EOG McCloy Freshwater Pit in Section 31, Range 34 East, Township 25 South. EOG Klondike Reuse Pit in Section 23, Range 34 East, Township 25 South. EOG will install up to 30-inch culverts crossing proposed lease roads in thirteen locations identified on the attached map. See the coordinates below: Culvert #1 - 3211'9.61"N, - 10326'13.97"W Culvert #2 - 3211'1.95"N, - 10326'9.11"W Culvert #3 - 3210'55.37"N, - 10326'11.06"W Culvert #4 - 3210'52.94"N, - 10326'15.47"W Culvert #5 - 3210'41.94"N, - 10326'26.29"W Culvert #6 - 3210'41.93"N, - 10326'24.56"W Culvert #7 - 3210'46.28"N, - 10326'24.52"W EOG will install 3 cattleguards at 3 locations on the proposed lease roads. See coordinates below. Cattleguard #1- 3211'11.82", -10326'9.69"W Cattleguard #2- 3210'41.93"N, - 10326'25.18"W

**Use a previously conducted onsite?** N**Previous Onsite information:****Other SUPO**

1\_Grackle\_26\_East\_Fed\_Com\_Location\_502H\_20240409125353.pdf

REV\_SUPO\_GRACKLE\_26\_EAST\_FED\_COM\_502H\_20240409125359.pdf



**24S 34E**

Co Rd 2-B

State Hwy 128

Battle Axe Rd

Madera Rd

J-2

Co Rd 2

**GRACKLE 26 EAST FED COM #502H**

**LEACO.**

**25S 34E**

**DETAIL VIEW**  
**SCALE: 1" = 500'**

PROPOSED ACCESS  
RD ±233'  
**PROPOSED PAD**

502H

PROPOSED ACCESS  
RD ±371'

258'

395'

594'

DISTANCE & DIRECTION:  
FROM THE INTERSECTION OF NEW MEXICO STATE ROAD 128 AND COUNTY ROAD 2,  
TRAVEL SOUTHWEST ON COUNTY ROAD 2  $\pm 1.8$  MILES; THENCE NORTH (RIGHT) ONTO AN  
EXISTING LEASE ROAD  $\pm 288$  FEET; THENCE EAST (RIGHT) ON AN EXISTING LEASE  
ROAD  $\pm 347$  FEET; THENCE EAST (RIGHT) ON A PROPOSED ACCESS ROAD  $\pm 371$  FEET  
TO THE EDGE OF PAD.  
(PROPOSED ACCESS ROAD LENGTH =  $\pm 371'$ )


-  Proposed Well
-  Proposed Access Road
-  Proposed Pad
-  Road
-  Section
-  Township




JOB No.: EOG B200054

NOTE:  
ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE  
FOLLOWING COORDINATE SYSTEM: NAD83 NEW MEXICO STATE PLANE, EAST ZONE, U.S. SURVEY FEET

DISCLAIMER:  
THIS PLOT DOES NOT REPRESENT A MONUMENTED LAND SURVEY AND SHOULD NOT BE RELIED UPON  
TO DETERMINE BOUNDARY LINES, PROPERTY OWNERSHIP OR OTHER PROPERTY INTERESTS.



# SECTION 35, TOWNSHIP 24 SOUTH, RANGE 34 EAST, LEA COUNTY, NEW MEXICO

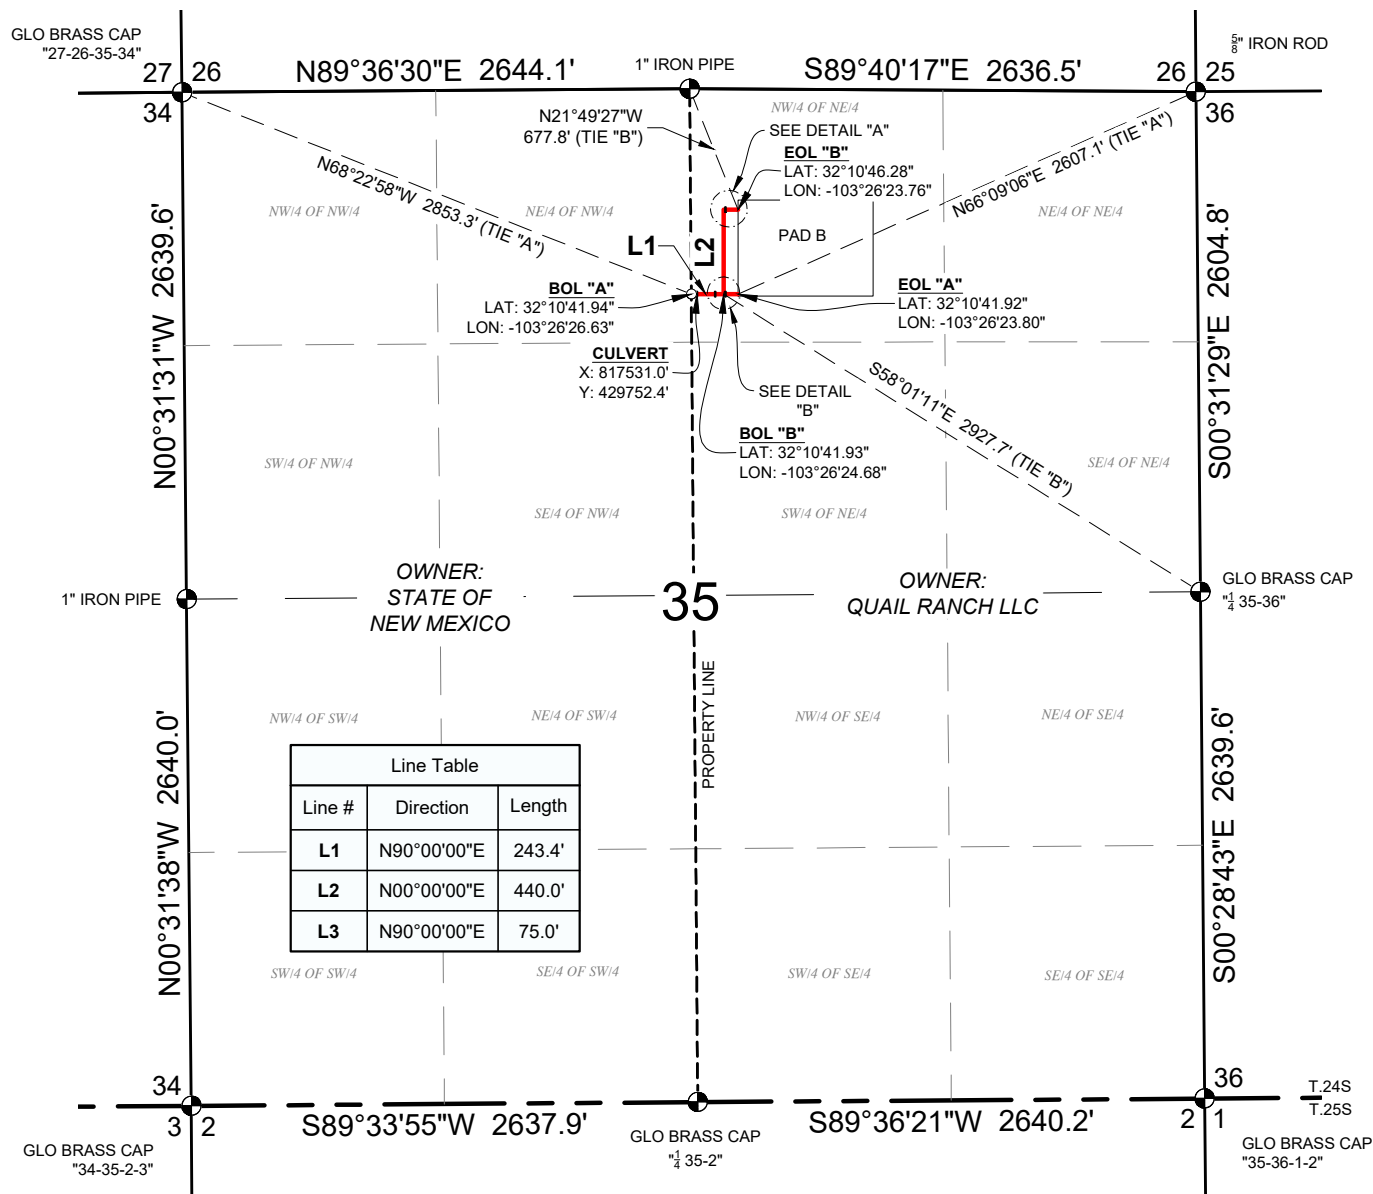



| Line Table |             |        |
|------------|-------------|--------|
| Line #     | Direction   | Length |
| L1         | N90°00'00"E | 243.4' |
| L2         | N00°00'00"E | 440.0' |
| L3         | N90°00'00"E | 75.0'  |

- PROPOSED ACCESS ROADS
- POINT FOR BEGIN/END OR ANGLE POINT
- FOUND MONUMENT AS SHOWN

\*SEE SHEET 2 OF 2 FOR LEGAL DESCRIPTIONS &amp; DETAIL VIEWS

## NOTES:

- BEARINGS, COORDINATES, AND DISTANCES SHOWN HEREON ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, NAD 83- 2011 (EPOCH 2010) FRAMEWORK, AS DERIVED BY OPUS SOLUTION. THE ELEVATIONS SHOWN HEREON AREA BASED ON NAVD 88.
- LAND OWNERSHIP INFORMATION REFLECTED HEREON WAS PROVIDED BY CLIENT AND/OR OBTAINED FROM PUBLIC DOMAIN DATA, NO INDEPENDENT OWNERSHIP SEARCH WAS PERFORMED BY ASCENT



I, TIM C. PAPPAS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 21209, DO HEREBY CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT PLAT OF A PROPOSED EASEMENT.

21 FEB 2024

TIM C. PAPPAS, N.M. P.L.S.

No.21209

SURVEY DATE: 02/09/2024  
JOB NO.: B20.EOG.0054

DRAFT: JC  
SHEET: 1 OF 2



**GRACKLE 26 FED COM PROPOSED ACCESS ROADS REV 1**  
SEC. 35, T-24-S, R-34-E, N.M.P.M.,  
LEA COUNTY, NEW MEXICO



PETROLEUM FIELD SERVICES, LLC  
DBA: ASCENT GEOMATICS  
SOLUTIONS  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128

# SECTION 35, TOWNSHIP 24 SOUTH, RANGE 34 EAST, LEA COUNTY, NEW MEXICO

## GRACKLE 26 FED COM PROPOSED ACCESS ROADS

### CENTERLINE "A" DESCRIPTION

A STRIP OF LAND, 30 FEET IN WIDTH SITUATED IN THE NORTHWEST QUARTER OF THE NORTHEAST QUARTER OF SECTION 35, TOWNSHIP 24 SOUTH, RANGE 34 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO, AS CONVEYED TO QUAIL RANCH LLC, AND BEING 15 FEET ON EACH SIDE OF THE SURVEY OF CENTERLINE AS SHOWN HEREON AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS;

**BEGINNING** AT A POINT, FROM WHICH A GLO BRASS CAP FOUND AND ACCEPTED AS THE NORTHWEST CORNER OF SAID SECTION 35 BEARS N68°22'58"W, 2853.3 FEET, FOR THE BEGINNING OF THE HEREIN DESCRIBED CENTERLINE;


**THENCE** THE FOLLOWING ONE (1) COURSE, N90°00'00"E, 243.4 FEET TO A POINT, BEING THE END OF THE DESCRIBED CENTERLINE, FROM WHICH A 1" IRON ROD FOUND AND ACCEPTED AS THE NORTHEAST CORNER OF SAID SECTION 35 BEARS N66°09'06"E, 2607.1 FEET, IN ALL BEING 243.4 FEET OR 14.8 RODS IN LENGTH.

### CENTERLINE "B" DESCRIPTION

A STRIP OF LAND, 30 FEET IN WIDTH SITUATED IN THE NORTHWEST QUARTER OF THE NORTHEAST QUARTER OF SECTION 35, TOWNSHIP 24 SOUTH, RANGE 34 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO, AS CONVEYED TO QUAIL RANCH LLC, AND BEING 15 FEET ON EACH SIDE OF THE SURVEY OF CENTERLINE AS SHOWN HEREON AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS;

**BEGINNING** AT A POINT, FROM WHICH A GLO BRASS CAP FOUND AND ACCEPTED AS THE EAST QUARTER CORNER OF SAID SECTION 35 BEARS S58°01'11"E, 2927.7 FEET, FOR THE BEGINNING OF THE HEREIN DESCRIBED CENTERLINE;

**THENCE** THE FOLLOWING TWO (2) COURSES, N00°00'00"E, 440.0 FEET, N90°00'00"E, 75.0 FEET TO A POINT, BEING THE END OF THE DESCRIBED CENTERLINE, FROM WHICH A 1" IRON PIPE FOUND AND ACCEPTED AS THE NORTH QUARTER CORNER OF SAID SECTION 35 BEARS N21°49'27"W, 677.8 FEET, IN ALL BEING 515.0 FEET OR 31.2 RODS IN LENGTH.

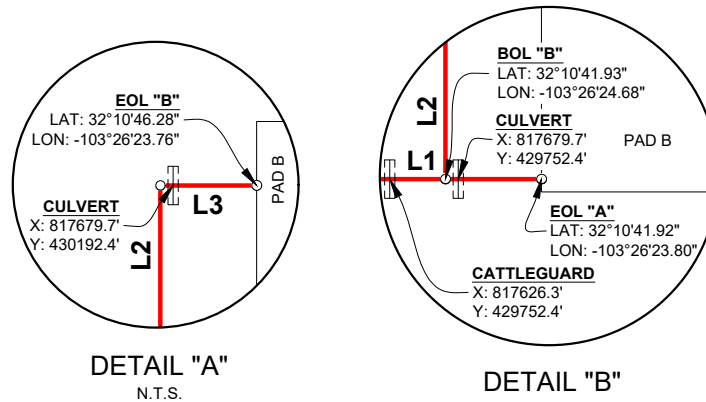

DETAIL "A"  
N.T.S.


DETAIL "B"  
N.T.S.

- PROPOSED ACCESS ROADS  
○ POINT FOR BEGIN/END OR ANGLE POINT


\*SEE SHEET 1 OF 2 FOR MORE INFORMATION

#### NOTES:

- BEARINGS, COORDINATES, AND DISTANCES SHOWN HEREON ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, NAD 83- 2011 (EPOCH 2010) FRAMEWORK, AS DERIVED BY OPUS SOLUTION. THE ELEVATIONS SHOWN HEREON AREA BASED ON NAVD 88.
- LAND OWNERSHIP INFORMATION REFLECTED HEREON WAS PROVIDED BY CLIENT AND/OR OBTAINED FROM PUBLIC DOMAIN DATA, NO INDEPENDENT OWNERSHIP SEARCH WAS PERFORMED BY ASCENT



TYPICAL  
RIGHT-OF-WAY EASEMENT



I, TIM C. PAPPAS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 21209, DO HEREBY CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT PLAT OF A PROPOSED EASEMENT.

21 FEB 2024

TIM C. PAPPAS, N.M. P.L.S.

No.21209

SURVEY DATE: 02/09/2024

DRAFT: JC

JOB NO.: B20.EOG.0054

SHEET: 2 OF 2



**GRACKLE 26 FED COM PROPOSED ACCESS ROADS REV 1**  
SEC. 35, T-24-S, R-34-E, N.M.P.M.,  
LEA COUNTY, NEW MEXICO




PETROLEUM FIELD SERVICES, LLC  
DBA: ASCENT GEOMATICS  
SOLUTIONS  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128



# EXHIBIT 3

## 1 MILE RADIUS BUFFER MAP

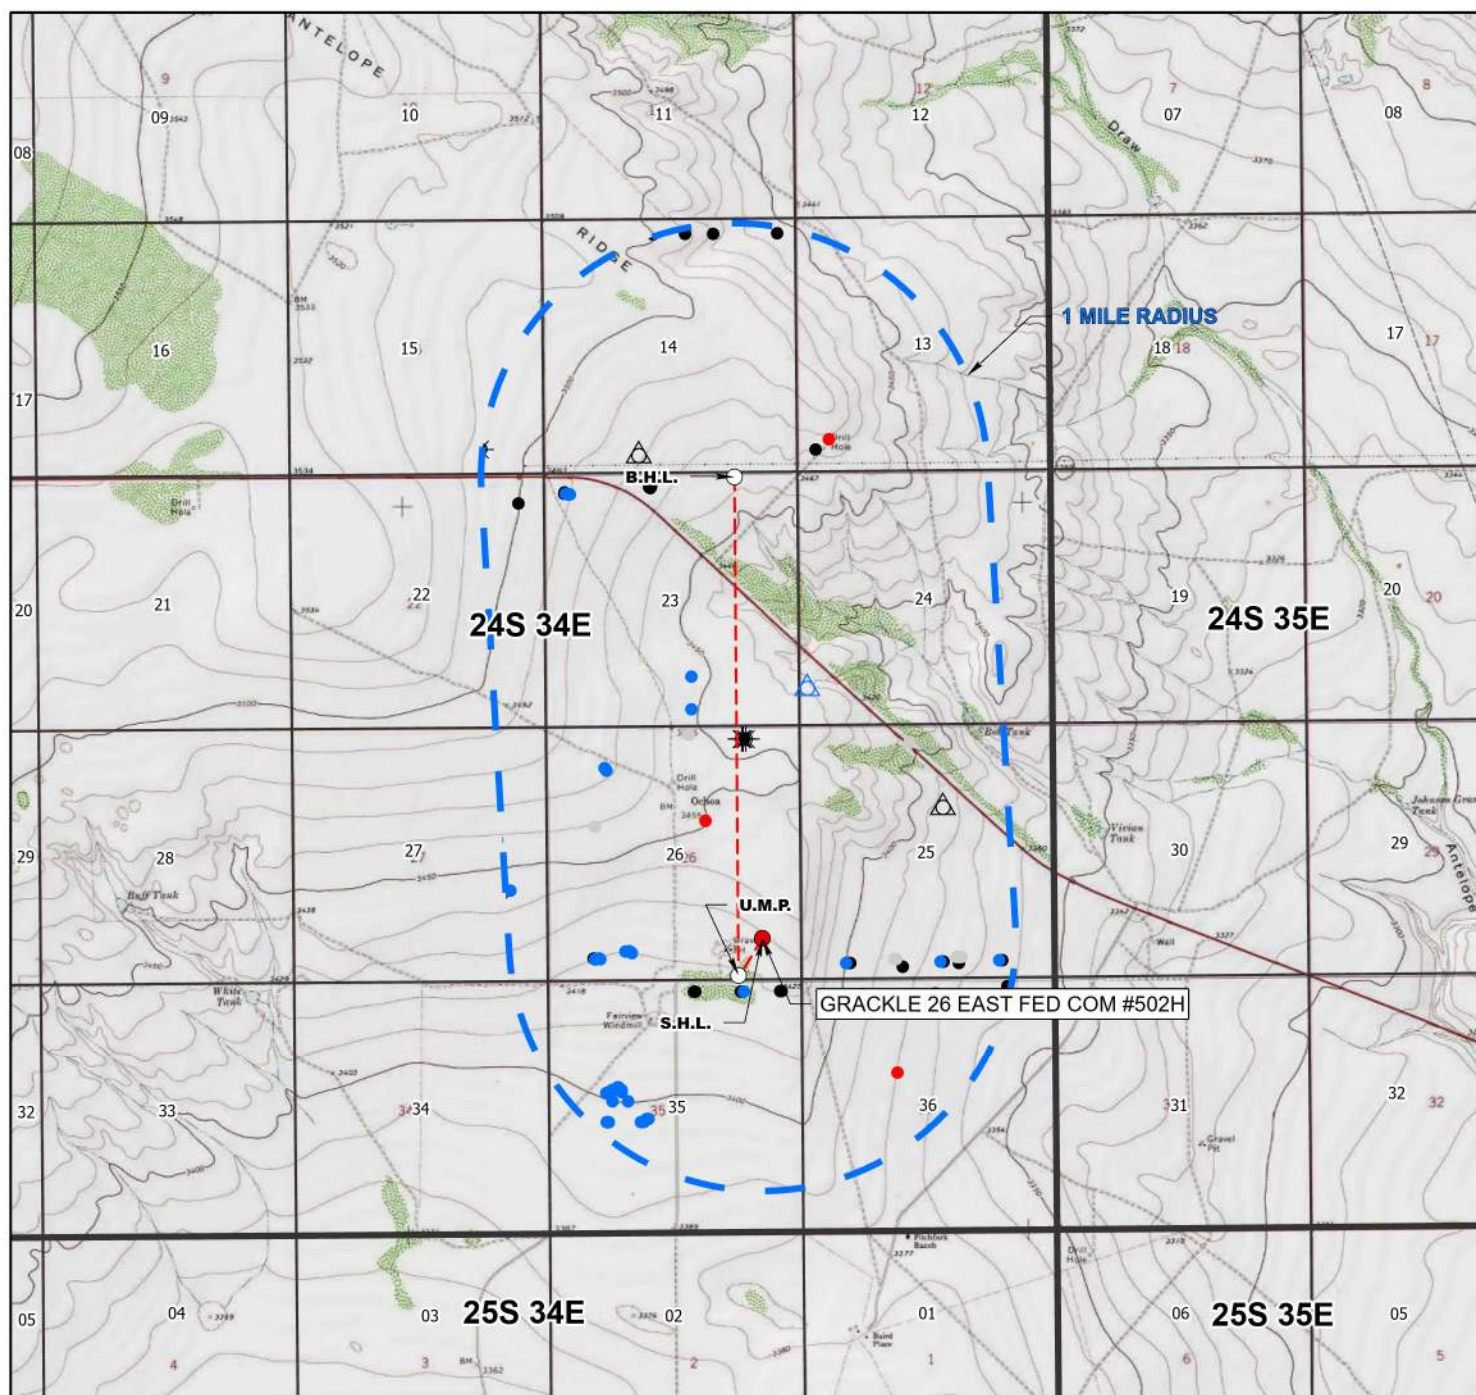

LEASE NAME & WELL NO.: GRACKLE 26 EAST FED COM #502H  
 LATITUDE: N 32.183595 LONG: W 103.434825 ELEVATION: 3429'

SECTION: 26 TWP: 24S RGE: 34E SURVEY: N.M.P.M.  
 COUNTY: LEA STATE: NM

DESCRIPTION: 876' FSL & 808' FEL

- |                          |                                |
|--------------------------|--------------------------------|
| ● S.H.L.                 | ● Oil, New                     |
| ○ U.M.P.; L.M.P.; B.H.L. | ● Oil, Plugged                 |
| --- Bore Line            | △ Salt Water Injection, Active |
| ☼ Gas, Active            | △ Salt Water Injection, New    |
| ● Oil, Active            | □ Section                      |
| ● Oil, Cancelled         | □ Township                     |




JOB No.: EOG B200054

NOTE:  
 ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE FOLLOWING COORDINATE SYSTEM: NAD83 NEW MEXICO STATE PLANE, EAST ZONE, U.S. SURVEY FEET

DISCLAIMER:  
 THIS PLOT DOES NOT REPRESENT A MONUMENTED LAND SURVEY AND SHOULD NOT BE RELIED UPON TO DETERMINE BOUNDARY LINES, PROPERTY OWNERSHIP OR OTHER PROPERTY INTERESTS.


Released to Imaging: 9/19/2025 10:17:10 AM



## EXHIBIT 5

SECTIONS 26 & 35, TOWNSHIP 24 SOUTH, RANGE 34 EAST,  
LEA COUNTY, NEW MEXICO

# GRACKLE 26 EAST FED COM INFRASTRUCTURE MAP

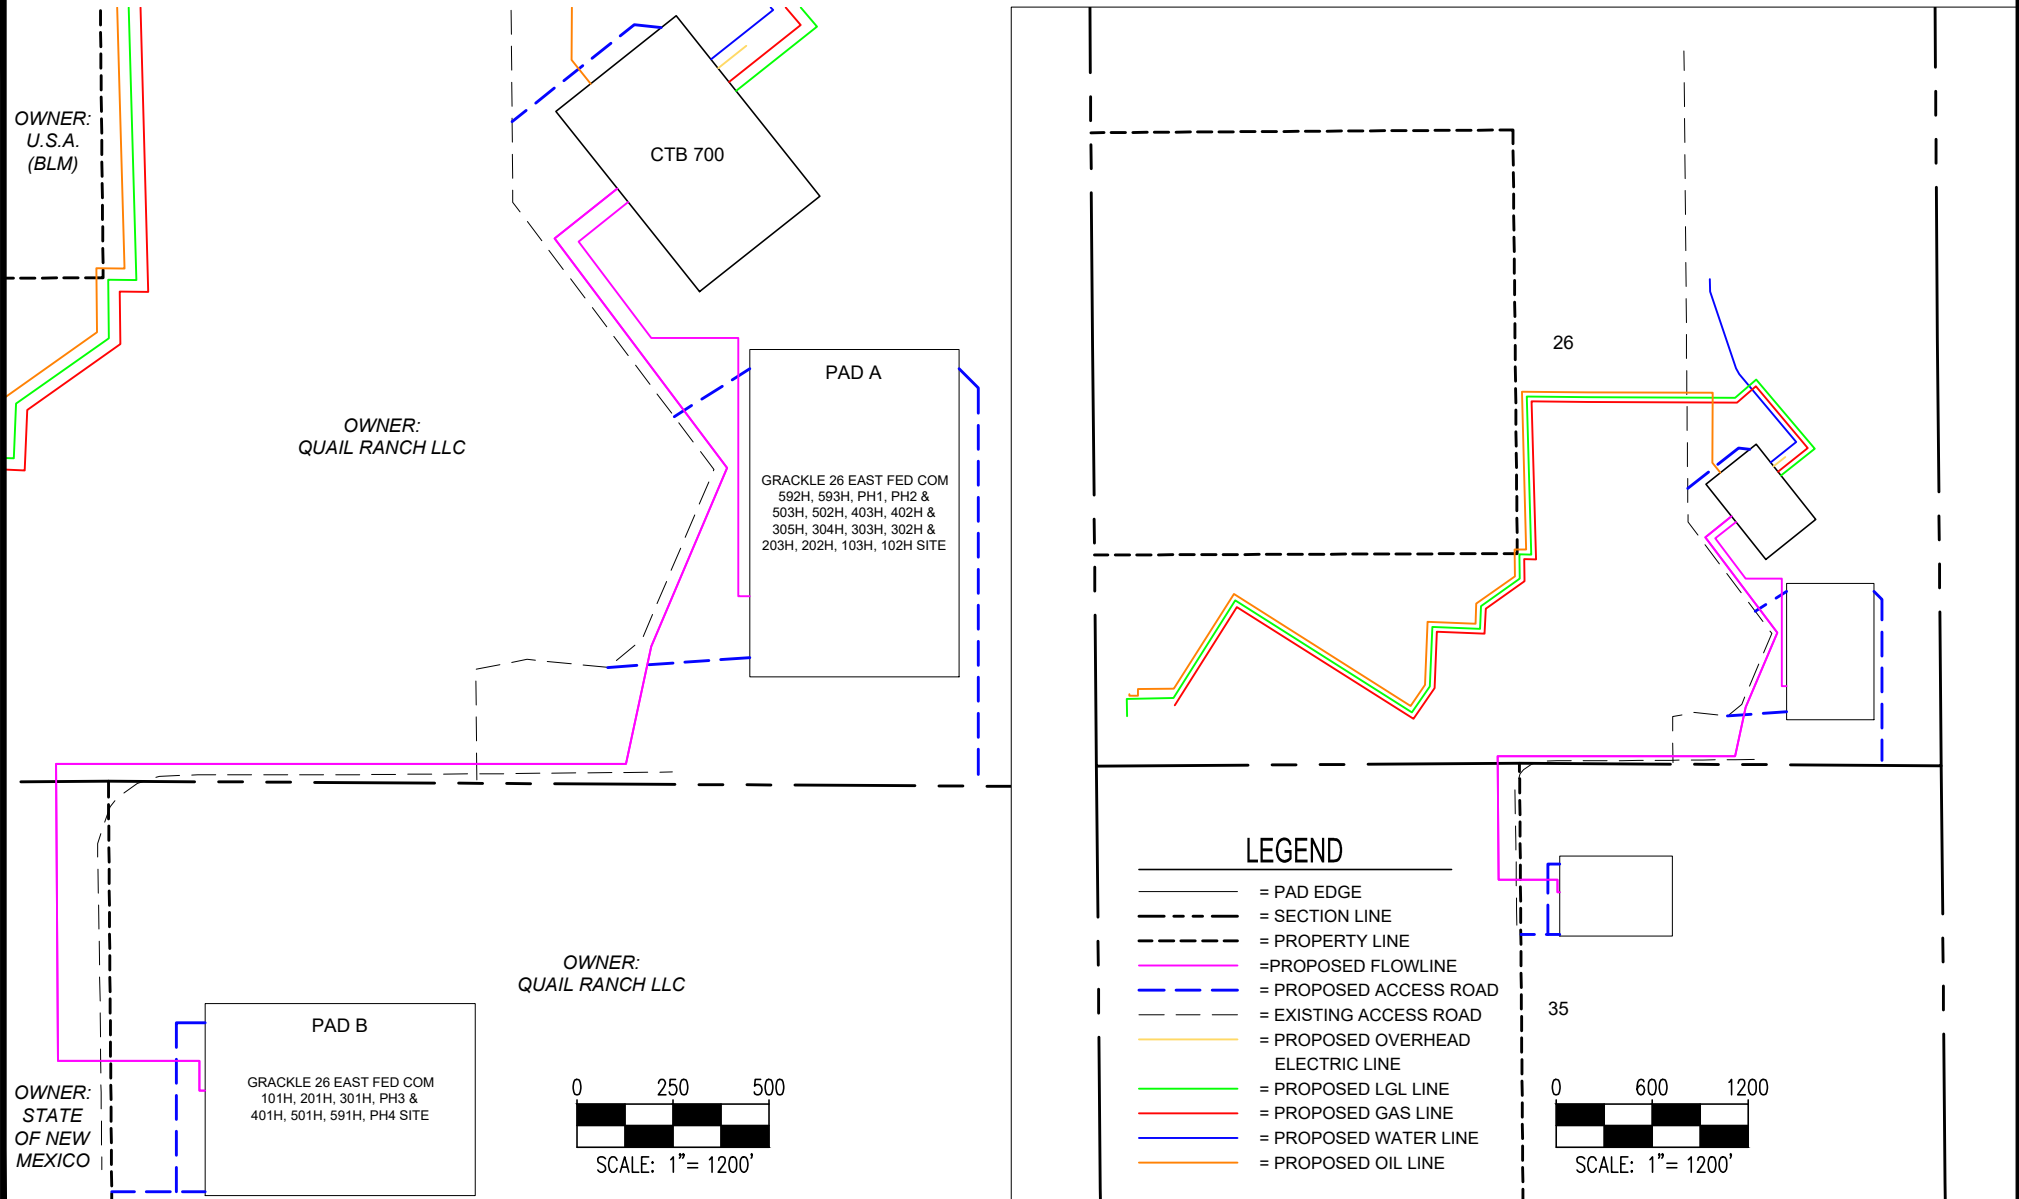

8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128  
www.ascentgeomatics.com

DRAFTED DATE:  
03/06/2024  
FILE:  
EOG\_GRACKLE\_26\_EAST\_FED\_COM  
FLOWLINE\_DETAIL  
BY:  
JC  
CHECKED:  
JLE

PROJECT NAME:  
GRACKLE 26 EAST FED COM INFRASTRUCTURE MAP  
SURFACE LOCATION:  
SEC. 26 & 35, T24S, R34E, N.M.P.M.  
LEA COUNTY, NEW MEXICO

REV. 0


PROJECT NUMBER:  
EOG\_B200054

PREPARED FOR:



eog resources

# SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, LEA COUNTY, NEW MEXICO

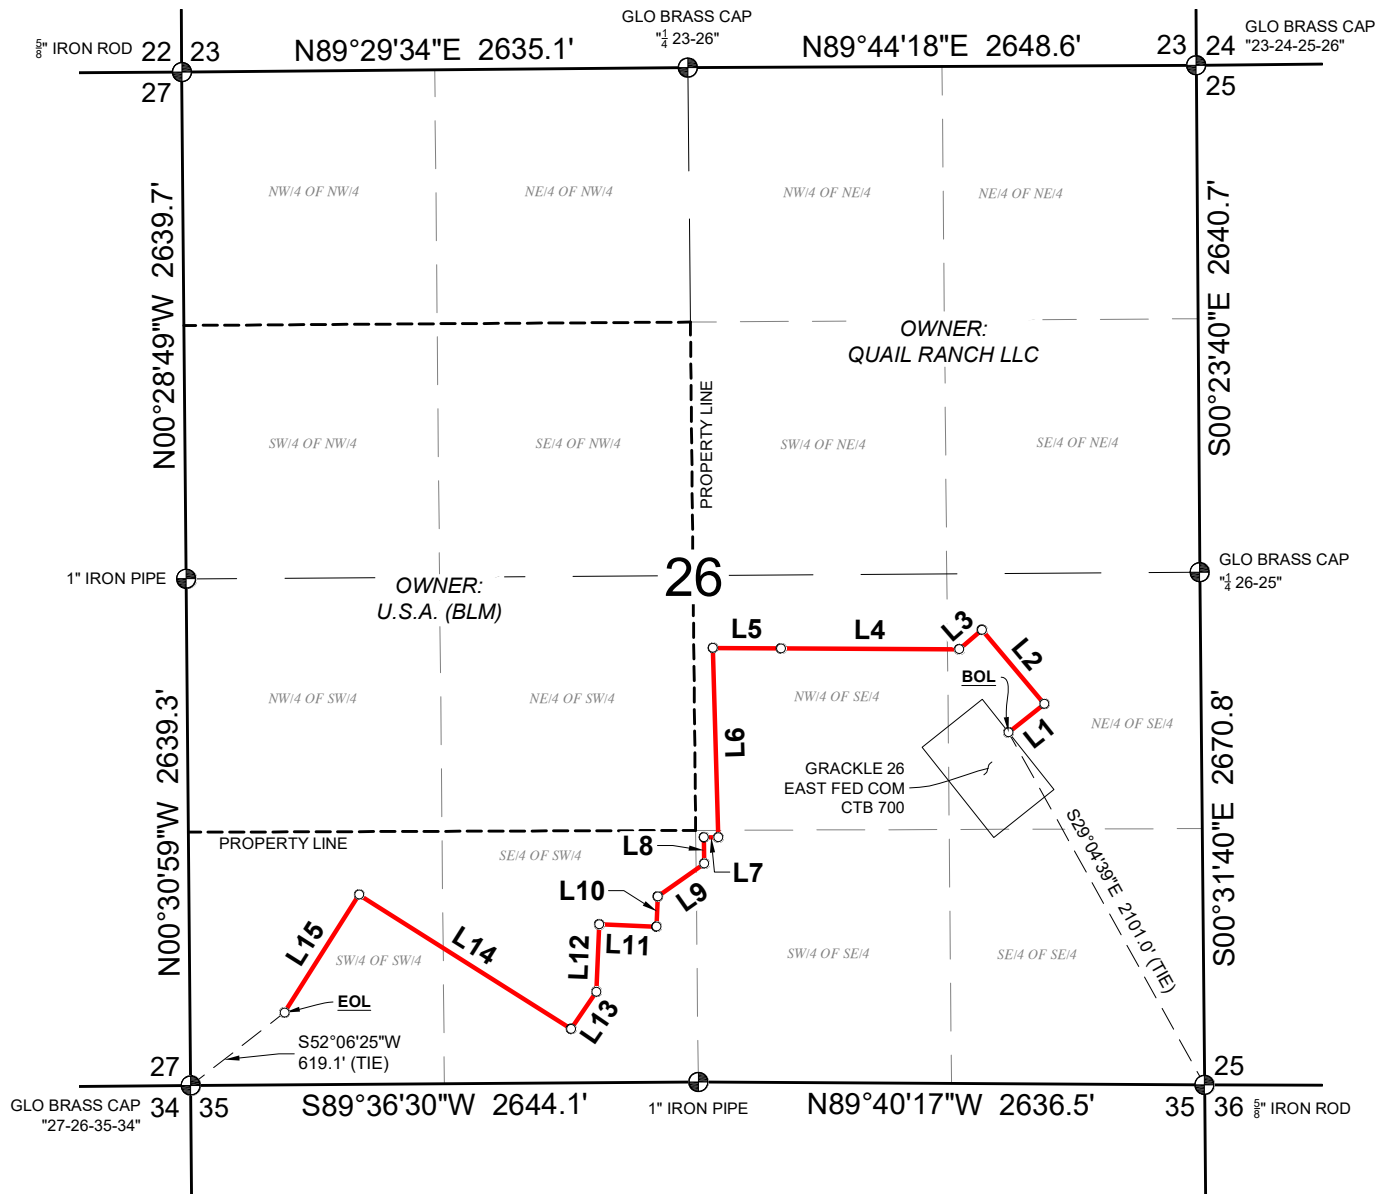

— PROPOSED GAS LINE



○ POINT FOR BEGIN/END OR ANGLE POINT

⊕ FOUND MONUMENT AS SHOWN

\*SEE SHEET 2 OF 2 FOR LEGAL DESCRIPTION & LINE TABLE.

## NOTES:

- BEARINGS, COORDINATES, AND DISTANCES SHOWN HEREON ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, NAD 83-2011 (EPOCH 2010) FRAMEWORK, AS DERIVED BY OPUS SOLUTION. THE ELEVATIONS SHOWN HEREON AREA BASED ON NAVD 88.
- LAND OWNERSHIP INFORMATION REFLECTED HEREON WAS PROVIDED BY CLIENT AND/OR OBTAINED FROM PUBLIC DOMAIN DATA, NO INDEPENDENT OWNERSHIP SEARCH WAS PERFORMED BY ASCENT



TYPICAL N.T.S.  
RIGHT-OF-WAY EASEMENT,  
TEMPORARY WORK SPACE  
CONFIGURATION



I, TIM C. PAPPAS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 21209, DO HEREBY CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT PLAT OF A PROPOSED EASEMENT.

18 FEB 2024

TIM C. PAPPAS, N.M. P.L.S.

No.21209

SURVEY DATE: 02/09/2024

JOB NO.: B20.EOG.0054

DRAFT: JC

SHEET: 1 OF 2



**GRACKLE 26 EAST FED COM PROPOSED GAS LINE**  
SEC. 26, T-24-S, R-34-E, N.M.P.M.,  
LEA COUNTY, NEW MEXICO



PETROLEUM FIELD SERVICES, LLC  
DBA: ASCENT GEOMATICS  
SOLUTIONS  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128

# SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, LEA COUNTY, NEW MEXICO

## GRACKLE 26 EAST FED COM PROPOSED GAS LINE CENTERLINE DESCRIPTION

A STRIP OF LAND, 30 FEET IN WIDTH SITUATED IN THE SOUTH HALF OF SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO, AS CONVEYED TO QUAIL RANCH LLC, AND BEING 15 FEET ON EACH SIDE OF THE SURVEY OF CENTERLINE AS SHOWN HEREON AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS;

**BEGINNING** AT A POINT, FROM WHICH A  $\frac{5}{8}$ " IRON ROD FOUND AND ACCEPTED AS THE SOUTHEAST CORNER OF SAID SECTION 26 BEARS S29°04'39"E, 2101.0 FEET, FOR THE BEGINNING OF THE HEREIN DESCRIBED CENTERLINE;

**THENCE** THE FOLLOWING FIFTEEN (15) COURSES, N51°31'01"E, 238.5 FEET, N40°04'39"W, 505.1 FEET, S49°08'07"W, 155.3 FEET, N89°44'36"W, 929.0 FEET, N89°33'16"W, 354.1 FEET, S01°35'25"E, 987.2 FEET, N89°20'38"W, 74.2 FEET, S00°34'30"E, 137.4 FEET, S54°47'03"W, 296.4 FEET, S02°20'59"W, 157.8 FEET, N87°39'01"W, 298.7 FEET, S02°20'59"W, 351.3 FEET, S34°27'20"W, 234.6 FEET, N57°39'01"W, 1306.1 FEET, S32°20'59"W, 726.6 FEET TO A POINT, BEING THE END OF THE DESCRIBED CENTERLINE, FROM WHICH A GLO BRASS CAP FOUND AND ACCEPTED AS THE SOUTHWEST CORNER OF SAID SECTION 26 BEARS S52°06'25"W, 619.1 FEET, IN ALL BEING 6752.3 FEET OR 409.2 RODS IN LENGTH.

| Line Table |             |         |
|------------|-------------|---------|
| Line #     | Direction   | Length  |
| L1         | N51°31'01"E | 238.5'  |
| L2         | N40°04'39"W | 505.1'  |
| L3         | S49°08'07"W | 155.3'  |
| L4         | N89°44'36"W | 929.0'  |
| L5         | N89°33'16"W | 354.1'  |
| L6         | S01°35'25"E | 987.2'  |
| L7         | N89°20'38"W | 74.2'   |
| L8         | S00°34'30"E | 137.4'  |
| L9         | S54°47'03"W | 296.4'  |
| L10        | S02°20'59"W | 157.8'  |
| L11        | N87°39'01"W | 298.7'  |
| L12        | S02°20'59"W | 351.3'  |
| L13        | S34°27'20"W | 234.6'  |
| L14        | N57°39'01"W | 1306.1' |
| L15        | S32°20'59"W | 726.6'  |

\*SEE SHEET 1 OF 2 FOR MORE INFORMATION

### NOTES:

- BEARINGS, COORDINATES, AND DISTANCES SHOWN HEREON ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, NAD 83- 2011 (EPOCH 2010) FRAMEWORK, AS DERIVED BY OPUS SOLUTION. THE ELEVATIONS SHOWN HEREON AREA BASED ON NAVD 88.
- LAND OWNERSHIP INFORMATION REFLECTED HEREON WAS PROVIDED BY CLIENT AND/OR OBTAINED FROM PUBLIC DOMAIN DATA, NO INDEPENDENT OWNERSHIP SEARCH WAS PERFORMED BY ASCENT



I, TIM C. PAPPAS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 21209, DO HEREBY CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT PLAT OF A PROPOSED EASEMENT.

18 FEB 2024

TIM C. PAPPAS, N.M. P.L.S.

No.21209

SURVEY DATE: 02/09/2024  
JOB NO.: B20.EOG.0054

DRAFT: JC  
SHEET: 2 OF 2




**GRACKLE 26 EAST FED COM PROPOSED GAS LINE**  
SEC. 26, T-24-S, R-34-E, N.M.P.M.,  
LEA COUNTY, NEW MEXICO



PETROLEUM FIELD SERVICES, LLC  
DBA: ASCENT GEOMATICS  
SOLUTIONS  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128



# SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, LEA COUNTY, NEW MEXICO

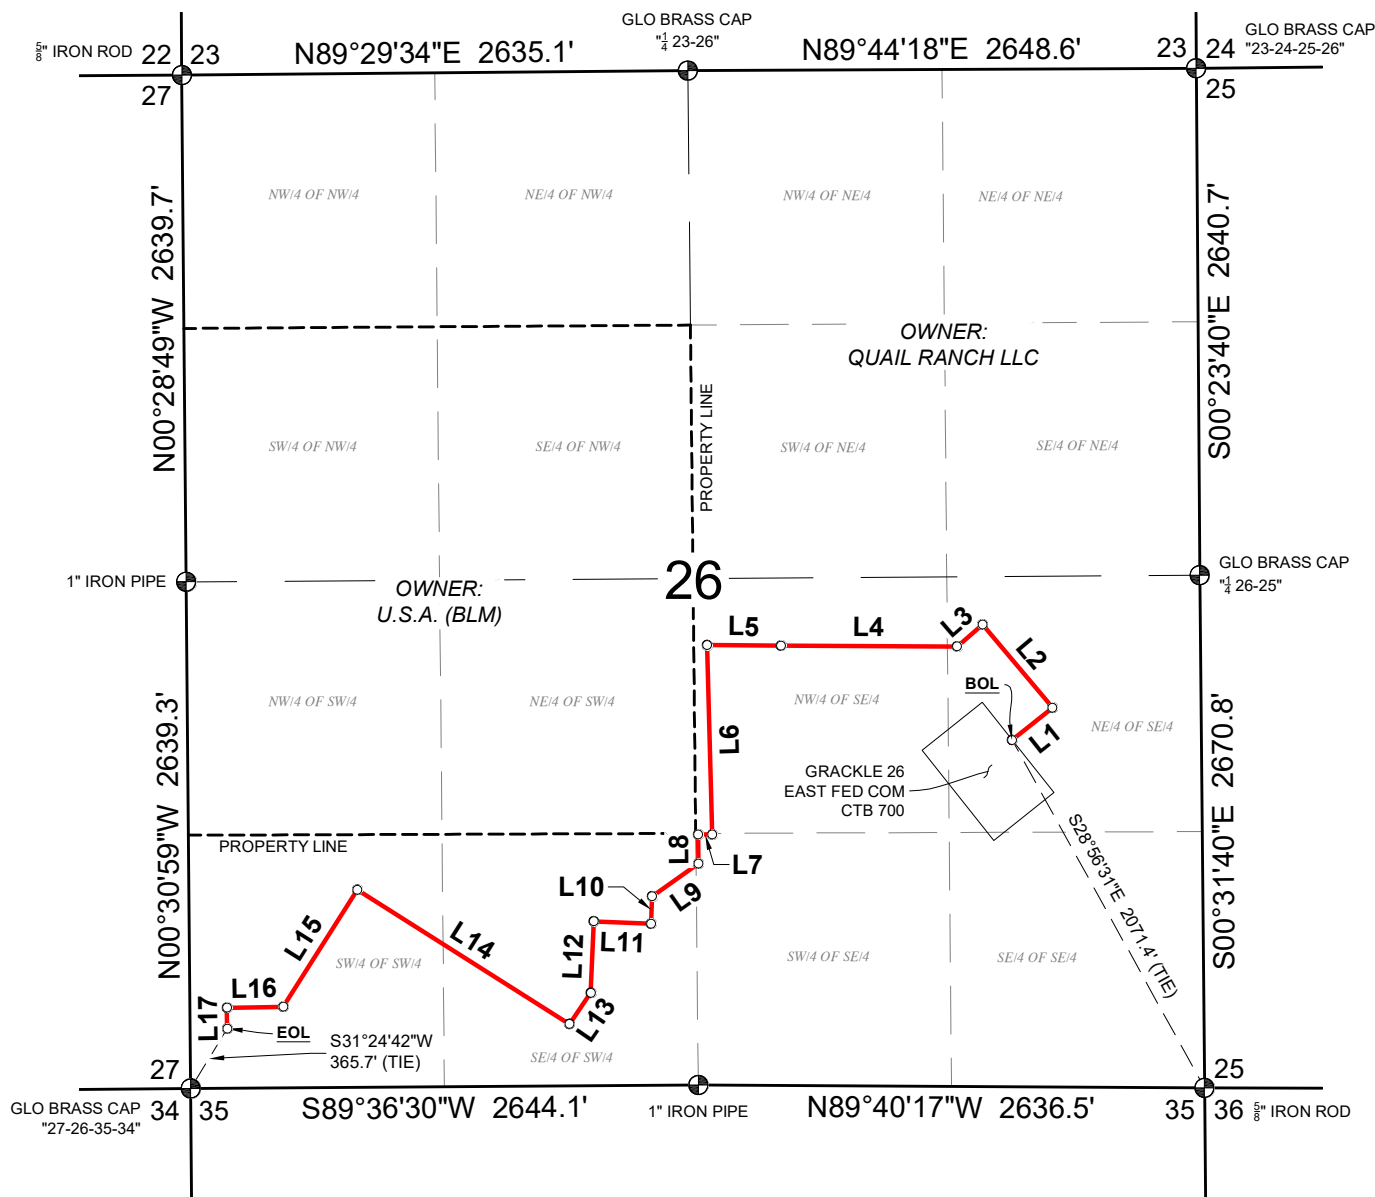

— PROPOSED LGL LINE



○ POINT FOR BEGIN/END OR ANGLE POINT

⊕ FOUND MONUMENT AS SHOWN

\*SEE SHEET 2 OF 2 FOR LEGAL DESCRIPTION & LINE TABLE.

## NOTES:

- BEARINGS, COORDINATES, AND DISTANCES SHOWN HEREON ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, NAD 83-2011 (EPOCH 2010) FRAMEWORK, AS DERIVED BY OPUS SOLUTION. THE ELEVATIONS SHOWN HEREON AREA BASED ON NAVD 88.
- LAND OWNERSHIP INFORMATION REFLECTED HEREON WAS PROVIDED BY CLIENT AND/OR OBTAINED FROM PUBLIC DOMAIN DATA, NO INDEPENDENT OWNERSHIP SEARCH WAS PERFORMED BY ASCENT



TYPICAL N.T.S.  
RIGHT-OF-WAY EASEMENT,  
TEMPORARY WORK SPACE  
CONFIGURATION



I, TIM C. PAPPAS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 21209, DO HEREBY CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT PLAT OF A PROPOSED EASEMENT.

18 FEB 2024

TIM C. PAPPAS, N.M. P.L.S.

No. 21209

SURVEY DATE: 02/09/2024

JOB NO.: B20.EOG.0054

DRAFT: JC  
SHEET: 1 OF 2



**GRACKLE 26 EAST FED COM PROPOSED LGL LINE**  
SEC. 26, T-24-S, R-34-E, N.M.P.M.,  
LEA COUNTY, NEW MEXICO



PETROLEUM FIELD SERVICES, LLC  
DBA: ASCENT GEOMATICS  
SOLUTIONS  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128

# SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, LEA COUNTY, NEW MEXICO

## GRACKLE 26 EAST FED COM PROPOSED LGL LINE CENTERLINE DESCRIPTION

A STRIP OF LAND, 30 FEET IN WIDTH SITUATED IN THE SOUTH HALF OF SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO, AS CONVEYED TO QUAIL RANCH LLC, AND BEING 15 FEET ON EACH SIDE OF THE SURVEY OF CENTERLINE AS SHOWN HEREON AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS;

**BEGINNING** AT A POINT, FROM WHICH A  $\frac{5}{8}$ " IRON ROD FOUND AND ACCEPTED AS THE SOUTHEAST CORNER OF SAID SECTION 26 BEARS S28°56'31"E, 2071.4 FEET, FOR THE BEGINNING OF THE HEREIN DESCRIBED CENTERLINE;

**THENCE** THE FOLLOWING SEVENTEEN (17) COURSES, N51°31'01"E, 269.3 FEET, N40°04'39"W, 566.4 FEET, S49°08'07"W, 174.4 FEET, N89°44'36"W, 917.7 FEET, N89°33'16"W, 385.1 FEET, S01°35'25"E, 987.1 FEET, N89°20'38"W, 73.6 FEET, S00°34'30"E, 152.3 FEET, S54°47'03"W, 295.5 FEET, S02°20'59"W, 142.6 FEET, N87°39'01"W, 298.7 FEET, S02°20'59"W, 372.7 FEET, S34°27'20"W, 197.0 FEET, N57°39'01"W, 1307.2 FEET, S32°20'59"W, 721.8 FEET, S88°58'50"W, 293.2 FEET, S01°01'10"E, 108.4 FEET, TO A POINT, BEING THE END OF THE DESCRIBED CENTERLINE, FROM WHICH A GLO BRASS CAP FOUND AND ACCEPTED AS THE SOUTHWEST CORNER OF SAID SECTION 26 BEARS S31°24'42"W, 365.7 FEET, IN ALL BEING 7263.0 FEET OR 440.2 RODS IN LENGTH.

| Line Table |             |         |
|------------|-------------|---------|
| Line #     | Direction   | Length  |
| L1         | N51°31'01"E | 269.3'  |
| L2         | N40°04'39"W | 566.4'  |
| L3         | S49°08'07"W | 174.4'  |
| L4         | N89°44'36"W | 917.7'  |
| L5         | N89°33'16"W | 385.1'  |
| L6         | S01°35'25"E | 987.1'  |
| L7         | N89°20'38"W | 73.6'   |
| L8         | S00°34'30"E | 152.3'  |
| L9         | S54°47'03"W | 295.5'  |
| L10        | S02°20'59"W | 142.6'  |
| L11        | N87°39'01"W | 298.7'  |
| L12        | S02°20'59"W | 372.7'  |
| L13        | S34°27'20"W | 197.0'  |
| L14        | N57°39'01"W | 1307.2' |
| L15        | S32°20'59"W | 721.8'  |
| L16        | S88°58'50"W | 293.2'  |
| L17        | S01°01'10"E | 108.4'  |

\*SEE SHEET 1 OF 2 FOR MORE INFORMATION

### NOTES:

- BEARINGS, COORDINATES, AND DISTANCES SHOWN HEREON ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, NAD 83- 2011 (EPOCH 2010) FRAMEWORK, AS DERIVED BY OPUS SOLUTION. THE ELEVATIONS SHOWN HEREON AREA BASED ON NAVD 88.
- LAND OWNERSHIP INFORMATION REFLECTED HEREON WAS PROVIDED BY CLIENT AND/OR OBTAINED FROM PUBLIC DOMAIN DATA, NO INDEPENDENT OWNERSHIP SEARCH WAS PERFORMED BY ASCENT



I, TIM C. PAPPAS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 21209, DO HEREBY CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT PLAT OF A PROPOSED EASEMENT.

18 FEB 2024

TIM C. PAPPAS, N.M. P.L.S.

No.21209

SURVEY DATE: 02/09/2024  
JOB NO.: B20.EOG.0054

DRAFT: JC  
SHEET: 2 OF 2




**GRACKLE 26 EAST FED COM PROPOSED LGL LINE**  
SEC. 26, T-24-S, R-34-E, N.M.P.M.,  
LEA COUNTY, NEW MEXICO



PETROLEUM FIELD SERVICES, LLC  
DBA: ASCENT GEOMATICS  
SOLUTIONS  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128



# SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, LEA COUNTY, NEW MEXICO

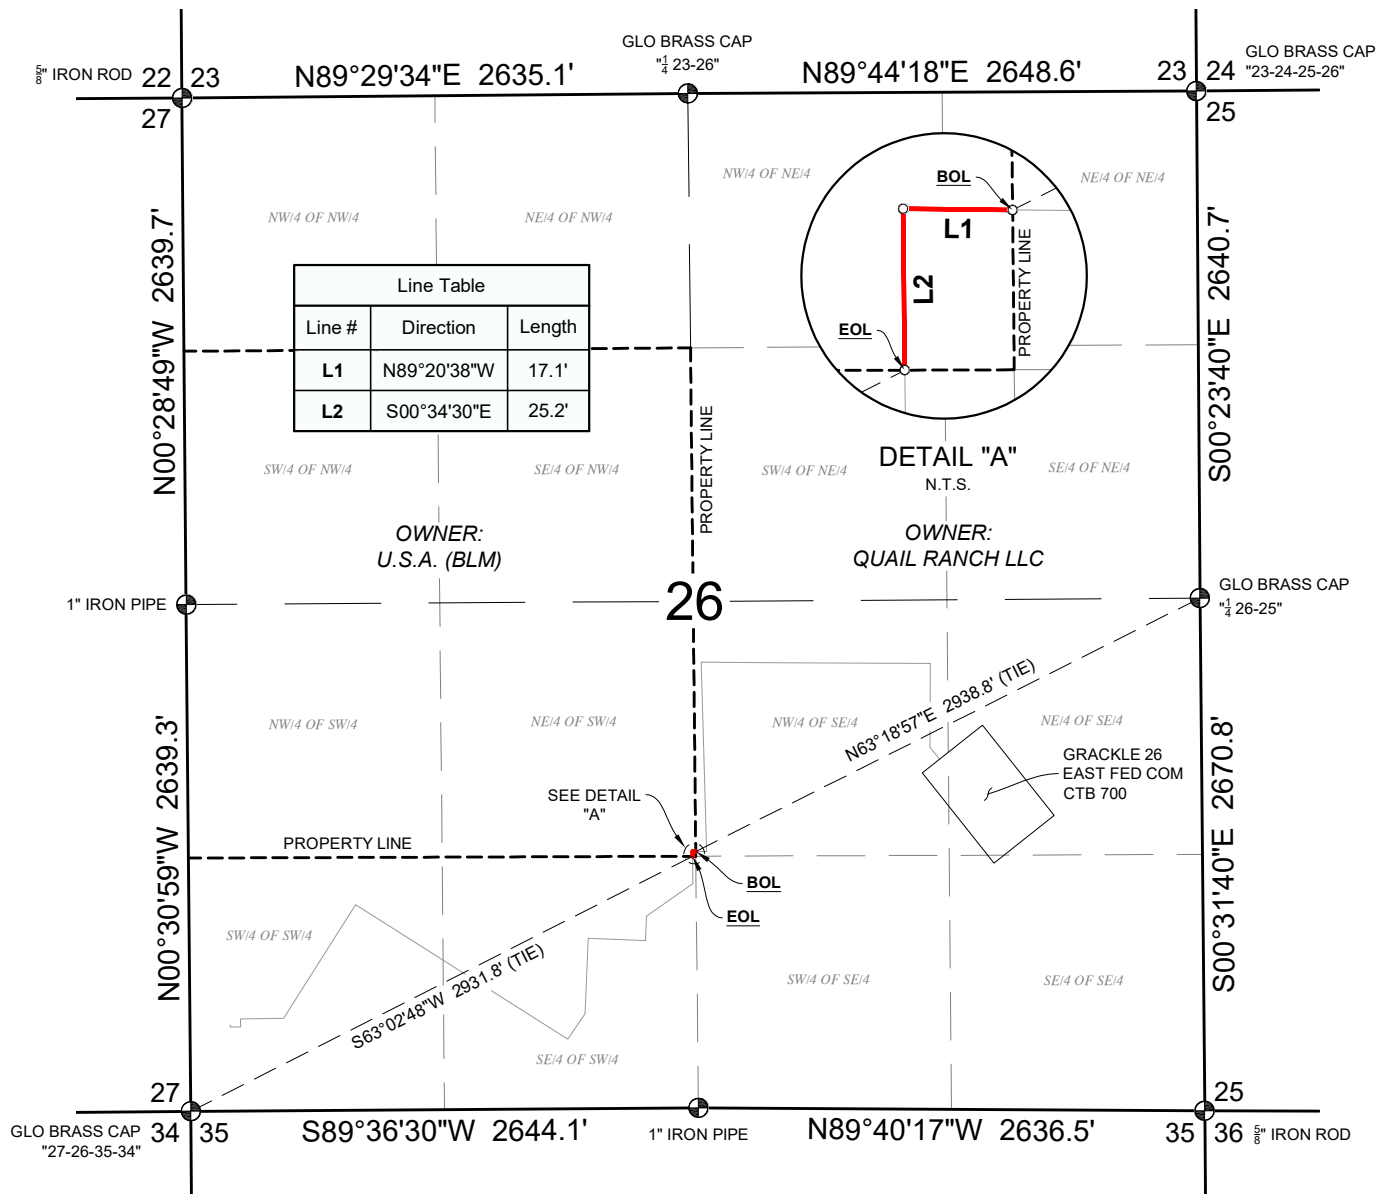



## GRACKLE 26 EAST FED COM PROPOSED OIL LINE CENTERLINE DESCRIPTION

A STRIP OF LAND 30 FEET IN WIDTH AND 42.3 FEET, 2.6 RODS OR 0.01 MILES IN LENGTH, SITUATED IN SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO, AND BEING 15 FEET ON EACH SIDE OF THE SURVEY OF CENTERLINE AS SHOWN HEREON.

- PROPOSED OIL LINE
- PROPOSED TIE-IN OIL LINE
- POINT FOR BEGIN/END OR ANGLE POINT
- FOUND MONUMENT AS SHOWN

### NOTES:

- BEARINGS, COORDINATES, AND DISTANCES SHOWN HEREON ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, NAD 83-2011 (EPOCH 2010) FRAMEWORK, AS DERIVED BY OPUS SOLUTION. THE ELEVATIONS SHOWN HEREON AREA BASED ON NAVD 88.
- LAND OWNERSHIP INFORMATION REFLECTED HEREON WAS PROVIDED BY CLIENT AND/OR OBTAINED FROM PUBLIC DOMAIN DATA, NO INDEPENDENT OWNERSHIP SEARCH WAS PERFORMED BY ASCENT



TYPICAL N.T.S.  
RIGHT-OF-WAY EASEMENT,  
TEMPORARY WORK SPACE  
CONFIGURATION



I, TIM C. PAPPAS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 21209, DO HEREBY CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT PLAT OF A PROPOSED EASEMENT.

18 FEB 2024

TIM C. PAPPAS, N.M. P.L.S.

No. 21209

SURVEY DATE: 02/09/2024

JOB NO.: B20.EOG.0054

DRAFT: LJ

SHEET: 1 OF 1




**GRACKLE 26 EAST FED COM PROPOSED OIL LINE**  
SEC. 26, T-24-S, R-34-E, N.M.P.M.,  
LEA COUNTY, NEW MEXICO



PETROLEUM FIELD SERVICES, LLC  
DBA: ASCENT GEOMATICS  
SOLUTIONS  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128

# SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, LEA COUNTY, NEW MEXICO

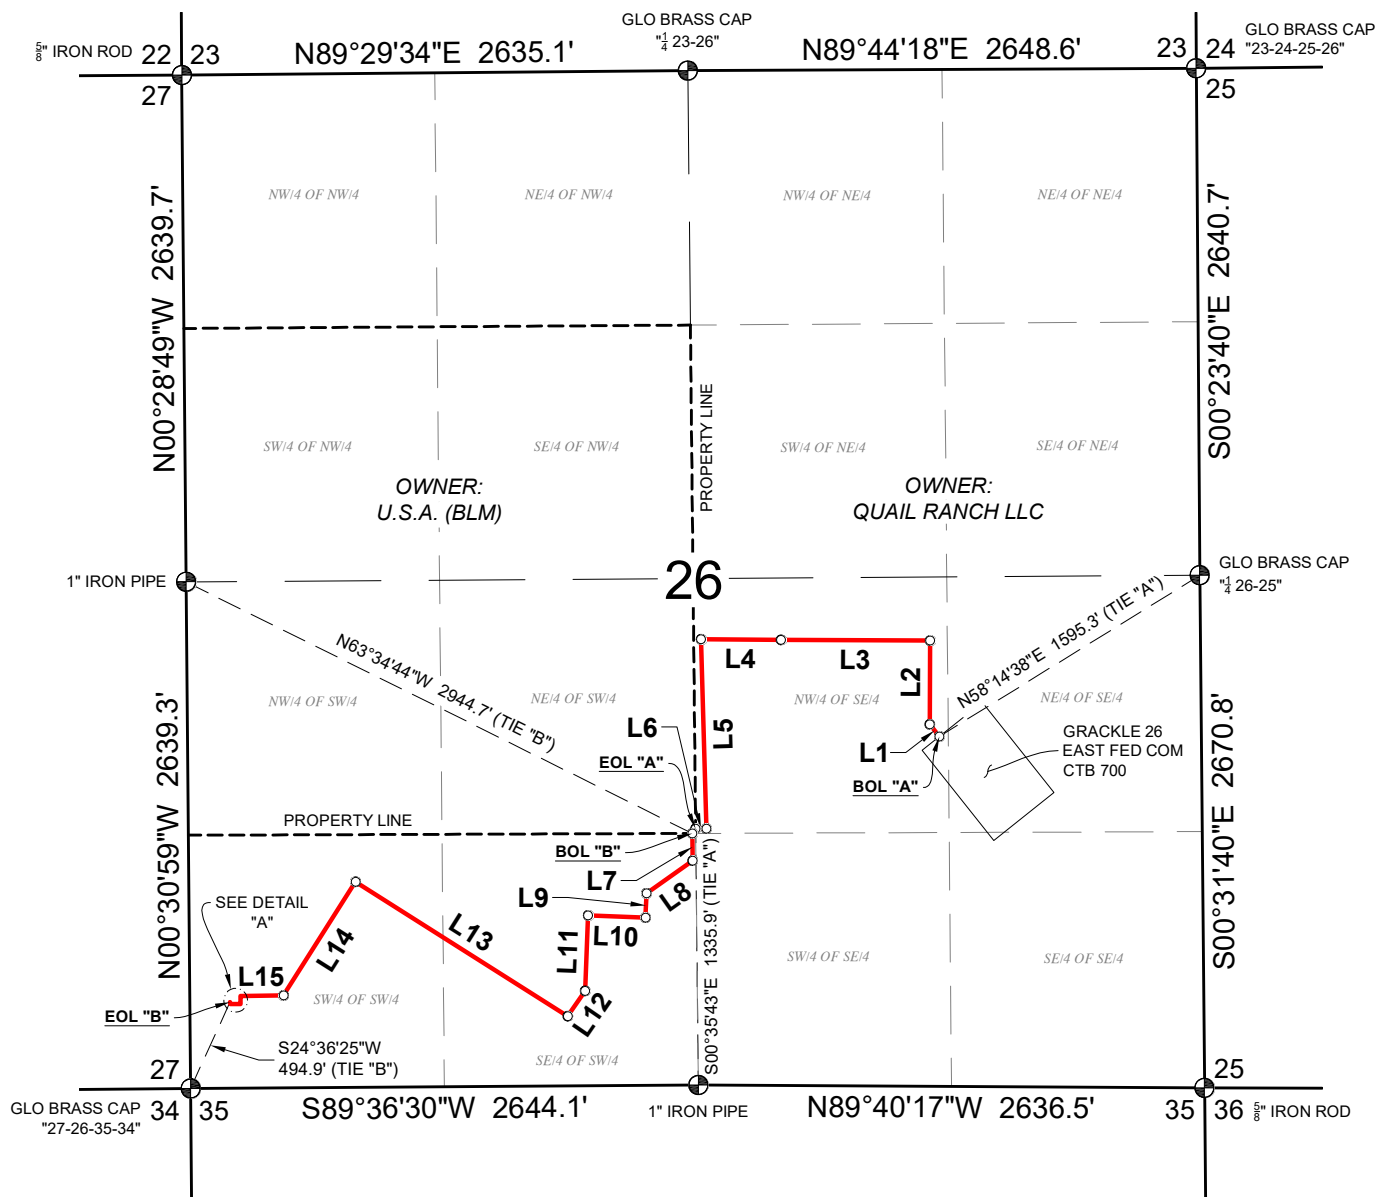

— PROPOSED OIL LINE

— PROPOSED TIE-IN OIL LINE



○ POINT FOR BEGIN/END OR ANGLE POINT

⊕ FOUND MONUMENT AS SHOWN

## NOTES:

- BEARINGS, COORDINATES, AND DISTANCES SHOWN HEREON ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, NAD 83-2011 (EPOCH 2010) FRAMEWORK, AS DERIVED BY OPUS SOLUTION. THE ELEVATIONS SHOWN HEREON ARE BASED ON NAVD 88.
- LAND OWNERSHIP INFORMATION REFLECTED HEREON WAS PROVIDED BY CLIENT AND/OR OBTAINED FROM PUBLIC DOMAIN DATA, NO INDEPENDENT OWNERSHIP SEARCH WAS PERFORMED BY ASCENT

\*SEE SHEET 2 OF 2 FOR LEGAL DESCRIPTIONS, LINE TABLES AND DETAIL VIEW.



TYPICAL N.T.S.  
RIGHT-OF-WAY EASEMENT,  
TEMPORARY WORK SPACE  
CONFIGURATION



I, TIM C. PAPPAS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 21209, DO HEREBY CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT PLAT OF A PROPOSED EASEMENT.

18 FEB 2024

TIM C. PAPPAS, N.M. P.L.S.

No. 21209

SURVEY DATE: 02/09/2024  
JOB NO.: B20.EOG.0054

DRAFT: LJ  
SHEET: 1 OF 2



**GRACKLE 26 EAST FED COM PROPOSED OIL LINE**  
SEC. 26, T-24-S, R-34-E, N.M.P.M.,  
LEA COUNTY, NEW MEXICO



PETROLEUM FIELD SERVICES, LLC  
DBA: ASCENT GEOMATICS  
SOLUTIONS  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128

# SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, LEA COUNTY, NEW MEXICO

## GRACKLE 26 EAST FED COM PROPOSED OIL LINE

### CENTERLINE "A" DESCRIPTION

A STRIP OF LAND, 30 FEET IN WIDTH SITUATED IN THE NORTHWEST QUARTER OF THE SOUTHEAST QUARTER OF SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO, AS CONVEYED TO QUAIL RANCH LLC, AND BEING 15 FEET ON EACH SIDE OF THE SURVEY OF CENTERLINE AS SHOWN HEREON AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS;

**BEGINNING** AT A POINT, FROM WHICH A GLO BRASS CAP FOUND AND ACCEPTED AS THE EAST QUARTER CORNER OF SAID SECTION 26 BEARS N58°14'38"E, 1595.3 FEET, FOR THE BEGINNING OF THE HEREIN DESCRIBED CENTERLINE;

**THENCE** THE FOLLOWING SIX (6) COURSES, N38°28'59"W, 80.0 FEET, N00°15'24"E, 436.5 FEET, N89°44'36"W, 776.8 FEET, N89°33'16"W, 416.1 FEET, S01°35'25"E, 987.0 FEET, N89°20'38"W, 56.0 FEET TO A POINT, BEING THE END OF THE DESCRIBED CENTERLINE, FROM WHICH A 1" IRON PIPE FOUND AND ACCEPTED AS THE SOUTH QUARTER CORNER OF SAID SECTION 26 BEARS S00°35'43"E, 1335.9 FEET, IN ALL BEING 2752.4 FEET OR 166.8 RODS IN LENGTH.

### CENTERLINE "B" DESCRIPTION


A STRIP OF LAND, 30 FEET IN WIDTH SITUATED IN THE SOUTH HALF OF THE SOUTHWEST QUARTER OF SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO, AS CONVEYED TO QUAIL RANCH LLC, AND BEING 15 FEET ON EACH SIDE OF THE SURVEY OF CENTERLINE AS SHOWN HEREON AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS;

**BEGINNING** AT A POINT, FROM WHICH A 1" IRON PIPE FOUND AND ACCEPTED AS THE WEST QUARTER CORNER OF SAID SECTION 26 BEARS N63°34'44"W, 2944.7 FEET, FOR THE BEGINNING OF THE HEREIN DESCRIBED CENTERLINE;

**THENCE** THE FOLLOWING TWELVE (12) COURSES, S00°34'30"E, 142.0 FEET, S54°47'03"W, 294.5 FEET, S02°20'59"W, 127.4 FEET, N87°39'01"W, 298.7 FEET, S02°20'59"W, 394.0 FEET, S34°27'20"W, 159.5 FEET, N57°39'01"W, 1308.3 FEET, S32°20'59"W, 701.2 FEET, S89°17'36"W, 223.8 FEET, S00°42'24"E, 41.3 FEET, S89°17'36"W, 54.1 FEET, N00°42'24"W, 10.2 FEET TO A POINT, BEING THE END OF THE DESCRIBED CENTERLINE, FROM WHICH A GLO BRASS CAP FOUND AND ACCEPTED AS THE SOUTHWEST CORNER OF SAID SECTION 26 BEARS S24°36'25"W, 494.9 FEET, IN ALL BEING 3755.0 FEET OR 227.6 RODS IN LENGTH.


| Line Table |             |        |
|------------|-------------|--------|
| Line #     | Direction   | Length |
| L1         | N38°28'59"W | 80.0'  |
| L2         | N00°15'24"E | 436.5' |
| L3         | N89°44'36"W | 776.8' |
| L4         | N89°33'16"W | 416.1' |
| L5         | S01°35'25"E | 987.0' |
| L6         | N89°20'38"W | 56.0'  |
| L7         | S00°34'30"E | 142.0' |
| L8         | S54°47'03"W | 294.5' |
| L9         | S02°20'59"W | 127.4' |

| Line Table |             |         |
|------------|-------------|---------|
| Line #     | Direction   | Length  |
| L10        | N87°39'01"W | 298.7'  |
| L11        | S02°20'59"W | 394.0'  |
| L12        | S34°27'20"W | 159.5'  |
| L13        | N57°39'01"W | 1308.3' |
| L14        | S32°20'59"W | 701.2'  |
| L15        | S89°17'36"W | 223.8'  |
| L16        | S00°42'24"E | 41.3'   |
| L17        | S89°17'36"W | 54.1'   |
| L18        | N00°42'24"W | 10.2'   |



DETAIL "A"  
N.T.S.

— PROPOSED OIL LINE  
○ POINT FOR BEGIN/END OR ANGLE POINT




TYPICAL N.T.S.  
RIGHT-OF-WAY EASEMENT,  
TEMPORARY WORK SPACE  
CONFIGURATION

\*SEE SHEET 1 OF 2 FOR MORE INFORMATION.

#### NOTES:

- BEARINGS, COORDINATES, AND DISTANCES SHOWN HEREON ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, NAD 83- 2011 (EPOCH 2010) FRAMEWORK, AS DERIVED BY OPUS SOLUTION. THE ELEVATIONS SHOWN HEREON AREA BASED ON NAVD 88.
- LAND OWNERSHIP INFORMATION REFLECTED HEREON WAS PROVIDED BY CLIENT AND/OR OBTAINED FROM PUBLIC DOMAIN DATA, NO INDEPENDENT OWNERSHIP SEARCH WAS PERFORMED BY ASCENT



I, TIM C. PAPPAS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 21209, DO HEREBY CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT PLAT OF A PROPOSED EASEMENT.

18 FEB 2024

TIM C. PAPPAS, N.M. P.L.S.

No.21209

SURVEY DATE: 02/09/2024  
JOB NO.: B20.EOG.0054

DRAFT: LJ  
SHEET: 2 OF 2




**GRACKLE 26 EAST FED COM PROPOSED OIL LINE**  
SEC. 26, T-24-S, R-34-E, N.M.P.M.,  
LEA COUNTY, NEW MEXICO



PETROLEUM FIELD SERVICES, LLC  
DBA: ASCENT GEOMATICS  
SOLUTIONS  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128

## SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST,

LEA COUNTY, NEW MEXICO

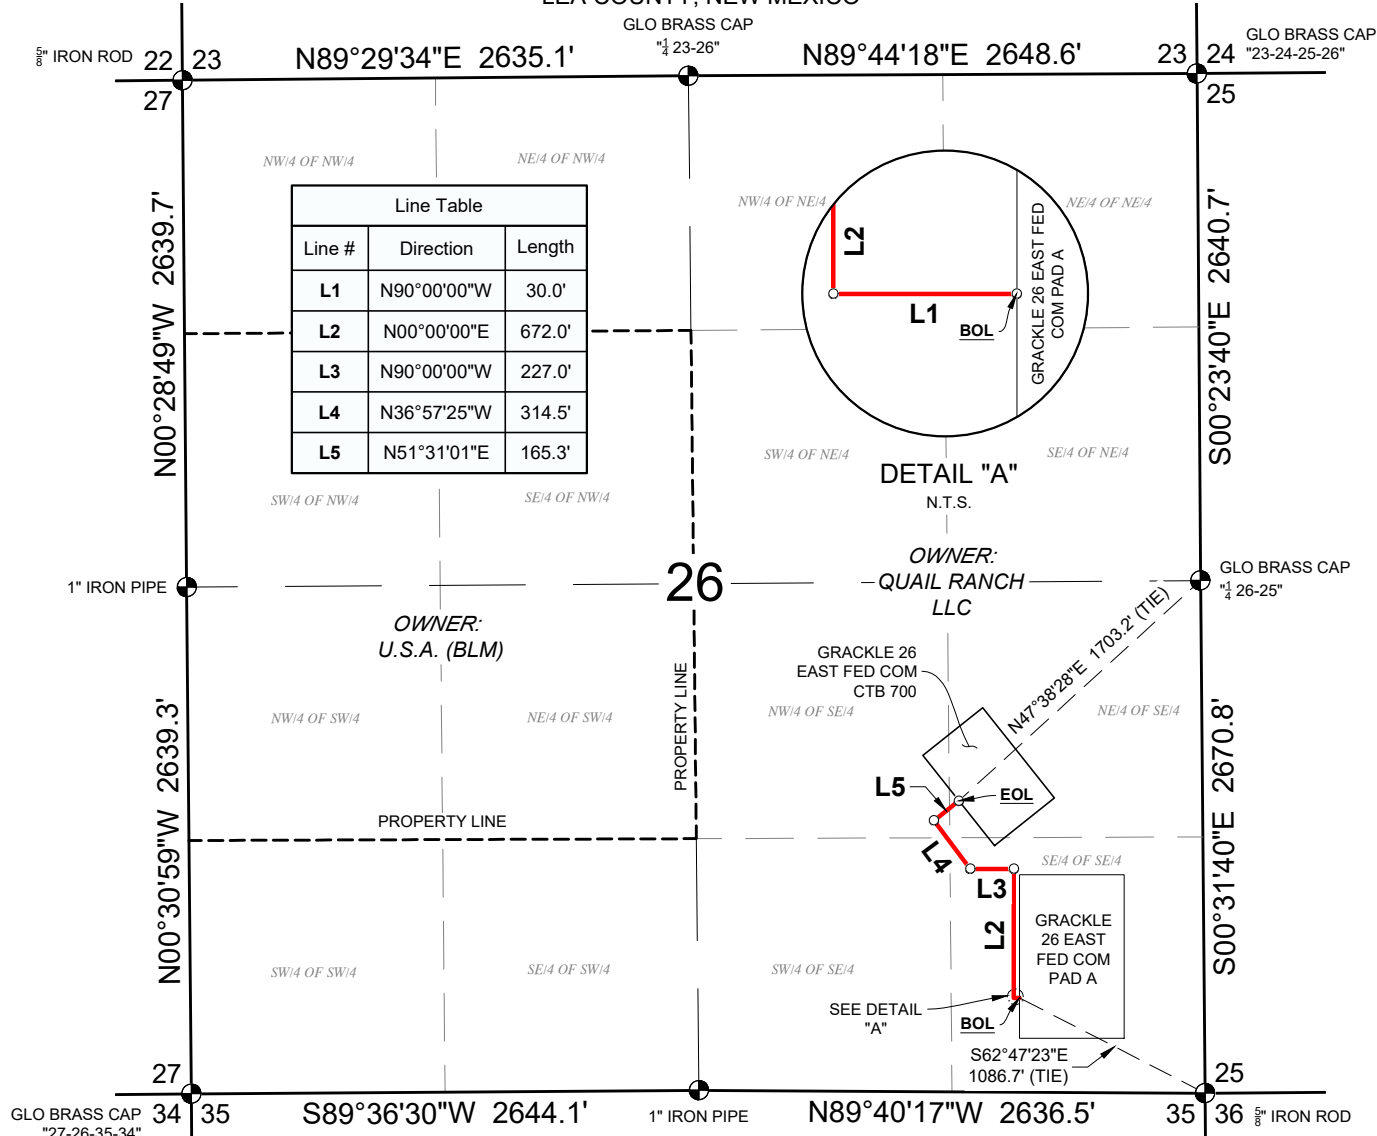

I, TIM C. PAPPAS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 21209, DO HEREBY CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT PLAT OF A PROPOSED EASEMENT.

TIM C. PAPPAS, N.M. P.L.S.

No.21209

SURVEY DATE: 02/09/2024

DRAFT: KS

JOB NO.: B20.EOG.0054

SHEET: 1 OF 1



**GRACKLE 26 EAST FED COM PAD A 102/103/202/203, 302/303/304/305, 402/403/502/503 & 592/593/PH1/PH2**  
PROPOSED FLOWLINE, GAS LIFT & FIBER OPTIC LINES REV 1  
SEC. 26, T-24-S, R-34-E, N.M.P.M., LEA COUNTY, NEW MEXICO



PETROLEUM FIELD SERVICES, LLC  
DBA: ASCENT GEOMATICS SOLUTIONS  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128

## SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST,

LEA COUNTY, NEW MEXICO

GLO BRASS CAP

"1/4 23-26"

GLO BRASS CAP  
"23-24-25-26"

N89°29'34"E 2635.1'

N89°44'18"E 2648.6'

5" IRON ROD

22 23  
2723 24  
25

NW/4 OF NW/4

NE/4 OF NW/4

NW/4 OF NE/4

NE/4 OF NE/4

| Line Table |             |         |
|------------|-------------|---------|
| Line #     | Direction   | Length  |
| L1         | N00°24'16"W | 45.5'   |
| L2         | N89°58'57"E | 1484.0' |
| L3         | N12°12'51"E | 312.5'  |
| L4         | N22°58'55"E | 505.5'  |
| L5         | N36°57'25"W | 747.4'  |
| L6         | N51°31'01"E | 209.1'  |

SW/4 OF NW/4

SE/4 OF NW/4

SW/4 OF NE/4

SE/4 OF NE/4

N00°28'49"W 2639.7'

S00°23'40"E 2640.7'

1" IRON PIPE

N00°30'59"W 2639.3'

S00°31'40"E 2670.8'

OWNER:  
U.S.A. (BLM)

PROPERTY LINE

NW/4 OF SW/4

NE/4 OF SW/4

SW/4 OF SW/4

SE/4 OF SW/4

GRACKLE 26  
EAST FED COM  
CTB 700

NW/4 OF SE/4

NE/4 OF SE/4

SW/4 OF SE/4

SE/4 OF SE/4

SEE DETAIL  
"A"

BOL

L2

L6

L5

L4

L3

L2

L1

L0

L-1

L-2

L-3

L-4

L-5

L-6

L-7

L-8

L-9

L-10

L-11

L-12

L-13

L-14

L-15

L-16

L-17

L-18

L-19

L-20

L-21

L-22

L-23

L-24

L-25

L-26

L-27

L-28

L-29

L-30

L-31

L-32

L-33

L-34

L-35

L-36

L-37

L-38

L-39

L-40

L-41

L-42

L-43

L-44

L-45

L-46

L-47

L-48

L-49

L-50

L-51

L-52

L-53

L-54

L-55

L-56

L-57

L-58

L-59

L-60

L-61

L-62

L-63

L-64

L-65

L-66

L-67

L-68

L-69

L-70

L-71

L-72

L-73

L-74

L-75

L-76

L-77

L-78

L-79

L-80

L-81

L-82

L-83

L-84

L-85

L-86

L-87

L-88

L-89

L-90

L-91

L-92

L-93

L-94

L-95

L-96

L-97

L-98

L-99

L-100

L-101

L-102

L-103

L-104

L-105

L-106

L-107

L-108

L-109

L-110

L-111

L-112

L-113

L-114

L-115

L-116

L-117

L-118

L-119

L-120

L-121

L-122

L-123

L-124

L-125

L-126

L-127

L-128

L-129

L-130

L-131

L-132

L-133

L-134

L-135

L-136

L-137

L-138

L-139

L-140

L-141

L-142

L-143

L-144

L-145

L-146

L-147

L-148

L-149

L-150

L-151

L-152

L-153

L-154

L-155

L-156

L-157

L-158

L-159

L-160

L-161

L-162

L-163

L-164

L-165

L-166

L-167

L-168

L-169

L-170

L-171

L-172

L-173

L-174

L-175

L-176

L-177

L-178

L-179

L-180

L-181

L-182

L-183

L-184

L-185

L-186

L-187

L-188

L-189

L-190

L-191

L-192

L-193

L-194

L-195

L-196

L-197

L-198

L-199

L-200

L-201

L-202

L-203

L-204

L-205

L-206

L-207

L-208

L-209

L-210

L-211

L-212

L-213

L-214

L-215

L-216

L-217

L-218

L-219

L-220

L-221

L-222

L-223

L-224

L-225

L-226

L-227

L-228

L-229

L-230

L-231

L-232

L-233

L-234

L-235

L-236

L-237

L-238

L-239

L-240

L-241

L-242

L-243

L-244

L-245

L-246

L-247

L-248

L-249

L-250

L-251

L-252

L-253

L-254

L-255

L-256

L-257

L-258

L-259

L-260

L-261

L-262

L-263

L-264

L-265

L-266

L-267

L-268

L-269

L-270

L-271

L-272

L-273

L-274

L-275

L-276

L-277

L-278

L-279

L-280

L-281

L-282








Released to Imaging: 9/19/2025 10:17:10 AM

## Grackle 26 Water Map

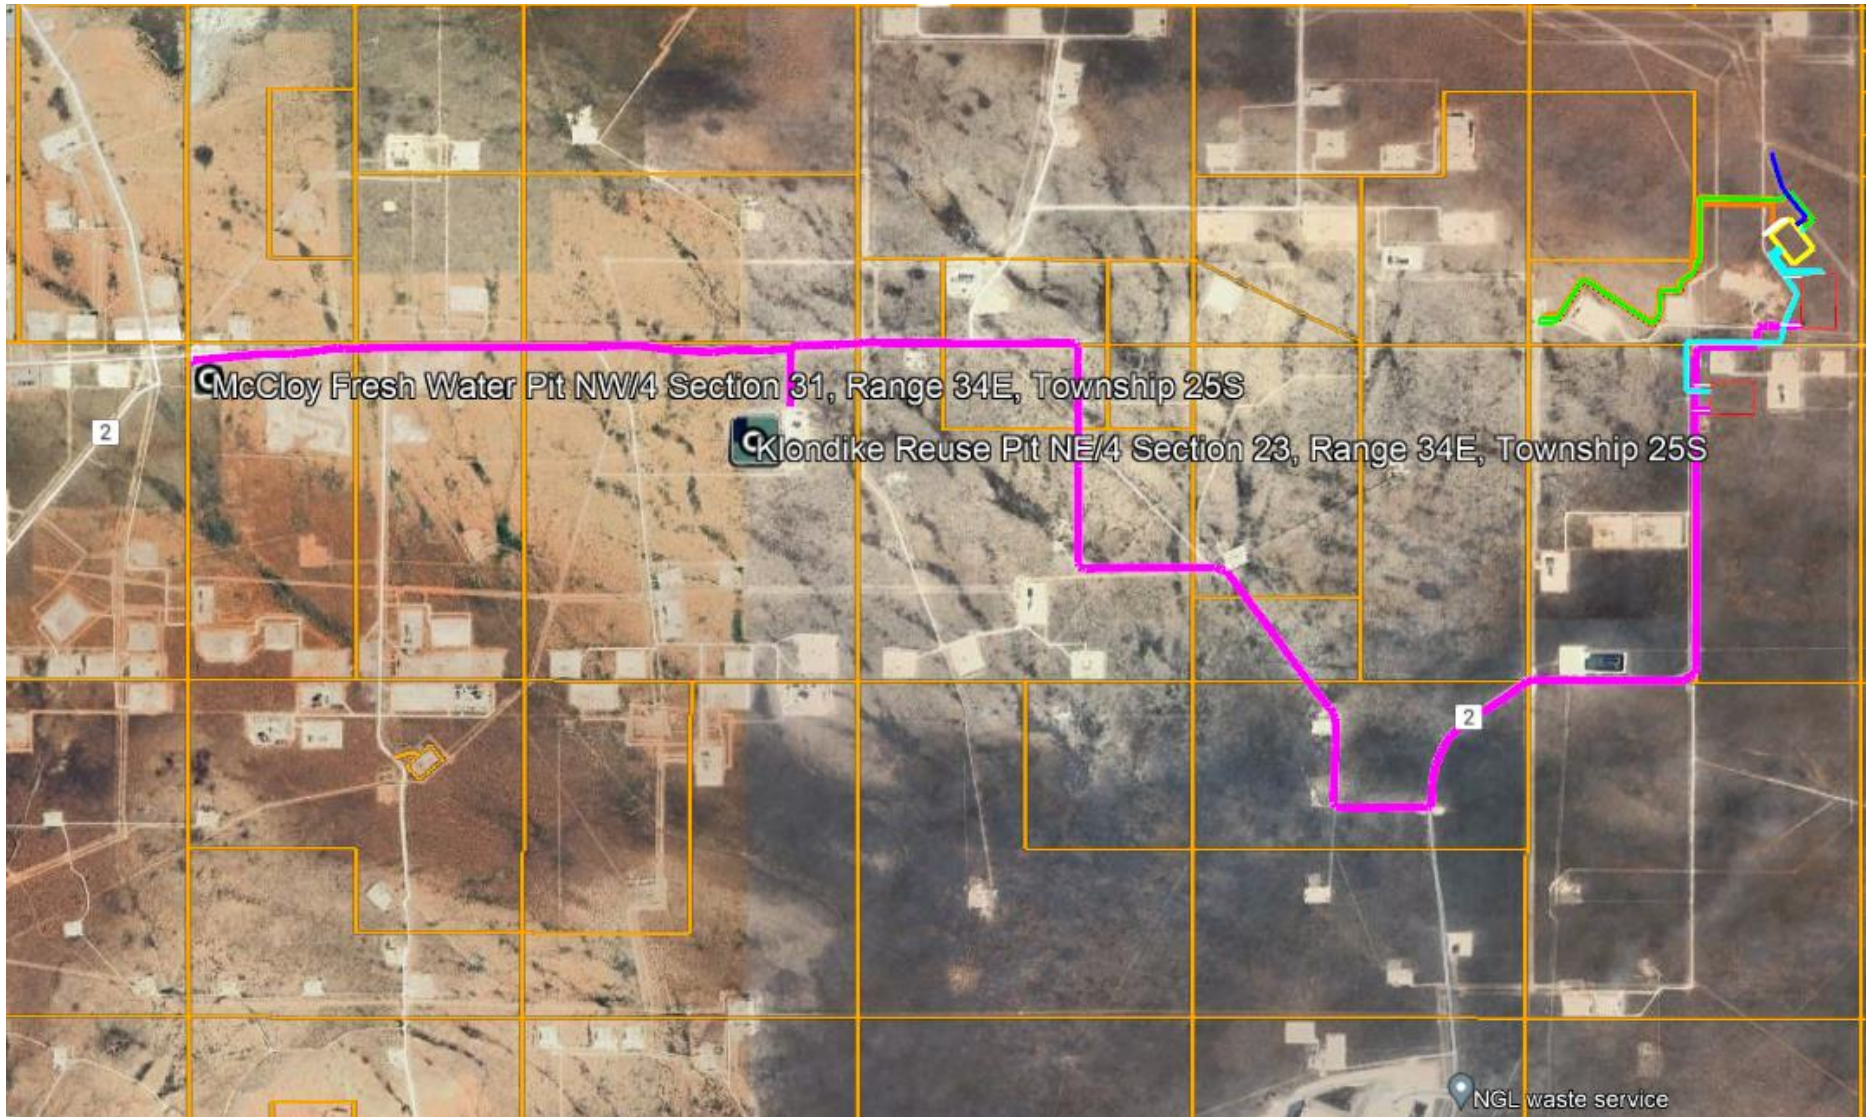


Fresh Water for drilling operations will be sourced from EOG's McCloy Freshwater pit in the NW/4 Section 31, Range 34E, Township 25S. Access to this pit is off Resources Lane, the depicted route will follow EOG lease roads and Battle Axe Road.

Reuse Water for completions operations be sourced from EOG's Klondike Reuse Pit in the NE/4 Section 23, Range 34E, Township 25S. Access to this pit is off Resources Lane, the depicted route will follow EOG lease roads and Battle Axe Road.




### Grackle 26 Caliche Map

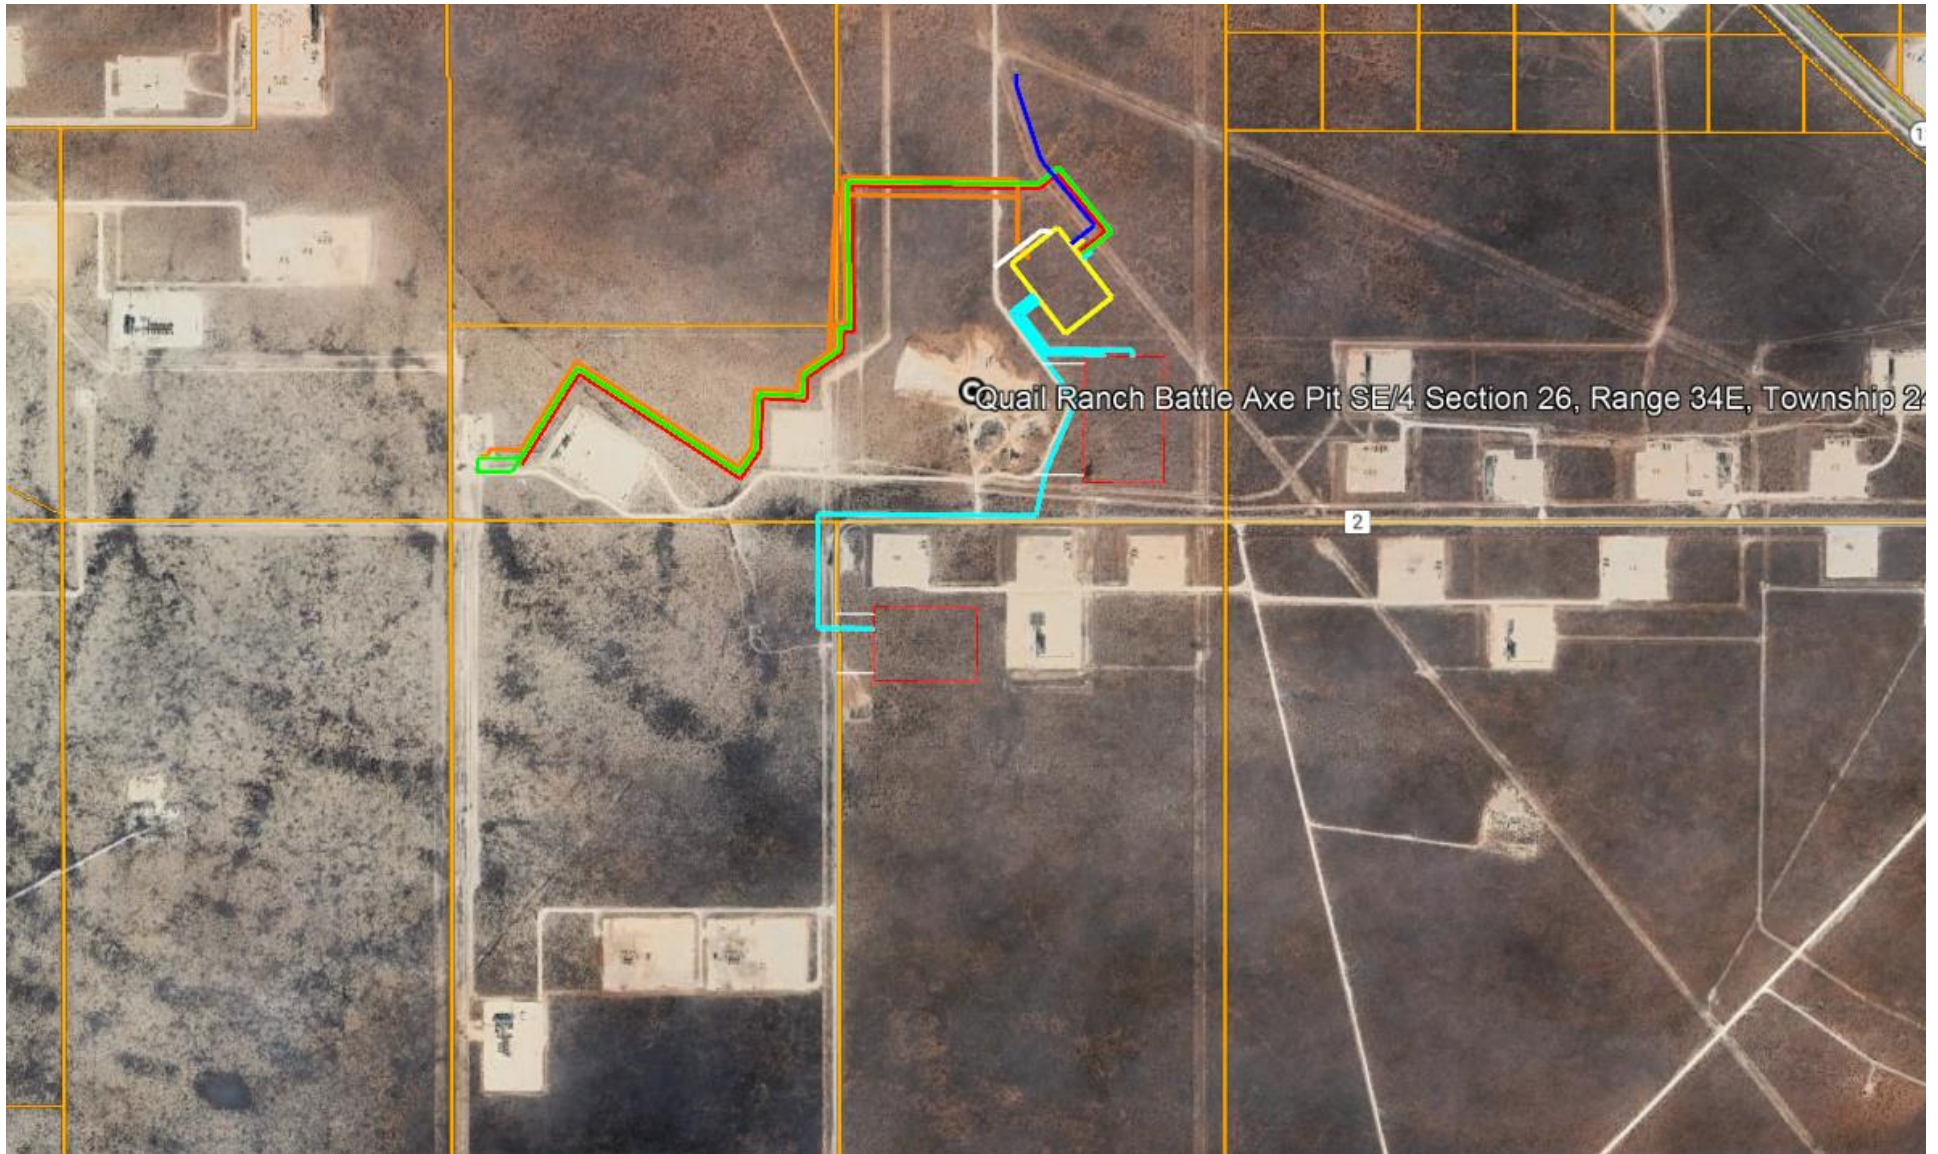


Quail Ranch Battle Axe Pit- SE/4 Section 26, Range 34E, Township 24 South, Lea County, NM. Access to this pit is off of Battle Axe road and existing oil and gas lease roads.

Exhibit 4  
EOG Resources  
Grackle 26 East Fed Com #502H

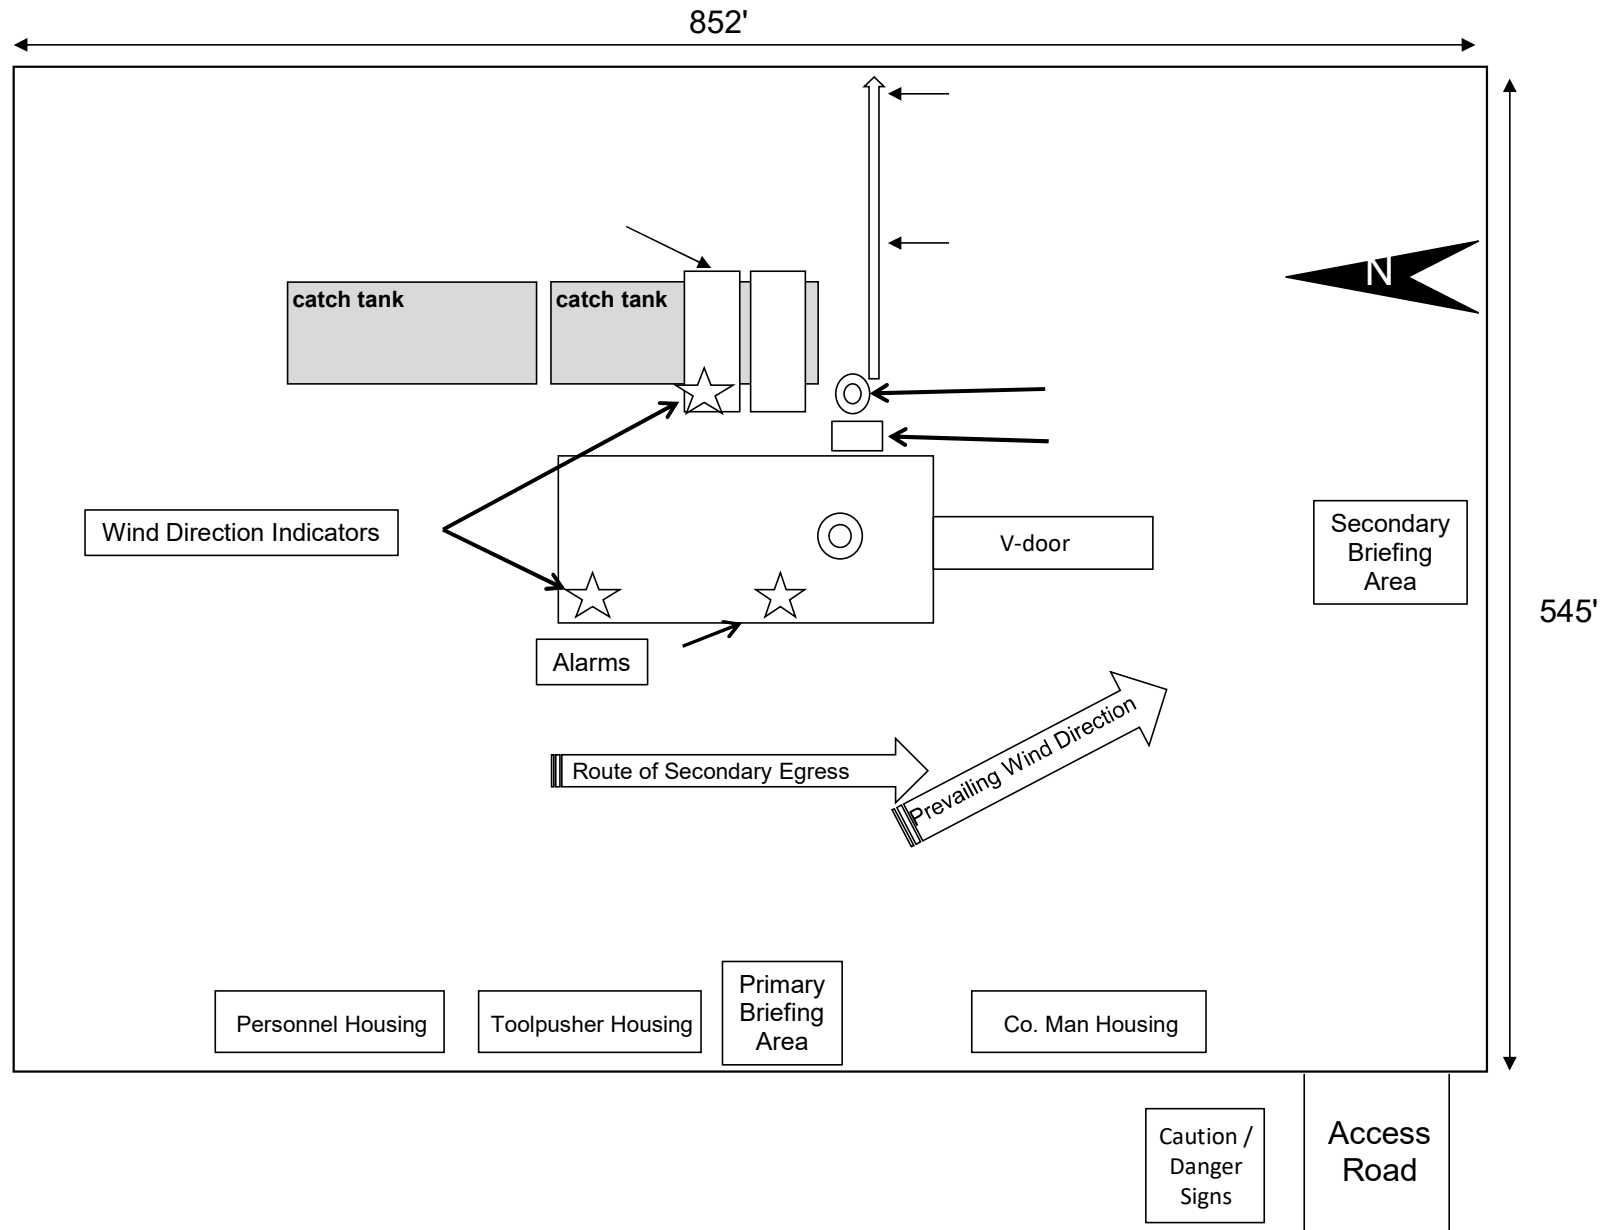

# SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, LEA COUNTY, NEW MEXICO

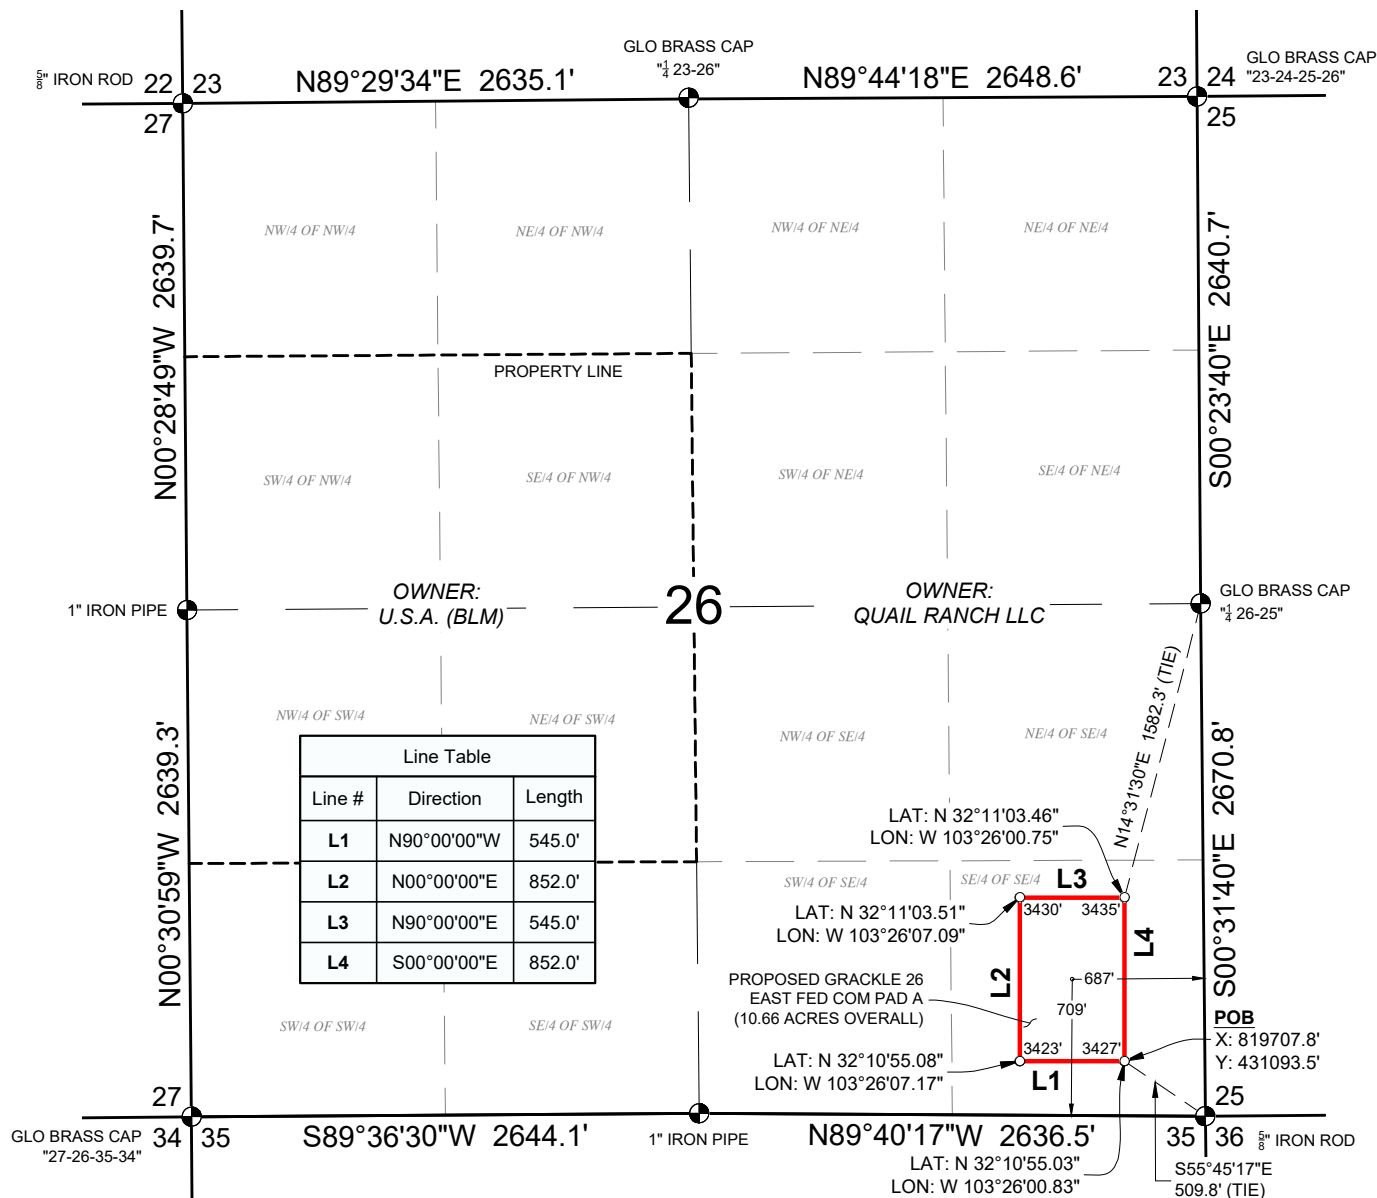

## GRACKLE 26 EAST FED COM PROPOSED PAD A SITE DESCRIPTION

A PROPOSED SITE SITUATED IN THE SOUTHEAST QUARTER OF THE SOUTHEAST QUARTER OF SECTION 26, TOWNSHIP 24 SOUTH, RANGE 34 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO, AS CONVEYED TO QUAIL RANCH, LLC, AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:


**BEGINNING** AT A POINT, FROM WHICH A  $\frac{5}{8}$  IRON ROD FOUND AND ACCEPTED AS THE SOUTHEAST CORNER OF SAID SECTION 26 BEARS S55°45'17"E, 509.8 FEET, SAID POINT BEING THE SOUTHEAST CORNER HEREOF;

**THENCE** THE FOLLOWING FOUR (4) COURSES AND DISTANCES:

N90°00'00"W, 545.0 FEET;  
N00°00'00"E, 852.0 FEET;  
N90°00'00"E, 545.0 FEET;  
S00°00'00"E, 852.0 FEET TO THE **POINT OF BEGINNING**, CONTAINING 10.66 ACRES.


### NOTES:

- BEARINGS, COORDINATES, AND DISTANCES SHOWN HEREON ARE BASED ON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, NAD 83- 2011 (EPOCH 2010) FRAMEWORK, AS DERIVED BY OPUS SOLUTION. THE ELEVATIONS SHOWN HEREON AREA BASED ON NAVD 88.
- LAND OWNERSHIP INFORMATION REFLECTED HEREON WAS PROVIDED BY CLIENT AND/OR OBTAINED FROM PUBLIC DOMAIN DATA, NO INDEPENDENT OWNERSHIP SEARCH WAS PERFORMED BY ASCENT



— PROPOSED PAD A

- POINT FOR BEGIN/END OR ANGLE POINT
- FOUND MONUMENT AS SHOWN



I, RALPH B. CHUSTZ, JR., NEW MEXICO PROFESSIONAL SURVEYOR NO. 26264, DO HEREBY CERTIFY THAT THIS EASEMENT PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT PLAT OF A PROPOSED EASEMENT.

**RALPH B. CHUSTZ, JR., N.M. P.L.S.**

**No.26264**

SURVEY DATE: 12/19/2023  
JOB NO.: B20.EOG.0054

DRAFT: KS  
SHEET: 1 OF 2



**GRACKLE 26 EAST FED COM PROPOSED PAD A**  
SEC. 26, T-24-S, R-34-E, N.M.P.M.,  
LEA COUNTY, NEW MEXICO



PETROLEUM FIELD SERVICES, LLC  
DBA: ASCENT GEOMATICS  
SOLUTIONS  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128



EXHIBIT 2A  
WELL LOCATION EXHIBIT

SURFACE LOCATION


NEW MEXICO EAST  
NAD 1983  
X=819313' Y=431687'  
LAT=N32.183595°  
LONG=W103.434825°  
NAD 1927  
X=778127' Y=431629'  
LAT=N32.183470°  
LONG=W103.434354°  
876' FSL 808' FEL

KOP LOCATION

NEW MEXICO EAST  
NAD 1983  
X=818817' Y=430864'  
LAT=N32.181343°  
LONG=W103.436448°  
NAD 1927  
X=777632' Y=430805'  
LAT=N32.181218°  
LONG=W103.435977°  
50' FSL 1311' FEL

FIRST TAKE POINT

NEW MEXICO EAST  
NAD 1983  
X=818817' Y=430914'  
LAT=N32.181481°  
LONG=W103.436448°  
NAD 1927  
X=777632' Y=430855'  
LAT=N32.181355°  
LONG=W103.435977°  
100' FSL 1311' FEL

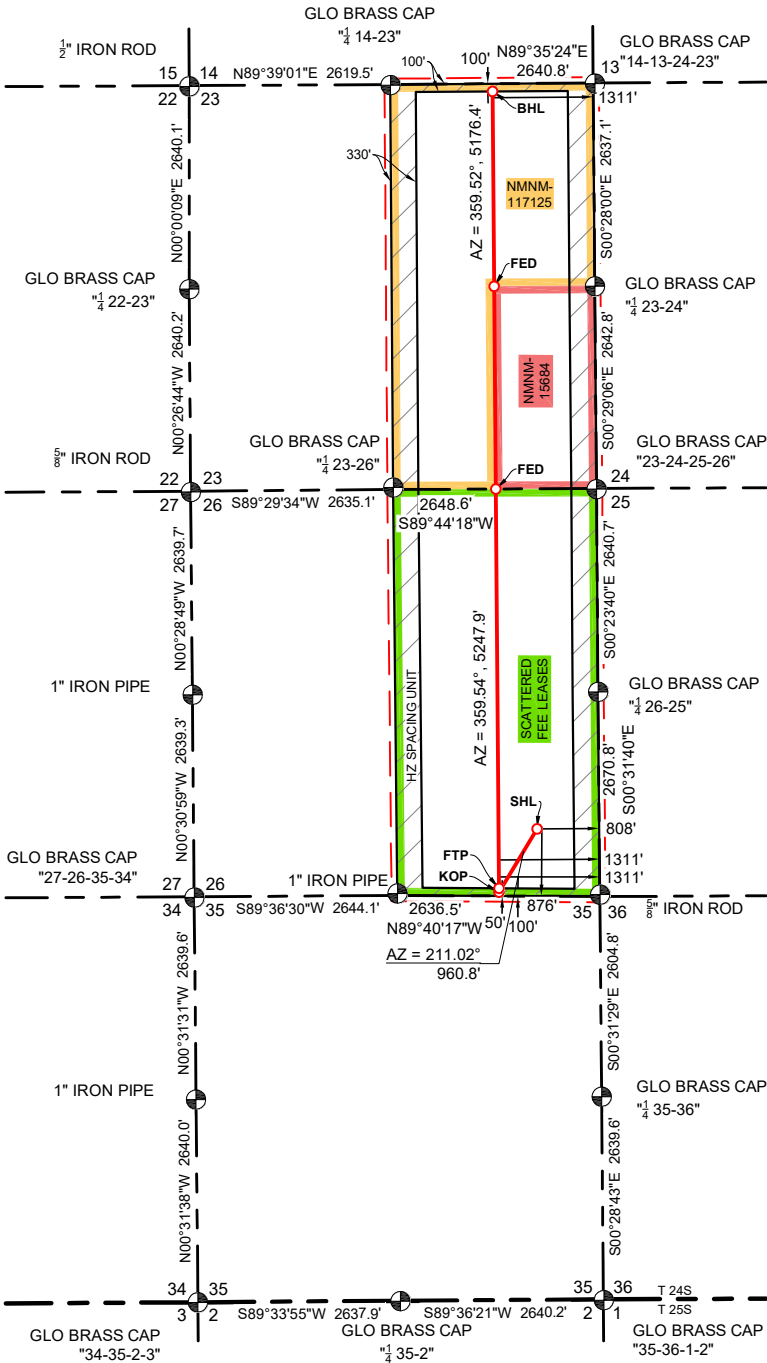

FED PERF. POINT


NEW MEXICO EAST  
NAD 1983  
X=818775' Y=436112'  
LAT=N32.195768°  
LONG=W103.436443°  
NAD 1927  
X=777590' Y=436053'  
LAT=N32.195643°  
LONG=W103.435971°  
1311' FEL

FED PERF. POINT

NEW MEXICO EAST  
NAD 1983  
X=818753' Y=438751'  
LAT=N32.203023°  
LONG=W103.436444°  
NAD 1927  
X=777568' Y=438692'  
LAT=N32.202898°  
LONG=W103.435972°  
1311' FEL

LOWER MOST PERF./  
BOTTOM HOLE LOCATION

NEW MEXICO EAST  
NAD 1983  
X=818732' Y=441288'  
LAT=N32.209996°  
LONG=W103.436442°  
NAD 1927  
X=777547' Y=441229'  
LAT=N32.209871°  
LONG=W103.435970°  
100' FNL 1311' FEL




LEASE NAME & WELL NO.: GRACKLE 26 EAST FED COM #502H  
LATITUDE: N 32.183595° LONG: W 103.434825° ELEVATION: 3429'

SECTION: 26 TWP: 24 S RGE: 34 E SURVEY: N.M.P.M.  
COUNTY: LEA STATE: NM

DESCRIPTION: 876' FSL & 808' FEL


DISTANCE & DIRECTION:  
FROM THE INTERSECTION OF NEW MEXICO STATE ROAD 128 AND COUNTY ROAD 2, TRAVEL  
SOUTHWEST ON COUNTY ROAD 2 ±1.8 MILES; THENCE NORTH (RIGHT) ONTO AN EXISTING LEASE  
ROAD ±288 FEET; THENCE EAST (RIGHT) ON AN EXISTING LEASE ROAD ±347 FEET; THENCE EAST  
(RIGHT) ON A PROPOSED ACCESS ROAD ±371 FEET TO THE EDGE OF PAD.  
(PROPOSED ACCESS ROAD LENGTH = ±371')

DETAIL VIEW  
SCALE: 1" = 600'

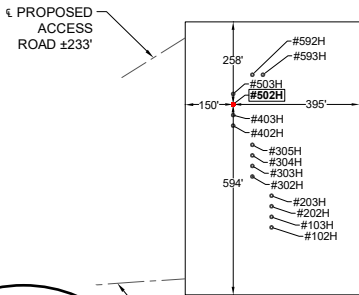

  
JOB No.: EOG\_B200054

NOTE:  
ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN  
ARE GRID BASED UPON THE FOLLOWING COORDINATE SYSTEM: NAD83 NEW  
MEXICO STATE PLANE, EAST ZONE, U.S. SURVEY FEET.  
DISCLAIMER:  
THIS PLOT DOES NOT REPRESENT A MONUMENTED LAND SURVEY AND  
SHOULD NOT BE RELIED UPON TO DETERMINE BOUNDARY LINES, PROPERTY  
OWNERSHIP OR OTHER PROPERTY INTERESTS.

  
RALPH B. CHUSTZ, JR., N.M. P.L.S. No. 26264


  
8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128  
WWW.ASCENTGEOMATICS.COM



## EXHIBIT 5

SECTIONS 26 & 35, TOWNSHIP 24 SOUTH, RANGE 34 EAST,  
LEA COUNTY, NEW MEXICO

# GRACKLE 26 EAST FED COM INFRASTRUCTURE MAP

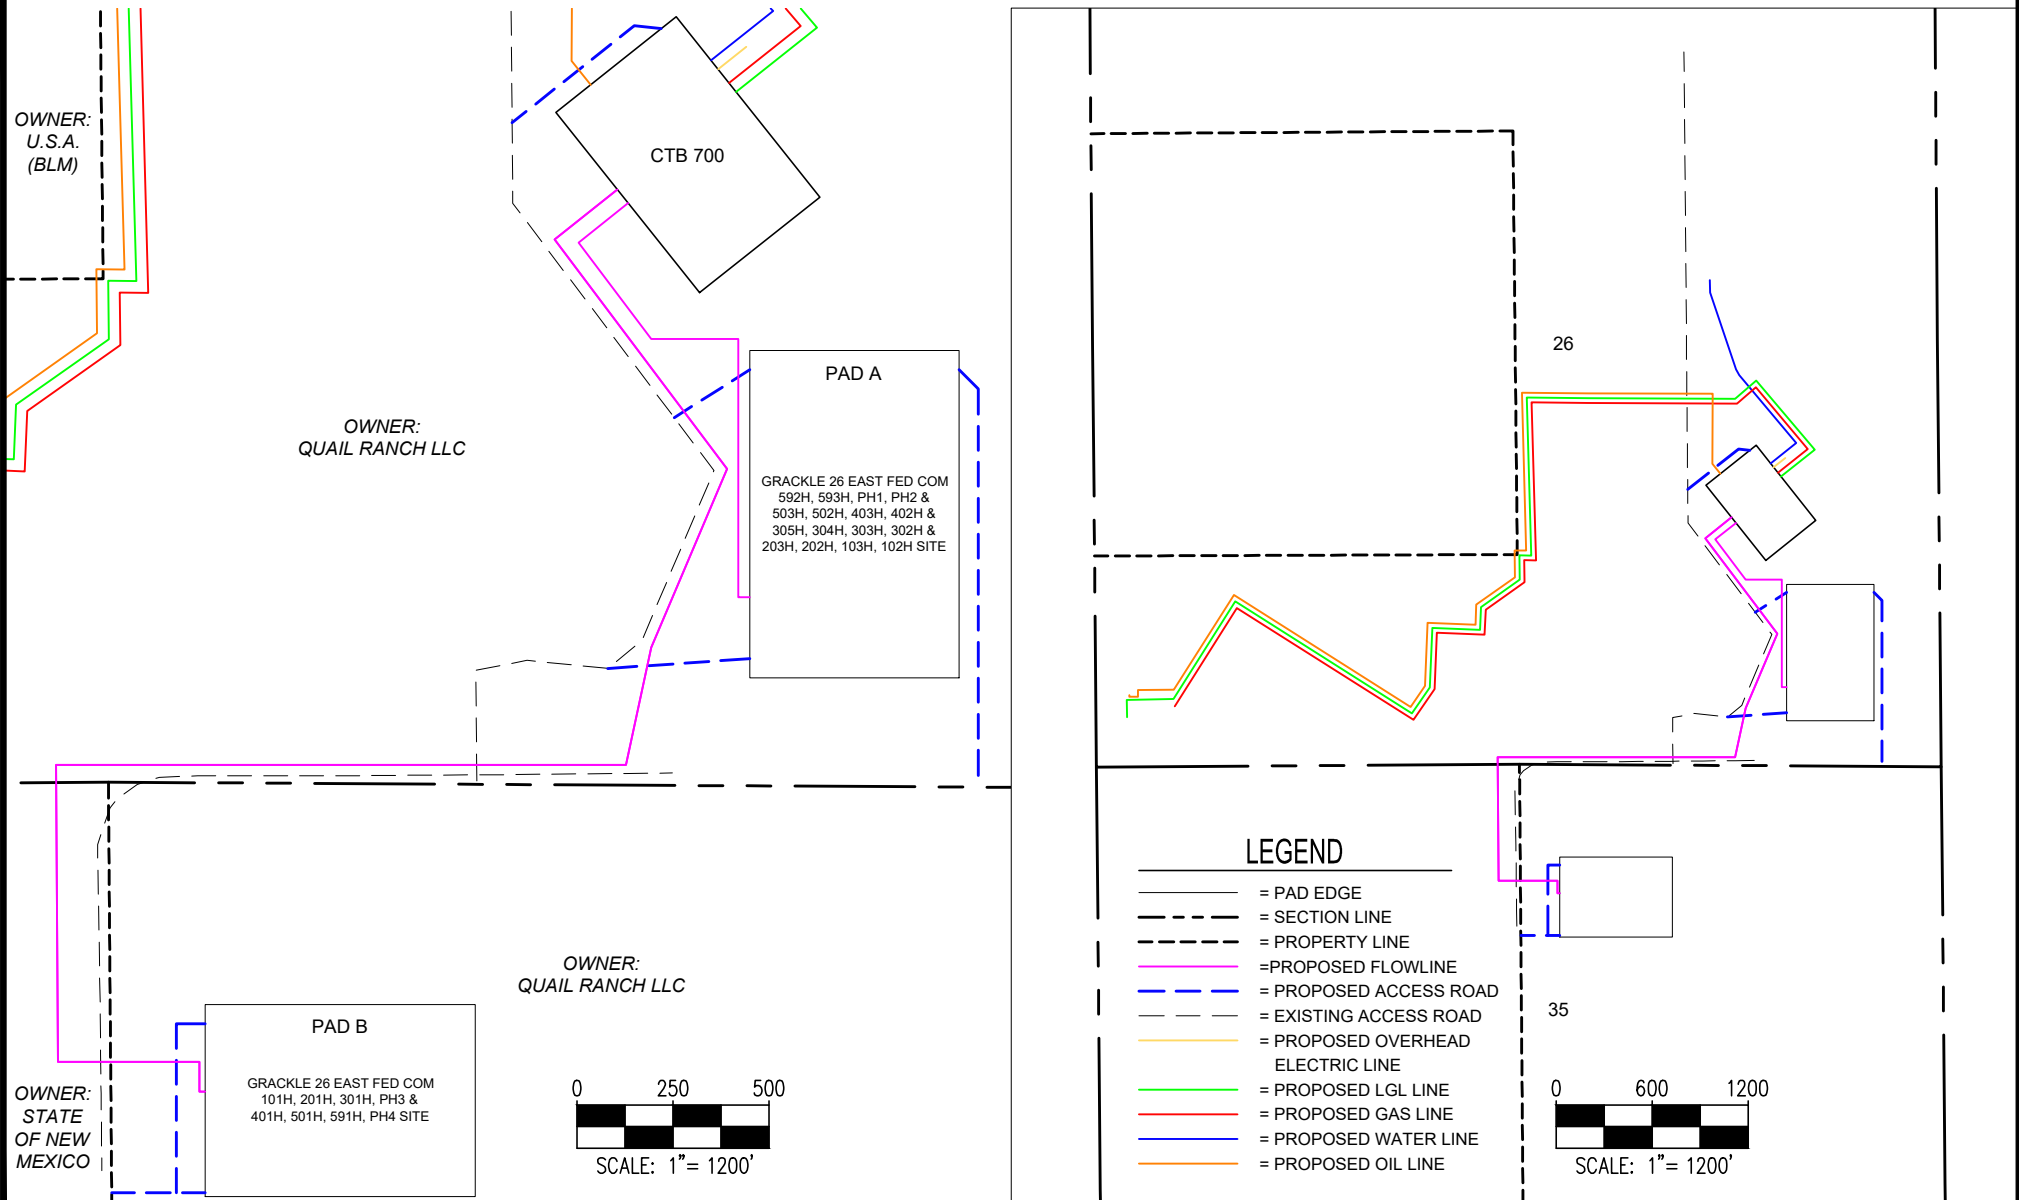

8620 WOLFF CT.  
WESTMINSTER, CO 80031  
OFFICE: (303) 928-7128  
www.ascentgeomatics.com

DRAFTED DATE:  
03/06/2024  
FILE:  
EOG\_GRACKLE\_26\_EAST\_FED\_COM  
FLOWLINE\_DETAIL  
BY:  
JC  
CHECKED:  
JLE

PROJECT NAME:  
GRACKLE 26 EAST FED COM INFRASTRUCTURE MAP  
SURFACE LOCATION:  
SEC. 26 & 35, T24S, R34E, N.M.P.M.  
LEA COUNTY, NEW MEXICO

REV. 0

PROJECT NUMBER:  
EOG\_B200054


PREPARED FOR:



**eog resources**

# EXHIBIT 2C RECLAMATION DIAGRAM

DETAIL VIEW  
SCALE: 1" = 150'

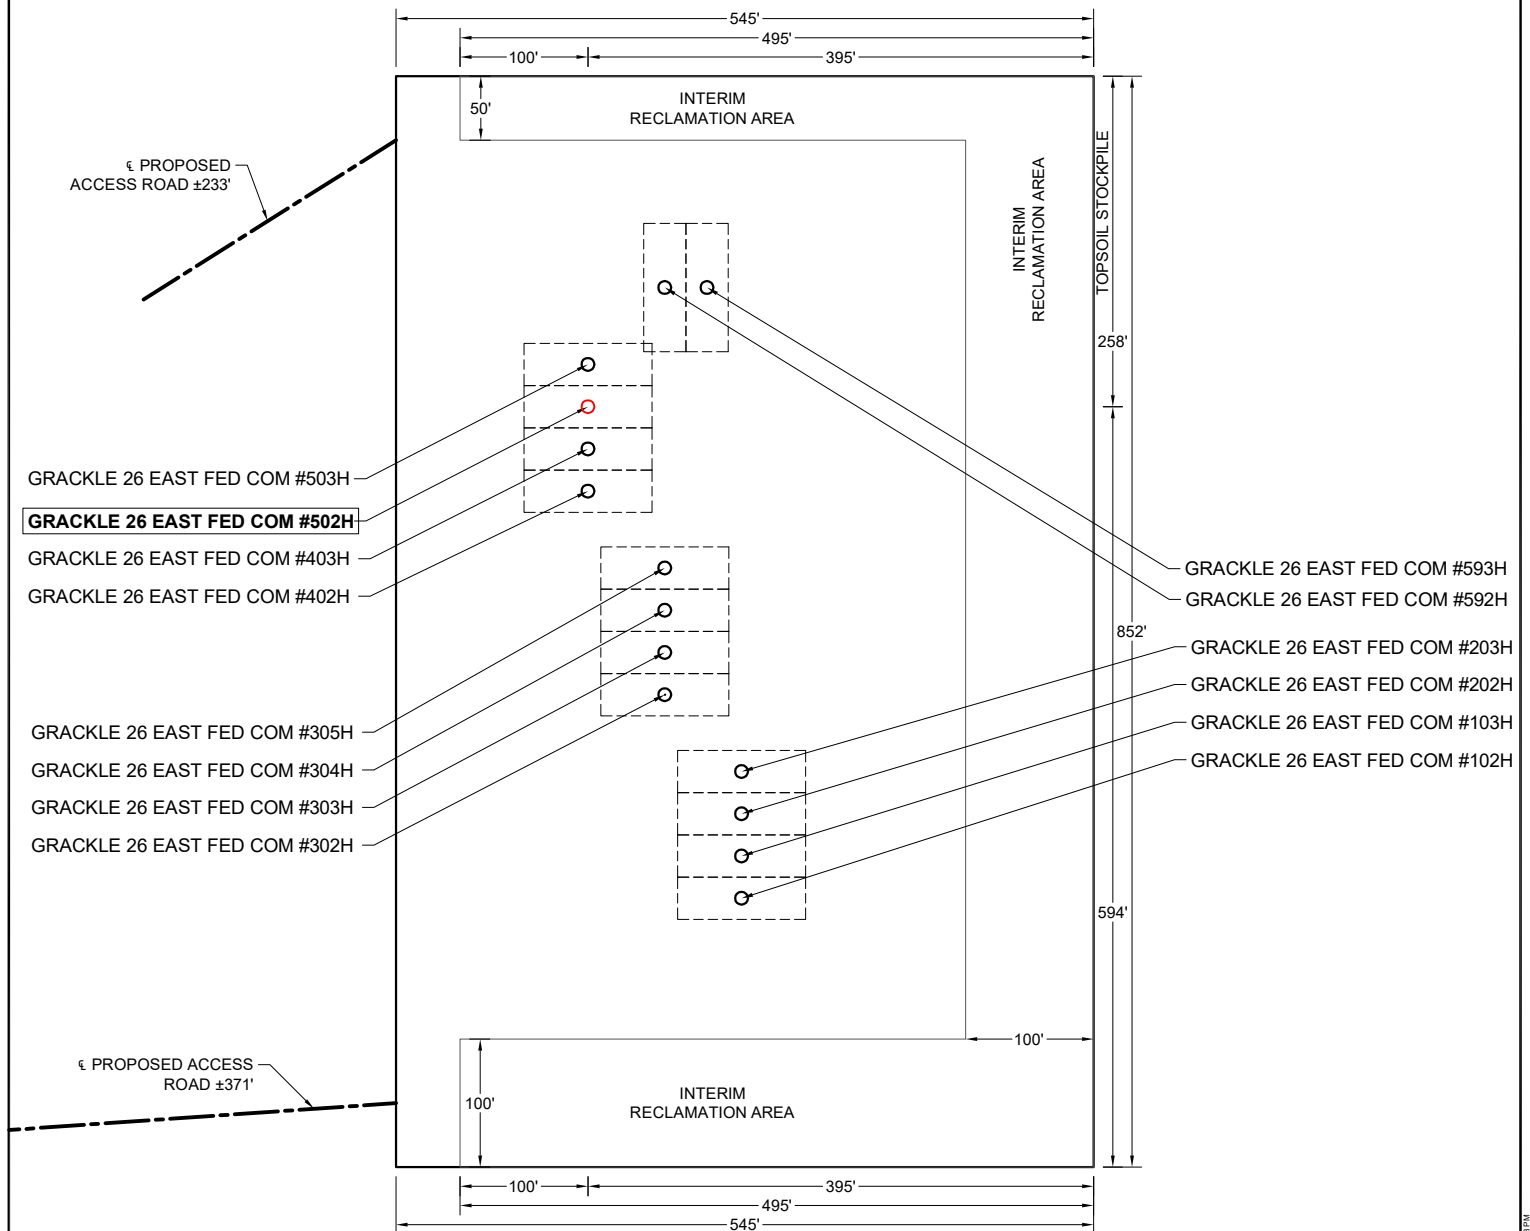

LEASE NAME & WELL NO.: GRACKLE 26 EAST FED COM #502H  
LATITUDE: N 32.183595° LONG: W 103.434825° ELEVATION: 3429'

SECTION: 26 TWP: 24 S RGE: 34 E SURVEY: N.M.P.M.  
COUNTY: LEA STATE: NM


DESCRIPTION: CENTER OF PAD IS 709' FSL & 687' FEL



JOB No.: EOG B200054


ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE FOLLOWING COORDINATE SYSTEM: NAD83 NEW MEXICO STATE PLANE, EAST ZONE, U.S. SURVEY FEET.

DISCLAIMER:  
THIS PLOT DOES NOT REPRESENT A MONUMENTED LAND SURVEY AND SHOULD NOT BE RELIED UPON TO DETERMINE BOUNDARY LINES, PROPERTY OWNERSHIP OR OTHER PROPERTY INTERESTS.



# EXHIBIT 1

## LOCATION & ELEVATION VERIFICATION MAP

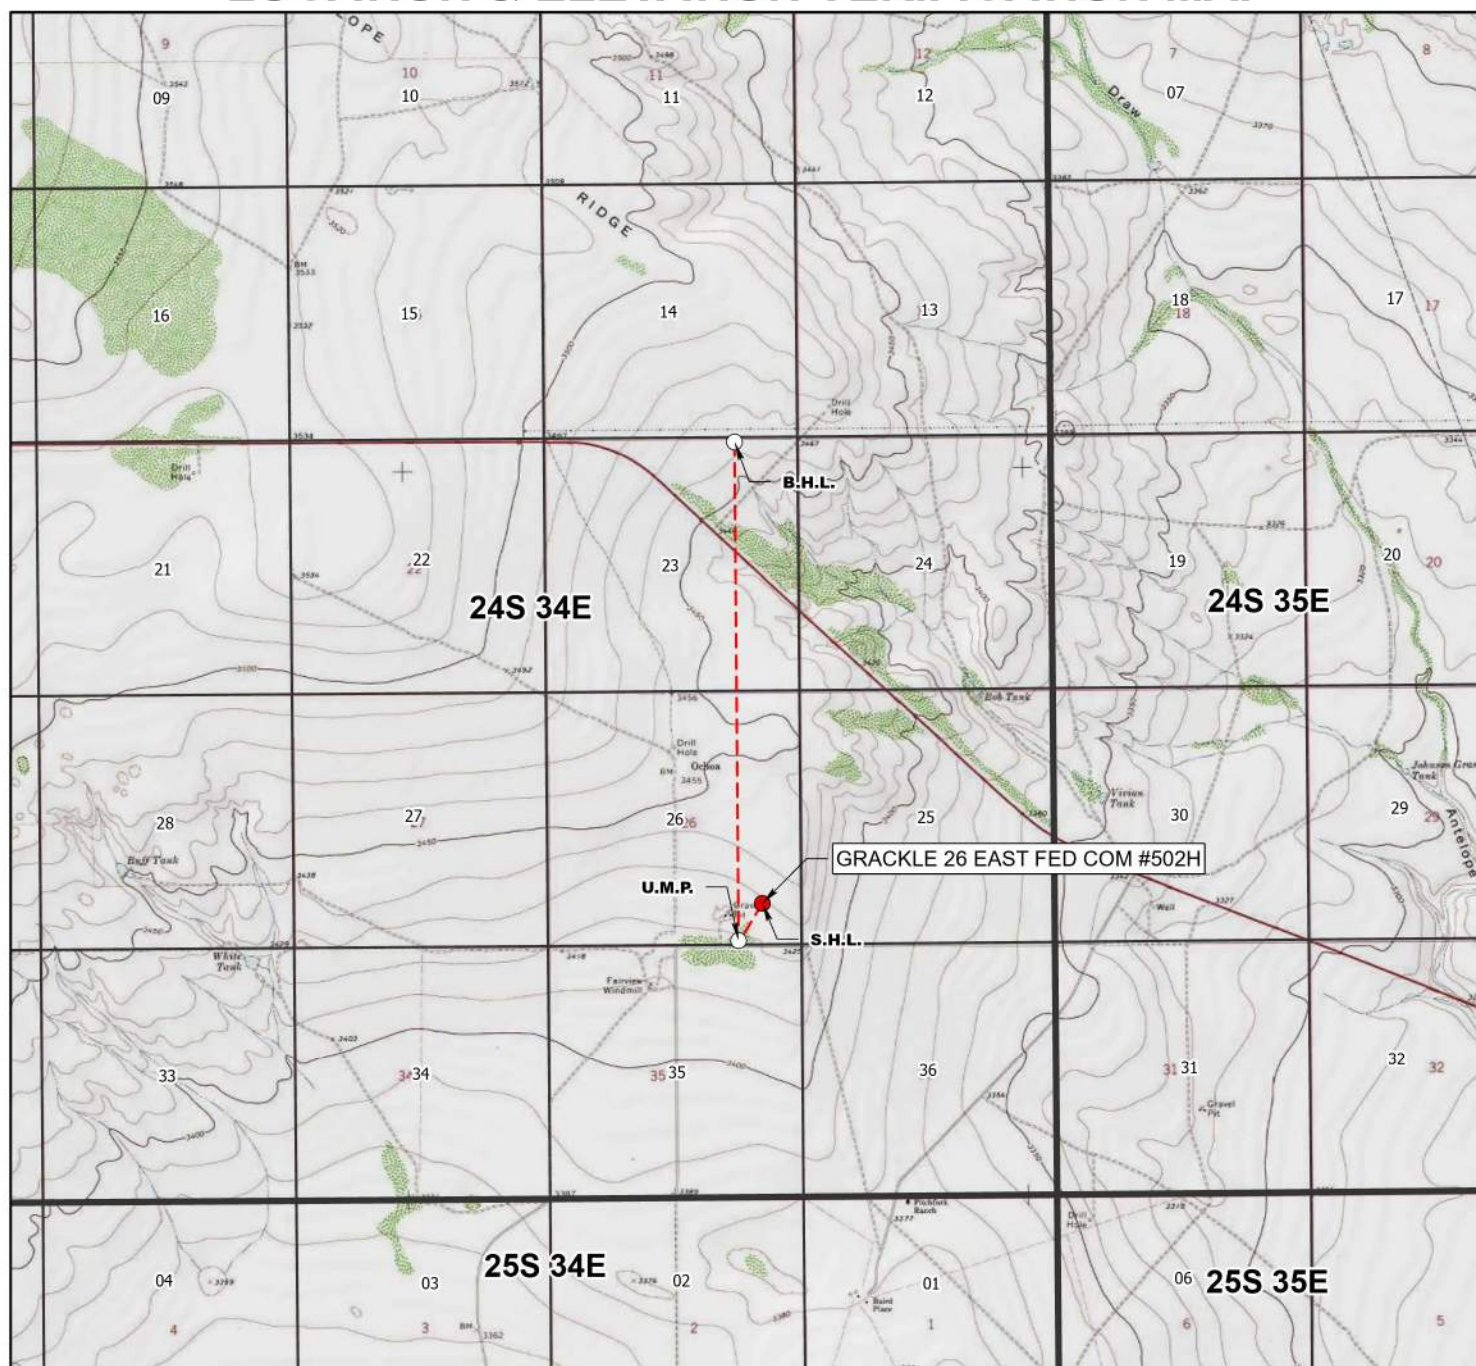

LEASE NAME & WELL NO.: GRACKLE 26 EAST FED COM #502H  
 LATITUDE: N 32.183595 LONG: W 103.434825 ELEVATION: 3429'

SECTION: 26 TWP: 24S RGE: 34E SURVEY: N.M.P.M.  
 COUNTY: LEA STATE: NM

DESCRIPTION: 876' FSL & 808' FEL

- S.H.L.
- U.M.P.; L.M.P.; B.H.L.
- Bore Line
- Section
- Township




JOB No.: EOG\_B200054

NOTE:  
 ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE FOLLOWING COORDINATE SYSTEM: NAD83 NEW MEXICO STATE PLANE, EAST ZONE, U.S. SURVEY FEET

DISCLAIMER:  
 THIS PLOT DOES NOT REPRESENT A MONUMENTED LAND SURVEY AND SHOULD NOT BE RELIED UPON TO DETERMINE BOUNDARY LINES, PROPERTY OWNERSHIP OR OTHER PROPERTY INTERESTS.

Released to Imaging: 9/19/2025 10:17:10 AM



EOG Resources, Inc.  
GRACKLE 26 EAST FED COM 502H

SHL: 876 FNL & 808 FEL, Section: 35, T.24S., R.34E.  
BHL: 100 FNL & 1311 FEL, Section: 23, T.24S., R.34E.

# Surface Use Plan of Operations

## Introduction

The following surface use plan of operations will be followed and carried out once the APD is approved. No other disturbance will be created other than what was submitted in this surface use plan. If any other surface disturbance is needed after the APD is approved, a BLM approved sundry notice or right of way application will be acquired prior to any new surface disturbance.

Before any surface disturbance is created, stakes or flagging will be installed to mark boundaries of permitted areas of disturbance, including soils storage areas. As necessary, slope, grade, and other construction control stakes will be placed to ensure construction in accordance with the surface use plan. All boundary markers will be maintained in place until final construction cleanup is completed. If disturbance boundary markers are disturbed or knocked down, they will be replaced before construction proceeds.

If terms and conditions are attached to the approved APD and amend any of the proposed actions in this surface use plan, we will adhere to the terms and conditions.

## 1. Existing Roads

- a. The existing access road route to the proposed project is depicted on GRACKLE 26 EAST FED COM 502H VICINITY. Improvements to the driving surface will be done where necessary. No new surface disturbance will be done, unless otherwise noted in the New or Reconstructed Access Roads section of this surface use plan..
- b. The existing access road route to the proposed project does cross lease boundaries and a BLM road right-of-way will be acquired from the BLM prior to construction activities.
- c. The operator will improve or maintain existing roads in a condition the same as or better than before operations begin. The operator will repair pot holes, clear ditches, repair the crown, etc. All existing structures on the entire access route such as cattleguards, other range improvement projects, culverts, etc. will be properly repaired or replaced if they are damaged or have deteriorated beyond practical use.
- d. We will prevent and abate fugitive dust as needed, whether created by vehicular traffic, equipment operations, or wind events. BLM written approval will be acquired before application of surfactants, binding agents, or other dust suppression chemicals on roadways.


## 2. New or Reconstructed Access Roads

- a. An access road will be needed for this proposed project. See the survey plat for the location of the access road.
- b. The length of access road needed to be constructed for this proposed project is about 1834 feet.
- c. The maximum driving width of the access road will be 30 feet. The maximum width of surface disturbance when constructing the access road will not exceed 25 feet. All areas outside of the driving surface will be revegetated.
- d. The access road will be constructed with 6 inches of compacted CALICHE.
- e. When the road travels on fairly level ground, the road will be crowned and ditched with a 2% slope from the tip of the road crown to the edge of the driving surface. The ditches will be 3 feet wide with 3:1 slopes. See Road Cross Section diagram below.



EOG Resources, Inc.  
GRACKLE 26 EAST FED COM 502H

SHL: 876 FNL & 808 FEL, Section: 35, T.24S., R.34E.  
BHL: 100 FNL & 1311 FEL, Section: 23, T.24S., R.34E.

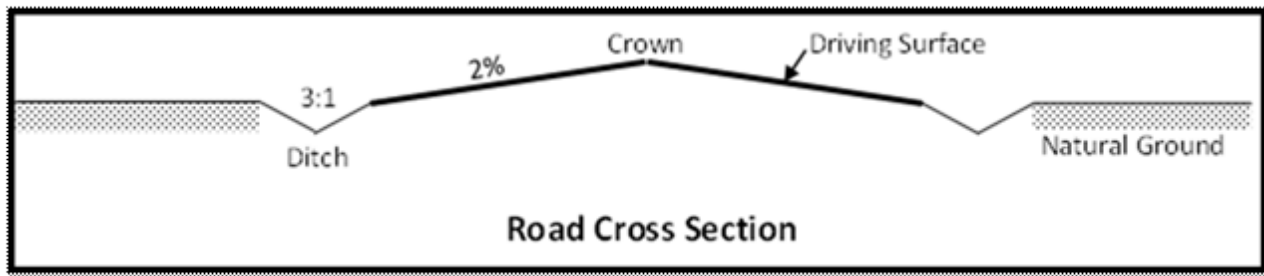

- f. The access road will be constructed with a ditch on each side of the road.
- g. The maximum grade for the access road will be 20 percent.
- h. No turnouts will be constructed on the proposed access road.
- i. An appropriately sized cattleguard sufficient to carry out the project will be installed and maintained at the fence crossing(s). Prior to cutting the fence, the fence will be braced and tied off on both sides of the passageway with H braces to protect the integrity of the fence line. See the survey plat for the location of the proposed cattle guard.
- j. Since the proposed access road crosses lease boundaries, a right-of-way will be required for this access road. A right-of-way grant will be applied for through the BLM. The access road will not be constructed until an approved BLM right-of-way grant is acquired.
- k. An appropriately sized culvert will be installed where drainages cross the access road. The culvert(s) will be no less than 18 inches in diameter and covered with no less than 12 inches of surfacing material. Each culvert will be marked with reflectors attached to T-Posts on both sides of the road. The uphill and downhill opening of the culvert will have rip-rap (cobble stone) extending 3 feet out and 12 inches deep to slow water flow entering and exiting the culvert. Standards in the BLM Gold Book will be used. The culvert will be maintained in its original condition throughout the life of the road. See survey plat for location of culvert(s).
- l. No low water crossings will be constructed for the access road.
- m. Since the access road is on level ground, no lead-off ditches will be constructed for the proposed access road.
- n. Newly constructed or reconstructed roads, on surface under the jurisdiction of the Bureau of Land Management, will be constructed as outlined in the BLM "Gold Book" and to meet the standards of the anticipated traffic flow and all anticipated weather requirements as needed. Construction will include ditching, draining, crowning and capping or sloping and dipping the roadbed as necessary to provide a well-constructed and safe road.

### 3. Location of Existing Wells

- a. GRACKLE 26 EAST FED COM 502H RADIUS of the APD depicts all known wells within a one mile radius of the proposed well.
- b. There is no other information regarding wells within a one mile radius.

### 4. Location of Existing and/or Proposed Production Facilities SEE ELECTRICAL ATTACHMENT

- a. All permanent, lasting more than 6 months, above ground structures including but not limited to pumpjacks, storage tanks, barrels, pipeline risers, meter housing, etc. that are not subject to safety requirements will be painted a non-reflective paint color, Shale Green, from the BLM Standard Environmental Colors chart, unless another color is required in the APD Conditions of Approval.
- b. If any type of production facilities are located on the well pad, they will be strategically placed to allow for

EOG Resources, Inc.

SHL: 876 FNL &amp; 808 FEL, Section: 35, T.24S., R.34E.

GRACKLE 26 EAST FED COM 502H

BHL: 100 FNL &amp; 1311 FEL, Section: 23, T.24S., R.34E.

maximum interim reclamation, recontouring, and revegetation of the well location.

c. A production facility is proposed to be installed off the proposed well location. Production from the well will be processed at this production facility. GRACKLE 26 EAST FED COM CTB depicts the location of the production facilities.

d. The proposed production facility will have a secondary containment structure that is constructed to hold the capacity of 1-1/2 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

e. GRACKLE 26 EAST FED COM INFRASTRUCTURE MAP/SKETCH depicts the production facility as well.

f. A pipeline to transport production from the proposed well to the production facility will be installed.

i. We plan to install a 6 inch buried FLEXPIPE/FLEXSTEEL pipeline from the proposed well to the offsite production facility. The proposed length of the pipeline will be 1409 feet. The working pressure of the pipeline will be about 1440 psi. A 30 feet wide work area will be needed to install the buried pipeline. In areas where blading is allowed, topsoil will be stockpiled and separated from the excavated trench mineral material. Final reclamation procedures will match the procedures in Plans for Surface Reclamation. When the excavated soil is backfilled, it will be compacted to prevent subsidence. No berm over the pipeline will be evident.

ii. GRACKLE 26 EAST FED COM INFRASTRUCTURE EXHIBIT 5 depicts the proposed production pipeline route from the well to the existing production facility.

iii. The proposed pipeline does not cross lease boundaries, so a right of way grant will not need to be acquired from the BLM.

**If any plans change regarding the production facility or other infrastructure (pipeline, electric line, etc.), we will submit a sundry notice or right of way (if applicable) prior to installation or construction.**

### Electric Line(s)

a. No electric line will be applied for with this APD.

## 5. Location and Types of Water

a. The source and location of the water supply are as follows: The source and location of the water supply are as follows: This location will be drilled using a combination of water mud systems as outlined in the drilling program (i) Water will be obtained from commercial water stations in the area and hauled to the location by trucks using existing and proposed roads as depicted on the road map attached (ii) Water may be supplied from frac ponds and transported to the location by temporary above ground surface lines as shown on the map EOG plans to utilize up to eight 4 inch polyethylene or layflat lines and up to eight 12 inch layflat lines to transport fresh water Freshwater contains less than 10,000 mg/l Total Dissolved Solids (TDS) exhibits no petroleum sheen when standing and is not previously used in mechanical processes that expose it to heavy metals or other potential toxins

EOG plans to utilize up to eight 4 inch polyethylene or layflat lines and up to eight 12 inch layflat lines to transport treated produced water defined as reconditioning produced water to a reusable form and may include mechanical and chemical processes

Freshwater Source:

Bear Pit Section 36 Township 25S Range 36E Lea County New Mexico (NWSW)

Treated Produced Water Source:

Lomas Reuse Pit Section 26 Township 25S Range 36E Lea County New Mexico (SWNW and SENW)



EOG Resources, Inc.

SHL: 876 FNL &amp; 808 FEL, Section: 35, T.24S., R.34E.

GRACKLE 26 EAST FED COM 502H

BHL: 100 FNL &amp; 1311 FEL, Section: 23, T.24S., R.34E.

Temporary surface lines would originate from a single or multiple water source locations in the surrounding area of the proposed action and be temporarily laid above ground with minimal disturbance

Temporary surface line(s) shall be laid no more than 10 feet from the edge of the existing disturbance (ie\_ edge of bar\_borrow ditch\_ road surface or two track road\_ or other man made addition to the landscape) A push off arm or another mechanism will be used All vehicle equipment will remain within the existing disturbance Map or maps showing the locations of the temporary surface lines will be provided with the APD and included in the Environmental Assessment An electronic map file (shape file or KMZ file) shall be submitted with the Environmental Assessment.

b. GRACKLE 26 EAST FED COM WATER AND CALICHE MAP depicts the proposed route for a 12 inch POLY OR LAYFLAT temporary (<90 days) water pipeline supplying water for drilling operations.

## 6. Construction Material

a. Caliche will be supplied from pits shown on the attached caliche source map.

Caliche utilized for the drilling pad will be obtained either from an existing approved mineral pit, or by benching into a hill, which will allow the pad to be level with existing caliche from the cut or extracted by "Flipping" the well location. A mineral material permit will be obtained from BLM prior to excavating any caliche on Federal Lands. Amount will vary for each pad. The procedure for "Flipping" a well location is as follows:

\*□

-An adequate amount of topsoil/root zone (usually top 6 inches of soil) will be stripped from the proposed well location and stockpiled along the side of the well location as depicted on the well site diagram/survey plat.

-An area within the proposed well site dimensions will be used to excavate caliche.

Subsoil will be removed and stockpiled within the surveyed well pad dimensions.

-Once caliche/surfacing mineral is found, the mineral material will be excavated and stockpiled within the approved drilling pad dimensions.

-Then, subsoil will be pushed back in the excavated hole, and caliche will be spread accordingly across the entire well pad and road (if available).

-Neither caliche nor subsoil will be stockpiled outside the well pad dimensions. Topsoil will be stockpiled along the edge of the pad as depicted in the Well Site Layout or survey plat.

\*□

If no caliche is found onsite, caliche will be hauled in from a BLM-approved caliche pit or other established mineral pit. A BLM mineral material permit will be acquired before obtaining mineral material from BLM pits or federal land.

## 7. Methods for Handling Waste SEE SECTION SEVEN ATTACHMENT

a. Drilling fluids and produced oil and water from the well during drilling and completion operations will be stored safely and disposed of properly in an NMOCD approved disposal facility.

b. Garbage and trash produced during drilling and completion operations will be collected in a trash container and disposed of properly at a state approved disposal facility. All trash on and around the well site will be collected for disposal.

c. Human waste and grey water will be properly contained and disposed of properly at a state approved disposal facility.

d. After drilling and completion operations, trash, chemicals, salts, frac sand and other waste material will be removed and disposed of properly at a state approved disposal facility.

e. The well will be drilled utilizing a closed loop system. Drill cutting will be properly disposed of into steel tanks and taken to an NMOCD approved disposal facility.

---

EOG Resources, Inc.  
GRACKLE 26 EAST FED COM 502H

---

---

SHL: 876 FNL & 808 FEL, Section: 35, T.24S., R.34E.  
BHL: 100 FNL & 1311 FEL, Section: 23, T.24S., R.34E.

---

## 8. Ancillary Facilities

- a. No ancillary facilities will be needed for this proposed project.

## 9. Well Site Layout

- a. The following information is presented in the well site survey plat or diagram:
- i. reasonable scale (near 1":50')
  - ii. well pad dimensions
  - iii. well pad orientation
  - iv. drilling rig components
  - v. proposed access road
  - vi. elevations of all points
  - vii. topsoil stockpile
  - viii. reserve pit location/dimensions if applicable
  - ix. other disturbances needed (flare pit, stinger, frac farm pad, etc.)
  - x. existing structures within the 600' x 600' archaeological surveyed area (pipelines, electric lines, well pads, etc)
- b. The proposed drilling pad was staked and surveyed by a professional surveyor. The attached survey plat of the well site depicts the drilling pad layout as staked.
- c. A title of a well site diagram is GRACKL 26 EAST FED COM 502H RIG LAYOUT. This diagram depicts the RIG LAYOUT.
- d. Topsoil Salvaging
- i. Grass, forbs, and small woody vegetation, such as mesquite will be excavated as the topsoil is removed. Large woody vegetation will be stripped and stored separately and respread evenly on the site following topsoil resspreading. Topsoil depth is defined as the top layer of soil that contains 80% of the roots. In areas to be heavily disturbed, the top 6 inches of soil material, will be stripped and stockpiled on the perimeter of the well location and along the perimeter of the access road to control run-on and run-off, to keep topsoil viable, and to make redistribution of topsoil more efficient during interim reclamation. Stockpiled topsoil should include vegetative material. Topsoil will be clearly segregated and stored separately from subsoils. Contaminated soil will not be stockpiled, but properly treated and handled prior to topsoil salvaging.

## 10. Plans for Surface Reclamation

### Reclamation Objectives

- i. The objective of interim reclamation is to restore vegetative cover and a portion of the landform sufficient to maintain healthy, biologically active topsoil; control erosion; and minimize habitat and forage loss, visual impact, and weed infestation, during the life of the well or facilities.
- ii. The long-term objective of final reclamation is to return the land to a condition similar to what existed prior to disturbance. This includes restoration of the landform and natural vegetative community, hydrologic systems, visual resources, and wildlife habitats. To ensure that the long-term objective will be reached through human and natural processes, actions will be taken to ensure standards are met for site stability, visual quality, hydrological functioning, and vegetative productivity.

---

---

EOG Resources, Inc.

SHL: 876 FNL &amp; 808 FEL, Section: 35, T.24S., R.34E.

GRACKLE 26 EAST FED COM 502H

BHL: 100 FNL & 1311 FEL, Section: 23, T.24S., R.34E.

---

---

- iii. The BLM will be notified at least 3 days prior to commencement of any reclamation procedures.
- iv. If circumstances allow, interim reclamation and/or final reclamation actions will be completed no later than 6 months from when the final well on the location has been completed or plugged. We will gain written permission from the BLM if more time is needed.
- v. Interim reclamation will be performed on the well site after the well is drilled and completed. GRACKLE 26 EAST FED COM 502H RECLAMATION depicts the location and dimensions of the planned interim reclamation for the well site.

**Interim Reclamation Procedures (If performed)**

1. Within 30 days of well completion, the well location and surrounding areas will be cleared of, and maintained free of, all materials, trash, and equipment not required for production.
2. In areas planned for interim reclamation, all the surfacing material will be removed and returned to the original mineral pit or recycled to repair or build roads and well pads.
3. The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.
4. Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations including cuts & fills. To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used. Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.
5. Proper erosion control methods will be used on the area to control erosion, runoff and siltation of the surrounding area.
6. The interim reclamation will be monitored periodically to ensure that vegetation has reestablished and that erosion is controlled.

**Final Reclamation (well pad, buried pipelines, etc.)**

1. Prior to final reclamation procedures, the well pad, road, and surrounding area will be cleared of material, trash, and equipment.
2. All surfacing material will be removed and returned to the original mineral pit or recycled to repair or build roads and well pads.
3. All disturbed areas, including roads, pipelines, pads, production facilities, and interim reclaimed areas will be recontoured to the contour existing prior to initial construction or a contour that blends indistinguishably with the surrounding landscape. Topsoil that was spread over the interim reclamation areas will be stockpiled prior to recontouring. The topsoil will be redistributed evenly over the entire disturbed site to ensure successful revegetation.
4. After all the disturbed areas have been properly prepared, the areas will be seeded with the proper BLM seed mixture, free of noxious weeds. Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order

---

EOG Resources, Inc.  
GRACKLE 26 EAST FED COM 502H

---

---

SHL: 876 FNL & 808 FEL, Section: 35, T.24S., R.34E.  
BHL: 100 FNL & 1311 FEL, Section: 23, T.24S., R.34E.

---

to break the soil crust and create seed germination micro-sites.

5. Proper erosion control methods will be used on the entire area to control erosion, runoff and siltation of the surrounding area.

6. All unused equipment and structures including pipelines, electric line poles, tanks, etc. that serviced the well will be removed.

7. All reclaimed areas will be monitored periodically to ensure that revegetation occurs, that the area is not redisturbed, and that erosion is controlled.

## 11. Surface Ownership

a. The surface ownership of the proposed project is PRIVATE.

1. **Surface Owner:** QUAIL RANCH, LLC

**Phone Number:** (432) 683-7443

**Address:** One Concho Center, 600 West Illinois Ave Midland, Texas 79701

a. A surface use agreement was obtained from the private surface owner regarding the proposed project.

b. A good faith effort was made to provide a copy of the APD Surface Use Plan of Operations to the private surface owner.

## 12. Other Information

a. Onsite meeting was conducted on 12/19/2023

We plan to use eight 12-inch lay flat hoses to transport water and eight 4-inch polylines or layflay for drilling and frac operations.

The well will be produced using gas lift as the artificial lift method.

Produced water will be transported via pipeline to the EOG produced water gathering system.

24-inch Produced Water:

Total length 1,386.5' or 84.00 rods

Section 26, T24-S, R34-E, on lease portion – 1,386.5' or 84.00 rods Fee Surface

20-inch Gas Sales:

Total length 9,246.13' or 560.38 rods

Section 4, T24-S, R34-E, on lease portion – 3,588.37' or 217.48 rods Fed Surface

Section 33, T25-S, R34-E – 347.45' or 21.06 rods Fed Surface

Section 32, T25-S, R34-E – 5310.31' or 321.84 rods State Surface

3 Phase 14.4 Primary Voltage Overhead Electric Lines:

Total length 93.6' or 5.70

Section 26, T24-S, R34-E, on lease portion – 93.6' or 5.70 rods Fee Surface

8" Gas Lift Pipeline:

Total length 7,263.00' or 440.20 rods

Section 26, T24-S, R34-E, on lease portion – 7,263.00' or 440.20 rods Fee Surface

8" Crude Oil Pipeline:

Total length 6,549.70' or 397.00 rods

Section 26, T24-S, R34-E, on lease portion – 6,507.40' or 394.4 rods Fee Surface

---

---

EOG Resources, Inc.

SHL: 876 FNL &amp; 808 FEL, Section: 35, T.24S., R.34E.

GRACKLE 26 EAST FED COM 502H

BHL: 100 FNL & 1311 FEL, Section: 23, T.24S., R.34E.

---

---

Section 26, T24-S, R34-E, on lease portion – 42.3' or 2.6 rods Fed Surface

Caliche Pit Options:

Quail Ranch Battle Axe Pit- SE/4 Section 26, Range 34E, Township 24 South, Lea County, NM.

Fresh and Reuse Options:

EOG McCloy Freshwater Pit in Section 31, Range 34 East, Township 25 South.

EOG Klondike Reuse Pit in Section 23, Range 34 East, Township 25 South.

EOG will install up to 30-inch culverts crossing proposed lease roads in thirteen locations identified on the attached map. See the coordinates below:

Culvert #1 - 32°11'9.61"N, - 103°26'13.97"W

Culvert #2 - 32°11'1.95"N, - 103°26'9.11"W

Culvert #3 - 32°10'55.37"N, - 103°26'11.06"W

Culvert #4 - 32°10'52.94"N, - 103°26'15.47"W

Culvert #5 - 32°10'41.94"N, - 103°26'26.29"W

Culvert #6 - 32°10'41.93"N, - 103°26'24.56"W

Culvert #7 - 32°10'46.28"N, - 103°26'24.52"W

EOG will install 3 cattleguards at 3 locations on the proposed lease roads. See coordinates below.

Cattleguard #1- 32°11'11.82", -103°26'9.69"W

Cattleguard #2- 32°10'41.93"N, - 103°26'25.18"W

### 13. Maps and Diagrams

GRACKLE 26 EAST FED COM 502H VICINITY - Existing Road

GRACKLE 26 EAST FED COM 502H RADIUS - Wells Within One Mile

GRACKLE 26 EAST FED COM CTB - Production Facilities Diagram

GRACKLE 26 EAST FED COM INFRASTRUCTURE MAP/SKETCH - Additional Production Facilities Diagram

GRACKLE 26 EAST FED COM INFRASTRUCTURE EXHIBIT 5 - Production Pipeline

GRACKLE 26 EAST FED COM WATER AND CALICHE MAP - Drilling Water Pipeline

GRACKLE 26 EAST FED COM 502H RIG LAYOUT - Well Site Diagram

GRACKLE 26 EAST FED COM 502H RECLAMATION - Interim Reclamation

EOG Resources, Inc.

**Surface Use Plan of Operations Section 7 Methods for Handling Waste Attachment**

Human waste managed by third-party vendors. ROW construction waste contained in on-site portable toilets maintained by third party vendor. During drilling activities waste is managed by third party vendor utilizing onsite aerobic (treatment) wastewater management. Liquids treated through the aerobic system are transferred to via water line to CTBs for reuse by EOG. All solid waste remaining after treatment process are pumped into an enclosed waste transfer truck at the time of rig down and taken to one of the following disposal facilities by the third-party vendor: Qual Run Services LLC (a Licensed Waste Management Service Facility in Reeves County, Texas) or ReUse OilField Services (a Licensed Waste Management Facility in Mentone, TX)

Trash dumpsters are utilized to contain garbage onsite. Dumpsters are maintained by a third-party vendor. All trash is hauled to Lee County, NM landfill.

EOG utilizes a Closed Loop System, cuttings leave the rig and enter low/highwall cuttings bin. Cuttings are then transferred to trucks for transportation to a State of New Mexico approved disposal facility. Primary disposal location for EOG's NM operations is the North Delaware Basin Disposal Facility in Jal, New Mexico which is a privately owned commercial facility. Some EOG locations within New Mexico may require transportation of cuttings to other licensed commercial disposal facilities based on geographic location.

Drilling fluids and produced oil and water from the well during drilling and completion operations will be stored onsite in frac tanks and disposed of at the time of rig down. Primary disposal location for EOG's NM operations is the North Delaware Basin Disposal facility in Jal, New Mexico which is a privately owned commercial facility. Some EOG locations within New Mexico may require transportation of cuttings to other licensed commercial disposal facilities based on geographic location.



## OVERHEAD ELECTRIC LINE ATTACHMENT

### **Electric Line(s)**

a. We plan to install an overhead electric line for the proposed well. The proposed length of the electric line will be 94 feet. Overhead Electric Line depicts the location of the proposed electric line route. The electric line will be constructed to provide protection from raptor electrocution.

b. The proposed electric line does not cross lease boundaries, so a right of way grant will not need to be acquired from the BLM.



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

## PWD Data Report

07/15/2025

**APD ID:** 10400097948

**Submission Date:** 04/11/2024

**Operator Name:** EOG RESOURCES INCORPORATED

**Well Name:** GRACKLE 26 EAST FED COM

**Well Number:** 502H

**Well Type:** OIL WELL

**Well Work Type:** Drill

### Section 1 - General

Would you like to address long-term produced water disposal? NO

### Section 2 - Lined

Would you like to utilize Lined Pit PWD options? N

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Other PWD Surface Owner Description:**

**Lined pit PWD on or off channel:**

**Lined pit PWD discharge volume (bbl/day):**

**Lined pit**

**Pit liner description:**

**Pit liner manufacturers**

**Precipitated solids disposal:**

**Describe precipitated solids disposal:**

**Precipitated solids disposal**

**Lined pit precipitated solids disposal schedule:**

**Lined pit precipitated solids disposal schedule**

**Lined pit reclamation description:**

**Lined pit reclamation**

**Leak detection system description:**

**Leak detection system**

**Operator Name:** EOG RESOURCES INCORPORATED

**Well Name:** GRACKLE 26 EAST FED COM

**Well Number:** 502H

**Lined pit Monitor description:**

**Lined pit Monitor**

**Lined pit: do you have a reclamation bond for the pit?**

**Is the reclamation bond a rider under the BLM bond?**

**Lined pit bond number:**

**Lined pit bond amount:**

**Additional bond information**

### Section 3 - Unlined

**Would you like to utilize Unlined Pit PWD options?** N

**Produced Water Disposal (PWD) Location:**

**PWD disturbance (acres):**

**PWD surface owner:**

**Other PWD Surface Owner Description:**

**Unlined pit PWD on or off channel:**

**Unlined pit PWD discharge volume (bbl/day):**

**Unlined pit**

**Precipitated solids disposal:**

**Describe precipitated solids disposal:**

**Precipitated solids disposal**

**Unlined pit precipitated solids disposal schedule:**

**Unlined pit precipitated solids disposal schedule**

**Unlined pit reclamation description:**

**Unlined pit reclamation**

**Unlined pit Monitor description:**

**Unlined pit Monitor**

**Do you propose to put the produced water to beneficial use?**

**Beneficial use user**

**Estimated depth of the shallowest aquifer (feet):**

**Precipitated Solids Permit**

**Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?**

**TDS lab results:**

**Geologic and hydrologic**

**Operator Name:** EOG RESOURCES INCORPORATED**Well Name:** GRACKLE 26 EAST FED COM**Well Number:** 502H**State****Unlined Produced Water Pit Estimated****Unlined pit: do you have a reclamation bond for the pit?****Is the reclamation bond a rider under the BLM bond?****Unlined pit bond number:****Unlined pit bond amount:****Additional bond information****Section 4 -****Would you like to utilize Injection PWD options?** N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Other PWD Surface Owner Description:****Injection PWD discharge volume (bbl/day):****Injection well mineral owner:****Injection well type:****Injection well number:****Injection well name:****Assigned injection well API number?****Injection well API number:****Injection well new surface disturbance (acres):****Minerals protection information:****Mineral protection****Underground Injection Control (UIC) Permit?****UIC Permit****Section 5 - Surface****Would you like to utilize Surface Discharge PWD options?** N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Other PWD Surface Owner Description :****Surface discharge PWD discharge volume (bbl/day):****Surface Discharge NPDES Permit?****Surface Discharge NPDES Permit attachment:****Surface Discharge site facilities information:****Surface discharge site facilities map:**

Operator Name: EOG RESOURCES INCORPORATED

Well Name: GRACKLE 26 EAST FED COM

Well Number: 502H

Section 6 -

Would you like to utilize Other PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

PWD Surface Owner Description:

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type

Have other regulatory requirements been met?

Other regulatory requirements



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

## Bond Info Data

07/15/2025

**APD ID:** 10400097948

**Submission Date:** 04/11/2024

**Operator Name:** EOG RESOURCES INCORPORATED

**Well Name:** GRACKLE 26 EAST FED COM

**Well Number:** 502H

**Well Type:** OIL WELL

**Well Work Type:** Drill

Highlighted data  
reflects the most  
recent changes  
[Show Final Text](#)

### Bond

**Federal/Indian APD:** FED

**BLM Bond number:** NM2308

**BIA Bond number:**

**Do you have a reclamation bond?** NO

**Is the reclamation bond a rider under the BLM bond?**

**Is the reclamation bond BLM or Forest Service?**

**BLM reclamation bond number:**

**Forest Service reclamation bond number:**

**Forest Service reclamation bond attachment:**

**Reclamation bond amount:**

**Reclamation bond rider amount:**

**Additional reclamation bond information attachment:**



|                                                                          |                                                                                                                |                      |                                                       |
|--------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------|
| C-102<br><br>Submit Electronically<br>Via OCD Permitting                 | State of New Mexico<br><br>Energy, Minerals & Natural Resources Department<br><b>OIL CONSERVATION DIVISION</b> | Revised July 9, 2024 |                                                       |
|                                                                          |                                                                                                                | Submittal<br>Type:   | <input checked="" type="checkbox"/> Initial Submittal |
|                                                                          |                                                                                                                |                      | <input type="checkbox"/> Amended Report               |
|                                                                          |                                                                                                                |                      | <input type="checkbox"/> As Drilled                   |
| Property Name and Well Number<br><br><b>GRACKLE 26 EAST FED COM 502H</b> |                                                                                                                |                      |                                                       |

## WELL LOCATION AND ACREAGE DEDICATION PLAT

|                                                                                                                                                        |                                                 |                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| API Number<br><b>30-025-55230</b>                                                                                                                      | Pool Code<br><b>96434</b>                       | Pool Name<br><b>Red Hills; Bone Spring, North</b>                                                                                                                 |
| Property Code<br><b>336553</b>                                                                                                                         | Property Name<br><b>GRACKLE 26 EAST FED COM</b> | Well Number<br><b>502H</b>                                                                                                                                        |
| OGRID No.<br><b>7377</b>                                                                                                                               | Operator Name<br><b>EOG RESOURCES, INC.</b>     | Ground Level Elevation<br><b>3429'</b>                                                                                                                            |
| Surface Owner: <input type="checkbox"/> State <input checked="" type="checkbox"/> Fee <input type="checkbox"/> Tribal <input type="checkbox"/> Federal |                                                 | Mineral Owner: <input type="checkbox"/> State <input checked="" type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal |

## Surface Location

|               |         |          |       |     |                   |                   |              |               |        |
|---------------|---------|----------|-------|-----|-------------------|-------------------|--------------|---------------|--------|
| UL or Lot No. | Section | Township | Range | Lot | Feet from the N/S | Feet from the E/W | Latitude     | Longitude     | County |
| P             | 26      | 24 S     | 34 E  |     | 876 FSL           | 808 FEL           | N 32.183595° | W 103.434825° | LEA    |

## Bottom Hole Location If Different From Surface

|               |         |          |       |     |                   |                   |              |               |        |
|---------------|---------|----------|-------|-----|-------------------|-------------------|--------------|---------------|--------|
| UL or Lot No. | Section | Township | Range | Lot | Feet from the N/S | Feet from the E/W | Latitude     | Longitude     | County |
| A             | 23      | 24 S     | 34 E  |     | 100 FNL           | 1311 FEL          | N 32.209996° | W 103.436442° | LEA    |

|                                               |                                          |                                                          |         |                                                                                                    |                               |
|-----------------------------------------------|------------------------------------------|----------------------------------------------------------|---------|----------------------------------------------------------------------------------------------------|-------------------------------|
| Dedicated Acres<br><b>640</b>                 | Infill or Defining Well<br><b>INFILL</b> | Defining Well API<br><b>GRACKLE 26 EAST FED COM 402H</b> | PENDING | Overlapping Spacing Unit (Y/N)<br><b>Y</b>                                                         | Consolidated Code<br><b>C</b> |
| Order Numbers<br><b>COM AGREEMENT PENDING</b> |                                          |                                                          |         | Well Setbacks are under Common Ownership: <input type="checkbox"/> Yes <input type="checkbox"/> No |                               |

## Kick Off Point (KOP)

|               |         |          |       |     |                   |                   |              |               |        |
|---------------|---------|----------|-------|-----|-------------------|-------------------|--------------|---------------|--------|
| UL or lot no. | Section | Township | Range | Lot | Feet from the N/S | Feet from the E/W | Latitude     | Longitude     | County |
| P             | 26      | 24 S     | 34 E  |     | 50 FSL            | 1311 FEL          | N 32.181343° | W 103.436448° | LEA    |

## First Take Point (FTP)

|               |         |          |       |     |                   |                   |              |               |        |
|---------------|---------|----------|-------|-----|-------------------|-------------------|--------------|---------------|--------|
| UL or lot no. | Section | Township | Range | Lot | Feet from the N/S | Feet from the E/W | Latitude     | Longitude     | County |
| P             | 26      | 24 S     | 34 E  |     | 100 FSL           | 1311 FEL          | N 32.181481° | W 103.436448° | LEA    |

## Last Take Point (LTP)

|               |         |          |       |     |                   |                   |              |               |        |
|---------------|---------|----------|-------|-----|-------------------|-------------------|--------------|---------------|--------|
| UL or lot no. | Section | Township | Range | Lot | Feet from the N/S | Feet from the E/W | Latitude     | Longitude     | County |
| A             | 23      | 24 S     | 34 E  |     | 100 FNL           | 1311 FEL          | N 32.209996° | W 103.436442° | LEA    |

|                                                                   |                                                                                                        |                                        |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------------|
| Unitized Area or Area of Uniform Interest<br><b>UNITIZED AREA</b> | Spacing Unity Type<br><input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical | Ground Floor Elevation<br><b>3454'</b> |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------------|

## OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received The consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

*Star L Harrell* 8/20/25  
Signature Date

Star L Harrell

Print Name

star\_harrell@eogresources.com

E-mail Address

## SURVEYORS CERTIFICATION



Signature and Seal of Professional Surveyor Date

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

MITCHELL L. MCDONALD, N.M. P.L.S.

|                                    |                                            |
|------------------------------------|--------------------------------------------|
| Certificate Number<br><b>29821</b> | Date of Survey<br><b>DECEMBER 19, 2023</b> |
|------------------------------------|--------------------------------------------|

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

C-102

Submit Electronically  
Via OCD PermittingState of New Mexico  
Energy, Minerals & Natural Resources Department  
OIL CONSERVATION DIVISION

Revised July 9, 2024

Submittal  
Type:☒ Initial Submittal☐ Amended Report☐ As Drilled

Property Name and Well Number

## GRACKLE 26 EAST FED COM 502H

## SURFACE LOCATION

NEW MEXICO EAST  
NAD 1983  
X=819313' Y=431687'  
LAT=N32.183595°  
LONG=W103.434825°  
NAD 1927  
X=778127' Y=431629'  
LAT=N32.183470°  
LONG=W103.434354°  
876' FSL 808' FEL

## KOP LOCATION

NEW MEXICO EAST  
NAD 1983  
X=818818' Y=430864'  
LAT=N32.181343°  
LONG=W103.436448°  
NAD 1927  
X=777632' Y=430805'  
LAT=N32.181218°  
LONG=W103.435977°  
50' FSL 1311' FEL

## FIRST TAKE POINT

NEW MEXICO EAST  
NAD 1983  
X=818817' Y=430914'  
LAT=N32.181481°  
LONG=W103.436448°  
NAD 1927  
X=777632' Y=430855'  
LAT=N32.181355°  
LONG=W103.435977°  
100' FSL 1311' FEL

PROPOSED PENETRATION  
POINT 1


NEW MEXICO EAST  
NAD 1983  
X=818775' Y=436112'  
LAT=N32.195768°  
LONG=W103.436443°  
NAD 1927  
X=777590' Y=436053'  
LAT=N32.195643°  
LONG=W103.435971°  
0' FNL 1311' FEL

PROPOSED PENETRATION  
POINT 2

NEW MEXICO EAST  
NAD 1983  
X=818753' Y=438751'  
LAT=N32.203023°  
LONG=W103.436444°  
NAD 1927  
X=777568' Y=438692'  
LAT=N32.202898°  
LONG=W103.435972°  
2637' FNL 1311' FEL

LOWER MOST PERF./  
BOTTOM HOLE LOCATION

NEW MEXICO EAST  
NAD 1983  
X=818732' Y=441288'  
LAT=N32.209996°  
LONG=W103.436442°  
NAD 1927  
X=777547' Y=441229'  
LAT=N32.209871°  
LONG=W103.435970°  
100' FNL 1311' FEL

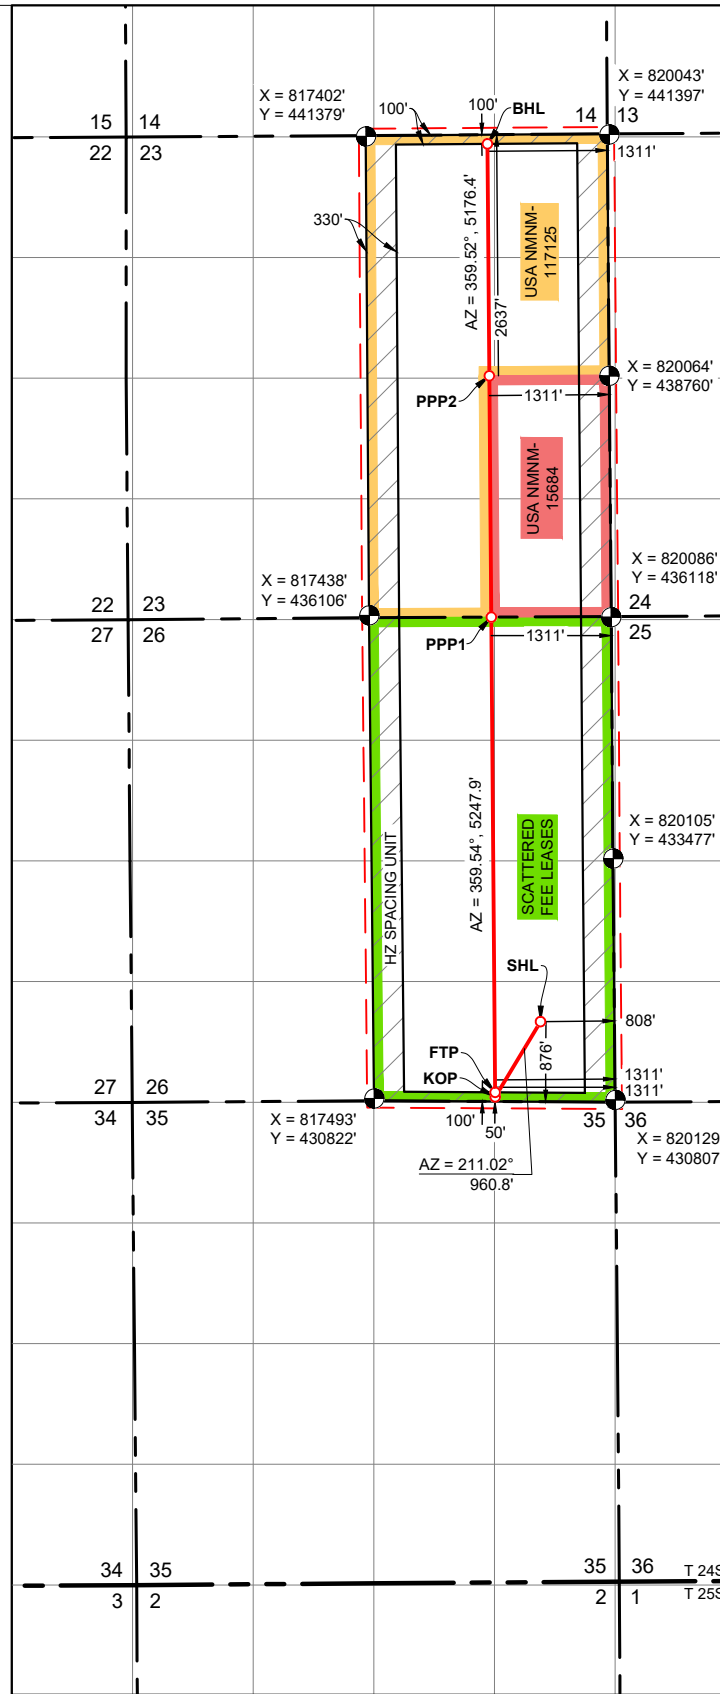

State of New Mexico  
Energy, Minerals and Natural Resources Department

Submit Electronically  
Via E-permitting

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

## NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

### **Section 1 – Plan Description** **Effective May 25, 2021**

**I. Operator:** EOG Resources, Inc. **OGRID:** 7377 **Date:** 7/15/2025

**II. Type:** ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: \_\_\_\_\_

**III. Well(s):** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name                    | API | ULSTR        | Footages            | Anticipated Oil BBL/D | Anticipated Gas MCF/D | Anticipated Produced Water BBL/D |
|------------------------------|-----|--------------|---------------------|-----------------------|-----------------------|----------------------------------|
| GRACKLE 26 EAST FED COM 502H |     | P-26-24S-34E | 876' FSL & 808' FEL | +/- 1000              | +/- 3500              | +/- 3000                         |
|                              |     |              |                     |                       |                       |                                  |

**IV. Central Delivery Point Name:** Grackle 26 East Fed Com CTB [See 19.15.27.9(D)(1) NMAC]

**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name                    | API | Spud Date | TD Reached Date | Completion Commencement Date | Initial Flow Back Date | First Production Date |
|------------------------------|-----|-----------|-----------------|------------------------------|------------------------|-----------------------|
| GRACKLE 26 EAST FED COM 502H |     | 9/15/25   | 10/2/25         | 12/01/25                     | 1/01/65                | 2/01/26               |
|                              |     |           |                 |                              |                        |                       |

**VI. Separation Equipment:** ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

**VII. Operational Practices:** ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

**VIII. Best Management Practices:** ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

## **Section 2 – Enhanced Plan**

### **EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

#### **IX. Anticipated Natural Gas Production:**

| Well | API | Anticipated Average Natural Gas Rate MCF/D | Anticipated Volume of Natural Gas for the First Year MCF |
|------|-----|--------------------------------------------|----------------------------------------------------------|
|      |     |                                            |                                                          |
|      |     |                                            |                                                          |

#### **X. Natural Gas Gathering System (NGGS):**

| Operator | System | ULSTR of Tie-in | Anticipated Gathering Start Date | Available Maximum Daily Capacity of System Segment Tie-in |
|----------|--------|-----------------|----------------------------------|-----------------------------------------------------------|
|          |        |                 |                                  |                                                           |
|          |        |                 |                                  |                                                           |

**XI. Map.** ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

**XII. Line Capacity.** The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

**XIII. Line Pressure.** Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

**XIV. Confidentiality:** ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

### **Section 3 - Certifications**

**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

***If Operator checks this box, Operator will select one of the following:***

**Well Shut-In.** ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

**Venting and Flaring Plan.** ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

### **Section 4 - Notices**

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: *Star L Harrell*

Printed Name: Star L Harrell

Title: Sr Regulatory Specialist

E-mail Address: Star\_Harrell@eogresources.com

Date: 7/15/2025

Phone: (432) 848-9161

**OIL CONSERVATION DIVISION**  
**(Only applicable when submitted as a standalone form)**

Approved By:

Title:

Approval Date:

Conditions of Approval:



**Natural Gas Management Plan****Items VI-VIII****VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.**

- Separation equipment will be sized to provide adequate separation for anticipated rates.
- Adequate separation relates to retention time for Liquid – Liquid separation and velocity for Gas-Liquid separation.
- Collection systems are appropriately sized to handle facility production rates on all (3) phases.
- Ancillary equipment and metering is selected to be serviced without flow interruptions or the need to release gas from the well.

**VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.****Drilling Operations**

- All flare stacks will be properly sized. The flare stacks will be located at a minimum 100' from the nearest surface hole location on the pad.
- All natural gas produced during drilling operations will be flared, unless there is an equipment malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety and the environment, at which point the gas will be vented.

**Completions/Recompletions Operations**

- New wells will not be flowed back until they are connected to a properly sized gathering system.
- The facility will be built/sized for maximum anticipated flowrates and pressures to minimize waste.
- For flowback operations, multiple stages of separation will be used as well as excess VRU and blowers to make sure waste is minimized off the storage tanks and facility.
- During initial flowback, the well stream will be routed to separation equipment.
- At an existing facility, when necessary, post separation natural gas will be flared until it meets pipeline specifications, at which point it will be turned into a collection system.
- At a new facility, post separation natural gas will be vented until storage tanks can safely function, at which point it will be flared until it meets pipeline spec.

**Production Operations**

- Weekly AVOs will be performed on all facilities.
- All flares will be equipped with auto-ignition systems and continuous pilot operations.
- After a well is stabilized from liquid unloading, the well will be turned back into the collection system.
- All plunger lift systems will be optimized to limit the amount of waste.
- All tanks will have automatic gauging equipment installed.
- Leaking thief hatches found during AVOs will be cleaned and properly re-sealed.

**Performance Standards**

- Production equipment will be designed to handle maximum anticipated rates and pressure.
- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- Weekly AVOs will be performed on all wells and facilities that produce more than 60 Mcfd.

**Measurement & Estimation**

- All volume that is flared and vented that is not measured will be estimated.
- All measurement equipment for flared volumes will conform to API 14.10.
- No meter bypasses will be installed.

- When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated.

**VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.**

- During downhole well maintenance, EOG will use best management practices to vent as minimally as possible.
- Prior to the commencement of any maintenance, the tank or vessel will be isolated from the rest of the facilities.
- All valves upstream of the equipment will be closed and isolated.
- After equipment has been isolated, the equipment will be blown down to as low a pressure as possible into the collection system.
- If the equipment being maintained cannot be relieved into the collection system, it shall be released to a tank where the vapor can either be captured or combusted if possible.
- After downhole well maintenance, natural gas will be flared until it reaches pipeline specification.

Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

ACKNOWLEDGMENTS  
  
Action 502061

ACKNOWLEDGMENTS

|                                                                             |                                                                       |
|-----------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Operator:<br>EOG RESOURCES INC<br>5509 Champions Drive<br>Midland, TX 79706 | OGRID:<br>7377                                                        |
|                                                                             | Action Number:<br>502061                                              |
|                                                                             | Action Type:<br>[C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

ACKNOWLEDGMENTS

|                                     |                                                                                                                            |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well. |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------|

Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 502061

**CONDITIONS**

|                                                                             |                                                                       |
|-----------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Operator:<br>EOG RESOURCES INC<br>5509 Champions Drive<br>Midland, TX 79706 | OGRID:<br>7377                                                        |
|                                                                             | Action Number:<br>502061                                              |
|                                                                             | Action Type:<br>[C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

**CONDITIONS**

| Created By  | Condition                                                                                                                                                                                                                                                             | Condition Date |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| sharrell1   | Cement is required to circulate on both surface and intermediate1 strings of casing.                                                                                                                                                                                  | 9/2/2025       |
| sharrell1   | If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.                                                                                                                                                            | 9/2/2025       |
| ward.rikala | Notify the OCD 24 hours prior to casing & cement.                                                                                                                                                                                                                     | 9/19/2025      |
| ward.rikala | File As Drilled C-102 and a directional Survey with C-104 completion packet.                                                                                                                                                                                          | 9/19/2025      |
| ward.rikala | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string. | 9/19/2025      |
| ward.rikala | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.                  | 9/19/2025      |