

Santa Fe Main Office
Phone: (505) 476-3441
General Information
Phone: (505) 629-6116

State of New Mexico
Energy, Minerals and Natural Resources

Online Phone Directory Visit:
<https://www.emnrd.nm.gov/ocd/contact-us/>

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other INJECTION		WELL API NO. 30-025-05755
2. Name of Operator Apache Corporation		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
3. Address of Operator 303 Veteran's Airpark Lane, Suite 1000, Midland, TX 79705		6. State Oil & Gas Lease No. A-3918
4. Well Location Unit Letter <u>O</u> : <u>330</u> feet from the <u>S</u> line and <u>2310</u> feet from the <u>E</u> line Section <u>30</u> Township <u>19S</u> Range <u>37E</u> NMPM County <u>LEA</u>		7. Lease Name or Unit Agreement Name North Monument G/SA Unit [302708]
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3607 GR		8. Well Number <u>015 (1015)</u> 9. OGRID Number <u>873</u> 10. Pool name or Wildcat Eunice Monument; G/SA [23000]

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input checked="" type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/> DOWNHOLE COMMINGLE <input type="checkbox"/> CLOSED-LOOP SYSTEM <input type="checkbox"/> OTHER: <input type="checkbox"/>		SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/> CASING/CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>	
---	--	---	--

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Hilcorp is requesting to rig up on this well and perform a clean-out to increase our injection rate. The proposed procedure is:

- 1 - MIRU, ND/NU, FUNCTION TEST BOP, KILL WELL
- 2 - RIH AND SET BLANKING PLUG, PRESSURE TEST TUBING TO 850 PSI FOR 5 MIN
- 3 - SCAN OOH WITH TUBING AND INJ PACKER, LD RB AND GB, REPLACE WITH SIMILAR SPEC TUBING
- 4 - PU BIT AND WS, RIH AND CLEAN-OUT TO ~3933', POOH W/BIT
- 5 - RIH W/TREATING PACKER TO ~3750', TEST CSG TO 600 PSI FOR 15 MIN
- 6 - PUMP 10,000 NEFE 15% HCl ACID JOB W/VENDOR RECOMMENDED ADDITIVES & OVERFLUSH VOLUME
- 7 - POOH W/TREATING PACKER AND WS
- 8 - RIH W/INJECTION PACKER AND TUBING, SET PACKER @ ~3740' (TOP PERF 3790', INJ PKR B/N 3690-3740')
- 9 - NOTIFY NMOCD WITH 24 HR NOTICE AND PERFORM WITNESSED MIT
- 10 - RETURN TO INJECTION, MAX INJ PRESSURE 750 PSI, RDMO

The current and proposed WBD are attached.

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Alicia Fulton TITLE EHS Regulatory Advisor DATE 2/18/26

Type or print name Alicia Fulton E-mail address: alicia.fulton@apachecorp.com PHONE: 432-818-1088

For State Use Only

APPROVED BY: _____ TITLE _____ DATE _____

Conditions of Approval (if any): _____




Current Schematic - Version 3

Well Name: NORTH MONUMENT G/SA UNIT #1015

API / UWI 3002505755	Surface Legal Location Block UNKNOWN	Field Name Eunice	Route	State/Province NEW MEXICO	Well Configuration Type Vertical
Ground Elevation (ft) 3,607.00	Original KB/RT Elevation (ft) 3,616.00	Tubing Hanger Elevation (ft)	RKB to GL (ft) 9.00	KB-Casing Flange Distance (ft)	KB-Tubing Hanger Distance (ft)
Tubing Strings					
Run Date 9/6/1996 14:44	Set Depth (ftKB) 3,746.00	String Max Nominal OD (in) 2 3/8	String Min Nominal ID (in) 2.00	Weight/Length (lb/ft) 4.70	Original Spud Date 1/1/1998 00:00

Original Hole, NORTH MONUMENT G/SA UNIT #1015 [Vertical]

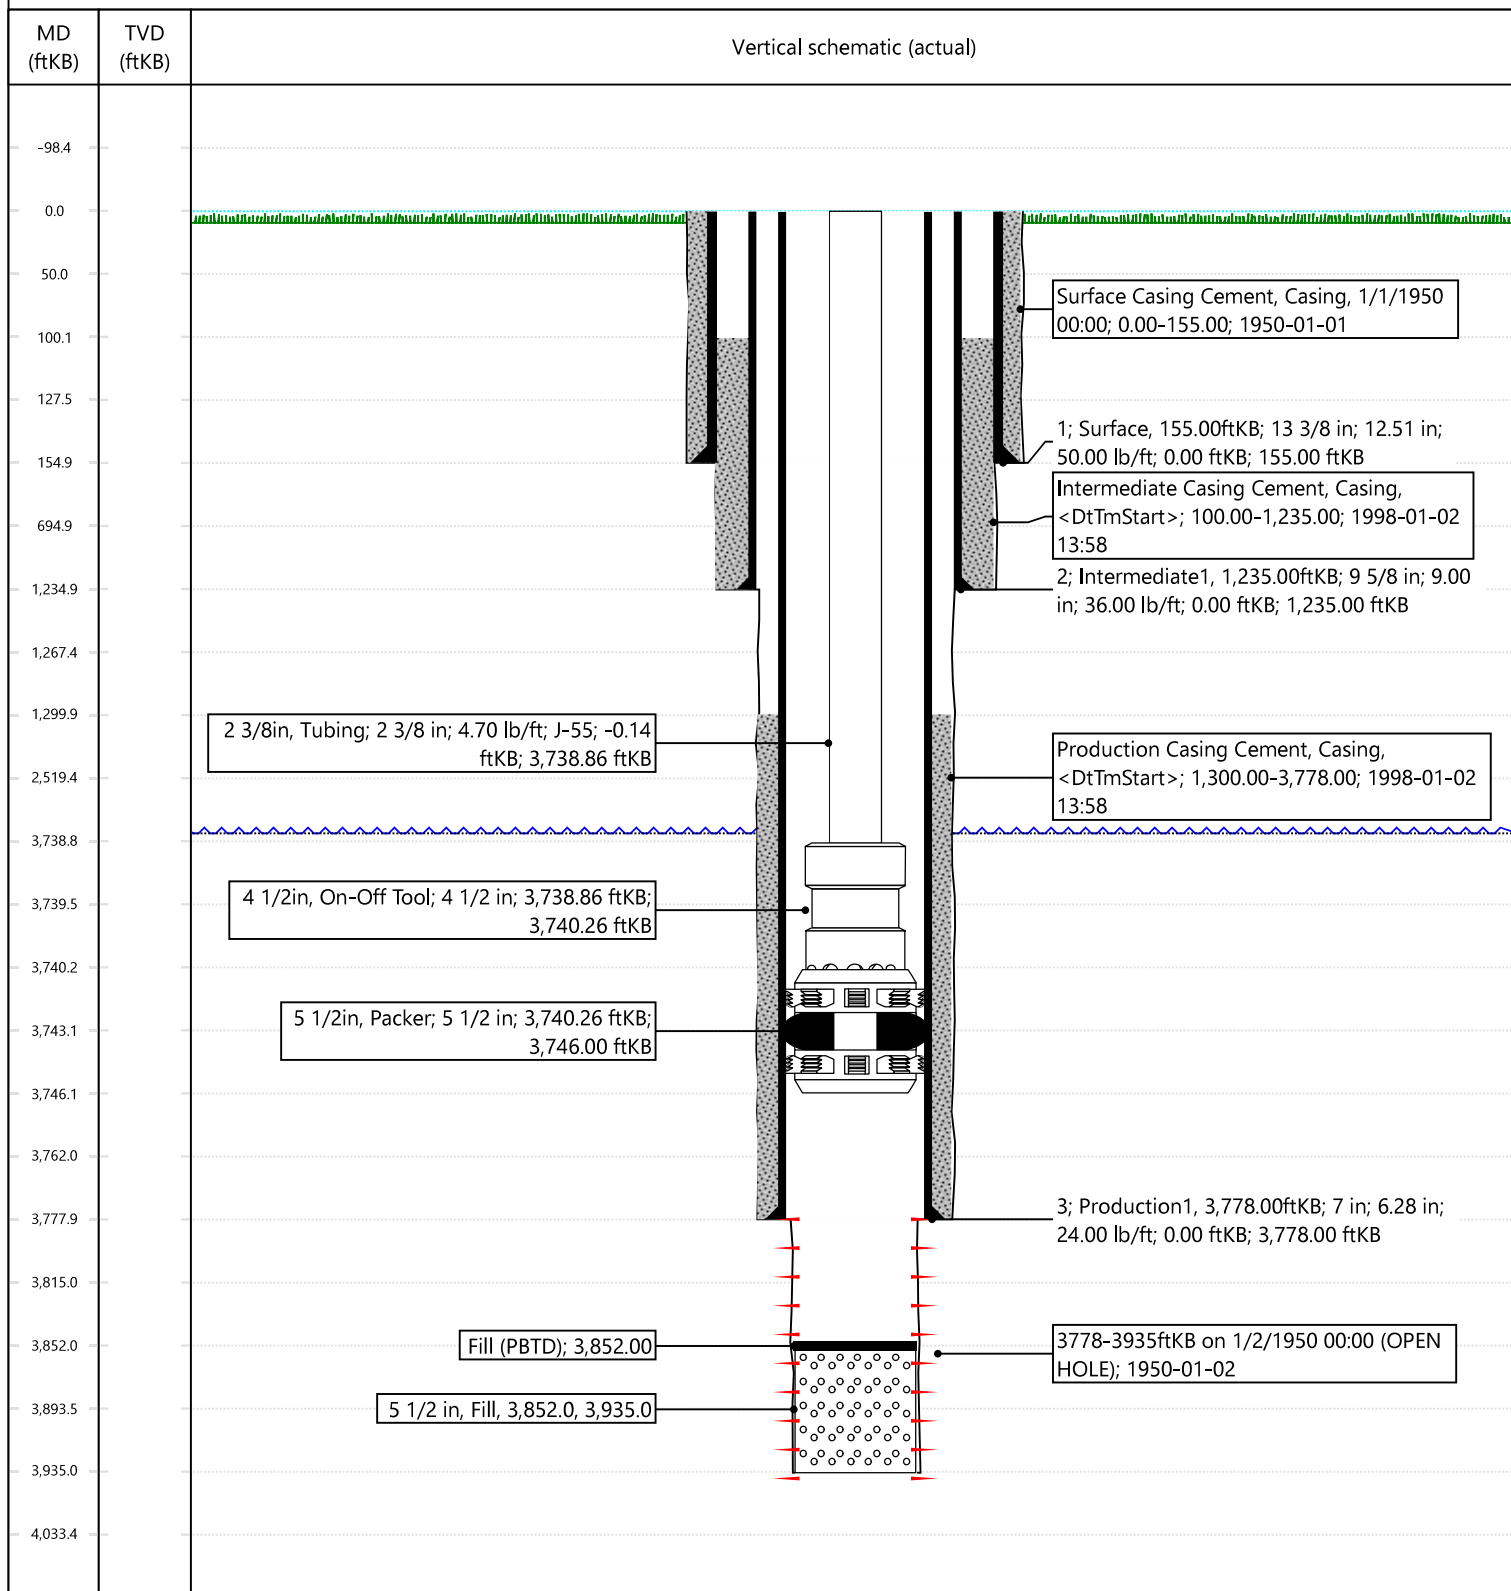




Proposed Schematic

Well Name: **NORTH MONUMENT G/SA UNIT #1015**

API / UWI 3002505755	Surface Legal Location Block UNKNOWN	Field Name Eunice	Route	State/Province NEW MEXICO	Well Configuration Type Vertical
Ground Elevation (ft) 3,607.00	Original KB/RT Elevation (ft) 3,616.00	Tubing Hanger Elevation (ft)	RKB to GL (ft) 9.00	KB-Casing Flange Distance (ft)	KB-Tubing Hanger Distance (ft)
Tubing Strings					
Run Date 9/6/1996 14:44	Set Depth (ftKB) 3,746.00	String Max Nominal OD (in) 2 3/8	String Min Nominal ID (in) 2.00	Weight/Length (lb/ft) 4.70	Original Spud Date 1/1/1998 00:00

Original Hole, NORTH MONUMENT G/SA UNIT #1015 [Vertical]

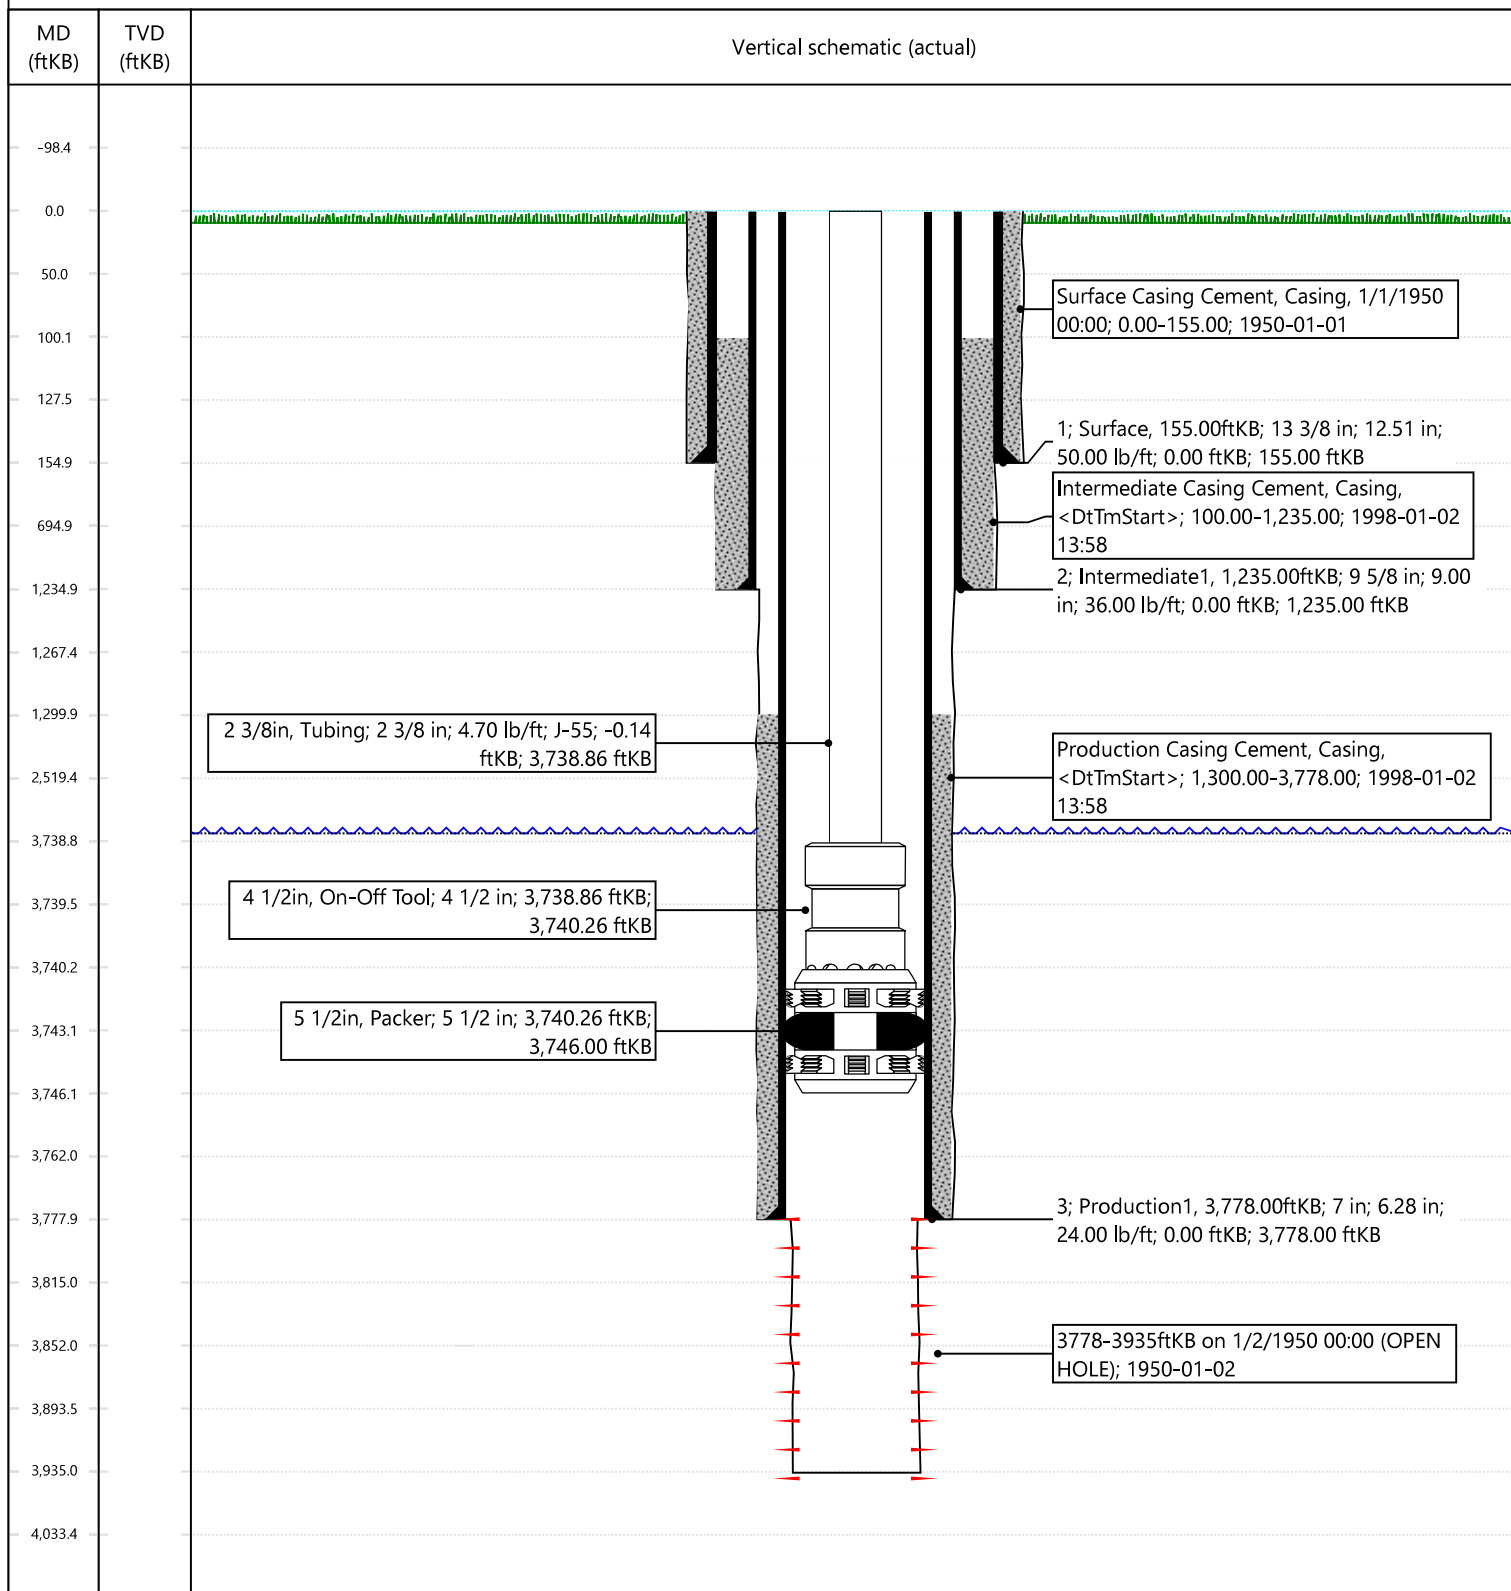

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oecd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 556203

CONDITIONS

Operator: APACHE CORPORATION 303 Veterans Airpark Ln Midland, TX 79705	OGRID: 873
	Action Number: 556203
	Action Type: [C-103] NOI Workover (C-103G)

CONDITIONS

Created By	Condition	Condition Date
anthony.harris	No tubing upsize permitted	3/6/2026
anthony.harris	Post workover MIT required with OCD witness	3/6/2026