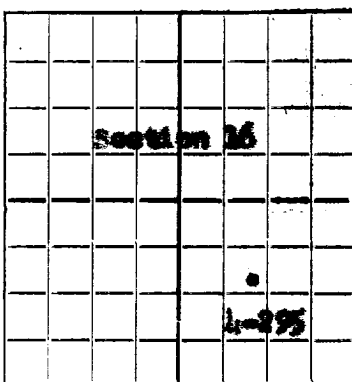


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE.

LLOY et al operating account State - 1-291-17
 Well No. 1-295 Company or Operator 16 Lease 25N
 in 16 of Sec. 16 T. 25N
 R. 6W N. M. P. M. 16 Field, Rio Arriba County.
 Well is 1165 feet south of the North line and 1515 feet West of the East line of Section 16
 If State land the oil and gas lease is No. 1-291-17 Assignment No.
 If patented land the owner is Address
 If Government land the permittee is Address
 The Lessee is Tim G. Leary Address 616 E. Central - Albuquerque, N. M.
 Drilling commenced January 23, 1952 Drilling was completed February 5, 1952
 Name of drilling contractor Corbett Drilling Company Address Tulsa, Oklahoma
 Elevation above sea level at top of casing 6142 feet. G.L.
 The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 2765 to 2875 Gas No. 4, from to
 No. 2, from to No. 5, from to
 No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
 No. 2, from to feet.
 No. 3, from to feet.
 No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
2-5/8	34	8T		507					Surface
5-1/2	17	8R		2769	Reamer				Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
	2-5/8	507	300	Plug		
	5-1/2	2769	300	Plug		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
 Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	Pumped	15	123 lbs.	2-27-52	2779-2855	2800

Our measured 72 HCF before shot. After shot
 Results of shooting or chemical treatment measured 313 after 3 hours

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

Rotary tools were used from Surface TO 2875 USED 2625 2800
 To clean out at 2875 feet to 2875 feet, and from 2875 feet to 2875 feet.
 Cable tools were used from 2875 feet to 2875 feet, and from 2875 feet to 2875 feet.

PRODUCTION

Put to producing 19
 The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and 313 HCF % sediment. Gravity, Be
 If gas well, cu. ft. per 24 hours 525 Gallons gasoline per 1,000 cu. ft. of gas
 Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller
 Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Albuquerque, New Mexico March 21, 1952

Place Date

