



U.S. Department of the Interior
Bureau of Land Management

Application for Permit to Drill

APD Package Report

Date Printed:

APD ID:	Well Status:
APD Received Date:	Well Name:
Operator:	Well Number:

APD Package Report Contents

- Form 3160-3
- Operator Certification Report
- Application Report
- Application Attachments
 - Well Plat: 1 file(s)
- Drilling Plan Report
- Drilling Plan Attachments
 - Blowout Prevention Choke Diagram Attachment: 2 file(s)
 - Blowout Prevention BOP Diagram Attachment: 4 file(s)
 - Casing Taperd String Specs: 1 file(s)
 - Casing Design Assumptions and Worksheet(s): 6 file(s)
 - Hydrogen sulfide drilling operations plan: 1 file(s)
 - Proposed horizontal/directional/multi-lateral plan submission: 2 file(s)
 - Other Facets: 3 file(s)
- SUPO Report
- SUPO Attachments
 - Existing Road Map: 1 file(s)
 - Attach Well map: 1 file(s)
 - Production Facilities map: 1 file(s)
 - Water source and transportation map: 1 file(s)
 - Construction Materials source location attachment: 1 file(s)
 - Well Site Layout Diagram: 1 file(s)
 - Recontouring attachment: 1 file(s)
- PWD Report
- PWD Attachments
 - None
- Bond Report

- Bond Attachments
 - None

Form 3160-3
(October 2024)FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 2027UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☐ DRILL ☐ REENTER		5. Lease Serial No.
1b. Type of Well: ☐ Oil Well ☐ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☐ Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator		8. Lease Name and Well No.
3a. Address	3b. Phone No. (include area code)	9. API Well No. 30-025-56110
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		10. Field and Pool, or Exploratory
14. Distance in miles and direction from nearest town or post office*		11. Sec., T. R. M. or Blk. and Survey or Area
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)		12. County or Parish
16. No of acres in lease		13. State
17. Spacing Unit dedicated to this well		
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.		
19. Proposed Depth		
20. BLM/BIA Bond No. in file		
21. Elevations (Show whether DF, KDB, RT, GL, etc.)		
22. Approximate date work will start*		23. Estimated duration
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature	Name (Printed/Typed)	Date
Title		
Approved by (Signature)	Name (Printed/Typed)	Date
Title		
Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



Approval Date: 09/22/2025

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to a new evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: SWSW / 150 FSL / 770 FWL / TWSP: 26S / RANGE: 32E / SECTION: 10 / LAT: 32.0506909 / LONG: -103.6688593 (TVD: 0 feet, MD: 0 feet)

PPP: SESW / 100 FSL / 2160 FWL / TWSP: 26S / RANGE: 32E / SECTION: 10 / LAT: 32.0505615 / LONG: -103.6643728 (TVD: 10039 feet, MD: 10167 feet)

PPP: SESW / 0 FSL / 2166 FWL / TWSP: 26S / RANGE: 32E / SECTION: 3 / LAT: 32.0649879 / LONG: -103.6644448 (TVD: 10289 feet, MD: 15507 feet)

BHL: NENW / 100 FNL / 2160 FWL / TWSP: 26S / RANGE: 32E / SECTION: 3 / LAT: 32.0794066 / LONG: -103.6645167 (TVD: 10274 feet, MD: 20753 feet)

BLM Point of Contact

Name: PAMELLA HERNANDEZ

Title: LIE

Phone: (575) 234-5954

Email: PHERNANDEZ@BLM.GOV

CONFIDENTIAL

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME: Mewbourne Oil Co
LEASE NO.: NMNM105561

Red Hills West Unit 35H

Surface Hole Location: Sec. 10, T. 26 S., R. 32 E., 150' FSL & 690' FWL

Bottom Hole Location: Sec. 3, T. 26 S., R. 32 E., 100' FNL & 450' FWL

Red Hills West Unit 36H

Surface Hole Location: Sec. 10, T. 26 S., R. 32 E., 150' FSL & 750' FWL

Bottom Hole Location: Sec. 3, T. 26 S., R. 32 E., 100' FNL & 1350' FWL

Red Hills West Unit 37H

Surface Hole Location: Sec. 10, T. 26 S., R. 32 E., 150' FSL & 810' FWL

Bottom Hole Location: Sec. 3, T. 26 S., R. 32 E., 100' FNL & 2330' FWL

Red Hills West Unit 40H

Surface Hole Location: Sec. 10, T. 26 S., R. 32 E., 150' FSL & 730' FWL

Bottom Hole Location: Sec. 3, T. 26 S., R. 32 E., 150' FSL & 660' FWL

Red Hills West Unit 41H

Surface Hole Location: Sec. 10, T. 26 S., R. 32 E., 150' FSL & 770' FWL

Bottom Hole Location: Sec. 3, T. 26 S., R. 32 E., 100' FNL & 2160' FWL

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Cave/Karst
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for

acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Cave and Karst Conditions of Approval for APDs

** Depending on location, additional Drilling, Casing, and Cementing procedures may be required by engineering to protect critical karst groundwater recharge areas.

Cave/Karst Surface Mitigation

The following stipulations will be applied to minimize impacts during construction, drilling and production:

Construction:

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

No Blasting:

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

Pad Berming:

- The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.
- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g., caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)
- Following a rain event, all fluids will vacuumed off of the pad and hauled off-site and disposed at a proper disposal facility.

Tank Battery Liners and Berms:

Tank battery locations and all facilities will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing, or equivalent, to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

Leak Detection System:

A method of detecting leaks is required. The method could incorporate gauges to measure loss, situating valves and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

Automatic Shut-off Systems:

Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave/Karst Subsurface Mitigation

The following stipulations will be applied to protect cave/karst and ground water concerns:

Rotary Drilling with Fresh Water:

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

Directional Drilling:

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

Lost Circulation:

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-bearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

Abandonment Cementing:

Upon well abandonment in cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

Pressure Testing:

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

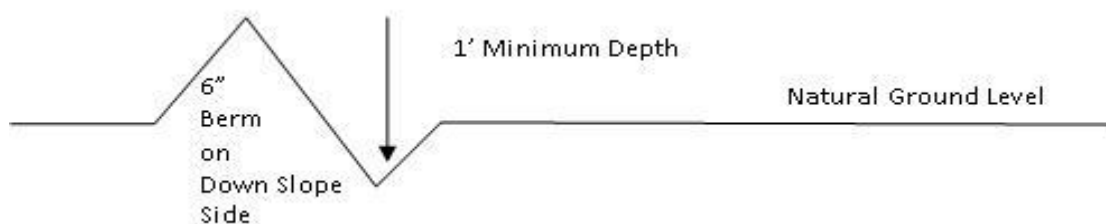

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

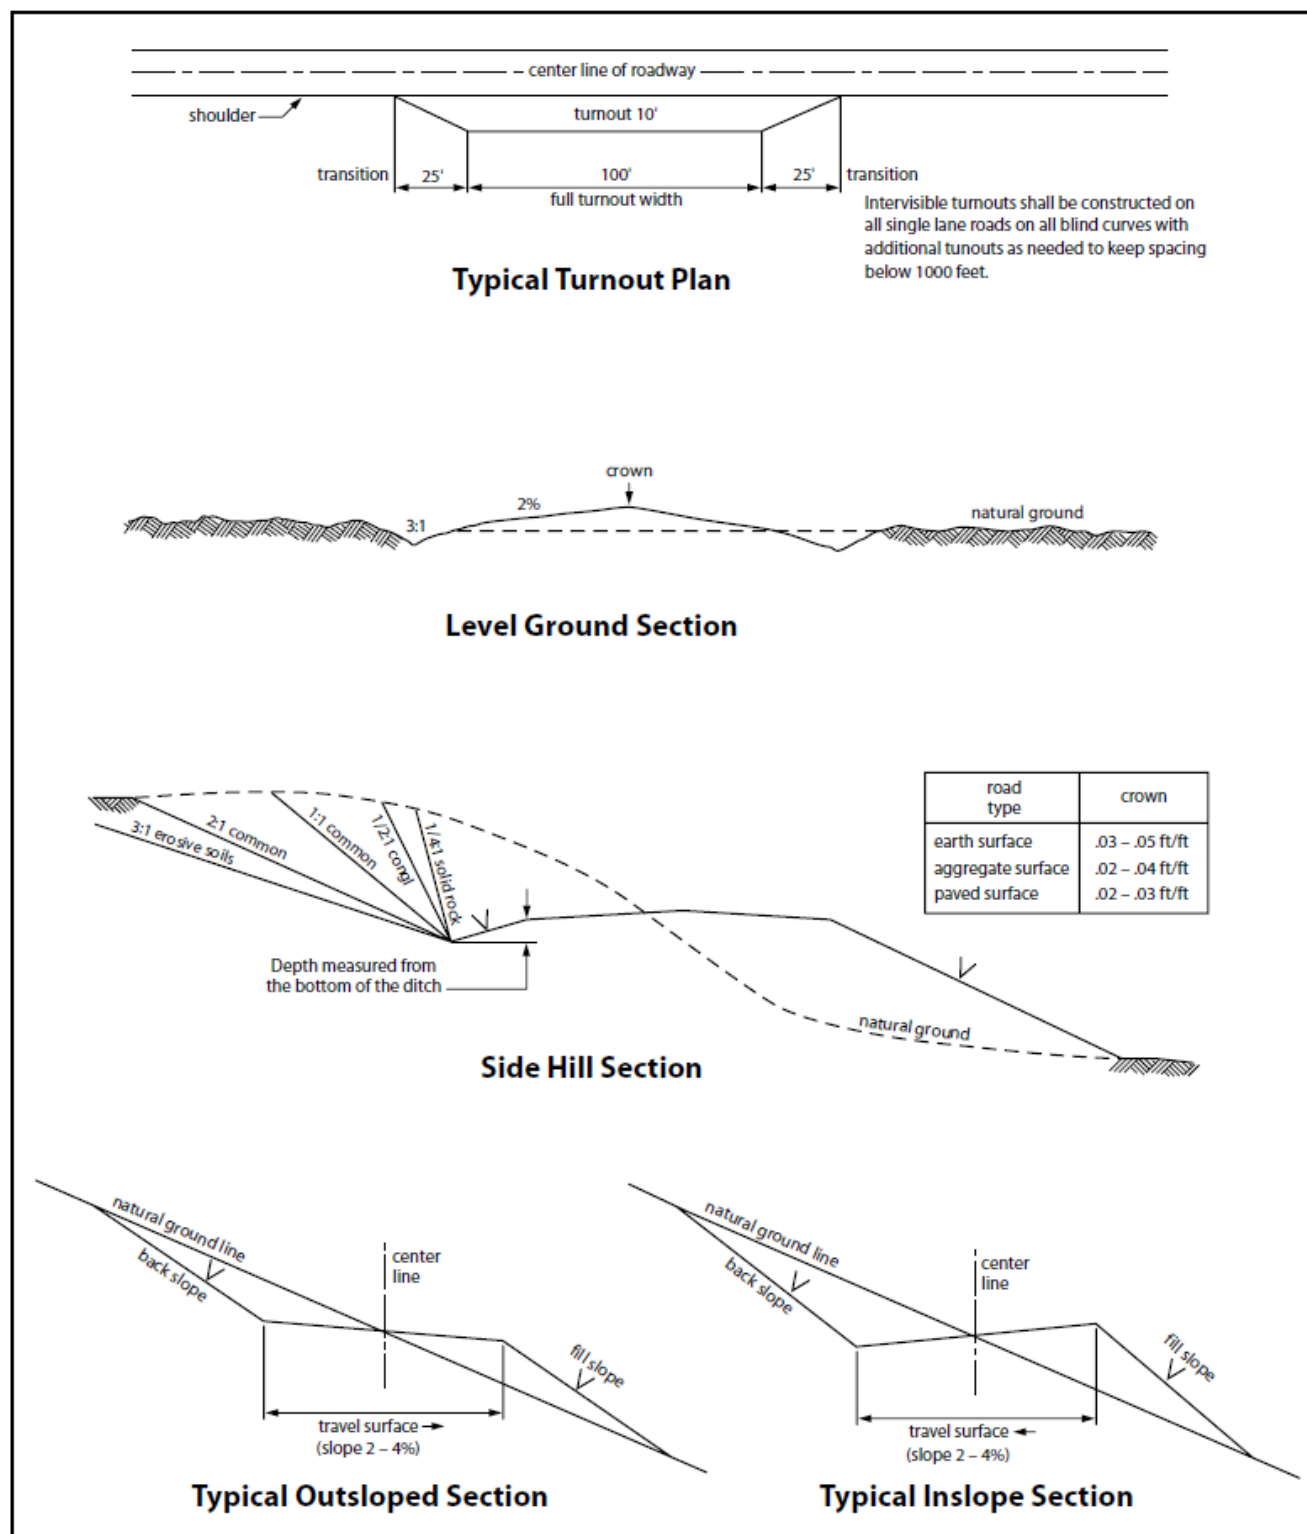


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production

equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the application (Grant, Sundry Notice, APD) and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these

terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

- a. Activities of the holder including, but not limited to construction, operation, maintenance, and termination of the facility.
- b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
- c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.

6. All construction and maintenance activity will be confined to the authorized

right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline must be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline must be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity will be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation will be allowed unless approved in writing by the Authorized Officer.

8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline will be "snaked" around hummocks and dunes rather than suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.

13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.

14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.

15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines must be less than or equal to 4 inches and a working pressure below 125 psi.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of

vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sand love grass (<i>Eragrostis trichodes</i>)	1.0

Plains bristlegrass (*Setaria macrostachya*) 2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	MEWBOURNE OIL COMPANY
WELL NAME & NO.:	RED HILLS WEST UNIT 41H
APD ID:	10400105495
LOCATION:	Section 10, T.26 S., R.32 E. NMP.
COUNTY:	Lea County, New Mexico ▼

COA

H ₂ S	☐ No ☒ Yes			
Potash / WIPP	☒ None	☐ Secretary	☐ R-111-Q	☐ Open Annulus ☐ WIPP
Cave / Karst	☐ Low	☒ Medium	☐ High	☐ Critical
Wellhead	☐ Conventional	☒ Multibowl	☐ Both	☐ Diverter
Cementing	☐ Primary Squeeze	☐ Cont. Squeeze	☐ EchoMeter	☒ DV Tool
Special Req	☐ Capitan Reef	☐ Water Disposal	☐ COM	☒ Unit
Waste Prev.	☐ Self-Certification	☒ Waste Min. Plan	☐ APD Submitted prior to 06/10/2024	
Additional Language	☒ Flex Hose ☐ Four-String	☐ Casing Clearance ☒ Offline Cementing	☐ Pilot Hole ☒ Fluid-Filled	☒ Break Testing

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated **AT SPUD**. As a result, the Hydrogen Sulfide area must meet **43 CFR 3176** requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING DESIGN

Primary Casing Program

Note: The surface casing set depth was adjusted on recommendations provided by the BLM geologist. *“The operator proposes to set surface casing at 710 ft. which will be in or above the Magenta Dolomite Aquifer and will not adequately protect all usable water zones. Instead, set surface casing at a depth of approximately 1168 feet. If salt is encountered, set casing at least 25 feet above the salt.”*

1. The 13-3/8 inch surface casing shall be set at approximately **1,168 ft.** (a minimum of 70 feet into the Rustler Anhydrite, below usable water and above the salt) and cemented to the surface. **If salt is encountered, set casing at least 25 ft. above the salt.**

- a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 psi compressive strength**, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Note: Due to the revised casing set depth, the cement excess has dropped below 25%. More cement might be needed.

2. The **9-5/8** inch intermediate casing shall be set in a competent bed (the base of salt) at approximately **4,450 ft.** The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:

- **Cement to surface.** If cement does not circulate see B.1.a, c-d above. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to **Cave/Karst**.

Note: Excess cement is less than 25%, more cement is required if washout occurs. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.

Note: The intermediate casing must be kept fluid-filled to meet the minimum safety factor requirements for collapse.

- ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

3. Operator has proposed to set **7 x 4-1/2 inch** tapered production casing at approximately **20,753 ft.** (10,274 ft. TVD). The minimum required fill of cement behind the tapered production casing is:

Option 1 (Single Stage): Cement should tie-back **at least 200 feet** into previous casing string. Operator shall provide method of verification.

Option 2 (Two-Stage): Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool: Cement should tie-back **at least 200 feet** into previous casing string. Operator shall provide method of verification. If cement does not circulate, contact the appropriate BLM office.

Note: The production casing must be kept fluid-filled to meet the minimum safety factor requirements for collapse.

Alternate Casing Program

Note: The surface casing set depth was adjusted on recommendations provided by the BLM geologist. *"The operator proposes to set surface casing at 710 ft. which will be in or above the Magenta Dolomite Aquifer and will not adequately protect all usable water zones. Instead, set surface casing at a depth of approximately 1168 feet. If salt is encountered, set casing at least 25 feet above the salt."*

1. The **13-3/8 inch** surface casing shall be set at approximately **1,168 ft.** (a minimum of 70 feet into the Rustler Anhydrite, below usable water and above the salt) and cemented to the surface. **If salt is encountered, set casing at least 25 ft. above the salt.**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 psi compressive strength**, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Note: Due to the revised casing set depth, the cement excess has dropped below 25%. More cement might be needed.

2. The **9-5/8 inch** intermediate casing shall be set in a competent bed (the base of salt) at approximately **4,450 ft.** The minimum required fill of cement behind the **9-5/8 inch** intermediate casing is:
 - **Cement to surface.** If cement does not circulate see B.1.a, c-d above. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to **Cave/Karst**.

Note: Excess cement is less than 25%, more cement is required if washout occurs. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.

Note: The intermediate casing must be kept fluid-filled to meet the minimum safety factor requirements for collapse.

- ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

3. Operator has proposed to set **7 inch** production casing at approximately **9,842 ft.** (9,731 ft. TVD). The minimum required fill of cement behind the **7 inch** production casing is:

Option 1 (Single Stage): Cement should tie-back **at least 200 feet** into previous casing string. Operator shall provide method of verification. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to **Cave/Karst**.

Option 2 (Two-Stage): Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
 - b. Second stage above DV tool: Cement should tie-back **at least 200 feet** into previous casing string. Operator shall provide method of verification. If cement does not circulate, contact the appropriate BLM office. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to **Cave/Karst**.
4. The minimum required fill of cement behind the **4-1/2 in.** production liner is:
 - Cement should tie-back **at least 100 feet** into previous casing string. Operator shall provide method of verification.

Offline Cementing

Operator has been **(Approved)** to pump the proposed cement program offline in the **Surface and intermediate(s) intervals**. Offline cementing should commence within 24 hours of landing the casing for the interval. Notify the BLM 4hrs prior to the commencement of any offline cementing procedure at **Lea County: 575-689-5981**.

C. PRESSURE CONTROL

1. Variance approved to use **flex line** from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).

2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi**. The BOP/BOPE and annular preventer shall be pressure-tested in accordance with **title 43 CFR 3172**.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in the **title 43 CFR 3172.6(b)(9)** must be followed.

BOPE Break Testing Variance

- BOPE Break Testing is ONLY permitted for intervals utilizing a 5M BOPE or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP.)**
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer **(575-706-2779)** prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-689-5981 Lea County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per **43 CFR 3172**.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

D. SPECIAL REQUIREMENT (S)**Unit Wells**

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation but will replace the unit number with the participating area number when the sign is replaced.

Commercial Well Determination

A commercial well determination shall be submitted after production has been established for at least six months. **(This is not necessary for secondary recovery unit wells)**

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Contact Lea County Petroleum Engineering Inspection Staff:

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981.

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on

which the draw works are located, this does not include the doghouse or stairway area.

3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to

control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.

7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - iii. Manufacturer representative shall install the test plug for the initial BOP test.
 - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - v. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (Only applies to single stage cement jobs, prior to the cement setting up.)
 - iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - iv. The test shall be run on a 5000-psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one-hour chart. A circular chart shall have a maximum 2-hour clock. If a twelve hour or twenty-four-hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - v. The results of the test shall be reported to the appropriate BLM office.
 - vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 - vii. The BOP/BOPE test shall include a low-pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

SA 09/12/2025

Mewbourne Oil Company, Red Hills West Unit 41H
Sec 10, T26S, R32E
SHL: 150' FSL 770' FWL (Sec 10)
BHL: 100' FNL 2160' FWL (Sec 3)

Well Location		GL: 3216'									
Point	Calls	Leases	Aliquot	Section	Township	Range	County	Lat	Long	TVD	MD
SHL	SHL: 150' FSL & 770' FWL (Sec 10)	NMNM128927	SWSW	10	26S	32E	Lea	32.0506909	- 103.6688593	0'	0'
KOP	KOP: 10' FSL & 2160' FWL (Sec 10)	NMNM105561	SESW	10	26S	32E	Lea	32.0503141	- 103.6643712	9,731'	9,842'
FTP	FTP: 100' FSL & 2160' FWL (Sec 10)	NMNM105561	SESW	10	26S	32E	Lea	32.0505615	- 103.6643728	10,039'	10,167'
PPP2	PPP2: 0' FSL & 2166' FWL (Sec 3)	NMNM105559	SESW	3	26S	32E	Lea	32.0649879	- 103.6644448	10,289'	15,507'
BHL	BHL: 100' FNL & 2160' FWL (Sec 3)	NMNM105559	NENW	3	26S	32E	Lea	32.0794066	- 103.6645167	10,274'	20,753'

GEOLOGY

Formation	Est. Top (TVD)	Lithology	Mineral Resources	Formation	Est. Top (TVD)	Lithology	Mineral Resources
Rustler	635'	Dolomite/Anhydrite	Usable Water	Yeso			
Castile				Delaware (Lamar)	4525'	Limestone/Dolomite	Oil/Natural Gas
Salt Top	745'	Salt	None	Bell Canyon	4555'	Sandstone	Oil/Natural Gas
Marker Bed 126				Cherry Canyon	5415'	Sandstone	Oil/Natural Gas
				Manzanita Marker	5725'	Limestone	Oil/Natural Gas
Salt Base	4305'	Salt	None	Basal Brushy Canyon	8435'	Sandstone	Oil/Natural Gas
Yates				Bone Spring	8665'	Limestone	Oil/Natural Gas
Seven Rivers				1st Bone Spring	9575'	Sandstone	Oil/Natural Gas
Queen				2nd Bone Spring	10045'	Sandstone	Oil/Natural Gas
Capitan				3rd Bone Spring	11335'	Sandstone	Oil/Natural Gas
Grayburg				Wolfcamp	11785'	Shale/Sandstone/Limestone	Oil/Natural Gas
San Andres							

Casing Program Design A						BLM Minimum Safety Factors	1.125	1.0	1.6 Dry	1.6 Dry
									1.8 Wet	1.8 Wet
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	710'	710'	13.375" 48# H40 STC	2.43	5.45	9.45	15.87
Intermediate	12.25"	0'	0'	3385'	3385'	9.625" 36# J55 LTC	1.13	1.96	2.75	3.43
Intermediate	12.25"	3385'	3385'	4307'	4307'	9.625" 40# J55 LTC	1.13	1.73	12.21	14.79
Intermediate	12.25"	4307'	4307'	4450'	4450'	9.625" 40# L80 LTC	1.31	2.44	128.85	160.14
Production	8.75"	0'	0'	9842'	9731'	7" 26# P110 LTC	1.27	2.03	2.71	3.24
Production	8.5"	9842'	9731'	20753'	10274'	4.5" 13.5# RYS110 CDC HTQ	1.66	1.93	2.90	2.86

All casing strings will be tested in accordance with 43 CFR Part 3172. Must have table for contingency casing.

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM’s minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50’ above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500’ into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100’ to 600’ below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Red Hills West Unit 41H
Sec 10, T26S, R32E
SHL: 150' FSL 770' FWL (Sec 10)
BHL: 100' FNL 2160' FWL (Sec 3)

Design A - Cement Program

Csg. Size		# Sacks	Wt., lb/gal	Yield, ft³/sack	TOC/BOC	Volume, ft³	% Excess	Slurry Description
13.375 in	LEAD	340	12.5	2.12	0' - 519'	730	100%	Class C: Salt, Gel, Extender, LCM
	TAIL	200	14.8	1.34	519' - 710'	268		Class C: Retarder
9.625 in	LEAD	700	12.5	2.12	0' - 3772'	1490	25%	Class C: Salt, Gel, Extender, LCM
	TAIL	200	14.8	1.34	3772' - 4450'	268		Class C: Retarder
7 in - 4.5 in	LEAD	190	12.5	2.12	5725' - 7048'	410	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
	TAIL	3600	15.6	1.18	7048' - 20753'	4248		Class H: Retarder, Fluid Loss, Defoamer
7" DV Tool @ 5725'								
2nd Stg 7 in	LEAD	70	12.5	2.12	4250' - 5029'	150	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
	TAIL	100	14.8	1.34	5029' - 5725'	134		Class C: Retarder, Fluid Loss, Defoamer

Pressure Control Equipment

BOP installed and tested before drilling hole, in:	Size, in	System Rated WP	Type			Tested to:	Rating Depth
12.25	13.375	5M	Annular		X	2500#/3500#	20,753'
		5M	Blind Ram		X	5000#	
			Pipe Ram		X		
			Double Ram				
			Other*				

*Specify if additional ram is utilized.

Equipment: Annular, Pipe Rams, Blind Rams, Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

Variance Request: A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for hydrostatic test chart. Anchors are not required by manufacturer. Variance is requested to use a multi bowl wellhead. Variance is requested to perform break testing according to attached procedure. If a breaktesting variance is approved & incorporated, API Standard 53 will be incorporated and testing annular BOP to 70% of RWP or 100% of MASP, whichever is greater, will be performed.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR Part 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Y	Formation integrity test will be performed per 43 CFR Part 3172. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR Part 3172.
N	Mewbourne Oil Company request a variance to use a 5000 psi annular BOP with a 10,000 psi BOP stack.

Mud Program

Depth (MD)	Mud Wt., lb/gal	Mud Type
0' - 710'	8.4 - 8.6	Fresh Water
710' - 4450'	10.0 - 10.2	Brine
4450' - 9842'	8.6 - 9.7	Cut-Brine
9842' - 20753'	10.0 - 12.	OBM

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	Pason/PVT/Visual Monitoring
---	-----------------------------

Mewbourne Oil Company, Red Hills West Unit 41H
Sec 10, T26S, R32E
SHL: 150' FSL 770' FWL (Sec 10)
BHL: 100' FNL 2160' FWL (Sec 3)

Logging and Testing Procedures

Logging, Coring and Testing.	
N	Will run GR/CNL from KOP (9842') to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
Y	No logs are planned based on well control or offset log information. Offset Well: Red Hills West Unit #044H
N	Coring? If yes, explain:

Open & Cased Hole Logs Run In the Well

☐ Caliper	☐ Cement Bond Log	☐ CNL/FDC
☐ Compensated Densilog	☐ Compensated Neutron Log	☐ Computer Generated Log
☐ Dip Meter Log	☒ Directional Survey	☐ Dual Induction/Microresistivity
☐ Dual Lateral Log/Microspherically Focused	☐ Electric Log	☐ Formation Density Compensated Log
☐ Gamma Ray Log	☒ Measurement While Drilling	☐ Mud Log/Geological Lithology Log
☐ Other	☐ Porosity-Resistivity Log	☐ Sidewall Neutron Log
☐ Sonic Log	☐ Spontaneous Potential Log	☐ Temperature Log

Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	6430 psi
BH Temperature	140
Abnormal Temp, Pressure, or Geologic Hazards	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers in surface hole. Weighted mud for possible over-pressure in Wolfcamp formation.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

	H2S is present
X	H2S Plan attached

Mewbourne Oil Company, Red Hills West Unit 41H
Sec 10, T26S, R32E
SHL: 150' FSL 770' FWL (Sec 10)
BHL: 100' FNL 2160' FWL (Sec 3)

Other facets of operation

Mewbourne Oil Company also requests approval to implement additional designs as described below &/or in other attachments. BLM will be notified of elected design.

Offline Cementing Variance: Variance is requested to perform offline cementing according to the attached procedure. **R-111Q:** Mewbourne proposes performing Open Hole Cementing per R-111Q Guidelines if well is in Potash.

Casing Program Design B						BLM Minimum Safety Factors	1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt	SF Body
Surface	17.5"	0'	0'	710'	710'	13.375" 48# H40 STC	2.43	5.45	9.45	15.87
Intermediate	12.25"	0'	0'	3385'	3385'	9.625" 36# J55 LTC	1.13	1.96	2.75	3.43
Intermediate	12.25"	3385'	3385'	4307"	4307"	9.625" 40# J55 LTC	1.13	1.73	12.21	14.79
Intermediate	12.25"	4307'	4307'	4450'	4450'	9.625" 40# L80 LTC	1.31	2.44	128.85	160.14
Production	8.75"	0'	0'	9842'	9731'	7" 26# P110 LTC	1.27	2.03	2.71	3.24
Liner	6.125"	9642'	9532'	20753'	10274'	4.5" 13.5# P110 LTC	1.66	1.93	2.25	2.81

All casing strings will be tested in accordance with 43 CFR Part 3172. Must have table for contingency casing.

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM’s minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50’ above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500’ into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100’ to 600’ below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Design B - Cement Program

Csg. Size		# Sacks	Wt., lb/gal	Yield, ft³/sack	TOC/BOC	Volume, ft³	% Excess	Slurry Description
13.375 in	LEAD	340	12.5	2.12	0' - 519'	730	100%	Class C: Salt, Gel, Extender, LCM
	TAIL	200	14.8	1.34	519' - 710'	268		Class C: Retarder
9.625 in	LEAD	700	12.5	2.12	0' - 3772'	1490	25%	Class C: Salt, Gel, Extender, LCM
	TAIL	200	14.8	1.34	3772' - 4450'	268		Class C: Retarder
1st Stg 7 in	LEAD	90	12.5	2.12	5725' - 6767'	200	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
	TAIL	500	15.6	1.18	6767' - 9842'	590		Class H: Retarder, Fluid Loss, Defoamer
7" DV Tool @ 5725'								
2nd Stg 7 in	LEAD	70	12.5	2.12	4250' - 5029'	150	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
	TAIL	100	14.8	1.34	5029' - 5725'	134		Class C: Retarder, Fluid Loss, Defoamer
4.5 in	LEAD	710	13.5	1.85	9642' - 20753'	1320	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-settling Agent



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

01/23/2026

Operator

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: MELONY LEAL

Signed on: 07/02/2025

Title: Analyst

Street Address: 4801 BUSINESS PARK BLVD

City: HOBBS

State: NM

Zip: 88240

Phone: (575)393-5905

Email address: MLEAL@MEWBOURNE.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data

01/23/2026

APD ID: 10400105495

Submission Date: 07/03/2025

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Section 1 - General

APD ID: 10400105495

Tie to previous NOS? N

Submission Date: 07/03/2025

BLM Office: Carlsbad

User: MELONY LEAL

Title: Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM105561

Lease Acres:

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? YES

Federal or Indian agreement: FEDERAL

Agreement number: NMNM125386B

Agreement name: INITIAL WOLFCAMP PA B

Keep application confidential? Y

Permitting Agent? NO

APD Operator: MEWBOURNE OIL COMPANY

Operator letter of

Operator Info

Operator Organization Name: MEWBOURNE OIL COMPANY

Operator Address: P O BOX 5270

Zip: 88241

Operator PO Box:

Operator City: HOBBS

State: NM

Operator Phone: (575)393-5905

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Field/Pool or Exploratory? Field and Pool

Field Name: "WC-025 G-08
S253235G

Pool Name: Lower Bone Spring

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H**Is the proposed well in an area containing other mineral resources?** USEABLE WATER,NATURAL GAS,OIL**Is the proposed well in a Helium production area?** N **Use Existing Well Pad?** N **New surface disturbance?****Type of Well Pad:** MULTIPLE WELL**Multiple Well Pad Name:** Red Hills West Unit 35 36 37 38 39 40**Number:** 10**Well Class:** HORIZONTAL

41 43 42 44

Number of Legs: 1**Well Work Type:** Drill**Well Type:** CONVENTIONAL GAS WELL**Describe Well Type:****Well sub-Type:** APPRAISAL**Describe sub-type:****Distance to town:** 30 Miles**Distance to nearest well:** 20 FT**Distance to lease line:** 160 FT**Reservoir well spacing assigned acres Measurement:** 320 Acres**Well plat:** RED_HILLS_WEST_UNIT_041H_C102_SIGNED_20250617070554.pdf**Well work start Date:** 08/16/2025**Duration:** 60 DAYS**Section 3 - Well Location Table****Survey Type:** RECTANGULAR**Describe Survey Type:****Datum:** NAD83**Vertical Datum:** NAVD88**Survey number:****Reference Datum:** GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this
SHL Leg #1	150	FSL	770	FW L	26S	32E	10	Aliquot SWS W	32.0506909	- 103.6688593	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 128927	3216			Y
KOP Leg #1	10	FSL	2160	FW L	26S	32E	10	Aliquot SESW	32.0503141	- 103.6643712	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 105561	- 6515	9842	9731	Y

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this
PPP Leg #1-1	100	FSL	2160	FWL	26S	32E	10	Aliquot SESW	32.0505615	- 103.6643728	LEA	NEW MEXICO	NEW MEXICO	F	NMNM 105561	- 6823	10167	10039	Y
PPP Leg #1-2	0	FSL	2166	FWL	26S	32E	3	Aliquot SESW	32.0649879	- 103.6644448	LEA	NEW MEXICO	NEW MEXICO	F	NMNM 105559	- 7073	15507	10289	Y
EXIT Leg #1	100	FNL	2160	FWL	26S	32E	3	Aliquot NENW	32.0794066	- 103.6645167	LEA	NEW MEXICO	NEW MEXICO	F	NMNM 105559	- 7058	20753	10274	Y
BHL Leg #1	100	FNL	2160	FWL	26S	32E	3	Aliquot NENW	32.0794066	- 103.6645167	LEA	NEW MEXICO	NEW MEXICO	F	NMNM 105559	- 7058	20753	10274	Y

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION		Revised July 9, 2024	
			Submittal Type:	☒ Initial Submittal
				☐ Amended Report
		☐ As Drilled		

WELL LOCATION INFORMATION

API Number 30-025-56110	Pool Code 97903	Pool Name WC-025 G-08 S253235G;LWR BONE SPRING
Property Code 39542	Property Name RED HILLS WEST UNIT	Well Number 041H
OGRID No. 14744	Operator Name MEWBOURNE OIL COMPANY	Ground Level Elevation 3216'
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location

UL M	Section 10	Township 26S	Range 32E	Lot	Ft. from N/S 150 FSL	Ft. from E/W 770 FWL	Latitude 32.0506909°N	Longitude 103.6688593°W	County LEA
----------------	----------------------	------------------------	---------------------	-----	--------------------------------	--------------------------------	---------------------------------	-----------------------------------	----------------------

Bottom Hole Location

UL C	Section 3	Township 26S	Range 32E	Lot	Ft. from N/S 100 FNL	Ft. from E/W 2160 FWL	Latitude 32.0794066°N	Longitude 103.6645167°W	County LEA
----------------	---------------------	------------------------	---------------------	-----	--------------------------------	---------------------------------	---------------------------------	-----------------------------------	----------------------

Dedicated Acres 320	Infill or Defining Well INFILL	Defining Well API RED HILLS WEST UNIT 036H	Overlapping Spacing Unit (Y/N) Y	Consolidation Code U
Order Numbers. N/A			Well setbacks are under Common Ownership: ☒ Yes ☐ No	

Kick Off Point (KOP)

UL N	Section 10	Township 26S	Range 32E	Lot	Ft. from N/S 10 FSL	Ft. from E/W 2160 FWL	Latitude 32.0503141°N	Longitude 103.6643712°W	County LEA
----------------	----------------------	------------------------	---------------------	-----	-------------------------------	---------------------------------	---------------------------------	-----------------------------------	----------------------

First Take Point (FTP)

UL N	Section 10	Township 26S	Range 32E	Lot	Ft. from N/S 100 FSL	Ft. from E/W 2160 FWL	Latitude 32.0505615°N	Longitude 103.6643728°W	County LEA
----------------	----------------------	------------------------	---------------------	-----	--------------------------------	---------------------------------	---------------------------------	-----------------------------------	----------------------

Last Take Point (LTP)

UL C	Section 3	Township 26S	Range 32E	Lot	Ft. from N/S 100 FNL	Ft. from E/W 2160 FWL	Latitude 32.0794066°N	Longitude 103.6645167°W	County LEA
----------------	---------------------	------------------------	---------------------	-----	--------------------------------	---------------------------------	---------------------------------	-----------------------------------	----------------------

Unitized Area or Area of Uniform Interest N/A	Spacing Unit Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation: 3216'
---	--	---

OPERATOR CERTIFICATIONS <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i> <i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i> Brett Miller 03/13/2025		SURVEYOR CERTIFICATIONS <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me under my supervision, and that the same is true and correct to the best of my belief.</i> 	
Signature Brett Miller		Signature and Seal of Professional Surveyor Robert M. Howett	
Printed Name brett.miller@mewbourne.com		Certificate Number 19680	Date of Survey 02/11/2023
Email Address			


Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

ACREAGE DEDICATION PLATS

This grid represents a standard section. You may superimpose a non-standard section, or larger area, over this grid. Operators must outline the dedicated acreage in a red box, clearly show the well surface location and bottom hole location, if it is a directionally drilled, with the dimensions from the section lines in the cardinal directions. If this is a horizontal wellbore show on this plat the location of the First Take Point and Last Take Point, and the point within the Completed interval (other than the First Take Point or Last Take Point) that is closest to any outer boundary of the tract.

Surveyors shall use the latest United States government survey or dependent resurvey. Well locations will be in reference to the New Mexico Principal Meridian. If the land is not surveyed, contact the OCD Engineering Bureau. Independent subdivision surveys will not be acceptable.

RED HILLS WEST UNIT #041H

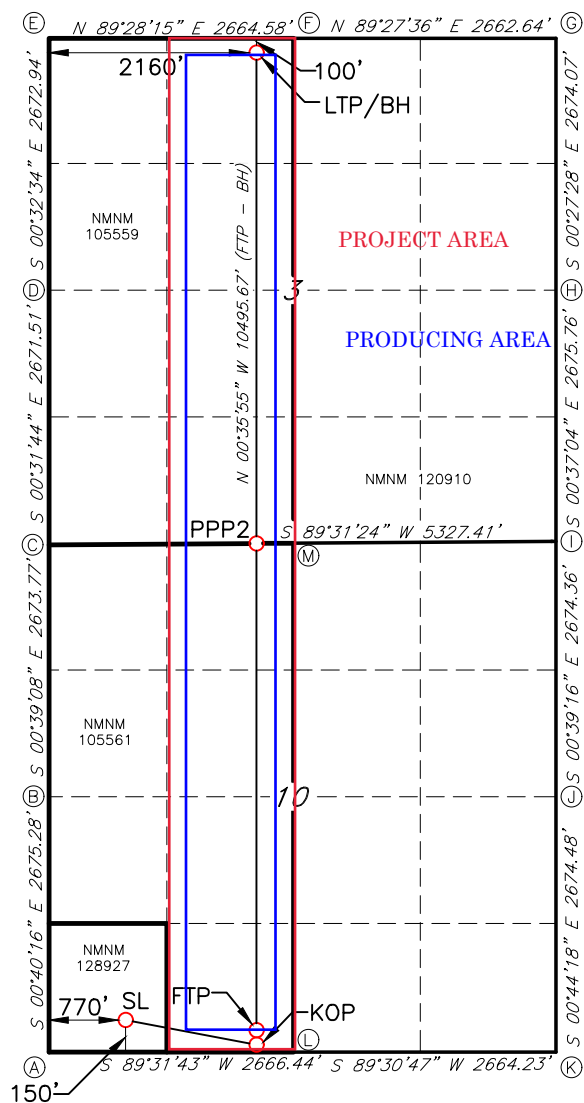

GEODETIC DATA

NAD 83 GRID - NM EAST

SURFACE LOCATION (SL)

150' FSL & 770' FWL (SEC.10)

N: 382812.8 - E: 747205.2

LAT: 32.0506909° N

LONG: 103.6688593° W

PROPOSED PENETRATION POINT 2 (PPP2)

0' FSL & 2166' FWL (SEC.3)

N: 388022.3 - E: 748540.6

LAT: 32.0649879° N

LONG: 103.6644448° W

KICK OFF POINT (KOP)

100' FSL & 2160' FWL (SEC.10)

N: 382684.4 - E: 748596.5

LAT: 32.0503141° N

LONG: 103.6643712° W

LAST TAKE POINT/BOTTOM HOLE (LTP/BH)

100' FNL & 2160' FWL (SEC.3)

N: 393267.4 - E: 748485.9

LAT: 32.0794066° N

LONG: 103.6645167° W

FIRST TAKE POINT (FTP)

100' FSL & 2160' FWL (SEC.10)

N: 382774.3 - E: 748595.5

LAT: 32.0505615° N

LONG: 103.6643728° W

CORNER DATA

NAD 83 GRID - NM EAST

A: FOUND BRASS CAP "1939"
N: 382656.6 - E: 746437.1B: FOUND BRASS CAP "1939"
N: 385331.2 - E: 746405.8C: FOUND BRASS CAP "1939"
N: 388004.3 - E: 746375.4D: FOUND BRASS CAP "1939"
N: 390675.2 - E: 746350.7E: FOUND BRASS CAP "1916"
N: 393347.5 - E: 746325.4F: FOUND BRASS CAP "1916"
N: 393372.1 - E: 748989.4G: FOUND BRASS CAP "1916"
N: 393397.2 - E: 751651.4H: FOUND BRASS CAP "1939"
N: 390723.7 - E: 751672.7I: FOUND BRASS CAP "1939"
N: 388048.6 - E: 751701.6J: FOUND BRASS CAP "1939"
N: 385374.9 - E: 751732.1K: FOUND BRASS CAP "1939"
N: 382701.2 - E: 751766.6L: FOUND BRASS CAP "1939"
N: 382678.5 - E: 749103.0M: CALCULATED POINT
N: 388026.4 - E: 749038.5



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

01/23/2026

APD ID: 10400105495

Submission Date: 07/03/2025

Highlighted data
reflects the most
recent changes

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
16443663	UNKNOWN	3205	28	28	OTHER : Top Soil	NONE	N
16443674	RUSTLER	2570	635	635	ANHYDRITE, DOLOMITE	USEABLE WATER	N
16443675	TOP SALT	2460	745	745	SALT	NONE	N
16443664	BOTTOM SALT	-1100	4305	4305	SALT	NONE	N
16443671	LAMAR	-1320	4525	4525	DOLOMITE, LIMESTONE	NATURAL GAS, OIL	N
16443667	BELL CANYON	-1350	4555	4555	SANDSTONE	NATURAL GAS, OIL	N
16443668	CHERRY CANYON	-2210	5415	5415	SANDSTONE	NATURAL GAS, OIL	N
16443669	MANZANITA	-2520	5725	5725	LIMESTONE	NATURAL GAS, OIL	N
16443676	BRUSHY CANYON	-5230	8435	8435	SANDSTONE	NATURAL GAS, OIL	N
16443662	BONE SPRING	-5460	8665	8665	LIMESTONE	NATURAL GAS, OIL	N
16443665	BONE SPRING 1ST	-6370	9575	9575	SANDSTONE	NATURAL GAS, OIL	Y
16443666	BONE SPRING 2ND	-6840	10045	10045	SANDSTONE	NATURAL GAS, OIL	Y
16443673	BONE SPRING 3RD	-8130	11335	11335	SANDSTONE	NATURAL GAS, OIL	N
16443670	WOLFCAMP	-8580	11785	11785	LIMESTONE, SANDSTONE, SHALE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H**Pressure Rating (PSI):** 5M**Rating Depth:** 20753**Equipment:** Annular, Pipe Rams, Blind Rams, Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.**Requesting Variance?** YES**Variance request:** A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for hydrostatic test chart. Anchors are not required by manufacturer. Variance is requested to use a multi bowl wellhead. Variance is requested to perform break testing according to attached procedure. If a breaktesting variance is approved & incorporated, API Standard 53 will be incorporated and testing annular BOP to 70% of RWP or 100% of MASP, whichever is greater, will be performed.**Testing Procedure:** BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR Part 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets**Choke Diagram Attachment:**

5M_BOPE_Choke_Diagram_20250617071047.pdf

Flex_Line_Specs_API_16C_20250617071058.pdf

BOP Diagram Attachment:

MOC_Break_Testing_Variance_20250616094209.pdf

MOC_Offline_Cementing_Variance_20250616094217.pdf

5M_BOPE_Schematic_20250617071108.pdf

Multi_Bowl_WH_20250617071113.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	710	0	710	3216	2506	710	H-40	48	ST&C	2.45	5.45	DRY	9.45	DRY	15.87
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	3385	0	3385	3326	-169	3385	J-55	36	LT&C	1.13	1.96	DRY	2.75	DRY	3.43
3	INTERMEDIATE	12.25	9.625	NEW	API	N	3385	4307	3385	4307	-169	-1091	922	J-55	40	LT&C	1.13	1.73	DRY	12.21	DRY	14.79
4	INTERMEDIATE	12.25	9.625	NEW	API	N	4307	4450	4307	4450	-1100	-1234	143	L-80	40	LT&C	1.31	2.44	DRY	99.99	DRY	99.99
5	PRODUCTION	8.75	7.0	NEW	API	Y	0	9842	0	9731	3326	-6515	9842	P-110	26	LT&C	1.18	1.89	DRY	2.55	DRY	3.05

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
6	PRODUCTION	8.5	4.5	NEW	API	Y	9842	20753	9731	10274	-6515	-7058	10911	OTHER - RYS 110	13.5	OTHER - CDC HTQ	1.55	1.8	DRY	2.9	DRY	2.87

Casing Attachments

Casing ID: 1StringSURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

13.375in_48__H40_STC_Csg_20250616094334.pdf

Casing ID: 2StringINTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

9.625in_36__J55_LTC_Csg_20250616094435.pdf

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H**Casing Attachments****Casing ID:** 3 **String** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

9.625in_40__J55_LTC_Csg_20250616095129.pdf

Casing ID: 4 **String** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

9.625in_40__L80_LTC_Csg_20250616095015.pdf

Casing ID: 5 **String** PRODUCTION**Inspection Document:****Spec Document:****Tapered String Spec:**

Red_Hills_West_Unit_41H_Tapered_String_20250806103916.pdf

Casing Design Assumptions and Worksheet(s):

7in_26__P110_LTC_Csg_20250616094537.pdf

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Casing Attachments

Casing ID: 6StringPRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

4.5in_13.5__RYS110_CDC_HTQ_Csg_20250616095958.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	519	340	2.12	12.5	730	100	Class C	Salt, Gel, Extender, LCM
SURFACE	Tail		519	710	200	1.34	14.8	268	100	Class C	Retarder
INTERMEDIATE	Lead		0	3772	700	2.12	12.5	1490	25	Class C	Salt, Gel, Extender, LCM
INTERMEDIATE	Tail		3772	4450	200	1.34	14.8	268	25	Class C	Retarder
PRODUCTION	Lead	5725	4250	5029	70	2.12	12.5	150	25	Class C	Gel, Retarder, Defoamer, Extender
PRODUCTION	Tail		5029	5725	100	1.34	14.8	134	25	Class C	Retarder, Fluid Loss, Defoamer
PRODUCTION	Lead	5725	5725	7048	190	2.12	12.5	410	25	Class C	Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-Settling Agent
PRODUCTION	Tail		7048	20753	3700	1.18	15.6	4366	25	CLASS H	RETARDER FLUID LOSS DEFOAMER

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H**Section 5 - Circulating Medium****Mud System Type:** Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with 43 CFR 3172:****Diagram of the equipment for the circulating system in accordance with 43 CFR 3172:**

Describe what will be on location to control well or mitigate other conditions: Formation integrity test will be performed per 43 CFR Part 3172. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR Part 3172.

Describe the mud monitoring system utilized: Pason/PVT/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	710	SPUD MUD	8.4	8.6							
710	4450	SALT SATURATED	10	10.2							
4450	9842	WATER-BASED MUD	8.6	9.7							
9842	20753	OIL-BASED MUD	10	12							

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

No logs are planned based on well control or offset log information. Offset Well: Red Hills West Unit #044H

List of open and cased hole logs run in the well:

DIRECTIONAL SURVEY, MEASUREMENT WHILE DRILLING, MUD LOG/GEOLOGIC LITHOLOGY LOG,

Coring operation description for the well:

None

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 6430**Anticipated Surface Pressure:** 4166**Anticipated Bottom Hole Temperature(F):** 140**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations**

H2S_Plan_20250616095805.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

RED_HILLS_WEST_UNIT_041H_Dir_Plan_20250617071429.pdf

RED_HILLS_WEST_UNIT_041H_Dir_Plot_20250617071435.pdf

Other proposed operations facets description:**Other proposed operations facets attachment:**

MOC_Break_Testing_Variance_20250616095920.pdf


RED_HILLS_WEST_UNIT_041H_NGMP_1_20250806104210.pdf

Red_Hills_West_Unit_41H_Drlg_Program_20250811103038.pdf

Other Variance request(s)?: N**Other Variance attachment:**

CONFIDENTIAL

5M BOPE & Closed Loop Equipment Schematic

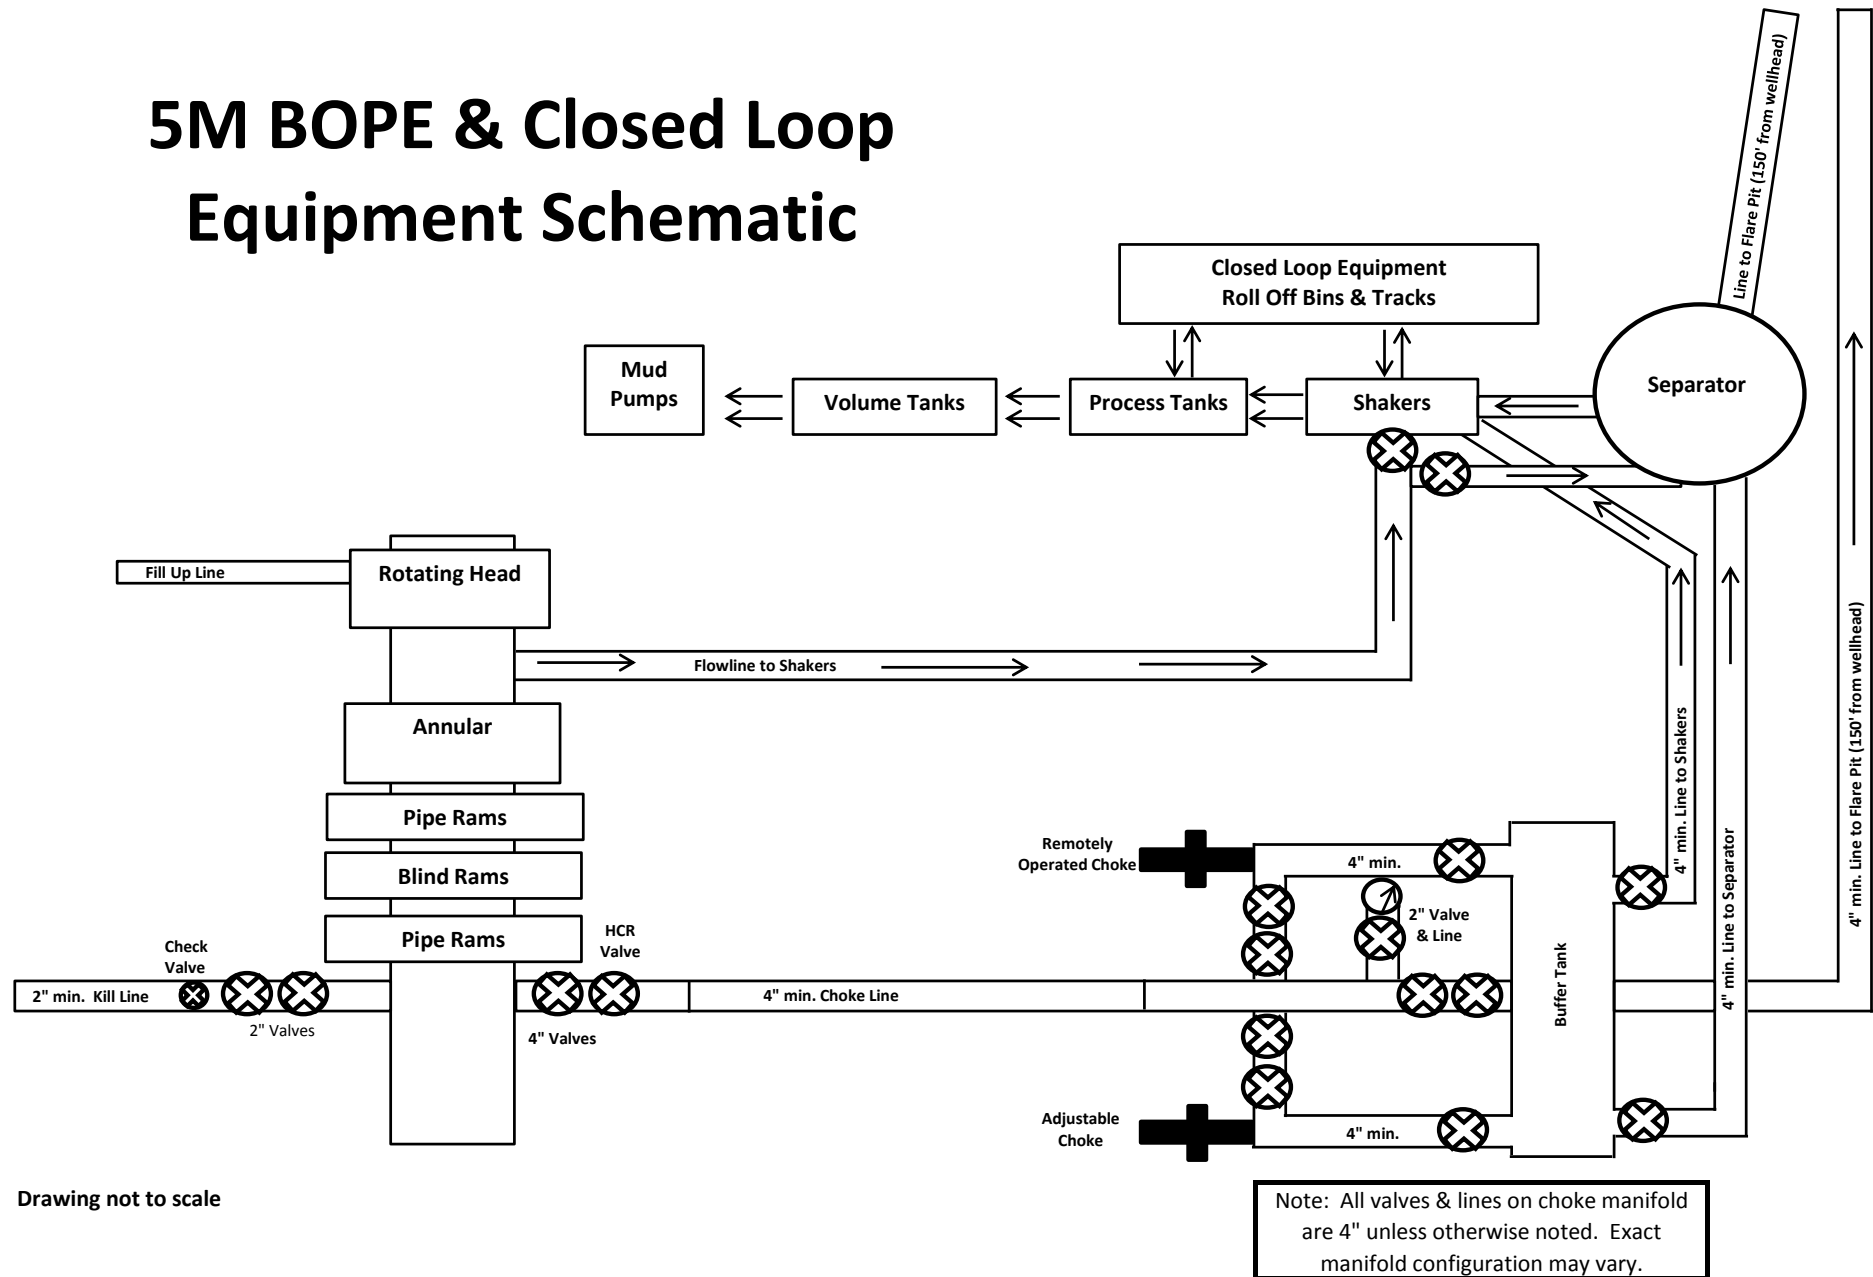

Drawing not to scale

LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD

HYDROSTATIC TESTING REPORT

LTTY/QR-5.7.1-28

No: 230826015

Product Name	Choke And Kill Hose	Standard	API Spec 16C 3 rd edition
Product Specification	3"×10000psi×60ft (18.29m)	Serial Number	7660144
Inspection Equipment	MTU-BS-1600-3200-E	Test medium	Water
Inspection Department	Q.C. Department	Inspection Date	2023.08.26


Rate of length change

Standard requirements	At working pressure ,the rate of length change should not more than $\pm 2\%$
Testing result	10000psi (69.0MPa) ,Rate of length change 0.7%

Hydrostatic testing

Standard requirements	At 1.5 times working pressure, the initial pressure-holding period of not less than three minutes, the second pressure-holding period of not less than one hour, no leaks.
Testing result	15000psi (103.5MPa), 3 min for the first time, 60 min for the second time, no leakage

Graph of pressure testing:

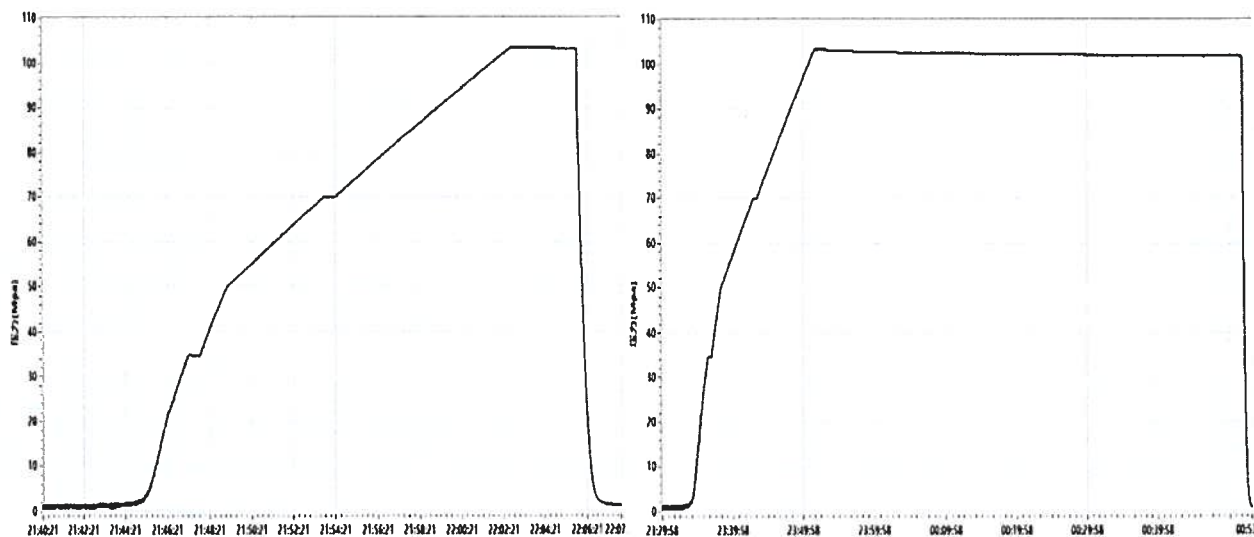

Conclusion	The inspected items meet standard requirements of API Spec 16C 3 rd edition				
Approver	Jiaolong Chen	Auditor	Huiling Dong	Inspector	Zhanheng Wang

LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD

CERTIFICATE OF QUALITY

LTTY/QR-5.7.1-19B

No: LT2023-126-002

Customer Name	Austin Hose		
Product Name	Choke And Kill Hose		
Product Specification	3"×10000psi×60ft (18.29m)	Quantity	2PCS
Serial Number	7660143~7660144	FSL	FSL3
Temperature Range	-29℃~+121℃	Standard	API Spec 16C 3 rd edition
Inspection Department	Q.C. Department	Inspection date	2023.08.26

Inspection Items		Inspection results	
Appearance Checking		In accordance with API Spec 16C 3 rd edition	
Size and Lengths		In accordance with API Spec 16C 3 rd edition	
Dimensions and Tolerances		In accordance with API Spec 16C 3 rd edition	
End Connections: 4-1/16"×10000psi Integral flange for sour gas service		In accordance with API Spec 6A 21 st edition	
End Connections: 4-1/16"×10000psi Integral flange for sour gas service		In accordance with API Spec 17D 3 rd edition	
Hydrostatic Testing		In accordance with API Spec 16C 3 rd edition	
product Marking		In accordance with API Spec 16C 3 rd edition	
Inspection conclusion		The inspected items meet standard requirements of API Spec 16C 3 rd edition	
Remarks			
Approver	Jiaolong Chen	Auditor	Huiling Dong
		Inspector	Zhansheng Wang

LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD
CERTIFICATE OF CONFORMANCE

№:LT230826016

Product Name: Choke And Kill Hose

Product Specification: 3"×10000psi×60ft (18.29m)

Serial Number: 7660143~7660144

End Connections: 4-1/16"×10000psi Integral flange for sour gas service

The Choke And Kill Hose assembly was produced by LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD . in Aug 2023, and inspected by LUOHE LETONE HYDRAULICS TECHNOLOGY CO.,LTD. according to API Spec 16C 3rd edition on Aug 26, 2023. The overall condition is good. This is to certify that the Choke And Kill Hose complies with all current standards and specifications for API Spec 16C 3rd edition .

QC Manager:

Jianlong Chen

Date:Aug 26, 2023



Mewbourne Oil Co.

BOP Break Testing Variance

Mewbourne Oil Company requests a variance from the minimum standards for well control equipment testing of 43 CFR 3172 to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with batch drilling & offline cementing operations. Modern rig upgrades which facilitate pad drilling allow the BOP stack to be moved between wells on a multi-well pad without breaking any BOP stack components apart. Widespread use of these technologies has led to break testing BOPE being endorsed as safe and reliable. American Petroleum Institute (API) best practices are frequently used by regulators to develop their regulations. API Standard 53, *Well Control Equipment Systems for Drilling Wells* (5th Ed., Dec. 2018) Section 5.3.7.1 states "A pressure test of the pressure containing component shall be performed following the disconnection or repair, limited to the affected component."

Procedures

1. Full BOPE test at first installation on the pad.
 - Full BOPE test at least every 21 days.
 - Function test BOP elements per 43 CFR 3172.
 - Contact the BLM if a well control event occurs.
2. After the well section is secured and the well is confirmed to be static, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad. Two breaks on the BOPE will be made (Fig. 1).
 - Connection between the flex line and the HCR valve
 - Connection between the wellhead and the BOP quick connect (Fig. 5 & 6).
3. A capping flange will be installed after cementing per wellhead vendor procedure & casing pressure will be monitored via wellhead valve.
4. The BOP will be removed and carried by a hydraulic carrier (Fig. 3 & 4).
5. The rig will then walk to the next well.
6. Confirm that the well is static and remove the capping flange.
7. The connection between the flex line and HCR valve and the connection between the wellhead and the BOP quick connect will be reconnected.
8. Install a test plug into the wellhead.
9. A test will then be conducted against the upper pipe rams and choke, testing both breaks (Fig. 1 & 2).
10. The test will be held at 250 psi low and to the high value submitted in the APD, not to exceed 5000 psi.
11. The annular, blind rams and lower pipe rams will then be function tested.
12. If a pad consists of three or more wells, steps 4 through 11 will be repeated.



13. A break test will only be conducted if the intermediate section can be drilled and cased within 21 days of the last full BOPE test.

Barriers

Before Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff

After Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff
- Offline cementing tool and/or cement head
- Capping flange after cementing

Summary

A variance is requested to only test broken pressure seals on the BOPE when moving between wells on a multi-well pad if the following conditions are met:

- A full BOPE test is conducted on the first well on the pad. API Standard 53 requires testing annular BOP to 70% of RWP or 100% of MASP, whichever is greater.
- If the first well on the pad is not the well with the deepest intermediate section, a full BOPE test will also be performed when moving to a deeper well.
- The hole section being drilled has a MASP under 5000 psi.
- If a well control event occurs, Mewbourne will contact BLM for permission to continue break testing.
- If significant (>50%) losses occur, full BOPE testing will be required going forward.
- Full BOPE test will be required prior to drilling the production hole.

While walking the rig, the BOP stack will be secured via hydraulic winch or hydraulic carrier. A full BOPE test will be performed at least every 21 days.

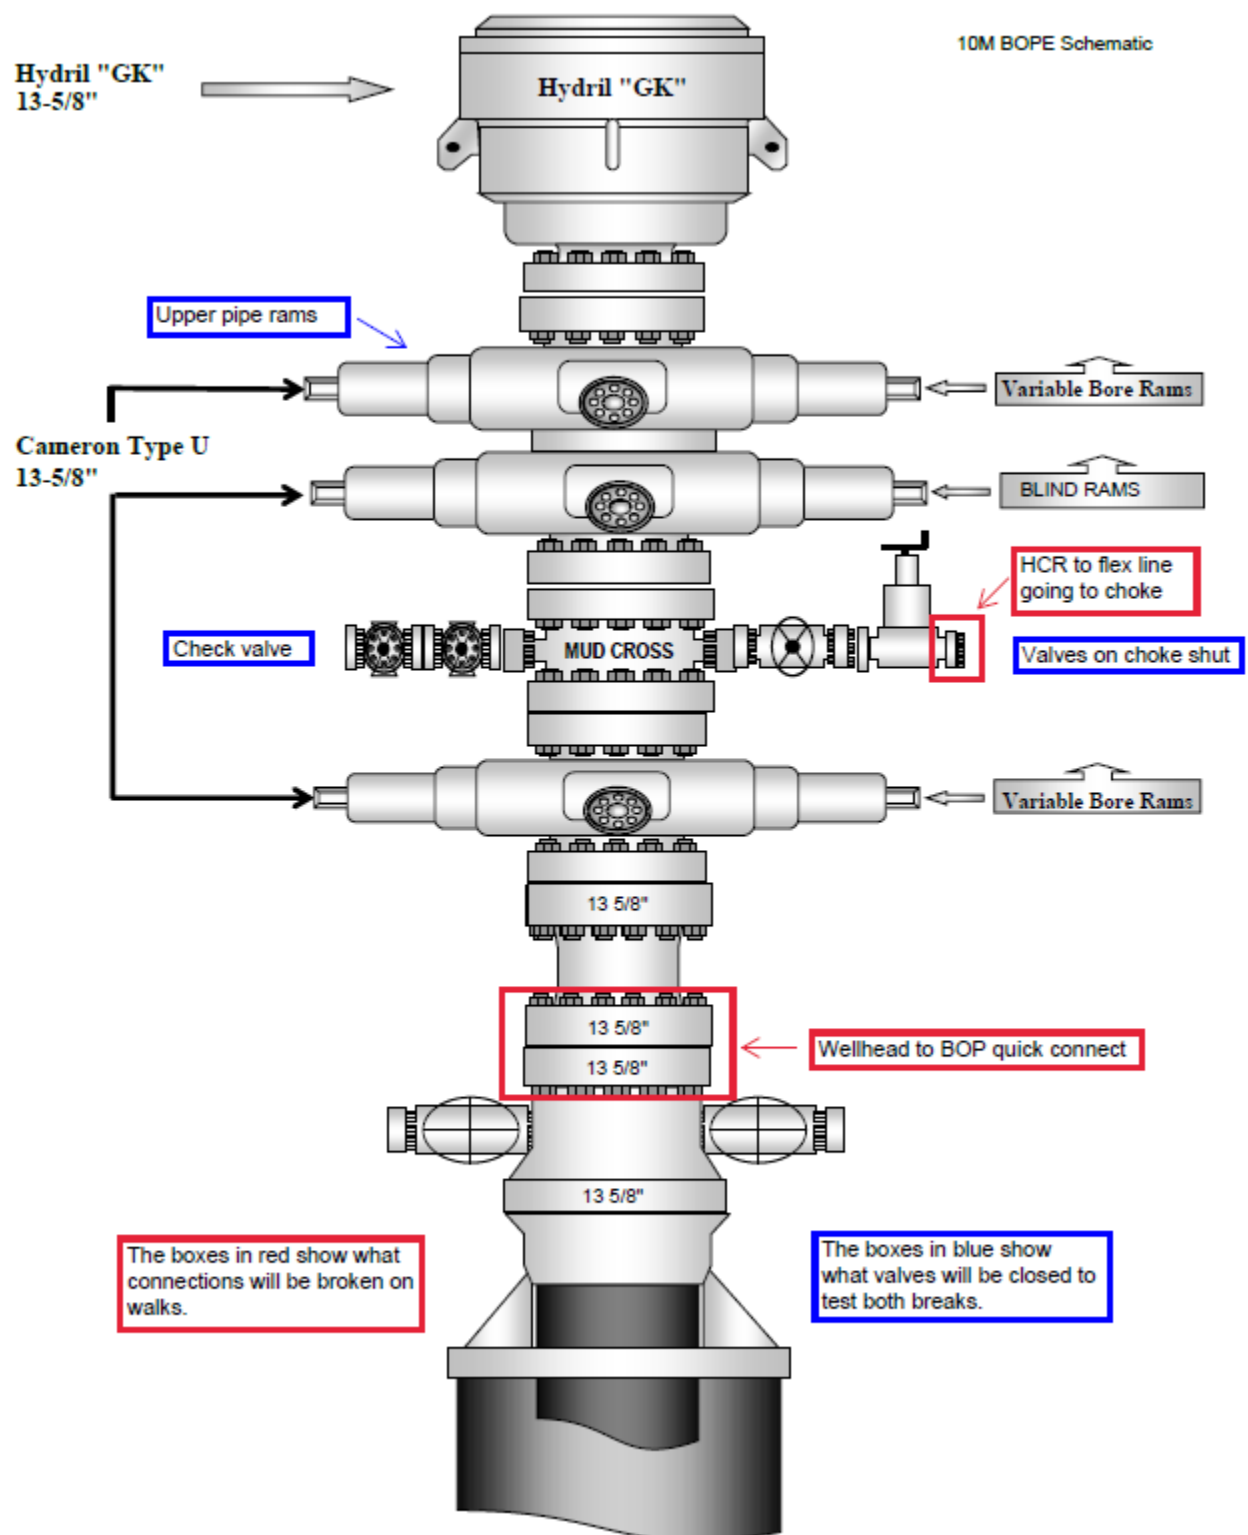


Figure 1. BOP diagram



5M BOPE & Closed Loop Equipment Schematic

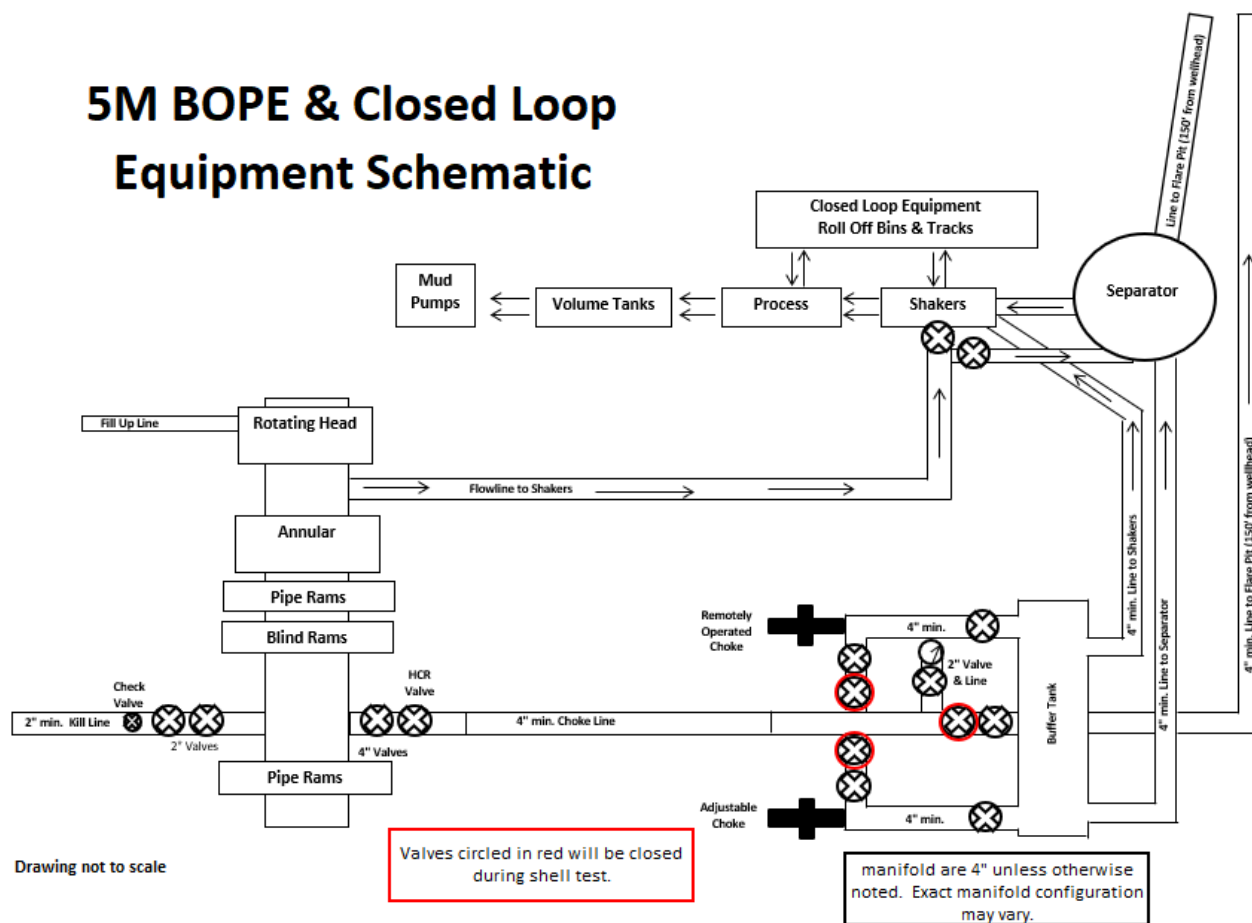


Figure 2. BOPE diagram



Figure 3. BOP handling system



Figure 4. BOP handling system

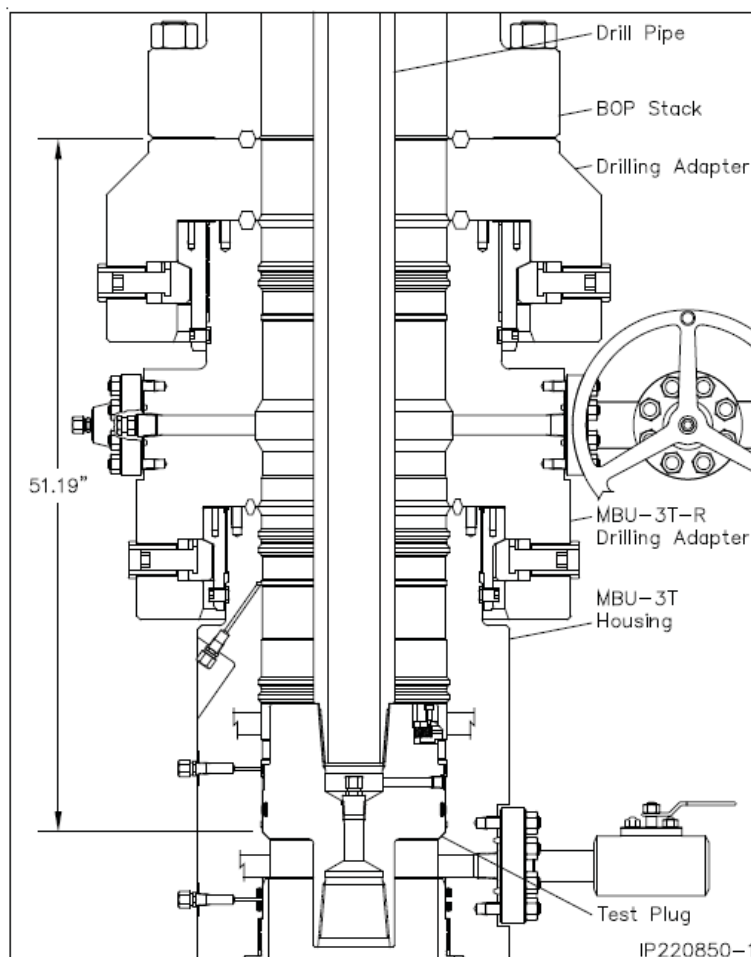


Figure 5. Cactus 5M wellhead with BOP quick connect

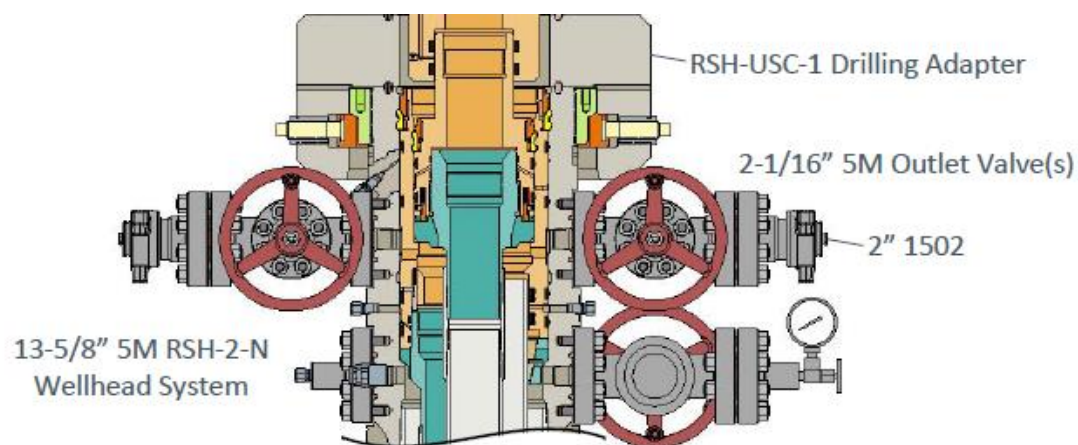


Figure 6. Vault 5M wellhead with BOP quick connect



Mewbourne Oil Co.

Surface & Intermediate Offline Cementing Variance

Mewbourne Oil Company requests a variance to perform offline cementing for surface and intermediate casing strings with the following conditions:

- Offline cementing will not be performed on production casing.
- Offline cementing will not be performed on a hole section with MASP > 5000 psi.
- Offline cementing will not be performed concurrently with offset drilling.

Surface Casing Order of Operations:

1. Run 13 3/8" surface casing as per normal operations (TPGS and float collar).
2. Perform negative pressure test to confirm integrity of float equipment while running casing.
3. Confirm well is static.
4. Make up 13 5/8" wellhead or wellhead landing ring assembly and land on 20" conductor.
5. Fill pipe, circulate casing capacity and confirm float(s) are still holding.
6. Confirm well is static.
7. Back out landing joint and pull to rig floor. Lay down landing joint.
8. Walk rig to next well on pad with cement crew standing by to rig up.
9. Make up offline cement tool with forklift per wellhead manufacturer (Fig. 1 & 2).
10. Make up cement head on top of offline cement tool with forklift.
11. Commence cement operations.
12. If cement circulates, confirm well is static and proceed to step 16.
13. If cement does not circulate, notify the appropriate BLM office, wait a minimum of six hours, and run a temperature survey to determine the top of cement.
14. Use 1" pipe for remedial cement job until the surface casing is cemented to surface.
15. Confirm well is static.
16. Once cement job is complete, the cement head and offline cementing tool are removed. The wellhead technician returns to cellar to install wellhead/valves.
17. Install wellhead capping flange.

Barriers

Before Walk:

- Float(s) in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus

**After Walk:**

- Float(s) in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Offline cementing tool tested to 5000 psi and cement head
- Capping flange after cementing

20" Surface Casing Order of Operations (4 string area):

1. Run 20" surface casing as per normal operations (TPGS and float collar).
2. Perform negative pressure test to confirm integrity of float equipment while running casing.
3. Fill pipe, circulate casing capacity and confirm float(s) are still holding.
4. Confirm well is static.
5. Back out landing joint and pull to rig floor. Lay down landing joint.
6. Make up cement head.
7. Walk rig to next well on pad with cement crew standing by to rig up.
8. Commence cement operations.
9. If cement circulates, confirm well is static and proceed to step 13.
10. If cement does not circulate, notify the appropriate BLM office, wait a minimum of six hours, and run a temperature survey to determine the top of cement.
11. Use 1" pipe for remedial cement job until the surface casing is cemented to surface.
12. Confirm well is static.
13. Once cement job is complete, remove cement head and install cap.

Barriers**Before Walk:**

- Float(s) in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Cement Head

After Walk:

- Float(s) in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Cement head
- Capping flange after cementing



Intermediate Casing Order of Operations:

1. Run casing as per normal operations (float shoe and float collar).
2. Perform negative pressure test to confirm integrity of float equipment while running casing.
3. Confirm well is static (if running SBM).
4. Land casing.
5. Fill pipe, circulate casing capacity and confirm floats are still holding.
6. Confirm well is static.
7. Back out landing joint and pull to rig floor. Lay down landing joint. Install packoff & test.
8. Nipple down BOP.
9. Walk rig to next well on pad with cement crew standing by to rig up.
10. Make up offline cement tool using forklift per wellhead manufacturer (Fig. 3 - 8).
11. Make up cement head on top of offline cement tool.
12. Commence cement operations.
13. If cement circulates, confirm well is static and proceed to step 16.
14. If cement does not circulate (when required), notify the appropriate BLM office, wait a minimum of six hours, and run a temperature survey to determine the top of cement.
15. Pump remedial cement job if required.
16. Confirm well is static.
17. Remove cement head and offline cementing tool.
18. Install wellhead capping flange and test.

Barriers

Before Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff

After Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff
- Offline cementing tool tested to 5000 psi and cement head
- Capping flange after cementing

**Risks:**

- Pressure build up in annulus before cementing
 - Contact BLM if a well control event occurs.
 - Rig up 3rd party pump or rig pumps to pump down casing and kill well.
 - Returns will be taken through the wellhead valves to a choke manifold (Fig 9 & 10).
 - Well could also be killed through the wellhead valves down the annulus.

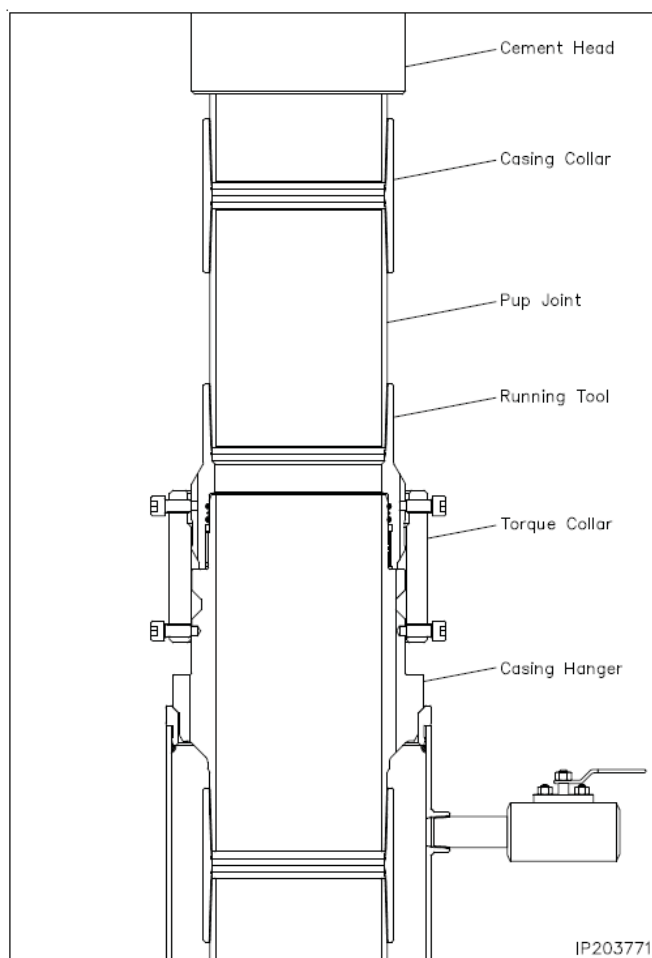


Figure 1. Cactus 13 3/8" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 13 3/8" pup joint and casing.

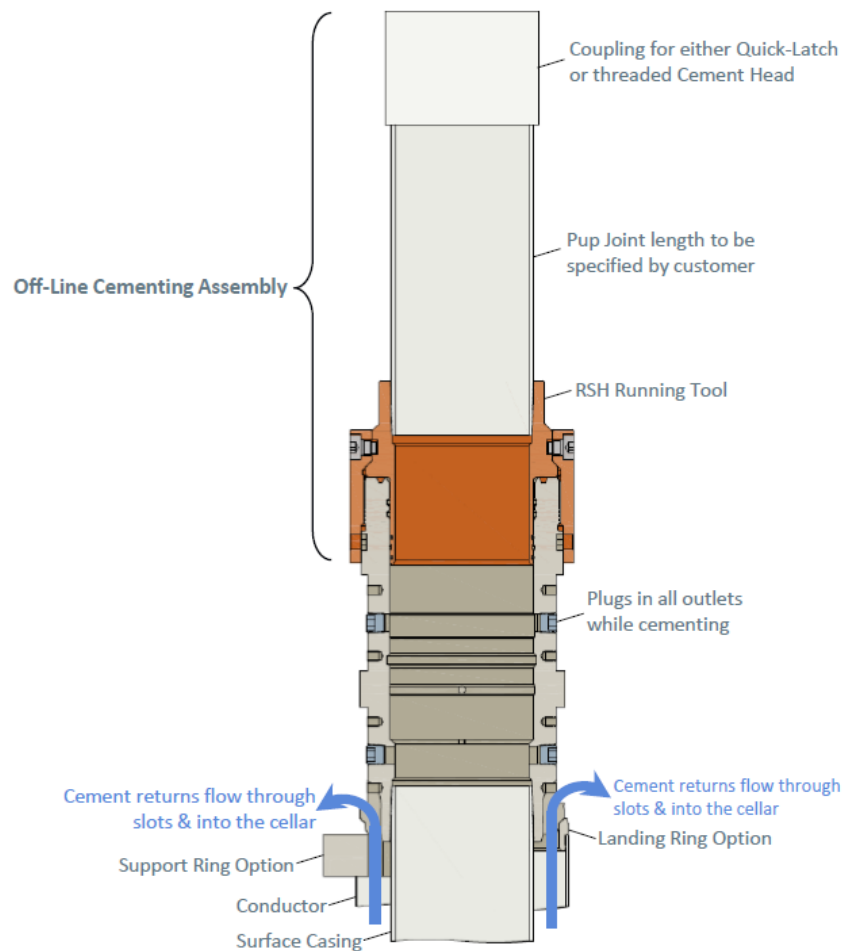


Figure 2. Vault 13 3/8" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 13 3/8" pup joint and casing.

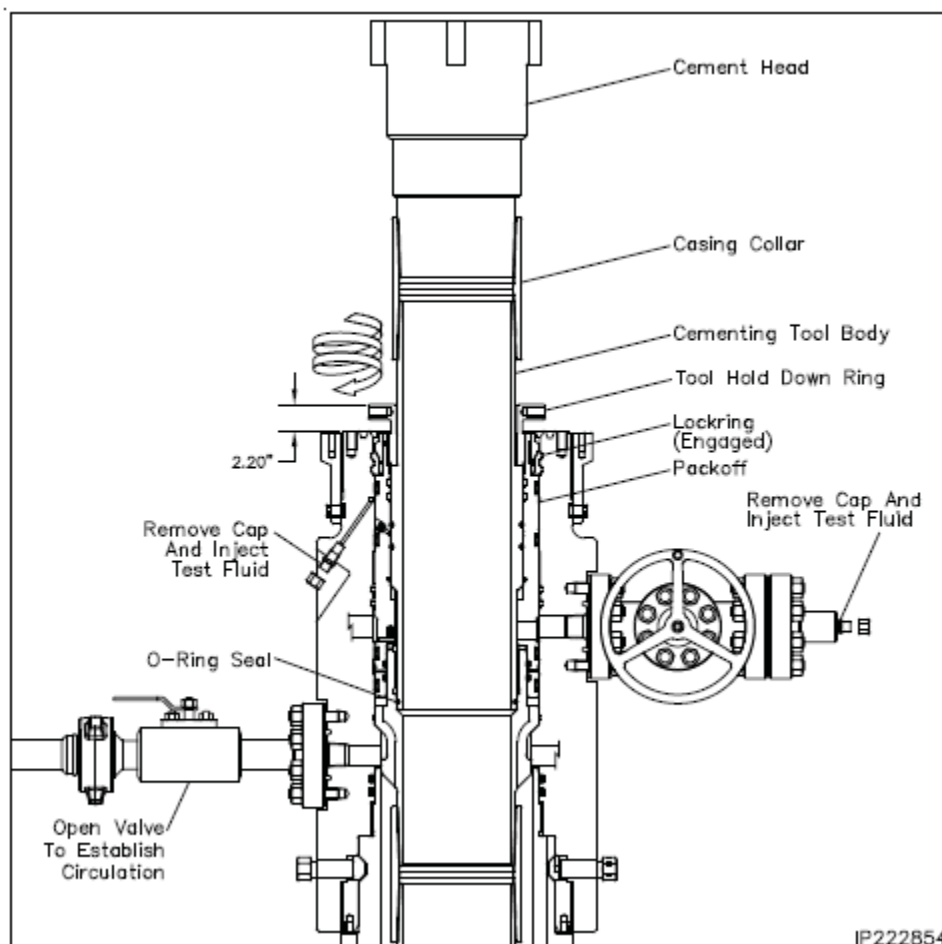


Figure 3. Cactus 9 5/8" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 9 5/8" pup joint and casing.

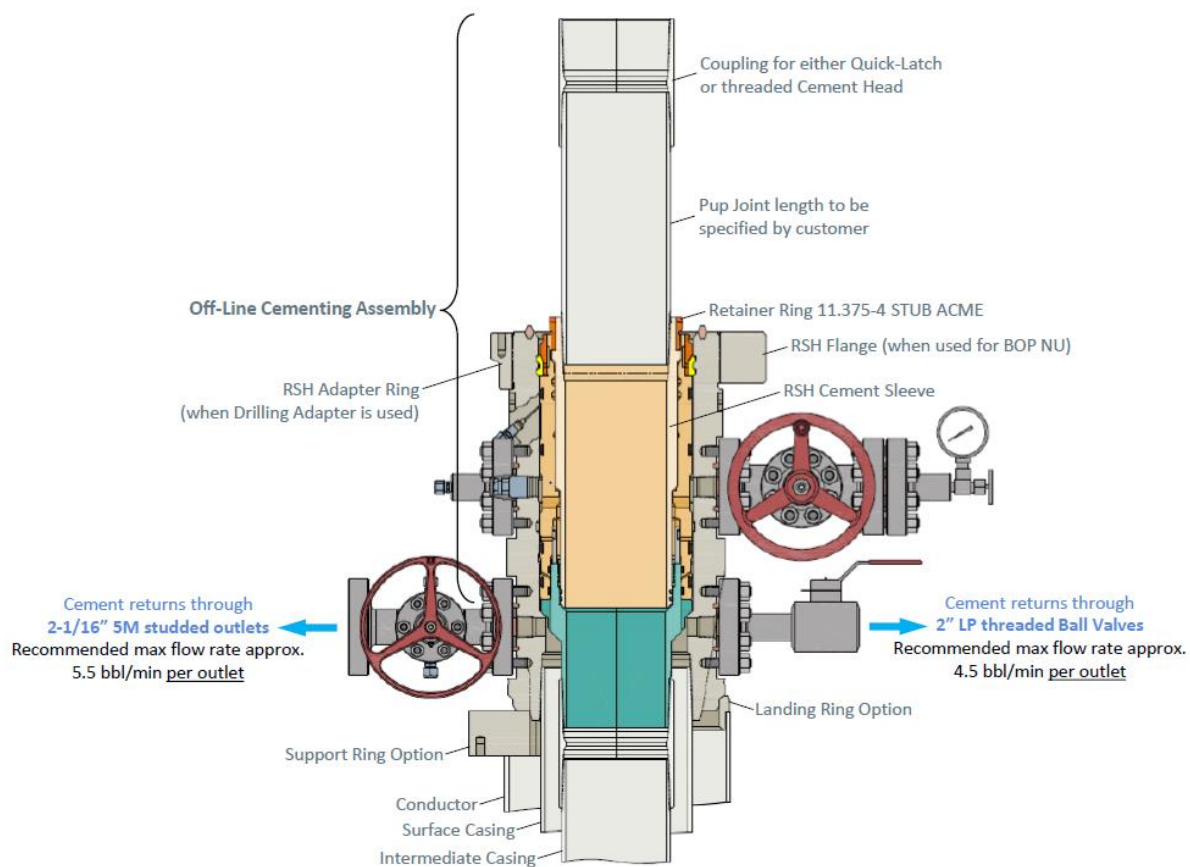


Figure 4. Vault 9 5/8" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 9 5/8" pup joint and casing.

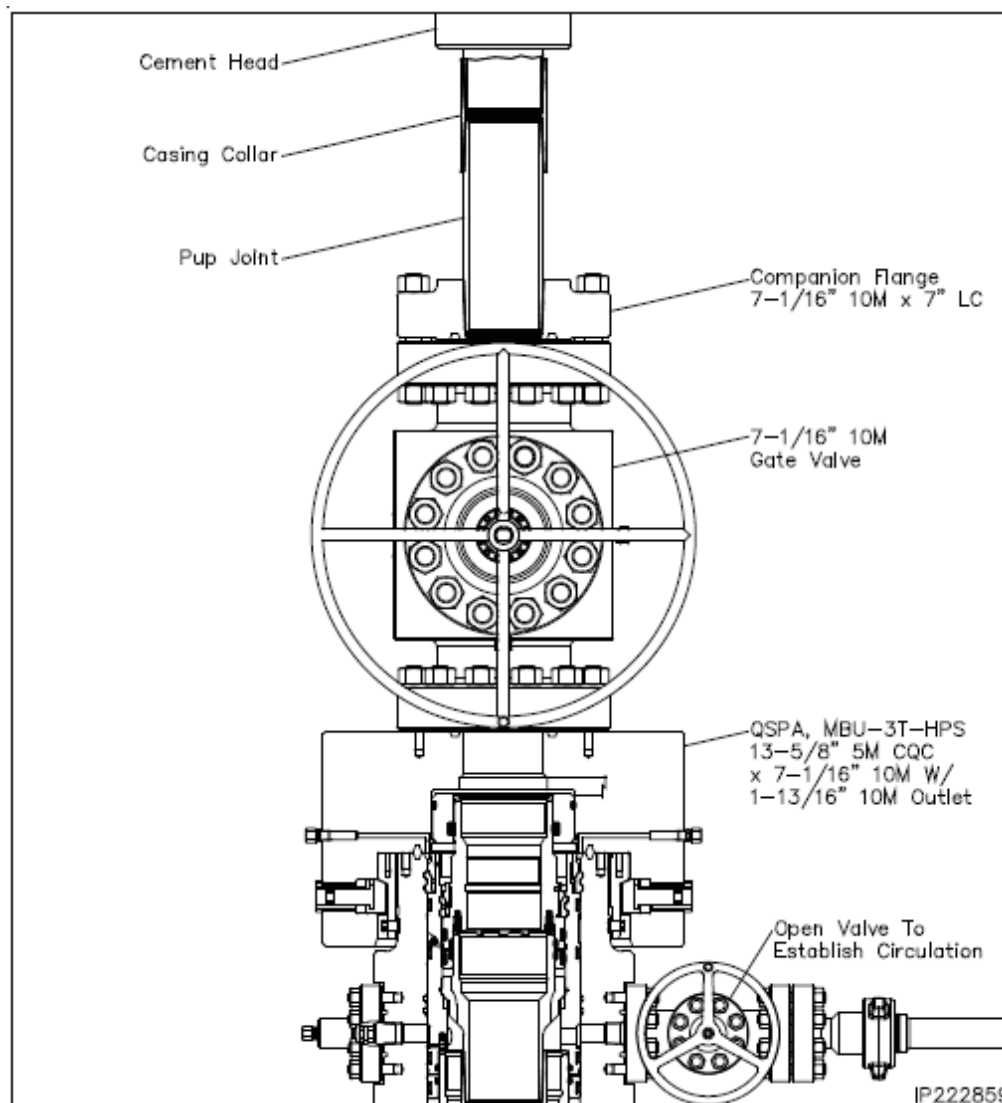


Figure 5. Cactus 7" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 7" pup joint and casing.

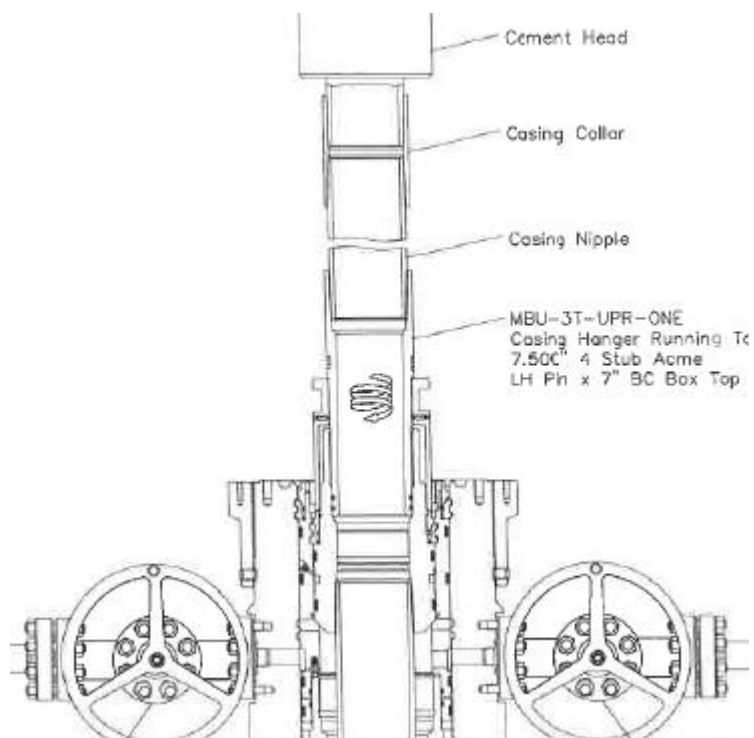


Figure 6. Cactus 7" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 7" pup joint and casing.

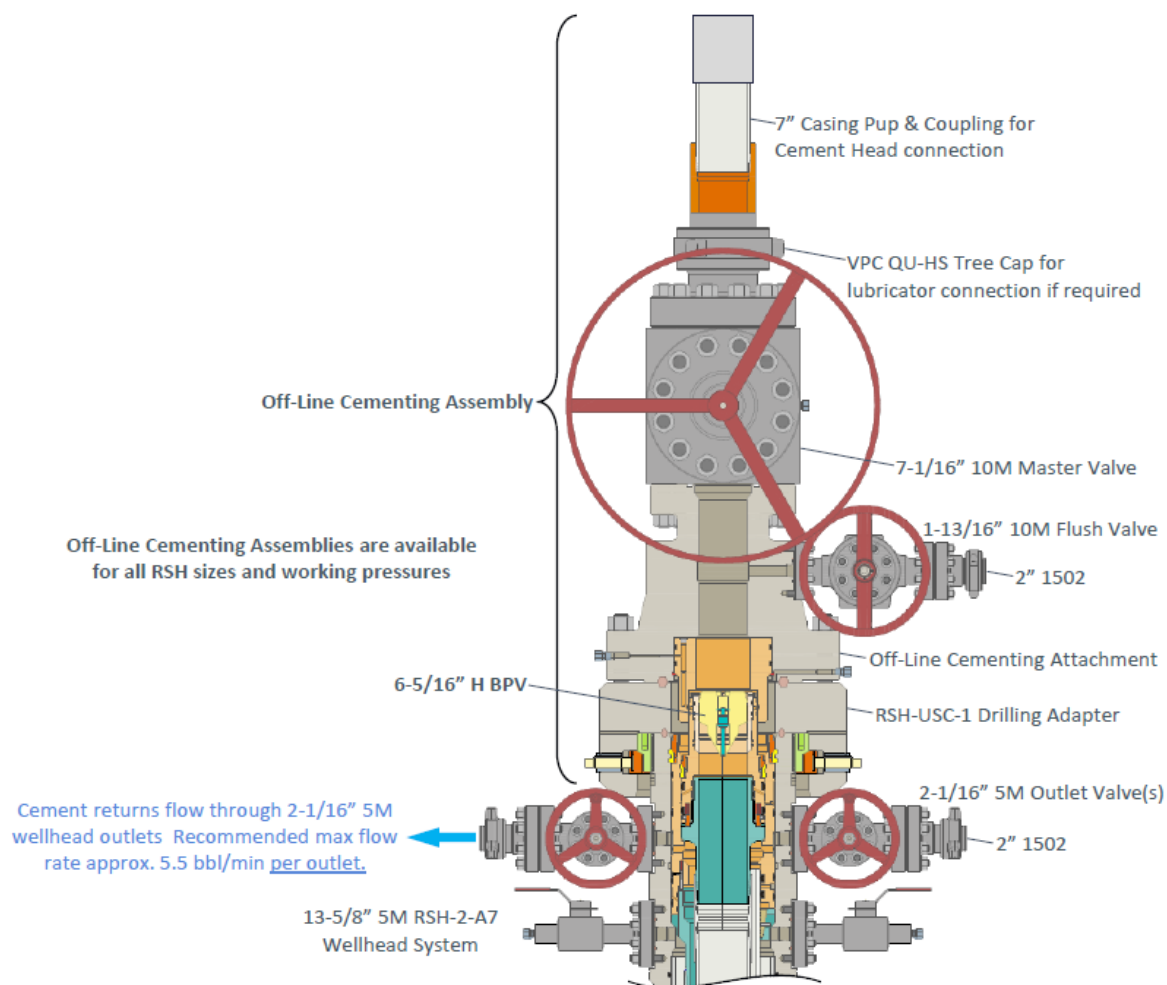


Figure 7. Vault 7" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 7" pup joint and casing.

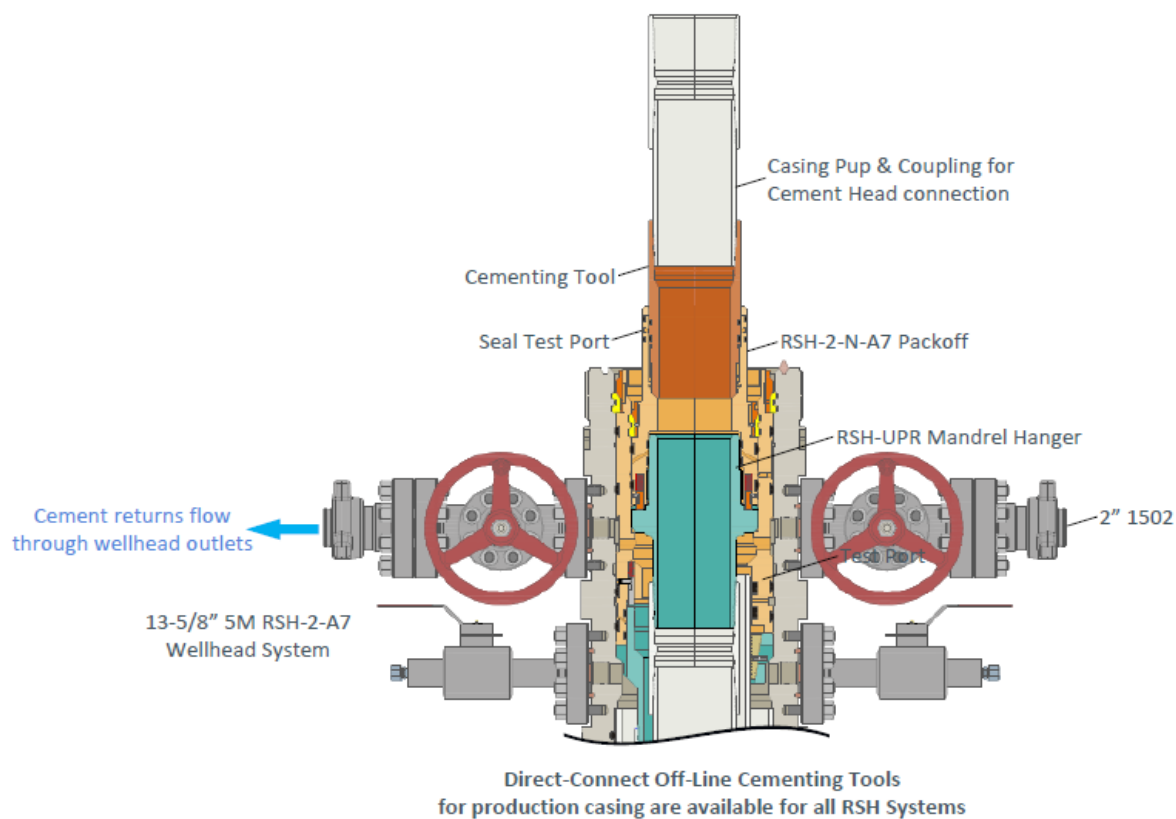


Figure 8. Vault 7" 5M offline cementing tool. Pressure rating limited by the lesser of 5M tool rating or the 7" pup joint and casing.

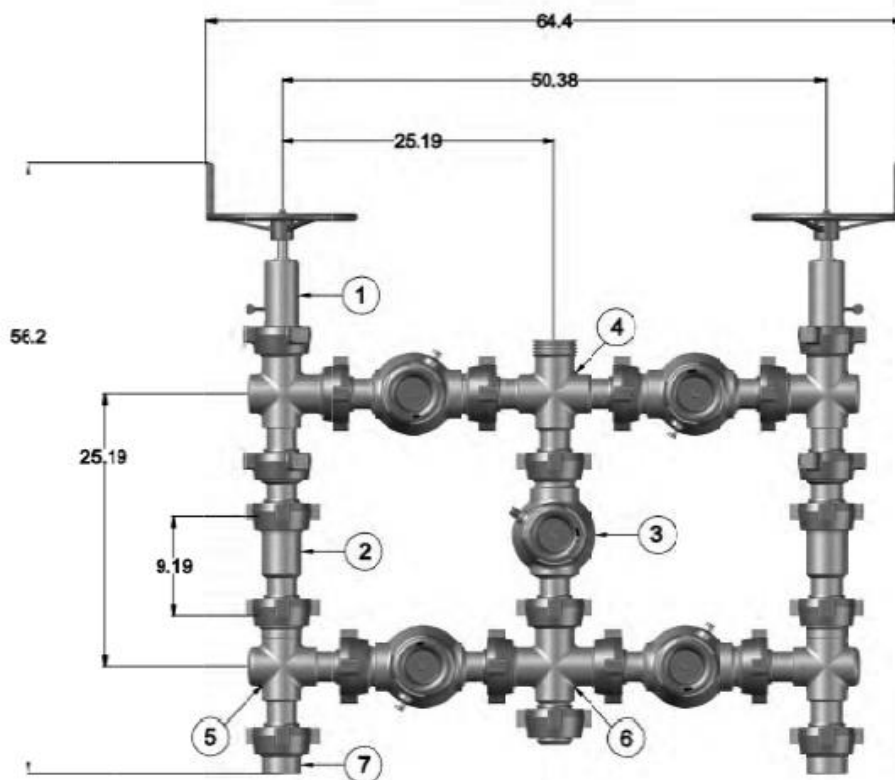


Figure 9. Five valve 15k choke manifold.



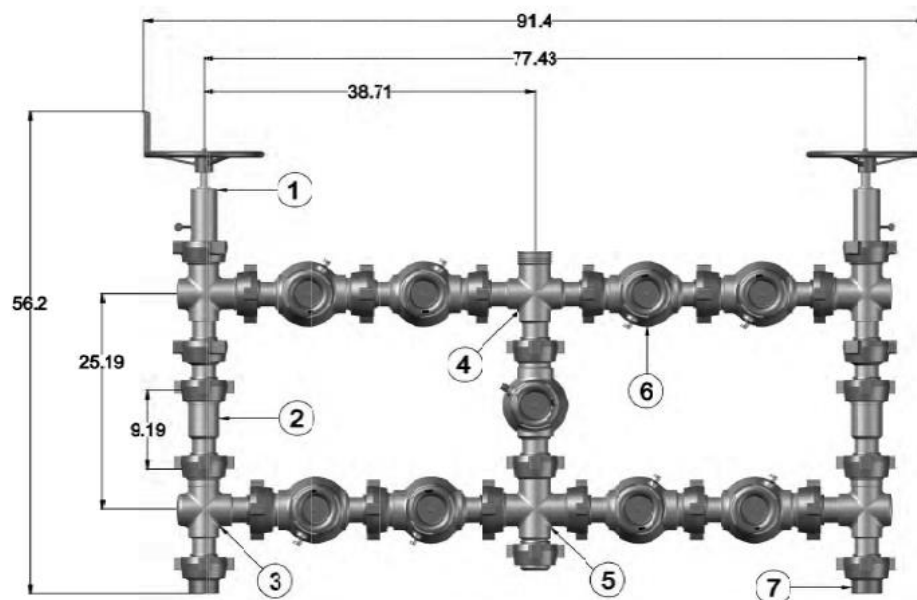



Figure 10. Nine valve 15k choke manifold.

Hydril "GK"
13 5/8" 5M




Hydril "GK"


Cameron Type U
13 5/8" 5M



4 1/2" x 5 7/8" VBR




BLIND RAMS

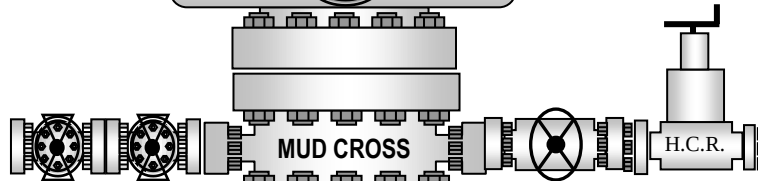

MUD CROSS



H.C.R.




7" RAMS



13 5/8" 5M


13 5/8" 5M

13 5/8" 5M

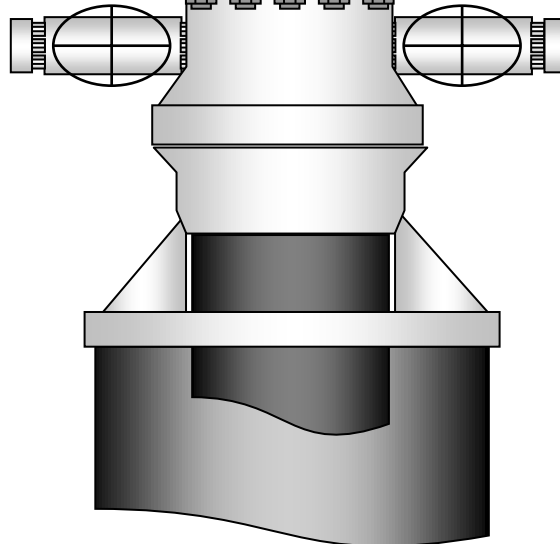



13-5/8" MN-DS Wellhead System

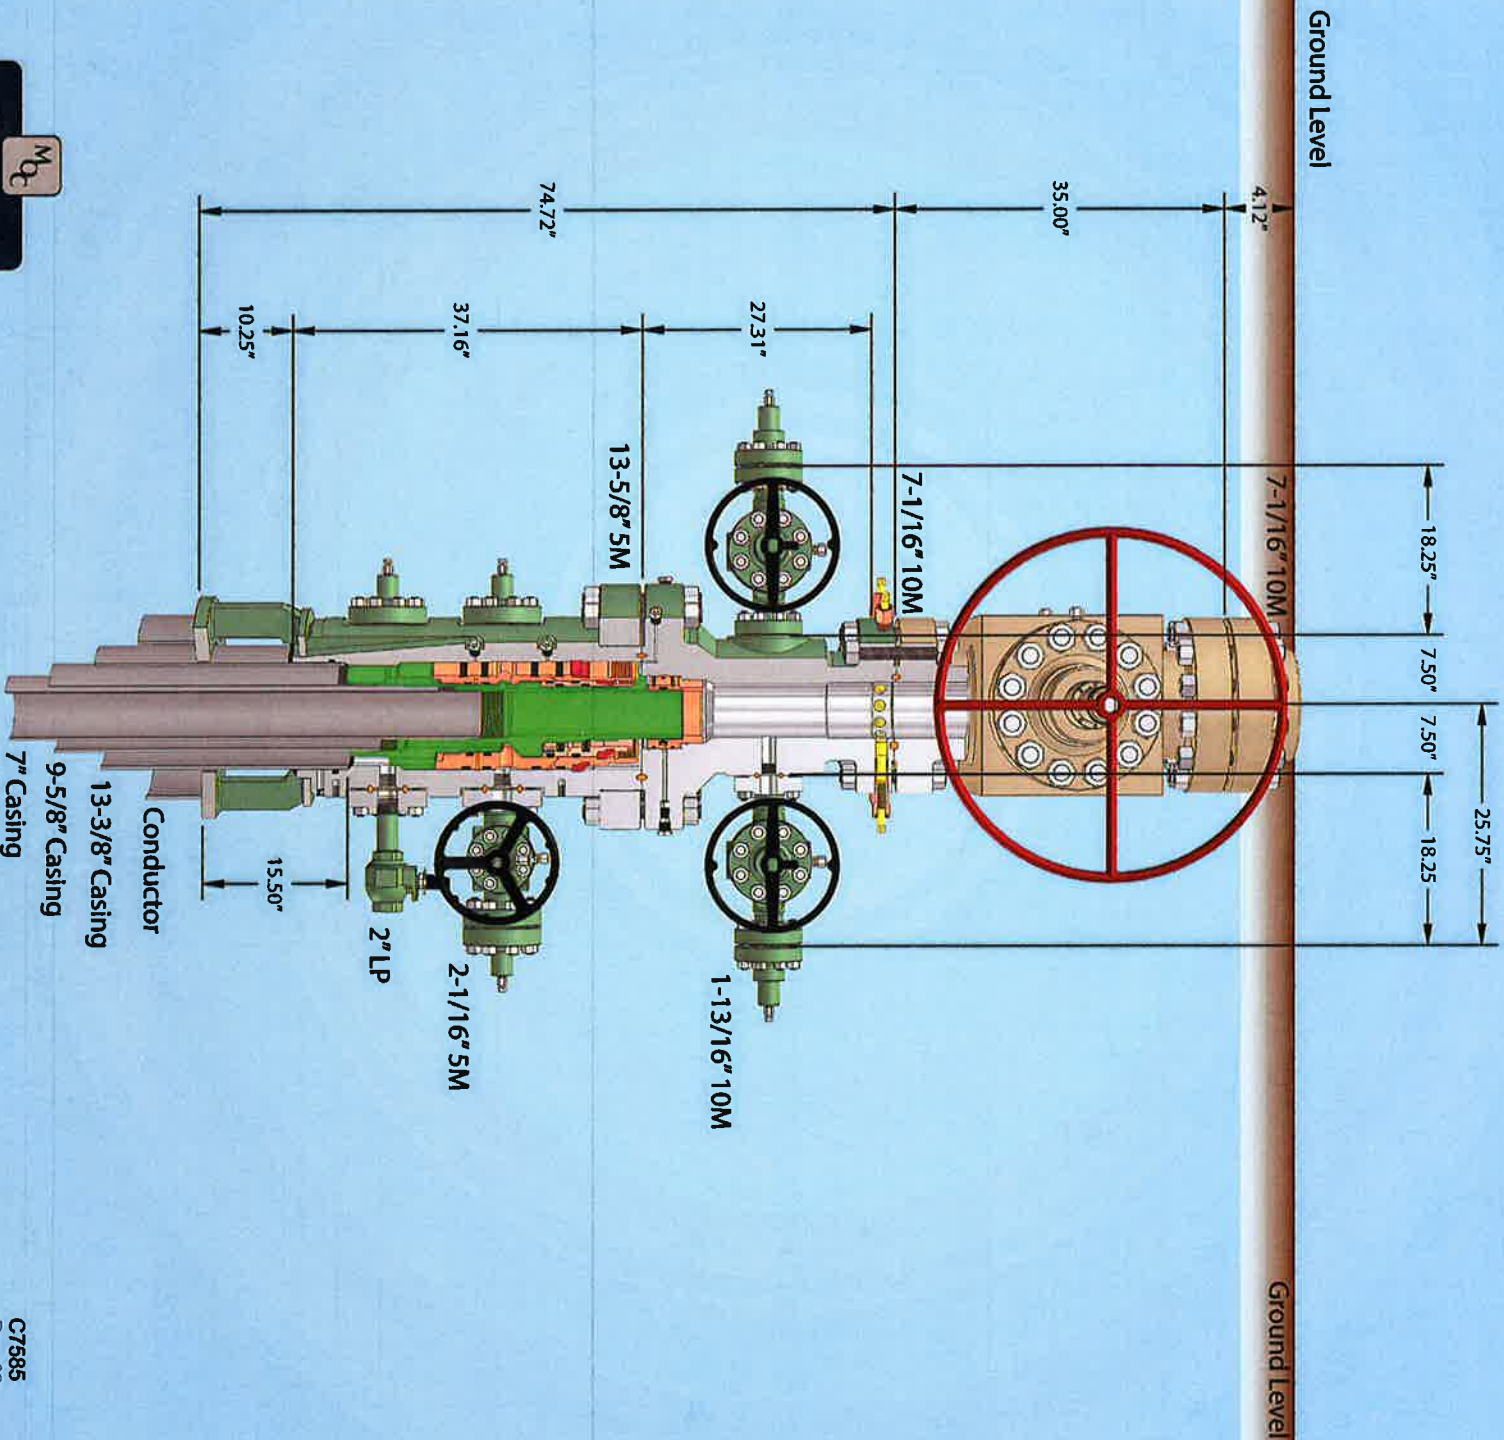

NOTE: All dimensions on this drawing are estimated measurements and should be evaluated by engineering.

C7685
Rev. 02




Engineering 537' conductor cut-off
79

Mewbourne Oil Company, Red Hills West Unit 41H
Sec 10, T26S, R32E
SHL: 150' FSL & 770' FWL (Sec 10)
BHL: 100' FNL & 2160' FWL (Sec 3)

Casing Design A

Hole Size	From	To	Csg. Size	#/ft	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
8.75	0'	9842'	7" 26# P110 LTC				1.27	2.03	2.71	3.24
8.5	9842'	20753'	4.5" 13.5# RYS110 CDC HTQ				1.66	1.93	2.90	2.86

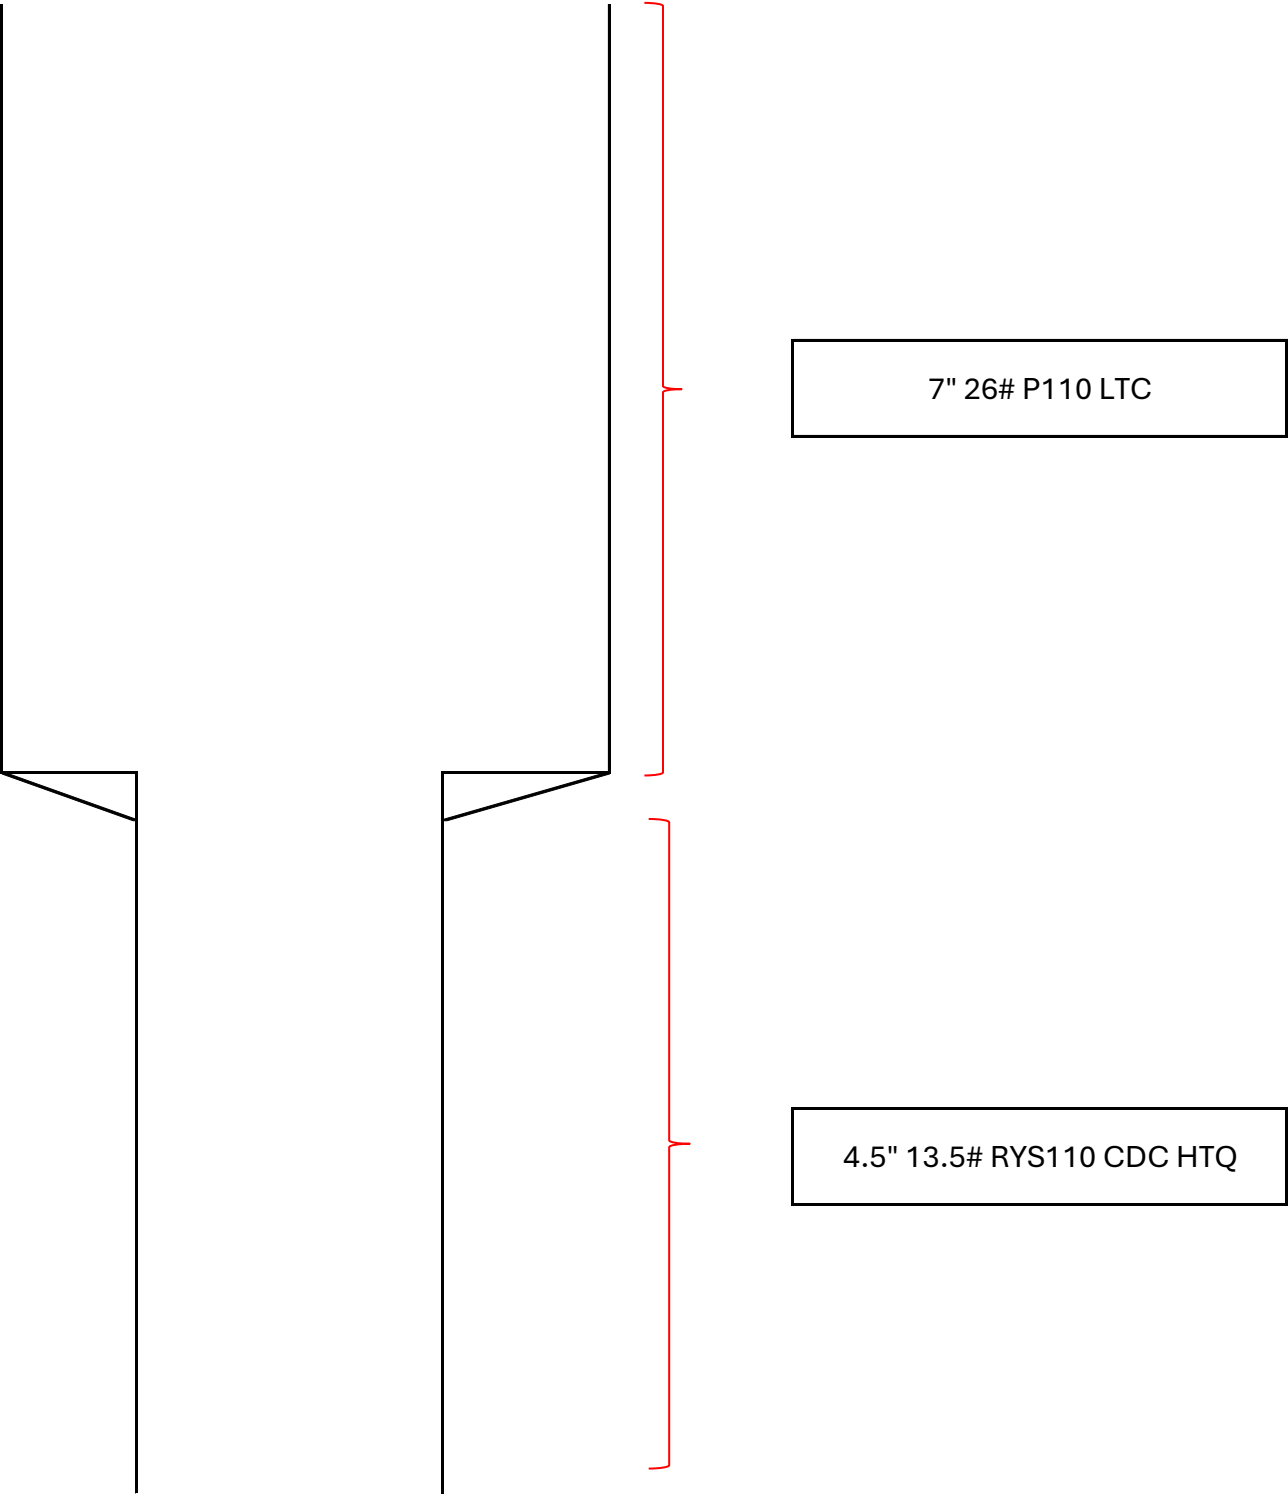



API STC

Coupling	Pipe Body
Grade: H40	Grade: H40
Body: -	1st Band: Black
1st Band: Black	2nd Band: -
2nd Band: -	3rd Band: -
3rd Band: -	4th Band: -

Outside Diameter	13.375 in.	Wall Thickness	0.330 in.	Grade	H40
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	Regular				

Pipe Body Data

Geometry				Performance	
Nominal OD	13.375 in.	Drift	12.559 in.	SMYS	40,000 psi
Wall Thickness	0.330 in.	Plain End Weight	46.02 lb/ft	Min UTS	60,000 psi
Nominal Weight	48 lb/ft	OD Tolerance	API	Body Yield Strength	541 x1000 lb
Nominal ID	12.715 in.			Min. Internal Yield Pressure	1730 psi
				Collapse Pressure	740 psi
				Max. Allowed Bending	14 °/100 ft

Connection Data

Geometry		Performance		Make-Up Torques	
Thread per In	8	Joint Strength	322 x1000 lb	Minimum Torque	2420 ft-lb
Connection OD	14.375 in.	Coupling Face Load	377 x1000 lb	Optimum Torque	3220 ft-lb
Hand Tight Stand Off	3.500 in.	Internal Pressure Capacity	1730 psi	Maximum Torque	4030 ft-lb

Notes

For products according to API Standards 5CT & 5B; Performance calculated considering API Technical Report 5C3 (Sections 9 & 10) equations.
For geometrical and steel grades combinations not considered in the API Standards 5CT and/or 5B; Performance calculations indirectly derived from API Technical Report 5C3 (Sections 9 & 10) equations.
Couplings OD are shown according to current API 5CT 10th Edition.
Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com . ©Tenaris 2024. All rights reserved.



API LTC

Coupling	Pipe Body
Grade: J55 (Casing)	Grade: J55 (Casing)
Body: Bright Green	1st Band: Bright Green
1st Band: White	2nd Band: -
2nd Band: -	3rd Band: -
3rd Band: -	4th Band: -

Outside Diameter	9.625 in.	Wall Thickness	0.352 in.	Grade	J55 (Casing)
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	Regular				

Pipe Body Data

Geometry				Performance	
Nominal OD	9.625 in.	Drift	8.765 in.	SMYS	55,000 psi
Wall Thickness	0.352 in.	Plain End Weight	34.89 lb/ft	Min UTS	75,000 psi
Nominal Weight	36 lb/ft	OD Tolerance	API	Body Yield Strength	564 x1000 lb
Nominal ID	8.921 in.			Min. Internal Yield Pressure	3520 psi
				Collapse Pressure	2020 psi
				Max. Allowed Bending	26 °/100 ft

Connection Data

Geometry		Performance		Make-Up Torques	
Thread per In	8	Joint Strength	453 x1000 lb	Minimum Torque	3400 ft-lb
Connection OD	10.625 in.	Coupling Face Load	433 x1000 lb	Optimum Torque	4530 ft-lb
Hand Tight Stand Off	3.500 in.	Internal Pressure Capacity	3520 psi	Maximum Torque	5660 ft-lb

Notes

For products according to API Standards 5CT & 5B; Performance calculated considering API Technical Report 5C3 (Sections 9 & 10) equations.
For geometrical and steel grades combinations not considered in the API Standards 5CT and/or 5B; Performance calculations indirectly derived from API Technical Report 5C3 (Sections 9 & 10) equations.
Couplings OD are shown according to current API 5CT 10th Edition.

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com . ©Tenaris 2024. All rights reserved.



API LTC

Coupling	Pipe Body
Grade: P110	Grade: P110
Body: White	1st Band: White
1st Band: -	2nd Band: -
2nd Band: -	3rd Band: -
3rd Band: -	4th Band: -

Outside Diameter	7.000 in.	Wall Thickness	0.362 in.	Grade	P110
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	Regular				

Pipe Body Data

Geometry				Performance	
Nominal OD	7.000 in.	Drift	6.151 in.	SMYS	110,000 psi
Wall Thickness	0.362 in.	Plain End Weight	25.69 lb/ft	Min UTS	125,000 psi
Nominal Weight	26 lb/ft	OD Tolerance	API	Body Yield Strength	830 x1000 lb
Nominal ID	6.276 in.			Min. Internal Yield Pressure	9960 psi
				Collapse Pressure	6230 psi
				Max. Allowed Bending	72 °/100 ft

Connection Data

Geometry		Performance		Make-Up Torques	
Thread per In	8	Joint Strength	693 x1000 lb	Minimum Torque	5200 ft-lb
Connection OD	7.875 in.	Coupling Face Load	799 x1000 lb	Optimum Torque	6930 ft-lb
Hand Tight Stand Off	3 in.	Internal Pressure Capacity	9960 psi	Maximum Torque	8660 ft-lb

Notes

For products according to API Standards 5CT & 5B; Performance calculated considering API Technical Report 5C3 (Sections 9 & 10) equations.
For geometrical and steel grades combinations not considered in the API Standards 5CT and/or 5B; Performance calculations indirectly derived from API Technical Report 5C3 (Sections 9 & 10) equations.
Couplings OD are shown according to current API 5CT 10th Edition.
Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com . ©Tenaris 2024. All rights reserved.



U. S. Steel Tubular Products

9/28/2023 4:23:14 PM

4.500" 13.50lb/ft (0.290" Wall) USS RYS110 USS-CDC HTQ®



MECHANICAL PROPERTIES	Pipe	USS-CDC HTQ®		--
Minimum Yield Strength	110,000	--	psi	--
Maximum Yield Strength	125,000	--	psi	--
Minimum Tensile Strength	120,000	--	psi	--
DIMENSIONS	Pipe	USS-CDC HTQ®		--
Outside Diameter	4.500	5.250	in.	--
Wall Thickness	0.290	--	in.	--
Inside Diameter	3.920	3.920	in.	--
Standard Drift	3.795	3.795	in.	--
Alternate Drift	--	--	in.	--
Nominal Linear Weight, T&C	13.50	--	lb/ft	--
Plain End Weight	13.05	--	lb/ft	--
SECTION AREA	Pipe	USS-CDC HTQ®		--
Critical Area	3.836	3.836	sq. in.	--
Joint Efficiency	--	100.0	%	--
PERFORMANCE	Pipe	USS-CDC HTQ®		--
Minimum Collapse Pressure	10,680	10,680	psi	--
External Pressure Leak Resistance	--	8,540	psi	--
Minimum Internal Yield Pressure	12,420	12,420	psi	--
Minimum Pipe Body Yield Strength	422,000	--	lb	--
Joint Strength	--	427,800	lb	--
Compression Rating	--	256,700	lb	--
Reference Length	--	21,126	ft	--
Maximum Uniaxial Bend Rating	--	68.2	deg/100 ft	--
MAKE-UP DATA	Pipe	USS-CDC HTQ®		--
Make-Up Loss	--	4.44	in.	--
Minimum Make-Up Torque	--	7,000	ft-lb	--
Maximum Make-Up Torque	--	10,000	ft-lb	--
Connection Yield Torque	--	12,400	ft-lb	--

UNCONTROLLED

Notes

- 1. Other than proprietary collapse and connection values, performance properties have been calculated using standard equations defined by API 5C3 and do not incorporate any additional design or safety factors. Calculations assume nominal pipe OD, nominal wall thickness and Specified Minimum Yield Strength (SMYS).
- 2. Uniaxial bending rating shown is structural only, and equal to compression efficiency.
- 3. Torques have been calculated assuming a thread compound friction factor of 1.0 and are recommended only. Field make-up torques may require adjustment based on actual field conditions (e.g. make-up speed, temperature, thread compound, etc.).
- 4. Reference length is calculated by joint strength divided by nominal threaded and coupled weight with 1.5 safety factor.
- 5. Connection external pressure leak resistance has been verified to 80% API pipe body collapse pressure following the guidelines of API 5C5 Cal II.

Legal Notice

USS - CDC HTQ® (High Torque Casing Drilling Connection) is a trademark of U. S. Steel Corporation. This product is a modified API Buttress threaded and coupled connection designed for drilling with casing applications. All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.

U. S. Steel Tubular Products
460 Wildwood Forest Drive, Suite 300S
Spring, Texas 77380

1-877-893-9461
connections@uss.com
www.usstubular.com



API LTC

Coupling	Pipe Body
Grade: L80 Type 1	Grade: L80 Type 1
Body: Red	1st Band: Red
1st Band: Brown	2nd Band: Brown
2nd Band: -	3rd Band: -
3rd Band: -	4th Band: -

Outside Diameter	9.625 in.	Wall Thickness	0.395 in.	Grade	L80 Type 1
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	Regular				

Pipe Body Data

Geometry				Performance	
Nominal OD	9.625 in.	Drift	8.679 in.	SMYS	80,000 psi
Wall Thickness	0.395 in.	Plain End Weight	38.97 lb/ft	Min UTS	95,000 psi
Nominal Weight	40 lb/ft	OD Tolerance	API	Body Yield Strength	916 x1000 lb
Nominal ID	8.835 in.			Min. Internal Yield Pressure	5750 psi
				Collapse Pressure	3090 psi
				Max. Allowed Bending	38 °/100 ft

Connection Data

Geometry		Performance		Make-Up Torques	
Thread per In	8	Joint Strength	727 x1000 lb	Minimum Torque	5450 ft-lb
Connection OD	10.625 in.	Coupling Face Load	630 x1000 lb	Optimum Torque	7270 ft-lb
Hand Tight Stand Off	3.500 in.	Internal Pressure Capacity	5750 psi	Maximum Torque	9090 ft-lb

Notes

For products according to API Standards 5CT & 5B; Performance calculated considering API Technical Report 5C3 (Sections 9 & 10) equations.
For geometrical and steel grades combinations not considered in the API Standards 5CT and/or 5B; Performance calculations indirectly derived from API Technical Report 5C3 (Sections 9 & 10) equations.
Couplings OD are shown according to current API 5CT 10th Edition.

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com . ©Tenaris 2024. All rights reserved.



API LTC

Coupling	Pipe Body
Grade: J55 (Casing)	Grade: J55 (Casing)
Body: Bright Green	1st Band: Bright Green
1st Band: White	2nd Band: -
2nd Band: -	3rd Band: -
3rd Band: -	4th Band: -

Outside Diameter	9.625 in.	Wall Thickness	0.395 in.	Grade	J55 (Casing)
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	Regular				

Pipe Body Data

Geometry				Performance	
Nominal OD	9.625 in.	Drift	8.679 in.	SMYS	55,000 psi
Wall Thickness	0.395 in.	Plain End Weight	38.97 lb/ft	Min UTS	75,000 psi
Nominal Weight	40 lb/ft	OD Tolerance	API	Body Yield Strength	630 x1000 lb
Nominal ID	8.835 in.			Min. Internal Yield Pressure	3950 psi
				Collapse Pressure	2570 psi
				Max. Allowed Bending	26 °/100 ft

Connection Data

Geometry		Performance		Make-Up Torques	
Thread per In	8	Joint Strength	520 x1000 lb	Minimum Torque	3900 ft-lb
Connection OD	10.625 in.	Coupling Face Load	433 x1000 lb	Optimum Torque	5200 ft-lb
Hand Tight Stand Off	3.500 in.	Internal Pressure Capacity	3950 psi	Maximum Torque	6500 ft-lb

Notes

For products according to API Standards 5CT & 5B; Performance calculated considering API Technical Report 5C3 (Sections 9 & 10) equations.
For geometrical and steel grades combinations not considered in the API Standards 5CT and/or 5B; Performance calculations indirectly derived from API Technical Report 5C3 (Sections 9 & 10) equations.
Couplings OD are shown according to current API 5CT 10th Edition.
Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any- provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com . ©Tenaris 2024. All rights reserved.

Hydrogen Sulfide Drilling Operations Plan
Mewbourne Oil Company

1. General Requirements

Rule 118 does not apply to this well because MOC has researched this area and no high concentrations of H₂S were found. MOC will have on location and working all H₂S safety equipment before the Delaware formation for purposes of safety and insurance requirements.

2. Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will have received training from a qualified instructor in the following areas prior to entering the drilling pad area of the well:

1. The hazards and characteristics of hydrogen sulfide gas.
2. The proper use of personal protective equipment and life support systems.
3. The proper use of hydrogen sulfide detectors, alarms, warning systems, briefing areas, evacuation procedures.
4. The proper techniques for first aid and rescue operations.

Additionally, supervisory personnel will be trained in the following areas:

- 1 The effects of hydrogen sulfide on metal components. If high tensile tubular systems are utilized, supervisory personnel will be trained in their special maintenance requirements.
- 2 Corrective action and shut in procedures, blowout prevention, and well control procedures while drilling a well.
- 3 The contents of the Hydrogen Sulfide Drilling Operations Plan.

There will be an initial training session prior to encountering a known hydrogen sulfide source. The initial training session shall include a review of the site specific Hydrogen Sulfide Drilling Operations Plan.

3. Hydrogen Sulfide Safety Equipment and Systems

All hydrogen sulfide safety equipment and systems will be installed, tested, and operational prior to drilling below the 9 5/8" intermediate casing.

1. Well Control Equipment
 - A. Choke manifold with minimum of one adjustable choke/remote choke.
 - B. Blowout preventers equipped with blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
 - C. Auxiliary equipment including annular type blowout preventer.
2. Protective Equipment for Essential Personnel

Thirty minute self contained work unit located in the dog house and at briefing areas.

Additionally: If H₂S is encountered in concentrations less than 10 ppm, fans will be placed in work areas to prevent the accumulation of hazardous amounts of poisonous gas. If higher concentrations of H₂S are detected the well will be shut in and a rotating head, mud/gas separator, remote choke and flare line with igniter will be installed.

3. Hydrogen Sulfide Protection and Monitoring Equipment
Two portable hydrogen sulfide monitors positioned on location for optimum coverage and detection. The units shall have audible sirens to notify personnel when hydrogen sulfide levels exceed 20 PPM.
4. Visual Warning Systems
 - A. Wind direction indicators as indicated on the wellsite diagram.
 - B. Caution signs shall be posted on roads providing access to location. Signs shall be painted a high visibility color with lettering of sufficient size to be readable at reasonable distances from potentially contaminated areas.

4. **Mud Program**

The mud program has been designed to minimize the amount of hydrogen sulfide entrained in the mud system. Proper mud weight, safe drilling practices, and the use of hydrogen sulfide scavengers will minimize hazards while drilling the well.

5. **Metallurgy**

All tubular systems, wellheads, blowout preventers, drilling spools, kill lines, choke manifolds, and valves shall be suitable for service in a hydrogen sulfide environment when chemically treated.

6. **Communications**

State & County Officials phone numbers are posted on rig floor and supervisors trailer. Communications in company vehicles and toolpushers are either two way radios or cellular phones.

7. **Well Testing**

Drill stem testing is not an anticipated requirement for evaluation of this well. If a drill stem test is required, it will be conducted with a minimum number of personnel in the immediate vicinity. The test will be conducted during daylight hours only.

8. **Emergency Phone Numbers**

Eddy County Sheriff's Office	911 or 575-887-7551
Ambulance Service	911 or 575-885-2111
Carlsbad Fire Dept	911 or 575-885-2111
Loco Hills Volunteer Fire Dept.	911 or 575-677-3266
Closest Medical Facility - Columbia Medical Center of Carlsbad	575-492-5000

Mewbourne Oil Company	Hobbs District Office	575-393-5905
	Fax	575-397-6252
	2nd Fax	575-393-7259

District Manager	Robin Terrell	575-390-4816
Drilling Superintendent	Frosty Lathan	575-390-4103
	Bradley Bishop	575-390-6838
Drilling Foreman	Wesley Noseff	575-441-0729

Mewbourne Oil Company

Lea County, New Mexico NAD 83

Red Hills West Unit #041H

Sec 15, T26S, R32E

SHL: 150' FSL & 770' FWL (Sec 10)

BHL: 100' FNL & 2160' FWL (Sec 3)

Plan: Design #1

Standard Planning Report

27 January, 2025

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Red Hills West Unit #041H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3244.0usft (Original Well Elev)
Project:	Lea County, New Mexico NAD 83	MD Reference:	WELL @ 3244.0usft (Original Well Elev)
Site:	Red Hills West Unit #041H	North Reference:	Grid
Well:	Sec 15, T26S, R32E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 100' FNL & 2160' FWL (Sec 3)		
Design:	Design #1		

Project	Lea County, New Mexico NAD 83		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Red Hills West Unit #041H				
Site Position:		Northing:	382,812.80 usft	Latitude:	32.0506908
From:	Map	Easting:	747,205.20 usft	Longitude:	-103.6688591
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "		

Well	Sec 15, T26S, R32E					
Well Position	+N/-S	0.0 usft	Northing:	382,812.80 usft	Latitude:	32.0506908
	+E/-W	0.0 usft	Easting:	747,205.20 usft	Longitude:	-103.6688591
Position Uncertainty		0.0 usft	Wellhead Elevation:	3,244.0 usft	Ground Level:	3,216.0 usft
Grid Convergence:		0.35 °				

Wellbore	BHL: 100' FNL & 2160' FWL (Sec 3)				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	12/31/2014	7.18	59.92	48,148.98443967

Design	Design #1				
Audit Notes:					
Version:		Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:		Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
		0.0	0.0	0.0	6.98

Plan Survey Tool Program	Date	1/27/2025			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.0	20,753.0	Design #1 (BHL: 100' FNL & 2160		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
710.0	0.00	0.00	710.0	0.0	0.0	0.00	0.00	0.00	0.00	

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Red Hills West Unit #041H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3244.0usft (Original Well Elev)
Project:	Lea County, New Mexico NAD 83	MD Reference:	WELL @ 3244.0usft (Original Well Elev)
Site:	Red Hills West Unit #041H	North Reference:	Grid
Well:	Sec 15, T26S, R32E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 100' FNL & 2160' FWL (Sec 3)		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
SHL: 150' FSL & 770' FWL (Sec 10)									
50.0	0.00	0.00	50.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
150.0	0.00	0.00	150.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
250.0	0.00	0.00	250.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
350.0	0.00	0.00	350.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
450.0	0.00	0.00	450.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
550.0	0.00	0.00	550.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
650.0	0.00	0.00	650.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
710.0	0.00	0.00	710.0	0.0	0.0	0.0	0.00	0.00	0.00
750.0	0.80	95.27	750.0	0.0	0.3	0.0	2.00	2.00	0.00
800.0	1.80	95.27	800.0	-0.1	1.4	0.0	2.00	2.00	0.00
850.0	2.80	95.27	849.9	-0.3	3.4	0.1	2.00	2.00	0.00
900.0	3.80	95.27	899.9	-0.6	6.3	0.2	2.00	2.00	0.00
950.0	4.80	95.27	949.7	-0.9	10.0	0.3	2.00	2.00	0.00
1,000.0	5.80	95.27	999.5	-1.3	14.6	0.4	2.00	2.00	0.00
1,050.0	6.80	95.27	1,049.2	-1.9	20.1	0.6	2.00	2.00	0.00
1,100.0	7.80	95.27	1,098.8	-2.4	26.4	0.8	2.00	2.00	0.00
1,150.0	8.80	95.27	1,148.3	-3.1	33.6	1.0	2.00	2.00	0.00
1,173.7	9.27	95.27	1,171.7	-3.4	37.3	1.1	2.00	2.00	0.00
1,200.0	9.27	95.27	1,197.6	-3.8	41.5	1.2	0.00	0.00	0.00
1,250.0	9.27	95.27	1,247.0	-4.6	49.5	1.5	0.00	0.00	0.00
1,300.0	9.27	95.27	1,296.3	-5.3	57.6	1.7	0.00	0.00	0.00
1,350.0	9.27	95.27	1,345.7	-6.1	65.6	2.0	0.00	0.00	0.00
1,400.0	9.27	95.27	1,395.0	-6.8	73.6	2.2	0.00	0.00	0.00
1,450.0	9.27	95.27	1,444.4	-7.5	81.6	2.4	0.00	0.00	0.00
1,500.0	9.27	95.27	1,493.7	-8.3	89.7	2.7	0.00	0.00	0.00
1,550.0	9.27	95.27	1,543.1	-9.0	97.7	2.9	0.00	0.00	0.00
1,600.0	9.27	95.27	1,592.4	-9.8	105.7	3.2	0.00	0.00	0.00
1,650.0	9.27	95.27	1,641.8	-10.5	113.7	3.4	0.00	0.00	0.00
1,700.0	9.27	95.27	1,691.1	-11.2	121.7	3.7	0.00	0.00	0.00
1,750.0	9.27	95.27	1,740.4	-12.0	129.8	3.9	0.00	0.00	0.00
1,800.0	9.27	95.27	1,789.8	-12.7	137.8	4.1	0.00	0.00	0.00
1,850.0	9.27	95.27	1,839.1	-13.5	145.8	4.4	0.00	0.00	0.00
1,900.0	9.27	95.27	1,888.5	-14.2	153.8	4.6	0.00	0.00	0.00
1,950.0	9.27	95.27	1,937.8	-14.9	161.9	4.9	0.00	0.00	0.00
2,000.0	9.27	95.27	1,987.2	-15.7	169.9	5.1	0.00	0.00	0.00
2,050.0	9.27	95.27	2,036.5	-16.4	177.9	5.3	0.00	0.00	0.00
2,100.0	9.27	95.27	2,085.9	-17.2	185.9	5.6	0.00	0.00	0.00
2,150.0	9.27	95.27	2,135.2	-17.9	194.0	5.8	0.00	0.00	0.00
2,200.0	9.27	95.27	2,184.6	-18.6	202.0	6.1	0.00	0.00	0.00
2,250.0	9.27	95.27	2,233.9	-19.4	210.0	6.3	0.00	0.00	0.00
2,300.0	9.27	95.27	2,283.3	-20.1	218.0	6.5	0.00	0.00	0.00
2,350.0	9.27	95.27	2,332.6	-20.9	226.1	6.8	0.00	0.00	0.00
2,400.0	9.27	95.27	2,381.9	-21.6	234.1	7.0	0.00	0.00	0.00
2,450.0	9.27	95.27	2,431.3	-22.3	242.1	7.3	0.00	0.00	0.00
2,500.0	9.27	95.27	2,480.6	-23.1	250.1	7.5	0.00	0.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Red Hills West Unit #041H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3244.0usft (Original Well Elev)
Project:	Lea County, New Mexico NAD 83	MD Reference:	WELL @ 3244.0usft (Original Well Elev)
Site:	Red Hills West Unit #041H	North Reference:	Grid
Well:	Sec 15, T26S, R32E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 100' FNL & 2160' FWL (Sec 3)		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
2,550.0	9.27	95.27	2,530.0	-23.8	258.2	7.7	0.00	0.00	0.00	
2,600.0	9.27	95.27	2,579.3	-24.6	266.2	8.0	0.00	0.00	0.00	
2,650.0	9.27	95.27	2,628.7	-25.3	274.2	8.2	0.00	0.00	0.00	
2,700.0	9.27	95.27	2,678.0	-26.0	282.2	8.5	0.00	0.00	0.00	
2,750.0	9.27	95.27	2,727.4	-26.8	290.3	8.7	0.00	0.00	0.00	
2,800.0	9.27	95.27	2,776.7	-27.5	298.3	8.9	0.00	0.00	0.00	
2,850.0	9.27	95.27	2,826.1	-28.3	306.3	9.2	0.00	0.00	0.00	
2,900.0	9.27	95.27	2,875.4	-29.0	314.3	9.4	0.00	0.00	0.00	
2,950.0	9.27	95.27	2,924.8	-29.7	322.3	9.7	0.00	0.00	0.00	
3,000.0	9.27	95.27	2,974.1	-30.5	330.4	9.9	0.00	0.00	0.00	
3,050.0	9.27	95.27	3,023.5	-31.2	338.4	10.1	0.00	0.00	0.00	
3,100.0	9.27	95.27	3,072.8	-32.0	346.4	10.4	0.00	0.00	0.00	
3,150.0	9.27	95.27	3,122.1	-32.7	354.4	10.6	0.00	0.00	0.00	
3,200.0	9.27	95.27	3,171.5	-33.5	362.5	10.9	0.00	0.00	0.00	
3,250.0	9.27	95.27	3,220.8	-34.2	370.5	11.1	0.00	0.00	0.00	
3,300.0	9.27	95.27	3,270.2	-34.9	378.5	11.4	0.00	0.00	0.00	
3,350.0	9.27	95.27	3,319.5	-35.7	386.5	11.6	0.00	0.00	0.00	
3,400.0	9.27	95.27	3,368.9	-36.4	394.6	11.8	0.00	0.00	0.00	
3,450.0	9.27	95.27	3,418.2	-37.2	402.6	12.1	0.00	0.00	0.00	
3,500.0	9.27	95.27	3,467.6	-37.9	410.6	12.3	0.00	0.00	0.00	
3,550.0	9.27	95.27	3,516.9	-38.6	418.6	12.6	0.00	0.00	0.00	
3,600.0	9.27	95.27	3,566.3	-39.4	426.7	12.8	0.00	0.00	0.00	
3,650.0	9.27	95.27	3,615.6	-40.1	434.7	13.0	0.00	0.00	0.00	
3,700.0	9.27	95.27	3,665.0	-40.9	442.7	13.3	0.00	0.00	0.00	
3,750.0	9.27	95.27	3,714.3	-41.6	450.7	13.5	0.00	0.00	0.00	
3,800.0	9.27	95.27	3,763.6	-42.3	458.8	13.8	0.00	0.00	0.00	
3,850.0	9.27	95.27	3,813.0	-43.1	466.8	14.0	0.00	0.00	0.00	
3,900.0	9.27	95.27	3,862.3	-43.8	474.8	14.2	0.00	0.00	0.00	
3,950.0	9.27	95.27	3,911.7	-44.6	482.8	14.5	0.00	0.00	0.00	
4,000.0	9.27	95.27	3,961.0	-45.3	490.9	14.7	0.00	0.00	0.00	
4,050.0	9.27	95.27	4,010.4	-46.0	498.9	15.0	0.00	0.00	0.00	
4,100.0	9.27	95.27	4,059.7	-46.8	506.9	15.2	0.00	0.00	0.00	
4,150.0	9.27	95.27	4,109.1	-47.5	514.9	15.4	0.00	0.00	0.00	
4,200.0	9.27	95.27	4,158.4	-48.3	522.9	15.7	0.00	0.00	0.00	
4,250.0	9.27	95.27	4,207.8	-49.0	531.0	15.9	0.00	0.00	0.00	
4,300.0	9.27	95.27	4,257.1	-49.7	539.0	16.2	0.00	0.00	0.00	
4,350.0	9.27	95.27	4,306.5	-50.5	547.0	16.4	0.00	0.00	0.00	
4,400.0	9.27	95.27	4,355.8	-51.2	555.0	16.6	0.00	0.00	0.00	
4,450.0	9.27	95.27	4,405.1	-52.0	563.1	16.9	0.00	0.00	0.00	
4,500.0	9.27	95.27	4,454.5	-52.7	571.1	17.1	0.00	0.00	0.00	
4,550.0	9.27	95.27	4,503.8	-53.4	579.1	17.4	0.00	0.00	0.00	
4,600.0	9.27	95.27	4,553.2	-54.2	587.1	17.6	0.00	0.00	0.00	
4,650.0	9.27	95.27	4,602.5	-54.9	595.2	17.8	0.00	0.00	0.00	
4,700.0	9.27	95.27	4,651.9	-55.7	603.2	18.1	0.00	0.00	0.00	
4,750.0	9.27	95.27	4,701.2	-56.4	611.2	18.3	0.00	0.00	0.00	
4,800.0	9.27	95.27	4,750.6	-57.1	619.2	18.6	0.00	0.00	0.00	
4,850.0	9.27	95.27	4,799.9	-57.9	627.3	18.8	0.00	0.00	0.00	
4,900.0	9.27	95.27	4,849.3	-58.6	635.3	19.1	0.00	0.00	0.00	
4,950.0	9.27	95.27	4,898.6	-59.4	643.3	19.3	0.00	0.00	0.00	
5,000.0	9.27	95.27	4,948.0	-60.1	651.3	19.5	0.00	0.00	0.00	
5,050.0	9.27	95.27	4,997.3	-60.9	659.4	19.8	0.00	0.00	0.00	
5,100.0	9.27	95.27	5,046.7	-61.6	667.4	20.0	0.00	0.00	0.00	
5,150.0	9.27	95.27	5,096.0	-62.3	675.4	20.3	0.00	0.00	0.00	
5,200.0	9.27	95.27	5,145.3	-63.1	683.4	20.5	0.00	0.00	0.00	

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Red Hills West Unit #041H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3244.0usft (Original Well Elev)
Project:	Lea County, New Mexico NAD 83	MD Reference:	WELL @ 3244.0usft (Original Well Elev)
Site:	Red Hills West Unit #041H	North Reference:	Grid
Well:	Sec 15, T26S, R32E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 100' FNL & 2160' FWL (Sec 3)		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
5,250.0	9.27	95.27	5,194.7	-63.8	691.5	20.7	0.00	0.00	0.00	
5,300.0	9.27	95.27	5,244.0	-64.6	699.5	21.0	0.00	0.00	0.00	
5,350.0	9.27	95.27	5,293.4	-65.3	707.5	21.2	0.00	0.00	0.00	
5,400.0	9.27	95.27	5,342.7	-66.0	715.5	21.5	0.00	0.00	0.00	
5,450.0	9.27	95.27	5,392.1	-66.8	723.5	21.7	0.00	0.00	0.00	
5,500.0	9.27	95.27	5,441.4	-67.5	731.6	21.9	0.00	0.00	0.00	
5,550.0	9.27	95.27	5,490.8	-68.3	739.6	22.2	0.00	0.00	0.00	
5,600.0	9.27	95.27	5,540.1	-69.0	747.6	22.4	0.00	0.00	0.00	
5,650.0	9.27	95.27	5,589.5	-69.7	755.6	22.7	0.00	0.00	0.00	
5,700.0	9.27	95.27	5,638.8	-70.5	763.7	22.9	0.00	0.00	0.00	
5,750.0	9.27	95.27	5,688.2	-71.2	771.7	23.1	0.00	0.00	0.00	
5,800.0	9.27	95.27	5,737.5	-72.0	779.7	23.4	0.00	0.00	0.00	
5,850.0	9.27	95.27	5,786.8	-72.7	787.7	23.6	0.00	0.00	0.00	
5,900.0	9.27	95.27	5,836.2	-73.4	795.8	23.9	0.00	0.00	0.00	
5,950.0	9.27	95.27	5,885.5	-74.2	803.8	24.1	0.00	0.00	0.00	
6,000.0	9.27	95.27	5,934.9	-74.9	811.8	24.3	0.00	0.00	0.00	
6,050.0	9.27	95.27	5,984.2	-75.7	819.8	24.6	0.00	0.00	0.00	
6,100.0	9.27	95.27	6,033.6	-76.4	827.9	24.8	0.00	0.00	0.00	
6,150.0	9.27	95.27	6,082.9	-77.1	835.9	25.1	0.00	0.00	0.00	
6,200.0	9.27	95.27	6,132.3	-77.9	843.9	25.3	0.00	0.00	0.00	
6,250.0	9.27	95.27	6,181.6	-78.6	851.9	25.5	0.00	0.00	0.00	
6,300.0	9.27	95.27	6,231.0	-79.4	860.0	25.8	0.00	0.00	0.00	
6,350.0	9.27	95.27	6,280.3	-80.1	868.0	26.0	0.00	0.00	0.00	
6,400.0	9.27	95.27	6,329.7	-80.8	876.0	26.3	0.00	0.00	0.00	
6,450.0	9.27	95.27	6,379.0	-81.6	884.0	26.5	0.00	0.00	0.00	
6,500.0	9.27	95.27	6,428.4	-82.3	892.1	26.8	0.00	0.00	0.00	
6,550.0	9.27	95.27	6,477.7	-83.1	900.1	27.0	0.00	0.00	0.00	
6,600.0	9.27	95.27	6,527.0	-83.8	908.1	27.2	0.00	0.00	0.00	
6,650.0	9.27	95.27	6,576.4	-84.5	916.1	27.5	0.00	0.00	0.00	
6,700.0	9.27	95.27	6,625.7	-85.3	924.2	27.7	0.00	0.00	0.00	
6,750.0	9.27	95.27	6,675.1	-86.0	932.2	28.0	0.00	0.00	0.00	
6,800.0	9.27	95.27	6,724.4	-86.8	940.2	28.2	0.00	0.00	0.00	
6,850.0	9.27	95.27	6,773.8	-87.5	948.2	28.4	0.00	0.00	0.00	
6,900.0	9.27	95.27	6,823.1	-88.2	956.2	28.7	0.00	0.00	0.00	
6,950.0	9.27	95.27	6,872.5	-89.0	964.3	28.9	0.00	0.00	0.00	
7,000.0	9.27	95.27	6,921.8	-89.7	972.3	29.2	0.00	0.00	0.00	
7,050.0	9.27	95.27	6,971.2	-90.5	980.3	29.4	0.00	0.00	0.00	
7,100.0	9.27	95.27	7,020.5	-91.2	988.3	29.6	0.00	0.00	0.00	
7,150.0	9.27	95.27	7,069.9	-92.0	996.4	29.9	0.00	0.00	0.00	
7,200.0	9.27	95.27	7,119.2	-92.7	1,004.4	30.1	0.00	0.00	0.00	
7,250.0	9.27	95.27	7,168.5	-93.4	1,012.4	30.4	0.00	0.00	0.00	
7,300.0	9.27	95.27	7,217.9	-94.2	1,020.4	30.6	0.00	0.00	0.00	
7,350.0	9.27	95.27	7,267.2	-94.9	1,028.5	30.8	0.00	0.00	0.00	
7,400.0	9.27	95.27	7,316.6	-95.7	1,036.5	31.1	0.00	0.00	0.00	
7,450.0	9.27	95.27	7,365.9	-96.4	1,044.5	31.3	0.00	0.00	0.00	
7,500.0	9.27	95.27	7,415.3	-97.1	1,052.5	31.6	0.00	0.00	0.00	
7,550.0	9.27	95.27	7,464.6	-97.9	1,060.6	31.8	0.00	0.00	0.00	
7,600.0	9.27	95.27	7,514.0	-98.6	1,068.6	32.0	0.00	0.00	0.00	
7,650.0	9.27	95.27	7,563.3	-99.4	1,076.6	32.3	0.00	0.00	0.00	
7,700.0	9.27	95.27	7,612.7	-100.1	1,084.6	32.5	0.00	0.00	0.00	
7,750.0	9.27	95.27	7,662.0	-100.8	1,092.7	32.8	0.00	0.00	0.00	
7,800.0	9.27	95.27	7,711.4	-101.6	1,100.7	33.0	0.00	0.00	0.00	
7,850.0	9.27	95.27	7,760.7	-102.3	1,108.7	33.2	0.00	0.00	0.00	
7,900.0	9.27	95.27	7,810.1	-103.1	1,116.7	33.5	0.00	0.00	0.00	

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Red Hills West Unit #041H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3244.0usft (Original Well Elev)
Project:	Lea County, New Mexico NAD 83	MD Reference:	WELL @ 3244.0usft (Original Well Elev)
Site:	Red Hills West Unit #041H	North Reference:	Grid
Well:	Sec 15, T26S, R32E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 100' FNL & 2160' FWL (Sec 3)		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
7,950.0	9.27	95.27	7,859.4	-103.8	1,124.8	33.7	0.00	0.00	0.00
8,000.0	9.27	95.27	7,908.7	-104.5	1,132.8	34.0	0.00	0.00	0.00
8,050.0	9.27	95.27	7,958.1	-105.3	1,140.8	34.2	0.00	0.00	0.00
8,100.0	9.27	95.27	8,007.4	-106.0	1,148.8	34.5	0.00	0.00	0.00
8,150.0	9.27	95.27	8,056.8	-106.8	1,156.8	34.7	0.00	0.00	0.00
8,200.0	9.27	95.27	8,106.1	-107.5	1,164.9	34.9	0.00	0.00	0.00
8,250.0	9.27	95.27	8,155.5	-108.2	1,172.9	35.2	0.00	0.00	0.00
8,300.0	9.27	95.27	8,204.8	-109.0	1,180.9	35.4	0.00	0.00	0.00
8,350.0	9.27	95.27	8,254.2	-109.7	1,188.9	35.7	0.00	0.00	0.00
8,400.0	9.27	95.27	8,303.5	-110.5	1,197.0	35.9	0.00	0.00	0.00
8,450.0	9.27	95.27	8,352.9	-111.2	1,205.0	36.1	0.00	0.00	0.00
8,500.0	9.27	95.27	8,402.2	-111.9	1,213.0	36.4	0.00	0.00	0.00
8,550.0	9.27	95.27	8,451.6	-112.7	1,221.0	36.6	0.00	0.00	0.00
8,600.0	9.27	95.27	8,500.9	-113.4	1,229.1	36.9	0.00	0.00	0.00
8,650.0	9.27	95.27	8,550.2	-114.2	1,237.1	37.1	0.00	0.00	0.00
8,700.0	9.27	95.27	8,599.6	-114.9	1,245.1	37.3	0.00	0.00	0.00
8,750.0	9.27	95.27	8,648.9	-115.6	1,253.1	37.6	0.00	0.00	0.00
8,800.0	9.27	95.27	8,698.3	-116.4	1,261.2	37.8	0.00	0.00	0.00
8,850.0	9.27	95.27	8,747.6	-117.1	1,269.2	38.1	0.00	0.00	0.00
8,900.0	9.27	95.27	8,797.0	-117.9	1,277.2	38.3	0.00	0.00	0.00
8,950.0	9.27	95.27	8,846.3	-118.6	1,285.2	38.5	0.00	0.00	0.00
9,000.0	9.27	95.27	8,895.7	-119.4	1,293.3	38.8	0.00	0.00	0.00
9,050.0	9.27	95.27	8,945.0	-120.1	1,301.3	39.0	0.00	0.00	0.00
9,100.0	9.27	95.27	8,994.4	-120.8	1,309.3	39.3	0.00	0.00	0.00
9,150.0	9.27	95.27	9,043.7	-121.6	1,317.3	39.5	0.00	0.00	0.00
9,200.0	9.27	95.27	9,093.1	-122.3	1,325.4	39.7	0.00	0.00	0.00
9,250.0	9.27	95.27	9,142.4	-123.1	1,333.4	40.0	0.00	0.00	0.00
9,300.0	9.27	95.27	9,191.8	-123.8	1,341.4	40.2	0.00	0.00	0.00
9,350.0	9.27	95.27	9,241.1	-124.5	1,349.4	40.5	0.00	0.00	0.00
9,378.6	9.27	95.27	9,269.3	-125.0	1,354.0	40.6	0.00	0.00	0.00
9,400.0	8.85	95.27	9,290.5	-125.3	1,357.4	40.7	2.00	-2.00	0.00
9,450.0	7.85	95.27	9,339.9	-125.9	1,364.6	40.9	2.00	-2.00	0.00
9,500.0	6.85	95.27	9,389.5	-126.5	1,371.0	41.1	2.00	-2.00	0.00
9,550.0	5.85	95.27	9,439.2	-127.0	1,376.5	41.3	2.00	-2.00	0.00
9,600.0	4.85	95.27	9,489.0	-127.5	1,381.1	41.4	2.00	-2.00	0.00
9,650.0	3.85	95.27	9,538.8	-127.8	1,384.9	41.5	2.00	-2.00	0.00
9,700.0	2.85	95.27	9,588.8	-128.1	1,387.8	41.6	2.00	-2.00	0.00
9,750.0	1.85	95.27	9,638.7	-128.3	1,389.8	41.7	2.00	-2.00	0.00
9,800.0	0.85	95.27	9,688.7	-128.4	1,391.0	41.7	2.00	-2.00	0.00
9,842.3	0.00	0.00	9,731.0	-128.4	1,391.3	41.7	2.00	-2.00	0.00
KOP: 10' FSL & 2160' FWL (Sec 10)									
9,850.0	0.77	359.40	9,738.7	-128.3	1,391.3	41.8	10.00	10.00	0.00
9,900.0	5.77	359.40	9,788.6	-125.5	1,391.3	44.6	10.00	10.00	0.00
9,950.0	10.77	359.40	9,838.1	-118.3	1,391.2	51.7	10.00	10.00	0.00
10,000.0	15.77	359.40	9,886.7	-106.8	1,391.1	63.1	10.00	10.00	0.00
10,050.0	20.77	359.40	9,934.2	-91.2	1,390.9	78.6	10.00	10.00	0.00
10,100.0	25.77	359.40	9,980.1	-71.4	1,390.7	98.2	10.00	10.00	0.00
10,150.0	30.77	359.40	10,024.1	-47.8	1,390.5	121.7	10.00	10.00	0.00
10,167.6	32.53	359.40	10,039.1	-38.5	1,390.4	130.8	10.00	10.00	0.00
FTP: 100' FSL & 2160' FWL (Sec 10)									
10,200.0	35.77	359.40	10,065.9	-20.3	1,390.2	148.8	10.00	10.00	0.00
10,250.0	40.77	359.40	10,105.2	10.6	1,389.8	179.5	10.00	10.00	0.00
10,300.0	45.77	359.40	10,141.6	44.9	1,389.5	213.5	10.00	10.00	0.00
10,350.0	50.77	359.40	10,174.8	82.2	1,389.1	250.5	10.00	10.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Red Hills West Unit #041H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3244.0usft (Original Well Elev)
Project:	Lea County, New Mexico NAD 83	MD Reference:	WELL @ 3244.0usft (Original Well Elev)
Site:	Red Hills West Unit #041H	North Reference:	Grid
Well:	Sec 15, T26S, R32E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 100' FNL & 2160' FWL (Sec 3)		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
10,400.0	55.77	359.40	10,204.7	122.2	1,388.7	290.2	10.00	10.00	0.00	
10,450.0	60.77	359.40	10,231.0	164.7	1,388.2	332.3	10.00	10.00	0.00	
10,500.0	65.76	359.40	10,253.5	209.4	1,387.8	376.6	10.00	10.00	0.00	
10,550.0	70.76	359.40	10,272.0	255.8	1,387.3	422.6	10.00	10.00	0.00	
10,600.0	75.76	359.40	10,286.4	303.7	1,386.8	470.0	10.00	10.00	0.00	
10,650.0	80.76	359.40	10,296.6	352.6	1,386.3	518.5	10.00	10.00	0.00	
10,700.0	85.76	359.40	10,302.4	402.2	1,385.8	567.8	10.00	10.00	0.00	
10,742.3	89.99	359.40	10,304.0	444.5	1,385.3	609.6	10.00	10.00	0.00	
LP: 583' FSL & 2160' FWL (Sec 10)										
10,744.1	90.17	359.40	10,304.0	446.3	1,385.3	611.4	10.00	10.00	0.00	
10,750.0	90.17	359.40	10,304.0	452.2	1,385.2	617.3	0.00	0.00	0.00	
10,800.0	90.17	359.40	10,303.8	502.2	1,384.7	666.8	0.00	0.00	0.00	
10,850.0	90.17	359.40	10,303.7	552.2	1,384.2	716.4	0.00	0.00	0.00	
10,900.0	90.17	359.40	10,303.5	602.2	1,383.7	766.0	0.00	0.00	0.00	
10,950.0	90.17	359.40	10,303.4	652.2	1,383.1	815.5	0.00	0.00	0.00	
11,000.0	90.17	359.40	10,303.2	702.2	1,382.6	865.1	0.00	0.00	0.00	
11,050.0	90.17	359.40	10,303.1	752.2	1,382.1	914.7	0.00	0.00	0.00	
11,100.0	90.17	359.40	10,302.9	802.2	1,381.6	964.2	0.00	0.00	0.00	
11,150.0	90.17	359.40	10,302.8	852.2	1,381.1	1,013.8	0.00	0.00	0.00	
11,200.0	90.17	359.40	10,302.6	902.2	1,380.5	1,063.3	0.00	0.00	0.00	
11,250.0	90.17	359.40	10,302.5	952.2	1,380.0	1,112.9	0.00	0.00	0.00	
11,300.0	90.17	359.40	10,302.3	1,002.2	1,379.5	1,162.5	0.00	0.00	0.00	
11,350.0	90.17	359.40	10,302.2	1,052.2	1,379.0	1,212.0	0.00	0.00	0.00	
11,400.0	90.17	359.40	10,302.0	1,102.2	1,378.4	1,261.6	0.00	0.00	0.00	
11,450.0	90.17	359.40	10,301.9	1,152.2	1,377.9	1,311.2	0.00	0.00	0.00	
11,500.0	90.17	359.40	10,301.7	1,202.2	1,377.4	1,360.7	0.00	0.00	0.00	
11,550.0	90.17	359.40	10,301.6	1,252.2	1,376.9	1,410.3	0.00	0.00	0.00	
11,600.0	90.17	359.40	10,301.4	1,302.2	1,376.3	1,459.8	0.00	0.00	0.00	
11,650.0	90.17	359.40	10,301.3	1,352.1	1,375.8	1,509.4	0.00	0.00	0.00	
11,700.0	90.17	359.40	10,301.1	1,402.1	1,375.3	1,559.0	0.00	0.00	0.00	
11,750.0	90.17	359.40	10,301.0	1,452.1	1,374.8	1,608.5	0.00	0.00	0.00	
11,800.0	90.17	359.40	10,300.8	1,502.1	1,374.3	1,658.1	0.00	0.00	0.00	
11,850.0	90.17	359.40	10,300.7	1,552.1	1,373.7	1,707.7	0.00	0.00	0.00	
11,900.0	90.17	359.40	10,300.5	1,602.1	1,373.2	1,757.2	0.00	0.00	0.00	
11,950.0	90.17	359.40	10,300.4	1,652.1	1,372.7	1,806.8	0.00	0.00	0.00	
12,000.0	90.17	359.40	10,300.2	1,702.1	1,372.2	1,856.3	0.00	0.00	0.00	
12,050.0	90.17	359.40	10,300.1	1,752.1	1,371.6	1,905.9	0.00	0.00	0.00	
12,100.0	90.17	359.40	10,299.9	1,802.1	1,371.1	1,955.5	0.00	0.00	0.00	
12,150.0	90.17	359.40	10,299.8	1,852.1	1,370.6	2,005.0	0.00	0.00	0.00	
12,200.0	90.17	359.40	10,299.6	1,902.1	1,370.1	2,054.6	0.00	0.00	0.00	
12,250.0	90.17	359.40	10,299.5	1,952.1	1,369.6	2,104.2	0.00	0.00	0.00	
12,300.0	90.17	359.40	10,299.3	2,002.1	1,369.0	2,153.7	0.00	0.00	0.00	
12,350.0	90.17	359.40	10,299.2	2,052.1	1,368.5	2,203.3	0.00	0.00	0.00	
12,400.0	90.17	359.40	10,299.0	2,102.1	1,368.0	2,252.8	0.00	0.00	0.00	
12,450.0	90.17	359.40	10,298.9	2,152.1	1,367.5	2,302.4	0.00	0.00	0.00	
12,500.0	90.17	359.40	10,298.7	2,202.1	1,366.9	2,352.0	0.00	0.00	0.00	
12,550.0	90.17	359.40	10,298.6	2,252.1	1,366.4	2,401.5	0.00	0.00	0.00	
12,600.0	90.17	359.40	10,298.4	2,302.1	1,365.9	2,451.1	0.00	0.00	0.00	
12,650.0	90.17	359.40	10,298.3	2,352.1	1,365.4	2,500.7	0.00	0.00	0.00	
12,700.0	90.17	359.40	10,298.1	2,402.1	1,364.9	2,550.2	0.00	0.00	0.00	
12,750.0	90.17	359.40	10,298.0	2,452.1	1,364.3	2,599.8	0.00	0.00	0.00	
12,800.0	90.17	359.40	10,297.8	2,502.1	1,363.8	2,649.3	0.00	0.00	0.00	
12,850.0	90.17	359.40	10,297.7	2,552.1	1,363.3	2,698.9	0.00	0.00	0.00	

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Red Hills West Unit #041H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3244.0usft (Original Well Elev)
Project:	Lea County, New Mexico NAD 83	MD Reference:	WELL @ 3244.0usft (Original Well Elev)
Site:	Red Hills West Unit #041H	North Reference:	Grid
Well:	Sec 15, T26S, R32E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 100' FNL & 2160' FWL (Sec 3)		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
12,900.0	90.17	359.40	10,297.5	2,602.1	1,362.8	2,748.5	0.00	0.00	0.00	
12,950.0	90.17	359.40	10,297.4	2,652.1	1,362.2	2,798.0	0.00	0.00	0.00	
13,000.0	90.17	359.40	10,297.2	2,702.1	1,361.7	2,847.6	0.00	0.00	0.00	
13,050.0	90.17	359.40	10,297.1	2,752.1	1,361.2	2,897.2	0.00	0.00	0.00	
13,100.0	90.17	359.40	10,296.9	2,802.1	1,360.7	2,946.7	0.00	0.00	0.00	
13,150.0	90.17	359.40	10,296.8	2,852.1	1,360.2	2,996.3	0.00	0.00	0.00	
13,200.0	90.17	359.40	10,296.6	2,902.1	1,359.6	3,045.8	0.00	0.00	0.00	
13,250.0	90.17	359.40	10,296.5	2,952.1	1,359.1	3,095.4	0.00	0.00	0.00	
13,300.0	90.17	359.40	10,296.3	3,002.1	1,358.6	3,145.0	0.00	0.00	0.00	
13,350.0	90.17	359.40	10,296.2	3,052.0	1,358.1	3,194.5	0.00	0.00	0.00	
13,400.0	90.17	359.40	10,296.0	3,102.0	1,357.5	3,244.1	0.00	0.00	0.00	
13,450.0	90.17	359.40	10,295.9	3,152.0	1,357.0	3,293.7	0.00	0.00	0.00	
13,500.0	90.17	359.40	10,295.7	3,202.0	1,356.5	3,343.2	0.00	0.00	0.00	
13,550.0	90.17	359.40	10,295.6	3,252.0	1,356.0	3,392.8	0.00	0.00	0.00	
13,600.0	90.17	359.40	10,295.4	3,302.0	1,355.4	3,442.3	0.00	0.00	0.00	
13,650.0	90.17	359.40	10,295.3	3,352.0	1,354.9	3,491.9	0.00	0.00	0.00	
13,700.0	90.17	359.40	10,295.1	3,402.0	1,354.4	3,541.5	0.00	0.00	0.00	
13,750.0	90.17	359.40	10,295.0	3,452.0	1,353.9	3,591.0	0.00	0.00	0.00	
13,800.0	90.17	359.40	10,294.8	3,502.0	1,353.4	3,640.6	0.00	0.00	0.00	
13,850.0	90.17	359.40	10,294.7	3,552.0	1,352.8	3,690.2	0.00	0.00	0.00	
13,900.0	90.17	359.40	10,294.5	3,602.0	1,352.3	3,739.7	0.00	0.00	0.00	
13,950.0	90.17	359.40	10,294.4	3,652.0	1,351.8	3,789.3	0.00	0.00	0.00	
14,000.0	90.17	359.40	10,294.2	3,702.0	1,351.3	3,838.8	0.00	0.00	0.00	
14,050.0	90.17	359.40	10,294.1	3,752.0	1,350.7	3,888.4	0.00	0.00	0.00	
14,100.0	90.17	359.40	10,293.9	3,802.0	1,350.2	3,938.0	0.00	0.00	0.00	
14,150.0	90.17	359.40	10,293.8	3,852.0	1,349.7	3,987.5	0.00	0.00	0.00	
14,200.0	90.17	359.40	10,293.6	3,902.0	1,349.2	4,037.1	0.00	0.00	0.00	
14,250.0	90.17	359.40	10,293.5	3,952.0	1,348.7	4,086.7	0.00	0.00	0.00	
14,300.0	90.17	359.40	10,293.3	4,002.0	1,348.1	4,136.2	0.00	0.00	0.00	
14,350.0	90.17	359.40	10,293.2	4,052.0	1,347.6	4,185.8	0.00	0.00	0.00	
14,400.0	90.17	359.40	10,293.0	4,102.0	1,347.1	4,235.3	0.00	0.00	0.00	
14,450.0	90.17	359.40	10,292.9	4,152.0	1,346.6	4,284.9	0.00	0.00	0.00	
14,500.0	90.17	359.40	10,292.7	4,202.0	1,346.0	4,334.5	0.00	0.00	0.00	
14,550.0	90.17	359.40	10,292.6	4,252.0	1,345.5	4,384.0	0.00	0.00	0.00	
14,600.0	90.17	359.40	10,292.4	4,302.0	1,345.0	4,433.6	0.00	0.00	0.00	
14,650.0	90.17	359.40	10,292.3	4,352.0	1,344.5	4,483.2	0.00	0.00	0.00	
14,700.0	90.17	359.40	10,292.1	4,402.0	1,344.0	4,532.7	0.00	0.00	0.00	
14,750.0	90.17	359.40	10,292.0	4,452.0	1,343.4	4,582.3	0.00	0.00	0.00	
14,800.0	90.17	359.40	10,291.8	4,502.0	1,342.9	4,631.8	0.00	0.00	0.00	
14,850.0	90.17	359.40	10,291.7	4,552.0	1,342.4	4,681.4	0.00	0.00	0.00	
14,900.0	90.17	359.40	10,291.5	4,602.0	1,341.9	4,731.0	0.00	0.00	0.00	
14,950.0	90.17	359.40	10,291.4	4,652.0	1,341.3	4,780.5	0.00	0.00	0.00	
15,000.0	90.17	359.40	10,291.2	4,701.9	1,340.8	4,830.1	0.00	0.00	0.00	
15,050.0	90.17	359.40	10,291.1	4,751.9	1,340.3	4,879.7	0.00	0.00	0.00	
15,100.0	90.17	359.40	10,290.9	4,801.9	1,339.8	4,929.2	0.00	0.00	0.00	
15,150.0	90.17	359.40	10,290.8	4,851.9	1,339.3	4,978.8	0.00	0.00	0.00	
15,200.0	90.17	359.40	10,290.6	4,901.9	1,338.7	5,028.3	0.00	0.00	0.00	
15,250.0	90.17	359.40	10,290.5	4,951.9	1,338.2	5,077.9	0.00	0.00	0.00	
15,300.0	90.17	359.40	10,290.3	5,001.9	1,337.7	5,127.5	0.00	0.00	0.00	
15,350.0	90.17	359.40	10,290.2	5,051.9	1,337.2	5,177.0	0.00	0.00	0.00	
15,400.0	90.17	359.40	10,290.0	5,101.9	1,336.6	5,226.6	0.00	0.00	0.00	
15,450.0	90.17	359.40	10,289.9	5,151.9	1,336.1	5,276.2	0.00	0.00	0.00	
15,500.0	90.17	359.40	10,289.7	5,201.9	1,335.6	5,325.7	0.00	0.00	0.00	
15,507.6	90.17	359.40	10,289.7	5,209.5	1,335.5	5,333.2	0.00	0.00	0.00	

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Red Hills West Unit #041H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3244.0usft (Original Well Elev)
Project:	Lea County, New Mexico NAD 83	MD Reference:	WELL @ 3244.0usft (Original Well Elev)
Site:	Red Hills West Unit #041H	North Reference:	Grid
Well:	Sec 15, T26S, R32E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 100' FNL & 2160' FWL (Sec 3)		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
PPP2: 0' FSL & 2166' FWL (Sec 3)									
15,550.0	90.17	359.40	10,289.6	5,251.9	1,335.1	5,375.3	0.00	0.00	0.00
15,600.0	90.17	359.40	10,289.4	5,301.9	1,334.5	5,424.8	0.00	0.00	0.00
15,650.0	90.17	359.40	10,289.3	5,351.9	1,334.0	5,474.4	0.00	0.00	0.00
15,700.0	90.17	359.40	10,289.1	5,401.9	1,333.5	5,524.0	0.00	0.00	0.00
15,750.0	90.17	359.40	10,289.0	5,451.9	1,333.0	5,573.5	0.00	0.00	0.00
15,800.0	90.17	359.40	10,288.8	5,501.9	1,332.5	5,623.1	0.00	0.00	0.00
15,850.0	90.17	359.40	10,288.7	5,551.9	1,331.9	5,672.7	0.00	0.00	0.00
15,900.0	90.17	359.40	10,288.5	5,601.9	1,331.4	5,722.2	0.00	0.00	0.00
15,950.0	90.17	359.40	10,288.4	5,651.9	1,330.9	5,771.8	0.00	0.00	0.00
16,000.0	90.17	359.40	10,288.2	5,701.9	1,330.4	5,821.3	0.00	0.00	0.00
16,050.0	90.17	359.40	10,288.1	5,751.9	1,329.8	5,870.9	0.00	0.00	0.00
16,100.0	90.17	359.40	10,287.9	5,801.9	1,329.3	5,920.5	0.00	0.00	0.00
16,150.0	90.17	359.40	10,287.8	5,851.9	1,328.8	5,970.0	0.00	0.00	0.00
16,200.0	90.17	359.40	10,287.6	5,901.9	1,328.3	6,019.6	0.00	0.00	0.00
16,250.0	90.17	359.40	10,287.5	5,951.9	1,327.8	6,069.2	0.00	0.00	0.00
16,300.0	90.17	359.40	10,287.3	6,001.9	1,327.2	6,118.7	0.00	0.00	0.00
16,350.0	90.17	359.40	10,287.2	6,051.9	1,326.7	6,168.3	0.00	0.00	0.00
16,400.0	90.17	359.40	10,287.0	6,101.9	1,326.2	6,217.8	0.00	0.00	0.00
16,450.0	90.17	359.40	10,286.9	6,151.9	1,325.7	6,267.4	0.00	0.00	0.00
16,500.0	90.17	359.40	10,286.7	6,201.9	1,325.1	6,317.0	0.00	0.00	0.00
16,550.0	90.17	359.40	10,286.6	6,251.9	1,324.6	6,366.5	0.00	0.00	0.00
16,600.0	90.17	359.40	10,286.4	6,301.9	1,324.1	6,416.1	0.00	0.00	0.00
16,650.0	90.17	359.40	10,286.3	6,351.9	1,323.6	6,465.7	0.00	0.00	0.00
16,700.0	90.17	359.40	10,286.1	6,401.8	1,323.1	6,515.2	0.00	0.00	0.00
16,750.0	90.17	359.40	10,286.0	6,451.8	1,322.5	6,564.8	0.00	0.00	0.00
16,800.0	90.17	359.40	10,285.8	6,501.8	1,322.0	6,614.3	0.00	0.00	0.00
16,850.0	90.17	359.40	10,285.7	6,551.8	1,321.5	6,663.9	0.00	0.00	0.00
16,900.0	90.17	359.40	10,285.5	6,601.8	1,321.0	6,713.5	0.00	0.00	0.00
16,950.0	90.17	359.40	10,285.4	6,651.8	1,320.4	6,763.0	0.00	0.00	0.00
17,000.0	90.17	359.40	10,285.2	6,701.8	1,319.9	6,812.6	0.00	0.00	0.00
17,050.0	90.17	359.40	10,285.1	6,751.8	1,319.4	6,862.2	0.00	0.00	0.00
17,100.0	90.17	359.40	10,284.9	6,801.8	1,318.9	6,911.7	0.00	0.00	0.00
17,150.0	90.17	359.40	10,284.8	6,851.8	1,318.4	6,961.3	0.00	0.00	0.00
17,200.0	90.17	359.40	10,284.6	6,901.8	1,317.8	7,010.8	0.00	0.00	0.00
17,250.0	90.17	359.40	10,284.5	6,951.8	1,317.3	7,060.4	0.00	0.00	0.00
17,300.0	90.17	359.40	10,284.3	7,001.8	1,316.8	7,110.0	0.00	0.00	0.00
17,350.0	90.17	359.40	10,284.2	7,051.8	1,316.3	7,159.5	0.00	0.00	0.00
17,400.0	90.17	359.40	10,284.0	7,101.8	1,315.7	7,209.1	0.00	0.00	0.00
17,450.0	90.17	359.40	10,283.9	7,151.8	1,315.2	7,258.7	0.00	0.00	0.00
17,500.0	90.17	359.40	10,283.8	7,201.8	1,314.7	7,308.2	0.00	0.00	0.00
17,550.0	90.17	359.40	10,283.6	7,251.8	1,314.2	7,357.8	0.00	0.00	0.00
17,600.0	90.17	359.40	10,283.5	7,301.8	1,313.6	7,407.3	0.00	0.00	0.00
17,650.0	90.17	359.40	10,283.3	7,351.8	1,313.1	7,456.9	0.00	0.00	0.00
17,700.0	90.17	359.40	10,283.2	7,401.8	1,312.6	7,506.5	0.00	0.00	0.00
17,750.0	90.17	359.40	10,283.0	7,451.8	1,312.1	7,556.0	0.00	0.00	0.00
17,800.0	90.17	359.40	10,282.9	7,501.8	1,311.6	7,605.6	0.00	0.00	0.00
17,850.0	90.17	359.40	10,282.7	7,551.8	1,311.0	7,655.2	0.00	0.00	0.00
17,900.0	90.17	359.40	10,282.6	7,601.8	1,310.5	7,704.7	0.00	0.00	0.00
17,950.0	90.17	359.40	10,282.4	7,651.8	1,310.0	7,754.3	0.00	0.00	0.00
18,000.0	90.17	359.40	10,282.3	7,701.8	1,309.5	7,803.8	0.00	0.00	0.00
18,050.0	90.17	359.40	10,282.1	7,751.8	1,308.9	7,853.4	0.00	0.00	0.00
18,100.0	90.17	359.40	10,282.0	7,801.8	1,308.4	7,903.0	0.00	0.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Red Hills West Unit #041H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3244.0usft (Original Well Elev)
Project:	Lea County, New Mexico NAD 83	MD Reference:	WELL @ 3244.0usft (Original Well Elev)
Site:	Red Hills West Unit #041H	North Reference:	Grid
Well:	Sec 15, T26S, R32E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 100' FNL & 2160' FWL (Sec 3)		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
18,150.0	90.17	359.40	10,281.8	7,851.8	1,307.9	7,952.5	0.00	0.00	0.00	
18,200.0	90.17	359.40	10,281.7	7,901.8	1,307.4	8,002.1	0.00	0.00	0.00	
18,250.0	90.17	359.40	10,281.5	7,951.8	1,306.9	8,051.7	0.00	0.00	0.00	
18,300.0	90.17	359.40	10,281.4	8,001.8	1,306.3	8,101.2	0.00	0.00	0.00	
18,350.0	90.17	359.40	10,281.2	8,051.8	1,305.8	8,150.8	0.00	0.00	0.00	
18,400.0	90.17	359.40	10,281.1	8,101.7	1,305.3	8,200.3	0.00	0.00	0.00	
18,450.0	90.17	359.40	10,280.9	8,151.7	1,304.8	8,249.9	0.00	0.00	0.00	
18,500.0	90.17	359.40	10,280.8	8,201.7	1,304.2	8,299.5	0.00	0.00	0.00	
18,550.0	90.17	359.40	10,280.6	8,251.7	1,303.7	8,349.0	0.00	0.00	0.00	
18,600.0	90.17	359.40	10,280.5	8,301.7	1,303.2	8,398.6	0.00	0.00	0.00	
18,650.0	90.17	359.40	10,280.3	8,351.7	1,302.7	8,448.2	0.00	0.00	0.00	
18,700.0	90.17	359.40	10,280.2	8,401.7	1,302.2	8,497.7	0.00	0.00	0.00	
18,750.0	90.17	359.40	10,280.0	8,451.7	1,301.6	8,547.3	0.00	0.00	0.00	
18,800.0	90.17	359.40	10,279.9	8,501.7	1,301.1	8,596.8	0.00	0.00	0.00	
18,850.0	90.17	359.40	10,279.7	8,551.7	1,300.6	8,646.4	0.00	0.00	0.00	
18,900.0	90.17	359.40	10,279.6	8,601.7	1,300.1	8,696.0	0.00	0.00	0.00	
18,950.0	90.17	359.40	10,279.4	8,651.7	1,299.5	8,745.5	0.00	0.00	0.00	
19,000.0	90.17	359.40	10,279.3	8,701.7	1,299.0	8,795.1	0.00	0.00	0.00	
19,050.0	90.17	359.40	10,279.1	8,751.7	1,298.5	8,844.7	0.00	0.00	0.00	
19,100.0	90.17	359.40	10,279.0	8,801.7	1,298.0	8,894.2	0.00	0.00	0.00	
19,150.0	90.17	359.40	10,278.8	8,851.7	1,297.5	8,943.8	0.00	0.00	0.00	
19,200.0	90.17	359.40	10,278.7	8,901.7	1,296.9	8,993.3	0.00	0.00	0.00	
19,250.0	90.17	359.40	10,278.5	8,951.7	1,296.4	9,042.9	0.00	0.00	0.00	
19,300.0	90.17	359.40	10,278.4	9,001.7	1,295.9	9,092.5	0.00	0.00	0.00	
19,350.0	90.17	359.40	10,278.2	9,051.7	1,295.4	9,142.0	0.00	0.00	0.00	
19,400.0	90.17	359.40	10,278.1	9,101.7	1,294.8	9,191.6	0.00	0.00	0.00	
19,450.0	90.17	359.40	10,277.9	9,151.7	1,294.3	9,241.2	0.00	0.00	0.00	
19,500.0	90.17	359.40	10,277.8	9,201.7	1,293.8	9,290.7	0.00	0.00	0.00	
19,550.0	90.17	359.40	10,277.6	9,251.7	1,293.3	9,340.3	0.00	0.00	0.00	
19,600.0	90.17	359.40	10,277.5	9,301.7	1,292.7	9,389.8	0.00	0.00	0.00	
19,650.0	90.17	359.40	10,277.3	9,351.7	1,292.2	9,439.4	0.00	0.00	0.00	
19,700.0	90.17	359.40	10,277.2	9,401.7	1,291.7	9,489.0	0.00	0.00	0.00	
19,750.0	90.17	359.40	10,277.0	9,451.7	1,291.2	9,538.5	0.00	0.00	0.00	
19,800.0	90.17	359.40	10,276.9	9,501.7	1,290.7	9,588.1	0.00	0.00	0.00	
19,850.0	90.17	359.40	10,276.7	9,551.7	1,290.1	9,637.7	0.00	0.00	0.00	
19,900.0	90.17	359.40	10,276.6	9,601.7	1,289.6	9,687.2	0.00	0.00	0.00	
19,950.0	90.17	359.40	10,276.4	9,651.7	1,289.1	9,736.8	0.00	0.00	0.00	
20,000.0	90.17	359.40	10,276.3	9,701.7	1,288.6	9,786.3	0.00	0.00	0.00	
20,050.0	90.17	359.40	10,276.1	9,751.7	1,288.0	9,835.9	0.00	0.00	0.00	
20,100.0	90.17	359.40	10,276.0	9,801.6	1,287.5	9,885.5	0.00	0.00	0.00	
20,150.0	90.17	359.40	10,275.8	9,851.6	1,287.0	9,935.0	0.00	0.00	0.00	
20,200.0	90.17	359.40	10,275.7	9,901.6	1,286.5	9,984.6	0.00	0.00	0.00	
20,250.0	90.17	359.40	10,275.5	9,951.6	1,286.0	10,034.2	0.00	0.00	0.00	
20,300.0	90.17	359.40	10,275.4	10,001.6	1,285.4	10,083.7	0.00	0.00	0.00	
20,350.0	90.17	359.40	10,275.2	10,051.6	1,284.9	10,133.3	0.00	0.00	0.00	
20,400.0	90.17	359.40	10,275.1	10,101.6	1,284.4	10,182.8	0.00	0.00	0.00	
20,450.0	90.17	359.40	10,274.9	10,151.6	1,283.9	10,232.4	0.00	0.00	0.00	
20,500.0	90.17	359.40	10,274.8	10,201.6	1,283.3	10,282.0	0.00	0.00	0.00	
20,550.0	90.17	359.40	10,274.6	10,251.6	1,282.8	10,331.5	0.00	0.00	0.00	
20,600.0	90.17	359.40	10,274.5	10,301.6	1,282.3	10,381.1	0.00	0.00	0.00	
20,650.0	90.17	359.40	10,274.3	10,351.6	1,281.8	10,430.7	0.00	0.00	0.00	
20,700.0	90.17	359.40	10,274.2	10,401.6	1,281.3	10,480.2	0.00	0.00	0.00	
20,750.0	90.17	359.40	10,274.0	10,451.6	1,280.7	10,529.8	0.00	0.00	0.00	
20,753.0	90.17	359.40	10,274.0	10,454.6	1,280.7	10,532.8	0.00	0.00	0.00	



Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Red Hills West Unit #041H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3244.0usft (Original Well Elev)
Project:	Lea County, New Mexico NAD 83	MD Reference:	WELL @ 3244.0usft (Original Well Elev)
Site:	Red Hills West Unit #041H	North Reference:	Grid
Well:	Sec 15, T26S, R32E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 100' FNL & 2160' FWL (Sec 3)		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
BHL: 100' FNL & 2160' FWL (Sec 3)									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
SHL: 150' FSL & 770' FV - plan hits target center - Point	0.00	0.00	0.0	0.0	0.0	382,812.80	747,205.20	32.0506908	-103.6688591
KOP: 10' FSL & 2160' FV - plan hits target center - Point	0.00	0.00	9,731.0	-128.4	1,391.3	382,684.40	748,596.50	32.0503143	-103.6643713
FTP: 100' FSL & 2160' F - plan hits target center - Point	0.00	0.00	10,039.1	-38.5	1,390.4	382,774.30	748,595.60	32.0505614	-103.6643724
BHL: 100' FNL & 2160' F - plan hits target center - Point	0.00	0.00	10,274.0	10,454.6	1,280.7	393,267.40	748,485.90	32.0794066	-103.6645166
PPP2: 0' FSL & 2166' FV - plan hits target center - Point	0.00	0.00	10,289.7	5,209.5	1,335.5	388,022.30	748,540.71	32.0649880	-103.6644446
LP: 583' FSL & 2160' FV - plan misses target center by 0.3usft at 10742.3usft MD (10304.0 TVD, 444.5 N, 1385.3 E) - Point	0.00	0.00	10,304.0	444.5	1,385.0	383,257.30	748,590.20	32.0518891	-103.6643802

Red Hills West Unit#041H

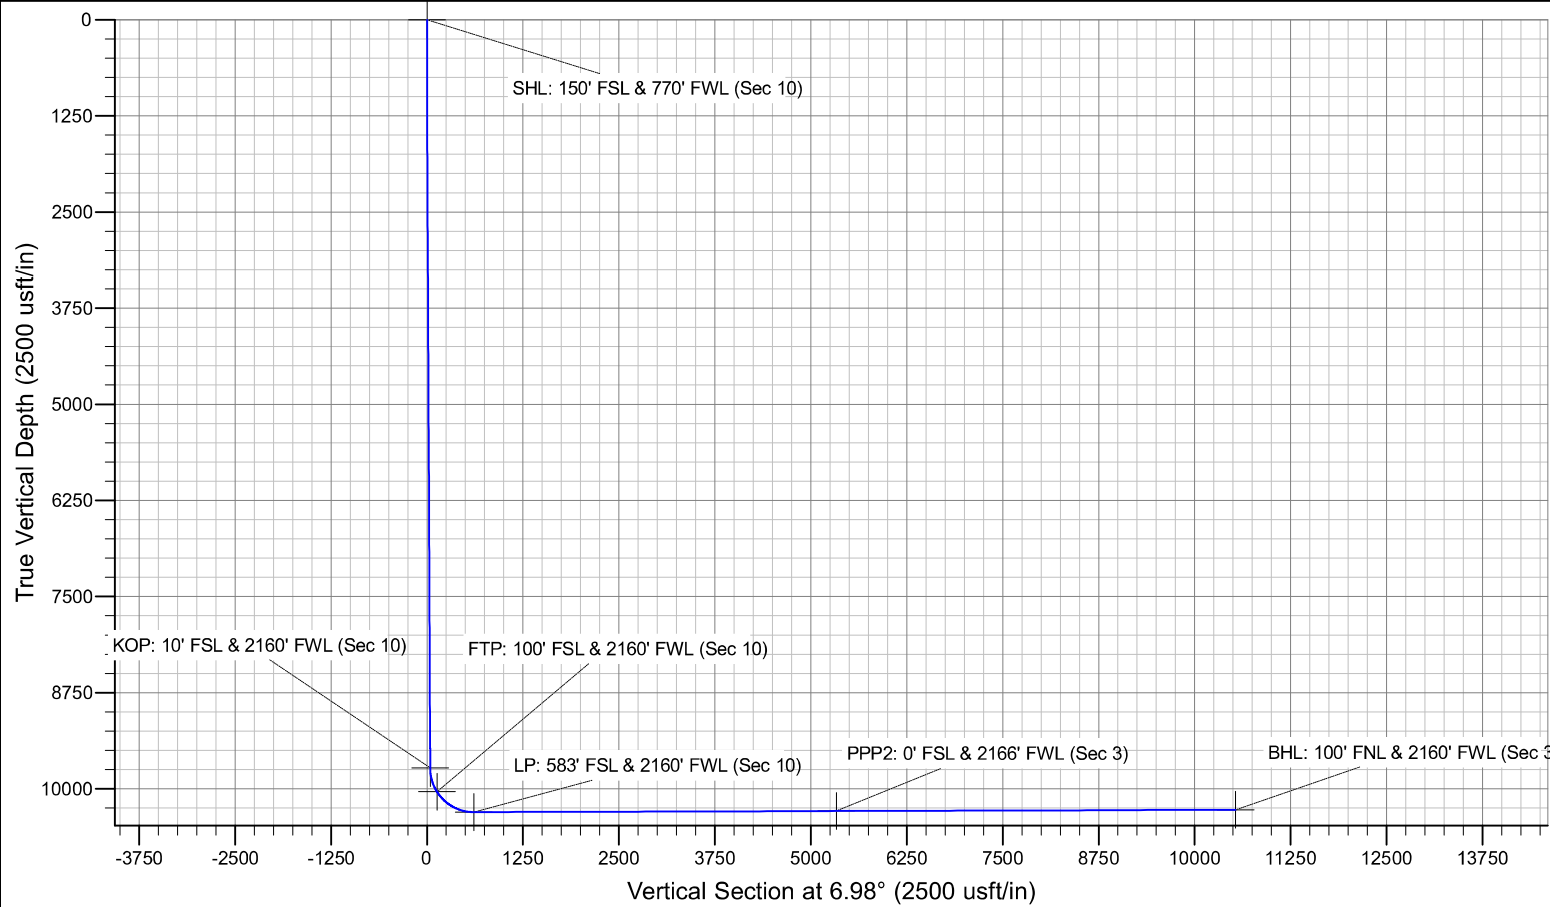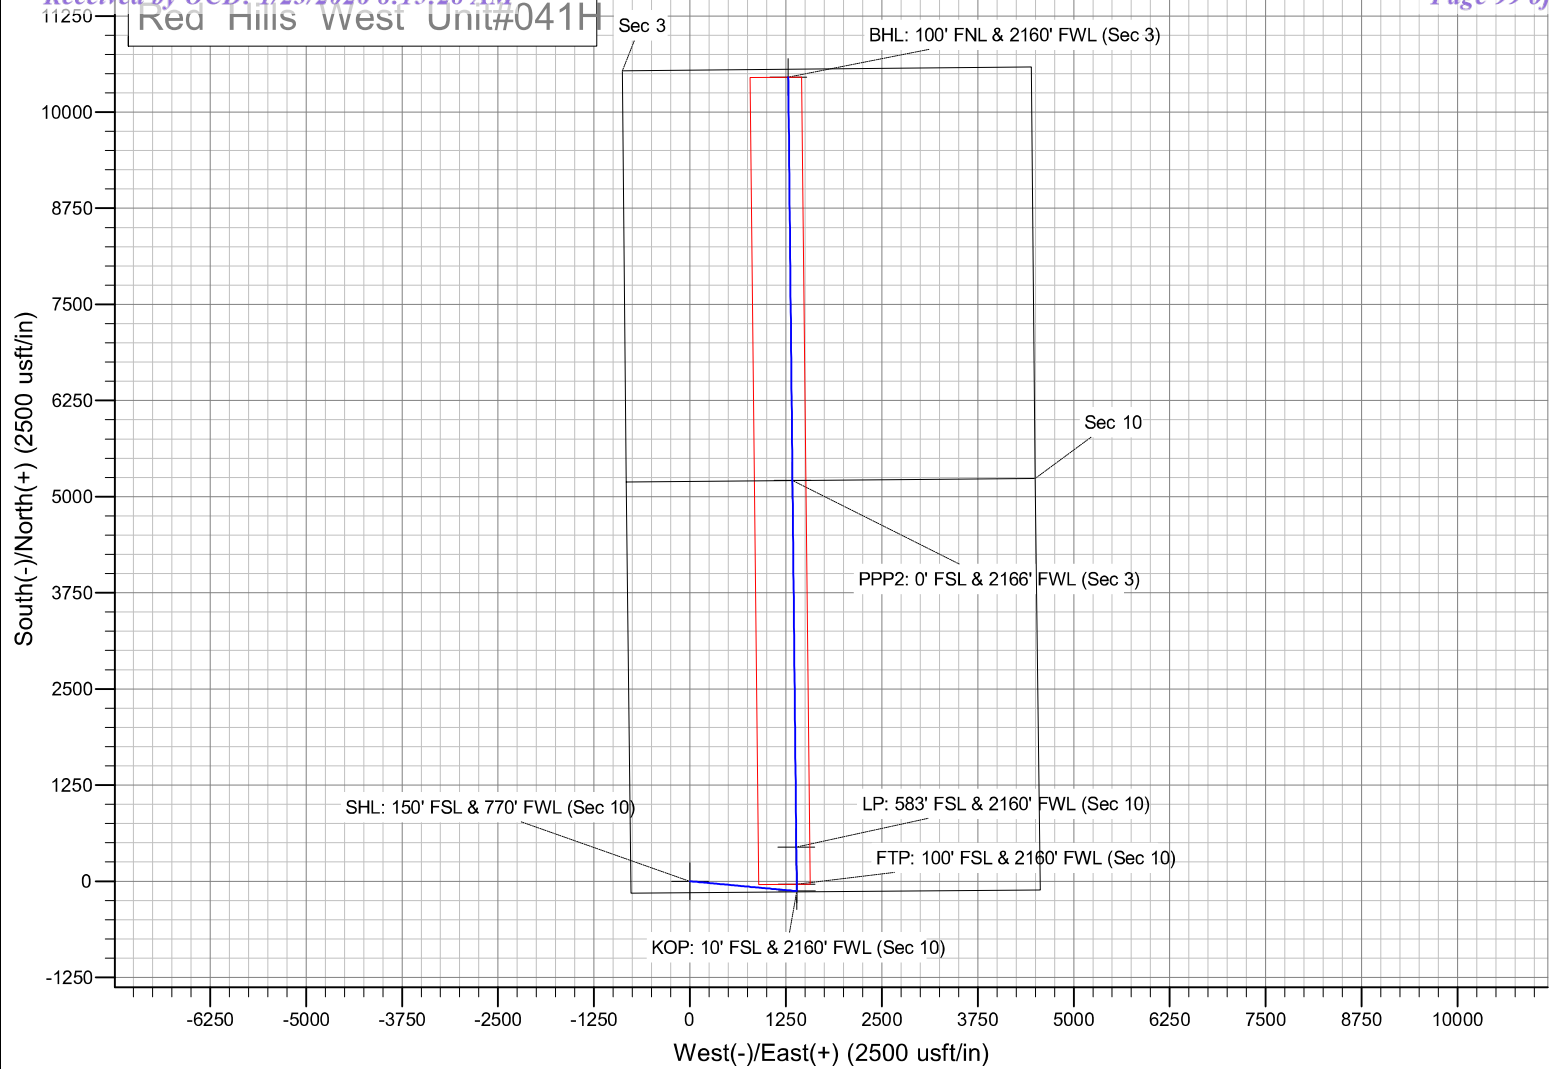



Mewbourne Oil Co.

BOP Break Testing Variance

Mewbourne Oil Company requests a variance from the minimum standards for well control equipment testing of 43 CFR 3172 to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with batch drilling & offline cementing operations. Modern rig upgrades which facilitate pad drilling allow the BOP stack to be moved between wells on a multi-well pad without breaking any BOP stack components apart. Widespread use of these technologies has led to break testing BOPE being endorsed as safe and reliable. American Petroleum Institute (API) best practices are frequently used by regulators to develop their regulations. API Standard 53, *Well Control Equipment Systems for Drilling Wells* (5th Ed., Dec. 2018) Section 5.3.7.1 states "A pressure test of the pressure containing component shall be performed following the disconnection or repair, limited to the affected component."

Procedures

1. Full BOPE test at first installation on the pad.
 - Full BOPE test at least every 21 days.
 - Function test BOP elements per 43 CFR 3172.
 - Contact the BLM if a well control event occurs.
2. After the well section is secured and the well is confirmed to be static, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad. Two breaks on the BOPE will be made (Fig. 1).
 - Connection between the flex line and the HCR valve
 - Connection between the wellhead and the BOP quick connect (Fig. 5 & 6).
3. A capping flange will be installed after cementing per wellhead vendor procedure & casing pressure will be monitored via wellhead valve.
4. The BOP will be removed and carried by a hydraulic carrier (Fig. 3 & 4).
5. The rig will then walk to the next well.
6. Confirm that the well is static and remove the capping flange.
7. The connection between the flex line and HCR valve and the connection between the wellhead and the BOP quick connect will be reconnected.
8. Install a test plug into the wellhead.
9. A test will then be conducted against the upper pipe rams and choke, testing both breaks (Fig. 1 & 2).
10. The test will be held at 250 psi low and to the high value submitted in the APD, not to exceed 5000 psi.
11. The annular, blind rams and lower pipe rams will then be function tested.
12. If a pad consists of three or more wells, steps 4 through 11 will be repeated.



13. A break test will only be conducted if the intermediate section can be drilled and cased within 21 days of the last full BOPE test.

Barriers

Before Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff

After Nipple Down:

- Floats in casing
- Kill weight fluid in casing
- Kill weight fluid in annulus
- Solid body mandrel and/or packoff
- Offline cementing tool and/or cement head
- Capping flange after cementing

Summary

A variance is requested to only test broken pressure seals on the BOPE when moving between wells on a multi-well pad if the following conditions are met:

- A full BOPE test is conducted on the first well on the pad. API Standard 53 requires testing annular BOP to 70% of RWP or 100% of MASP, whichever is greater.
- If the first well on the pad is not the well with the deepest intermediate section, a full BOPE test will also be performed when moving to a deeper well.
- The hole section being drilled has a MASP under 5000 psi.
- If a well control event occurs, Mewbourne will contact BLM for permission to continue break testing.
- If significant (>50%) losses occur, full BOPE testing will be required going forward.
- Full BOPE test will be required prior to drilling the production hole.

While walking the rig, the BOP stack will be secured via hydraulic winch or hydraulic carrier. A full BOPE test will be performed at least every 21 days.

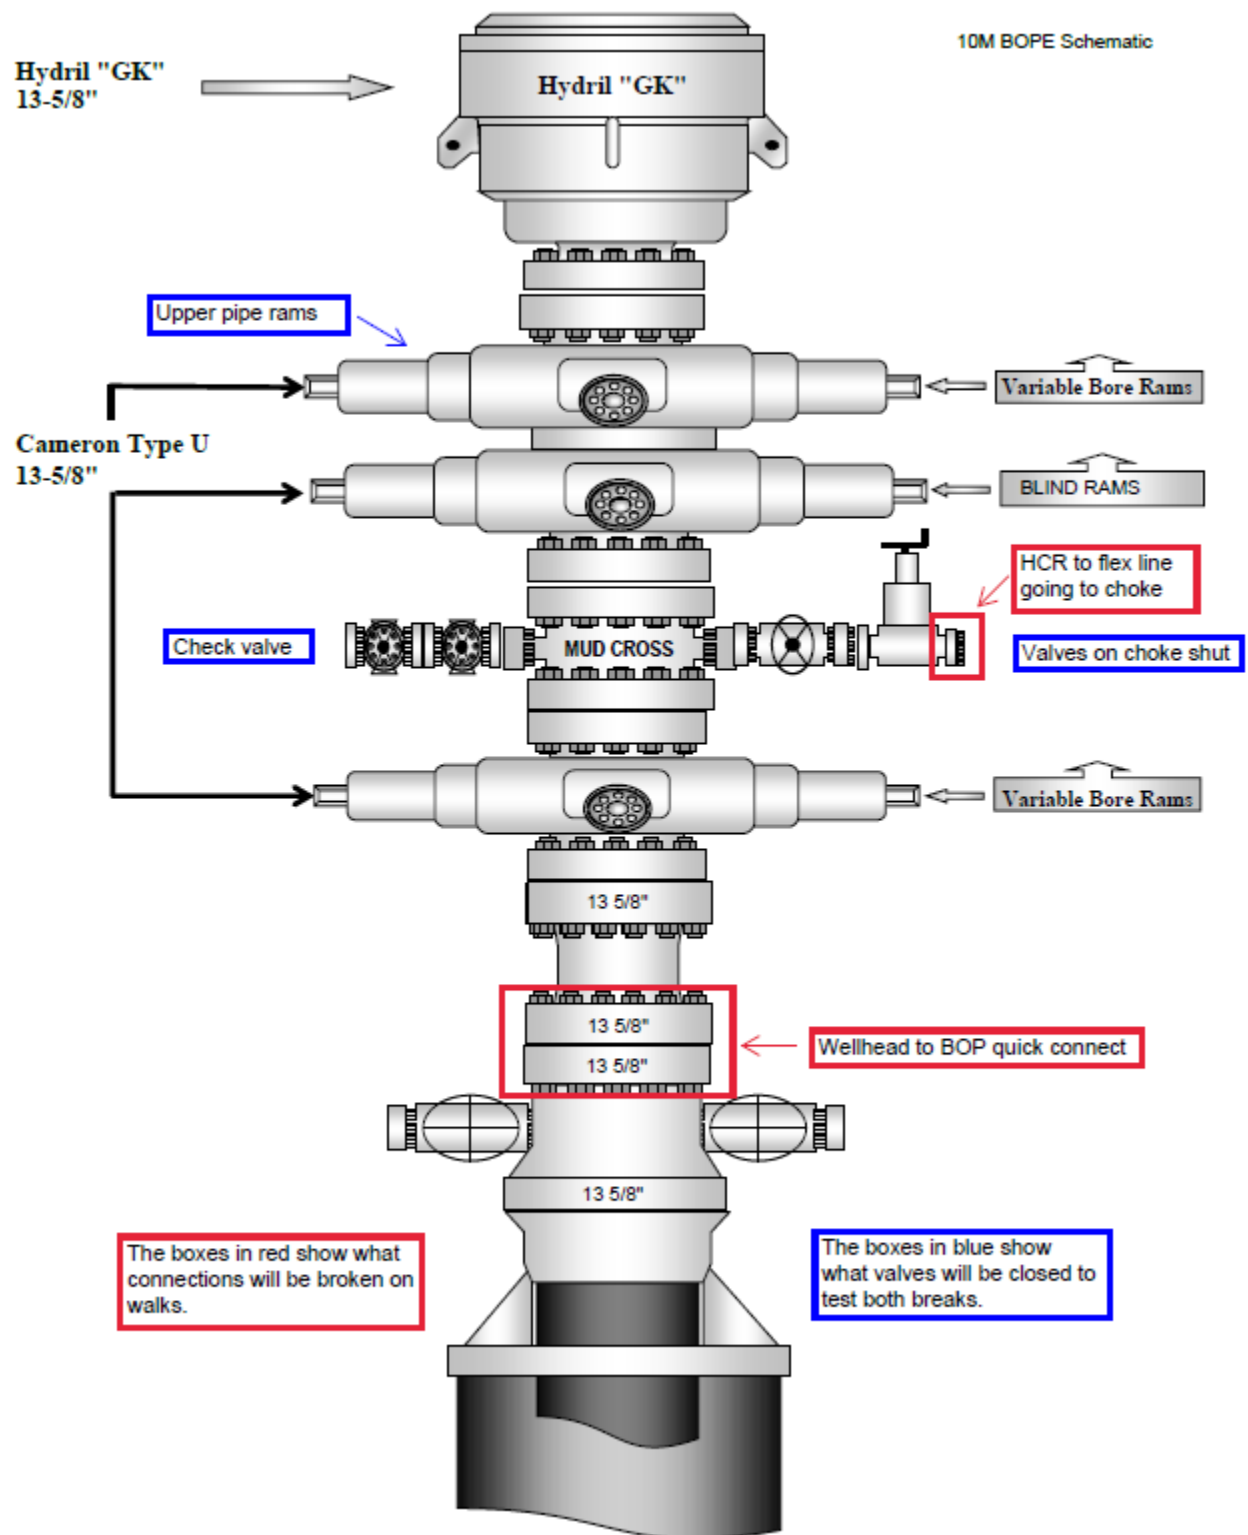


Figure 1. BOP diagram



5M BOPE & Closed Loop Equipment Schematic

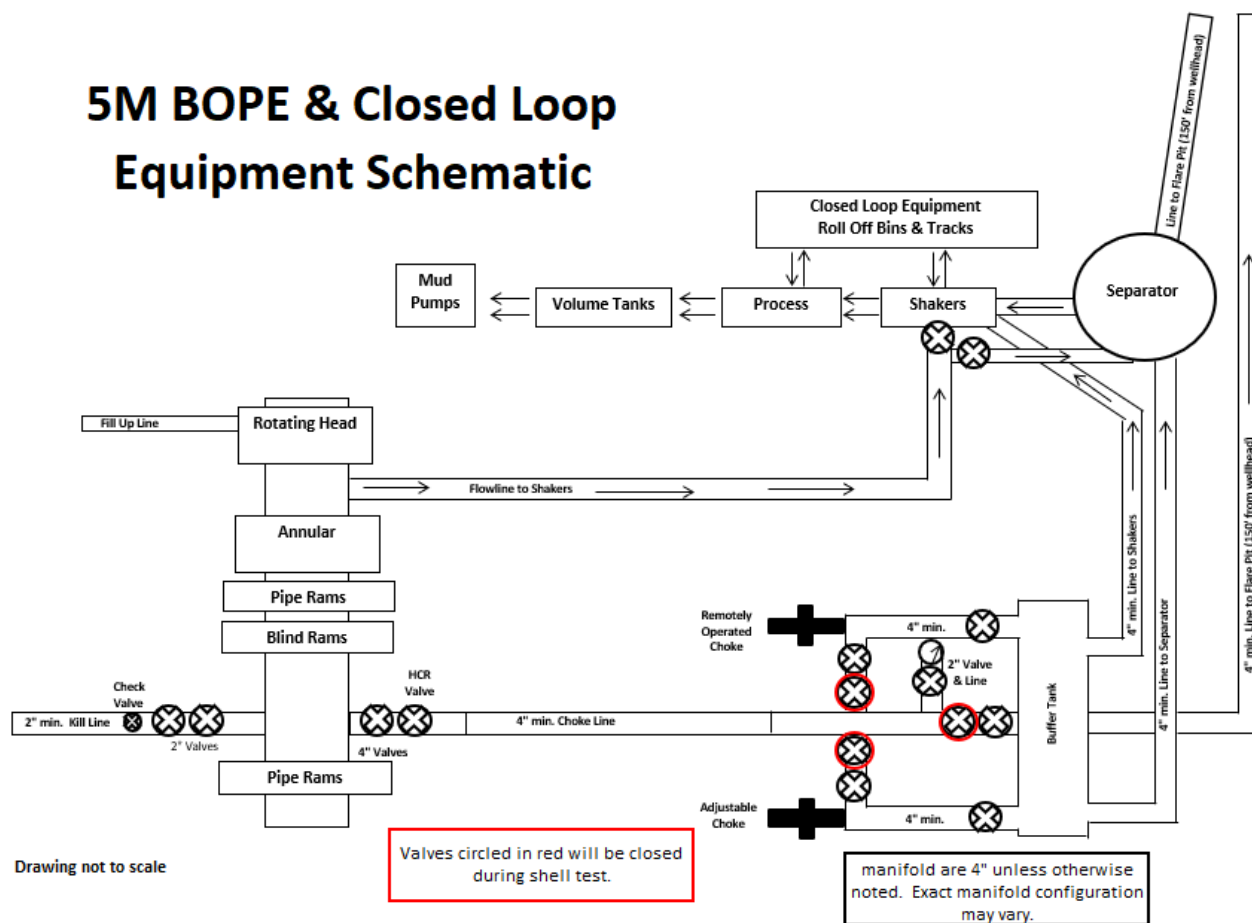


Figure 2. BOPE diagram



Figure 3. BOP handling system



Figure 4. BOP handling system

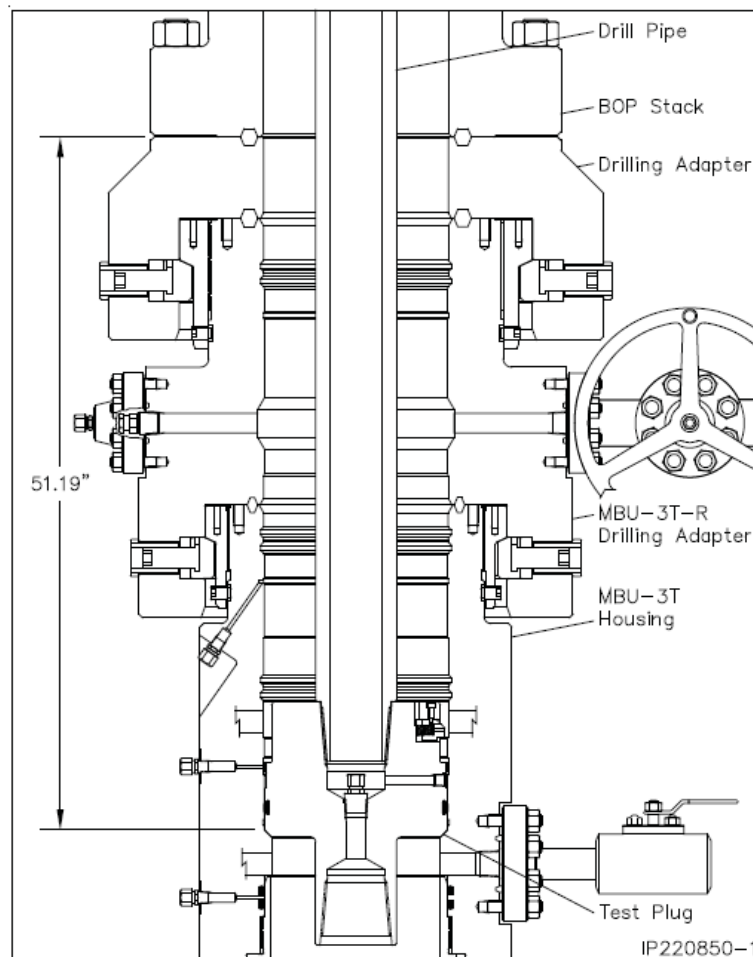


Figure 5. Cactus 5M wellhead with BOP quick connect

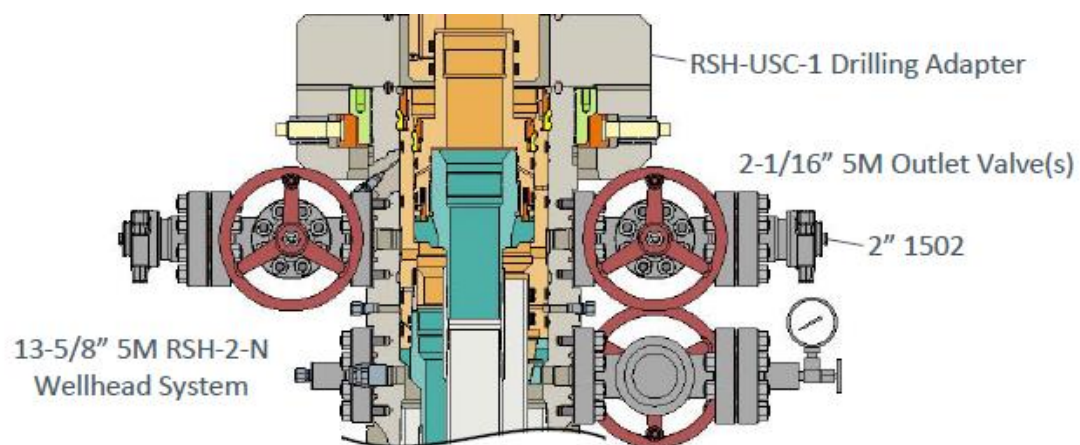


Figure 6. Vault 5M wellhead with BOP quick connect

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Mewbourne Oil Co. **OGRID:** 14744 **Date:** 3/14/25

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
RED HILLS WEST UNIT 41H		M 10 26S 32E	150' FSL x 770' FWL	1500	3000	3000
				Y1-300 Y2-200 Y3-100	Y1-1000- Y2-600 Y3-300	Y1-600 Y2-400 Y3-200

IV. Central Delivery Point Name: RED HILLS WEST UNIT 41H [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
RED HILLS WEST UNIT 41H		4/14/25	5/14/25	6/14/25	6/29/25	7/4/25

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

Page 8

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	<i>Bradley Bishop</i>
Printed Name:	BRADLEY BISHOP
Title:	REGULATORY MANAGER
E-mail Address:	BBISHOP@MEWBOURNE.COM
Date:	3/14/25
Phone:	575-393-5905
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)	
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	


Mewbourne Oil Company

Natural Gas Management Plan – Attachment

- VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Mewbourne Oil Company (MOC) will take following actions to comply with the regulations listed in 19.15.27.8 :
- A. MOC will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. MOC will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas. If there is no adequate takeaway for the gas, well(s) will be shut in until the natural gas gathering system is available.
 - B. All drilling operations will be equipped with a rig flare located at least 100 ft from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
 - C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flow will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, MOC will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner. MOC will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
 - D. Natural gas will not be flared with the exceptions and provisions listed in the 19.15.27.8 D.(1) through (4). If there is no adequate takeaway for the separator gas, well(s) will be shut in until the natural gas gathering system is available with exception of emergency or malfunction situations. Venting and/or flaring volumes will be estimated and reported appropriately.
 - E. MOC will comply with the performance standards requirements and provisions listed in 19.15.27.8 E.(1) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs in order to minimize the waste. Production storage tanks constructed after May 25, 2021 will be equipped with automatic gauging system. Flares constructed after May 25, 2021 will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. MOC will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
 - F. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared or beneficially used during production operations, will be measured or estimated. MOC will install equipment to measure

the volume of natural gas flared from existing process piping or a flowline piped from equipment such as high pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by an APD issued after May 25, 2021 that has an average daily production greater than 60 Mcf/day. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, MOC will estimate the volume of vented or flared natural gas. Measuring equipment will conform to industry standards and will not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.

- VIII. For maintenance activities involving production equipment and compression, venting will be limited to the depressurization of the subject equipment to ensure safe working conditions. For maintenance of production and compression equipment the associated producing wells will be shut in to eliminate venting. For maintenance of VRUs all gas normally routed to the VRU will be routed to flare to eliminate venting.

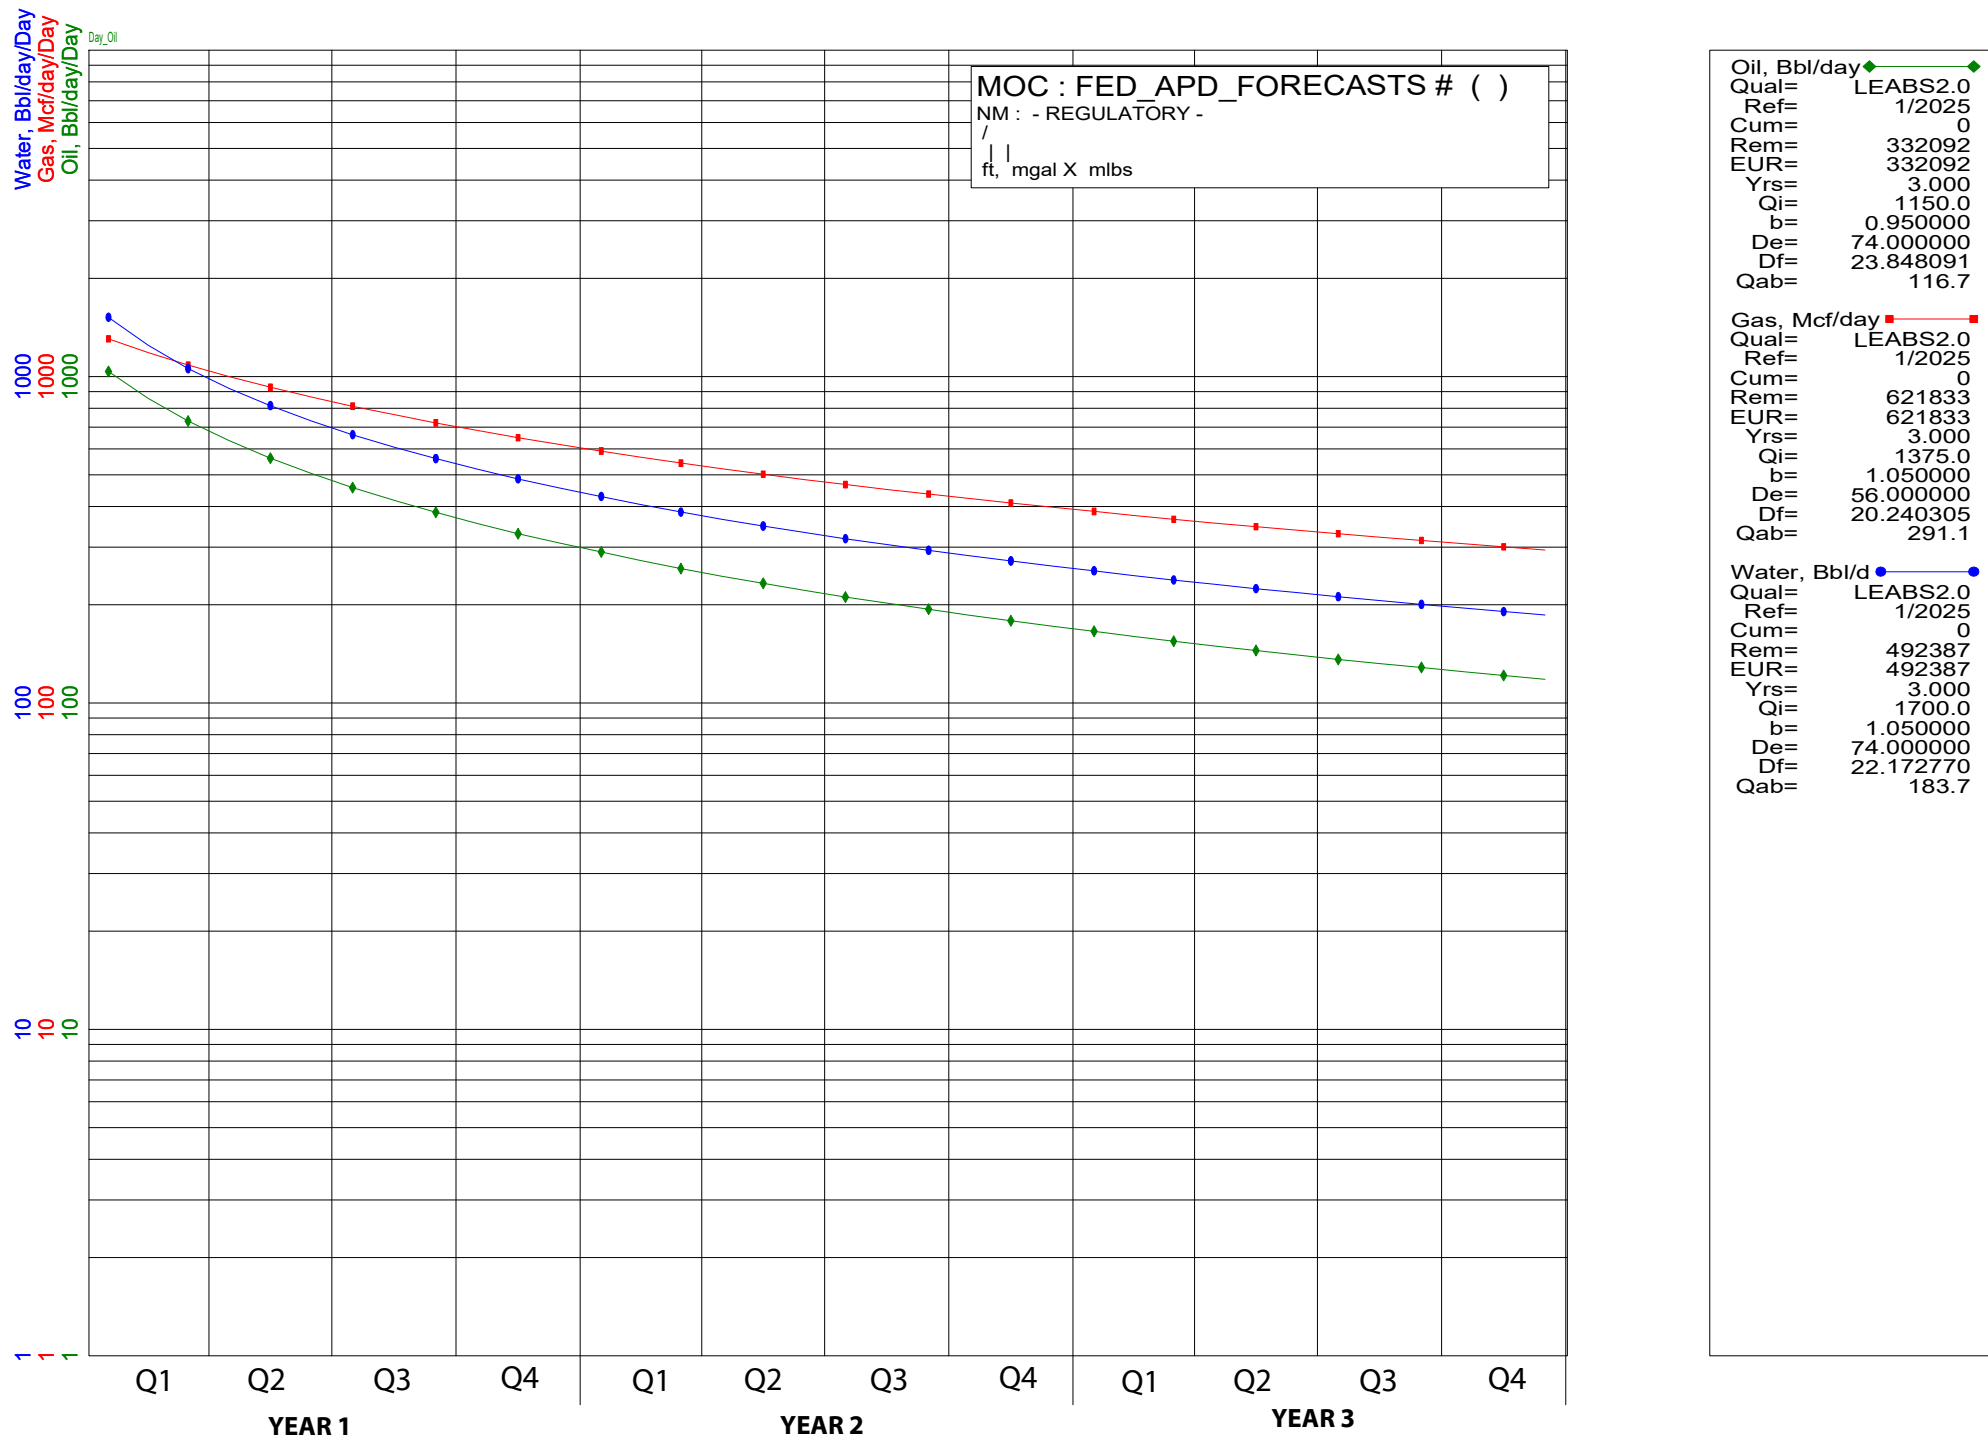

Mewbourne Oil Company, Red Hills West Unit 41H
Sec 10, T26S, R32E
SHL: 150' FSL 770' FWL (Sec 10)
BHL: 100' FNL 2160' FWL (Sec 3)

Well Location		GL: 3216'									
Point	Calls	Leases	Aliquot	Section	Township	Range	County	Lat	Long	TVD	MD
SHL	SHL: 150' FSL & 770' FWL (Sec 10)	NMNM128927	SWSW	10	26S	32E	Lea	32.0506909	- 103.6688593	0'	0'
KOP	KOP: 10' FSL & 2160' FWL (Sec 10)	NMNM105561	SESW	10	26S	32E	Lea	32.0503141	- 103.6643712	9,731'	9,842'
FTP	FTP: 100' FSL & 2160' FWL (Sec 10)	NMNM105561	SESW	10	26S	32E	Lea	32.0505615	- 103.6643728	10,039'	10,167'
PPP2	PPP2: 0' FSL & 2166' FWL (Sec 3)	NMNM105559	SESW	3	26S	32E	Lea	32.0649879	- 103.6644448	10,289'	15,507'
BHL	BHL: 100' FNL & 2160' FWL (Sec 3)	NMNM105559	NENW	3	26S	32E	Lea	32.0794066	- 103.6645167	10,274'	20,753'

GEOLOGY

Formation	Est. Top (TVD)	Lithology	Mineral Resources	Formation	Est. Top (TVD)	Lithology	Mineral Resources
Rustler	635'	Dolomite/Anhydrite	Usable Water	Yeso			
Castile				Delaware (Lamar)	4525'	Limestone/Dolomite	Oil/Natural Gas
Salt Top	745'	Salt	None	Bell Canyon	4555'	Sandstone	Oil/Natural Gas
Marker Bed 126				Cherry Canyon	5415'	Sandstone	Oil/Natural Gas
				Manzanita Marker	5725'	Limestone	Oil/Natural Gas
Salt Base	4305'	Salt	None	Basal Brushy Canyon	8435'	Sandstone	Oil/Natural Gas
Yates				Bone Spring	8665'	Limestone	Oil/Natural Gas
Seven Rivers				1st Bone Spring	9575'	Sandstone	Oil/Natural Gas
Queen				2nd Bone Spring	10045'	Sandstone	Oil/Natural Gas
Capitan				3rd Bone Spring	11335'	Sandstone	Oil/Natural Gas
Grayburg				Wolfcamp	11785'	Shale/Sandstone/Limestone	Oil/Natural Gas
San Andres							

Casing Program Design A						BLM Minimum Safety Factors	1.125	1.0	1.6 Dry	1.6 Dry
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
Surface	17.5"	0'	0'	710'	710'	13.375" 48# H40 STC	2.43	5.45	9.45	15.87
Intermediate	12.25"	0'	0'	3385'	3385'	9.625" 36# J55 LTC	1.13	1.96	2.75	3.43
Intermediate	12.25"	3385'	3385'	4307'	4307'	9.625" 40# J55 LTC	1.13	1.73	12.21	14.79
Intermediate	12.25"	4307'	4307'	4450'	4450'	9.625" 40# L80 LTC	1.31	2.44	128.85	160.14
Production	8.75"	0'	0'	9842'	9731'	7" 26# P110 LTC	1.27	2.03	2.71	3.24
Production	8.5"	9842'	9731'	20753'	10274'	4.5" 13.5# RYS110 CDC HTQ	1.66	1.93	2.90	2.86

All casing strings will be tested in accordance with 43 CFR Part 3172. Must have table for contingency casing.

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM’s minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50’ above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500’ into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100’ to 600’ below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Mewbourne Oil Company, Red Hills West Unit 41H
Sec 10, T26S, R32E
SHL: 150' FSL 770' FWL (Sec 10)
BHL: 100' FNL 2160' FWL (Sec 3)

Design A - Cement Program

Csg. Size		# Sacks	Wt., lb/gal	Yield, ft³/sack	TOC/BOC	Volume, ft³	% Excess	Slurry Description
13.375 in	LEAD	340	12.5	2.12	0' - 519'	730	100%	Class C: Salt, Gel, Extender, LCM
	TAIL	200	14.8	1.34	519' - 710'	268		Class C: Retarder
9.625 in	LEAD	700	12.5	2.12	0' - 3772'	1490	25%	Class C: Salt, Gel, Extender, LCM
	TAIL	200	14.8	1.34	3772' - 4450'	268		Class C: Retarder
7 in - 4.5 in	LEAD	190	12.5	2.12	5725' - 7048'	410	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
	TAIL	3600	15.6	1.18	7048' - 20753'	4248		Class H: Retarder, Fluid Loss, Defoamer
7" DV Tool @ 5725'								
2nd Stg 7 in	LEAD	70	12.5	2.12	4250' - 5029'	150	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
	TAIL	100	14.8	1.34	5029' - 5725'	134		Class C: Retarder, Fluid Loss, Defoamer

Pressure Control Equipment

BOP installed and tested before drilling hole, in:	Size, in	System Rated WP	Type			Tested to:	Rating Depth
12.25	13.375	5M	Annular		X	2500#/3500#	20,753'
		5M	Blind Ram		X	5000#	
			Pipe Ram		X		
			Double Ram				
			Other*				

*Specify if additional ram is utilized.

Equipment: Annular, Pipe Rams, Blind Rams, Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

Variance Request: A variance is requested for the use of a flexible choke line from the BOP to the choke manifold. See attached for hydrostatic test chart. Anchors are not required by manufacturer. Variance is requested to use a multi bowl wellhead. Variance is requested to perform break testing according to attached procedure. If a breaktesting variance is approved & incorporated, API Standard 53 will be incorporated and testing annular BOP to 70% of RWP or 100% of MASP, whichever is greater, will be performed.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR Part 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Y	Formation integrity test will be performed per 43 CFR Part 3172. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR Part 3172.
N	Mewbourne Oil Company request a variance to use a 5000 psi annular BOP with a 10,000 psi BOP stack.

Mud Program

Depth (MD)	Mud Wt., lb/gal	Mud Type
0' - 710'	8.4 - 8.6	Fresh Water
710' - 4450'	10.0 - 10.2	Brine
4450' - 9842'	8.6 - 9.7	Cut-Brine
9842' - 20753'	10.0 - 12.	OBM

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	Pason/PVT/Visual Monitoring
---	-----------------------------

Mewbourne Oil Company, Red Hills West Unit 41H
Sec 10, T26S, R32E
SHL: 150' FSL 770' FWL (Sec 10)
BHL: 100' FNL 2160' FWL (Sec 3)

Logging and Testing Procedures

Logging, Coring and Testing.	
N	Will run GR/CNL from KOP (9842') to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
Y	No logs are planned based on well control or offset log information. Offset Well: Red Hills West Unit #044H
N	Coring? If yes, explain:

Open & Cased Hole Logs Run In the Well

☐ Caliper	☐ Cement Bond Log	☐ CNL/FDC
☐ Compensated Densilog	☐ Compensated Neutron Log	☐ Computer Generated Log
☐ Dip Meter Log	☒ Directional Survey	☐ Dual Induction/Microresistivity
☐ Dual Lateral Log/Microspherically Focused	☐ Electric Log	☐ Formation Density Compensated Log
☐ Gamma Ray Log	☒ Measurement While Drilling	☐ Mud Log/Geological Lithology Log
☐ Other	☐ Porosity-Resistivity Log	☐ Sidewall Neutron Log
☐ Sonic Log	☐ Spontaneous Potential Log	☐ Temperature Log

Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	6430 psi
BH Temperature	140
Abnormal Temp, Pressure, or Geologic Hazards	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers in surface hole. Weighted mud for possible over-pressure in Wolfcamp formation.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

	H2S is present
X	H2S Plan attached

Mewbourne Oil Company, Red Hills West Unit 41H
Sec 10, T26S, R32E
SHL: 150' FSL 770' FWL (Sec 10)
BHL: 100' FNL 2160' FWL (Sec 3)

Other facets of operation

Mewbourne Oil Company also requests approval to implement additional designs as described below &/or in other attachments. BLM will be notified of elected design.

Offline Cementing Variance: Variance is requested to perform offline cementing according to the attached procedure. **R-111Q:** Mewbourne proposes performing Open Hole Cementing per R-111Q Guidelines if well is in Potash.

Casing Program Design B						BLM Minimum Safety Factors	1.125	1.0	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet
String	Hole Size	Top MD	Top TVD	Bot MD	Bot TVD	Csg. Size	SF Collapse	SF Burst	SF Jt	SF Body
Surface	17.5"	0'	0'	710'	710'	13.375" 48# H40 STC	2.43	5.45	9.45	15.87
Intermediate	12.25"	0'	0'	3385'	3385'	9.625" 36# J55 LTC	1.13	1.96	2.75	3.43
Intermediate	12.25"	3385'	3385'	4307'	4307'	9.625" 40# J55 LTC	1.13	1.73	12.21	14.79
Intermediate	12.25"	4307'	4307'	4450'	4450'	9.625" 40# L80 LTC	1.31	2.44	128.85	160.14
Production	8.75"	0'	0'	9842'	9731'	7" 26# P110 LTC	1.27	2.03	2.71	3.24
Liner	6.125"	9642'	9532'	20753'	10274'	4.5" 13.5# P110 LTC	1.66	1.93	2.25	2.81

All casing strings will be tested in accordance with 43 CFR Part 3172. Must have table for contingency casing.

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM’s minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50’ above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-Q?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500’ into previous casing?	
Is well located in R-111-Q and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100’ to 600’ below the base of salt?	
Is an open annulus used to satisfy R-111-Q? If yes, see cement design.	
Is an engineered weak point used to satisfy R-111-Q?	
If yes, at what depth is the weak point planned?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Design B - Cement Program

Csg. Size		# Sacks	Wt., lb/gal	Yield, ft³/sack	TOC/BOC	Volume, ft³	% Excess	Slurry Description
13.375 in	LEAD	340	12.5	2.12	0' - 519'	730	100%	Class C: Salt, Gel, Extender, LCM
	TAIL	200	14.8	1.34	519' - 710'	268		Class C: Retarder
9.625 in	LEAD	700	12.5	2.12	0' - 3772'	1490	25%	Class C: Salt, Gel, Extender, LCM
	TAIL	200	14.8	1.34	3772' - 4450'	268		Class C: Retarder
1st Stg 7 in	LEAD	90	12.5	2.12	5725' - 6767'	200	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
	TAIL	500	15.6	1.18	6767' - 9842'	590		Class H: Retarder, Fluid Loss, Defoamer
7" DV Tool @ 5725'								
2nd Stg 7 in	LEAD	70	12.5	2.12	4250' - 5029'	150	25%	Class C: Salt, Gel, Extender, LCM, Defoamer
	TAIL	100	14.8	1.34	5029' - 5725'	134		Class C: Retarder, Fluid Loss, Defoamer
4.5 in	LEAD	710	13.5	1.85	9642' - 20753'	1320	25%	Class H: Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-settling Agent



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

SUPO Data Report

01/23/2026

APD ID: 10400105495

Submission Date: 07/03/2025

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes

[Show Final Text](#)

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

RED_HILLS_WEST_UNIT_041H_ExistingRoadMap_20250617071517.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? NO

Other Description:

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H

Section 3 - Location of Existing Wells

Existing Wells Map? YES**Existing Well map Attachment:**

RED_HILLS_WEST_UNIT_041H_ExistingWellmap_20250617071527.pdf

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: Battery is in the SWSW of S10 T26S R32E. We will lay 1 4in buried FlexSteel flow line per well, with working pressure of 250# (approx. 850), 1 - 4in buried steel gas lift injection line with working pressure of 1200# (approx. 700), 1 - 4in buried poly gas supply line with work-ing pressure of 150# (approx. 750), & 1 - 2in buried poly air supply line with working pres-sure of 150# (approx. 750). These lines will be installed in one ditch going back to the Red Hills West Unit #010H Battery, following the attached route.

Production Facilities map:

RED_HILLS_WEST_UNIT_045H_ProductionFacility_FlowlineMap_20250107073038.pdf

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: RECYCLED

Water source use type:	DUST CONTROL
	CAMP USE
	SURFACE CASING
	INTERMEDIATE/PRODUCTION CASING
	STIMULATION

Source latitude: 32.033346**Source longitude:** -103.670277**Source datum:** NAD83**City:**

Water source permit type:	WATER WELL
----------------------------------	------------

OTHER

Water source transport method:	PIPELINE
---------------------------------------	----------

Source land ownership: STATE**Source transportation land ownership:** FEDERAL

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H**Water source volume (barrels):** 1940**Source volume (acre-feet):** 0.2500526**Source volume (gal):** 81480**Water source and transportation**

RED_HILLS_WEST_UNIT_041H_WaterSourceTransMap_20250617071537.pdf

Water source comments: LAT: 32.040694 LONG: -103.677351**New water well?** N**New Water Well Info****Well latitude:****Well Longitude:****Well datum:****Well target aquifer:****Est. depth to top of aquifer(ft):****Est thickness of aquifer:****Aquifer comments:****Aquifer documentation:****Well depth (ft):****Well casing type:****Well casing outside diameter (in.):****Well casing inside diameter (in.):****New water well casing?****Used casing source:****Drilling method:****Drill material:****Grout material:****Grout depth:****Casing length (ft.):****Casing top depth (ft.):****Well Production type:****Completion Method:****Water well additional information:****State appropriation permit:****Additional information attachment:****Section 6 - Construction Materials****Using any construction materials:** YES**Construction Materials description:** NWSE 26S 32E LAT: 32.042381 LONG: -103.676069**Construction Materials source location**

RED_HILLS_WEST_UNIT_041H_CalicheSourceTransMap_20250617071547.pdf

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H

Section 7 - Methods for Handling

Waste type: SEWAGE**Waste content description:** Human waste & grey water**Amount of waste:** 1500 gallons**Waste disposal frequency :** Weekly**Safe containment description:** 2,000 gallon plastic container**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE**Disposal type description:****Disposal location description:** City of Carlsbad Water Treatment facility**Waste type:** DRILLING**Waste content description:** Drill cuttings**Amount of waste:** 940 barrels**Waste disposal frequency :** One Time Only**Safe containment description:** Drill cuttings will be properly contained in steel tanks (20 yard roll off bins.)**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE**Disposal type description:****Disposal location description:** NMOCD approved waste disposal locations are CRI or Lea Land, both facilities are located on HWY 62/180, Sec. 27 T20S R32E.**Waste type:** GARBAGE**Waste content description:** Garbage & trash**Amount of waste:** 1500 pounds**Waste disposal frequency :** One Time Only**Safe containment description:** Enclosed trash trailer**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE**Disposal type description:****Disposal location description:** Waste Management facility in Carlsbad.

Reserve Pit

Reserve Pit being used? NO

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H**Temporary disposal of produced water into reserve pit?** NO**Reserve pit length (ft.)****Reserve pit width (ft.)****Reserve pit depth (ft.)****Reserve pit volume (cu. yd.)****Is at least 50% of the reserve pit in cut?****Reserve pit liner****Reserve pit liner specifications and installation description**

Cuttings Area

Cuttings Area being used? NO**Are you storing cuttings on location?** N**Description of cuttings location****Cuttings area length (ft.)****Cuttings area width (ft.)****Cuttings area depth (ft.)****Cuttings area volume (cu. yd.)****Is at least 50% of the cuttings area in cut?****Cuttings area liner****Cuttings area liner specifications and installation description**

Section 8 - Ancillary

Are you requesting any Ancillary Facilities?: N**Ancillary Facilities****Comments:**

Section 9 - Well Site

Well Site Layout Diagram:

RED_HILLS_WEST_UNIT_041H_WellSiteLayout_20250617071558.pdf

Comments: NONE

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H

Section 10 - Plans for Surface

Type of disturbance: New Surface Disturbance**Multiple Well Pad Name:** Red Hills West Unit 35 36 37 38 39 40 41
43 42 44**Multiple Well Pad Number:** 10

Recontouring

RED_HILLS_WEST_UNIT_041H_InterimReclamationMap_20250617071607.pdf

Drainage/Erosion control construction: None**Drainage/Erosion control reclamation:** None

Well pad proposed disturbance (acres): 8.47	Well pad interim reclamation (acres): 2.43	Well pad long term disturbance (acres): 6.04
Road proposed disturbance (acres): 0.03	Road interim reclamation (acres): 0	Road long term disturbance (acres): 0
Powerline proposed disturbance (acres): 0	Powerline interim reclamation (acres): 0	Powerline long term disturbance (acres): 0
Pipeline proposed disturbance (acres): 0.72	Pipeline interim reclamation (acres): 0	Pipeline long term disturbance (acres): 0
Other proposed disturbance (acres): 3.673	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0
Total proposed disturbance: 12.893	Total interim reclamation: 2.43	Total long term disturbance: 6.04

Disturbance Comments: In areas to be heavily disturbed, the top 6 inches of soil material, will be stripped and stockpiled on the perimeter of the well location to keep topsoil viable, and to make redistribution of topsoil more efficient during interim reclamation. Stockpiled topsoil should include vegetative material. Topsoil will be clearly segregated and stored separately from subsoils. Contaminated soil will not be stockpiled, but properly treated and handled prior to topsoil salvaging.

Reconstruction method: The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.

Topsoil redistribution: Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations including cuts & fills. To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used.

Soil treatment: NA**Existing Vegetation at the well pad:** Various brush & grasses**Existing Vegetation at the well pad****Existing Vegetation Community at the road:** Various brush & grasses**Existing Vegetation Community at the road****Existing Vegetation Community at the pipeline:** NA**Existing Vegetation Community at the pipeline**

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Existing Vegetation Community at other disturbances: NA

Existing Vegetation Community at other disturbances

Non native seed used? N

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? N

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? N

Seed harvest description:

Seed harvest description attachment:

Seed

Seed Table

Seed Summary	
Seed Type	Pounds/Acre

Total pounds/Acre:

Seed reclamation

Operator Contact/Responsible Official

First Name:

Last Name:

Phone:

Email:

Seedbed prep: Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.

Seed BMP: To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used.

Seed method: drilling or broadcasting seed over entire reclaimed area.

Existing invasive species? N

Existing invasive species treatment description:

Existing invasive species treatment

Weed treatment plan description: NA

Weed treatment plan

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Monitoring plan description: vii. All reclaimed areas will be monitored periodically to ensure that revegetation occurs, that the area is not redisturbed, and that erosion and invasive/noxious weeds are controlled.

Monitoring plan

Success standards: regrowth within 1 full growing season of reclamation.

Pit closure description: NA

Pit closure attachment:

Section 11 - Surface

Disturbance type: NEW ACCESS ROAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:


Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H**DOD Local Office:****NPS Local Office:****State Local Office:****Military Local Office:****USFWS Local Office:****Other Local Office:****USFS Region:****USFS Forest/Grassland:****USFS Ranger District:****Section 12 - Other****Right of Way needed?** N**Use APD as ROW?****ROW Type(s):****ROW****SUPO Additional Information:****Use a previously conducted onsite?** Y

Previous Onsite information: SEP 14 2020 Met w/RRC Surveying & staked location @ 205' FSL & 1890' FWL, Sec 9, T26S, R32E, Lea Co., NM. This location was unacceptable due to buried pipeline. Re-staked location @ 205' FSL & 2090' FWL, Sec 9, T26S, R32E, Lea Co., NM. (Elevation @ 3204'). Pad is 850x450. Topsoil E. Reclaim N, E, S 60. Approx. 60 of road needed off SW corner heading W to Red Hills West Unit #6H. 400x400 battery staked to the NE w/approx. 950 flow line. MOC electric on the NW corner. Need arc study/PA payment. BLM on-site required. Lat: 32.05082251 N, Long: -103.68185743 W NAD83. (BPS) SEP 18 2020 Met w/Paul Murphy (BLM). Surface location approved @ 205' FSL & 2090' FWL, Sec 9, T26S, R32E, Lea Co., NM. On-site date 9/17/2020.

Other SUPO

VICINITY MAP

NOT TO SCALE

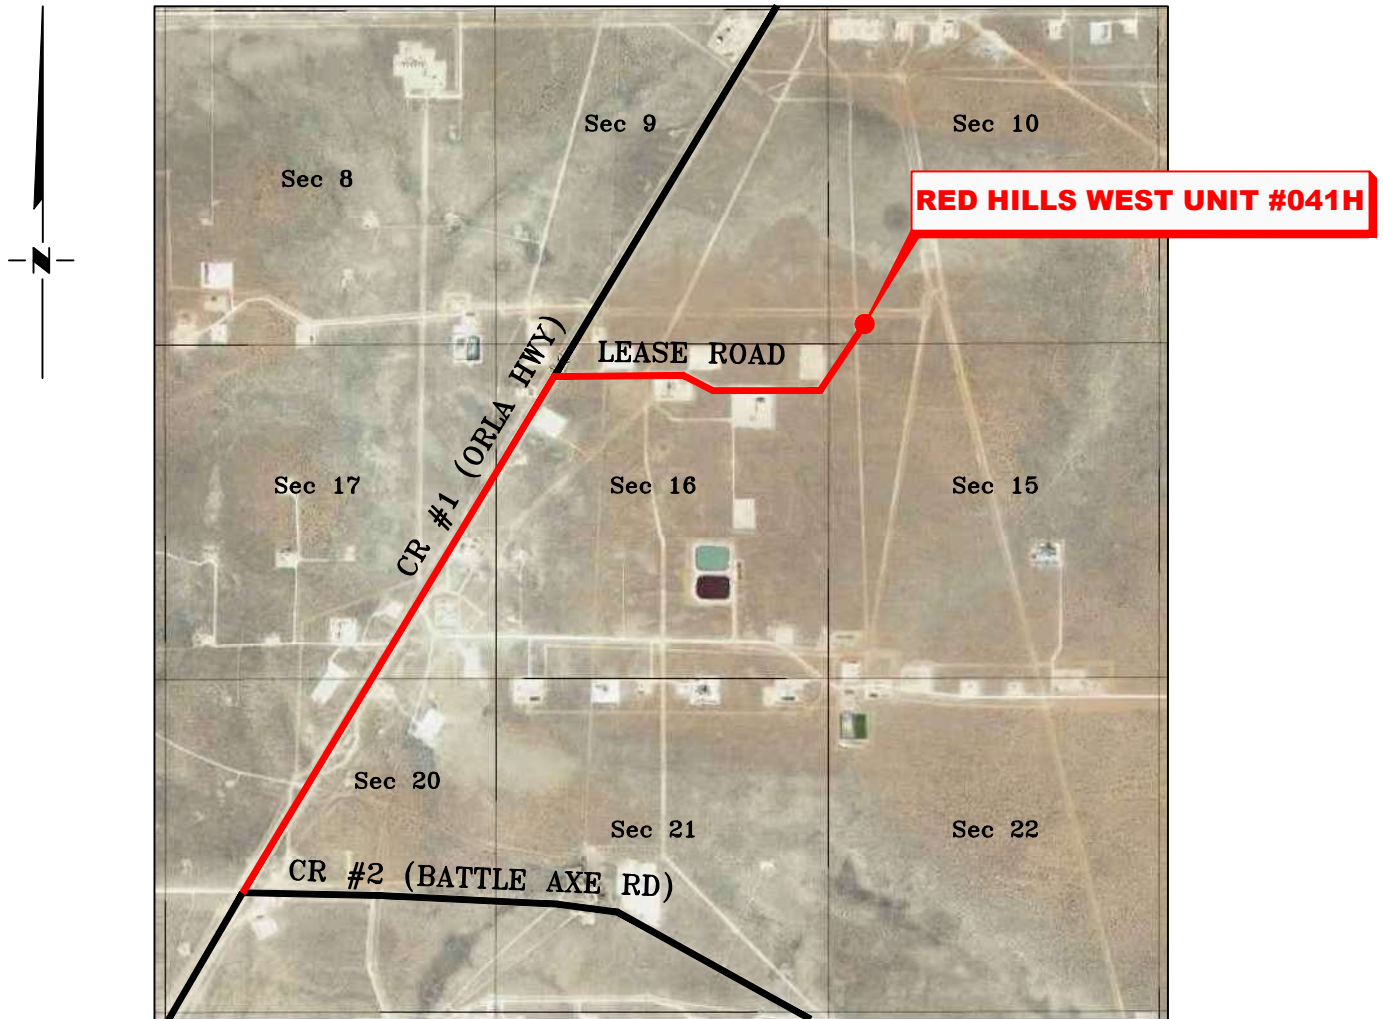

SECTION 10, TWP. 26 SOUTH, RGE. 32 EAST,
N. M. P. M., LEA COUNTY, NEW MEXICO

OPERATOR: Mewbourne Oil Company
LEASE: Red Hills West Unit
WELL NO.: 041H

LOCATION: 150' FSL & 770' FWL
ELEVATION: 3216'

Copyright 2016 – All Rights Reserved

NO.	REVISION	DATE
JOB NO.: LS23020140		
DWG. NO.: 23020140-3		




701 S. CECIL ST., HOBBS, NM 88240 (575) 964-8200

SCALE: N. T. S.
DATE: 02/11/2023
SURVEYED BY: ML/JV
DRAWN BY: RQ
APPROVED BY: RMH
SHEET: 1 OF 1

REDACTED

**MEWBOURNE OIL COMPANY
FLOWLINE FOR THE RED HILLS WEST UNIT WELL LOCATIONS
SECTION 9, T26S, R30E
N. M. P. M., LEA COUNTY, NEW MEXICO**

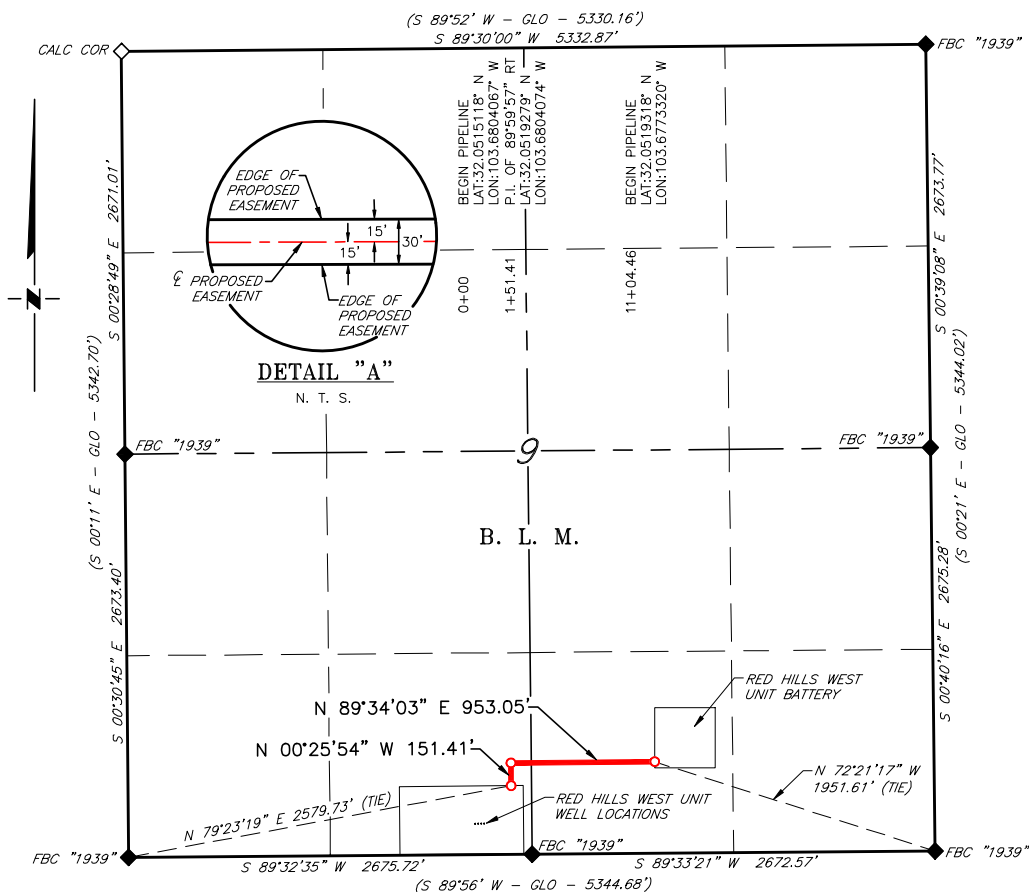



NO.	REVISION	DATE
JOB NO.:	LS23020227	
DWG. NO.:	23020227-1	





701 S. CECIL ST., HOBBS, NM 88240 (575) 964-8200

SCALE: 1" = 1000'
DATE: 03/03/2023
SURVEYED BY: ML/IW
DRAWN BY: LM
APPROVED BY: RMH
SHEET: 1 OF 1

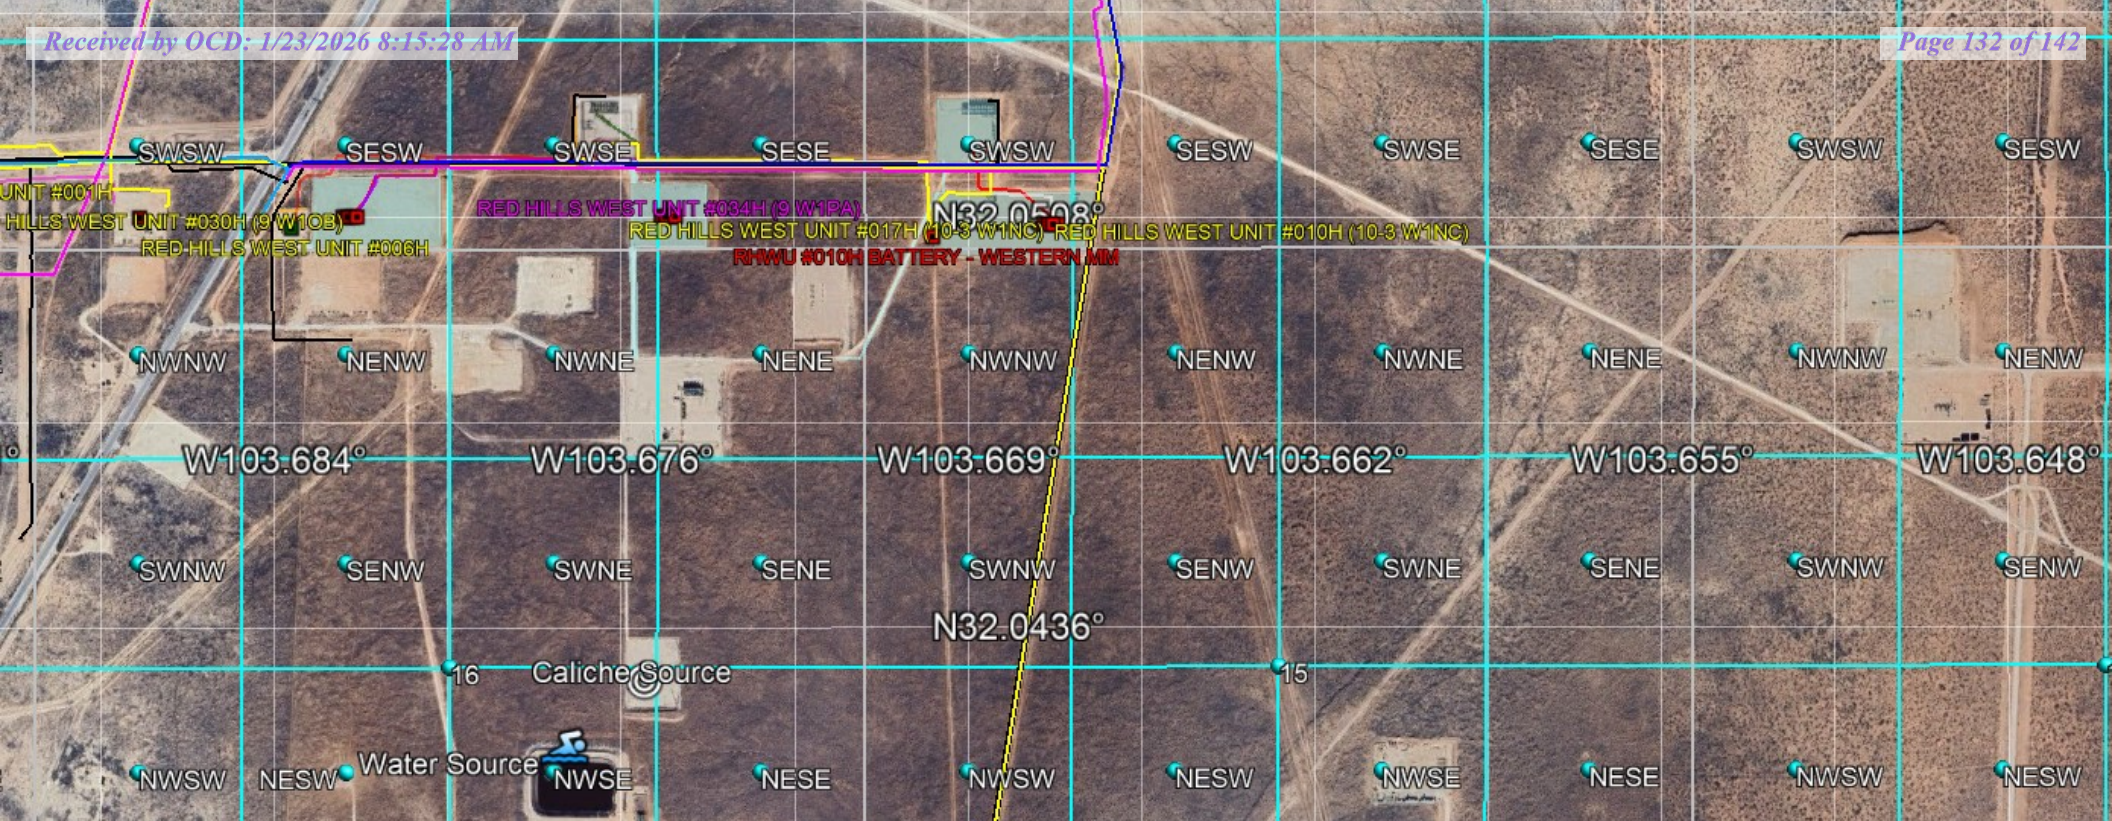

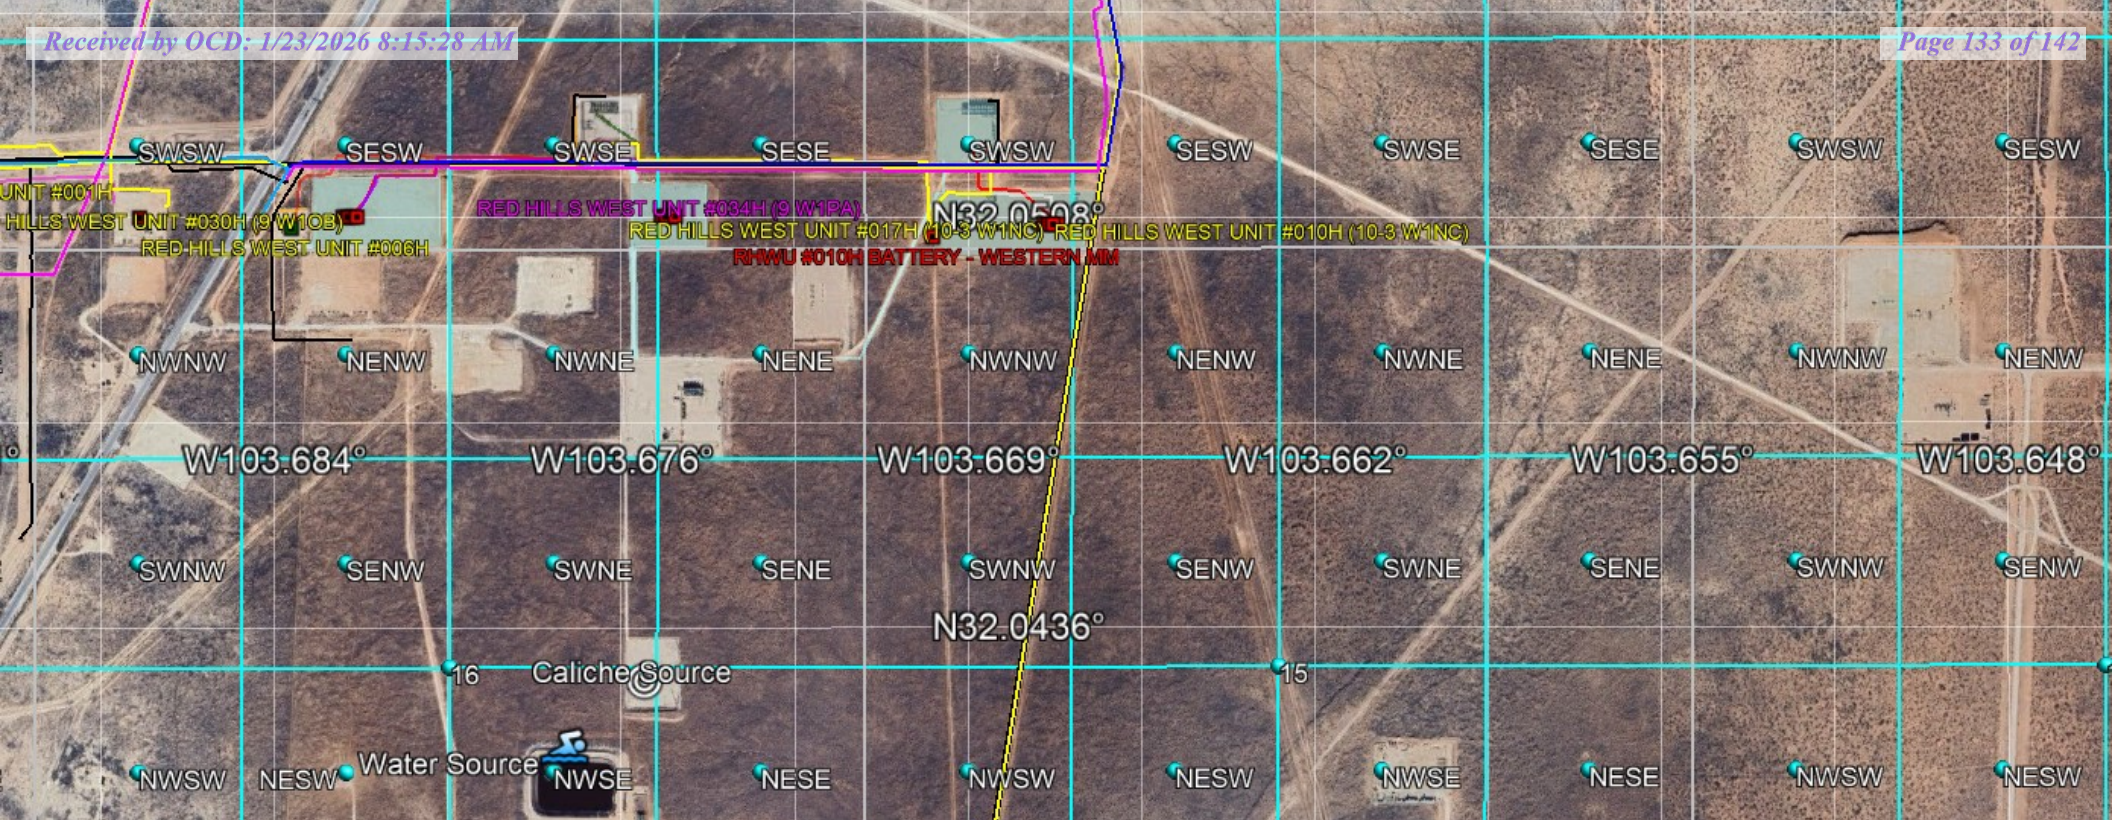

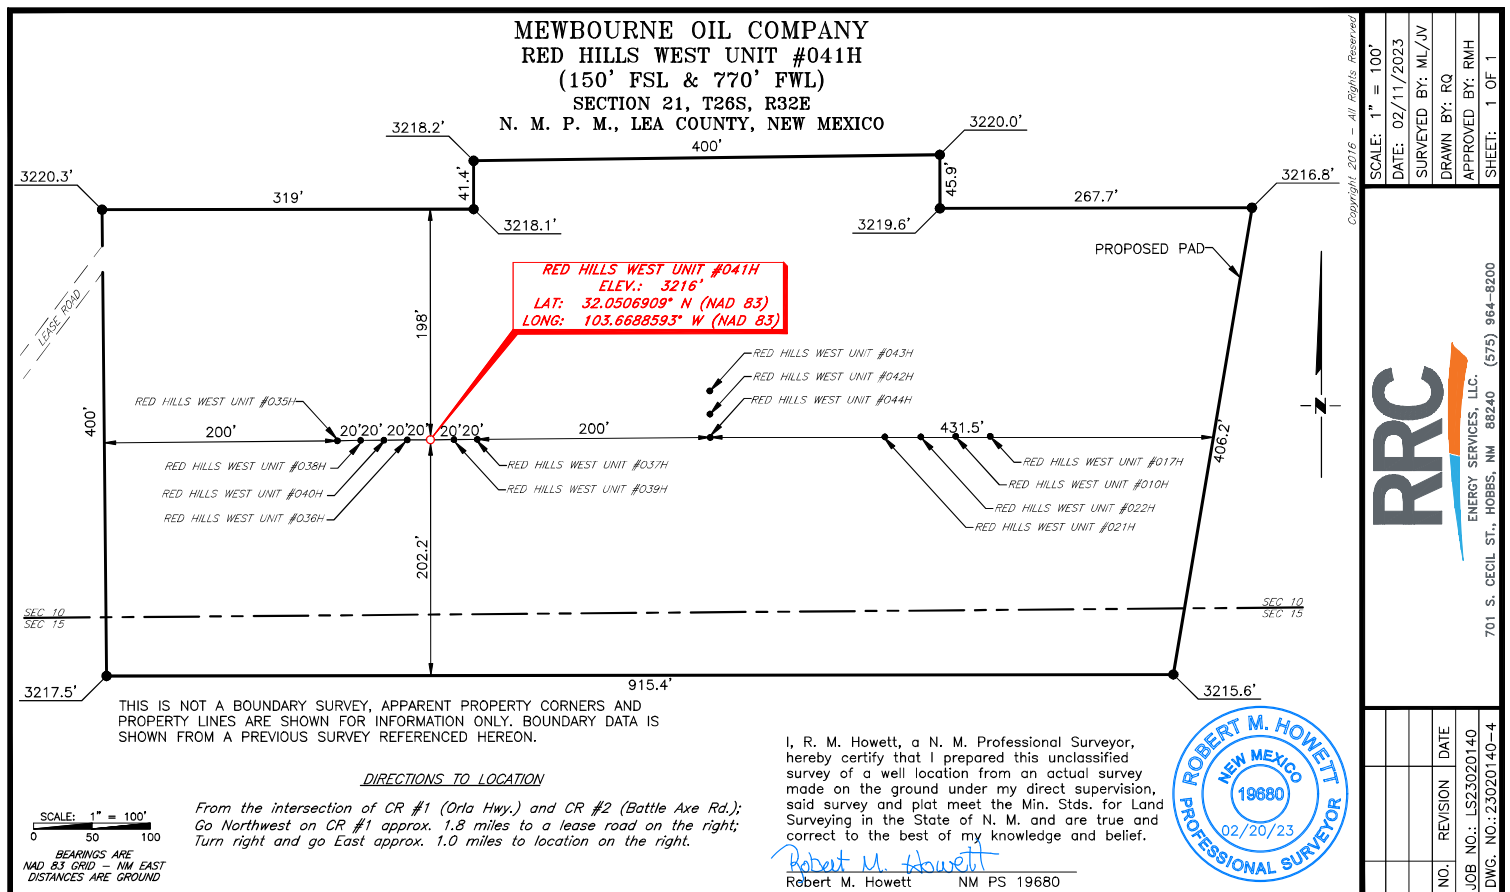

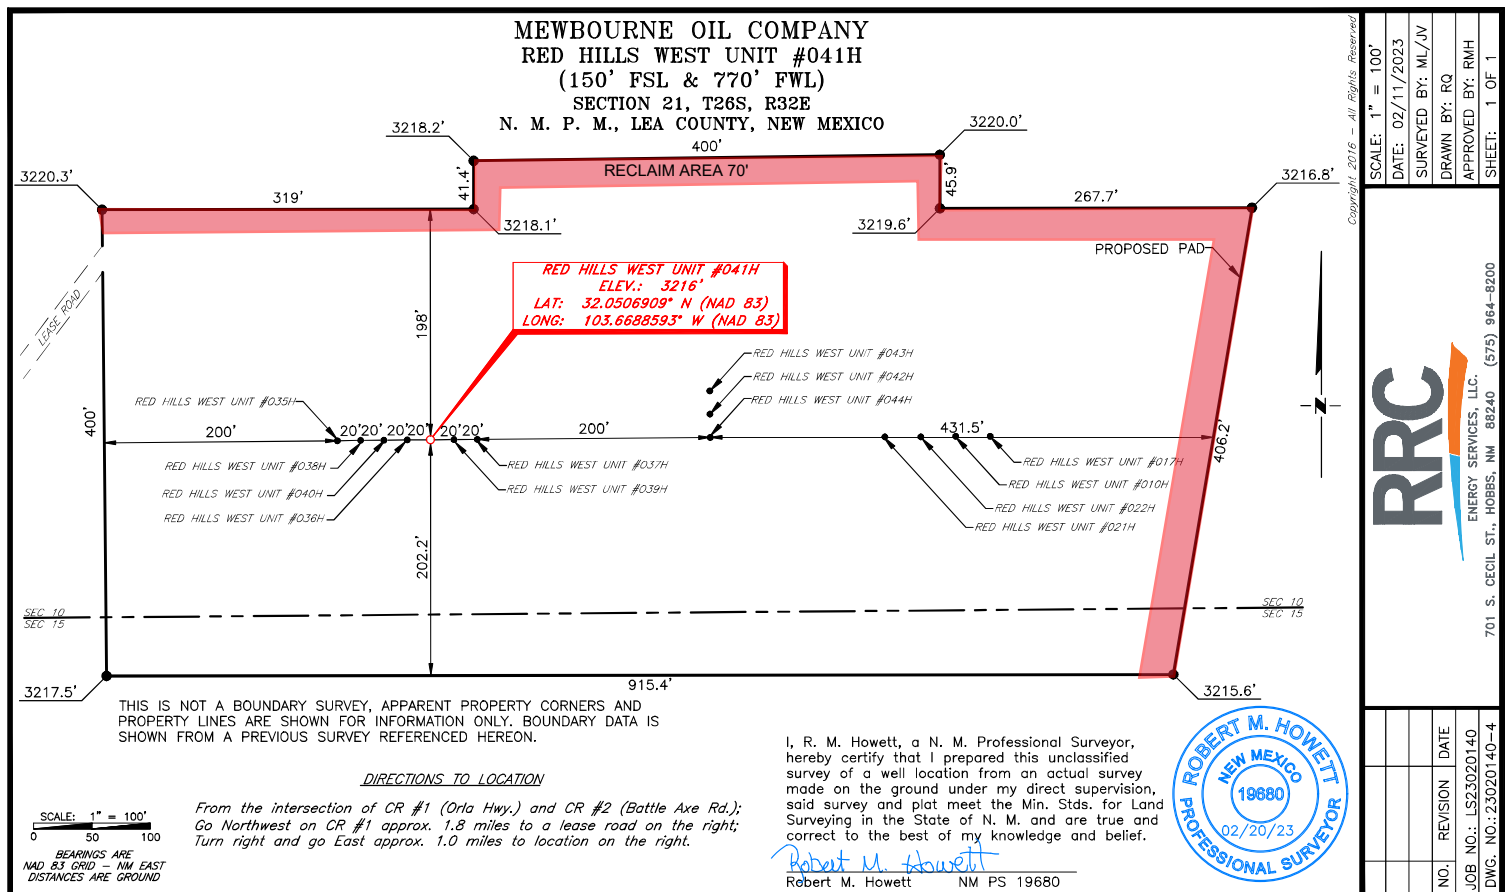



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

01/23/2026

APD ID: 10400105495

Submission Date: 07/03/2025

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD Surface Owner Description:

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit

Pit liner description:

Pit liner manufacturers

Precipitated solids disposal:

Decribe precipitated solids disposal:

Precipitated solids disposal

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule

Lined pit reclamation description:

Lined pit reclamation

Leak detection system description:

Leak detection system

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Lined pit Monitor description:

Lined pit Monitor

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information

Section 3 - Unlined

Would you like to utilize Unlined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Other PWD Surface Owner Description:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule

Unlined pit reclamation description:

Unlined pit reclamation

Unlined pit Monitor description:

Unlined pit Monitor

Do you propose to put the produced water to beneficial use?

Beneficial use user

Estimated depth of the shallowest aquifer (feet):

Precipitated Solids Permit

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic

Operator Name: MEWBOURNE OIL COMPANY**Well Name:** RED HILLS WEST UNIT**Well Number:** 41H**State****Unlined Produced Water Pit Estimated****Unlined pit: do you have a reclamation bond for the pit?****Is the reclamation bond a rider under the BLM bond?****Unlined pit bond number:****Unlined pit bond amount:****Additional bond information****Section 4 -****Would you like to utilize Injection PWD options?** N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Other PWD Surface Owner Description:****Injection PWD discharge volume (bbl/day):****Injection well mineral owner:****Injection well type:****Injection well number:****Injection well name:****Assigned injection well API number?****Injection well API number:****Injection well new surface disturbance (acres):****Minerals protection information:****Mineral protection****Underground Injection Control (UIC) Permit?****UIC Permit****Section 5 - Surface****Would you like to utilize Surface Discharge PWD options?** N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Other PWD Surface Owner Description :****Surface discharge PWD discharge volume (bbl/day):****Surface Discharge NPDES Permit?****Surface Discharge NPDES Permit attachment:****Surface Discharge site facilities information:****Surface discharge site facilities map:**

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Section 6 -

Would you like to utilize Other PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

PWD Surface Owner Description:

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type

Have other regulatory requirements been met?

Other regulatory requirements



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data

01/23/2026

APD ID: 10400105495

Submission Date: 07/03/2025

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 41H

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Bond

Federal/Indian APD: FED

BLM Bond number: NMB106714150

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 545758

ACKNOWLEDGMENTS

Operator: MEWBOURNE OIL CO P.O. Box 5270 Hobbs, NM 88240	OGRID: 14744
	Action Number: 545758
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

ACKNOWLEDGMENTS

☒	I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well.
-------------------------------------	--

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 545758

CONDITIONS

Operator: MEWBOURNE OIL CO P.O. Box 5270 Hobbs, NM 88240	OGRID: 14744
	Action Number: 545758
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
mleal	Cement is required to circulate on both surface and intermediate1 strings of casing.	1/23/2026
jeffrey.harrison	If the method of isolation was not by circulation, a CBL must be performed; if strata isolation is not achieved, then remediation will be required before further operations.	4/8/2026
jeffrey.harrison	Any string of casing or liner that is not circulated to surface must have a minimum of 200' of cement tie-back into the previous string of casing.	4/9/2026
jeffrey.harrison	Once the DV tool is opened and circulation is established, it needs to be noted if cement is circulated off of the top of the DV tool and how much.	4/9/2026
jeffrey.harrison	If cement is not circulated off of the top of the DV tool, then a CBL will be required. Depending upon the results of the CBL, remedial action may be required prior to drilling operations continuing.	4/9/2026
jeffrey.harrison	File As Drilled C-102 and a directional Survey with C-104 completion packet.	4/9/2026
jeffrey.harrison	Notify the OCD 24 hours prior to casing & cement.	4/9/2026
jeffrey.harrison	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	4/9/2026
jeffrey.harrison	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	4/9/2026