

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐

2. NAME OF OPERATOR  
El Paso Natural Gas Company

3. ADDRESS OF OPERATOR  
P.O. Box 289, Farmington, New Mexico 87401


4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1700'N, 1800'W, Sec. 12, T26N, R7W  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☒  
(other)

SUBSEQUENT REPORT OF:

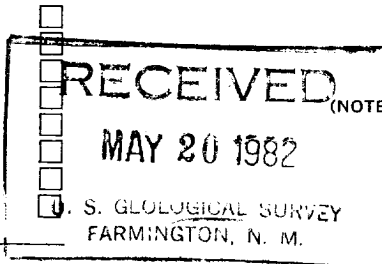

5. LEASE  
SF 079160

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
Rincon

9. WELL NO.  
14

10. FIELD OR WILDCAT NAME  
So. Blanco Pictured Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
NW/4 Sec. 12, T-26-N, R-7-W

12. COUNTY OR PARISH  
Rio Arriba

13. STATE  
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
6431' GL

(NOTE) Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Recommended Procedure To Plug and Abandon:

- 1) Pull 1" tubing.
- 2) GIH w/ 1 1/4" workstring.
- 3) Spot a 90 sk cement plug to cover open hole section and fill casing to 2405', 50' above Fruitland formation top (2455').
- 4) Spot a 21 sk (100 ft) cement plug to cover Ojo Alamo formation (top 1913').
- 5) Perforate squeeze holes at 205' and circulate annulus. Spot an 85 sk cement plug to fill annulus and casing to surface.
- 6) Install dry hole marker.
- 7) Clear and re-seed location.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED James F. Sims TITLE Production Engineer DATE May 19, 1982

APPROVED BY  
CONDITIONS OF APPROVAL IF ANY:

James F. Sims  
DISTRICT ENGINEER


RECEIVED  
MAY 26 1982  
OIL CON. COM.

See Instructions on Reverse Side DIST. 3

NM000

# Rincon Unit # 14

## Present Conditions

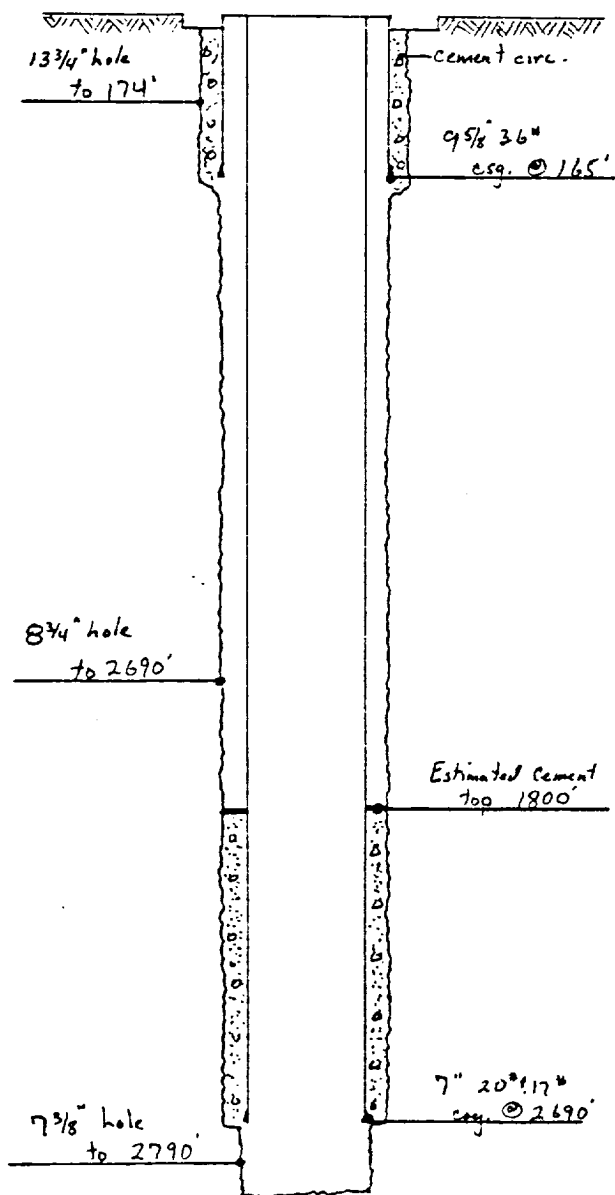

## Proposed Abandonment

