


U. S. LAND OFFICE **SF 079035-A**

SERIAL NUMBER

LEASE OR PERMIT TO PROSPECT

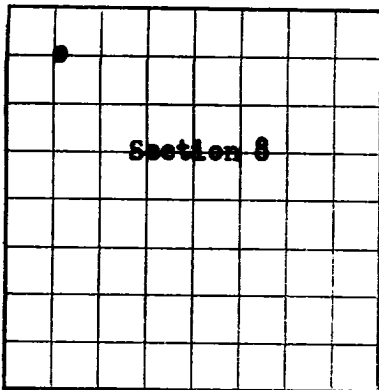


LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company **Lowry et al Operating Account** Address **616 Central S.E., Albuquerque, N.M.**Lessor or Tract Field **S. Blanco Tocito** State **New Mexico**Well No. **T-125** Sec. **8** T. **26N** R. **6W** Meridian **NMPM** County **Rio Arriba**Location **660** ft. **{S.}** of **N** Line and **660** ft. **{E.}** of **W** Line of **Section 8** Elevation **6705** **DF**
(Derivative floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed Date **October 12, 1953**Title **Assistant General Manager**

The summary on this page is for the condition of the well at above date.

Commenced drilling **September 4**, 19 **53** Finished drilling **October 3**, 19 **53**

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from **6830** to **6846** No. 4, from

No. 2, from to No. 5, from

No. 3, from to No. 6, from

IMPORTANT WATER SANDS

No. 1, from to No. 3, from to

No. 2, from to No. 4, from to

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
10-3/4"	29,32.75	40.5	8RA5J	444.24	Reg.		-	-	Surface
7"	21.8	26	8R	6951.35	Reg.		6831	6846	Production

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
10-3/4"	455	175	Plug		
7"	6881	200	Plug		
2"	6859	-	Swing	-	-

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth set

Adapters—Material Size

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
	None					

TOOLS USED

Rotary tools were used from **Surface** feet to **TD 6889** feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

DATES

October 9, 19 **53**Put to producing **October 9**, 19 **53**The production for the first 24 hours was **612** barrels of fluid of which **100** % was oil; % emulsion; % water; and % sediment. Gravity, °Bé. **44.2 @ 60°**

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.


EMPLOYEES

R.T. Corbett Drilling Company Driller

, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	200	200	Surface
200	435	235	Sand and shale
435	591	156	Shale
591	1984	1393	Sand and shale
1984	2150	166	Shale
2150	4650	2500	Shale and sand
4650	6800	2150	Shale
6800	6889	89	Sand and shale
6889	6861	28	Cement
			Perforated 7" casing 6831 to 6846' with 6 shots per foot
			TOPS:
			Pictured Cliffs - 3069
			Cliff House - 4772'
			Tocito - 6830

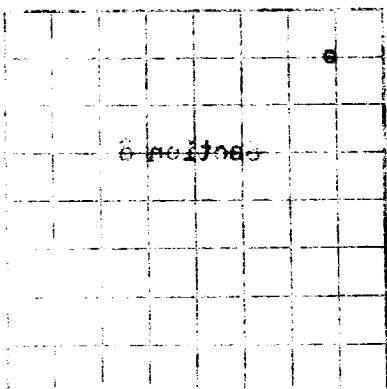

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company: Lowry et al. Drilling Company, Address: 614 Broadway, New York, N.Y.
Location of Well: Sec. 8, T. 25N. R. 35W. Meridian
Location of Well: 600 ft. of line and 600 ft. of line
The information given herewith is a complete and correct record of the work done on the well, as far as can be determined from all available records.

Date: October 12, 1923
Name of Well: Lowry et al. Drilling Company
Name of Driller: Lowry et al. Drilling Company
Name of Owner: Lowry et al. Drilling Company

OIL OR GAS SANDS OR ZONES

Depth	From	To	Remarks
No. 1	from	600	
No. 2	from	600	
No. 3	from	600	
No. 4	from	600	
No. 5	from	600	
No. 6	from	600	
No. 7	from	600	
No. 8	from	600	
No. 9	from	600	
No. 10	from	600	

CASING RECORD

Depth	From	To	Remarks
No. 1	from	600	
No. 2	from	600	
No. 3	from	600	
No. 4	from	600	
No. 5	from	600	
No. 6	from	600	
No. 7	from	600	
No. 8	from	600	
No. 9	from	600	
No. 10	from	600	

HISTORY OF OIL OR GAS WELL

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was added, state its size and location. If the well has been dynamited, give date, size, position, and number of shots. If any other changes were made in the casing, state fully, and if any casing was added, state its size and location.

MUDDING AND CEMENTING RECORD

Depth	From	To	Remarks
No. 1	from	600	
No. 2	from	600	
No. 3	from	600	
No. 4	from	600	
No. 5	from	600	
No. 6	from	600	
No. 7	from	600	
No. 8	from	600	
No. 9	from	600	
No. 10	from	600	

TOOLS AND MATERIALS

Depth	From	To	Remarks
No. 1	from	600	
No. 2	from	600	
No. 3	from	600	
No. 4	from	600	
No. 5	from	600	
No. 6	from	600	
No. 7	from	600	
No. 8	from	600	
No. 9	from	600	
No. 10	from	600	

TOOLS USED

Depth	From	To	Remarks
No. 1	from	600	
No. 2	from	600	
No. 3	from	600	
No. 4	from	600	
No. 5	from	600	
No. 6	from	600	
No. 7	from	600	
No. 8	from	600	
No. 9	from	600	
No. 10	from	600	

DATES

Depth	From	To	Remarks
No. 1	from	600	
No. 2	from	600	
No. 3	from	600	
No. 4	from	600	
No. 5	from	600	
No. 6	from	600	
No. 7	from	600	
No. 8	from	600	
No. 9	from	600	
No. 10	from	600	

EMPLOYEES

Depth	From	To	Remarks
No. 1	from	600	
No. 2	from	600	
No. 3	from	600	
No. 4	from	600	
No. 5	from	600	
No. 6	from	600	
No. 7	from	600	
No. 8	from	600	
No. 9	from	600	
No. 10	from	600	

FORMATION RECORD

Depth	From	To	Remarks
No. 1	from	600	
No. 2	from	600	
No. 3	from	600	
No. 4	from	600	
No. 5	from	600	
No. 6	from	600	
No. 7	from	600	
No. 8	from	600	
No. 9	from	600	
No. 10	from	600	

Remarks: Well was drilled to a depth of 600 feet. The well was found to be dry. The well was abandoned.

Remarks: Well was drilled to a depth of 600 feet. The well was found to be dry. The well was abandoned.