


U. S. LAND OFFICE
SERIAL NUMBER **03551**
LEASE OR PERMIT TO PROSPECT

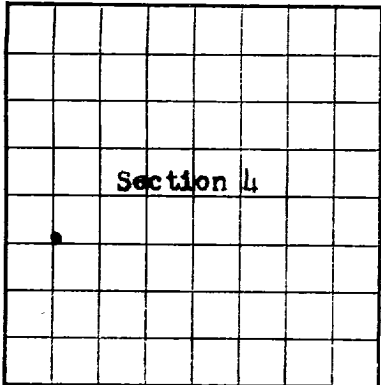

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company **Lowry et al Operating Account** Address **616 E. Central, Albuquerque, N. Mexico**
Lessor or Tract **Tim G. Lowry - Operator** Field **South Blanco Loc. Ext. New Mexico**
Well No. **11-52-85** Sec. **4** T. **26N** R. **6W** Meridian **N.M.P.M.** County **Rio Arriba**
Location **198 ft. (N.)** of **S** Line and **660 ft. (E.)** of **W** Line of **Section 4** Elevation **6482' DP**
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed *[Signature]*

Date **July 2, 1953** Title **Asst. General Manager**

The summary on this page is for the condition of the well at above date.

Commenced drilling **May 6**, 19**53** Finished drilling **June 4**, 19**53**

OIL OR GAS SANDS OR ZONES
(Denote gas by G)

No. 1, from **6656½** to **6672½** No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
10-3/4"	40.5	8R		438.25	Reg.	-	-	-	Surface
7"	23	8R		6701.25	Reg.	-	-	-	Production
Tubing									
2" EUE	4.79	8R		6684.55'	None	-	-	-	Tubing

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
10-3/4"	445	175	Plug	-	-
7"	6641	200	Plug	-	-
2"	6640	000	None	-	-

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
	NONE					

TOOLS USED

Rotary tools were used from **surface** feet to **6691** feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

June 21, 19**53** Put to producing _____, 19____

The production for the first 24 hours was **23.05** barrels of fluid of which **100** % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, °Bé **44.2 corrected**

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Corbett Drilling Company, Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	267	267	Surface Sand
267	445	178	Sand & Shale
445	1495	1050	Shale & Sand
1495	2902	1407	Shale
2902	3116	214	Sand & Shale
3116	3246	130	Shale
3246	3480	234	Sand & Shale
3480	3653	173	Shale
3653	3753	100	Sand & Shale
3753	4672	919	Shale
4672	4890	218	Sand & Shale
4890	6620	1730-	Shale
6620	6691	71	Sand & Shale

Tops
Pictured Cliffs 2984'
Cliff House 4583'
Menafee 4605'
Point Lookout 5238'
Tocito 6656½'

A blank sheet of graph paper with a grid pattern. The grid consists of small squares formed by horizontal and vertical lines. There are no markings or text on the page.

1571-1572 1943-1944

A circular ink stamp, likely from a government or military office. The text is arranged in a circular pattern. At the top, the word "RECEIVED" is written in a bold, sans-serif font. Below it, the date "JUL 10 1953" is stamped. Further down, the words "OIL CON. COM." are visible, and at the bottom, "DIST. B" is printed. The stamp is slightly faded and has a rough, hand-stamped appearance.

[illegible]

EXEMPT FROM DISCLOSURE

FORMATION RECORD—Continued